



# RADIO TEST REPORT

(for Bluetooth Low Energy)

Project No. : JB-Z0365  
 Client : Sony Corporation  
 Address : 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan  
 Type of Equipment : Remote commander  
 Model No. : RMT-NYSNO10  
 FCC ID : AK8RMTNYSNO10  
 Regulation Applied : 47 CFR Part 15 Subpart C  
**Final Judgment** : **Passed**  
 Sample Receipt : October 05, 2017  
 Testing : October 25, 2017- November 04, 2017  
 Reported : November 14, 2017

Reported by :

Approved Signatory :



Takanori Oho  
 Technical Manager  
 EMC/RF Test Laboratory, Main Lab.  
 Design Technology Division  
 Sony Global Manufacturing & Operations Corporation

Teruki Kurihara  
 Technical Manager  
 EMC/RF Test Laboratory, Main Lab.  
 Design Technology Division  
 Sony Global Manufacturing & Operations Corporation

### Notice

- \* These test results relate only to the items (combination equipment, test configuration, operation condition etc.) tested.
  - \* This report shall not be reproduced except in full, without written approval of the laboratory.
  - \* This report must not be used by the client to claim product endorsement by A2LA or any agency of the U.S. Government.
  - \* All test results are traceable to the national and / or international standards.
- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory.



TESTING CERT #3203.01

## TABLE OF CONTENTS

<b>1. General Information .....</b>	<b>3</b>
1.1. Description of Equipment Under Test (EUT).....	3
1.2. Summary of Test Result.....	3
1.3. Tested Methodology .....	4
1.4. Measurement Procedures .....	4
1.5. Test Facility.....	7
1.6. Uncertainty .....	7
<b>2. System Test Configuration.....</b>	<b>8</b>
2.1. Validation .....	8
2.2. Test Operating Conditions .....	8
2.3. EUT Modifications .....	8
2.4. Configuration of Tested System .....	9
<b>3. Test Data.....</b>	<b>11</b>
3.1. 6dB Bandwidth.....	11
3.2. Maximum Peak Conducted Output Power.....	12
3.3. Power Spectral Density .....	13
3.4. Radiated Spurious Emissions.....	14
3.5. Conducted Spurious Emissions for Band Edge.....	40
<b>4. Method of Calculation.....</b>	<b>41</b>
<b>5. List of Test Equipment .....</b>	<b>43</b>
5.1. Antenna-port Conducted Measurements.....	43
5.2. Radiated Spurious Emissions.....	43
<b>6. Photographs of test setup .....</b>	<b>44</b>
6.1. Antenna-port Conducted Measurements Photo(s) .....	44
6.2. Radiated Spurious Emissions Measurement Photo(s).....	45

Note

- indicates that the listed condition, standard or equipment is applicable for this report.
- indicates that the listed condition, standard or equipment is not applicable for this report.

## 1. General Information

### 1.1. Description of Equipment Under Test (EUT)

#### General specification

Test Sample Condition :  Prototype  Pre-production  Mass-production  
 Type of Equipment : Remote commander  
 Trade Name : SONY  
 Model No. : RMT-NYSNO10  
 Serial No. : 5000666, 5001094  
 Power Rating : DC 3.0 V

#### Radio specification

Function of the Equipment : Transceiver  
 Operating Frequency : 2402 - 2480 MHz  
 Modulation Type : GFSK  
 Channel Spacing : 2 MHz  
 Channel Bandwidth : 2 MHz  
 Number of channels : 40  
 Antenna Type : Pattern Antenna  
 Antenna connector Type : None  
 Antenna Gain : 1.0 dBi  
 Operating Temperature : - 10 to +40 deg.C

### 1.2. Summary of Test Result

47 CFR Part 15 Subpart C § 15.247 [DTS]

Test Item	Worst Margin	Test Frequency band	Results
AC Power-line Conducted Emissions	-	150 kHz - 30 MHz	N/A *2
6dB Bandwidth	Refer to the test data	Carrier	Complied
Maximum Peak Conducted Output Power	30.78 dB	Carrier	Complied
Power Spectral Density	24.24 dB	Carrier	Complied
Radiated Spurious Emissions	3.9 dB (AV) 4960.014 MHz Vertical	9 kHz - 25 GHz (excluding carrier and band edge)	Complied
Conducted Spurious Emissions for Band Edge *1	16.91 dB 2400.00 MHz	Carrier band edge	Complied

\*1: Conducted Spurious Emission was tested for the only frequencies in the non-restricted carrier band edges, since the spurious emissions in other non-restricted band were complied with Radiated Spurious Emission measurement.

\*2: This item was not applied to the EUT since its transmission is stopped when the battery is being charged by the PC connected to AC Power-line.

#### Other requirements

Part 15.31(e) Supply voltage requirement

: Complied (The EUT was tested with a new battery)

Part 15.203 / 212 Antenna requirement

: Complied (The EUT has an internal antenna which cannot be replaced by users)

1.3. Tested Methodology

Test Standard : 47 CFR Part15 Subpart C  
 Test Method : ANSI C63.10 - 2013  
 KDB 558074 D01 DTS Meas. Guidance v04

Test Condition

AC Power-line Conducted Emissions

Dimensions of the EUT table : 0.8m height, 2m width and 1m depth.

Radiated Spurious Emissions

Test Distance :  3 m  10m (9 kHz - 30 MHz)  
 3 m  10m (30 - 1000 MHz)  
 3 m (1 - 25 GHz)

Dimensions of the EUT table : 0.8m (below 1 GHz) or 1.5m (above 1 GHz) height, 2m width and 1m depth.

1.4. Measurement Procedures

We performed the measurements in accordance with NV3-06, available upon the request.

- No deviation
- Deviation from the above procedure

\_\_\_\_\_

The summary of the above procedure is mentioned below

Antenna-port Conducted Measurement

1. Antenna-port of the EUT was connected to the power sensor (Maximum peak conducted output power) or spectrum analyzer. (other test items).
2. For each EUT operation mode, the Antenna-port Conducted Measurements were measured with power meter or spectrum analyzer.

Test Item	Detector	RBW
* Antenna-port Conducted Measurements		
6dB Bandwidth	Peak	100 kHz
Maximum Peak Conducted Output Power	Peak	-
Power Spectral Density	Peak	3 kHz
Conducted Spurious Emissions for Band Edge	Peak	100 kHz

Radiated Spurious Emissions

- The non-conductive table (EUT table) made of ( FRP,  Styrene Foam,  other non-conductive material) was placed in the center of the turntable.
- The EUT was placed on the center of the tabletop.
- The test antenna was placed away from the EUT at test distance.
- The limits compensated the distance factor with follows;  
 $9 \text{ kHz} - 490 \text{ kHz [Limit at 3m]} = [\text{Limit at 300m}] + 40\log(300[\text{m}] / 3[\text{m}])$   
 $490 \text{ kHz} - 30 \text{ MHz [Limit at 3m]} = [\text{Limit at 30m}] + 40\log(30[\text{m}] / 3[\text{m}])$
- Find the worst arrangement of the EUT as follows;
  - Rotate the turntable and/or scanning the antenna.
  - On every condition, explore the highest emissions with the spectrum analyzer. (9 kHz - 25 GHz, peak detector)
- On the worst arrangement of the EUT found in above, choose the three highest harmonics or spurious emissions on the spectrum data. (\*excluding carrier band edges)  
 The final measurements are performed with all test operating modes for these emissions as follows;

The test antenna and the turntable were performed with follows;

	9 kHz - 30 MHz	30 MHz - 1000 MHz	1 GHz - 25 GHz
Antenna	Loop Antenna	Bi-conical Antenna, Log-periodic Antenna	Horn Antenna
Antenna scanning range	1m, Vertical, 360 degrees	1 - 4m, Horizontal and Vertical	1 - 4m *, Horizontal and Vertical
Turntable rotating range	360 degrees	360 degrees	360 degrees

\*: When the measurement frequencies above 1 GHz, final measurements are performed keeping the antenna in the "cone of radiation" from EUT area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.

Instruments settings were carried out with follows;

	9 kHz - 90 kHz 110 kHz - 490 kHz	90 kHz- 110 kHz 490 kHz - 30 MHz	30 MHz - 1000 MHz	1 GHz - 25 GHz
Detector	Peak / Average	Quasi-peak	Quasi-peak	Peak / Average
RBW	200 Hz (6dB) or 9 kHz (6dB) *1	200 Hz (6dB) or 9 kHz (6dB) *1	120 kHz (6dB)	1 MHz (6dB)
VBW	N/A	N/A	N/A	3 MHz (for peak) 10 kHz (for average) *2
Instrument	EMI test receiver	EMI test receiver	EMI test receiver	Spectrum analyzer

\*1: When the measurement frequencies below 150 kHz, RBW: 200 Hz was used.

\*2: VBW setting (for average) was higher than 1/T. (T is the minimum transmission duration)

- If the final measurement result exceeded the limit in non-restricted band(excluding carrier band edges), the measurement is carried out additionally with follows;

Measurement points

- Fundamental Frequency
- Frequency that exceeded the limit in non-restricted band (excluding carrier band edges)

	9 kHz - 150 kHz	150 kHz - 30 MHz	30 MHz - 25 GHz
Detector	Peak	Peak	Peak
RBW	300 Hz (6dB) *	10 kHz (6dB) *	100 kHz (6dB)
Instrument	Spectrum analyzer	Spectrum analyzer	Spectrum analyzer

\*: Correction factor of RBW was compensated to a measurement result by the following formula.

$$C.F. \text{ of RBW [dB]} = 10 * \log (100 \text{ kHz} / \text{used RBW})$$

- If the final average measurement result exceeded the limit in the authorized band edge, the integration method is carried out with follows;

	2483.5 - 2485.5 MHz
Detector	Peak
RBW	100 kHz (6dB)
Instrument	Spectrum analyzer
Function	Channel Power (integration BW : 1 MHz)

- Although these tests were performed other than open field area test site, adequate comparison measurements were confirmed against 30 m open field area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.

## 1.5. Test Facility

## Address of Test Facility

Test Facility Name : Sony Global Manufacturing & Operations Corporation  
EMC/ RF Test Laboratory, Main Lab.  
Address : Kisarazu Site 8-4 Shiomi Kisarazu-shi Chiba, 292-0834 Japan  
Phone : +81 438 37 2750

## Radiated Spurious Emission

Semi-Anechoic chamber  
 4th Site  EMC Site

## Antenna-port Conducted Measurements \*

Shielded Room  
 4th Site SR1

\*Note: This item contains the following

- 6dB Bandwidth
- Maximum Peak Conducted Output Power
- Power Spectral Density
- Conducted Spurious Emissions for Band Edge

## A2LA Accreditation for Test Facility

The above test facility has been fully reported to A2LA and accepted as follows:

A2LA Certificate No. : 3203.01  
Cert. Validated Date : 31 Oct 2019

## 1.6. Uncertainty

Test Item	Frequency	4th Site SR1
Conducted Output Power	1 - 6 GHz	± 0.84 dB
Power Spectral Density, Conducted Spurious Emissions	1 - 6 GHz	± 0.89 dB

Test Item	Frequency	Distance	4th Site	EMC Site
AC Power-line Conducted Emissions	150 kHz - 30 MHz	-	± 3.34 dB	± 3.34 dB
Radiated Emissions	below 30 MHz	3m	± 2.59 dB	± 2.59 dB
	30 - 300 MHz	3m	± 4.18 dB	± 4.18 dB
	300 - 1000 MHz	3m	± 4.04 dB	± 4.04 dB
	1 - 6 GHz	3m	± 4.63 dB	± 4.63 dB
	6 - 18 GHz	3m	± 5.31 dB	± 5.31 dB
	18 - 26.5 GHz	3m	± 5.78 dB	± 5.78 dB

## 2. System Test Configuration

### 2.1. Validation

The system was configured for testing in a typical (as a customer would normally use it).  
The tests were conducted with the worst case modes as follows.

### 2.2. Test Operating Conditions

The tests have been carried out the following conditions.

Test Items	Operating Mode	Data Rate	Test Channels
6dB Bandwidth, Maximum Peak Conducted Output Power, Power Spectral Density, Radiated Spurious Emissions	Bluetooth Low Energy	1 Mbps	2402 MHz, 2442 MHz, 2480 MHz
Conducted Spurious Emissions for Band Edge	Bluetooth Low Energy	1 Mbps	2402 MHz

The Software for Operating Mode

Nam : prodtest

Version : 1.0

Special accessories needed for connecting the EUT to achieve compliance:

Item	Manufacturer	Model No.	Serial No.	Remark
Personal Computer	SONY	PCG-71611N	1006554	-
AC ADAPTER	SONY	VGP-AC19V41	148753032 0255555	-

### 2.3. EUT Modifications

- No equipment modification to achieve compliance to the standard levels was done during the tests.  
 Equipment was modified to achieve compliance to the standard level as below.

Responsible Party Signature

\_\_\_\_\_

Typed/ Print Name :

Responsible Party :

Position :

Date :



## 2.4. Configuration of Tested System

Antenna-port Conducted Measurements

## The equipment under test (EUT)

Symbol	Item	Manufacturer	Model No.	Serial No.
A-1	Remote commander	SONY	RMT-NYSNO10	5000666

## Support equipment for operation


Symbol	Item	Manufacturer	Model No.	Serial No.
B	RIMO-JIG	-	-	-

## Type of cable

Symbol	Description	Identification (Manufacturer etc.)	Shielded YES / NO	Ferrite Core	Length (m)	Bundled
1	lead wire	-	NO	NO	0.1	-
2	USB Cable	avnet	YES	NO	0.5	-

## System configuration

\*: EUT

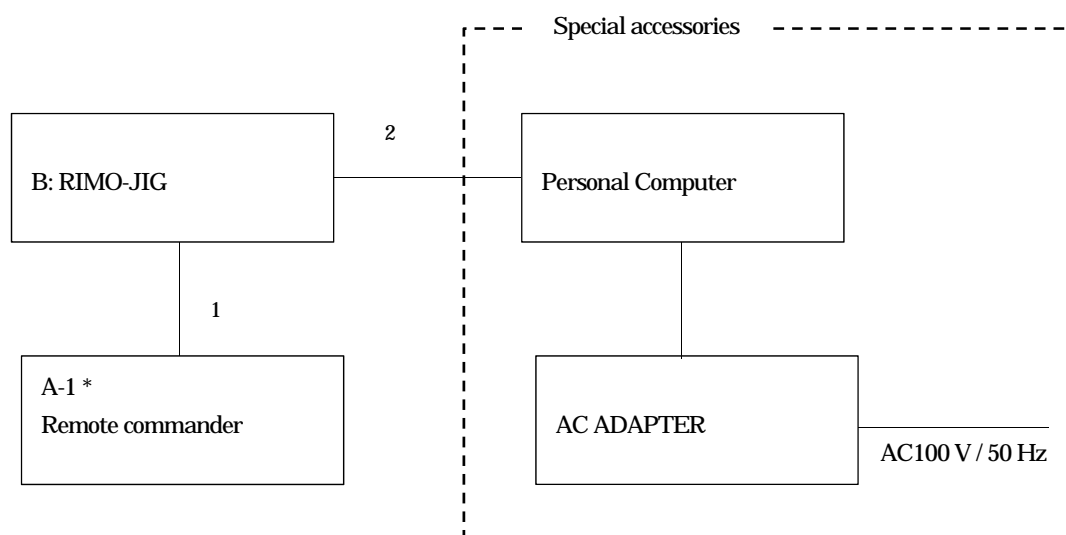

Radiated Spurious Emissions Measurement

The equipment under test (EUT)

Symbol	Item	Manufacturer	Model No.	Serial No.
A-2	Remote commander	SONY	RMT-NYSNO10	5001094

Support equipment for operation


Symbol	Item	Manufacturer	Model No.	Serial No.
B	RIMO-JIG	-	-	-

Type of cable

Symbol	Description	Identification (Manufacturer etc.)	Shielded YES / NO	Ferrite Core	Length (m)	Bundled
1	Lead wire	-	NO	NO	0.1	-

System configuration

\*: EUT

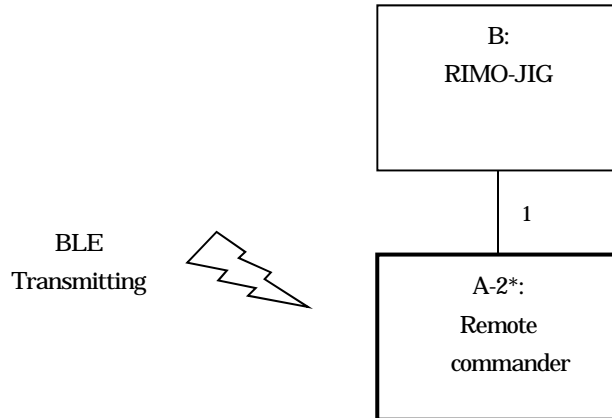


### 3. Test Data

#### 3.1. 6dB Bandwidth


- 1) Ambient temperature : 20.2 deg.C
- 2) Relative humidity : 58.0 %
- 3) Date of measurement : October 25, 2017
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode	Rate [Mbps]	Channel [MHz]	Result [MHz]	Limit [MHz]
BLE	1	2402	0.717	0.5
		2442	0.716	0.5
		2480	0.721	0.5


[Bluetooth Low Energy / 2402 MHz]

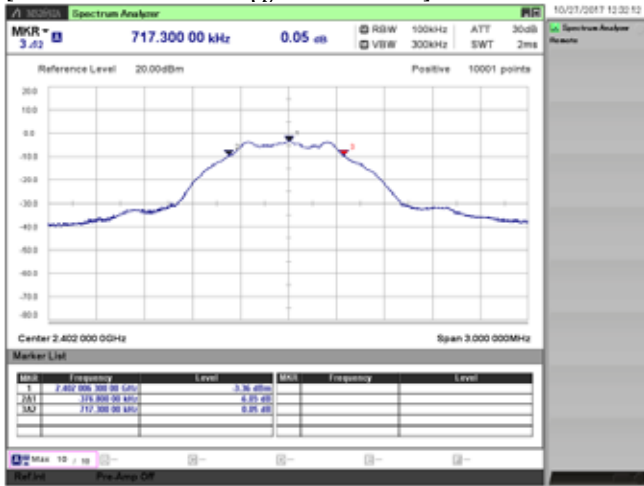

[Bluetooth Low Energy / 2442 MHz]

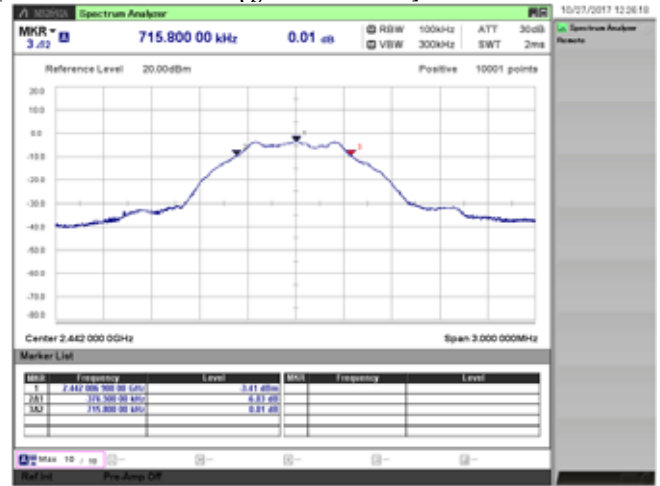

[Bluetooth Low Energy / 2480 MHz]

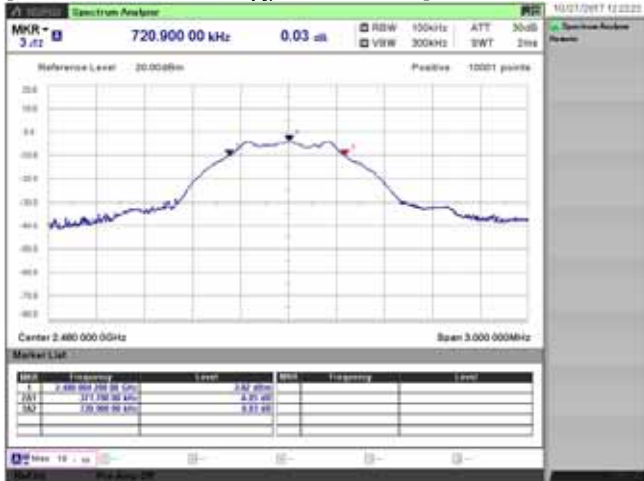

## 3.2. Maximum Peak Conducted Output Power

- 1) Ambient temperature : 20.2 deg.C
- 2) Relative humidity : 58.0 %
- 3) Date of measurement : October 25, 2017
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

## Maximum Peak Conducted Output Power

Mode	Rate [Mbps]	Channel [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result(PK) [dBm]	Result(PK) [W]	Limit [dBm]	Margin [dB]
BLE	1	2402	-2.28	1.50	-0.78	0.00084	30.0	30.78
		2442	-2.41	1.50	-0.91	0.00081	30.0	30.91
		2480	-2.51	1.50	-1.01	0.00079	30.0	31.01

## Maximum Average Conducted Output Power (for SAR measurement)


Mode	Rate [Mbps]	Channel [MHz]	Reading(AV) [dBm]	C.F. [dB]	Duty Factor [dB]	Result(AV) [dBm]	Result(AV) [W]
BLE	1	2402	-4.66	1.50	2.23	-0.93	0.00081
		2442	-4.78	1.50	2.23	-1.05	0.00079
		2480	-4.88	1.50	2.23	-1.15	0.00077

### 3.3. Power Spectral Density


- 1) Ambient temperature : 20.2 deg.C
- 2) Relative humidity : 58.0 %
- 3) Date of measurement : October 25, 2017
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode	Rate [Mbps]	Channel [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result(PK) [dBm]	Limit [dBm]	Margin [dB]
BLE	1	2402	-18.16	1.87	-16.29	8.0	24.29
		2442	-18.12	1.88	-16.24	8.0	24.24
		2480	-18.56	1.88	-16.68	8.0	24.68


[Bluetooth Low Energy / 2402 MHz]

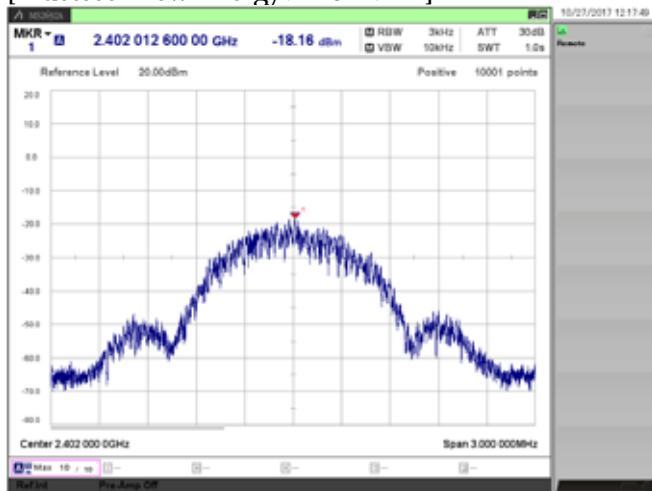

[Bluetooth Low Energy / 2442 MHz]

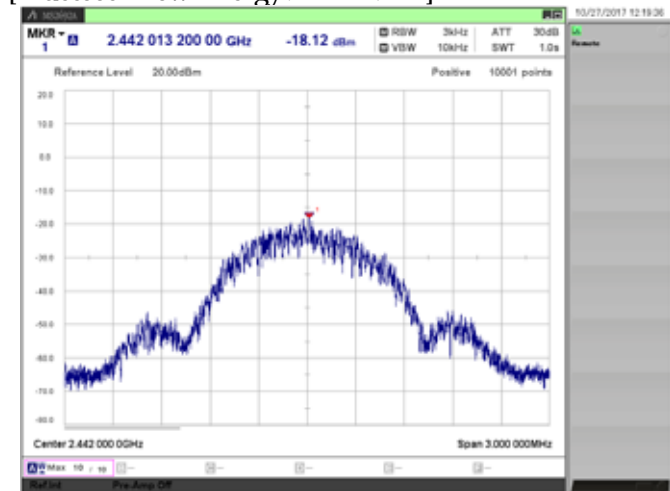

[Bluetooth Low Energy / 2480 MHz]

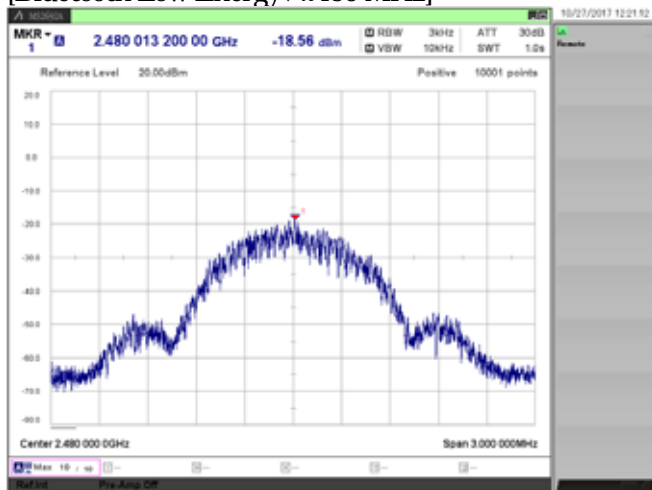


### 3.4. Radiated Spurious Emissions

#### 1) Date of measurement

9 kHz - 30 MHz	: November 02, 2017 (all mode)
30 MHz - 1000 MHz	: November 04, 2017 (all mode)
1 GHz - 6GHz	: October 26, 2017 (all mode)
6GHz - 18GHz	: November 03, 2017 (all mode)
18GHz - 24.835GHz	: November 03, 2017 (all mode)

9 kHz - 30 MHz

[Bluetooth Low Energy (1 Mbps) / 2402 MHz]

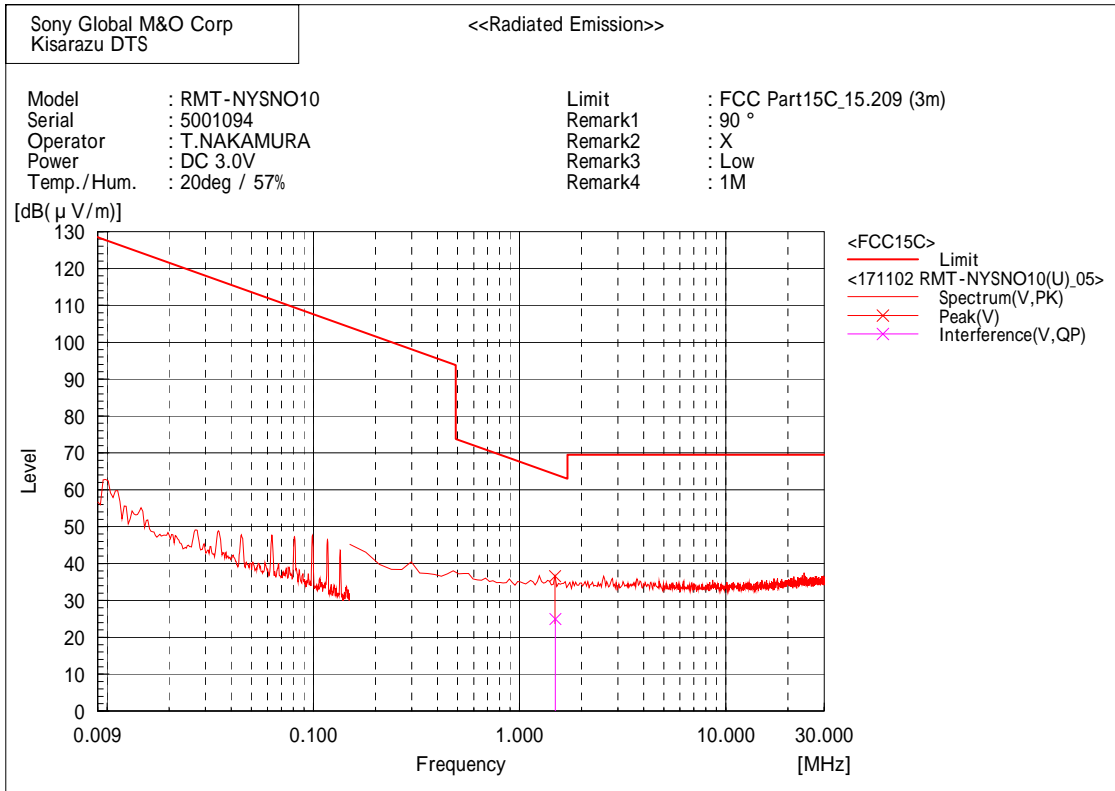


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	1.489	5.0	20.0	25.0	64.2	39.2	100.0	77.0

[Bluetooth Low Energy (1 Mbps) / 2442 MHz]

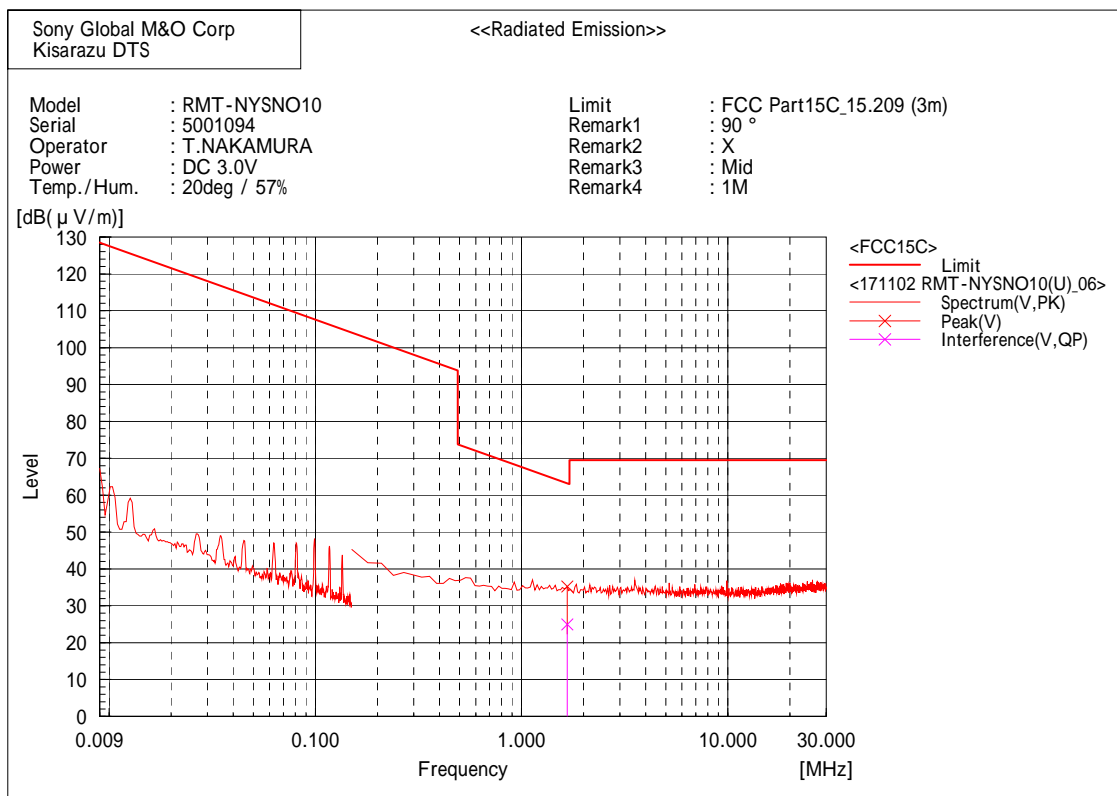


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	1.664	5.0	20.0	25.0	63.2	38.2	100.0	72.9



[Bluetooth Low Energy (1 Mbps) / 2480 MHz]

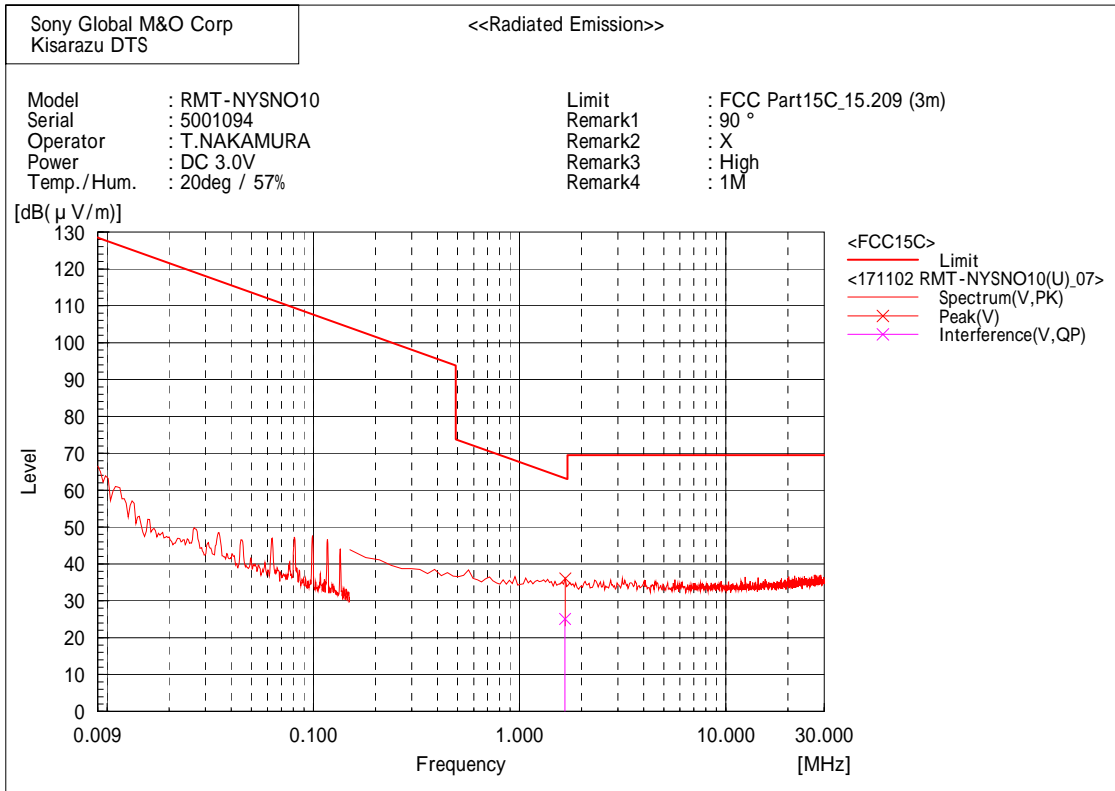


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	1.661	5.1	20.0	25.1	63.2	38.1	100.0	214.3

30 MHz - 1000 MHz  
 [Bluetooth Low Energy (1 Mbps) / 2402 MHz]

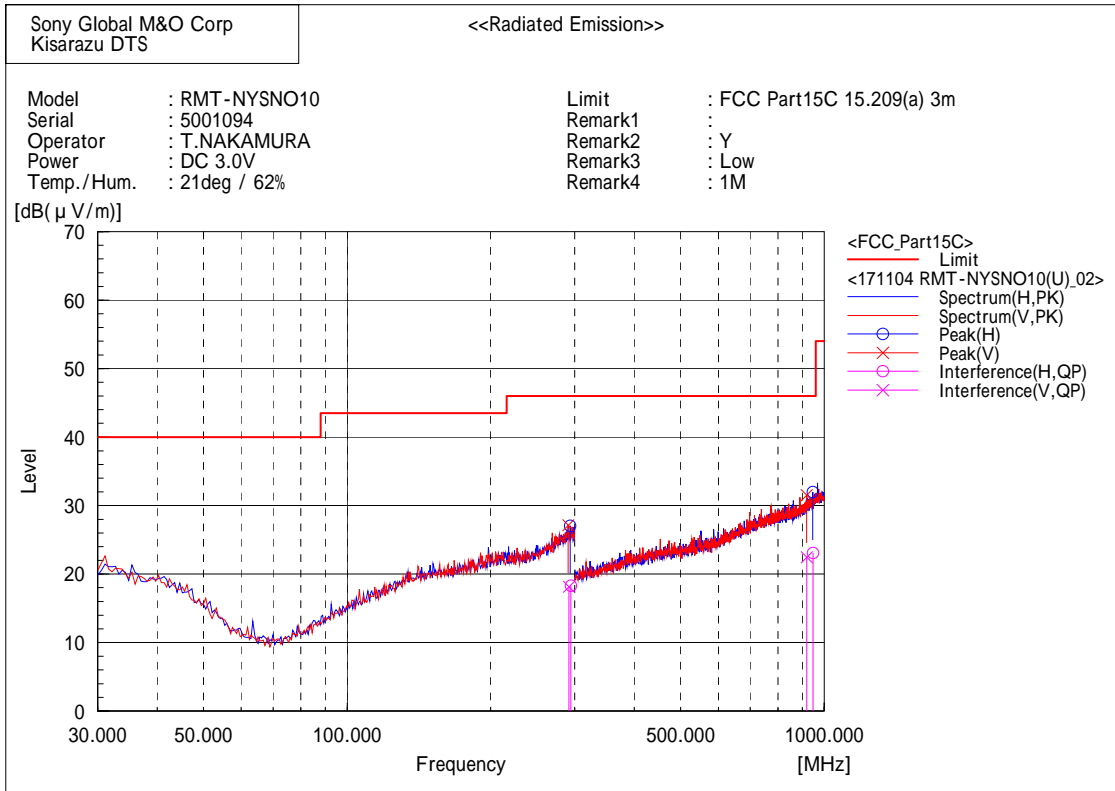

Final Result


--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(µV)]	c.f [dB(1/m)]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	294.356	24.3	-6.0	18.3	46.0	27.7	266.3	303.1
2	947.640	24.2	-1.1	23.1	46.0	22.9	233.6	232.3

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(µV)]	c.f [dB(1/m)]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	291.779	24.2	-6.1	18.1	46.0	27.9	147.3	33.0
2	919.760	24.4	-1.9	22.5	46.0	23.5	161.1	328.2

[Bluetooth Low Energy (1 Mbps) / 2442 MHz]

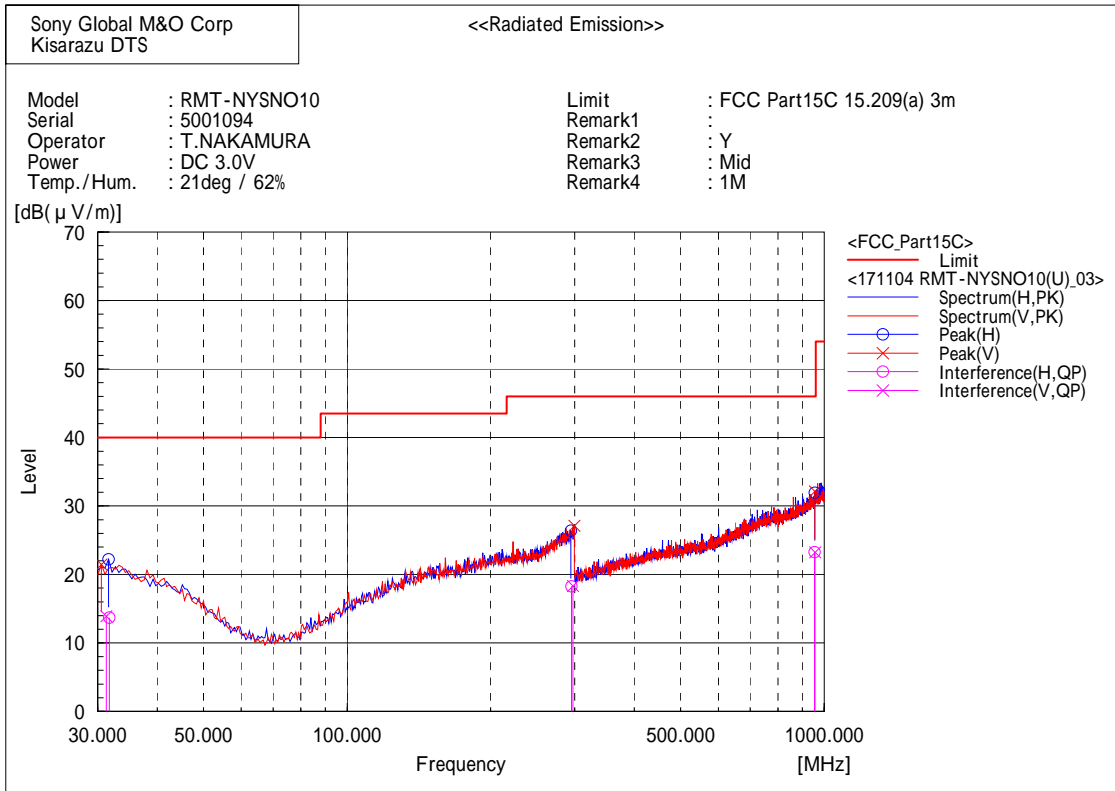

Final Result


--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	31.745	25.3	-11.6	13.7	40.0	26.3	235.1	318.4
2	295.349	24.3	-6.0	18.3	46.0	27.7	230.8	164.2
3	954.540	24.2	-0.9	23.3	46.0	22.7	246.5	280.5

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	31.285	25.3	-11.4	13.9	40.0	26.1	116.3	139.2
2	297.358	24.3	-5.9	18.4	46.0	27.6	182.5	296.5
3	956.560	24.1	-0.9	23.2	46.0	22.8	197.8	139.2

[Bluetooth Low Energy (1 Mbps) / 2480 MHz]

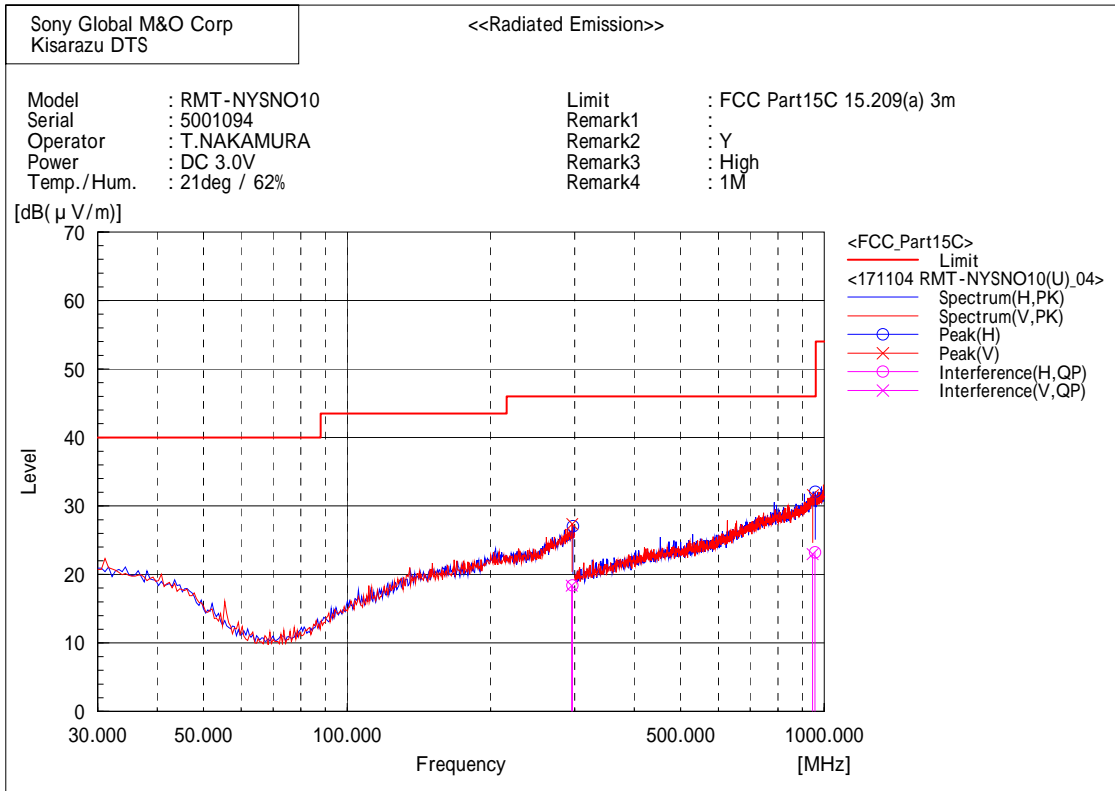

Final Result

--- Horizontal Polarization (QP)---


No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	296.779	24.3	-5.9	18.4	46.0	27.6	251.0	216.4
2	956.280	24.1	-0.9	23.2	46.0	22.8	232.9	337.7

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	295.455	24.3	-5.9	18.4	46.0	27.6	159.6	81.0
2	945.380	24.2	-1.2	23.0	46.0	23.0	187.8	305.7

1 GHz - 6 GHz

[Bluetooth Low Energy (1 Mbps) / 2402 MHz]

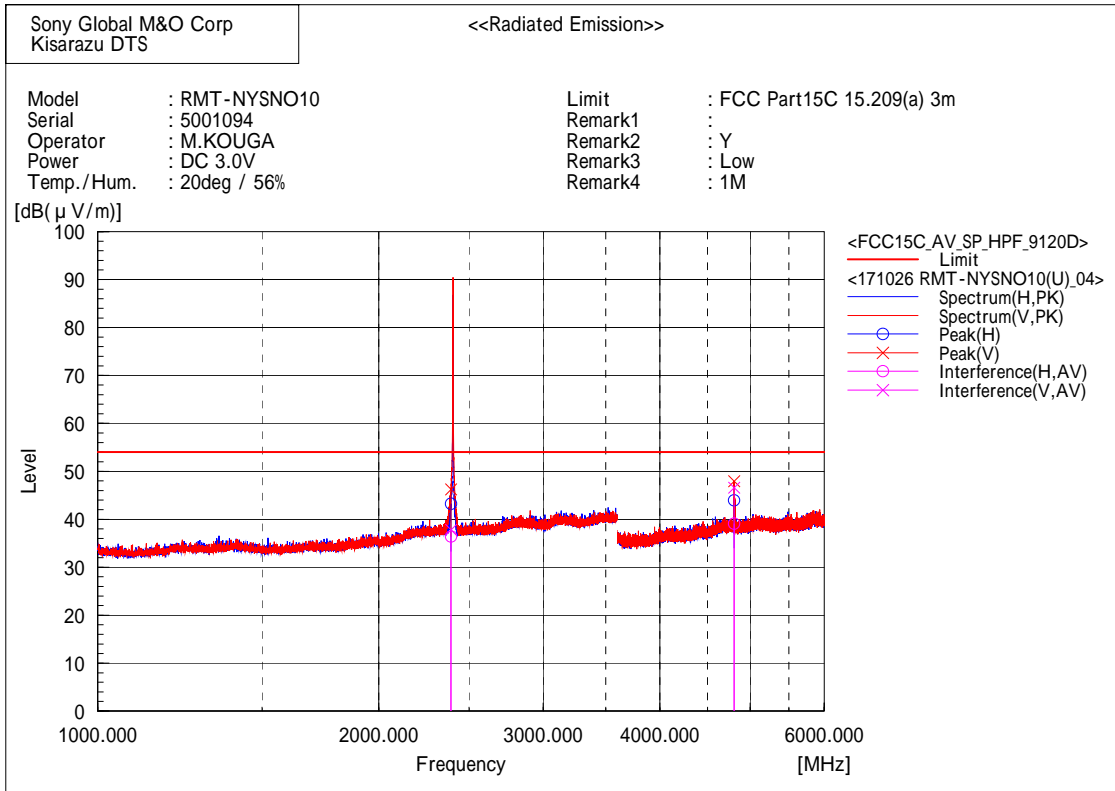

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2390.000	38.5	-2.1	36.4	54.0	17.6	158.7	74.0
2	4804.024	36.6	2.5	39.1	54.0	14.9	245.9	316.9

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2390.000	39.9	-2.1	37.8	54.0	16.2	162.1	62.8
2	4803.964	44.1	2.5	46.6	54.0	7.4	211.9	176.2

[Bluetooth Low Energy (1 Mbps) / 2442 MHz]

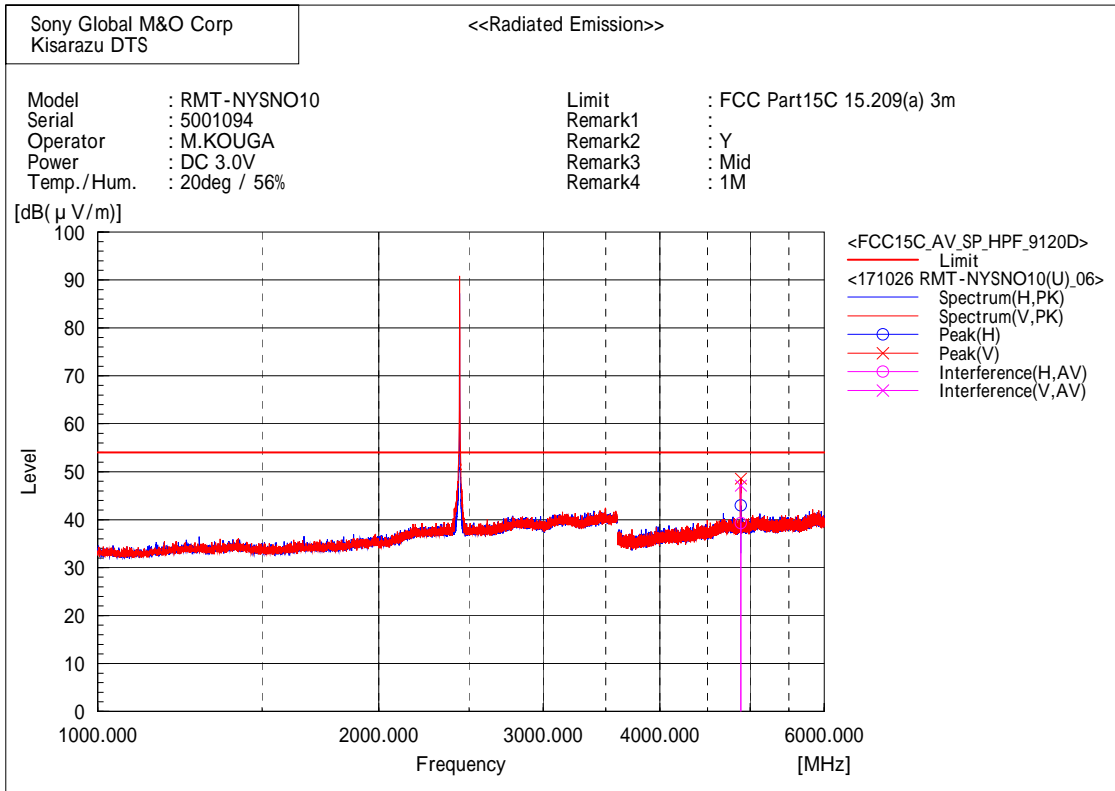

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4884.070	36.9	2.4	39.3	54.0	14.7	342.0	325.0

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4883.951	44.7	2.4	47.1	54.0	6.9	205.0	162.0

[Bluetooth Low Energy (1 Mbps) / 2480 MHz]

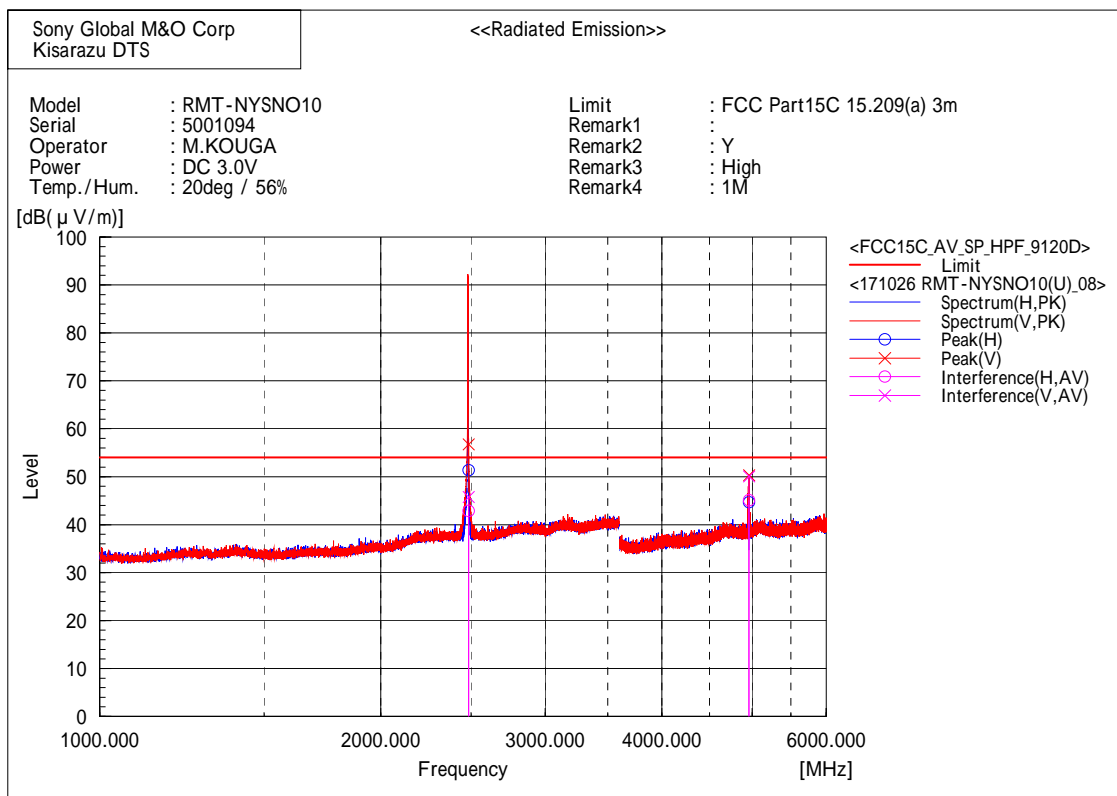

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	44.7	-1.8	42.9	54.0	11.1	162.0	312.0
2	4960.011	42.6	2.5	45.1	54.0	8.9	133.5	316.5

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	47.6	-1.8	45.8	54.0	8.2	200.8	229.3
2	4960.014	47.6	2.5	50.1	54.0	3.9	215.0	168.0

[Bluetooth Low Energy (1 Mbps) / 2402 MHz]

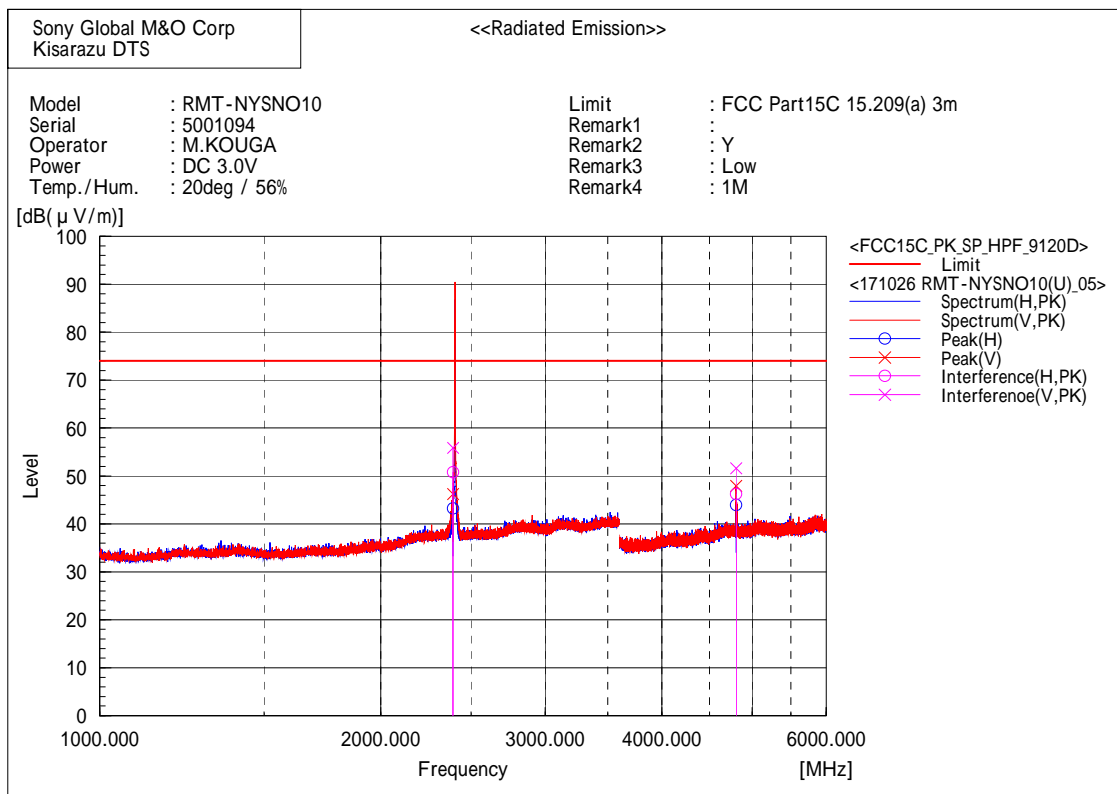

Final Result

--- Horizontal Polarization (PK)---


No.	Frequency [MHz]	Reading [dB(µV)]	c.f [dB(1/m)]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2390.000	52.9	-2.1	50.8	74.0	23.2	159.0	73.0
2	4803.962	43.8	2.5	46.3	74.0	27.7	171.3	308.8

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(µV)]	c.f [dB(1/m)]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2390.000	58.0	-2.1	55.9	74.0	18.1	162.0	62.8
2	4804.473	49.1	2.5	51.6	74.0	22.4	212.0	175.0




[Bluetooth Low Energy (1 Mbps) / 2442 MHz]

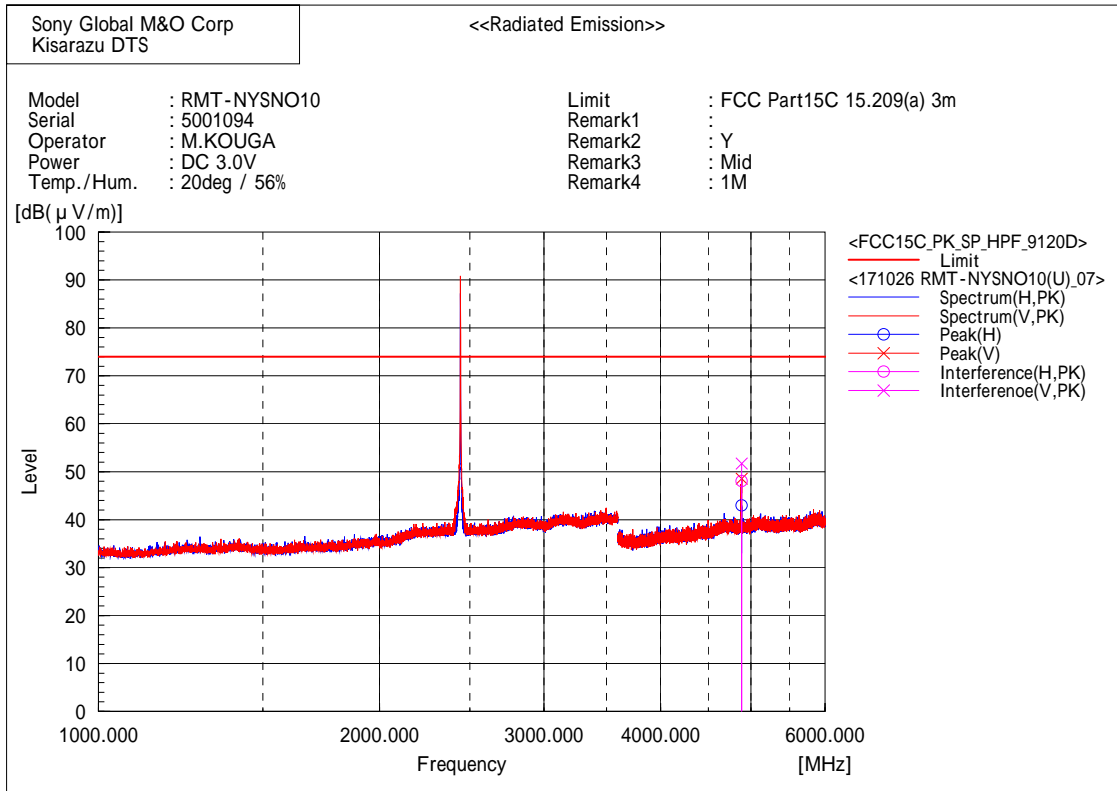

Final Result

--- Horizontal Polarization (PK)---								
No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4883.392	45.6	2.4	48.0	74.0	26.0	339.0	325.0
--- Vertical Polarization (PK)---								
No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4884.115	49.3	2.4	51.7	74.0	22.3	206.3	165.0

[Bluetooth Low Energy (1 Mbps) / 2480 MHz]

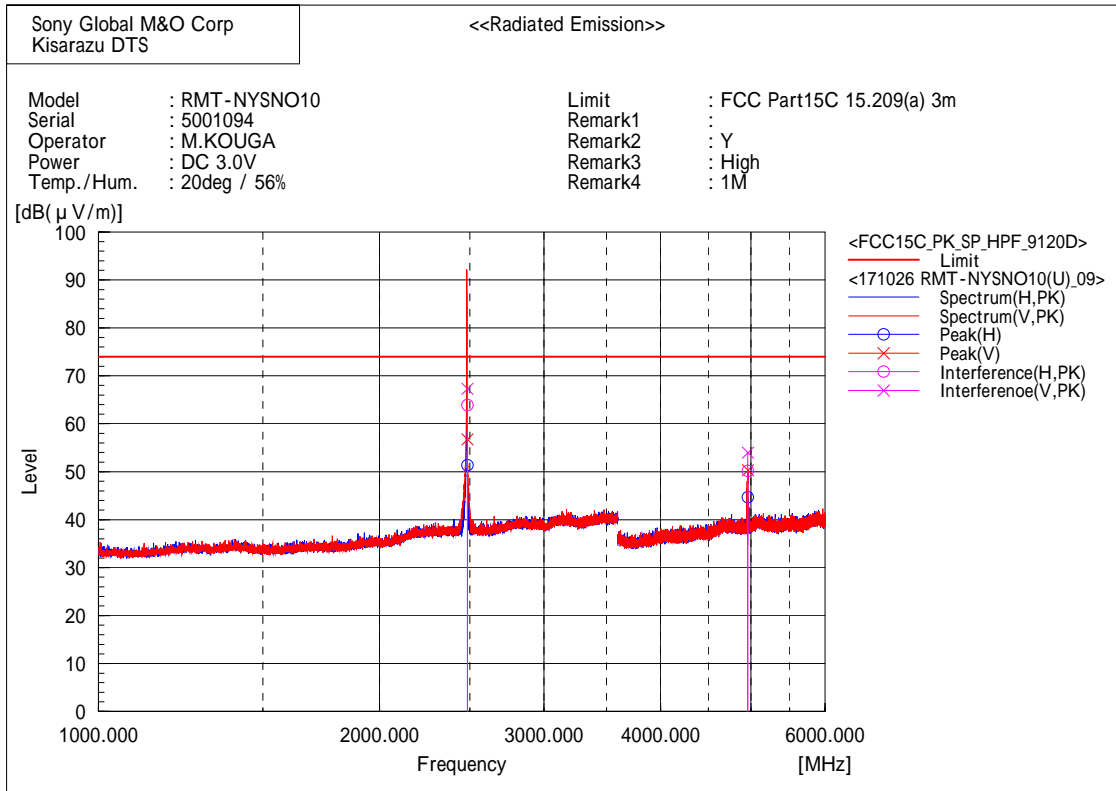

Final Result

--- Horizontal Polarization (PK)---


No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	65.7	-1.8	63.9	74.0	10.1	163.0	312.0
2	4960.528	47.7	2.5	50.2	74.0	23.8	135.0	316.0

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	69.1	-1.8	67.3	74.0	6.7	201.0	229.0
2	4959.343	51.5	2.5	54.0	74.0	20.0	215.0	169.2

6 GHz - 18 GHz

[Bluetooth Low Energy (1 Mbps) / 2402 MHz]

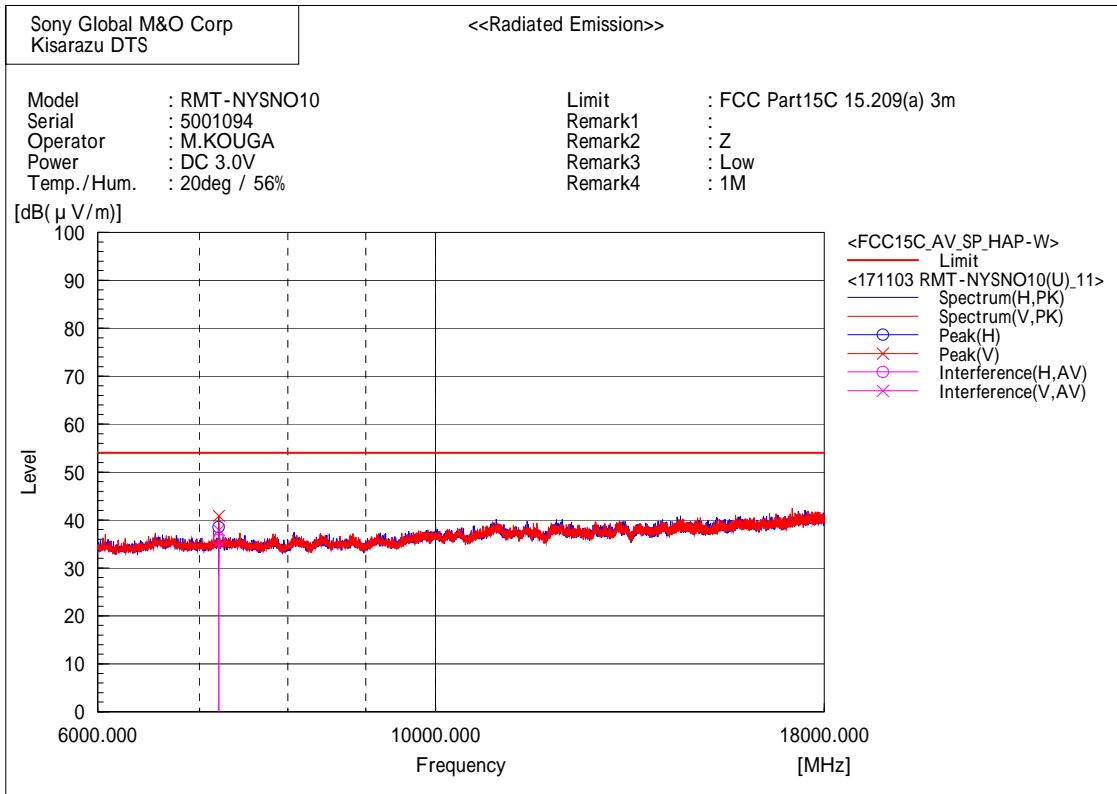

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.601	44.8	-8.9	35.9	54.0	18.1	276.7	180.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7205.498	46.8	-8.9	37.9	54.0	16.1	181.3	249.7

[Bluetooth Low Energy (1 Mbps) / 2442 MHz]

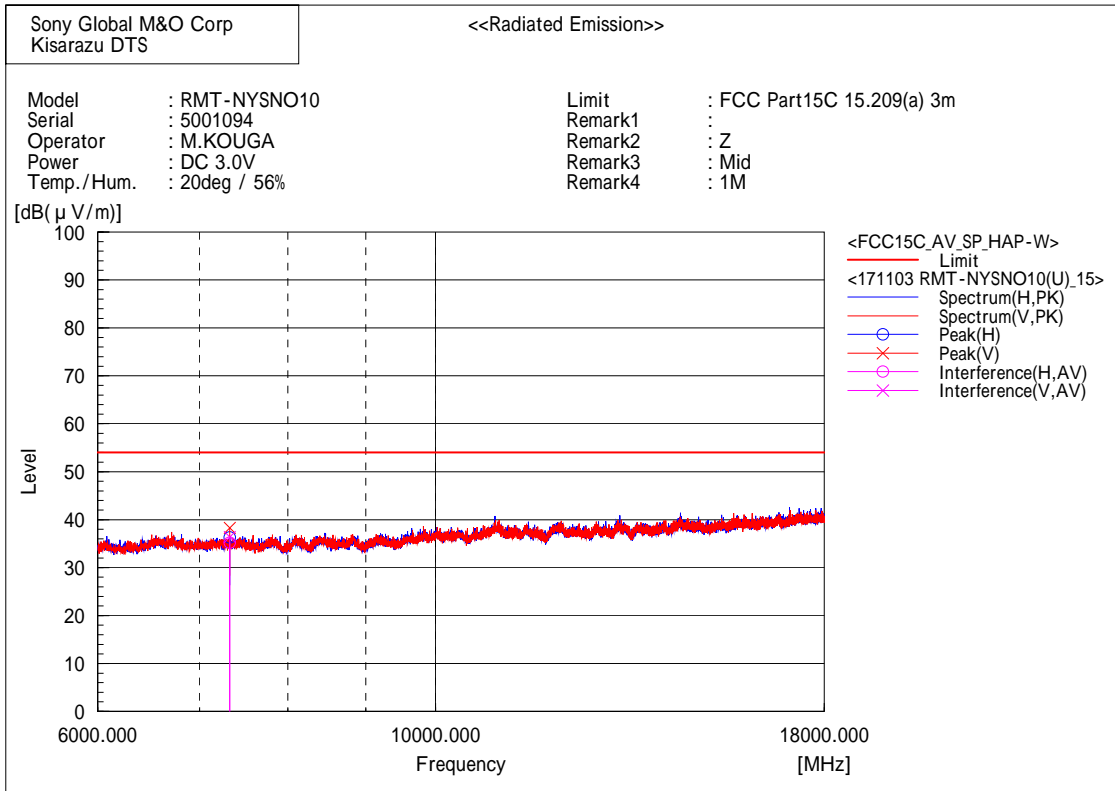

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7325.970	43.9	-8.7	35.2	54.0	18.8	287.8	185.0

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7326.044	45.1	-8.7	36.4	54.0	17.6	162.9	334.7

[Bluetooth Low Energy (1 Mbps) / 2480 MHz]

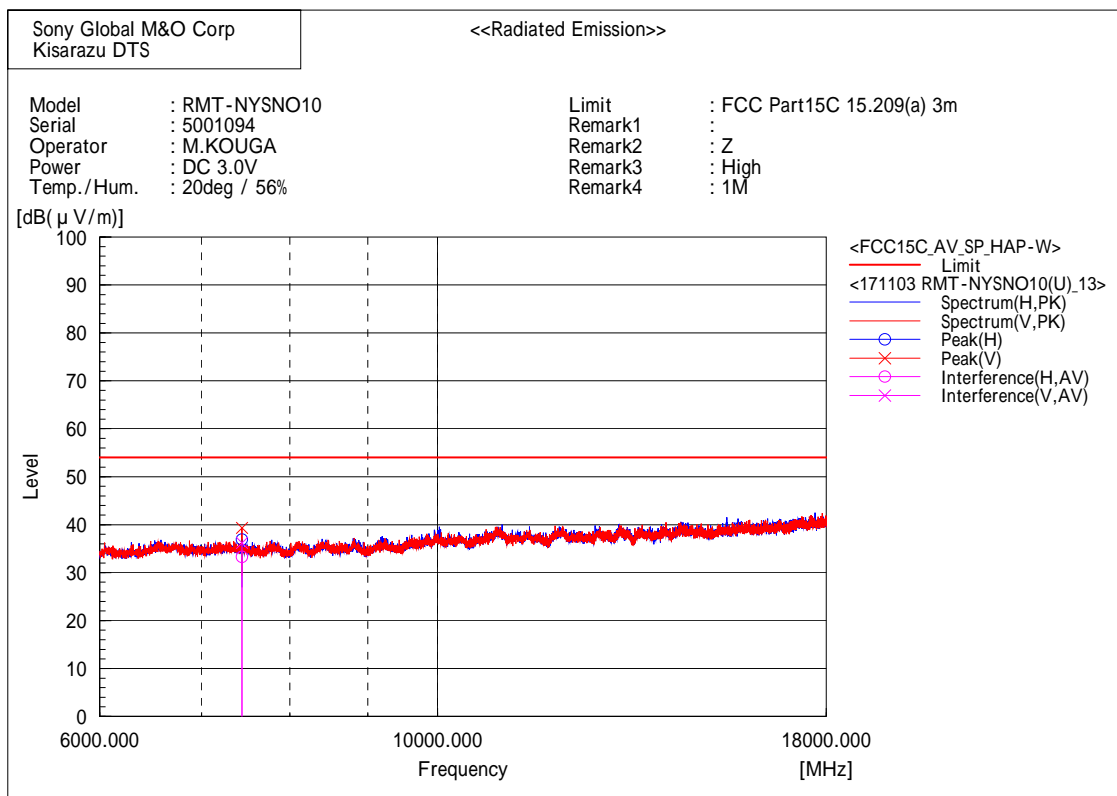

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7439.452	42.0	-8.7	33.3	54.0	20.7	314.5	332.0

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7440.088	44.9	-8.7	36.2	54.0	17.8	100.0	344.0

[Bluetooth Low Energy (1 Mbps) / 2402 MHz]

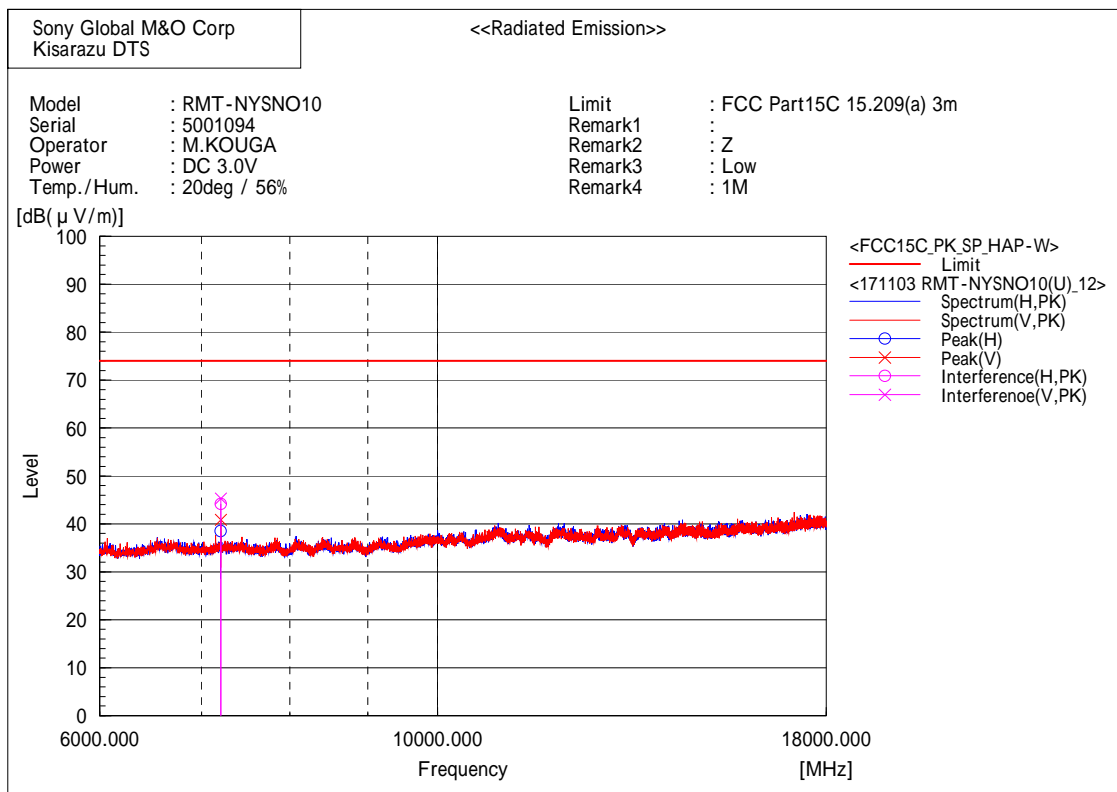

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.898	53.1	-8.9	44.2	74.0	29.8	276.7	181.0

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.201	54.2	-8.9	45.3	74.0	28.7	187.0	248.0

[Bluetooth Low Energy (1 Mbps) / 2442 MHz]

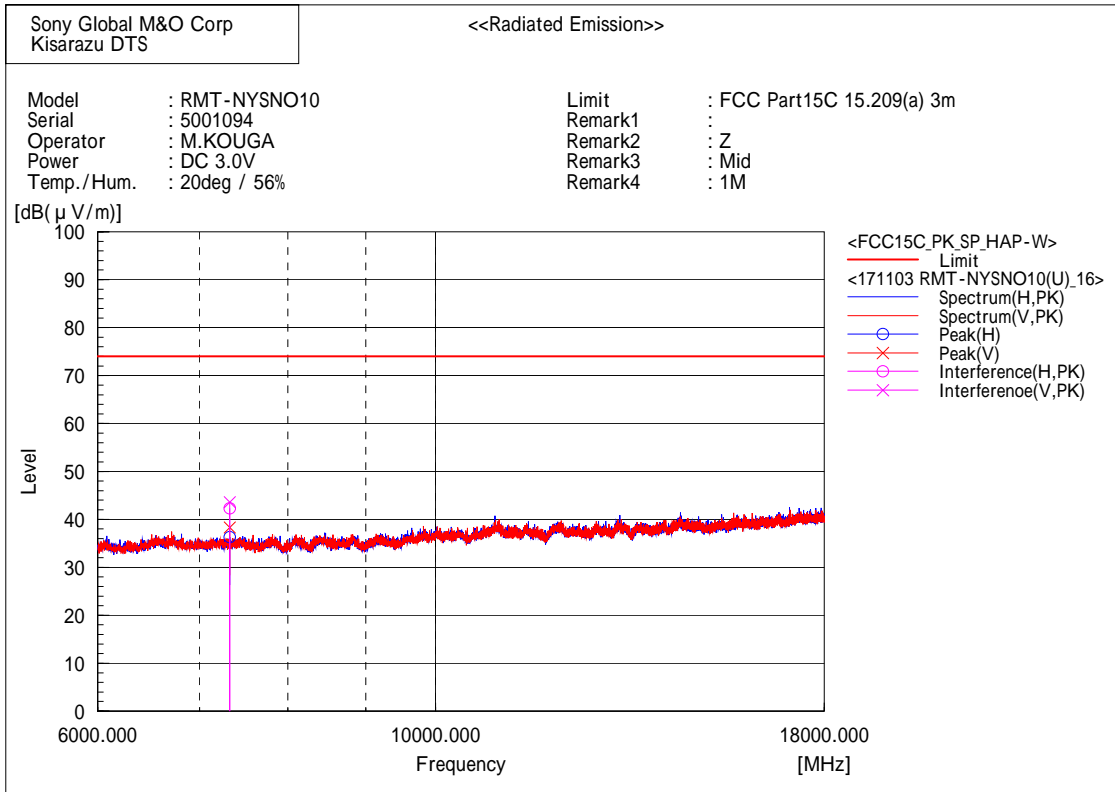

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7326.251	51.0	-8.7	42.3	74.0	31.7	283.9	184.1

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7326.028	52.3	-8.7	43.6	74.0	30.4	169.0	333.0

[Bluetooth Low Energy (1 Mbps) / 2480 MHz]

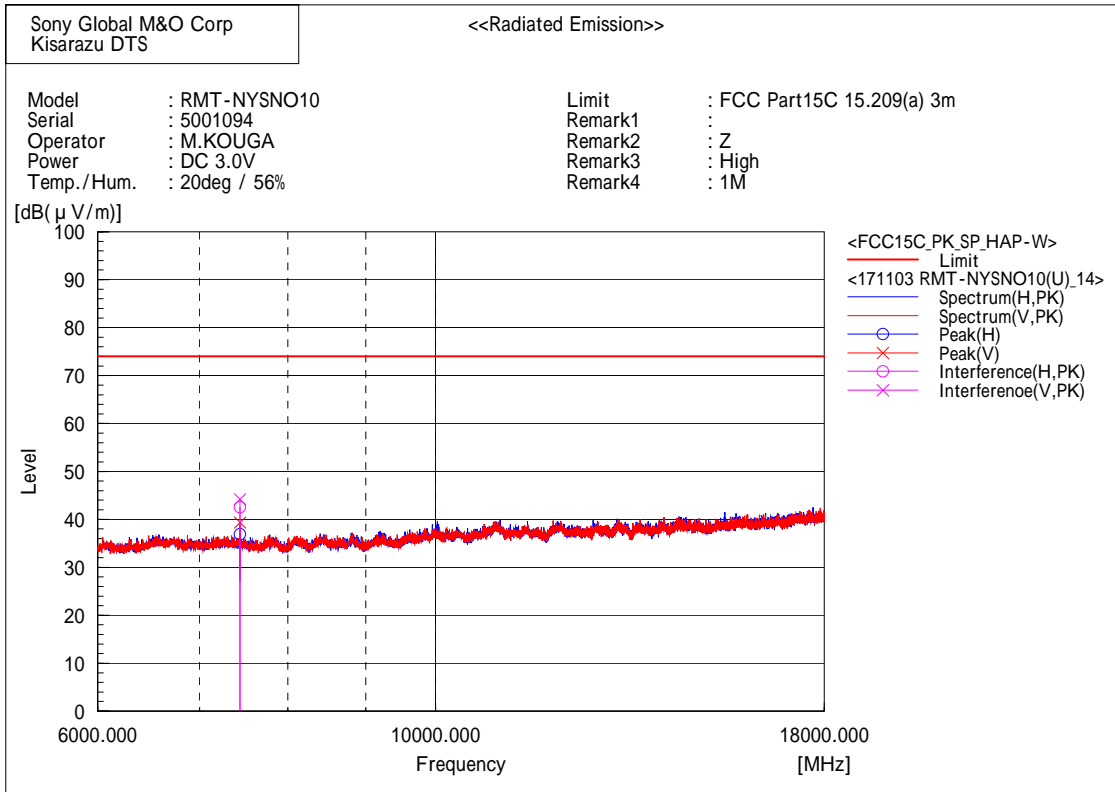

Final Result

--- Horizontal Polarization (PK)---


No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7439.289	51.3	-8.7	42.6	74.0	31.4	285.7	336.9

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7439.314	52.9	-8.7	44.2	74.0	29.8	100.0	344.0



18 GHz - 25 GHz  
 [Bluetooth Low Energy (1 Mbps) / 2402 MHz]

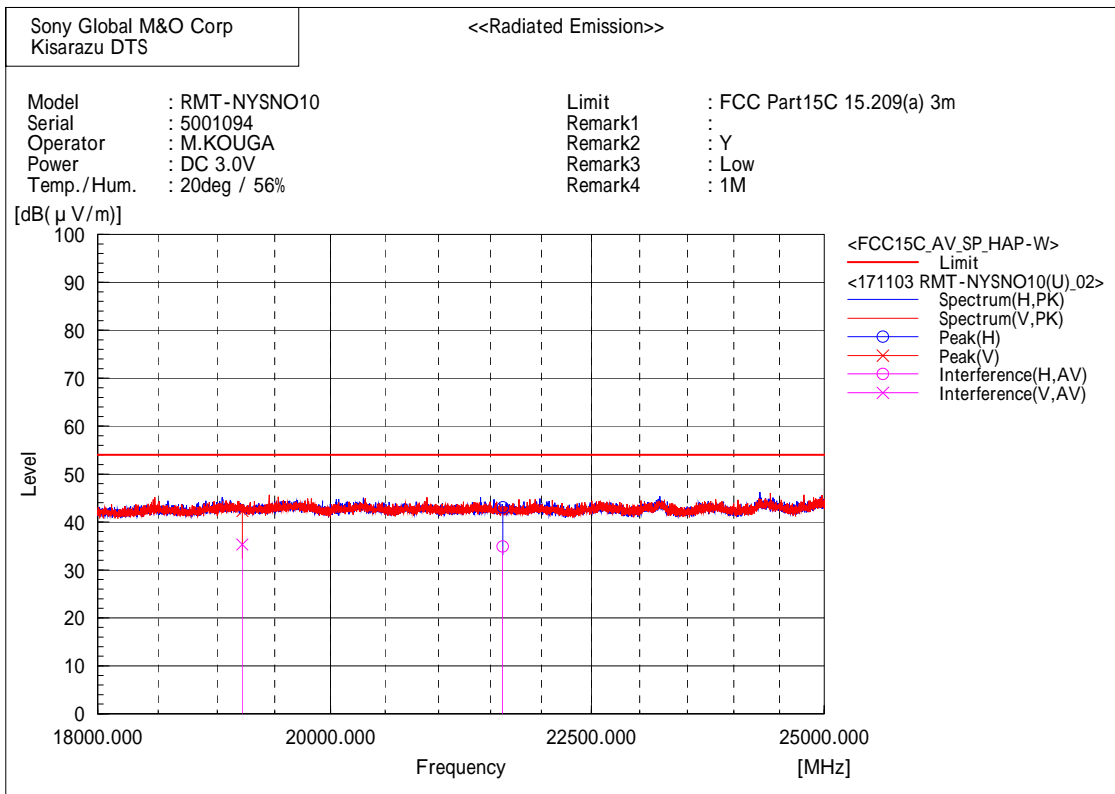

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21618.000	31.8	3.1	34.9	54.0	19.1	345.1	92.9

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19216.000	31.8	3.5	35.3	54.0	18.7	318.6	292.9

[Bluetooth Low Energy (1 Mbps) / 2442 MHz]

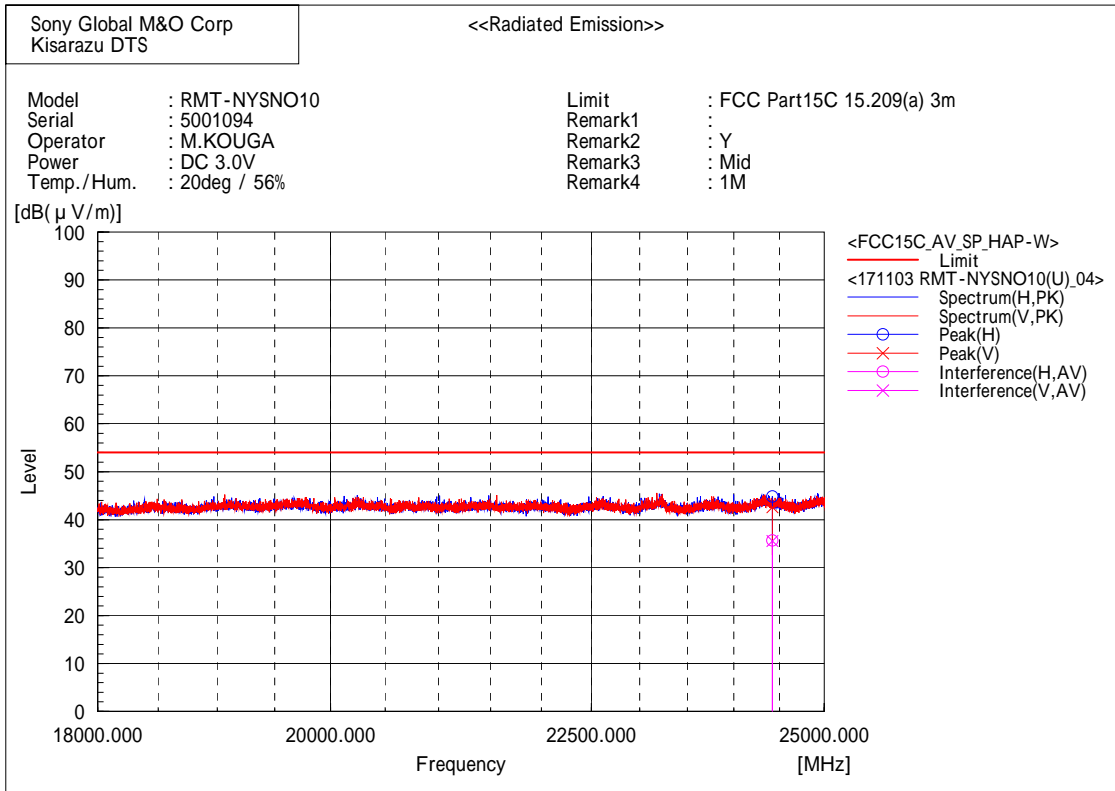

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24420.000	33.5	2.2	35.7	54.0	18.3	162.4	351.3

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24420.000	33.4	2.2	35.6	54.0	18.4	347.6	180.0

[Bluetooth Low Energy (1 Mbps) / 2480 MHz]

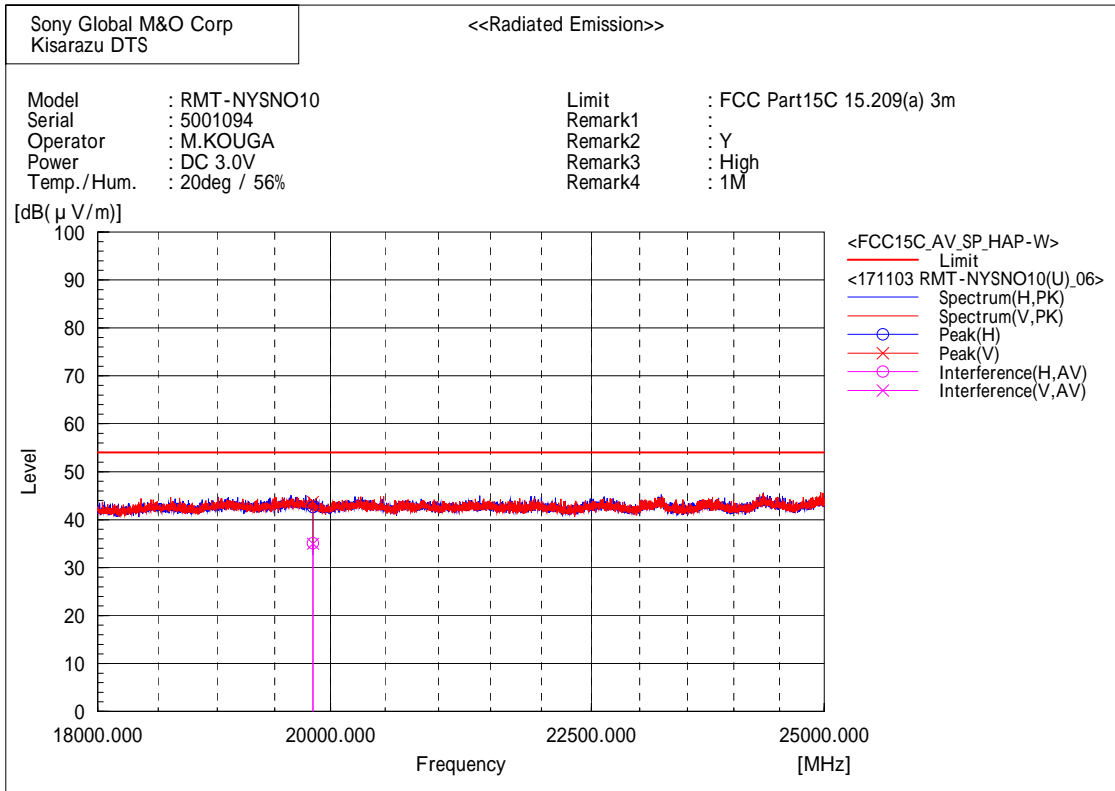

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19840.000	31.5	3.6	35.1	54.0	18.9	316.9	284.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19840.000	31.4	3.6	35.0	54.0	19.0	213.5	166.2

[Bluetooth Low Energy (1 Mbps) / 2402 MHz]

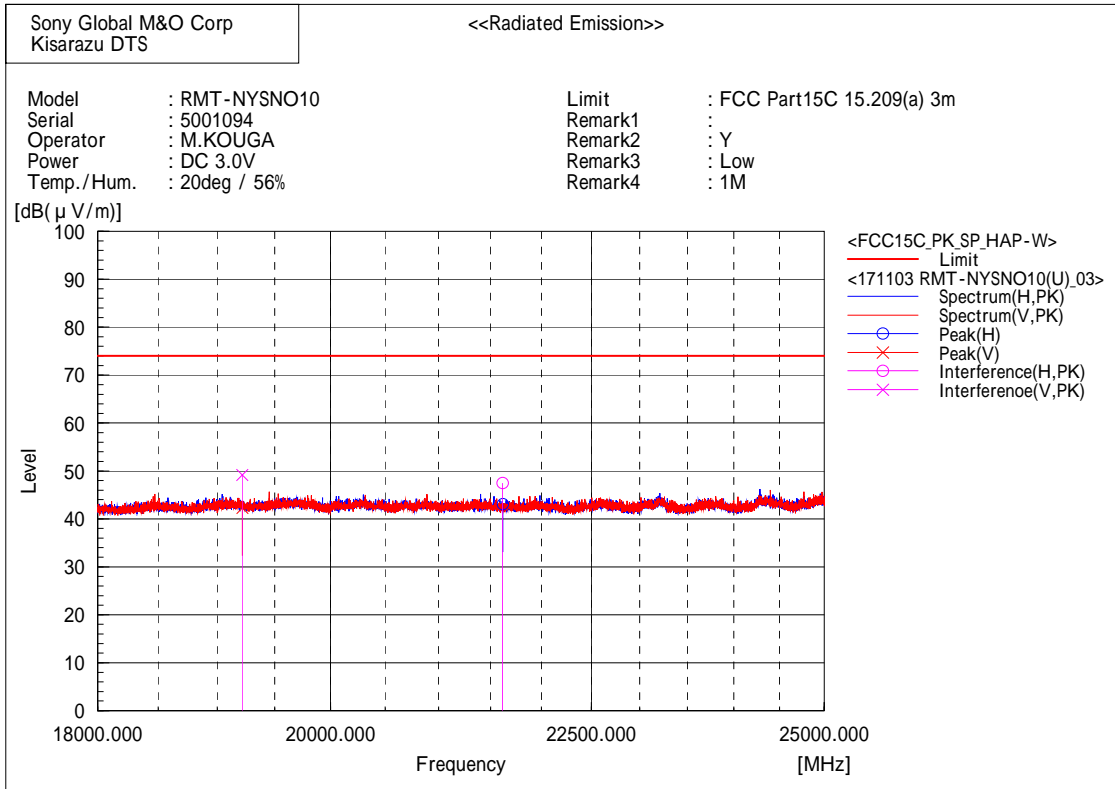

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21618.000	44.4	3.1	47.5	74.0	26.5	343.0	95.1

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19216.000	45.7	3.5	49.2	74.0	24.8	318.8	293.6

[Bluetooth Low Energy (1 Mbps) / 2442 MHz]

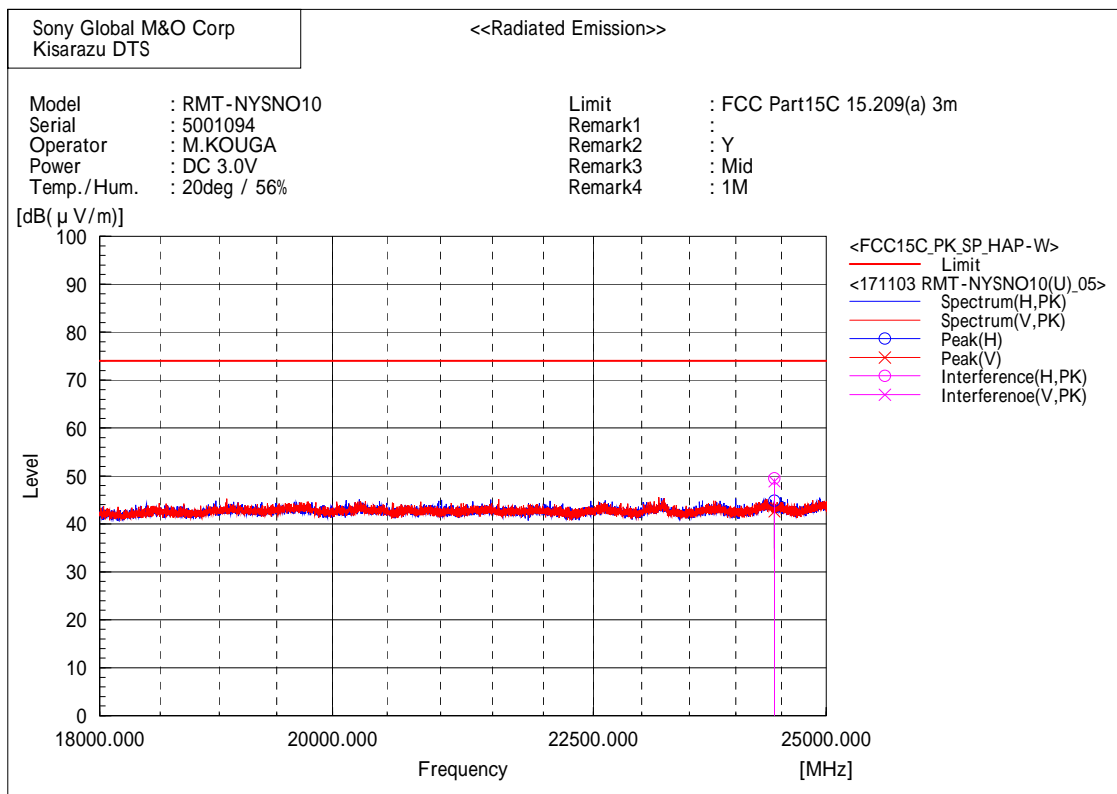

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24420.000	47.3	2.2	49.5	74.0	24.5	178.6	353.0

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24420.000	46.7	2.2	48.9	74.0	25.1	348.5	181.0

[Bluetooth Low Energy (1 Mbps) / 2480 MHz]

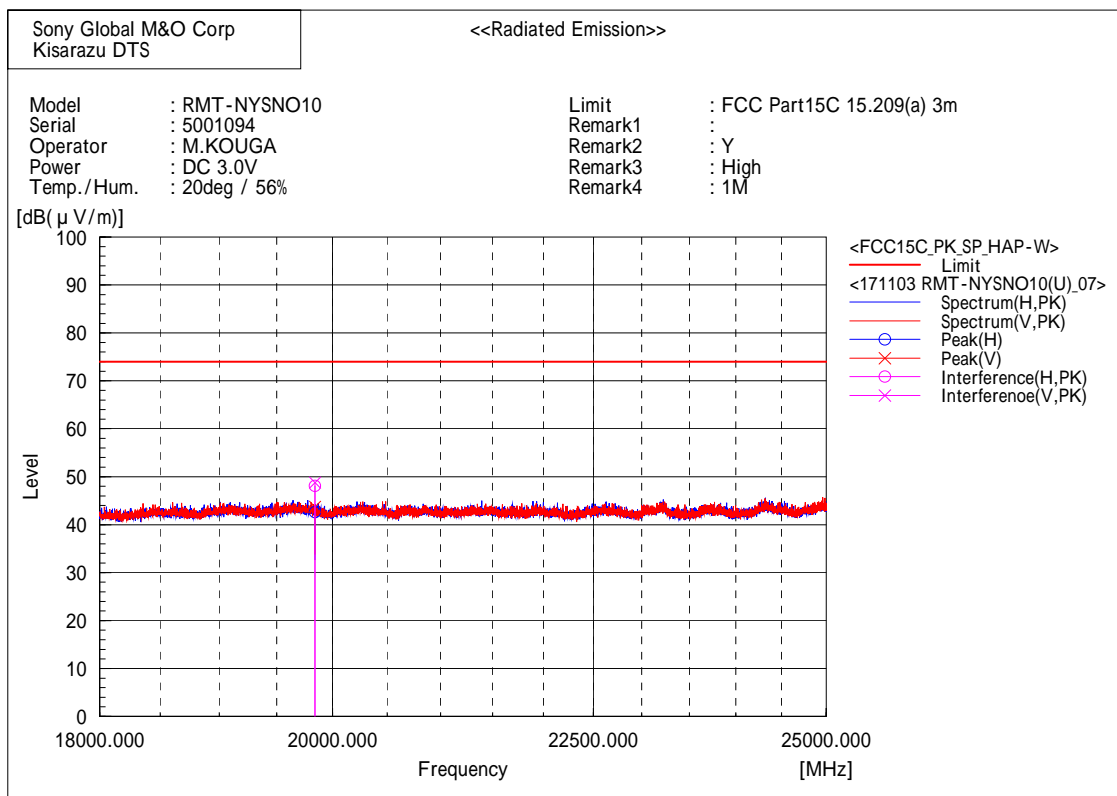

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19840.000	44.5	3.6	48.1	74.0	25.9	308.8	281.1

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19840.000	45.2	3.6	48.8	74.0	25.2	202.2	167.0


### 2.4GHz Restricted-Band Edge (Plot data)

These plot data show peak (trace blue) and average (trace black) spectrum for worst case emissions in the restricted-band edges. (Restricted band edges: below 2390 MHz and above 2483.5 MHz)

The result of the final radiated emissions measurement refers in previous pages.


#### [Bluetooth Low Energy / 2402 MHz]

Horizontal

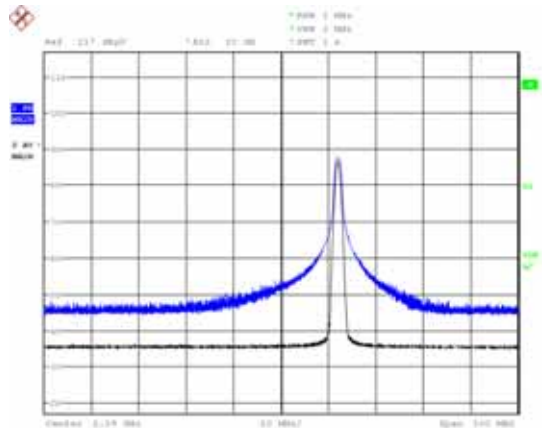

Date: 2,NOV,2017 11:52:53


Vertical

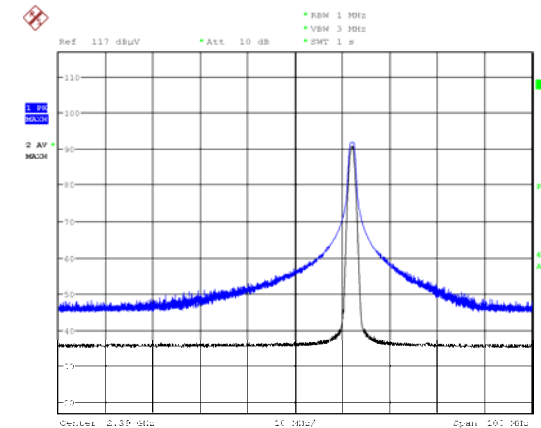

Date: 2,NOV,2017 11:52:17


#### [Bluetooth Low Energy / 2480 MHz]

Horizontal

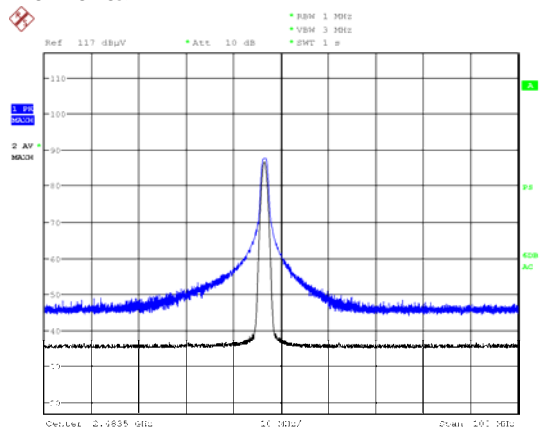

Date: 2,NOV,2017 13:31:29

Vertical

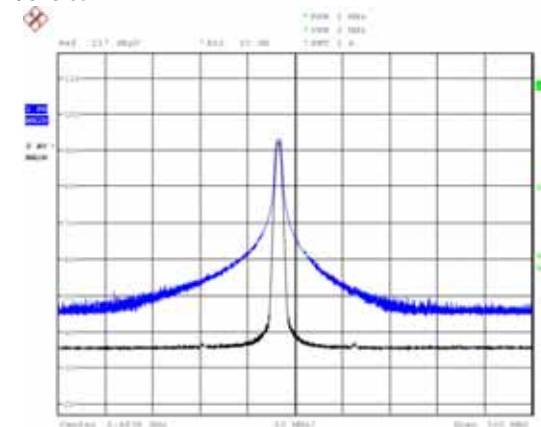


Date: 2,NOV,2017 13:33:28

### 3.5. Conducted Spurious Emissions for Band Edge

- 1) Ambient temperature : 20.2 deg.C
- 2) Relative humidity : 58.0 %
- 3) Date of measurement : October 25, 2017
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode	Rate [Mbps]	Channel [MHz]	Frequency [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
BLE	1	2402	2400.00	-41.66	1.87	-39.79	-22.9	16.91
			2402.00	-4.74	1.87	-2.87	-	-

[Bluetooth Low Energy / 2402 MHz]

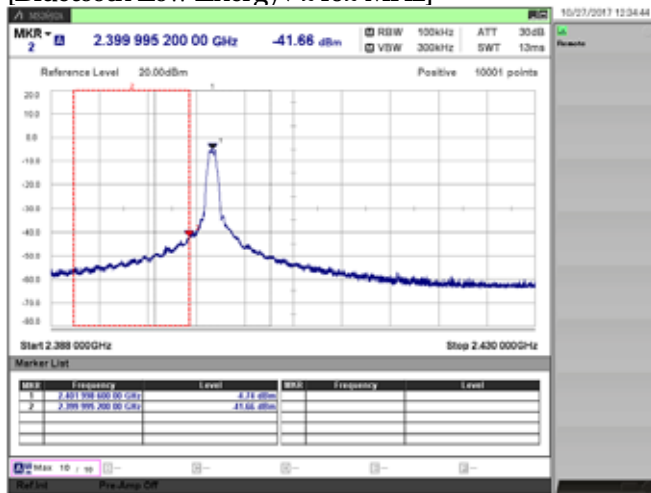



## 4. Method of Calculation

### 4.1. Maximum Peak Conducted Output Power Measurement

Method of calculation : Software  
The Software for Calculation Name : SW-316  
Version : Ver.1.0

Test Result (PK) [ dBm ] = Meter Reading [ dBm ] + C.F. [ dB ]

Test Result (AV) [ dBm ] = Meter Reading [ dBm ] + C.F. [ dB ] + Duty Factor [ dB ]

Notes :

- (a) Meter Reading : Reading of the power meter.
- (b) C.F. : Attenuator Loss + EUT Cable Loss
- (c) Duty Factor :  $10\log \{(\text{Tx ON Time} + \text{Tx OFF Time}) / (\text{Tx ON Time})\}$

### 4.2. Power Density Measurement

Method of calculation : Software  
The Software for Calculation Name : SW-316  
Version : Ver.1.0

Test Result [ dBm ] = Meter Reading [ dBm ] + C.F. [ dB ]

Notes :

- (a) Meter Reading : Reading of the spectrum analyzer.
- (b) C.F. : System Cable Loss + Attenuator Loss + EUT Cable Loss

## 4.3. Radiated Spurious Emission Measurement

Method of calculation : Software  
The Software for Calculation Name : V-Scan  
Version : Ver. 4.0.30

$$\text{Test Result [ dBuV/m ]} = \text{Meter Reading [ dBuV ]} + \text{C.F. [ dB/m ]}$$

Notes :

- (a) Meter Reading : Reading of the EMI test receiver or spectrum analyzer.  
(b) C.F. :  Antenna Factor (including Balun Loss) + System GainLoss  
:  Antenna Factor (including Balun Loss) + System GainLoss + 20 log (3 m/ 10 m)

## 4.4. Conducted Spurious Emission for Band Edge Measurement

Method of calculation : Software  
The Software for Calculation Name : SW-316  
Version : Ver.1.0

$$\text{Test Result [ dBm ]} = \text{Meter Reading [ dBm ]} + \text{C.F. [ dB ]}$$

Notes :

- (a) Meter Reading : Reading of the spectrum analyzer.  
(b) C.F. : System Cable Loss + Attenuator Loss + EUT Cable Loss

## 5. List of Test Equipment

All test results are traceable to the national and/or international standards.

### 5.1. Antenna-port Conducted Measurements

#### 4th Site Shielded Room 1

	Ctrl.#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Int.	Last Cal.
x	-	Shield Room	B83117-B2432-T161	P26428	Albatross Project	-	-
x	W100	Spectrum Analyzer	MS2692A	6201338954	Anritsu	12	17.04.14
x	W006	Power Meter	N1911A	MY50000295	Keysight Technologies	12	17.10.10
x	W007	Power Sensor	N1922A	MY50180022	Keysight Technologies	12	17.10.10
-	W029	10dB Attenuator	8493C	76549	Keysight Technologies	12	17.08.03
x	WC05	RF Cable	SUCOFLEX 102	34287	HUBER + SUHNER	12	17.08.03
x	M719	Thermometer	TH-321	140053	AS ONE	12	17.04.28

### 5.2. Radiated Spurious Emissions

#### 4th Site 10m Semi-Anechoic Chamber

	Ctrl.#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Int.	Last Cal.
x	M506	EMC Chamber	10m	-	TDK Corp.	12	17.07.10
x	M575	EMI Receiver	ESCI	100161	Rohde & Schwarz	12	17.04.19
x	M486	EMI Receiver	ESU40	100050	Rohde & Schwarz	12	17.05.15
x	A043	Biconical Antenna	BBA9106	VHA91032598 (V5)	Schwarzbeck	12	17.04.30
x	A046	Log-periodic Antenna	UHALP9108A1	0830	Schwarzbeck	12	17.04.30
x	A056	Horn Antenna (1-6 GHz)	BBHA9120D	670	Schwarzbeck	12	17.04.30
x	A057	Horn Antenna (6-18 GHz)	HAP06-18W	00000037	TOYO Corp.	12	17.04.30
x	A058	Horn Antenna (18-26.5 GHz)	HAP18-26W	00000016	TOYO Corp.	12	17.02.13
x	RA004	Loop Antenna	HFH2-Z2	882964/029	Rohde & Schwarz	12	17.10.11
x	CS039	Fourth Site RE Cable System 3	-	-	Internal Manufacturing	12	17.01.16
x	CS064	Fourth Site RE Cable System 8	-	-	Internal Manufacturing	12	17.01.16
x	CS065	Fourth Site RE Cable System 8	-	-	Internal Manufacturing	12	17.01.16
x	CS066	Fourth Site RE Cable System 9	-	-	Internal Manufacturing	12	17.01.16
x	M510	RF Selector	NS4900	0802-226	Toyo Corporation	12	17.01.16
x	M706	3dB Attenuator	8491A	MY39267782	Keysight Technologies	12	17.01.16
x	M620	RF Pre-Amp	8447D	2944A10720	Keysight Technologies	12	17.01.16
x	M831	GHz Filter Box	FB-G1	2	Sony Global M&O	12	17.01.16
x	M689	Thermo Meter	CTH-201	004	CUSTOM	12	17.10.17

About calibration interval

Valid until the end of the month listed in "Cal. Int." column.