

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Sony Corporation

System Name: Sound Bar

Model No.: HT-G700

Active Speaker System: SA-G700

Active Subwoofer: SA-WG700

EUT Name	EUT Model No.
Active Subwoofer	SA-WG700

FCC ID: AK8SAWG700

Prepared for : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F19196
Date of Test : Oct.22~28,2019
Date of Report : Nov.13,2019

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	5
1.1. Description of Standards and Results	5
2. GENERAL INFORMATION	6
2.1. Description of Equipment Under Test	6
2.2. Channel list of EUT	7
2.3. Tested Supporting System Details	7
2.4. Block diagram of connection between the EUT and simulators.....	7
2.5. Test Facility	8
2.6. Measurement Uncertainty (95% confidence levels, k=2).....	8
3. POWER LINE CONDUCTED EMISSION TEST	9
3.1. Test Equipments.....	9
3.2. Block Diagram of Test Setup.....	9
3.3. Power Line Conducted Emission Test Limits.....	9
3.4. Configuration of EUT on Test	9
3.5. Operating Condition of EUT.....	10
3.6. Test Procedure	10
3.7. Power Line Conducted Emission Test Results	10
4. RADIATED EMISSION TEST	13
4.1. Test Equipment	13
4.2. Block Diagram of Test Setup.....	14
4.3. Radiated Emission Limit.....	15
4.4. EUT Configuration on Test	15
4.5. Operating Condition of EUT.....	15
4.6. Test Procedure	16
4.7. Radiated Emission Test Results.....	16
5. CONDUCTED SPURIOUS EMISSIONS	33
5.1. Test Equipment	33
5.2. Block Diagram of Test Setup.....	33
5.3. Limit.....	33
5.4. Test Procedure	33
5.5. Test result.....	33
6. BAND EDGE COMPLIANCE TEST	36
6.1. Test Equipment	36
6.2. Limit.....	36
6.3. Test Procedure.....	36
6.4. Test Results.....	36
7. 6dB & 99% Bandwidth Test	41
7.1. Test Equipment	41
7.2. Block Diagram of Test Setup.....	41
7.3. Limit.....	41
7.4. Test Procedure	41
7.5. Test Results.....	42
8. OUTPUT POWER TEST	45
8.1. Test Equipment	45
8.2. Limit (FCC Part 15C 15.247 b(3)).....	45
8.3. Test Procedure	45
8.4. Test Results.....	46
9. POWER SPECTRAL DENSITY TEST	48

9.1.	Test Equipment	48
9.2.	Limit.....	48
9.3.	Test Procedure	48
9.4.	Test Results.....	48
10.	ANTENNA REQUIREMENT.....	50
10.1.	Standard Applicable.....	50
10.2.	Antenna Connected Construction	50
11.	DEVIATION TO TEST SPECIFICATIONS.....	51

Appendix A. Photograph of Test

Appendix B. Photo of the EUT

TEST REPORT CERTIFICATION

Applicant : Sony Corporation
 Manufacturer : Sony Corporation
 System Name : Sound Bar
 Model No. : HT-G700
 Active Speaker System : SA-G700
 Active Subwoofer : SA-WG700
 FCC ID : AK8SAWG700
 (A) EUT Name : Active Subwoofer
 (B) EUT Model No. : SA-WG700
 (C) Test Voltage : AC 120V/60Hz

Tested for comply with:
FCC CFR 47 Part 15 Subpart C

Test procedure used:
ANSI C63.10: 2013
KDB 558074 D01v05r02

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Oct.22~28,2019 Report of date: Nov.13,2019

Prepared by : Brave Zhang / Assistant Reviewed by : Sunny Lu / Deputy Manager



Approved & Authorized Signer :

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.205	PASS
Band Edge Compliance	FCC Part 15: 15.247(d)	PASS
Conducted spurious emissions	FCC Part 15: 15.247(d)	PASS
6dB Bandwidth Test	FCC Part 15: 15.247(a)(2)	PASS
Peak Output Power	FCC Part 15: 15.247(b)(3)	PASS
Power Spectral Density	FCC Part 15: 15.247(e)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

Applicant	Sony Corporation
Applicant Address	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Manufacturer	Sony Corporation
Manufacturer Address	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
System Name	Sound Bar
Model No.	HT-G700
Active Speaker System	SA-G700
Active Subwoofer	SA-WG700
EUT Name	Active Subwoofer
EUT Model No.	SA-WG700
FCC ID	AK8SAWG700
Radio	General 2.4GHz wireless
Frequency Range	2404-2476MHz
Type of Modulation	GFSK
Channel Separation	2MHz
Remote Control	Manufacturer: Sony; Model: RMT-AH507U
Power Cable	Unshielded, Detachable, 1.5m
HDMI Cable	Shielded, Detachable, 1.5m
Sample Type	Prototype production
Date of Receipt	Oct.10,2019
Date of Test	Oct.22~28,2019
The Product covered in this report is Sound Bar; This product consists of Active Speaker System (SA-G700) and Active Subwoofer (SA-WG700).	

Antenna System

Type of Antenna	PCB Antenna
Antenna Peak Gain	2.95dBi


2.2.Channel list of EUT

Channel list	Frequency	Channel list	Frequency
1	2404MHz	20	2442MHz
2	2406MHz	21	2444MHz
3	2408MHz	22	2446MHz
4	2410MHz	23	2448MHz
5	2412MHz	24	2450MHz
6	2414MHz	25	2452MHz
7	2416MHz	26	2454MHz
8	2418MHz	27	2456MHz
9	2420MHz	28	2458MHz
10	2422MHz	29	2460MHz
11	2424MHz	30	2462MHz
12	2426MHz	31	2464MHz
13	2428MHz	32	2466MHz
14	2430MHz	33	2468MHz
15	2432MHz	34	2470MHz
16	2434MHz	35	2472MHz
17	2436MHz	36	2474MHz
18	2438MHz	37	2476MHz
19	2440MHz	--	--

2.3.Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	acer	ZOW	NVX7C

2.4.Block diagram of connection between the EUT and simulators



(EUT: Active Subwoofer)

2.5. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
 : No. 6, Kefeng Road, Science & Technology Park,
 Nanshan District , Shenzhen, Guangdong, China

EMC Lab. : Certificated by Industry Canada
 : Registration Number: IC 5183A-1
 Valid Date: May.07, 2020

: Certificated by DAkkS, Germany
 : Registration No: D-PL-12151-01-00
 Valid Date: Dec.07, 2021

: Accredited by NVLAP, USA
 : NVLAP Code: 200372-0
 Valid Date: Mar.31, 2020

: Certificated by FCC USA.
 : Designation No.: CN5022
 Valid Date: Mar.31, 2020

2.6.Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	2.6dB(150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.6dB(30~200MHz, Polarization: H)
	4.0dB(30~200MHz, Polarization: V)
	3.6dB(200M~1GHz, Polarization: H)
	3.8dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz)	4.6dB(1~6GHz, Distance: 3m)
	4.6dB(6~25GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.7dB(30MHz~1000MHz)
	3.3dB(1~26.5GHz)
Uncertainty for Conduction Spurious emission test	2.0dB
Uncertainty for Output power test	0.8dB
Uncertainty for Bandwidth test	83kHz
Uncertainty for DC power test	0.1%
Uncertainty for test site temperature and humidity	0.6°C
	3%

Note: EMI uncertainty is evaluated by CISPR16-4-2.

The value of measurement uncertainty of EMI is less than U_{CISPR} .

The value is not calculated in the test results.


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	May.17,18	3 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.14,19	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Dec.01,18	1 Year
4.	L.I.S.N.#2	Kyoritsu	K NW-403D	8-1750-2	Apr.18,19	1 Year
5.	Terminator	Hubersuhner	50Ω	No.1	Apr.14,19	1 Year
6.	Terminator	Hubersuhner	50Ω	No.2	Apr.14,19	1 Year
7.	RF Cable	Fujikura	RG55/U	No.1	Apr.13,19	1 Year
8.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

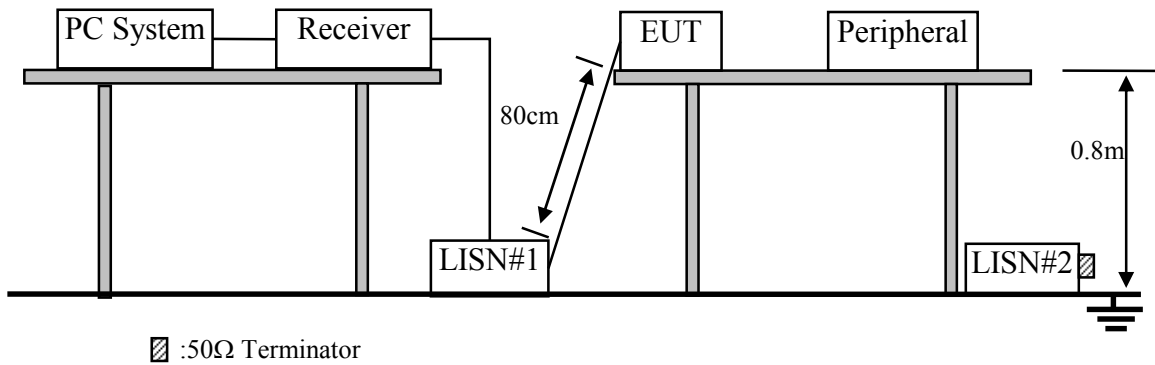

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. Active Subwoofer (EUT)

Model No. : SA-WG700

Serial No. : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT and simulator as shown as Section 3.2.
- 3.5.2. Turn on the power of all equipments.
- 3.5.3. PC run test software to control EUT work in Tx mode.

3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via AC unit connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

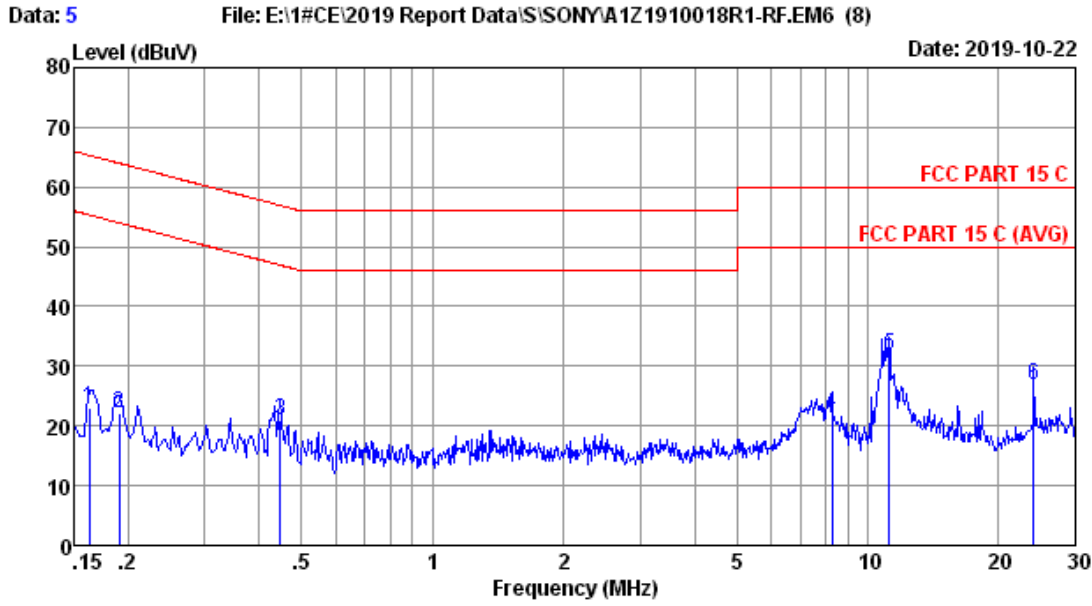

Site no :1# Conduction Data No :5
 Dis./Lisn :2019 ENV216 L LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :25.3*C/57% Engineer :Evan
 EUT :
 Power Rating :AC 120V/60Hz
 Test Mode :2.4g TX

No	Freq (MHz)	LISN Factor (dB)	Cable loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.162	9.60	0.03	13.32	22.95	65.34	42.39	QP
2	0.190	9.60	0.03	12.57	22.20	64.02	41.82	QP
3	0.447	9.60	0.02	11.45	21.07	56.93	35.86	QP
4	8.279	9.70	0.09	12.27	22.06	60.00	37.94	QP
5	11.198	9.70	0.11	21.93	31.74	60.00	28.26	QP
6	24.015	9.62	0.16	17.07	26.85	60.00	33.15	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

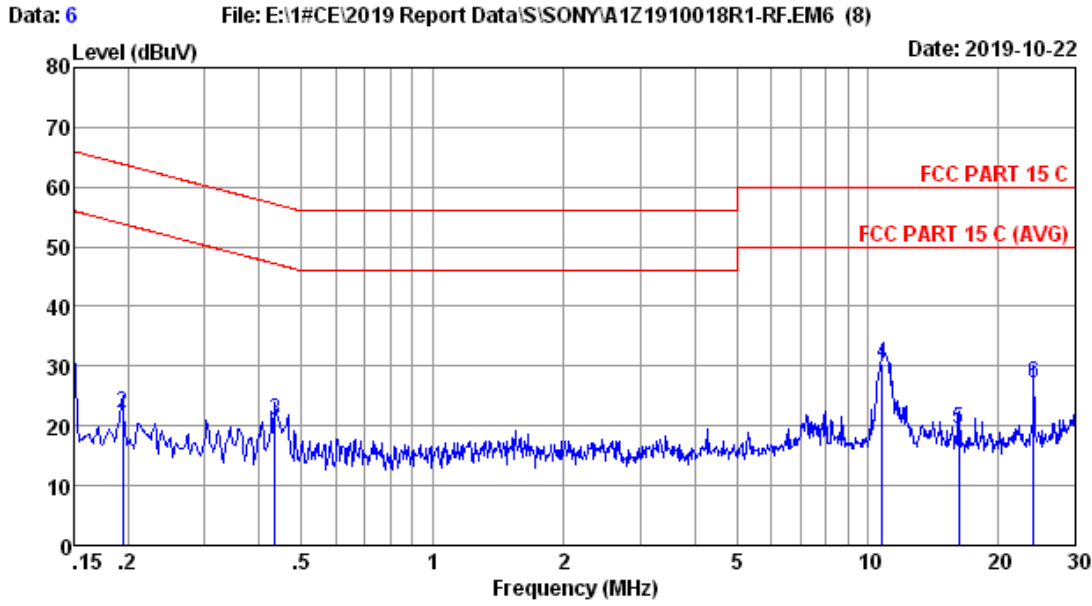

Site no :1# Conduction Data No :6
 Dis./Lisn :2019 ENV216 N LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :25.3*C/57% Engineer :Evan
 EUT :
 Power Rating :AC 120V/60Hz
 Test Mode :2.4g TX

No	Freq (MHz)	LISN Factor (dB)	Cable loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.60	0.03	19.53	29.16	66.00	36.84	QP
2	0.194	9.60	0.03	12.53	22.16	63.84	41.68	QP
3	0.435	9.60	0.02	11.26	20.88	57.15	36.27	QP
4	10.790	9.60	0.10	20.68	30.38	60.00	29.62	QP
5	16.226	9.62	0.13	9.75	19.50	60.00	40.50	QP
6	24.015	9.70	0.16	17.22	27.08	60.00	32.92	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

4.1.1. For frequency range 30MHz~1000MHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber(NSA)	AUDIX	N/A	N/A	May.10,19	1 Year
2.	3#Chamber(SE)	AUDIX	N/A	N/A	May.17,18	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.14,19	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.14,19	1 Year
5.	Amplifier	HP	8447D	2648A04738	Apr.14,19	1 Year
6.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	493	Jul.24,19	1 Year
7.	Loop Antenna	Chase	HLA6120	1062	Apr.18,19	1 Year
8.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3	Dec.01,18	1 Year
9.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.14,19	1 Year
10.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.


4.1.2. For frequency range 1GHz~25GHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber(Svswr)	AUDIX	N/A	N/A	Apr.18,19	1 Year
2.	3#Chamber(SE)	AUDIX	N/A	N/A	May.17,18	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.14,19	1 Year
4.	Horn Antenna	ETS	3115	9510-4580	Dec.13,18	1 Year
5.	Horn Antenna	ETS	3116	00060089	Dec.13,18	1 Year
6.	Amplifier	Agilent	83017A	MY53270084	Oct.13,19	1 Year
7.	RF Cable	Hubersuhner	SUCOFLEX106	505238/6	Apr.13,19	1 Year
8.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

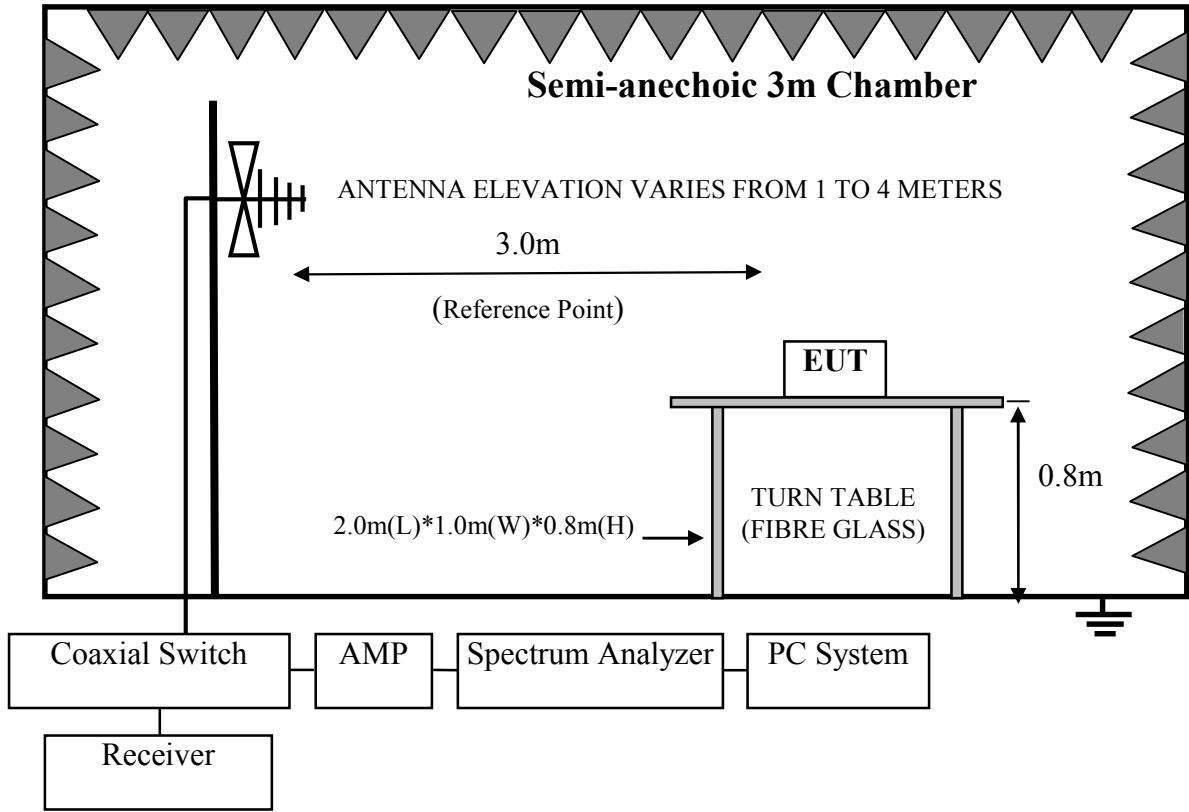

For frequency range 1GHz-25GHz

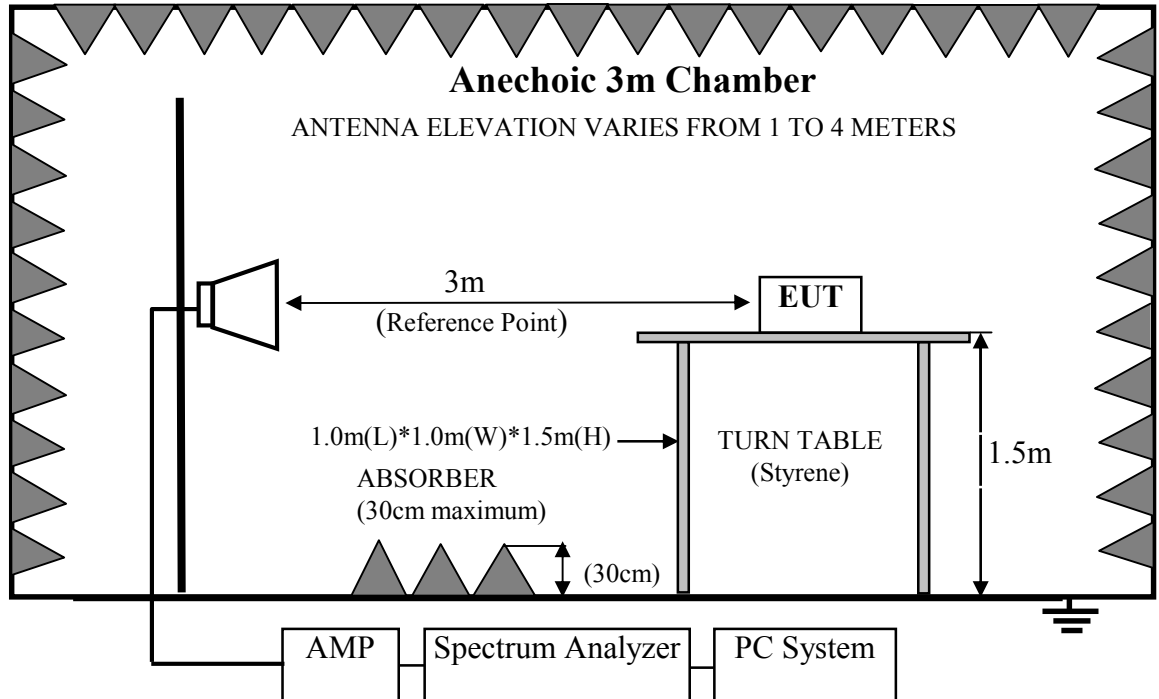

4.3. Radiated Emission Limit

4.3.1. 15.247&209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Remark : (1) Emission level dBμV = 20 log Emission level μV/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4. EUT Configuration on Test

The configurations of EUT are listed in Section 3.4.

4.5. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.5.

4.6. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz.

This device is pulse modulated, a duty cycle factor was used to calculate average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) is checked. And no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7. Radiated Emission Test Results



PASS.


All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

Note 1: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

Duty cycle Factor = $20\log(1/\text{Duty cycle}) = -0.625\text{dB}$

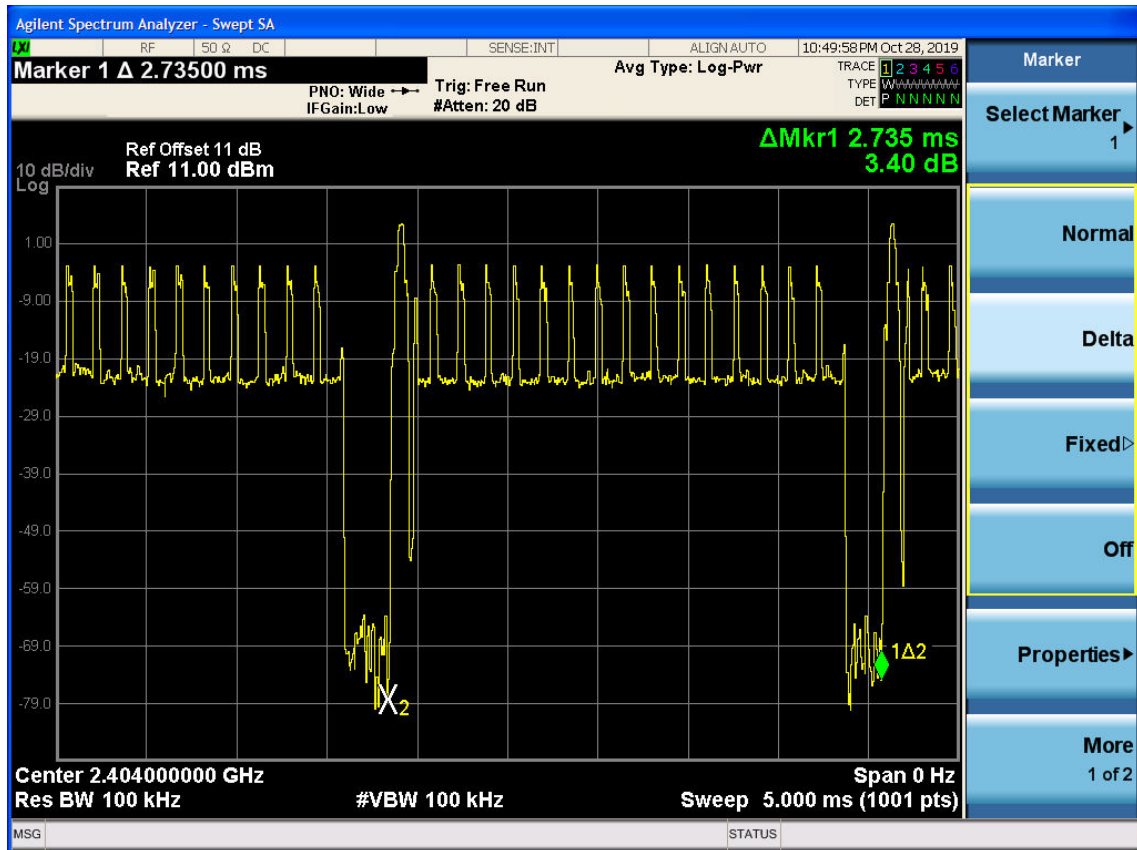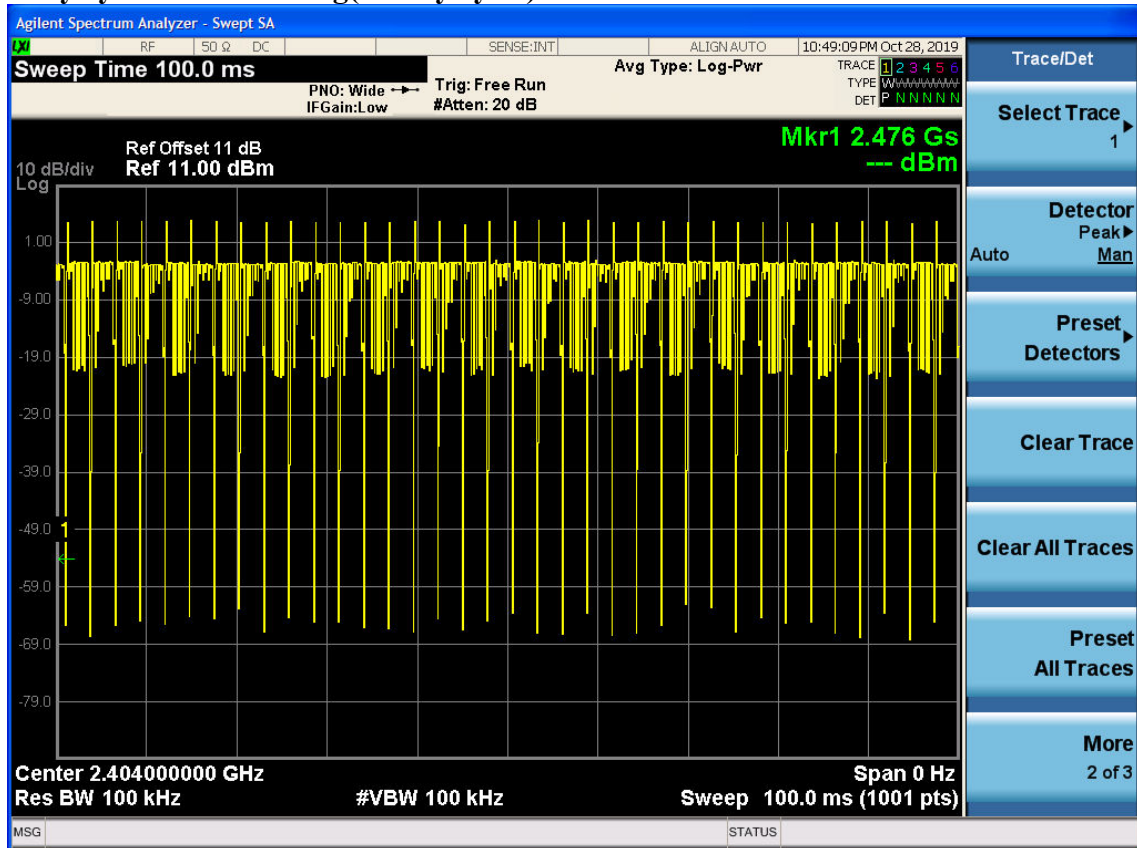

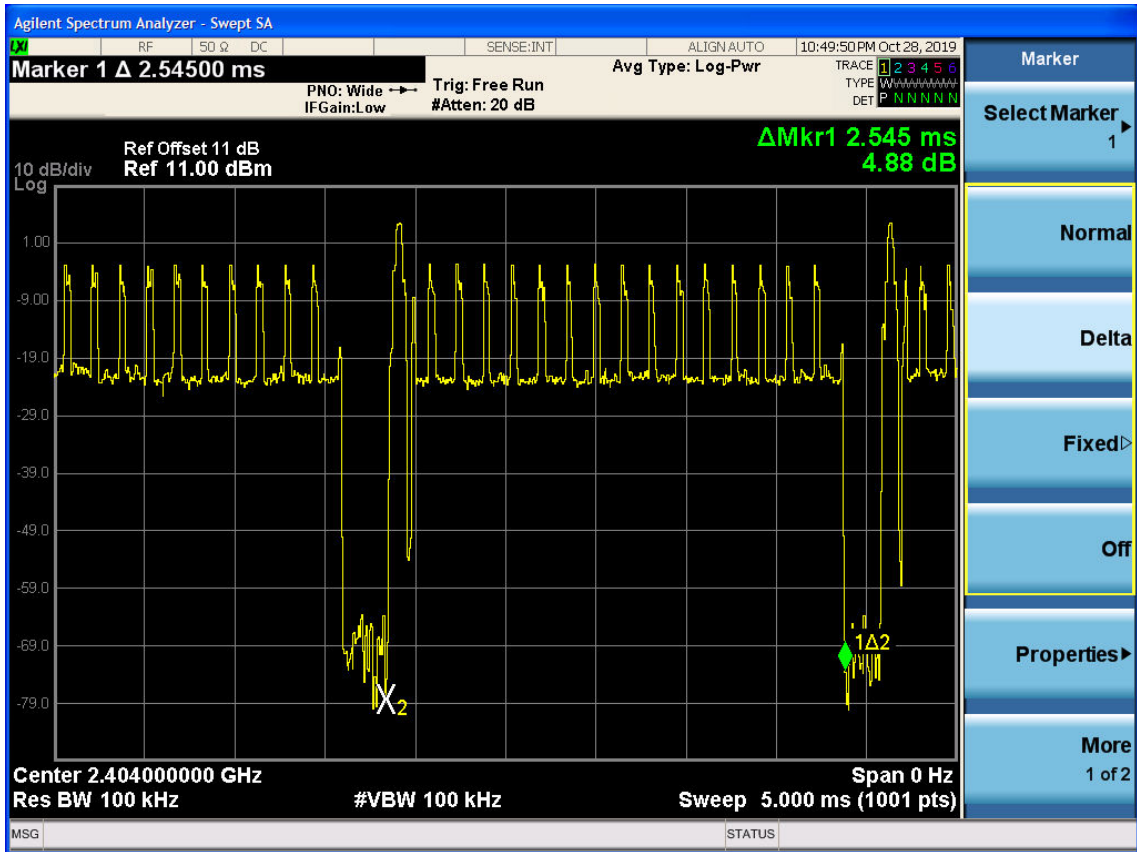


Frequency: 30MHz~1GHz

Data: 6

File: E:\2019 Report Data\S\Sony\A1Z1910018R1-RF.EM6 (8)


Date: 2019-10-26

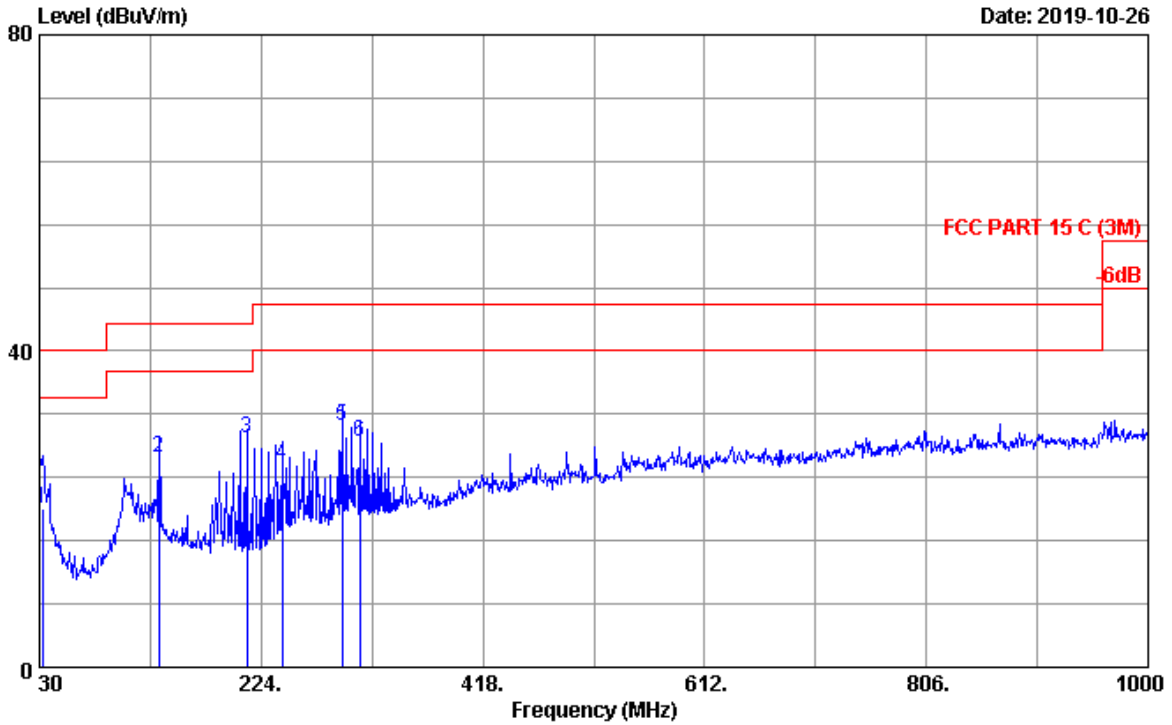

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2019 VULB9168-493 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24.4°C/58% Engineer : Garry
 EUT :
 Power rating : AC 120V/60Hz
 Test Mode : 2.4G TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	32.910	19.20	0.55	0.36	20.11	40.00	19.89	QP
2	134.760	18.50	1.16	6.91	26.57	43.50	16.93	QP
3	211.390	16.86	1.48	10.64	28.98	43.50	14.52	QP
4	242.430	18.00	1.60	6.00	25.60	46.00	20.40	QP
5	294.810	19.70	1.79	9.06	30.55	46.00	15.45	QP
6	310.330	20.10	1.84	6.50	28.44	46.00	17.56	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

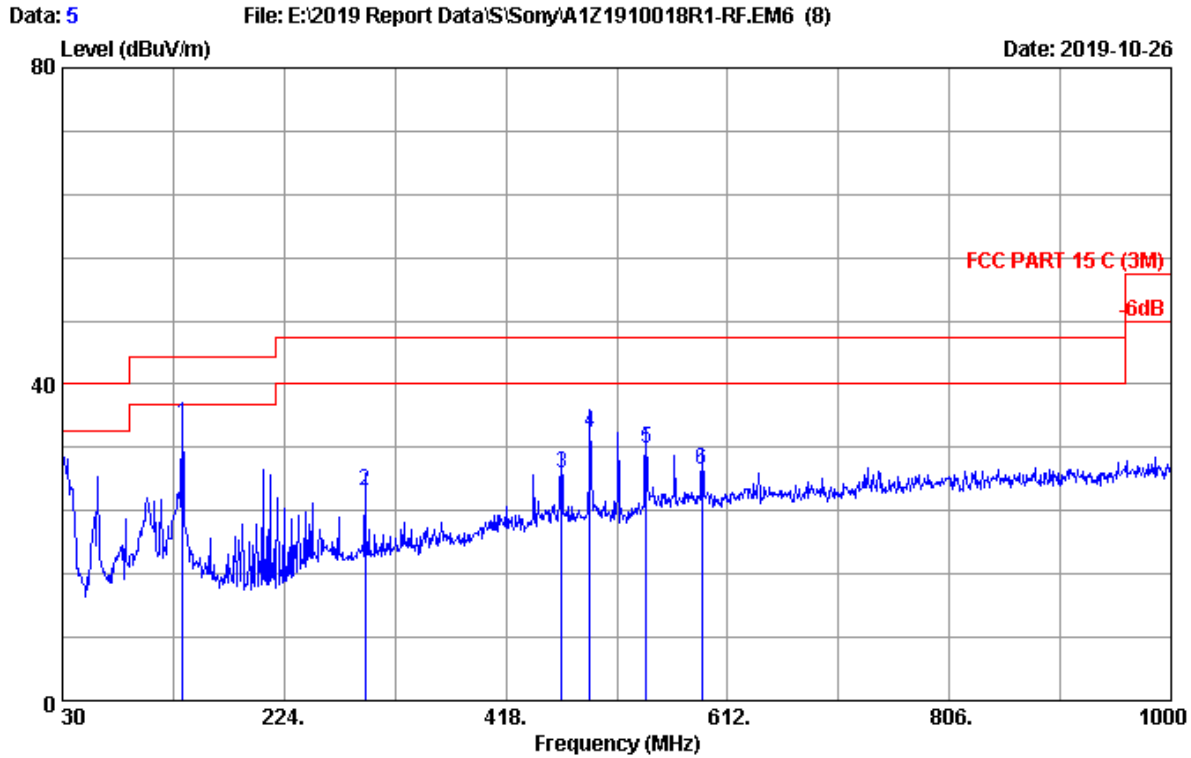

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2019 VULB9168-493 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 24.4°C/58% Engineer : Garry
 EUT :
 Power rating : AC 120V/60Hz
 Test Mode : 2.4G TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	135.000	18.50	1.16	15.40	35.06	43.50	8.44	QP
2	294.810	19.70	1.79	4.92	26.41	46.00	19.59	QP
3	466.500	23.57	2.24	2.89	28.70	46.00	17.30	QP
4	491.720	23.90	2.31	7.72	33.93	46.00	12.07	QP
5	541.190	24.78	2.47	4.72	31.97	46.00	14.03	QP
6	589.690	25.50	2.63	1.12	29.25	46.00	16.75	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

Data: 1


File: F:\2019 Report\SONYA1Z1910018R1-2-FCC-2.4G.EM6 (16)

Date: 2019-10-25

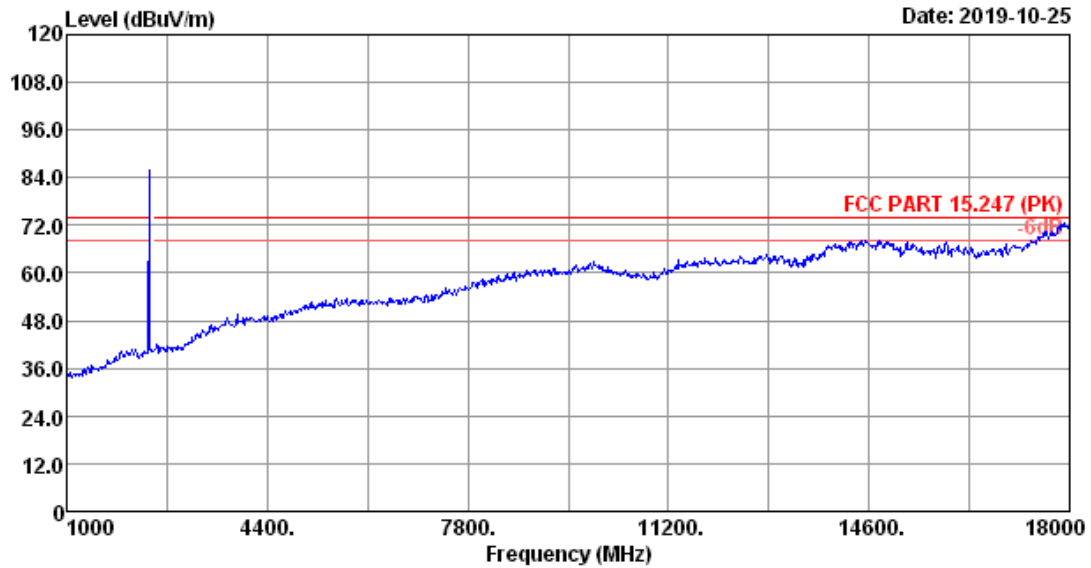

Site no. : 3m Chamber
Dis. / Ant. : 3m 2018 3115-4580
Limit : FCC PART 15.247 (PK)
Env. / Ins. : 22.4*C/55%
Power rating : AC 120V/60Hz
Test Mode : 2404MHz Tx Mode


Data no. : 1
Ant. pol. : HORIZONTAL
Engineer : Garry

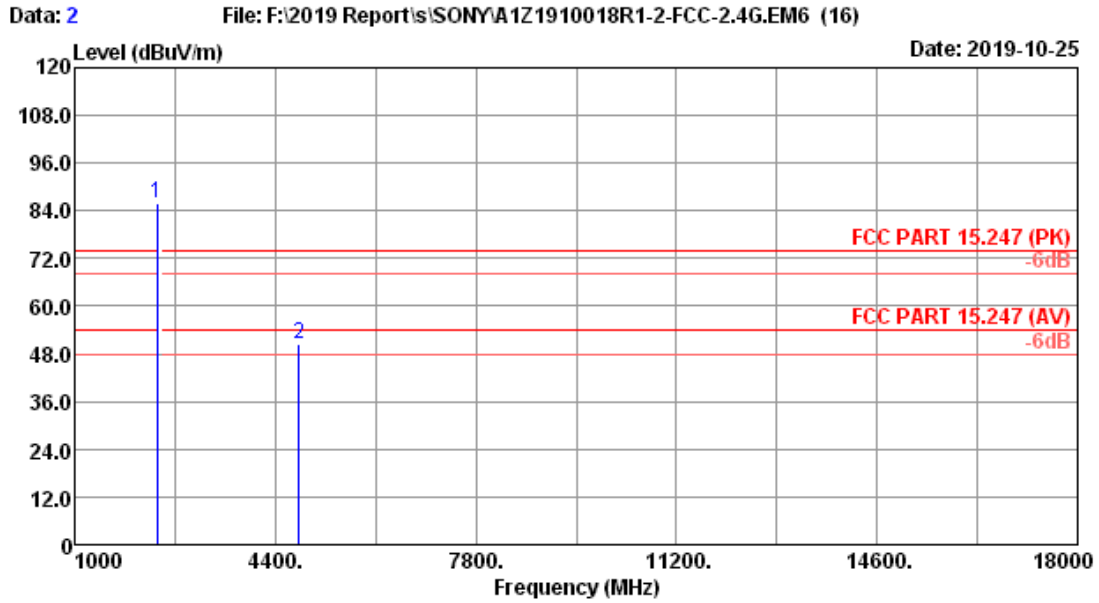


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2018 3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15.247 (PK)
 Env. / Ins. : 22.4°C/55% Engineer : Garry
 Power rating : AC 120V/60Hz
 Test Mode : 2404MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2404.00	27.77	3.05	90.20	35.04	85.98	-----	-----	Peak
2	4808.00	32.10	4.27	48.28	34.36	50.29	74.00	23.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

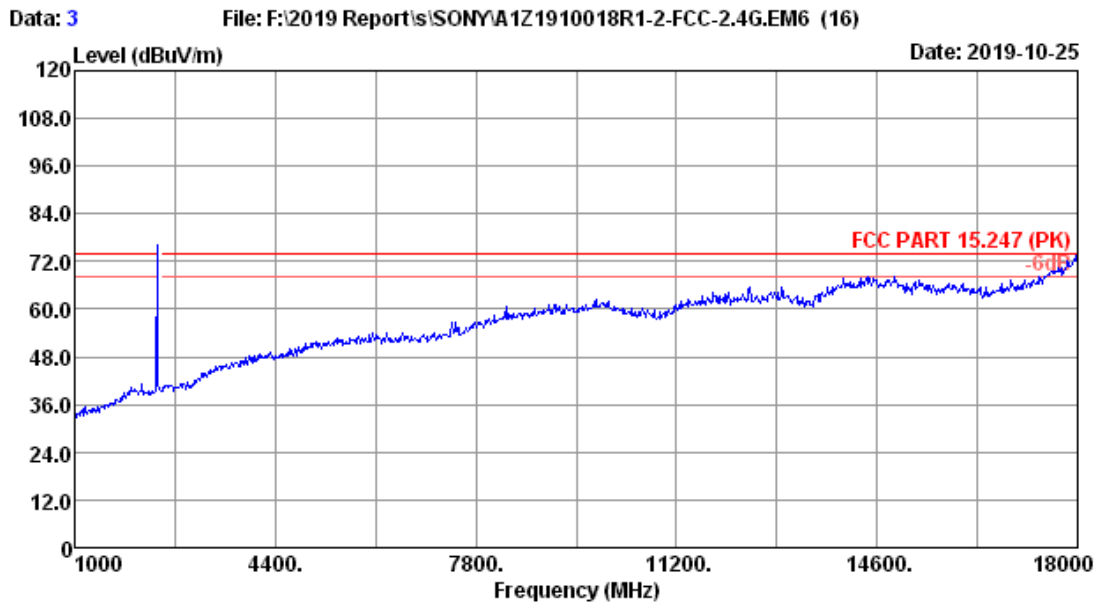


Site no.	: 3m Chamber	Data no.	: 3
Dis. / Ant.	: 3m 2018 3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC PART 15.247 (PK)	Engineer	: Garry
Env. / Ins.	: 22.4°C/55%		
Power rating	: AC 120V/60Hz		
Test Mode	: 2404MHz Tx Mode		

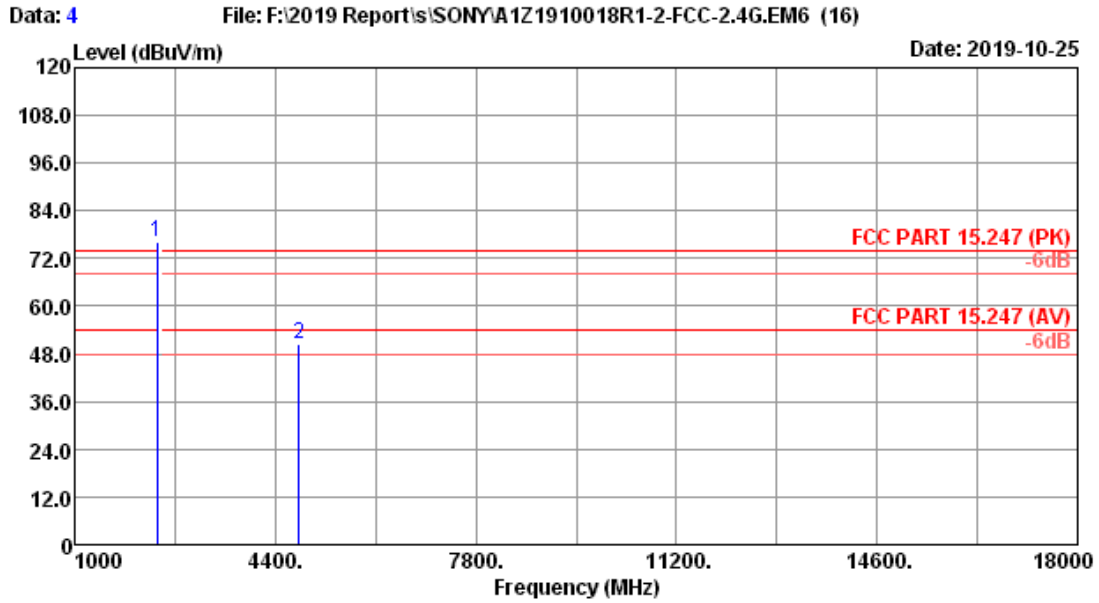


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2018 3115-4580 Ant. pol. : VERTICAL
 Limit : FCC PART 15.247 (PK)
 Env. / Ins. : 22.4*C/55% Engineer : Garry
 Power rating : AC 120V/60Hz
 Test Mode : 2404MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2404.00	27.77	3.05	80.48	35.04	76.26	-----	-----	Peak
2	4808.00	32.10	4.27	48.28	34.36	50.29	74.00	23.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

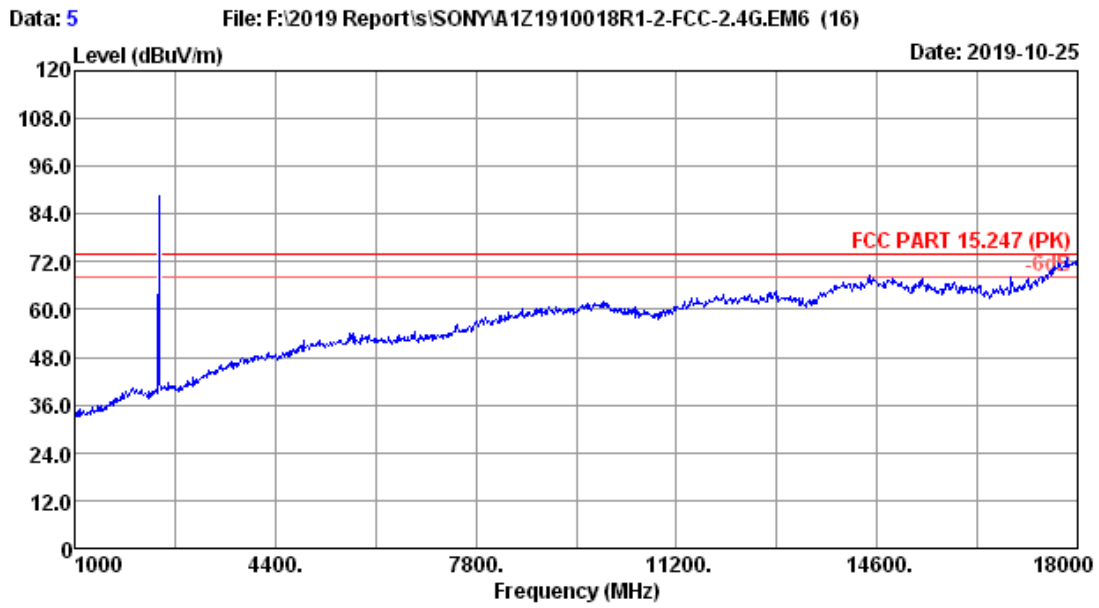


Site no.	: 3m Chamber	Data no.	: 5
Dis. / Ant.	: 3m 2018 3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15.247 (PK)	Engineer	: Garry
Env. / Ins.	: 22.4*C/55%		
Power rating	: AC 120V/60Hz		
Test Mode	: 2440MHz Tx Mode		

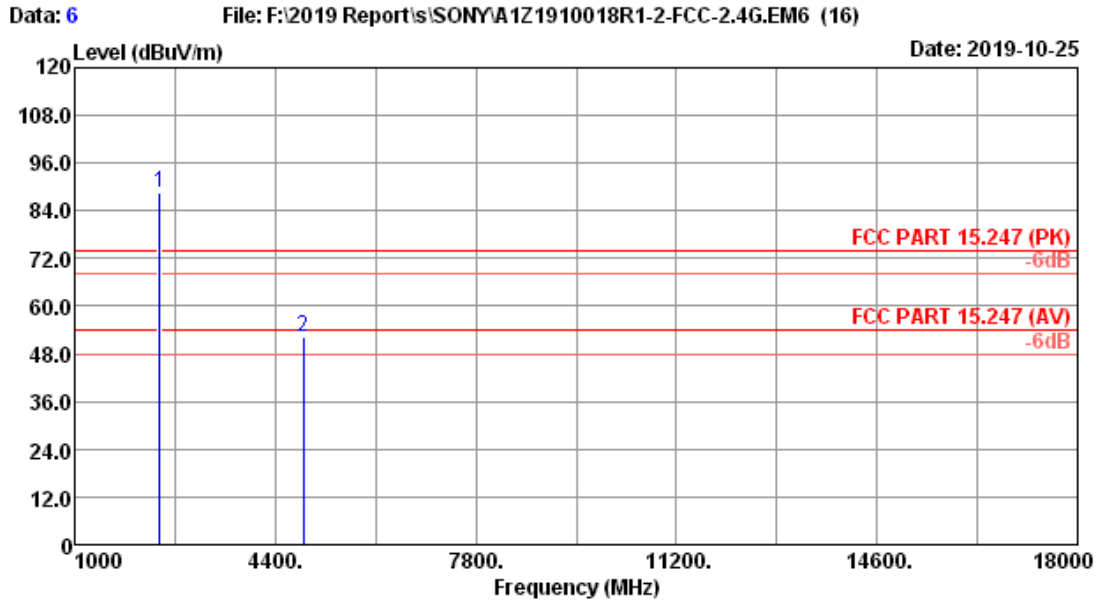


Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2018 3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15.247 (PK)
 Env. / Ins. : 22.4°C/55% Engineer : Garry
 Power rating : AC 120V/60Hz
 Test Mode : 2440MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.87	3.08	92.49	35.02	88.42	-----	-----	Peak
2	4880.00	32.25	4.30	15.55	0.00	52.10	74.00	21.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

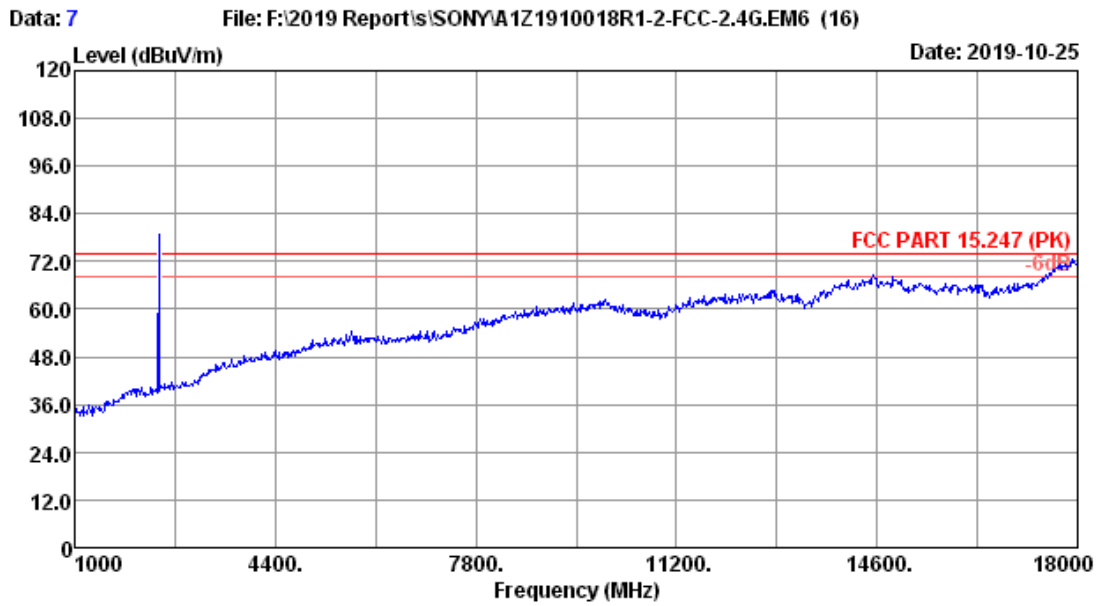


Site no.	: 3m Chamber	Data no.	: 7
Dis. / Ant.	: 3m 2018 3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC PART 15.247 (PK)	Engineer	: Garry
Env. / Ins.	: 22.4°C/55%		
Power rating	: AC 120V/60Hz		
Test Mode	: 2440MHz Tx Mode		

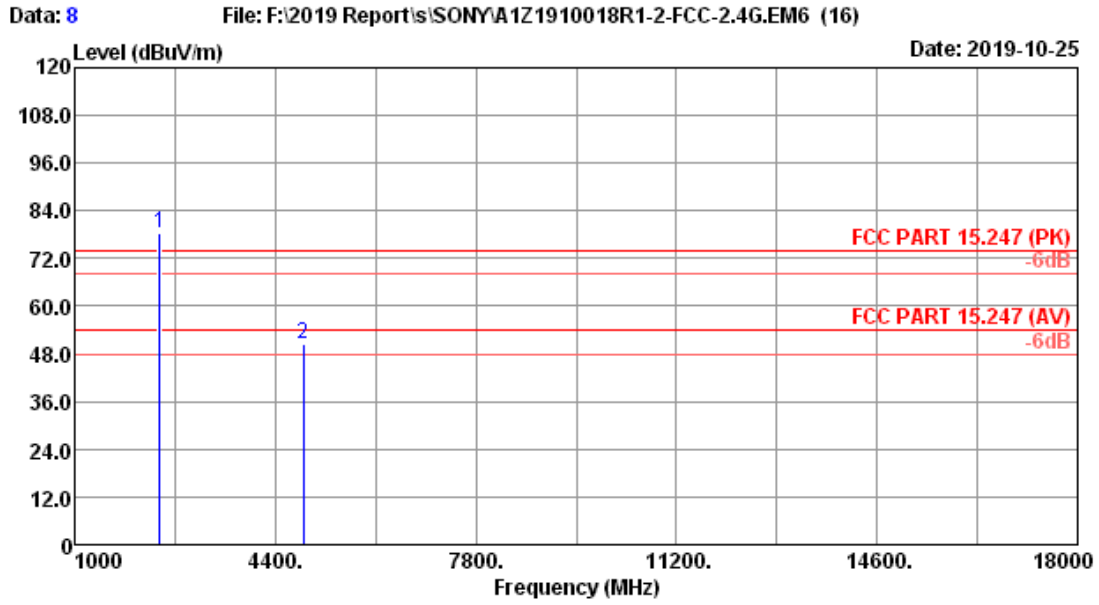


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2018 3115-4580 Ant. pol. : VERTICAL
 Limit : FCC PART 15.247 (PK)
 Env. / Ins. : 22.4°C/55% Engineer : Garry
 Power rating : AC 120V/60Hz
 Test Mode : 2440MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.87	3.08	82.59	35.02	78.52	-----	-----	Peak
2	4880.00	32.25	4.30	13.79	0.00	50.34	74.00	23.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

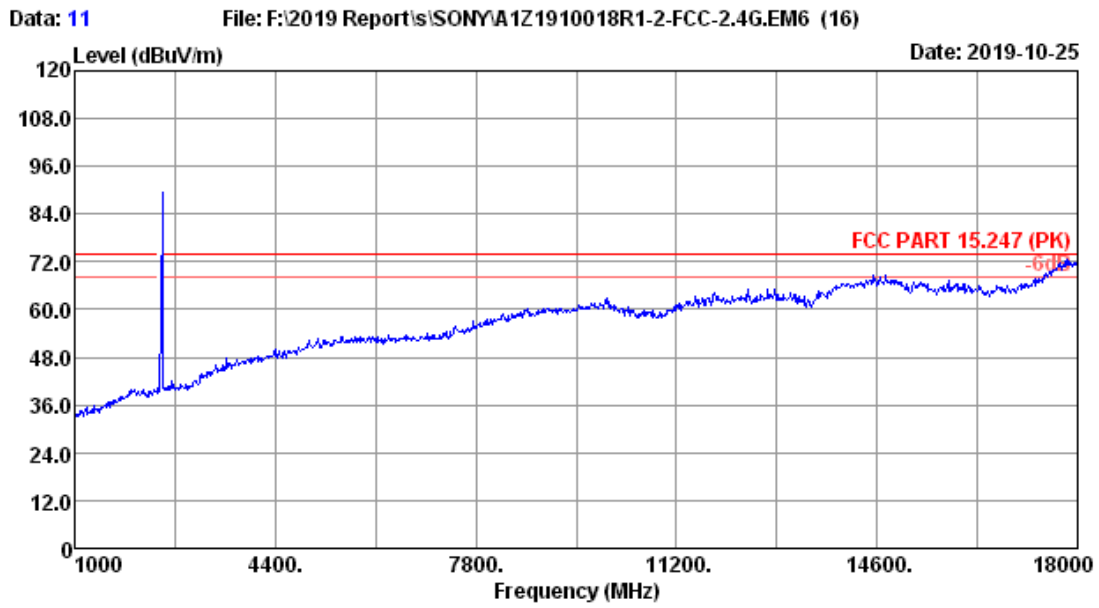


Site no.	: 3m Chamber	Data no.	: 11
Dis. / Ant.	: 3m 2018 3115-4580	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15.247 (PK)	Engineer	: Garry
Env. / Ins.	: 22.4°C/55%		
Power rating	: AC 120V/60Hz		
Test Mode	: 2476MHz Tx Mode		

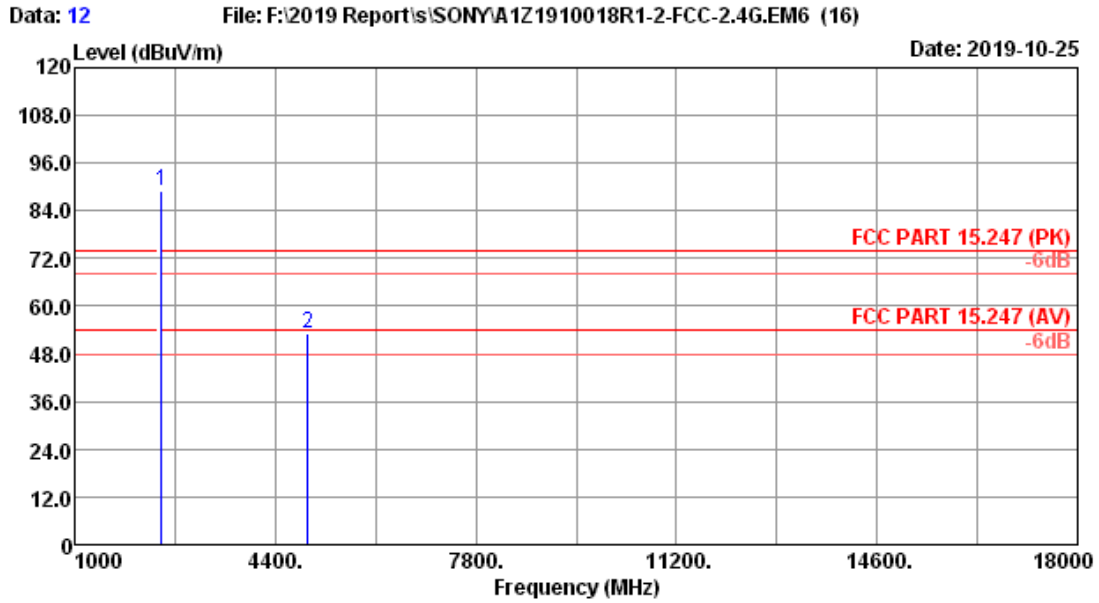


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2018 3115-4580 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15.247 (PK)
 Env. / Ins. : 22.4°C/55% Engineer : Garry
 Power rating : AC 120V/60Hz
 Test Mode : 2476MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2476.00	27.98	3.10	93.14	35.01	89.21	-----	-----	Peak
2	4952.00	32.39	4.32	50.84	34.39	53.16	74.00	20.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

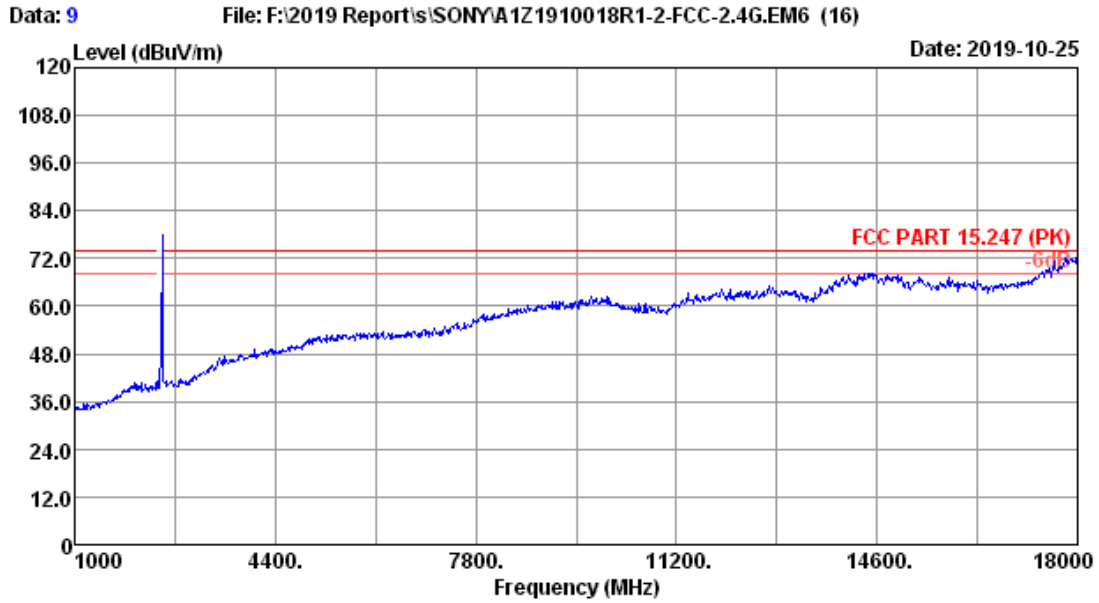

Site no.	: 3m Chamber	Data no.	: 9
Dis. / Ant.	: 3m 2018 3115-4580	Ant. pol.	: VERTICAL
Limit	: FCC PART 15.247 (PK)	Engineer	: Garry
Env. / Ins.	: 22.4°C/55%		
Power rating	: AC 120V/60Hz		
Test Mode	: 2476MHz Tx Mode		

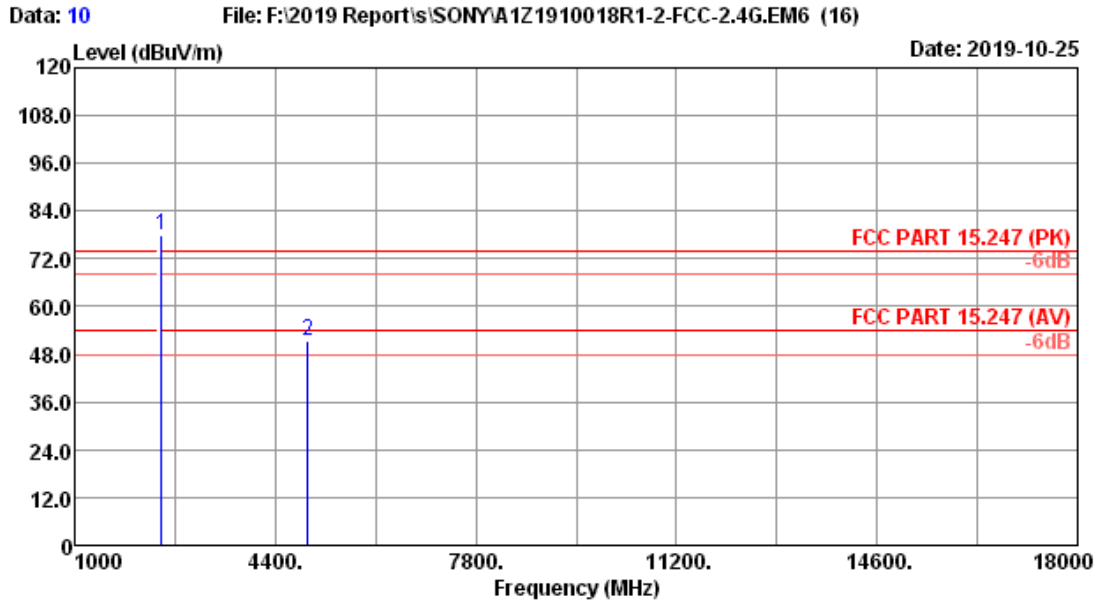

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2018 3115-4580 Ant. pol. : VERTICAL
 Limit : FCC PART 15.247 (PK)
 Env. / Ins. : 22.4*C/55% Engineer : Garry
 Power rating : AC 120V/60Hz
 Test Mode : 2476MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2476.00	27.98	3.10	81.73	35.01	77.80	-----	-----	Peak
2	4952.00	32.39	4.32	14.52	0.00	51.23	74.00	22.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Jun.30,19	1 Year
2.	Attenuator	Agilent	8491B	MY39269201	Oct.13,19	1 Year
3.	RF Cable	EMCI	EMC102-KM-KM 3500	170702	May.13,19	1 Year

5.2. Block Diagram of Test Setup



5.3. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.4. Test Procedure

Use the test method described in ANSI C63.10:

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions with peak detector.


Note: The cable loss and attenuator loss were offset into spectrum analyzer as an amplitude offset.

5.5. Test result


PASS (The testing data was attached in the next pages.)

EUT: Active Subwoofer		
M/N: SA-WG700		
Test date: 2019-10-20	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Garry	Test site: RF site	Temperature: 22.8±0.6 °C


2404MHz(30MHz – 1GHz)

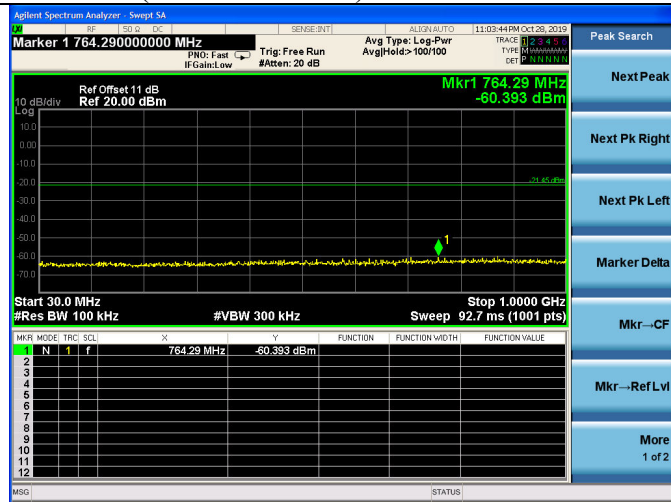


2404MHz(10GHz – 26GHz)

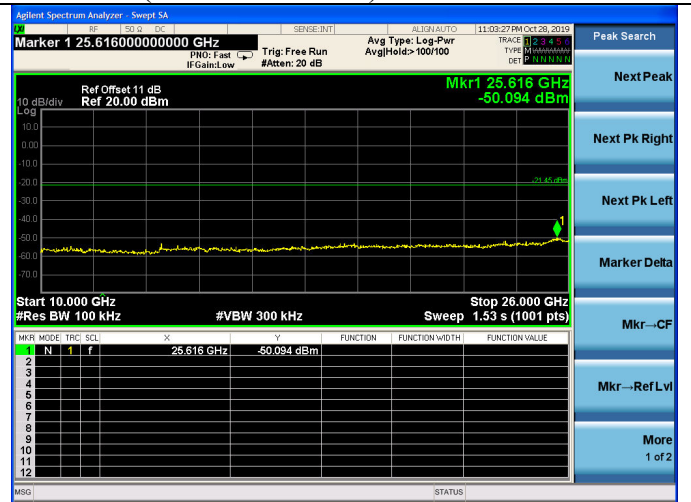

2404MHz(1GHz – 10GHz)

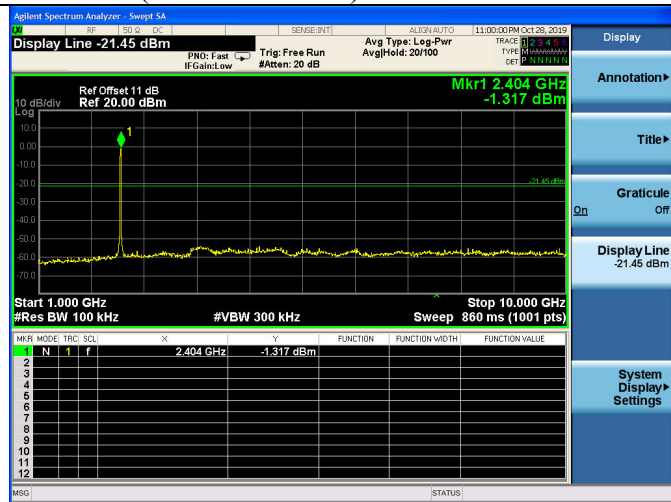


2440(30MHz – 1GHz)

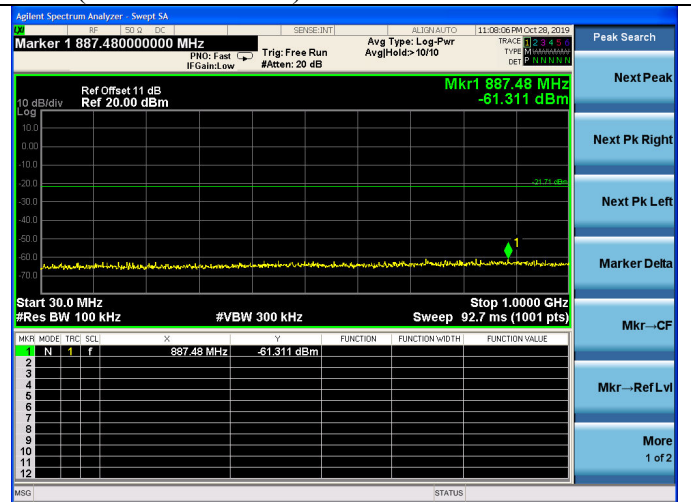


2404MHz(2.3GHz – 2.4GHz)



2440(1GHz – 10GHz)

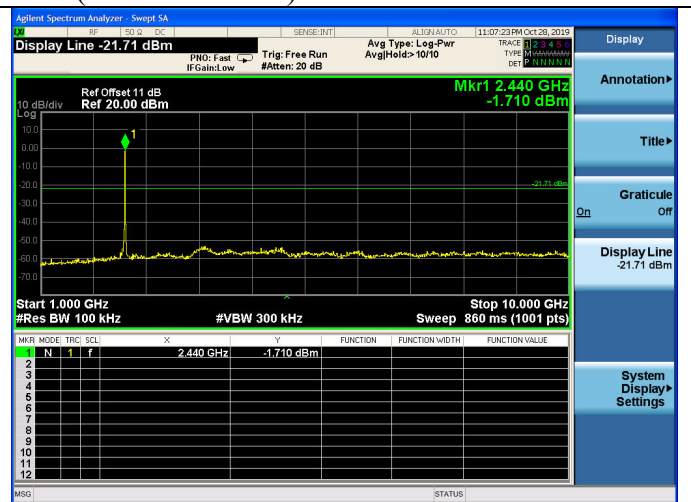


2440(10GHz – 26GHz)

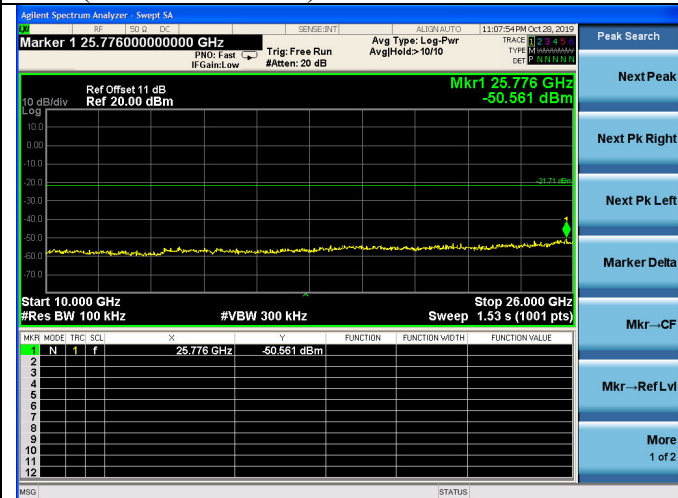


2476MHz(2.4GHz – 2.5GHz)



2476MHz(30MHz – 1GHz)

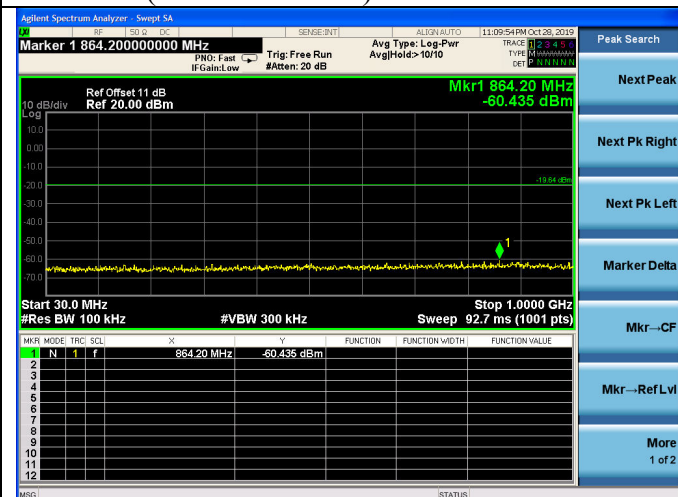

2476MHz(10GHz – 26GHz)

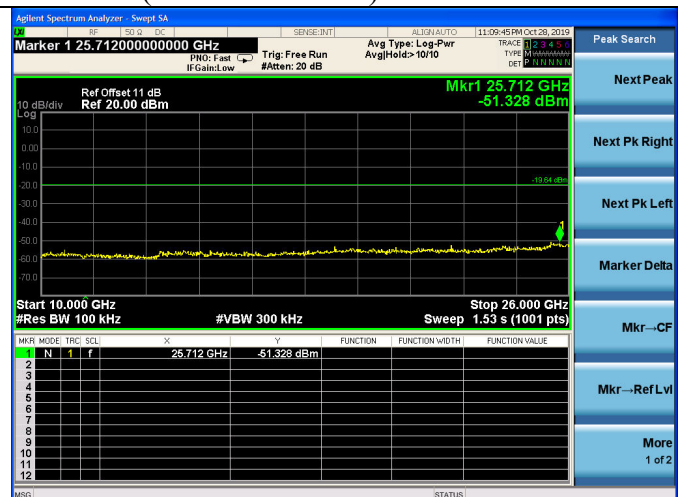

2476MHz(1GHz – 10GHz)

