


Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.8°C/53.5% Engineer : Lynn
 Test Mode : BLE 2Mbps 2402MHz Tx

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2390.00 | 28.01 | 0.92 | 48.40 | 35.24 | 42.09 | 74.00 | 31.91 | Peak |
| 2 | 2401.58 | 28.01 | 0.92 | 104.47 | 35.24 | 98.16 | ----- | ----- | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

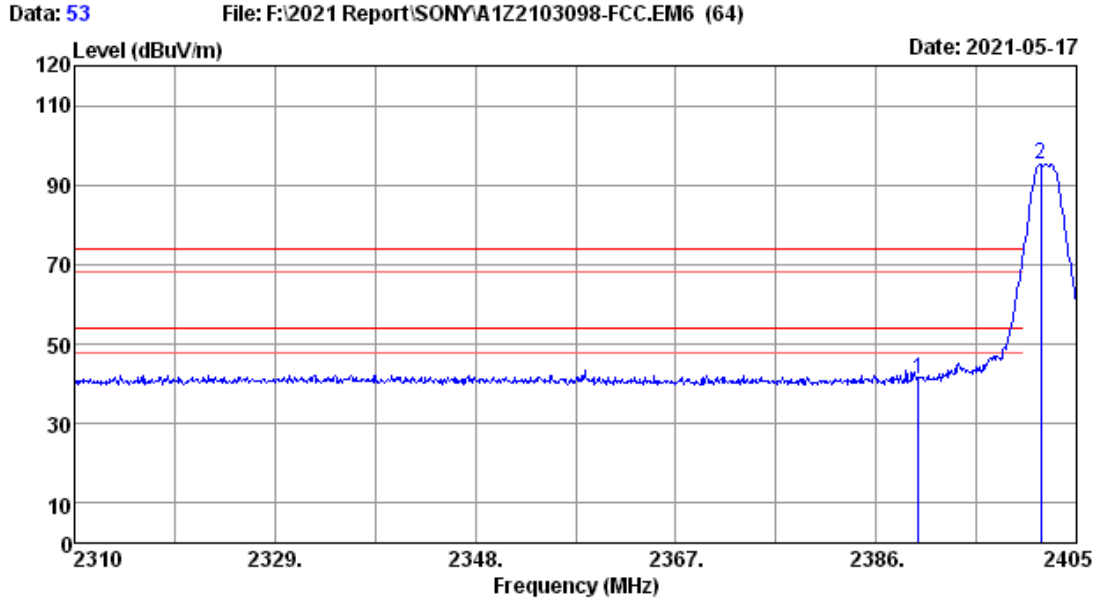

Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.8°C/53.5% Engineer : Lynn
 Test Mode : BLE 2Mbps 2402MHz Tx

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2390.00 | 28.01 | 0.92 | 47.49 | 35.24 | 41.18 | 74.00 | 32.82 | Peak |
| 2 | 2401.58 | 28.01 | 0.92 | 101.46 | 35.24 | 95.15 | ----- | ----- | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

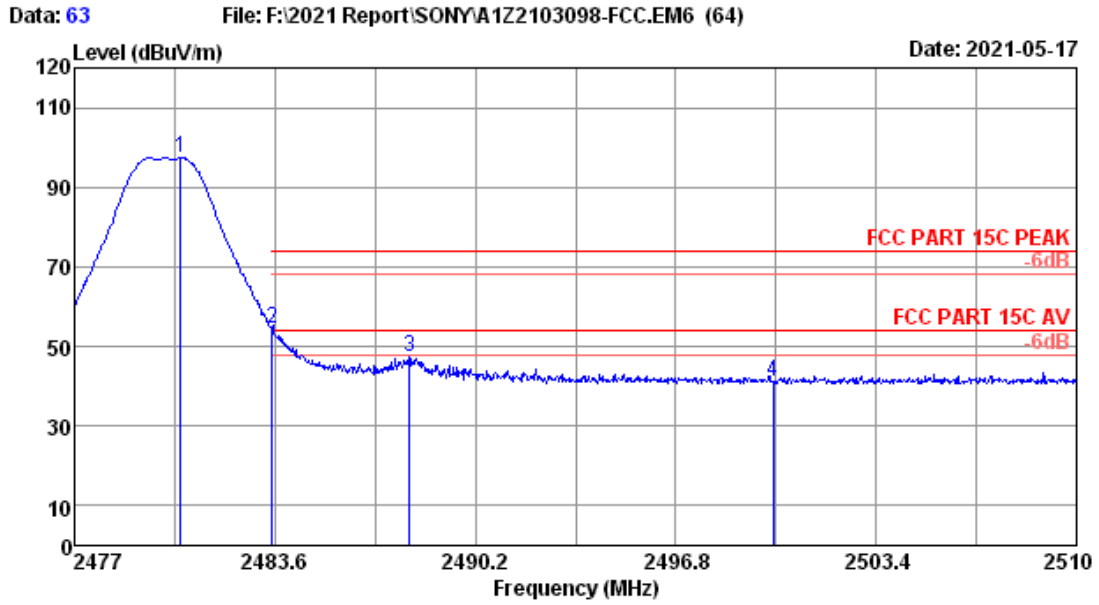


Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.8°C/53.5% Engineer : Lynn
 Test Mode : BLE 2Mbps 2480MHz Tx

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2480.50 | 28.17 | 0.94 | 103.47 | 35.25 | 97.33 | ----- | ----- | Peak |
| 2 | 2483.50 | 28.17 | 0.94 | 60.62 | 35.25 | 54.48 | 74.00 | 19.52 | Peak |
| 3 | 2488.02 | 28.20 | 0.94 | 53.45 | 35.25 | 47.34 | 74.00 | 26.66 | Peak |
| 4 | 2500.00 | 28.20 | 0.95 | 47.39 | 35.25 | 41.29 | 74.00 | 32.71 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

| Frequency (MHz) | Peak level (dBuV/m) | Duty cycle factor (dB) | AV level (dBuV/m) | Limit(dBuV/m) | Conclusion |
|-----------------|---------------------|------------------------|-------------------|---------------|------------|
| 2483.50 | 54.48 | -9.083 | 45.397 | 54 | Pass |

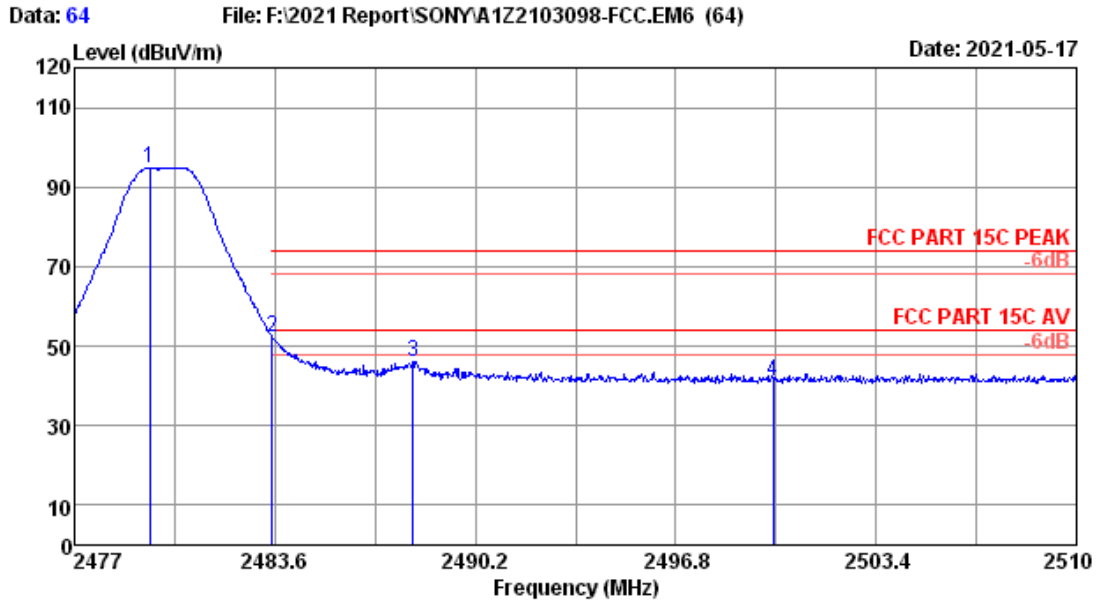

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.8°C/53.5% Engineer : Lynn
 Test Mode : BLE 2Mbps 2480MHz Tx

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2479.48 | 28.17 | 0.94 | 101.07 | 35.25 | 94.93 | ----- | ----- | Peak |
| 2 | 2483.50 | 28.17 | 0.94 | 58.51 | 35.25 | 52.37 | 74.00 | 21.63 | Peak |
| 3 | 2488.15 | 28.20 | 0.94 | 52.14 | 35.25 | 46.03 | 74.00 | 27.97 | Peak |
| 4 | 2500.00 | 28.20 | 0.95 | 47.21 | 35.25 | 41.11 | 74.00 | 32.89 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

9. POWER SPECTRAL DENSITY TEST

9.1. Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|---------------------|--------------|--------------|------------|-----------|---------------|
| 1. | PXA Signal Analyzer | Agilent | N9030A | MY51380221 | Apr.07,21 | 1 Year |
| 2. | Attenuator | Agilent | 8491B | MY39269201 | Oct.12,20 | 1 Year |
| 3. | RF Cable | HUBER+SUHNER | SUCOFLEX-106 | 505238/6 | Apr.07,21 | 1 Year |

9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.3. Test Procedure

Use the test method described in ANSI C63.10 clause 11.10.2:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

9.4. Test Results


| | | |
|--------------------------------|-------------------------|--------------------------|
| EUT: Wireless Neckband Speaker | | |
| M/N: SRS-NB10 | | |
| Test date: 2021-05-20 | Pressure: 102.1±1.0 kpa | Humidity: 51.1±3.0% |
| Tested by: Thomax | Test site: RF site | Temperature: 22.8±0.6 °C |

| Test Mode | Frequency (MHz) | Power density (dBm/3KHz) | Limit (dBm/3KHz) |
|-----------|-----------------|--------------------------|------------------|
| BLE-1Mbps | 2402 | -11.696 | 8 |
| | 2440 | -11.828 | 8 |
| | 2480 | -12.146 | 8 |
| BLE-2Mbps | 2402 | -14.520 | 8 |
| | 2440 | -14.667 | 8 |
| | 2480 | -15.018 | 8 |

Conclusion : PASS


BLE-1Mbps

2402MHz

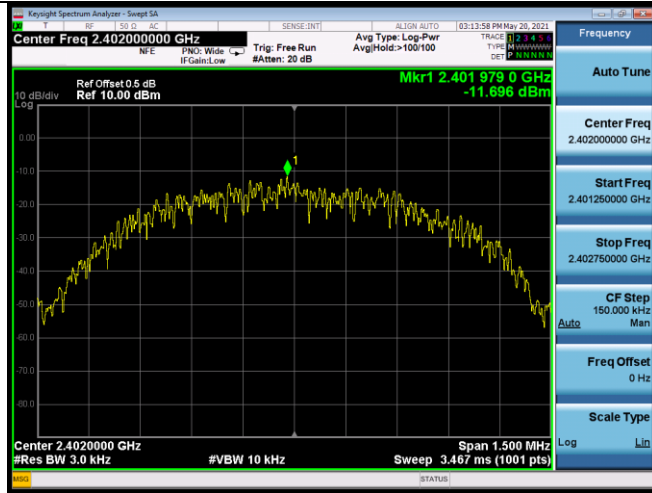


BLE-2Mbps


2402MHz

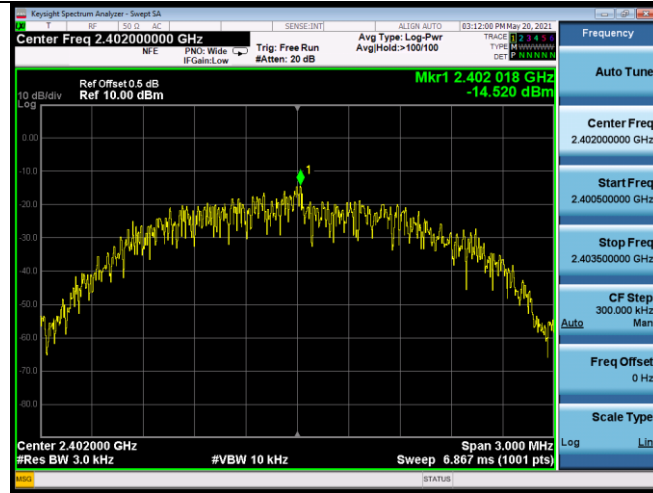


2440MHz

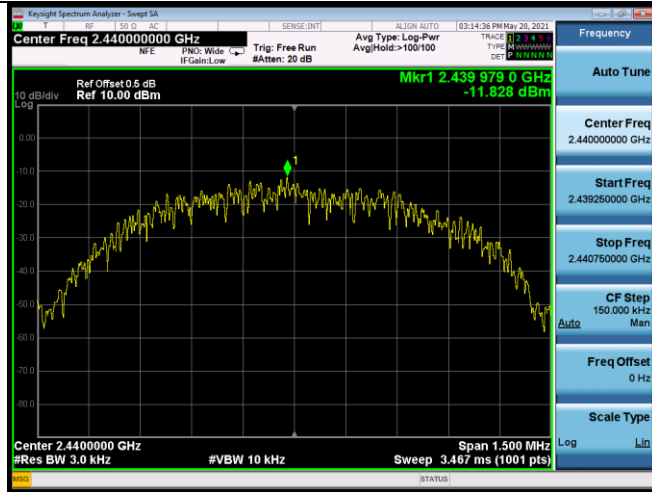


2440MHz

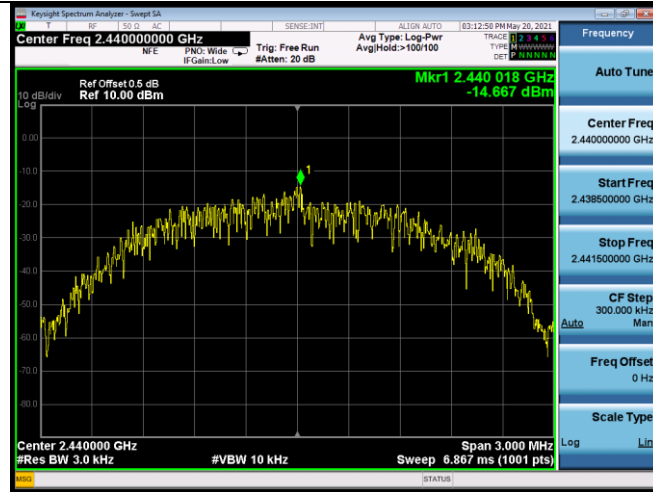

2480MHz

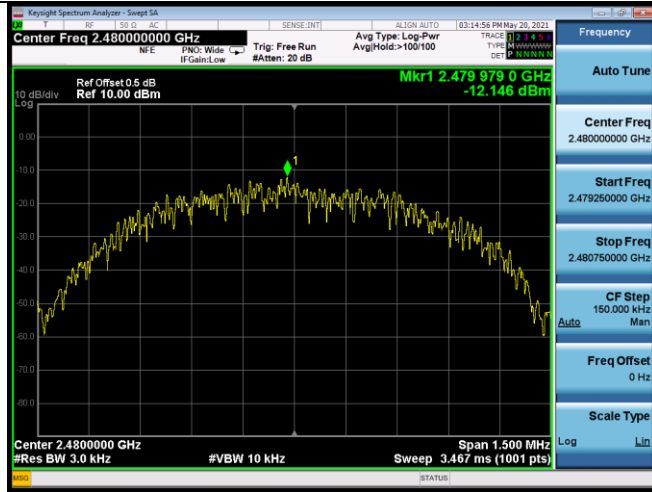

2480MHz

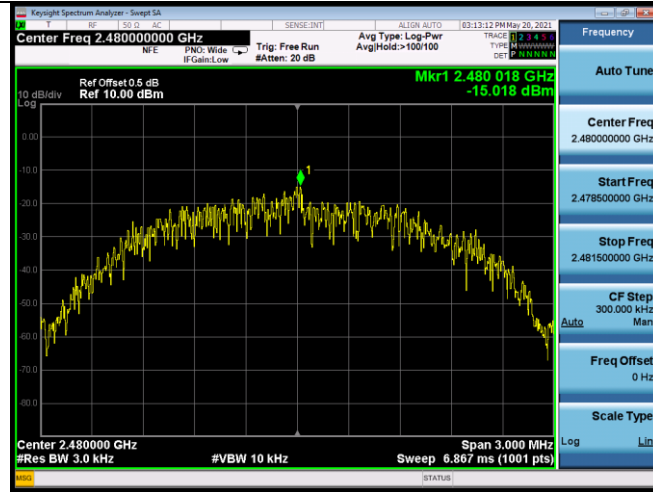

10. ANTENNA REQUIREMENT

10.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. ANTENNA CONNECTED CONSTRUCTION

The antennas used for this product are PCB Antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 3.2dBi.

11. DEVIATION TO TEST SPECIFICATIONS

[NONE]

..... **THE END**