

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Sony Corporation

Wireless Speaker, Personal Audio System

SRS-XB13

FCC ID: AK8SRSXB13

Prepared for : Sony Corporation

1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Kefeng Road, Science & Technology Park,  
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F20210

Date of Test : Sep.16~Nov.24,2020

Date of Report : Nov.25,2020

## TABLE OF CONTENTS

Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS.....</b>	<b>5</b>
1.1. Description of Standards and Results .....	5
<b>2. GENERAL INFORMATION.....</b>	<b>6</b>
2.1. Description of Equipment Under Test .....	6
2.2. Tested Supporting System Details .....	8
2.3. Block Diagram of connection between EUT and simulators.....	8
2.4. Test information.....	8
2.5. Test Facility .....	8
2.6. Measurement Uncertainty (95% confidence levels, k=2).....	9
<b>3. POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>10</b>
3.1. Test Equipments.....	10
3.2. Block Diagram of Test Setup .....	10
3.3. Power Line Conducted Emission Test Limits.....	10
3.4. Configuration of EUT on Test .....	11
3.5. Operating Condition of EUT.....	11
3.6. Test Procedure .....	11
3.7. Power Line Conducted Emission Test Results .....	11
<b>4. RADIATED EMISSION MEASUREMENT.....</b>	<b>14</b>
4.1. Test Equipment .....	14
4.2. Block Diagram of Test Setup.....	15
4.3. Radiated Emission Limit Standard: .....	16
4.4. EUT Configuration on Test .....	16
4.5. Operating Condition of EUT.....	16
4.6. Test Procedure .....	16
4.7. Radiated Emission Test Results.....	17
<b>5. CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>33</b>
5.1. Test Equipment .....	33
5.2. Block Diagram of Test Setup.....	33
5.3. Limit.....	33
5.4. Test Procedure .....	33
5.5. Test result.....	33
<b>6. 6dB &amp; 99% BANDWIDTH TEST.....</b>	<b>36</b>
6.1. Test Equipment .....	36
6.2. Limit.....	36
6.3. Test Procedure .....	36
6.4. Test Results.....	37
<b>7. MAXIMUM PEAK OUTPUT POWER TEST.....</b>	<b>39</b>
7.1. Test Equipment .....	39
7.2. Limit.....	39
7.3. Test Procedure .....	39
7.4. Test Results.....	39
<b>8. BAND EDGE COMPLIANCE TEST .....</b>	<b>40</b>
8.1. Test Equipment .....	40
8.2. Limit.....	40
8.3. Test Produce.....	40
8.4. Test Results .....	40
<b>9. POWER SPECTRAL DENSITY TEST.....</b>	<b>45</b>

9.1.	Test Equipment .....	45
9.2.	Limit.....	45
9.3.	Test Procedure .....	45
9.4.	Test Results.....	45
<b>10.</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>47</b>
10.1.	STANDARD APPLICABLE.....	47
10.2.	ANTENNA CONNECTED CONSTRUCTION.....	47
<b>11.</b>	<b>DEVIATION TO TEST SPECIFICATIONS.....</b>	<b>48</b>

Appendix A. Photograph of Test

Appendix B. Photo of the EUT



## TEST REPORT

Applicant : Sony Corporation  
 Manufacturer : Sony Corporation  
 Product : Wireless Speaker, Personal Audio System  
 FCC ID : AK8SRSXB13  
 (A) Model No. : SRS-XB13  
 (B) Test Voltage : DC 5V

Tested for comply with:

FCC CFR47 Part 15 Subpart C  
 Test procedure used: ANSI C63.10: 2013;  
 KDB 558074 D01v05r01

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.


This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Sep.16~Nov.24,2020 Report of date: Nov.25,2020

Prepared by : Brave Zhang Reviewed by : Sunny Lu  
 Brave Zhang / Assistant Sunny Lu / Deputy Manager

 信華科技 (深圳) 有限公司  
 Audix Technology (Shenzhen) Co., Ltd.  
 EMC 部門報告專用章  
 Stamp only for EMC Dept. Report  
 Signature: David Jin  
 David Jin / Deputy General Manager

Approved & Authorized Signer : David Jin  
 David Jin / Deputy General Manager



## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10 :2013	PASS
Radiated Emission Test	FCC Part 15: 15.209 FCC Part 15: 15.205 FCC Part 15: 15.247(d) ANSI C63.10 : 2013	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(d) ANSI C63.10 : 2013	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(2) ANSI C63.10 : 2013	N/A
6dB & 99% Bandwidth Test	FCC Part 15: 15.247(b)(3) ANSI C63.10 : 2013	PASS
Maximum Peak Output Power Test	FCC Part 15: 15.247(d) ANSI C63.10 : 2013	PASS
Band Edge Compliance Test	FCC Part 15: 15.247(e) ANSI C63.10 : 2013	PASS
Power Spectral Density Test	FCC Part 15: 15.207 ANSI C63.10 :2013	PASS

**2. GENERAL INFORMATION**

## 2.1. Description of Equipment Under Test

Applicant	Sony Corporation
Applicant Address	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Manufacturer	Sony Corporation
Manufacturer Address	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Product	Wireless Speaker, Personal Audio System
Model No.	SRS-XB13
FCC ID	AK8SRSXB13
USB Cable	Shielded, Detachable, 0.2m.
Sample Type	Prototype production
Date of Receipt	Sep.11,2020
Date of Test	Sep.16~Nov.24,2020
Remark: This report only for Bluetooth V4.2.	


<b>Product Feature &amp; Specification</b>		
Product	Wireless Speaker, Personal Audio System	
Model No.	SRS-XB13	
Power Source	<input type="checkbox"/> Commercial Power	AC 100~240 V
	<input checked="" type="checkbox"/> External Power Source	DC 5V
	<input checked="" type="checkbox"/> Li-ion Battery	DC 3.7V
	<input type="checkbox"/> UM battery	DC V

<b>Bluetooth</b>	
Radio	Bluetooth V3.0+EDR; Bluetooth V4.2
Frequency Range	2402-2480MHz
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK
Data Rate	1Mbps, 2Mbps, 3Mbps
Quantity of Channels	79/40
Channel Separation	1MHz/2MHz
<b>Antenna System</b>	
Type of Antenna	Meander Line Antenna (Pattern antenna)
Antenna Peak Gain	1.78dBi

2.2. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	DELL	PP09S	N/A
		Power Cord: Unshielded, Detachable, 1.8m Power Adapter: Manufacturer: DELL, M/N: LA65NS1-00 Cable: Unshielded, Detachable, 4.0m(Bond one ferrite core)			

2.3. Block Diagram of connection between EUT and simulators



**(EUT: Wireless Speaker, Personal Audio System)**

2.4. Test information

A Special Test Software was used to control EUT work in Continuous TX mode (GFSK modulation), and select test channel.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)	Channel	Frequency (MHz)
Tx Mode GFSK modulation	1	Low :CH 0	2402
	1	Middle: CH19	2440
	1	High: CH39	2480

2.5. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.  
 : No. 6, Kefeng Road, Science & Technology Park,  
 Nanshan District , Shenzhen, Guangdong, China

EMC Lab. : Accredited by Industry Canada  
 : Registration Number: IC 5183A-1  
 Valid Date: Mar.31, 2021

: Accredited by DAkkS, Germany  
 : Registration No: D-PL-12151-01-00  
 Valid Date: Dec.07, 2021

: Accredited by NVLAP, USA  
 : NVLAP Code: 200372-0  
 Valid Date: Mar.31, 2021

: Certificated by FCC USA.  
 : Designation No.: CN5022  
 Valid Date: Mar.31, 2021



2.6. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	2.6dB(150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.6dB(30~200MHz, Polarization: H)
	4.0dB(30~200MHz, Polarization: V)
	3.6dB(200M~1GHz, Polarization: H)
	3.8dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz)	4.6dB(1~6GHz, Distance: 3m)
	4.6dB(6~25GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test	3.7dB(30MHz~1000MHz)
	3.3dB(1~26.5GHz)
Uncertainty for Conduction Spurious emission test	2.0dB
Uncertainty for Output power test	0.8dB
Uncertainty for Bandwidth test	83kHz
Uncertainty for DC power test	1.9%
Uncertainty for test site temperature and humidity	0.6°C
	3%

Note: EMI uncertainty is evaluated by CISPR16-4-2.

The value of measurement uncertainty of EMI is less than  $U_{CISPR}$ .

The value is not calculated in the test results.


### 3. POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	May.17,18	3 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.12,20	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Oct.13,19	1 Year
4.	L.I.S.N.#2	Kyoritsu	KNW-407	8-1636-1	Apr.12,20	1 Year
5.	I.S.N.	TESEQ	ISN S751	45593	Oct.12,19	1 year
6.	Terminator	Hubersuhner	50Ω	No.1	Apr.12,20	1 Year
7.	Terminator	Hubersuhner	50Ω	No.2	Apr.12,20	1 Year
8.	RF Cable	EMCI	EMCCFD300-BM-NM-2000	190422	Apr.12,20	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

#### 3.2. Block Diagram of Test Setup

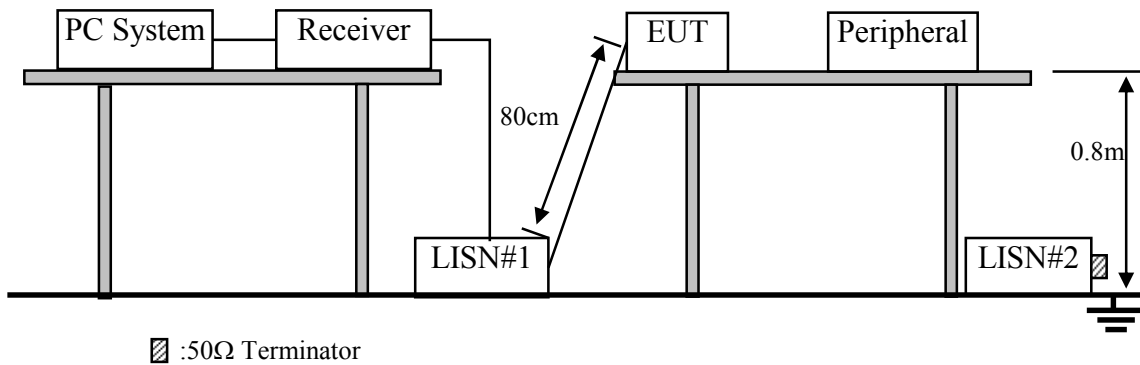

#### 3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

### 3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

#### 3.4.1. Wireless Speaker, Personal Audio System (EUT)

Model Number : SRS-XB13

Serial Number : N/A

#### 3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

### 3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipments.

3.5.3. PC run test software to control EUT work in BT 4.2 Tx mode.

### 3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via AC unit connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 3.7. Power Line Conducted Emission Test Results

**PASS.** (All emissions not reported below are too low against the prescribed limits.)

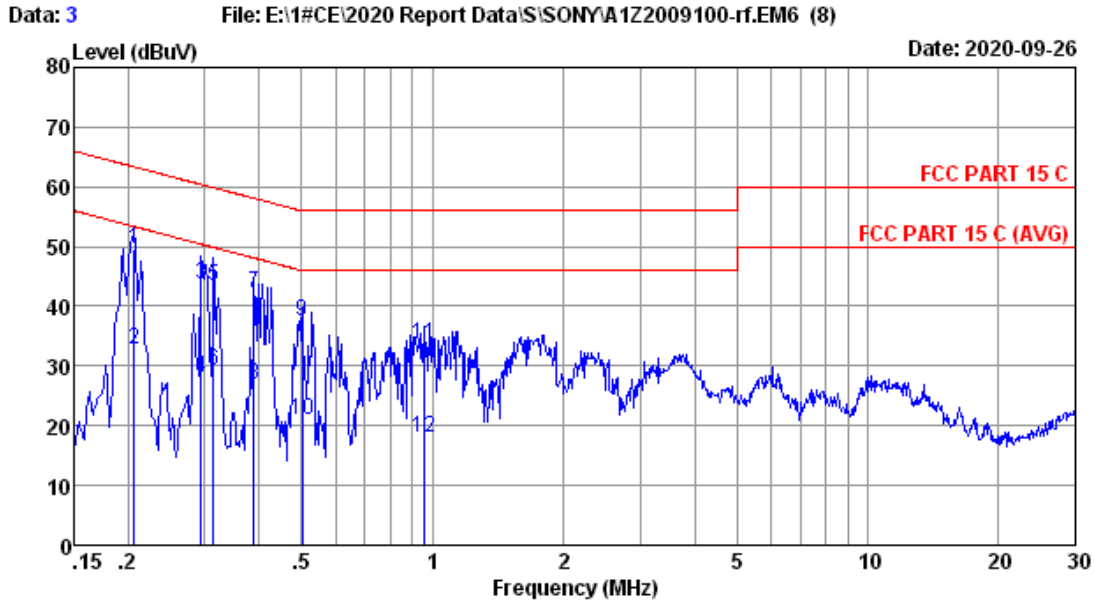


```

Site no      :1# Conduction           Data No     :3
Dis./Lisn   :2019 ENV216 L          LISN phase:
Limit       :FCC PART 15 C
Env./Ins.   :25.7*C/60%
EUT        :
Power Rating :DC 5V
Test Mode   :BLE Tx Mode
    
```

No	Freq (MHz)	LISN Factor (dB)	Cable loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.206	9.60	0.01	40.10	49.71	63.36	13.65	QP
2	0.206	9.60	0.01	23.10	32.71	53.36	20.65	Average
3	0.294	9.60	0.01	34.10	43.71	60.41	16.70	QP
4	0.294	9.60	0.01	18.40	28.01	50.41	22.40	Average
5	0.313	9.60	0.01	33.70	43.31	59.88	16.57	QP
6	0.313	9.60	0.01	19.61	29.22	49.88	20.66	Average
7	0.389	9.60	0.01	32.66	42.27	58.08	15.81	QP
8	0.389	9.60	0.01	17.16	26.77	48.08	21.31	Average
9	0.502	9.60	0.01	27.84	37.45	56.00	18.55	QP
10	0.502	9.60	0.01	11.26	20.87	46.00	25.13	Average
11	0.953	9.60	0.02	23.99	33.61	56.00	22.39	QP
12	0.953	9.60	0.02	8.26	17.88	46.00	28.12	Average

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

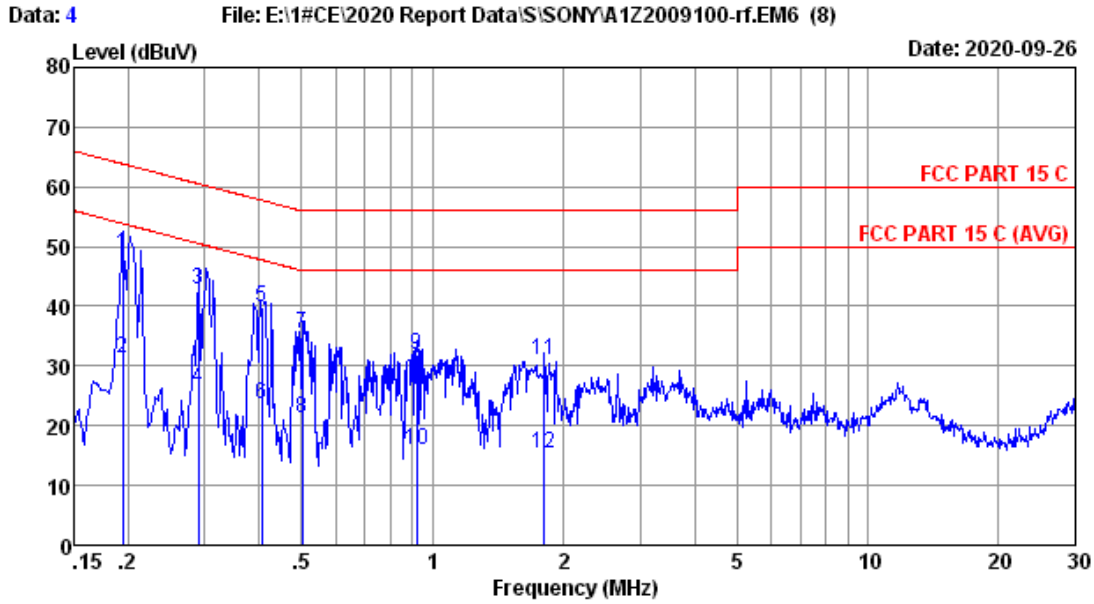

```

Site no      :1# Conduction           Data No     :4
Dis./Lisn   :2019 ENV216 N          LISN phase:
Limit       :FCC PART 15 C
Env./Ins.   :25.7*C/60%
EUT         :
Power Rating :DC 5V
Test Mode    :BLE Tx Mode
Engineer    :Evan
    
```

No	Freq (MHz)	LISN Factor (dB)	Cable loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.194	9.60	0.01	39.16	48.77	63.84	15.07	QP
2	0.194	9.60	0.01	21.63	31.24	53.84	22.60	Average
3	0.289	9.60	0.01	33.26	42.87	60.54	17.67	QP
4	0.289	9.60	0.01	16.63	26.24	50.54	24.30	Average
5	0.406	9.60	0.01	30.16	39.77	57.73	17.96	QP
6	0.406	9.60	0.01	14.15	23.76	47.73	23.97	Average
7	0.502	9.60	0.01	25.91	35.52	56.00	20.48	QP
8	0.502	9.60	0.01	11.52	21.13	46.00	24.87	Average
9	0.918	9.60	0.02	22.29	31.91	56.00	24.09	QP
10	0.918	9.60	0.02	6.26	15.88	46.00	30.12	Average
11	1.810	9.60	0.03	21.48	31.11	56.00	24.89	QP
12	1.810	9.60	0.03	5.63	15.26	46.00	30.74	Average

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.



## 4. RADIATED EMISSION MEASUREMENT

### 4.1. Test Equipment

Frequency range: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber(NSA)	AUDIX	N/A	N/A	May.03,20	1 Year
2.	3#Chamber(SE)	AUDIX	N/A	N/A	May.17,18	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.11,20	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.12,20	1 Year
5.	Amplifier	HP	8447D	2648A04738	Apr.11,20	1 Year
6.	Bi log Antenna	TESEQ	CBL6112D	25237	Nov.26,19	1 Year
7.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3	Oct.11,20	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.11,20	1 Year
9.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A


Note: N/A means Not applicable.

Frequency range: above 1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber(Svswr)	AUDIX	N/A	N/A	Apr.15,20	1 Year
2.	3#Chamber(SE)	AUDIX	N/A	N/A	May.17,18	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.11,20	1 Year
4.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	Jul.30,20	1 Year
5.	Amplifier	Agilent	83017A	MY53270084	Oct.13,19	1 Year
6.	RF Cable	Hubersuhner	SUCOFLEX-106	505238/6	Apr.11,20	1 Year
7.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup  
For frequency range 30MHz-1000MHz

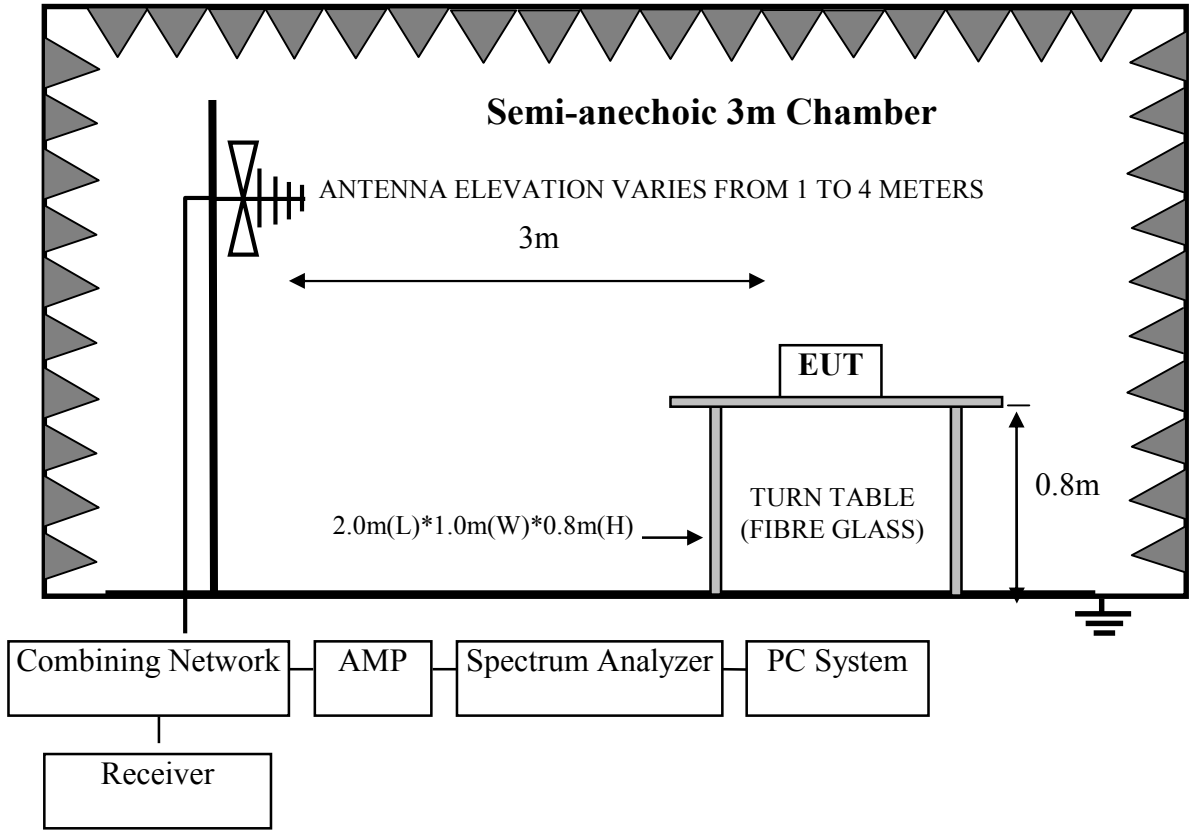

For frequency range 1GHz-25GHz

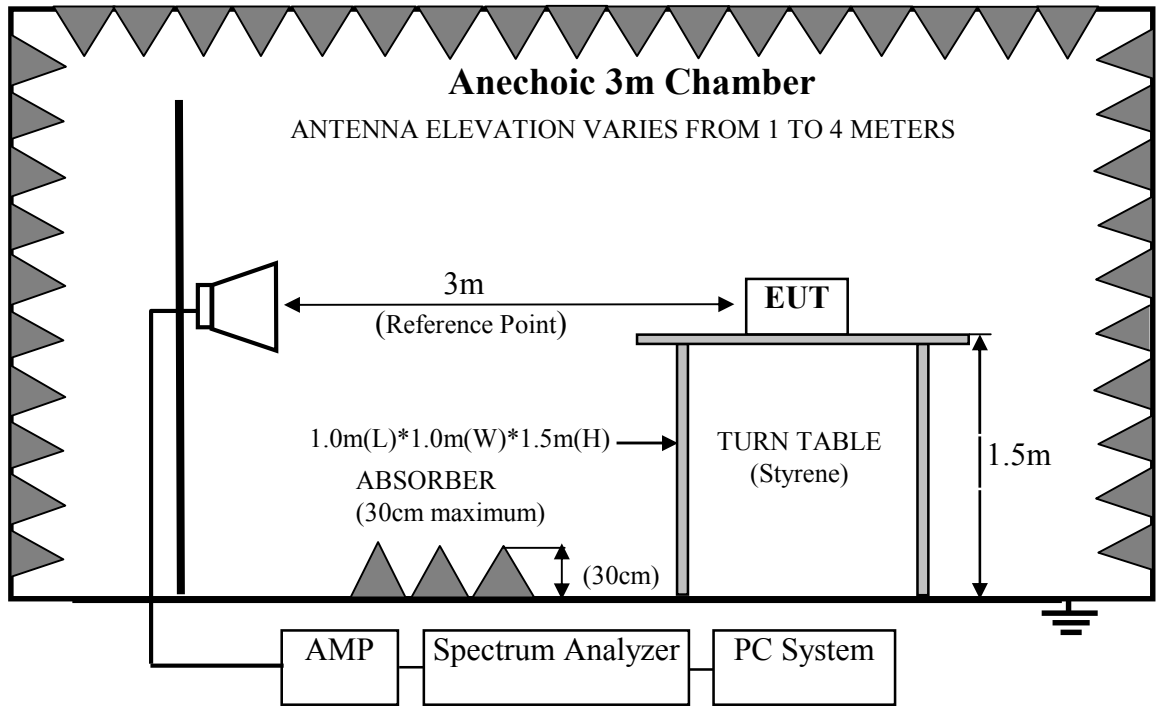

4.3. Radiated Emission Limit Standard:

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remark :
- (1) Emission level dBμV = 20 log Emission level μV/m
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
  - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. Wireless Speaker, Personal Audio System (EUT)

Model Number : SRS-XB13  
 Serial Number : N/A

4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in BT 4.2 Tx mode.

4.6. Test Procedure

**Frequency below 30MHz:**

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)\*2.4m(W)\*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it.EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as the test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz.

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.


#### 4.7. Radiated Emission Test Results

**PASS.**

All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.


Note: The duty cycle factor for calculate average level is -12.690dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.

Duty cycle factor =  $20 \log (1/\text{duty cycle}) = -12.690 \text{ dB}$

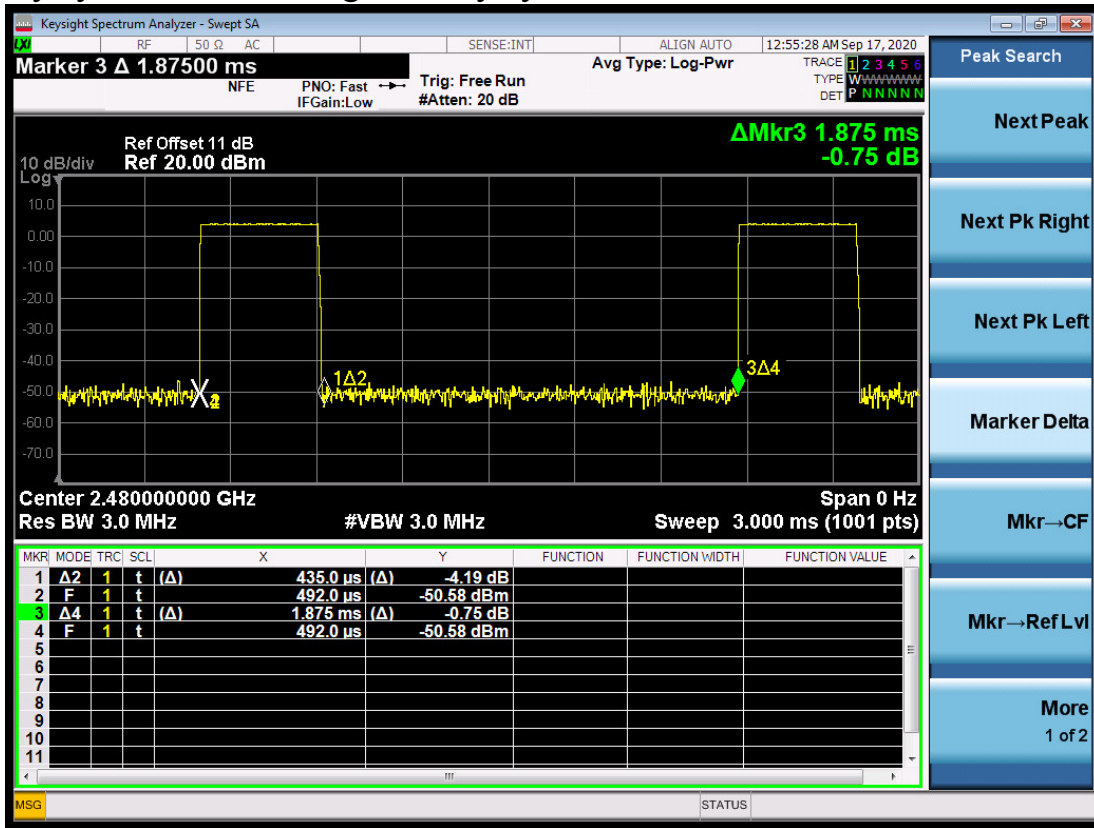




Frequency: 30MHz~1GHz

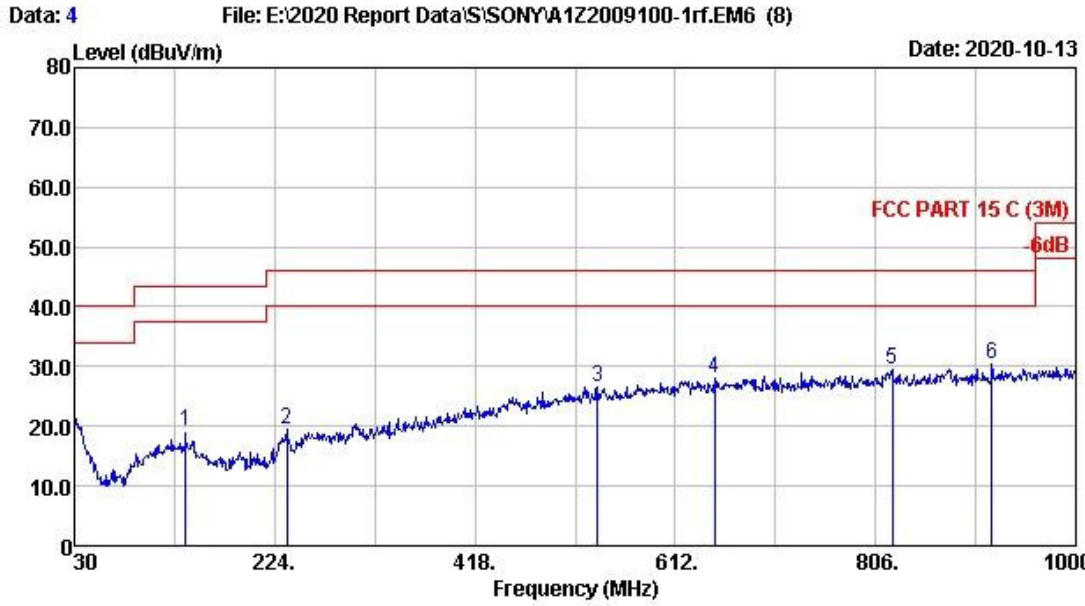

Site no. : 3m Chamber Data no. : 4  
 Dis. / Ant. : 3m 2019 CBL6112D-25237 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 24.0\*C/55% Engineer : Hogen  
 EUT :  
 Power rating : DC 5V  
 Test Mode : BLE Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	137.670	17.20	1.17	0.78	19.15	43.50	24.35	QP
2	235.640	16.68	1.57	1.13	19.38	46.00	26.62	QP
3	536.340	24.00	2.45	0.25	26.70	46.00	19.30	QP
4	649.830	24.95	2.76	0.24	27.95	46.00	18.05	QP
5	822.490	25.73	3.22	0.65	29.60	46.00	16.40	QP
6	918.520	26.37	3.39	0.55	30.31	46.00	15.69	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

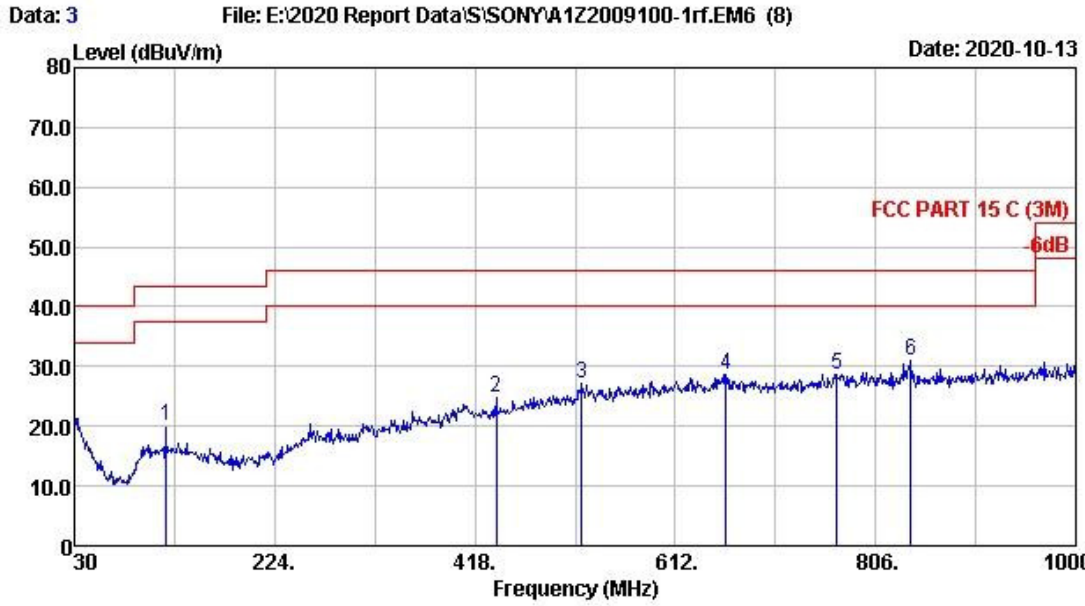

Site no. : 3m Chamber Data no. : 3  
 Dis. / Ant. : 3m 2019 CBL6112D-25237 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 24.0°C/55% Engineer : Hogen  
 EUT :  
 Power rating : DC 5V  
 Test Mode : BLE Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	119.240	18.04	1.09	0.84	19.97	43.50	23.53	QP
2	438.370	22.15	2.16	0.51	24.82	46.00	21.18	QP
3	521.790	23.80	2.41	0.90	27.11	46.00	18.89	QP
4	661.470	24.96	2.79	0.92	28.67	46.00	17.33	QP
5	768.170	25.41	3.09	0.24	28.74	46.00	17.26	QP
6	839.950	25.84	3.25	1.83	30.92	46.00	15.08	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

### Frequency: 1GHz~18GHz


Data: 37

File: F:\2020 Report\SONY\附件 A1Z2009100-FCC.EM6 (48)

Date: 2020-11-24

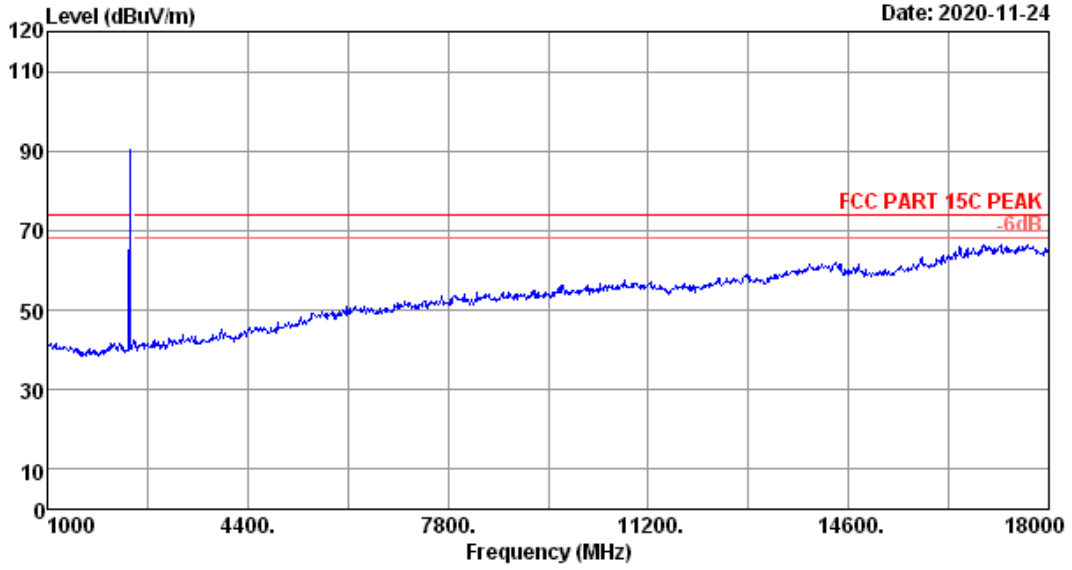


Site no.	: 3m Chamber	Data no.	: 37
Dis. / Ant.	: 3m 2019 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.8*C/55.1%	Engineer	: Lynn
Test Mode	: BLE GFSK 2402MHz Tx Mode		

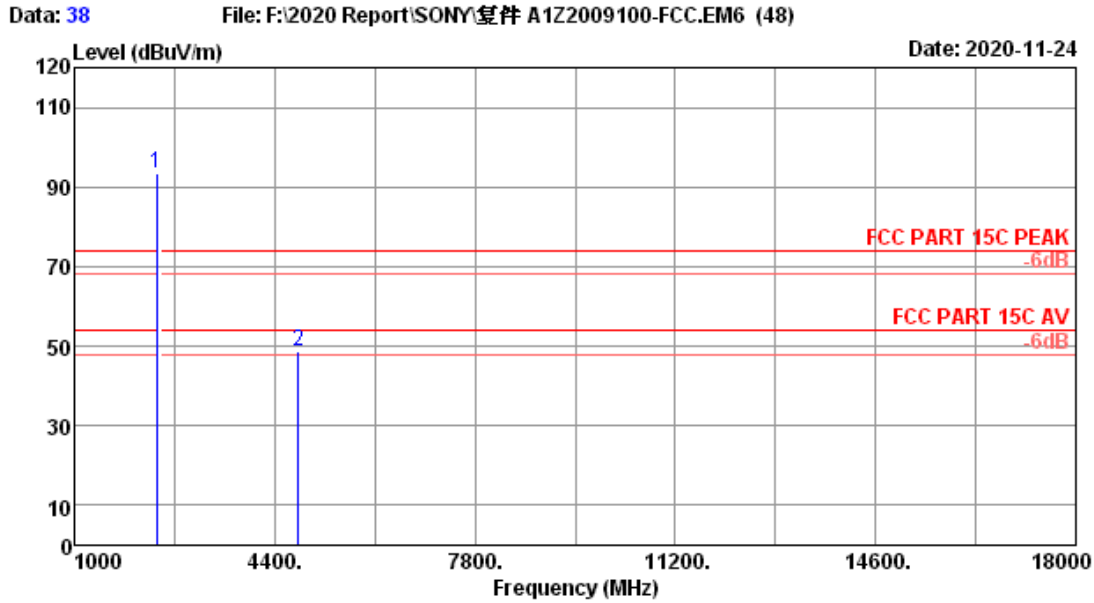

Site no. : 3m Chamber Data no. : 38  
 Dis. / Ant. : 3m 2019 MCTD1209-3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/55.1% Engineer : Lynn  
 Test Mode : BLE GFSK 2402MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.70	5.98	93.29	33.48	93.49	-----	-----	Peak
2	4804.00	31.70	7.40	42.60	33.18	48.52	74.00	25.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

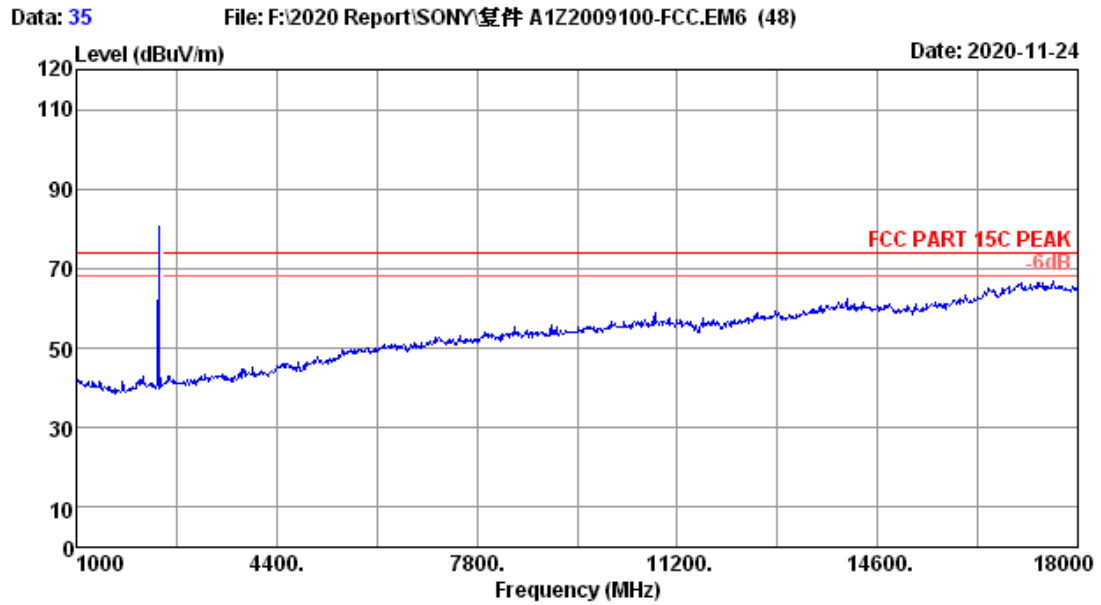

Site no.	: 3m Chamber	Data no.	: 35
Dis. / Ant.	: 3m 2019 MCTD1209-3007	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.8°C/55.1%	Engineer	: Lynn
Test Mode	: BLE GFSK 2402MHz Tx Mode		




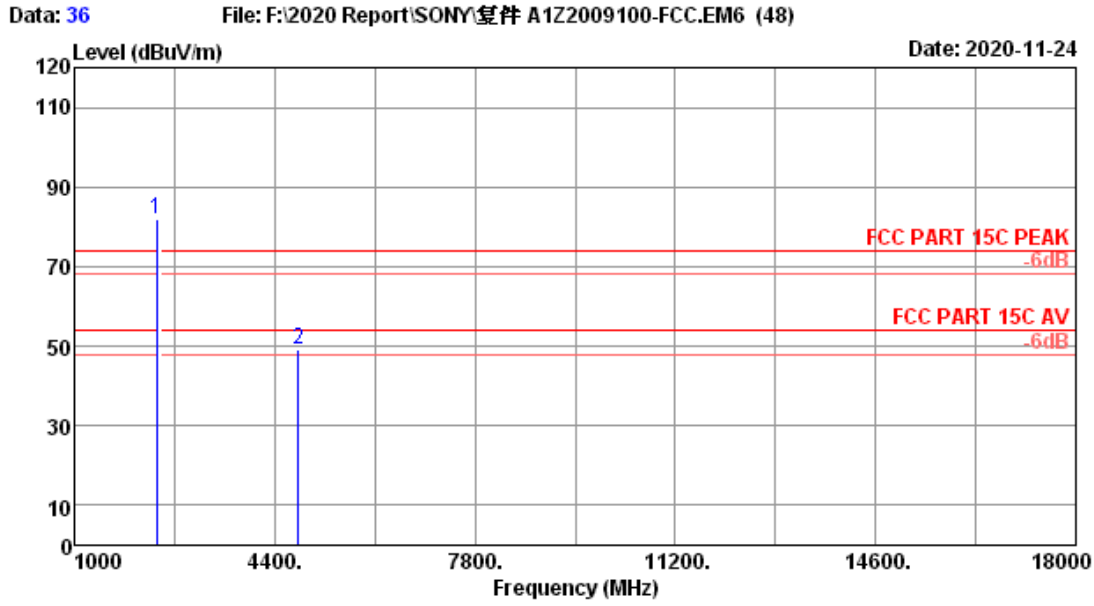


Site no. : 3m Chamber Data no. : 36  
 Dis. / Ant. : 3m 2019 MCTD1209-3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/55.1% Engineer : Lynn  
 Test Mode : BLE GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.70	5.98	81.51	33.48	81.71	-----	-----	Peak
2	4804.00	31.70	7.40	43.39	33.18	49.31	74.00	24.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

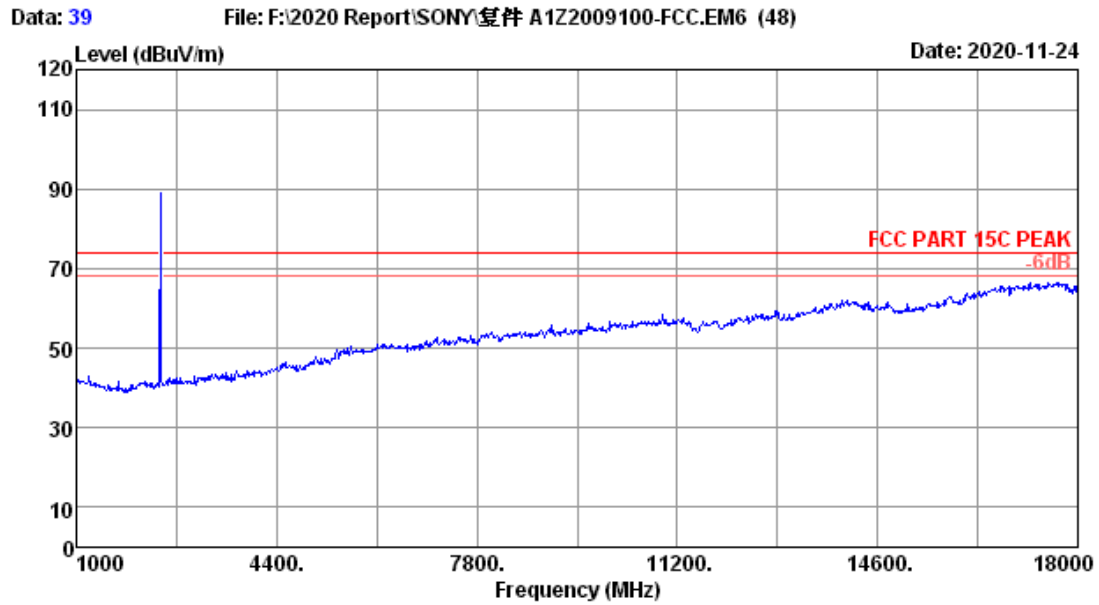


Site no.	: 3m Chamber	Data no.	: 39
Dis. / Ant.	: 3m 2019 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.8°C/55.1%	Engineer	: Lynn
Test Mode	: BLE GFSK 2440MHz Tx Mode		

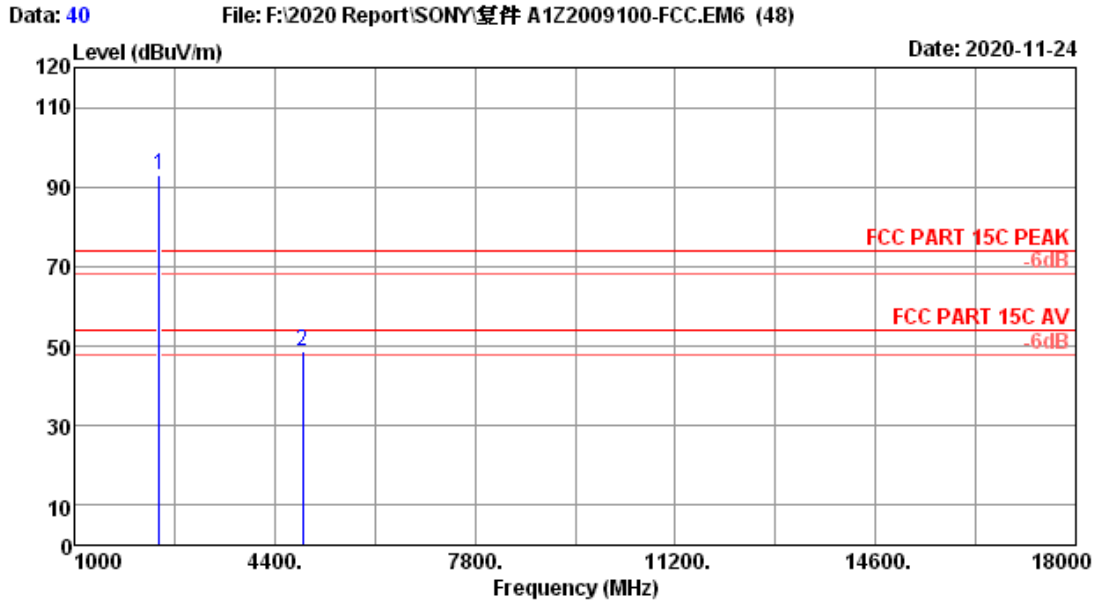


Site no. : 3m Chamber Data no. : 40  
 Dis. / Ant. : 3m 2019 MCTD1209-3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/55.1% Engineer : Lynn  
 Test Mode : BLE GFSK 2440MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Amp factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2440.00	27.90	6.01	92.68	33.47	93.12	-----	-----	Peak
2	4880.00	32.02	7.44	42.49	33.19	48.76	74.00	25.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

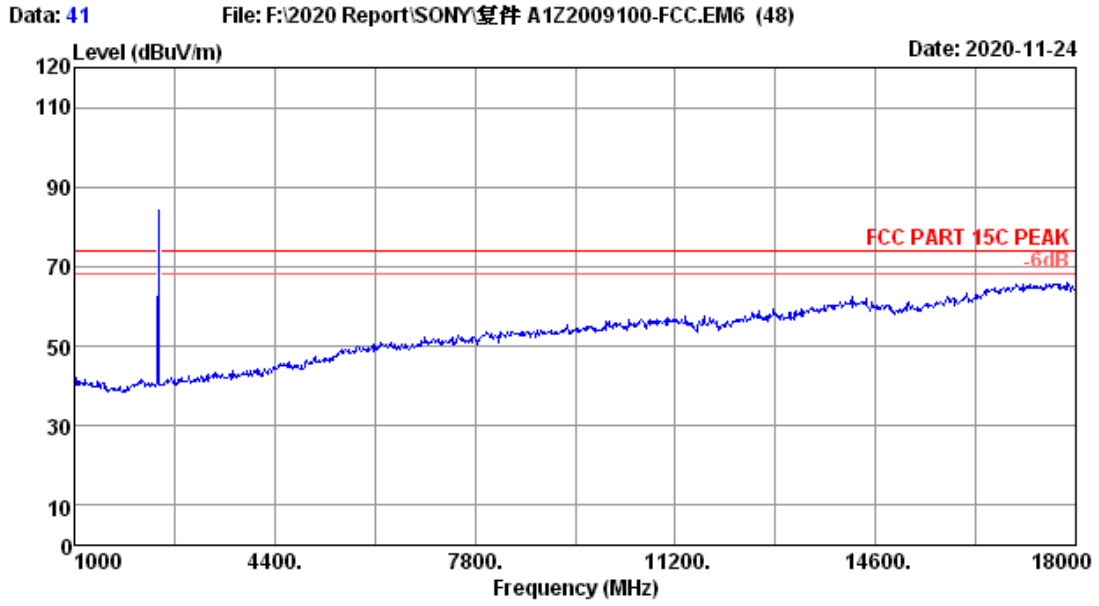


Site no.	: 3m Chamber	Data no.	: 41
Dis. / Ant.	: 3m 2019 MCTD1209-3007	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.8°C/55.1%	Engineer	: Lynn
Test Mode	: BLE GFSK 2440MHz Tx Mode		

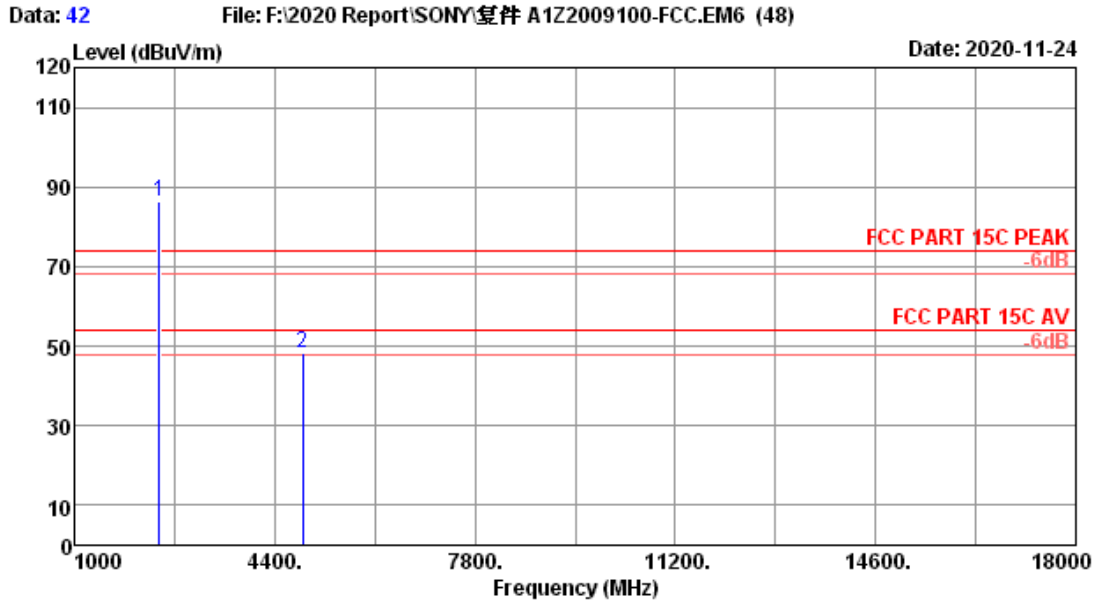


Site no. : 3m Chamber Data no. : 42  
 Dis. / Ant. : 3m 2019 MCTD1209-3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/55.1% Engineer : Lynn  
 Test Mode : BLE GFSK 2440MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2440.00	27.90	6.01	85.90	33.47	86.34	-----	-----	Peak
2	4880.00	32.02	7.44	42.02	33.19	48.29	74.00	25.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

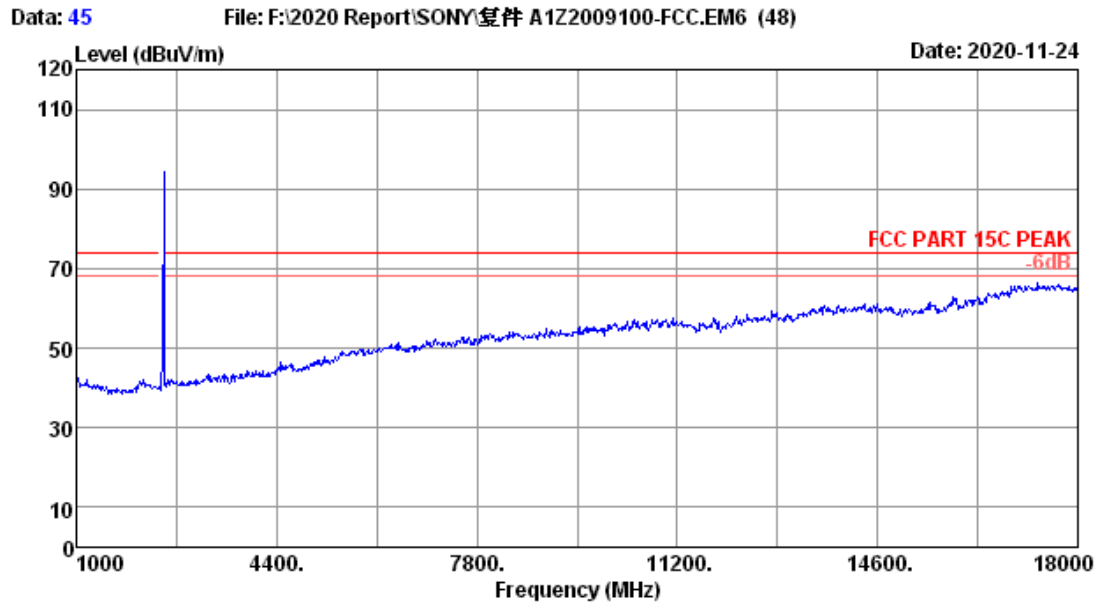

Site no.	: 3m Chamber	Data no.	: 45
Dis. / Ant.	: 3m 2019 MCTD1209-3007	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.8°C/55.1%	Engineer	: Lynn
Test Mode	: BLE GFSK 2480MHz Tx Mode		

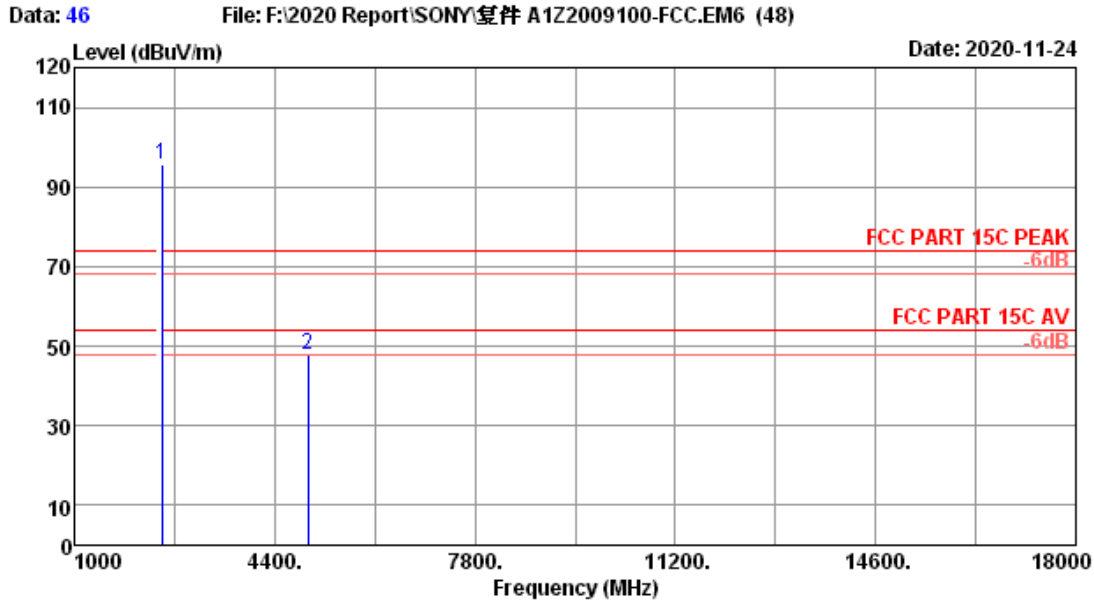


Site no. : 3m Chamber Data no. : 46  
 Dis. / Ant. : 3m 2019 MCTD1209-3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/55.1% Engineer : Lynn  
 Test Mode : BLE GFSK 2480MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.03	6.03	94.91	33.46	95.51	-----	-----	Peak
2	4960.00	32.70	7.49	40.96	33.20	47.95	74.00	26.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



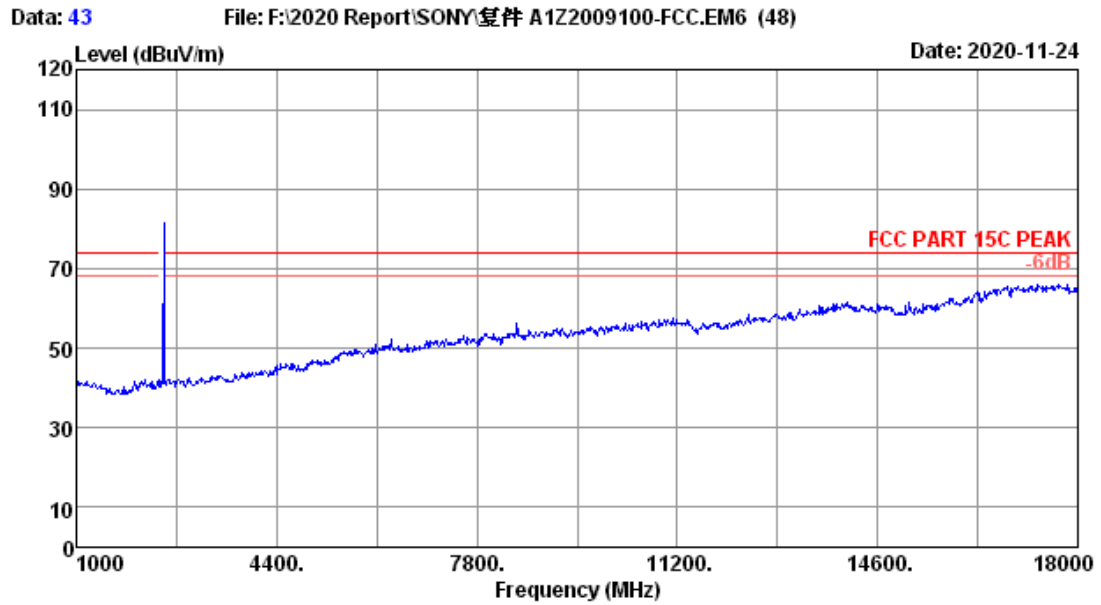

Site no.	: 3m Chamber	Data no.	: 43
Dis. / Ant.	: 3m 2019 MCTD1209-3007	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.8°C/55.1%	Engineer	: Lynn
Test Mode	: BLE GFSK 2480MHz Tx Mode		

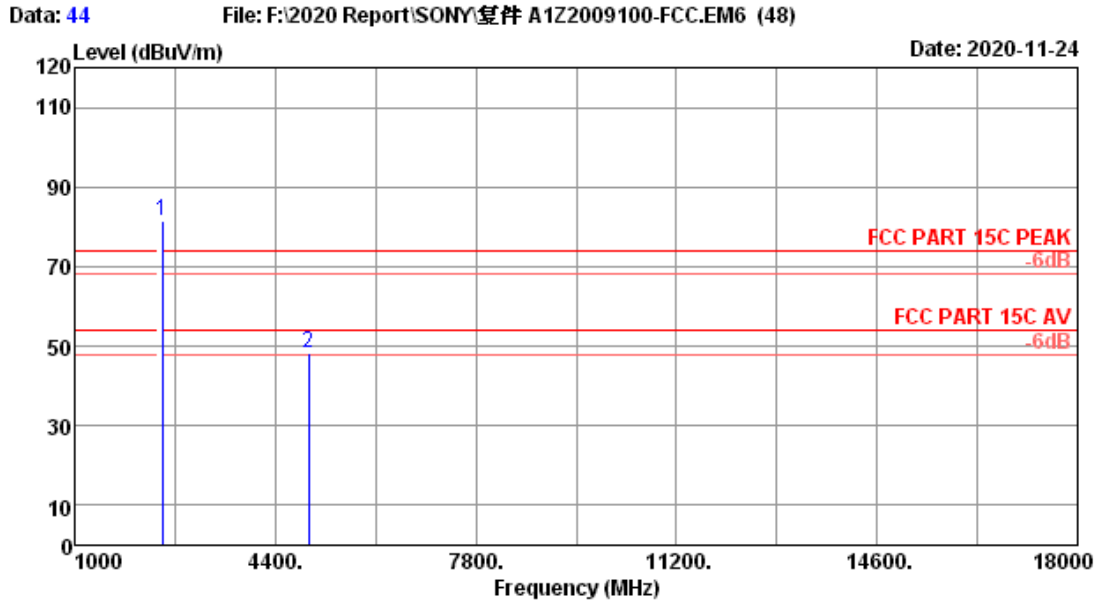

Site no. : 3m Chamber Data no. : 44  
 Dis. / Ant. : 3m 2019 MCTD1209-3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.8°C/55.1% Engineer : Lynn  
 Test Mode : BLE GFSK 2480MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.03	6.03	80.67	33.46	81.27	-----	-----	Peak
2	4960.00	32.70	7.49	41.33	33.20	48.32	74.00	25.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 5. CONDUCTED SPURIOUS EMISSIONS

### 5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.12,20	1 Year
2.	Attenuator	Agilent	8491B	MY39269201	Oct.13,19	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX-106	505238/6	Apr.11,20	1 Year

### 5.2. Block Diagram of Test Setup



### 5.3. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 5.4. Test Procedure


Use the test method described in ANSI C63.10:

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.


### 5.5. Test result

**PASS** (The testing data was attached in the next pages.)


EUT: Wireless Speaker, Personal Audio System		
M/N: SRS-XB13		
Test date: 2020-09-16	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lynn	Test site: RF site	Temperature:22.8±0.6 °C

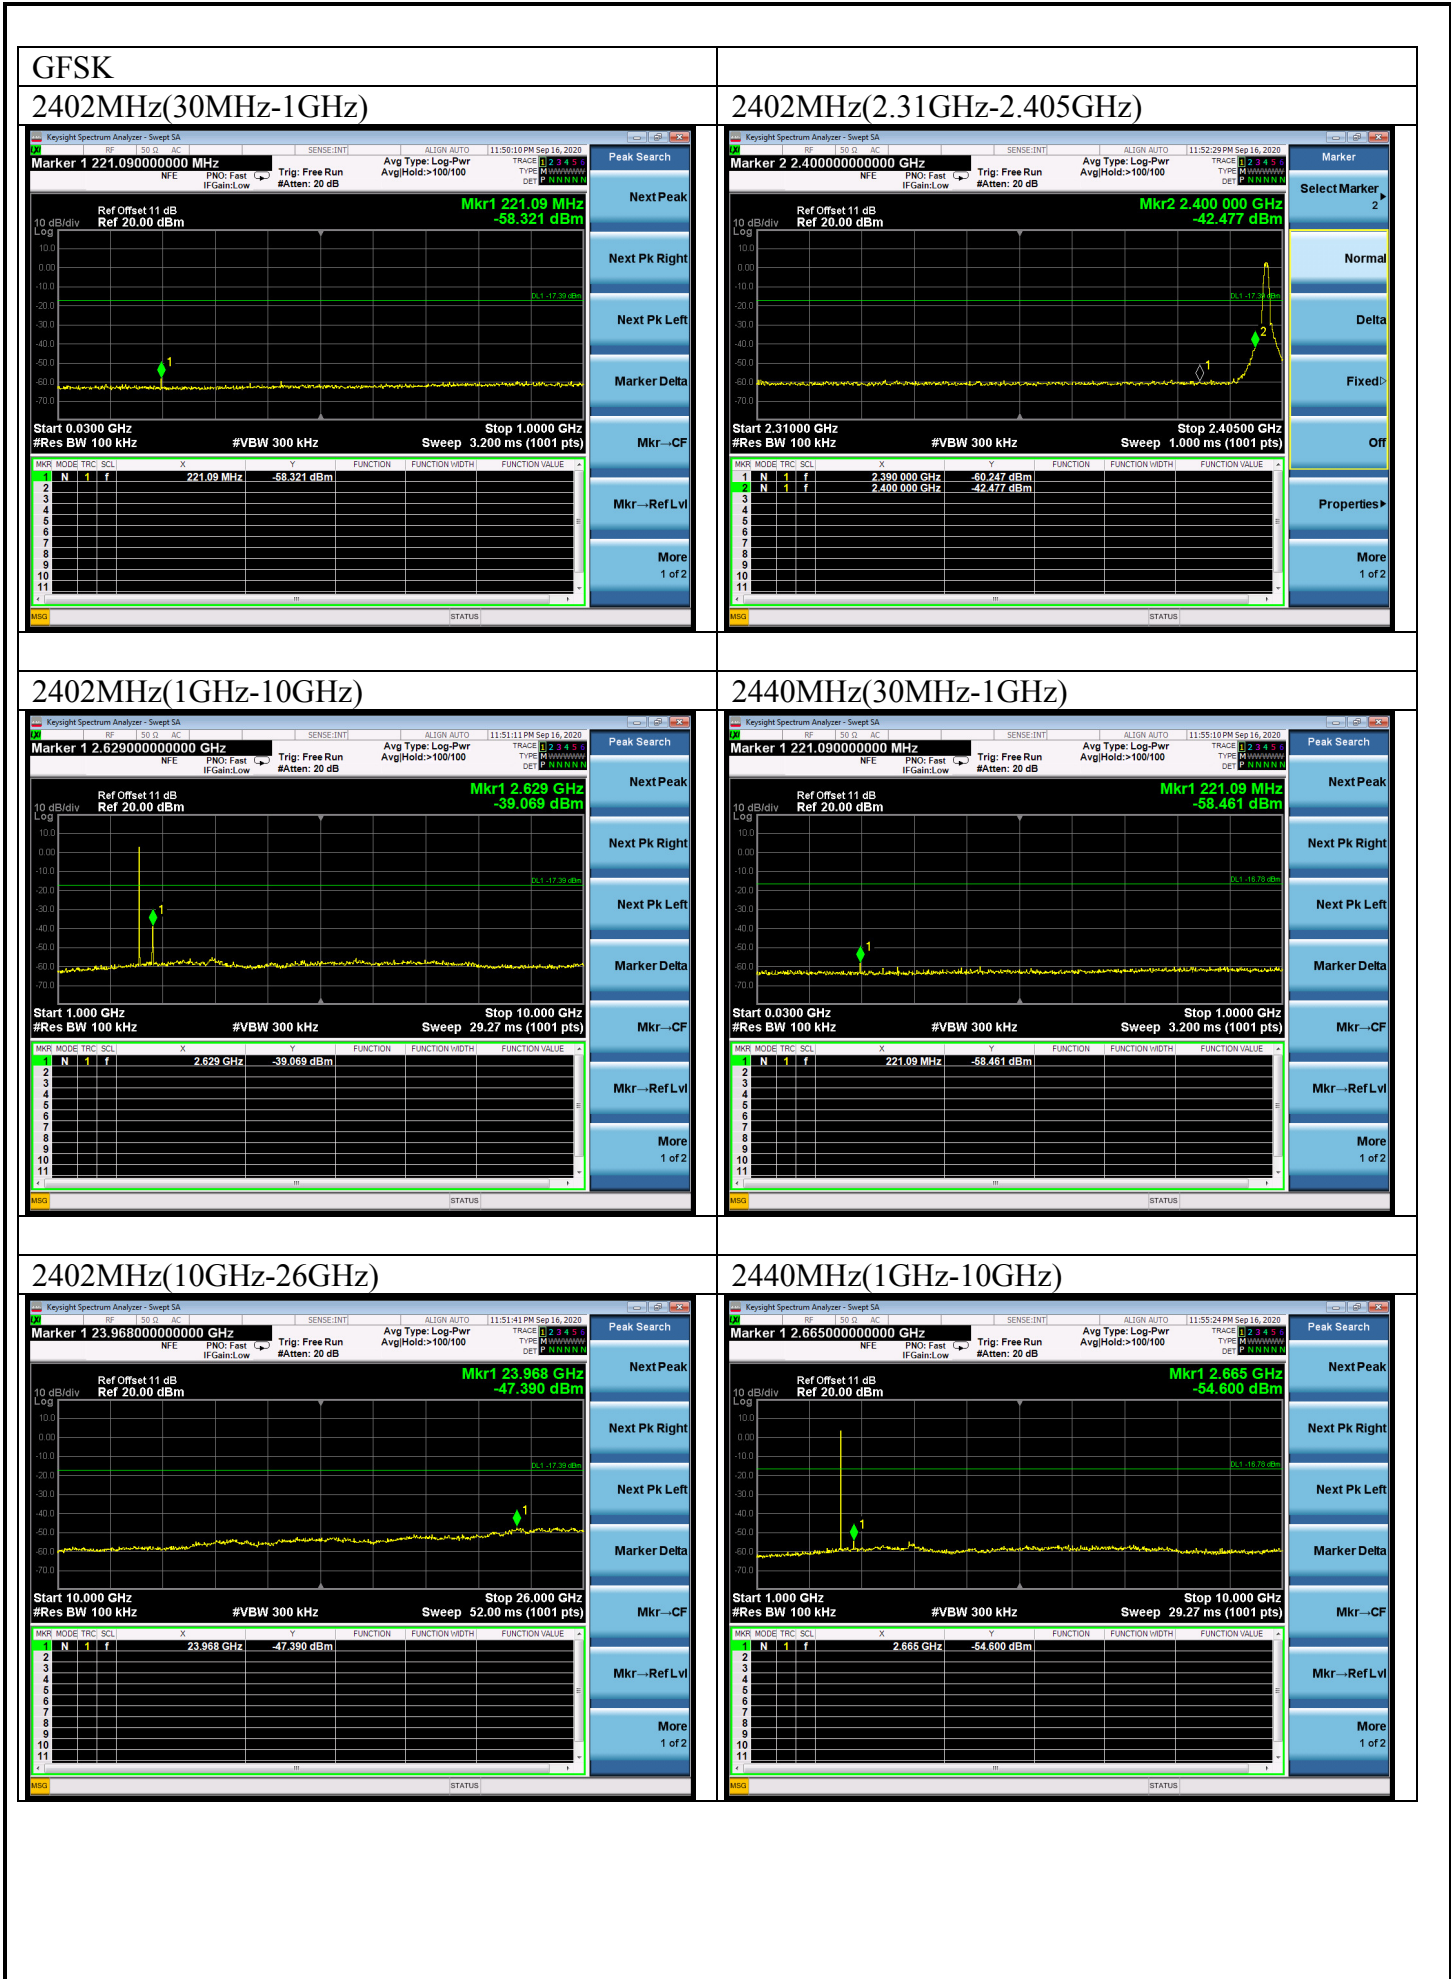


2440MHz(10GHz-26GHz)

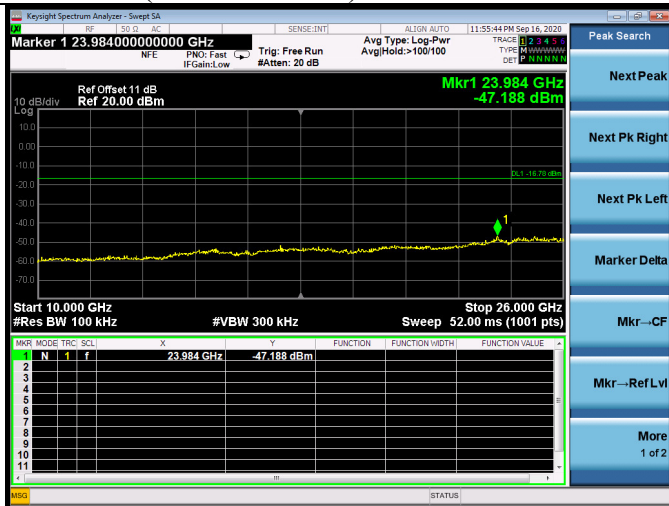


2480MHz(10GHz-26GHz)

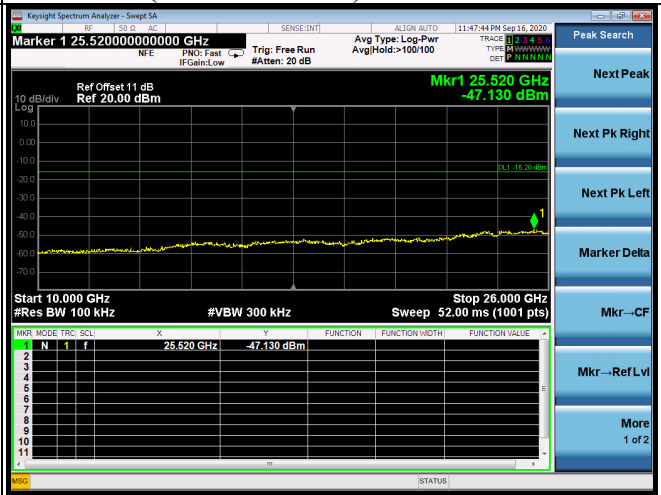


2480MHz(30MHz-1GHz)

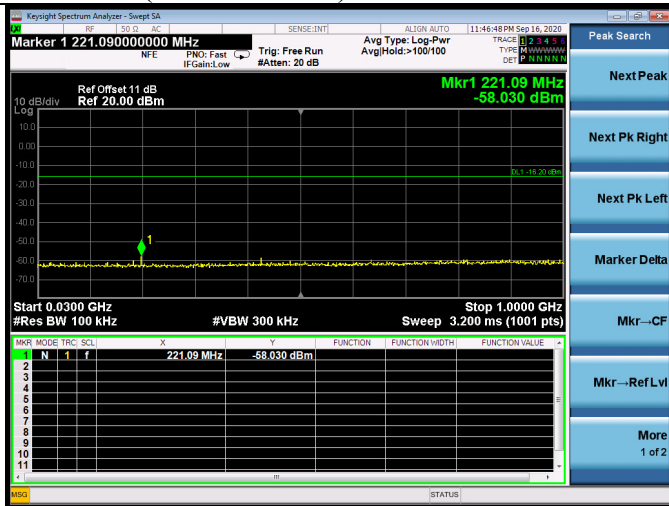

2480MHz(2.477GHz-2.51GHz)

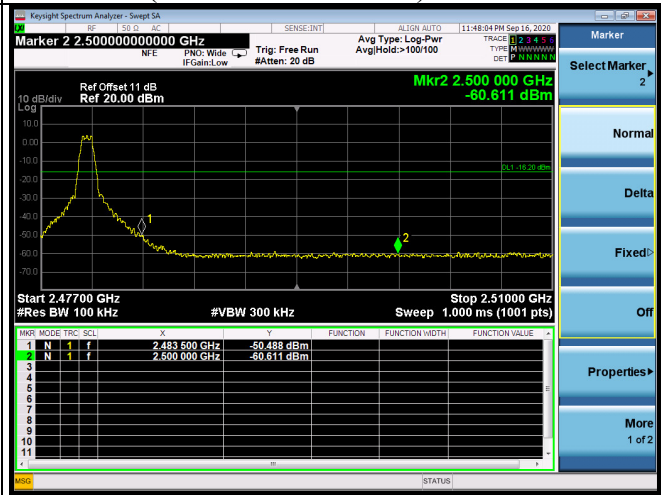

2480MHz(1GHz-10GHz)

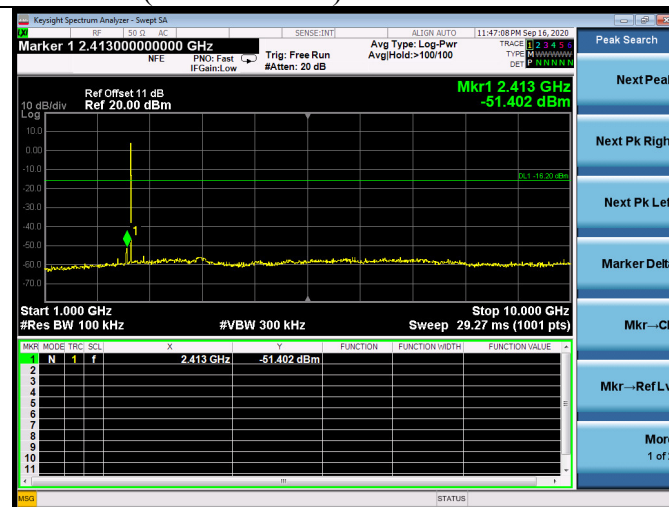

## 6. 6dB & 99% BANDWIDTH TEST

### 6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.12,20	1 Year
2.	Attenuator	Agilent	8491B	MY39269201	Oct.13,19	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX-106	505238/6	Apr.11,20	1 Year

### 6.2. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

### 6.3. Test Procedure

Use the test method described in ANSI C63.10 clause 11.8.2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW  $\geq 3 \times$  RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

Use the test method described in ANSI C63.10 clause 6.9.2:

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6.4. Test Results

**6 dB bandwidth:**

EUT: Wireless Speaker, Personal Audio System		
M/N: SRS-XB13		
Test date: 2020-09-17	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lynn	Test site: RF site	Temperature:22.8±0.6 °C

Test Mode	Frequency ( MHz )	6 dB bandwidth ( kHz )	Limit (KHz)
GFSK	2402	721.7	≧ 500
	2440	719.5	≧ 500
	2480	719.8	≧ 500

Conclusion : PASS

**99% Occupied bandwidth:**

EUT: Wireless Speaker, Personal Audio System		
M/N: SRS-XB13		
Test date: 2020-09-17	Pressure: 102.9±1.0 kpa	Humidity: 52.5±3.0%
Tested by: Lynn	Test Site: RF site	Temperature:23.4±0.6°C

Test Mode	Frequency ( MHz )	99% Occupied bandwidth ( kHz )	Limit (KHz)
	2402	995.35	N/A
	2440	995.26	N/A
	2480	996.11	N/A

Conclusion : PASS