



5745-5825MHz Band:

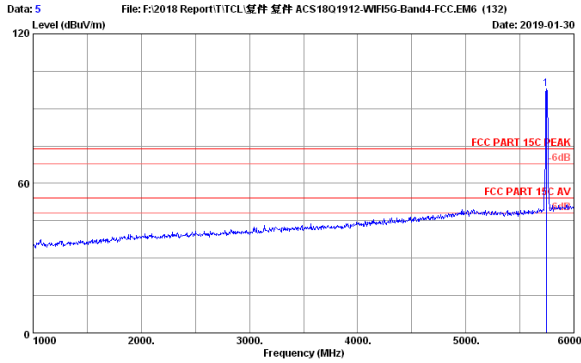

File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band4-FCC.EM6 (132) Date: 2019-01-30  
 Site no. : 3m Chamber Data no. : 5  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SPS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.24	16.37	82.91	34.60	97.92	74.00	-23.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

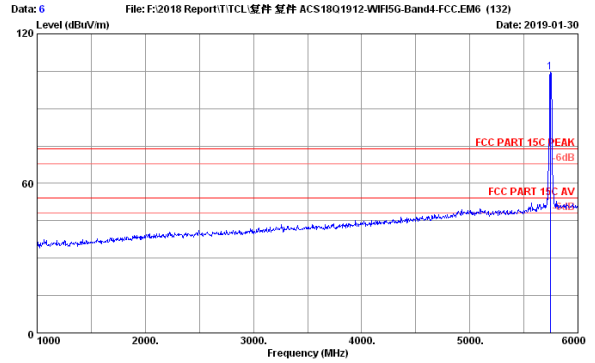

File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band4-FCC.EM6 (132) Date: 2019-01-30  
 Site no. : 3m Chamber Data no. : 6  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SPS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.24	16.37	89.49	34.60	104.50	74.00	-30.50	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

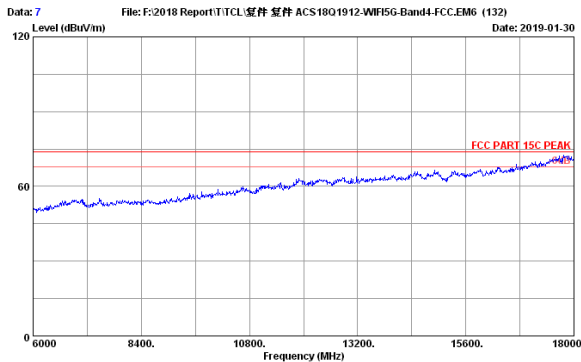

File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band4-FCC.EM6 (132) Date: 2019-01-30  
 Site no. : 3m Chamber Data no. : 7  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SPS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.41	21.18	19.47	32.66	46.40	54.00	7.60	Average
2	11490.00	38.41	21.18	34.67	32.66	61.60	74.00	12.40	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

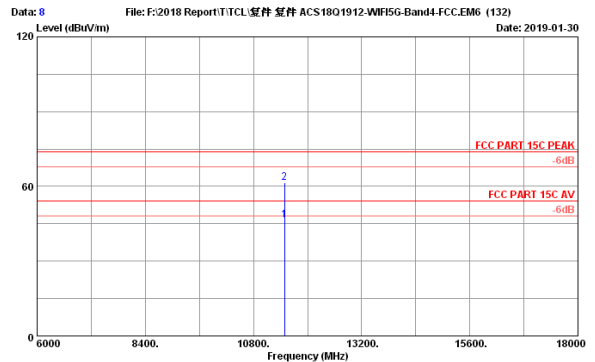

File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band4-FCC.EM6 (132) Date: 2019-01-30  
 Site no. : 3m Chamber Data no. : 8  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SPS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5745MHz Tx Mode



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.41	21.18	19.47	32.66	46.40	54.00	7.60	Average
2	11490.00	38.41	21.18	34.67	32.66	61.60	74.00	12.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

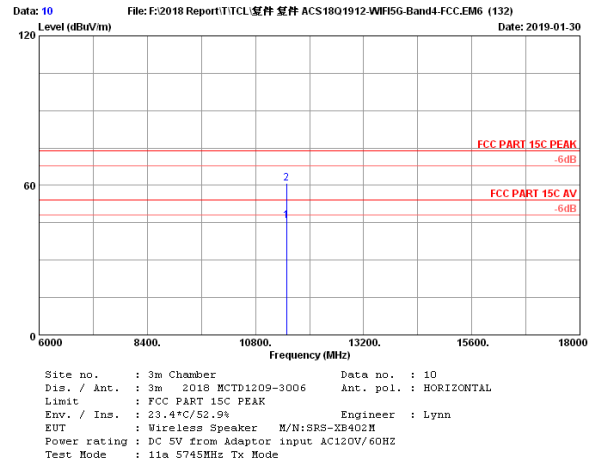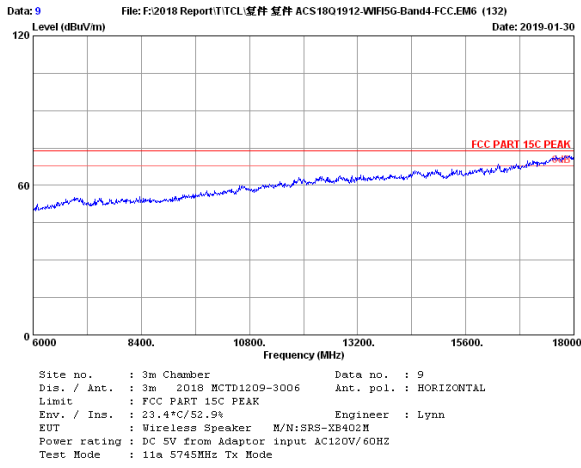


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.41	21.18	18.87	32.66	45.80	54.00	8.20	Average
2	11490.00	38.41	21.18	34.05	32.66	60.98	74.00	13.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

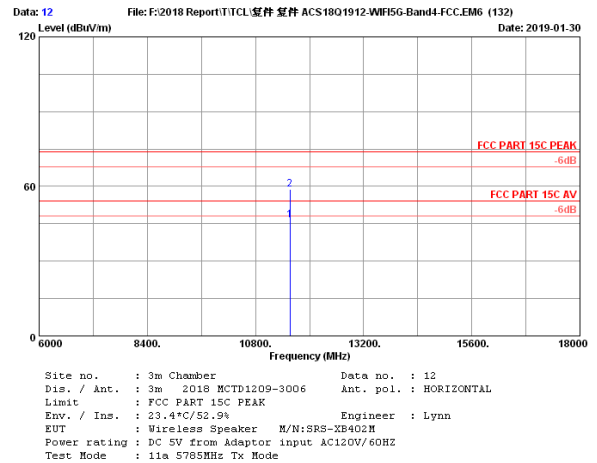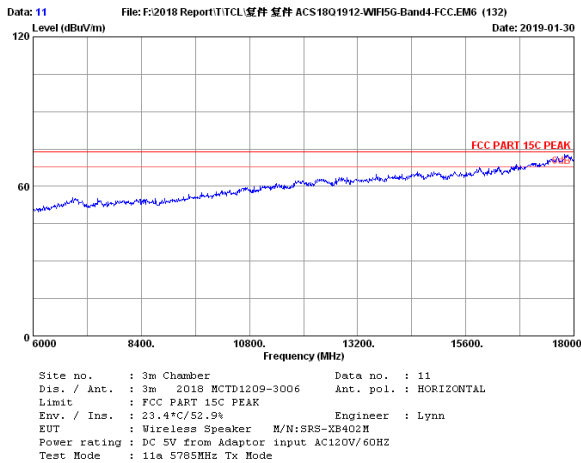


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.36	21.37	19.21	32.57	46.37	54.00	7.63	Average
2	11570.00	38.36	21.37	31.76	32.57	58.92	74.00	15.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

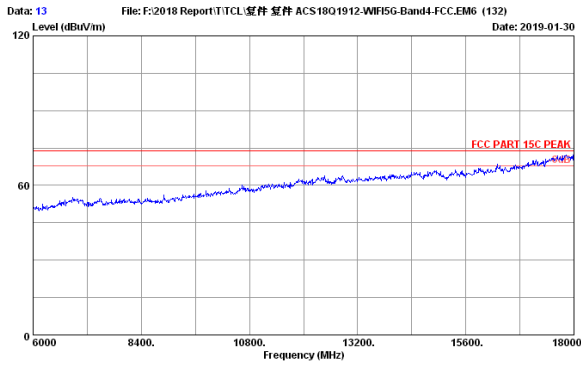


Site no. : 3m Chamber Data no. : 13  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5785MHz Tx Mode

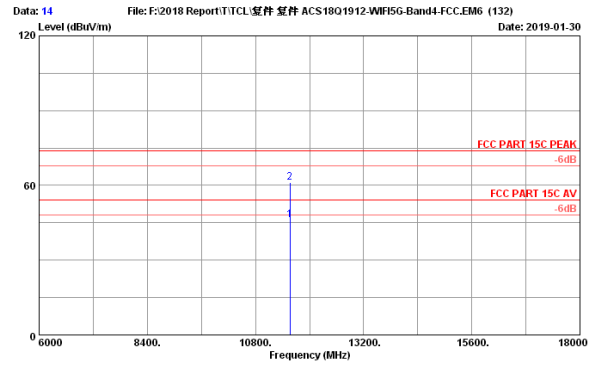

Site no. : 3m Chamber Data no. : 14  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.36	21.37	18.91	32.57	46.07	54.00	7.93	Average
2	11570.00	38.36	21.37	33.98	32.57	61.14	74.00	12.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

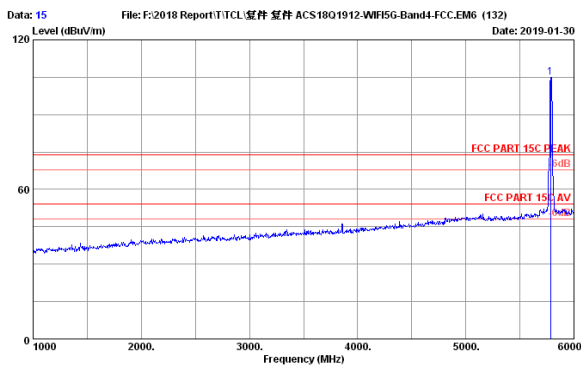

Site no. : 3m Chamber Data no. : 15  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.29	16.44	89.88	34.58	105.03	74.00	-31.03	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

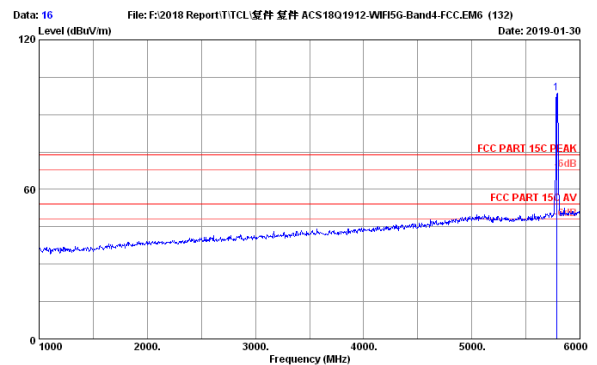

Site no. : 3m Chamber Data no. : 16  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5785MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.29	16.44	83.46	34.58	98.61	74.00	-24.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

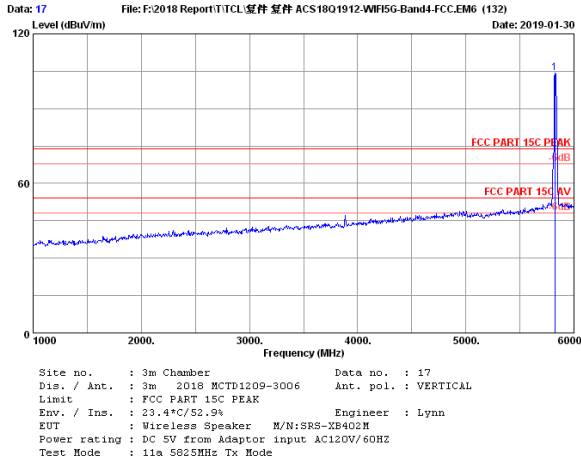



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.36	16.54	89.07	34.57	104.40	74.00	-30.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

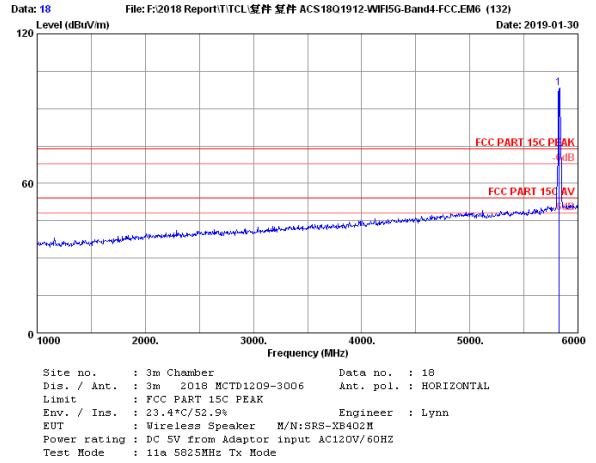

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.36	16.54	82.98	34.57	98.31	74.00	-24.31	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

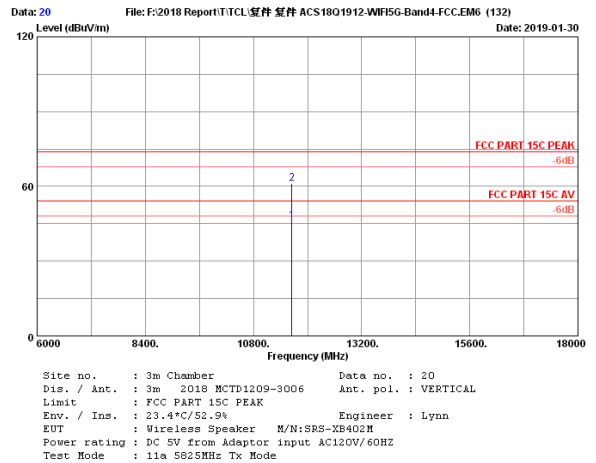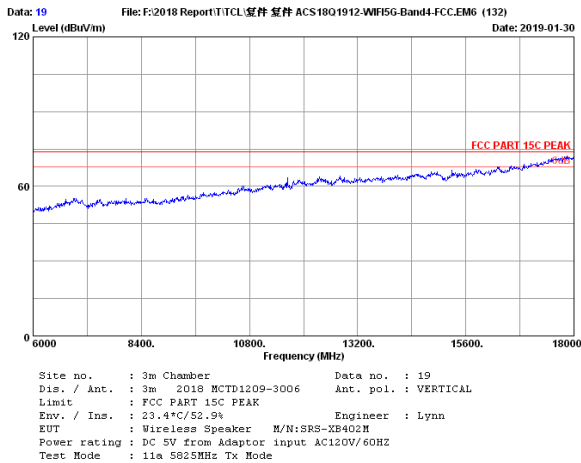

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.32	21.52	18.69	32.50	46.03	54.00	7.97	Average
2	11650.00	38.32	21.52	33.92	32.50	61.26	74.00	12.74	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: AK8SRSXB402

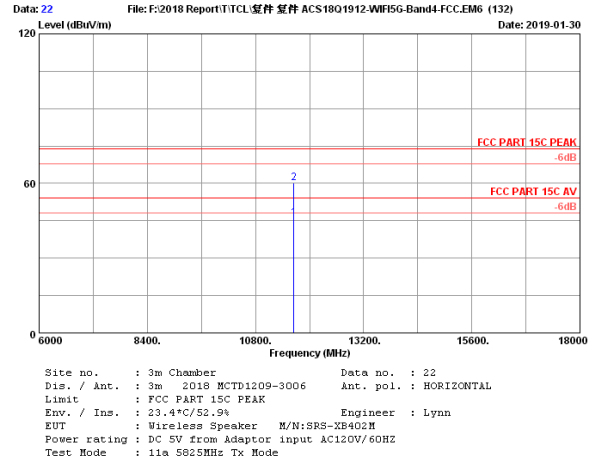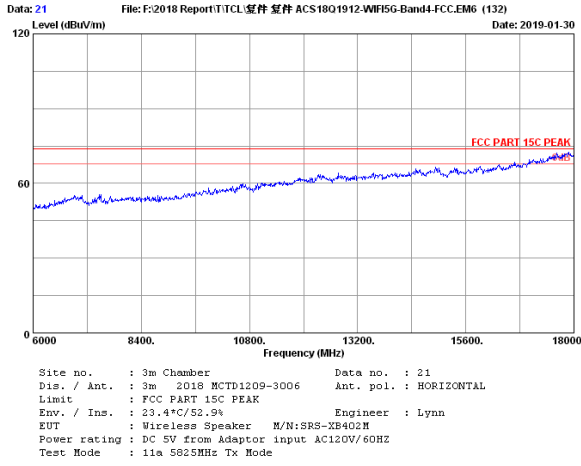

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.32	21.52	18.73	32.50	46.07	54.00	7.93	Average
2	11650.00	38.32	21.52	32.97	32.50	60.31	74.00	13.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

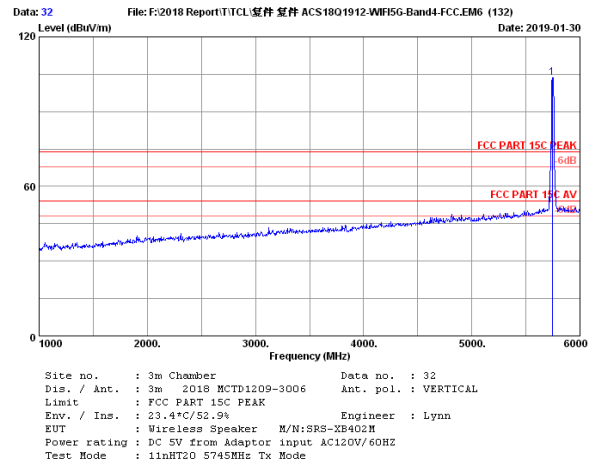
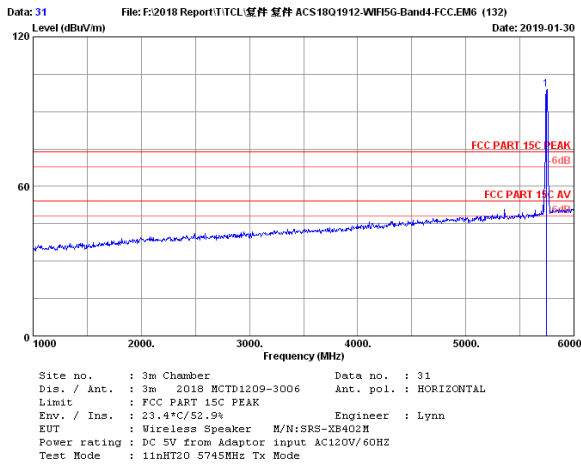


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.24	16.37	84.01	34.60	99.02	74.00	-25.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.24	16.37	88.76	34.60	103.77	74.00	-29.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

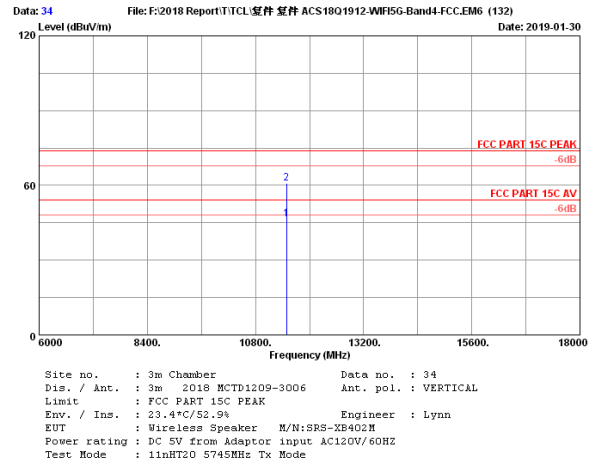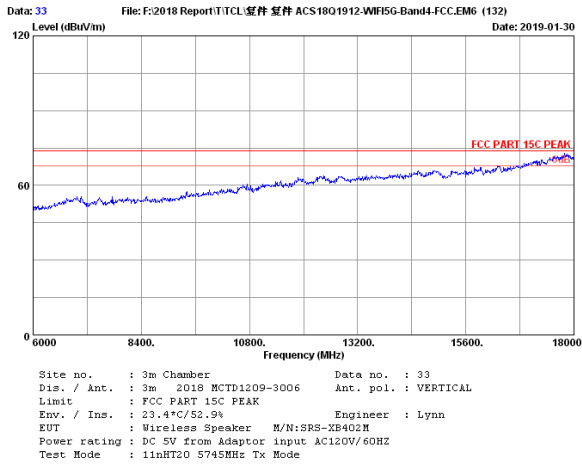



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.41	21.18	19.37	32.66	46.30	54.00	7.70	Average
2	11490.00	38.41	21.18	33.78	32.66	60.71	74.00	13.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

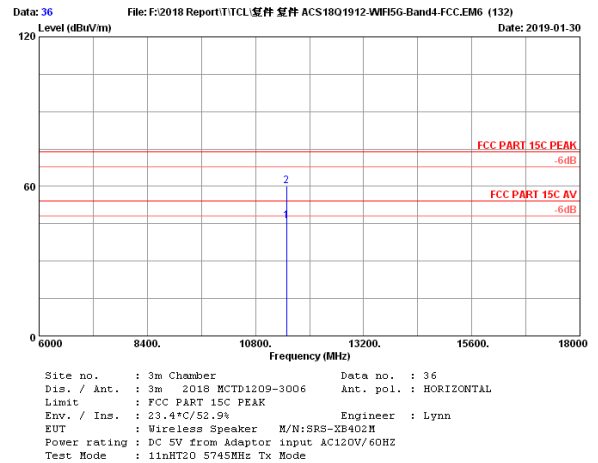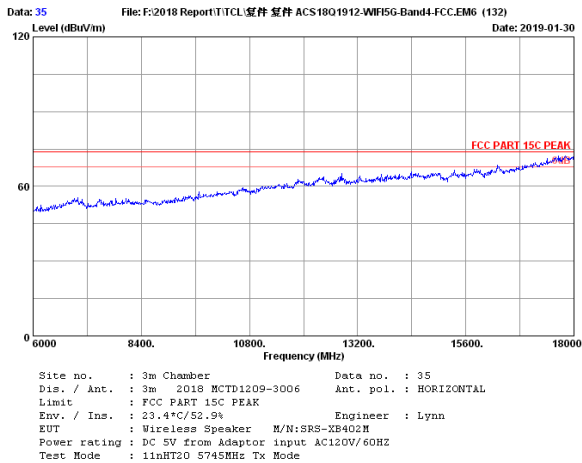



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.41	21.18	19.36	32.66	46.29	54.00	7.71	Average
2	11490.00	38.41	21.18	33.12	32.66	60.05	74.00	13.95	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

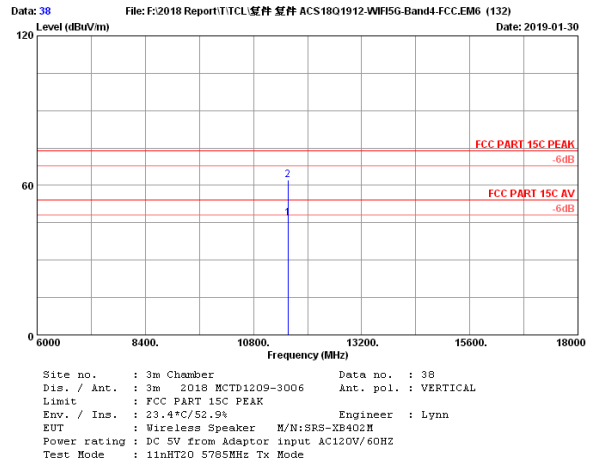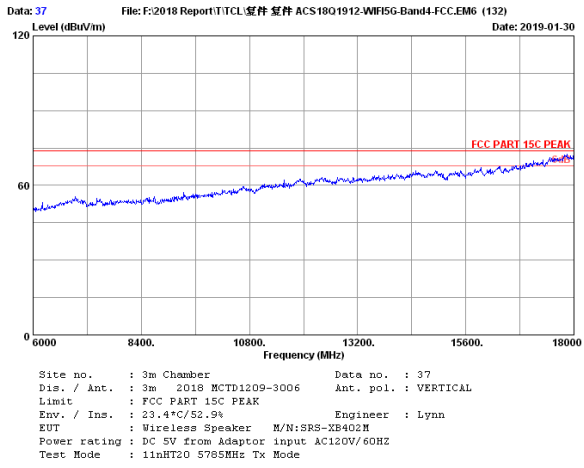


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.36	21.37	19.56	32.57	46.72	54.00	7.28	Average
2	11570.00	38.36	21.37	35.05	32.57	62.21	74.00	11.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

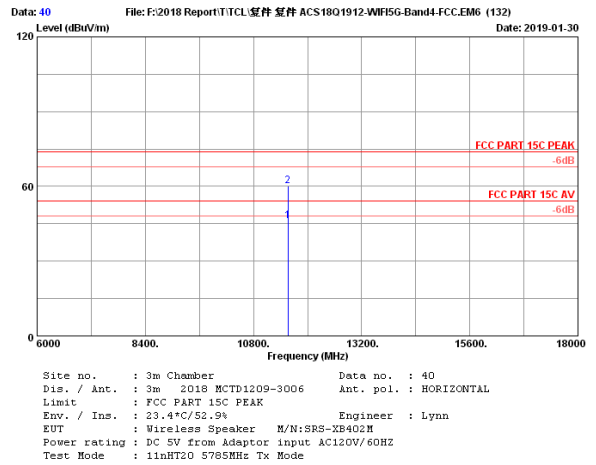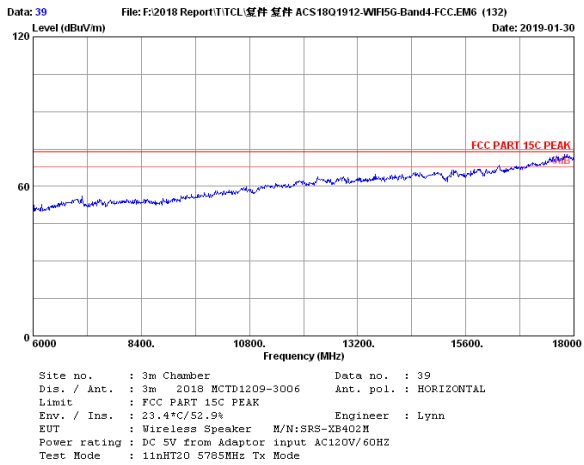


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.36	21.37	18.97	32.57	46.13	54.00	7.87	Average
2	11570.00	38.36	21.37	32.92	32.57	60.08	74.00	13.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

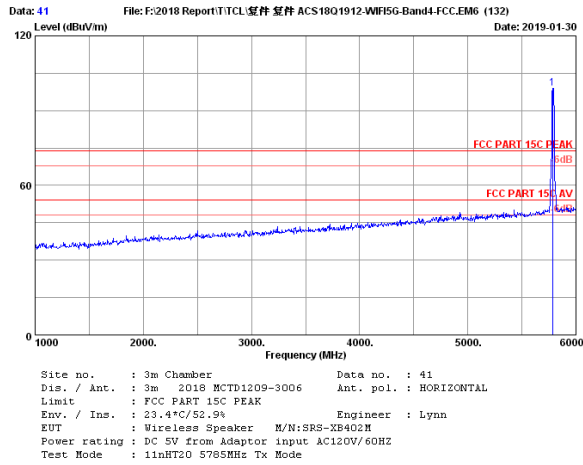


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.29	16.44	83.90	34.58	99.05	74.00	-25.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

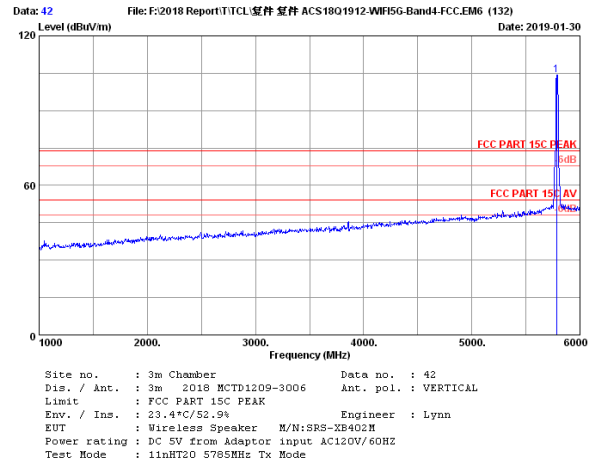


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.29	16.44	89.03	34.58	104.18	74.00	-30.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

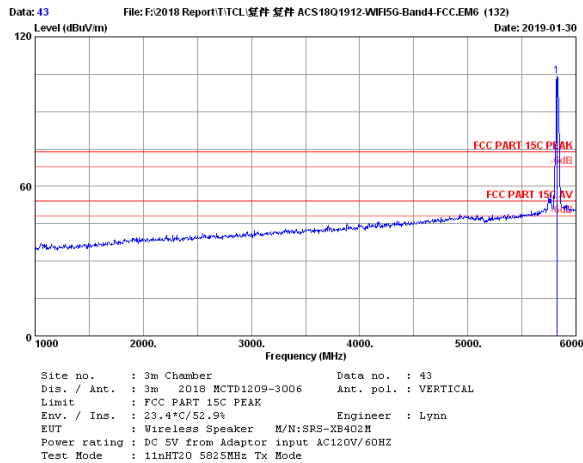

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.36	16.54	89.10	34.57	104.43	74.00	-30.43	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

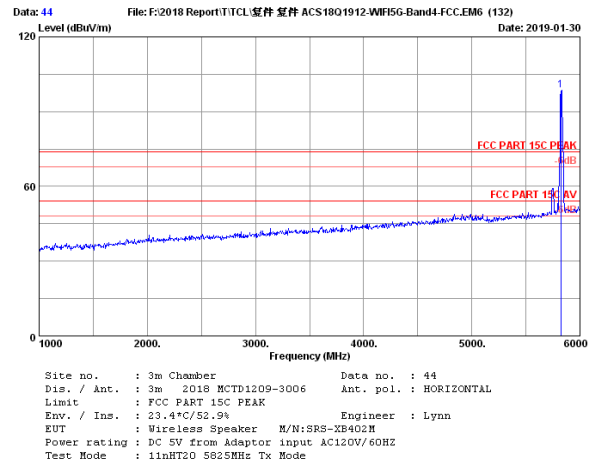

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.36	16.54	83.23	34.57	98.56	74.00	-24.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



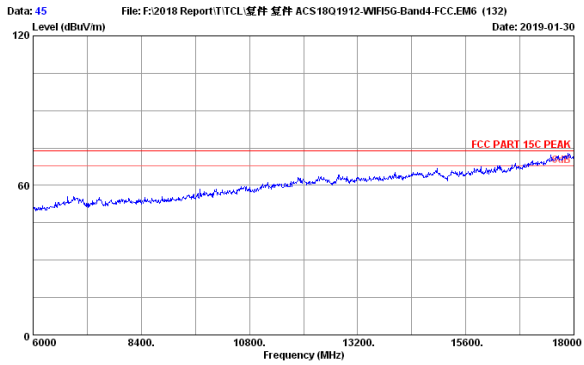

File: F:\2018 Report\TITCL\附件 附件 ACS1801912-WIFI5G-Band4-FCC.EM6 (132)  
Date: 2019-01-30

Site no. : 3m Chamber Data no. : 45  
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
EUT : Wireless Speaker M/N:SRS-XB402H  
Power rating : DC 5V from Adaptor input AC120V/60HZ  
Test Mode : 11nHT20 5825MHz Tx Mode

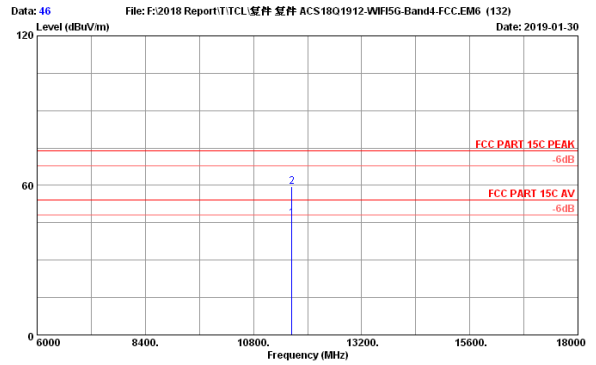


File: F:\2018 Report\TITCL\附件 附件 ACS1801912-WIFI5G-Band4-FCC.EM6 (132)  
Date: 2019-01-30

Site no. : 3m Chamber Data no. : 46  
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
EUT : Wireless Speaker M/N:SRS-XB402H  
Power rating : DC 5V from Adaptor input AC120V/60HZ  
Test Mode : 11nHT20 5825MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.32	21.52	19.38	32.50	46.72	54.00	7.28	Average
2	11650.00	38.32	21.52	32.06	32.50	59.40	74.00	14.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
2. The emission levels that are 20dB below the official limit are not reported.

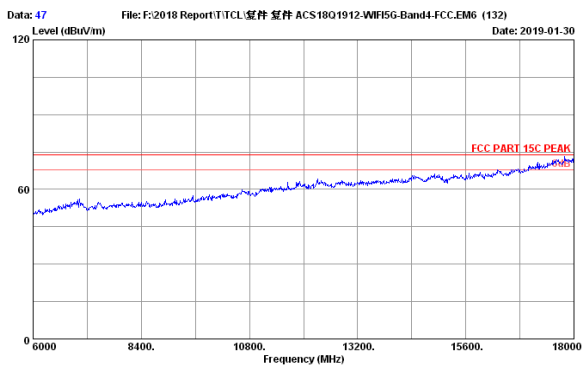

File: F:\2018 Report\TITCL\附件 附件 ACS1801912-WIFI5G-Band4-FCC.EM6 (132)  
Date: 2019-01-30

Site no. : 3m Chamber Data no. : 47  
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
EUT : Wireless Speaker M/N:SRS-XB402H  
Power rating : DC 5V from Adaptor input AC120V/60HZ  
Test Mode : 11nHT20 5825MHz Tx Mode

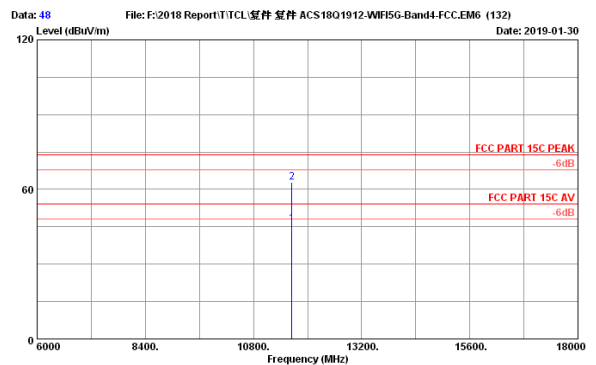


File: F:\2018 Report\TITCL\附件 附件 ACS1801912-WIFI5G-Band4-FCC.EM6 (132)  
Date: 2019-01-30

Site no. : 3m Chamber Data no. : 48  
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
EUT : Wireless Speaker M/N:SRS-XB402H  
Power rating : DC 5V from Adaptor input AC120V/60HZ  
Test Mode : 11nHT20 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.32	21.52	18.89	32.50	46.23	54.00	7.77	Average
2	11650.00	38.32	21.52	35.52	32.50	62.86	74.00	11.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
2. The emission levels that are 20dB below the official limit are not reported.

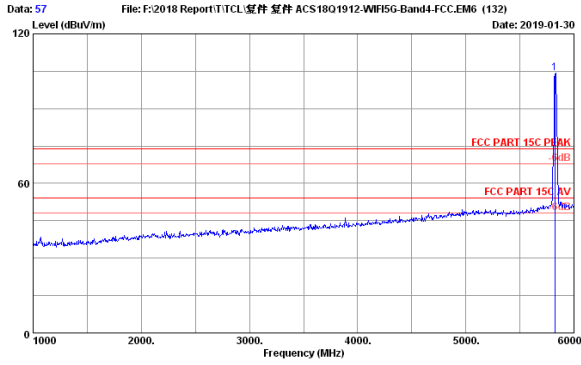

Site no. : 3m Chamber Data no. : 57  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.36	16.54	88.87	34.57	104.20	74.00	-30.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

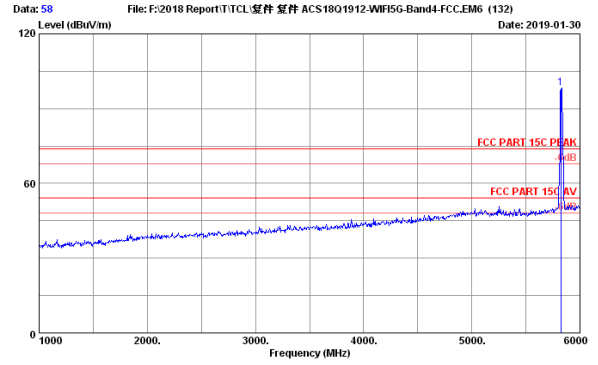


Site no. : 3m Chamber Data no. : 58  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.00	33.36	16.54	82.87	34.57	98.20	74.00	-24.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

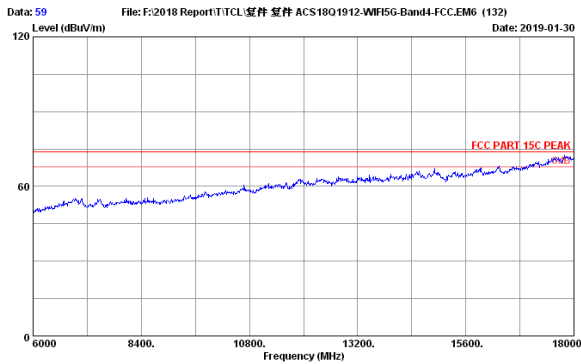



Site no. : 3m Chamber Data no. : 59  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5825MHz Tx Mode

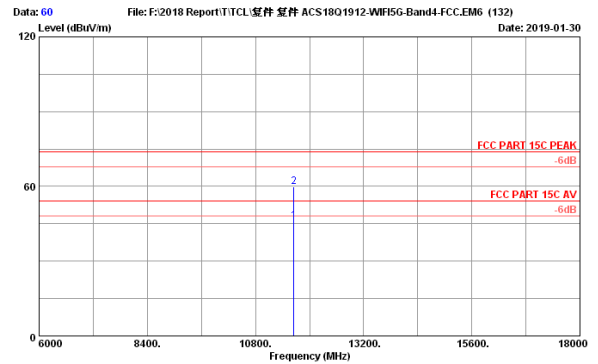

Site no. : 3m Chamber Data no. : 60  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5825MHz Tx Mode



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.32	21.52	18.73	32.50	46.07	54.00	7.93	Average
2	11650.00	38.32	21.52	32.43	32.50	59.77	74.00	14.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

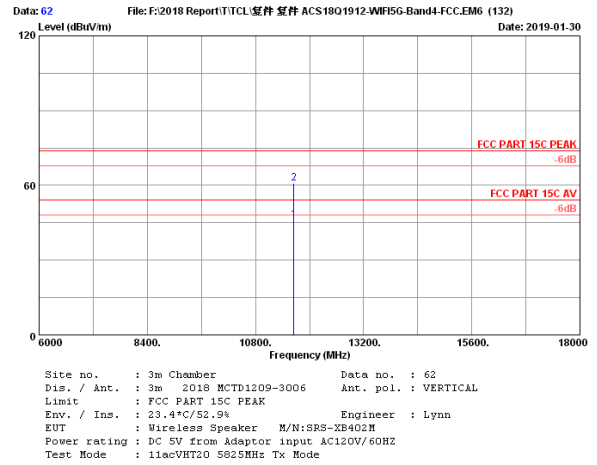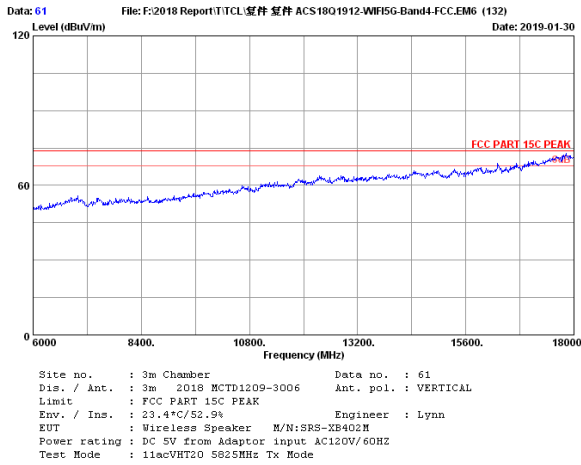

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11650.00	38.32	21.52	18.69	32.50	46.03	54.00	7.97	Average
2	11650.00	38.32	21.52	33.59	32.50	60.93	74.00	13.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

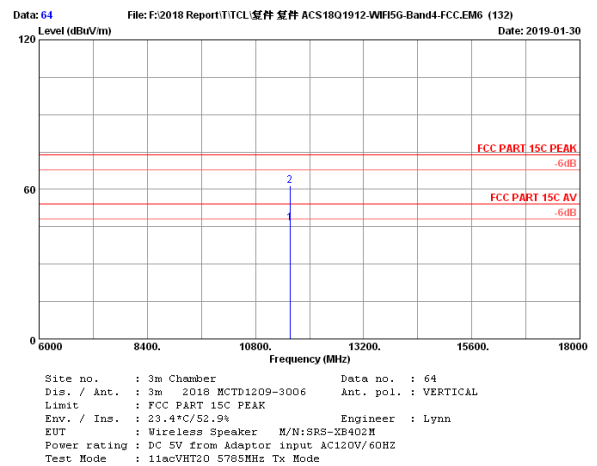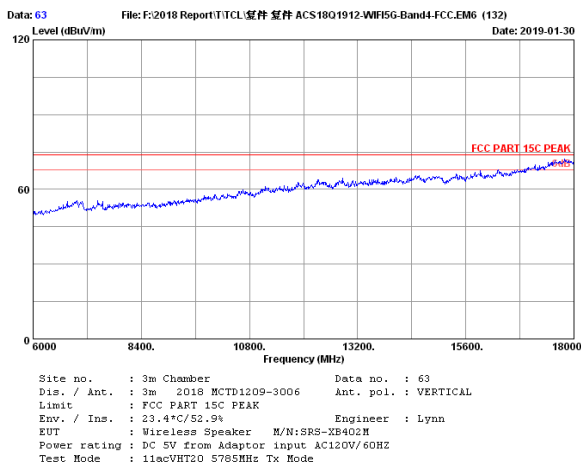


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.36	21.37	19.30	32.57	46.46	54.00	7.54	Average
2	11570.00	38.36	21.37	34.43	32.57	61.59	74.00	12.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: AK8SRSXB402

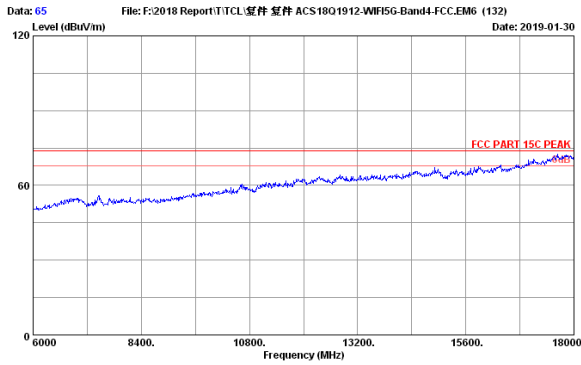


Site no. : 3m Chamber Data no. : 65  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5785MHz Tx Mode

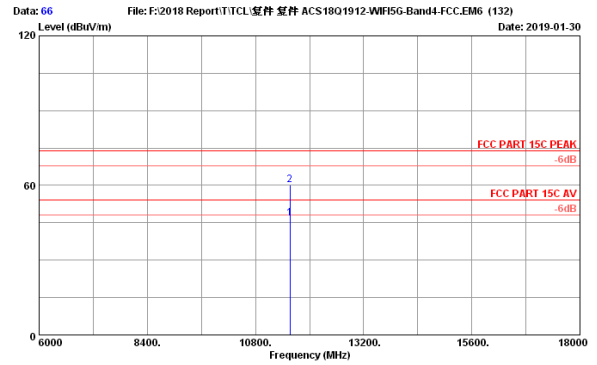

Site no. : 3m Chamber Data no. : 66  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11570.00	38.36	21.37	19.70	32.57	46.86	54.00	7.14	Average
2	11570.00	38.36	21.37	33.06	32.57	60.22	74.00	13.78	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

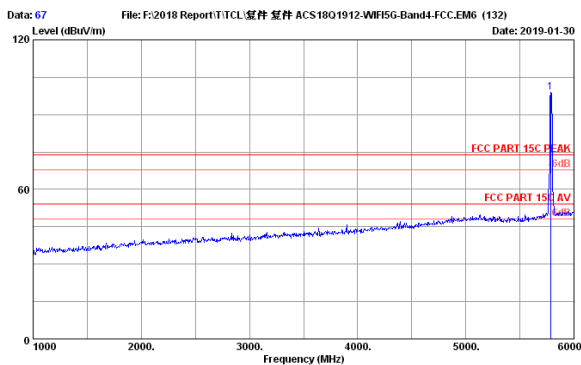

Site no. : 3m Chamber Data no. : 67  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.29	16.44	83.87	34.58	99.02	74.00	-25.02	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

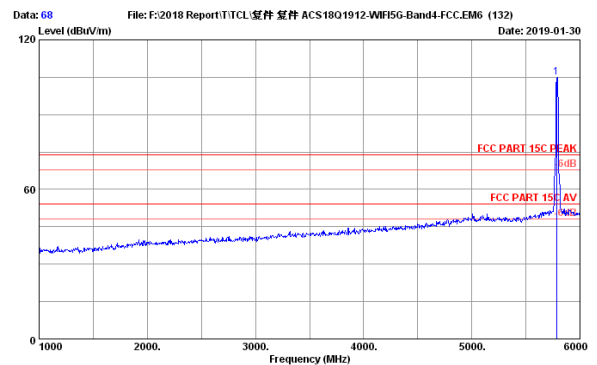

Site no. : 3m Chamber Data no. : 68  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5785MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.00	33.29	16.44	89.70	34.58	104.85	74.00	-30.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

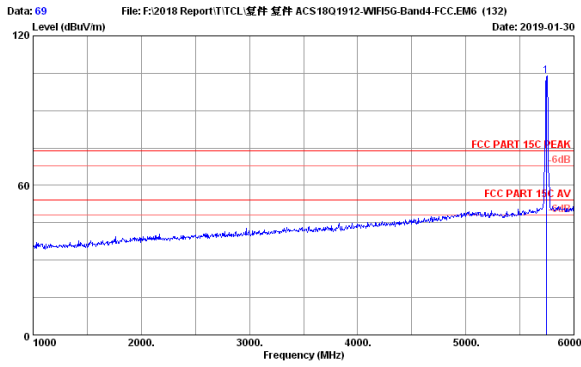

Site no. : 3m Chamber Data no. : 69  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.24	16.37	86.81	34.60	103.82	74.00	-29.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

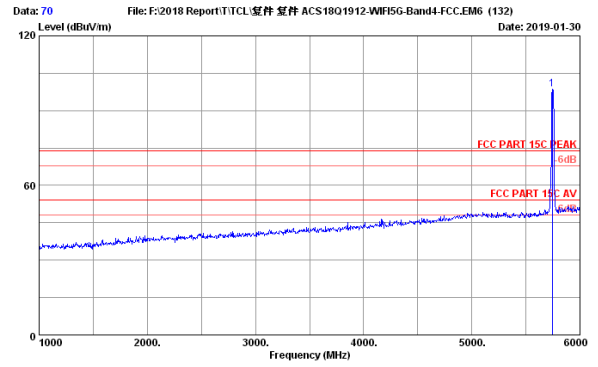


Site no. : 3m Chamber Data no. : 70  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.00	33.24	16.37	83.48	34.60	98.49	74.00	-24.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

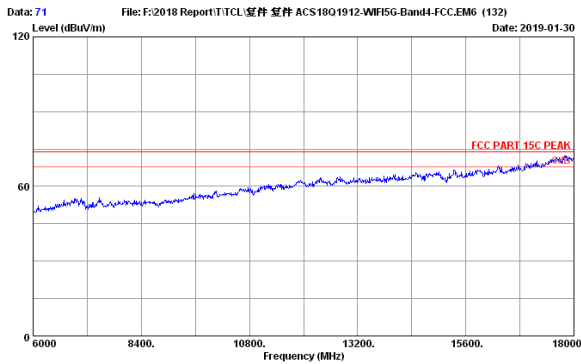

Site no. : 3m Chamber Data no. : 71  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5745MHz Tx Mode

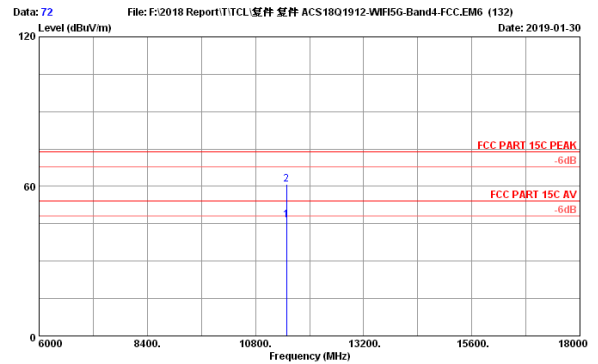


Site no. : 3m Chamber Data no. : 72  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5745MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.41	21.18	19.54	32.66	46.47	54.00	7.53	Average
2	11490.00	38.41	21.18	34.01	32.66	60.94	74.00	13.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: AK8SRSXB402

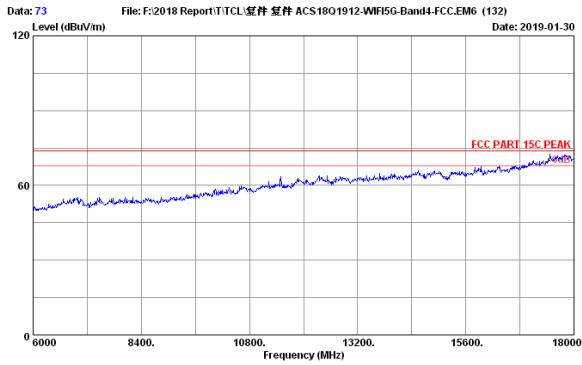


Site no. : 3m Chamber Data no. : 73  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5745MHz Tx Mode

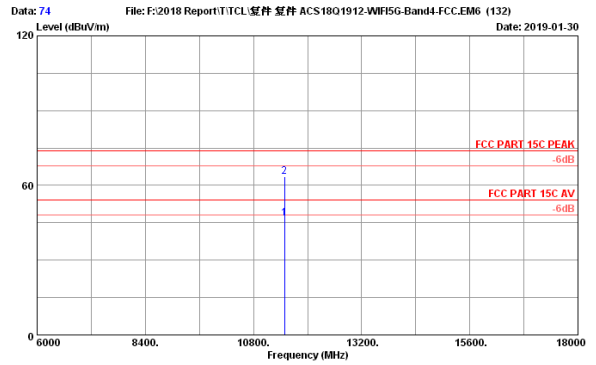

Site no. : 3m Chamber Data no. : 74  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11490.00	38.41	21.18	19.70	32.66	46.63	54.00	7.37	Average
2	11490.00	38.41	21.18	36.54	32.66	63.47	74.00	10.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

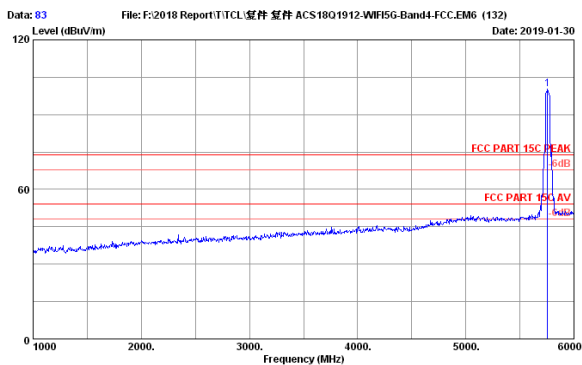

Site no. : 3m Chamber Data no. : 83  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.26	16.40	85.07	34.60	100.13	74.00	-26.13	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

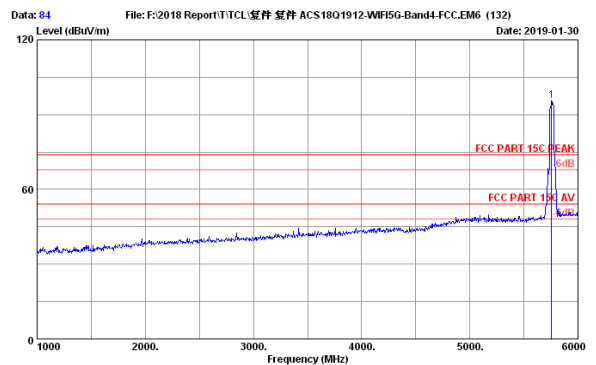

Site no. : 3m Chamber Data no. : 84  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT40 5755MHz Tx Mode



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.26	16.40	80.51	34.60	95.57	74.00	-21.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

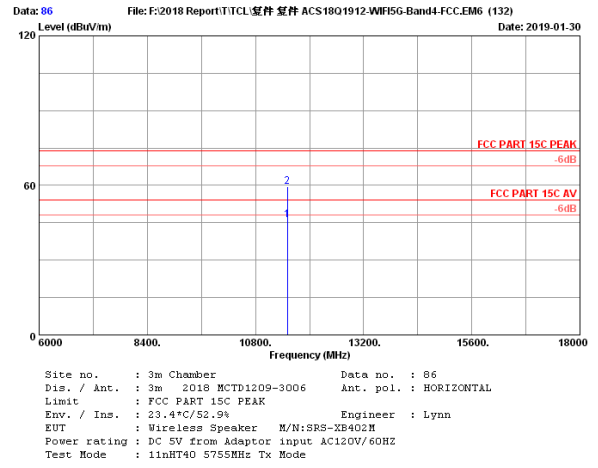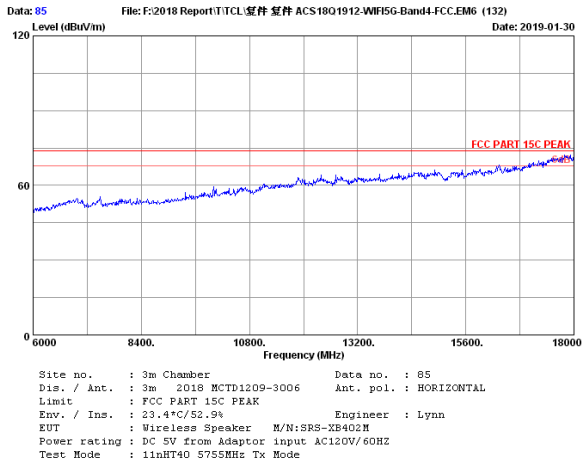



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.00	38.40	21.22	19.10	32.64	46.08	54.00	7.92	Average
2	11510.00	38.40	21.22	32.64	32.64	59.62	74.00	14.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

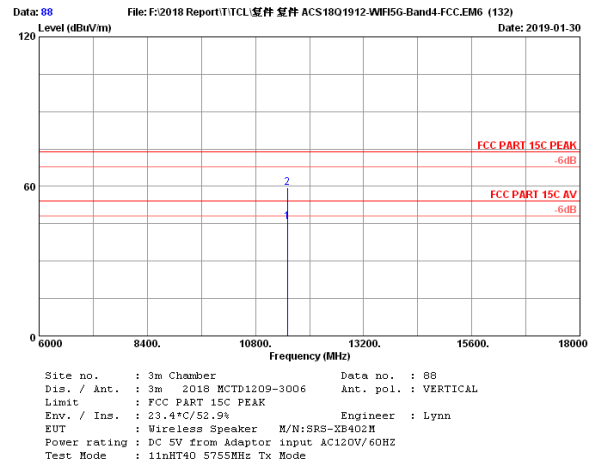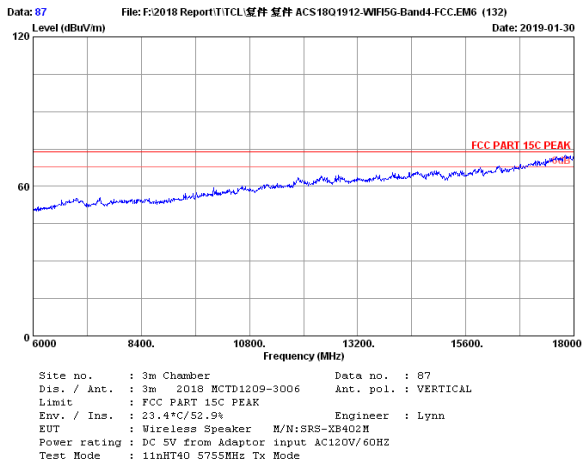



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.00	38.40	21.22	18.90	32.64	45.88	54.00	8.12	Average
2	11510.00	38.40	21.22	32.64	32.64	59.62	74.00	14.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

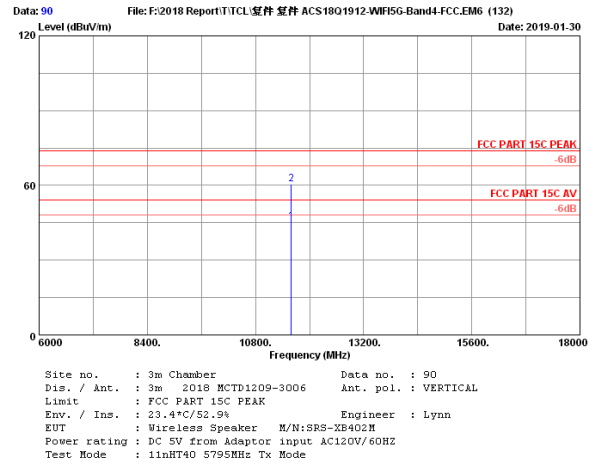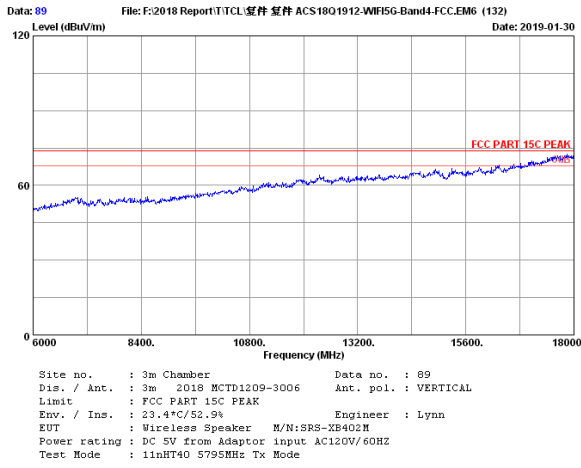

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.35	21.41	18.19	32.57	45.38	54.00	8.62	Average
2	11590.00	38.35	21.41	33.41	32.57	60.60	74.00	13.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

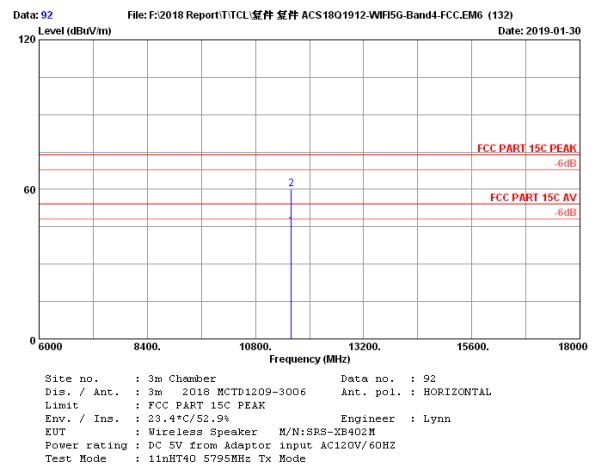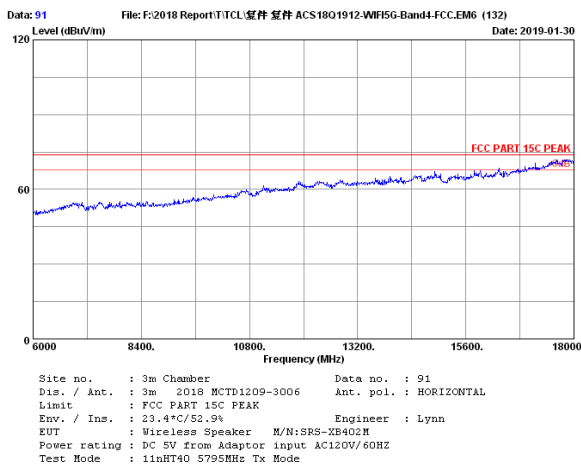

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.35	21.41	17.89	32.57	45.08	54.00	8.92	Average
2	11590.00	38.35	21.41	33.10	32.57	60.29	74.00	13.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.




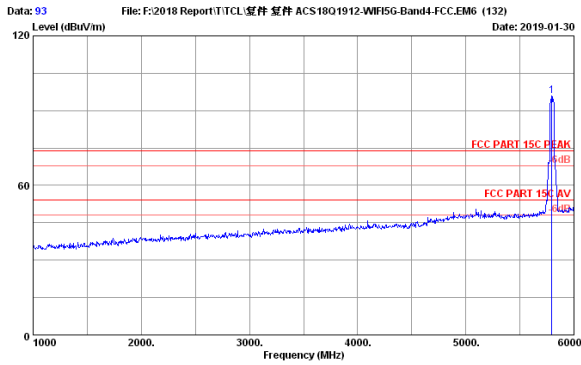

Site no. : 3m Chamber Data no. : 93  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT40 5795MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.31	16.47	80.59	34.58	95.79	74.00	-21.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

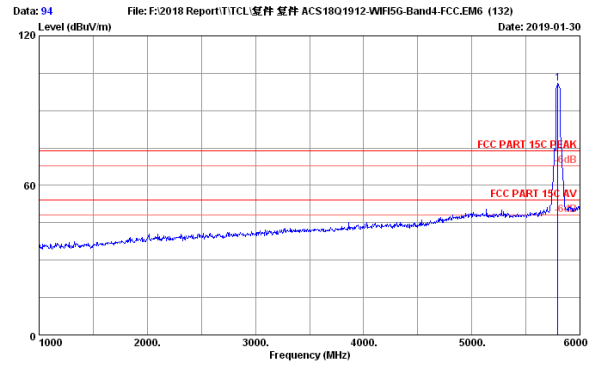

Site no. : 3m Chamber Data no. : 94  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT40 5795MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.31	16.47	85.67	34.58	100.87	74.00	-26.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

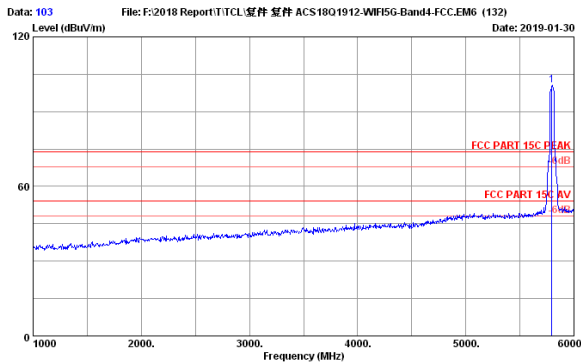

Site no. : 3m Chamber Data no. : 103  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5795MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.31	16.47	85.41	34.58	100.61	74.00	-26.61	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

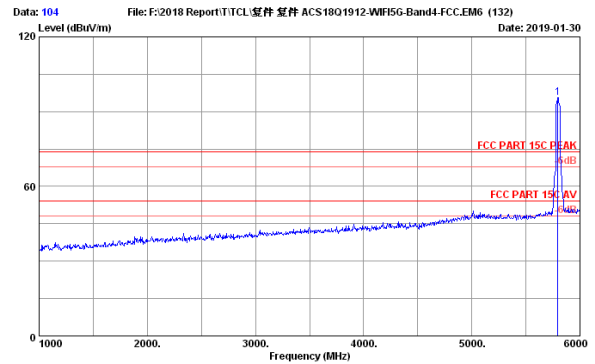

Site no. : 3m Chamber Data no. : 104  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5795MHz Tx Mode



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.00	33.31	16.47	80.28	34.58	95.48	74.00	-21.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

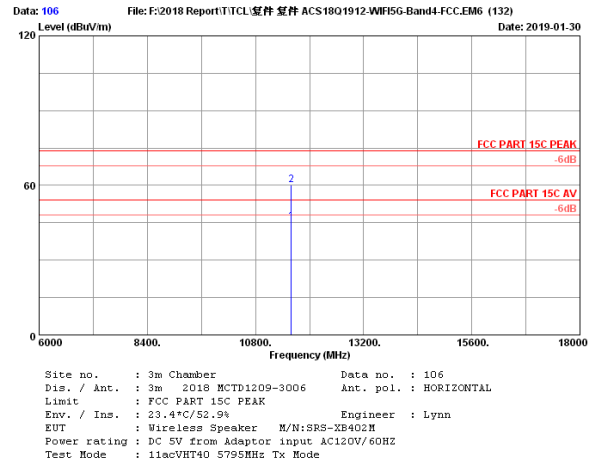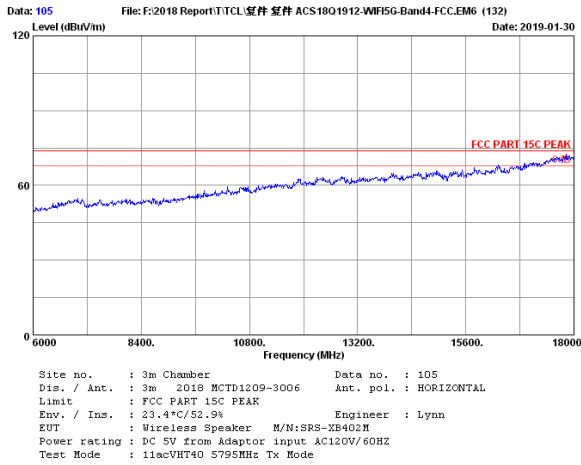

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.35	21.41	18.19	32.57	45.38	54.00	8.62	Average
2	11590.00	38.35	21.41	33.06	32.57	60.25	74.00	13.75	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

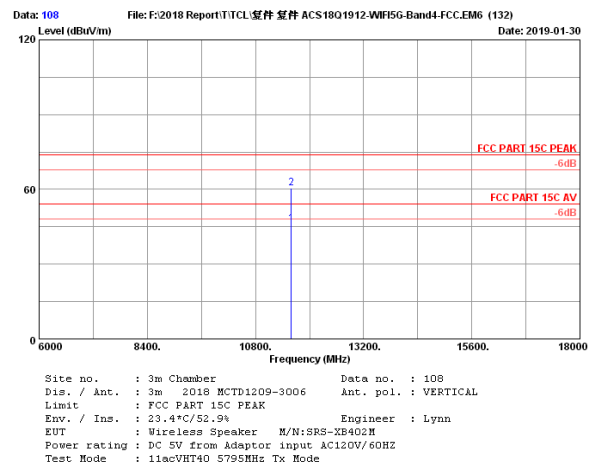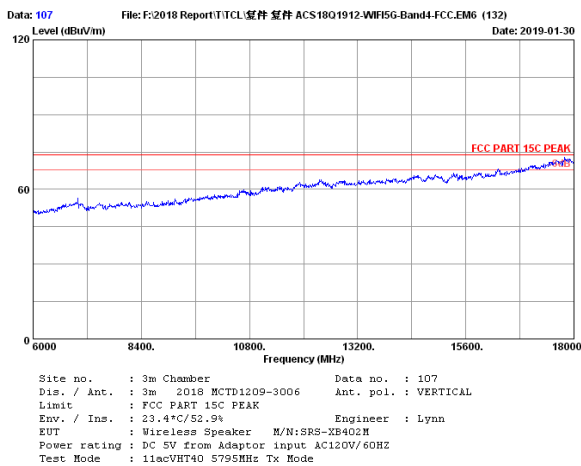

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11590.00	38.35	21.41	18.89	32.57	46.08	54.00	7.92	Average
2	11590.00	38.35	21.41	33.23	32.57	60.42	74.00	13.58	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

FCC ID: AK8SRSXB402

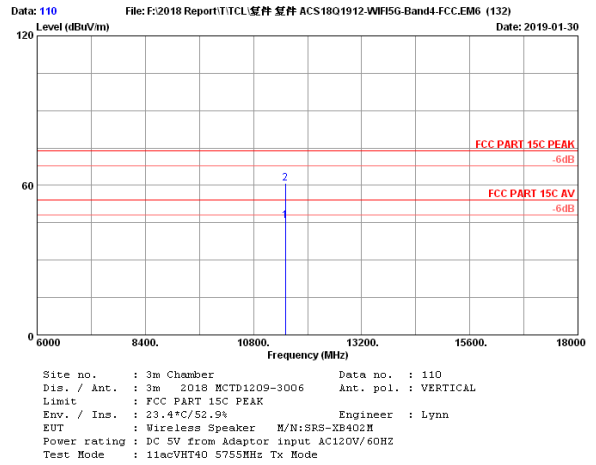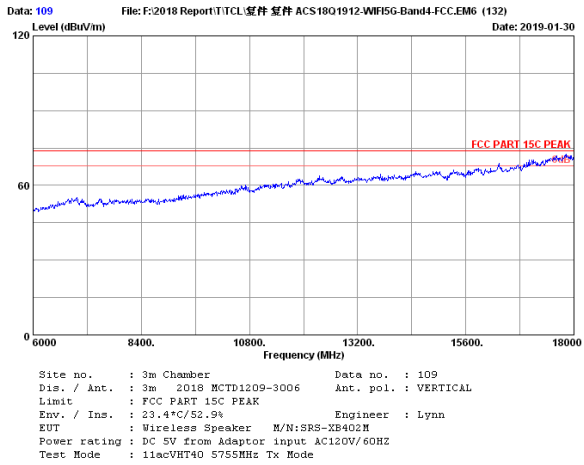


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.00	38.40	21.22	18.90	32.64	45.88	54.00	8.12	Average
2	11510.00	38.40	21.22	33.78	32.64	60.76	74.00	13.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

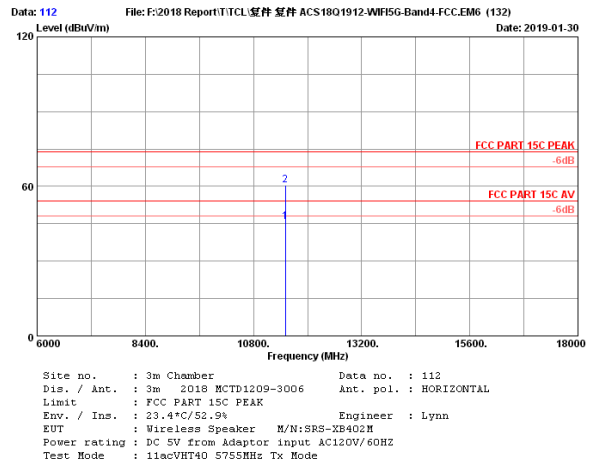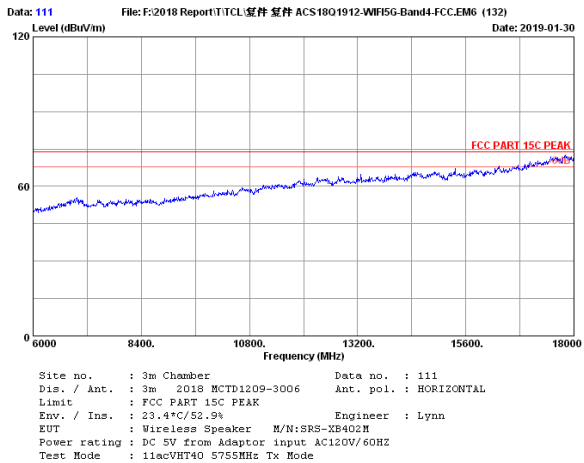

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11510.00	38.40	21.22	18.80	32.64	45.78	54.00	8.22	Average
2	11510.00	38.40	21.22	33.51	32.64	60.49	74.00	13.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

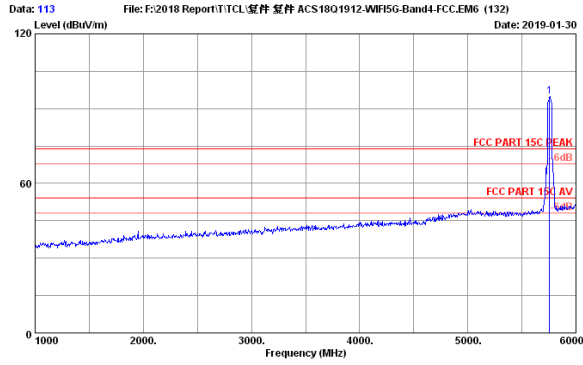

Site no. : 3m Chamber Data no. : 113  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.26	16.40	75.82	34.60	94.88	74.00	-20.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

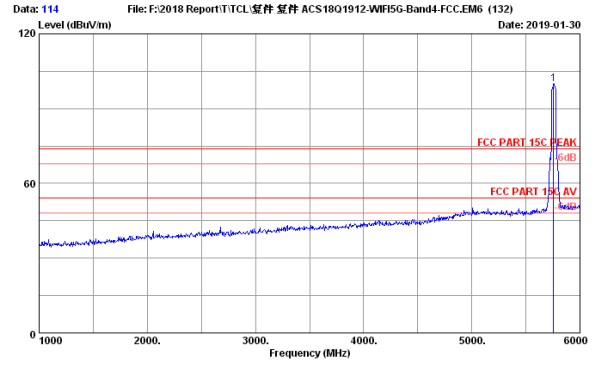

Site no. : 3m Chamber Data no. : 114  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.00	33.26	16.40	84.76	34.60	99.82	74.00	-25.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

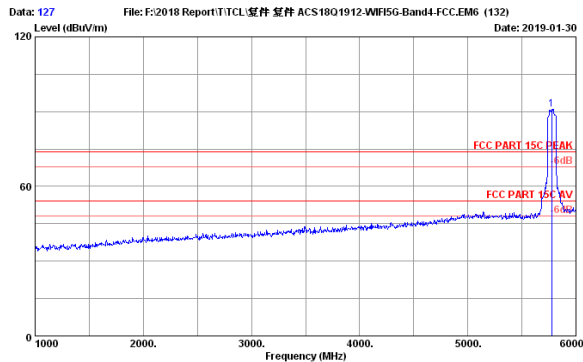

Site no. : 3m Chamber Data no. : 127  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5775MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.00	33.29	16.44	75.92	34.59	91.06	74.00	-17.06	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

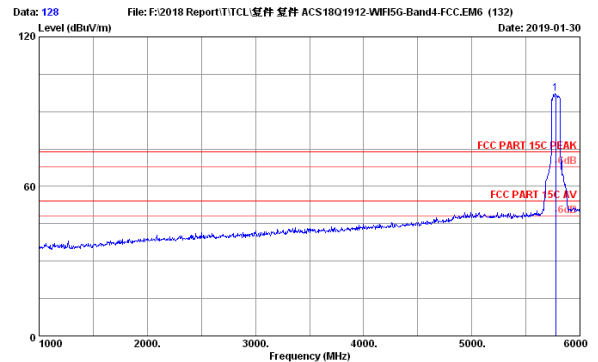

Site no. : 3m Chamber Data no. : 128  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5775MHz Tx Mode



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.00	33.29	16.44	82.08	34.59	97.22	74.00	-23.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

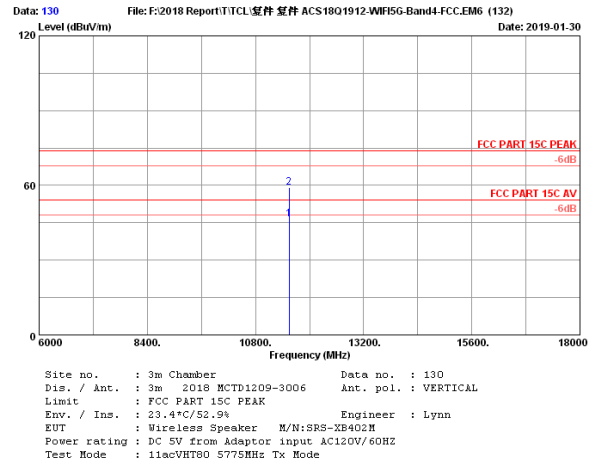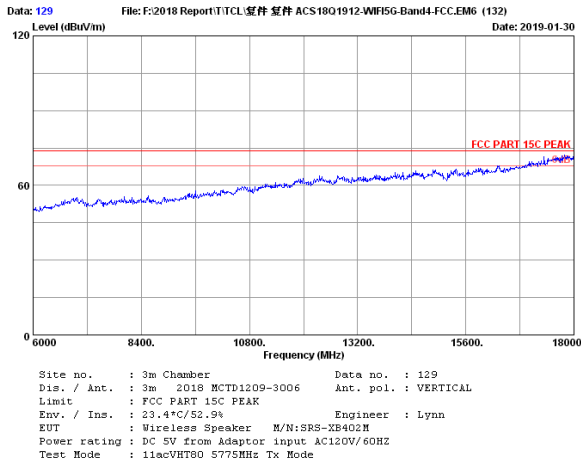

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11550.00	38.37	21.33	19.52	32.59	46.63	54.00	7.37	Average
2	11550.00	38.37	21.33	32.00	32.59	59.11	74.00	14.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

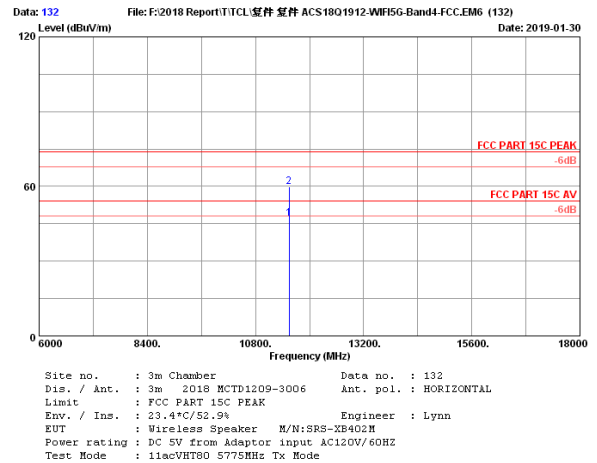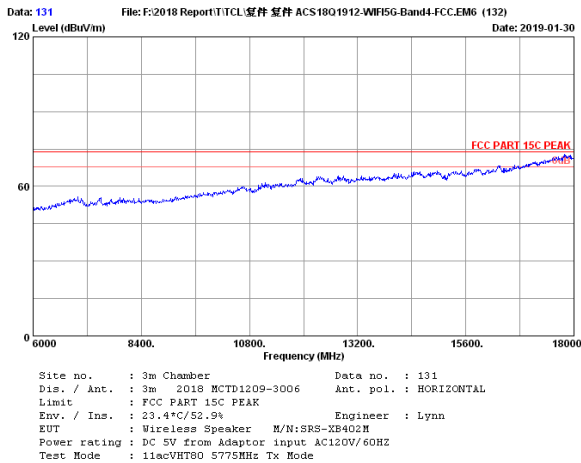

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	11550.00	38.37	21.33	19.98	32.59	47.09	54.00	6.91	Average
2	11550.00	38.37	21.33	32.69	32.59	59.80	74.00	14.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 5. BAND EDGE COMPLIANCE TEST

### 5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year
2.	Amplifier	HP	8449B	3008A02495	Apr.23.18	1 Year
3.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	May.30,18	1 Year
4.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	May.30,18	1 Year
5.	RF Cable	Hubersuhner	SUCOFLEX106	505238/6	Apr.23,18	1 Year

### 5.2. Limit

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz,

All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For transmitters operating in the band 5470-5725MHz, Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For transmitters operating in the 5.725-5.85 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

### 5.3. Test Procedure


Use the test method described in ANSI C63.10 clause 6.10:

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO
5. Per KDB789033 clause H 2)d).if the test distance is 3m,the EIRP(dBm)=E(dBuv/m)-95.2  
Get the final compare with limit.

### 5.4. Test Results

Pass (The testing data was attached in the next pages.)

5180-5240MHz Band:

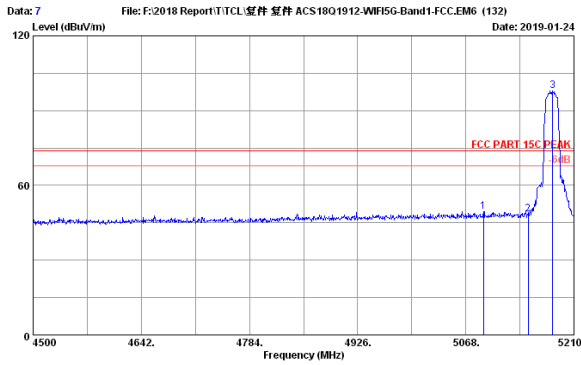


File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band1-FCC.EM6 (132) Date: 2019-01-24

Site no. : 3m Chamber Data no. : 7  
 Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SPS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5091.43	33.40	15.01	35.79	34.62	49.58	74.00	24.42	Peak
2	5150.00	33.40	15.12	34.51	34.63	48.40	74.00	25.60	Peak
3	5182.31	33.40	15.19	34.12	34.64	48.07	74.00	-24.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

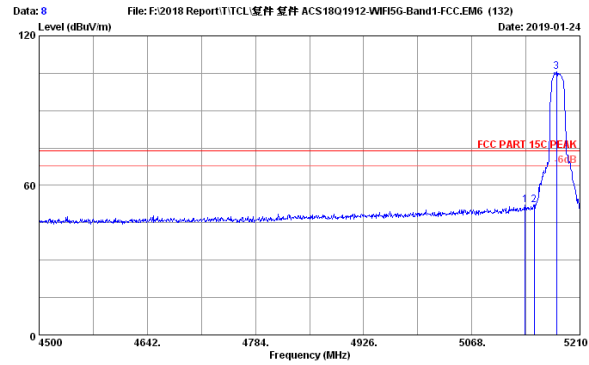


File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band1-FCC.EM6 (132) Date: 2019-01-24

Site no. : 3m Chamber Data no. : 8  
 Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SPS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5138.29	33.40	15.08	38.34	34.63	52.19	74.00	21.81	Peak
2	5150.00	33.40	15.12	38.41	34.63	52.30	74.00	21.70	Peak
3	5179.47	33.40	15.19	31.61	34.64	105.56	74.00	-31.56	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

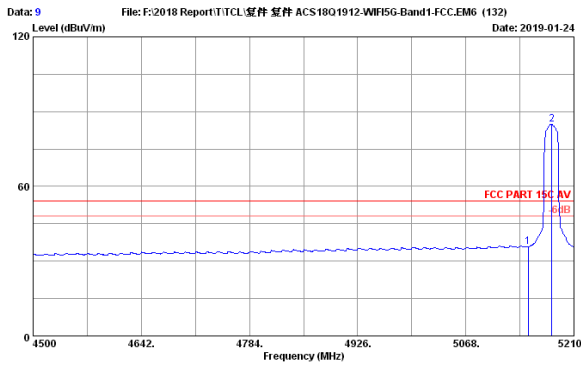


File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band1-FCC.EM6 (132) Date: 2019-01-24

Site no. : 3m Chamber Data no. : 9  
 Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SPS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5149.65	33.40	15.12	-12.87	0.00	35.65	54.00	18.35	Average
2	5180.69	33.40	15.19	36.33	0.00	54.92	54.00	-0.92	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

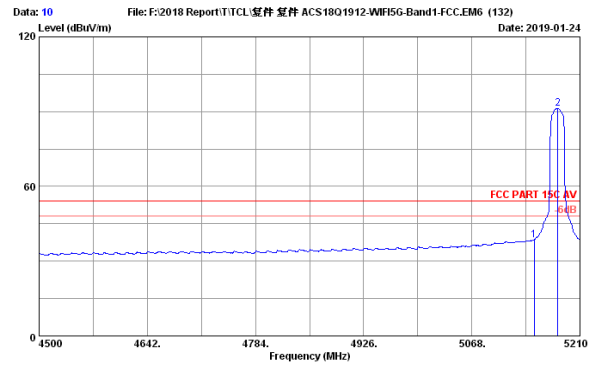


File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band1-FCC.EM6 (132) Date: 2019-01-24

Site no. : 3m Chamber Data no. : 10  
 Dis. / Ant. : 3m 2018 MCTD1209-3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SPS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5180MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.40	15.12	24.62	34.63	38.51	54.00	15.49	Average
2	5180.89	33.40	15.19	77.42	34.64	91.37	54.00	-37.37	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

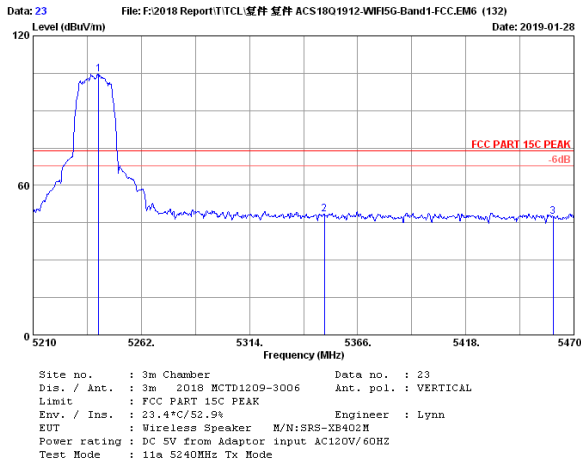


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.46	33.70	15.30	90.27	34.65	104.62	74.00	-30.62	Peak
2	5350.00	33.35	15.55	34.17	34.67	48.40	74.00	25.60	Peak
3	5460.00	33.05	15.76	33.18	34.69	47.30	74.00	26.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

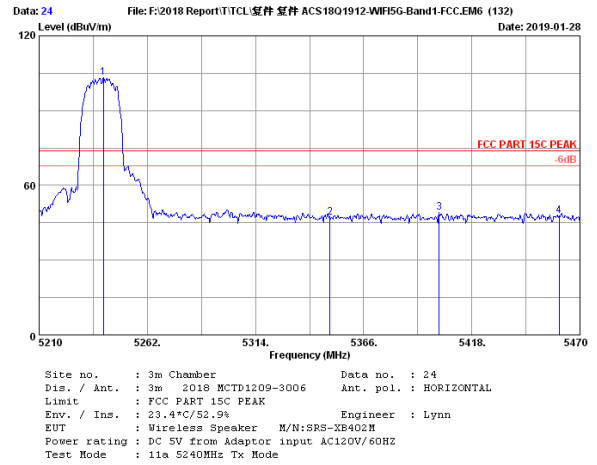


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.94	33.70	15.30	88.97	34.65	103.32	74.00	-29.32	Peak
2	5349.08	33.35	15.55	32.89	34.67	47.12	74.00	26.88	Peak
3	5402.40	33.20	15.65	34.81	34.68	48.98	74.00	25.02	Peak
4	5460.00	33.05	15.76	33.59	34.69	47.71	74.00	26.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

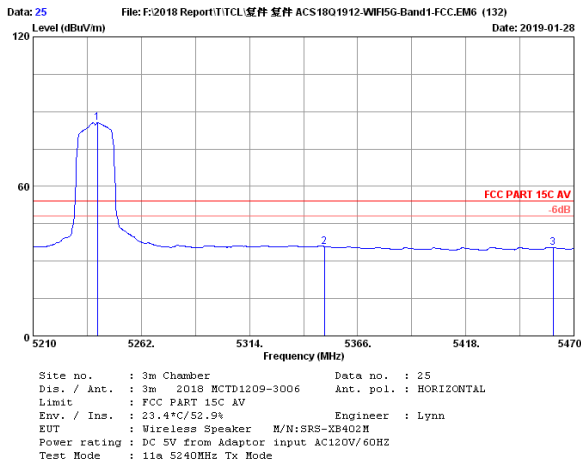

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.94	33.70	15.30	71.24	34.65	85.59	54.00	-31.59	Average
2	5350.00	33.35	15.55	21.67	34.67	35.90	54.00	18.10	Average
3	5460.00	33.05	15.76	21.30	34.69	35.42	54.00	18.58	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

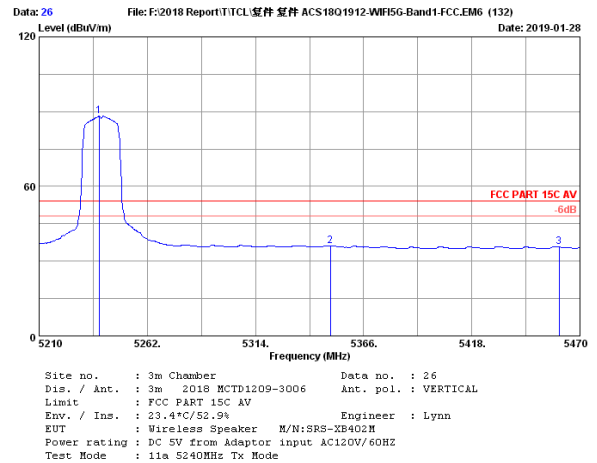

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5238.06	33.70	15.30	73.06	34.65	88.21	54.00	-34.21	Average
2	5350.00	33.35	15.55	21.87	34.67	36.10	54.00	17.90	Average
3	5460.00	33.05	15.76	21.60	34.69	35.72	54.00	18.28	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.




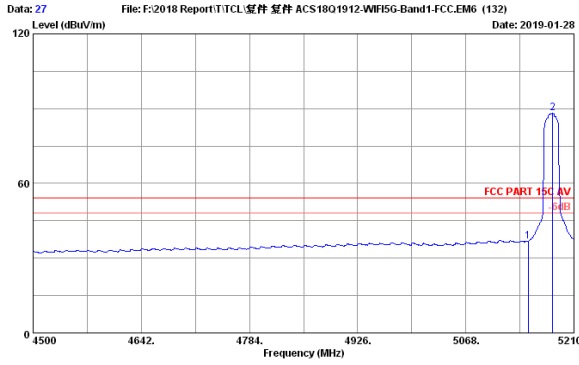

Site no. : 3m Chamber Data no. : 27  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	22.29	34.63	36.73	54.00	17.27	Average
2	5182.31	33.85	15.19	73.81	34.64	88.21	54.00	-34.21	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

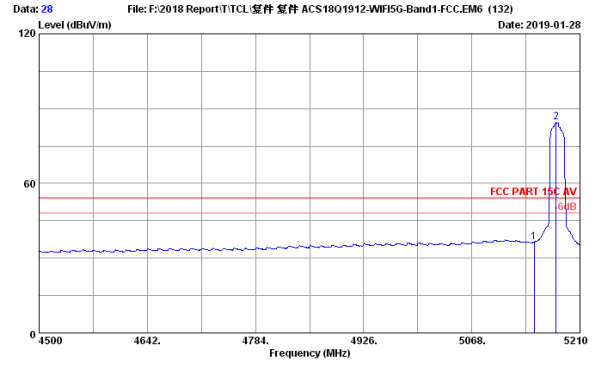

Site no. : 3m Chamber Data no. : 28  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	21.94	34.63	36.38	54.00	17.62	Average
2	5178.76	33.85	15.19	70.04	34.64	84.44	54.00	-30.44	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

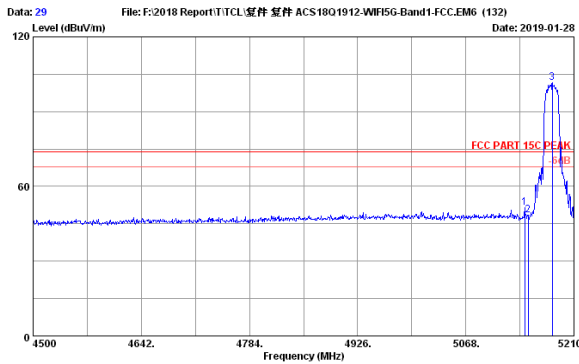

Site no. : 3m Chamber Data no. : 29  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5145.39	33.95	15.12	37.00	34.63	51.44	74.00	22.56	Peak
2	5150.00	33.95	15.12	33.94	34.63	48.38	74.00	25.62	Peak
3	5181.60	33.85	15.19	87.13	34.64	101.53	74.00	-27.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

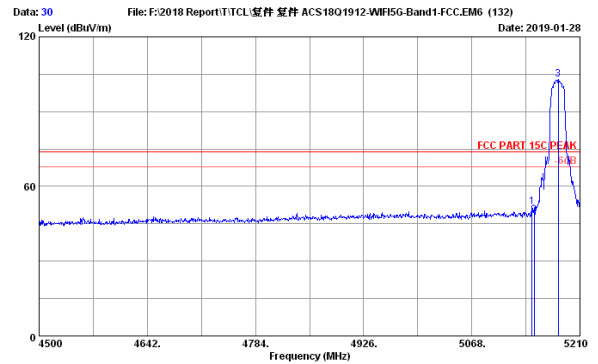

Site no. : 3m Chamber Data no. : 30  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT20 5180MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5146.81	33.95	15.12	37.42	34.63	51.86	74.00	22.14	Peak
2	5149.65	33.95	15.12	34.07	34.63	48.51	74.00	25.49	Peak
3	5181.60	33.85	15.19	88.47	34.64	102.87	74.00	-28.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

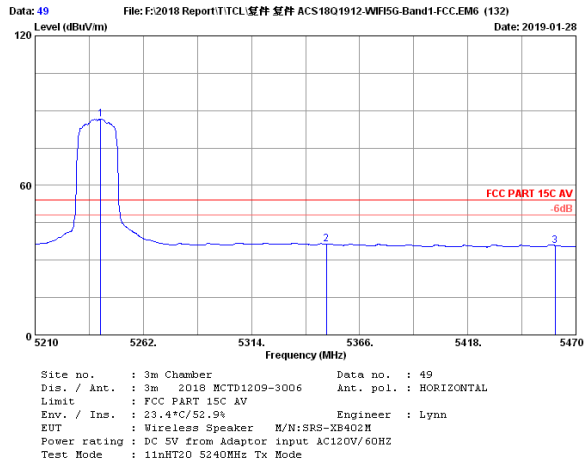


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.46	33.70	15.30	72.36	34.65	86.71	54.00	-32.71	Average
2	5350.00	33.35	15.55	22.26	34.67	36.49	54.00	17.51	Average
3	5460.00	33.05	15.76	21.76	34.69	35.88	54.00	18.12	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

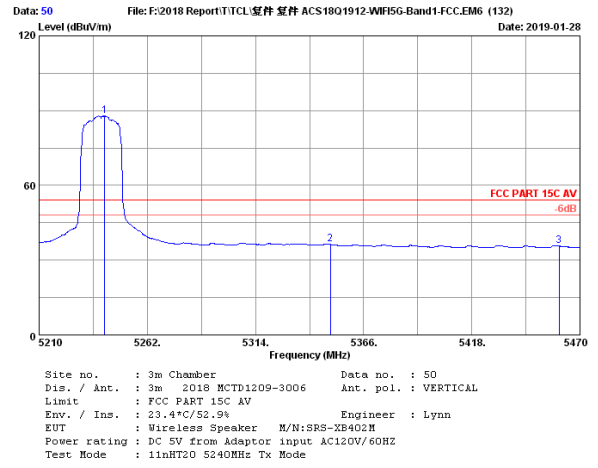


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.46	33.70	15.30	73.54	34.65	87.89	54.00	-33.89	Average
2	5350.00	33.35	15.55	22.05	34.67	36.20	54.00	17.72	Average
3	5460.00	33.05	15.76	21.52	34.69	35.64	54.00	18.36	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

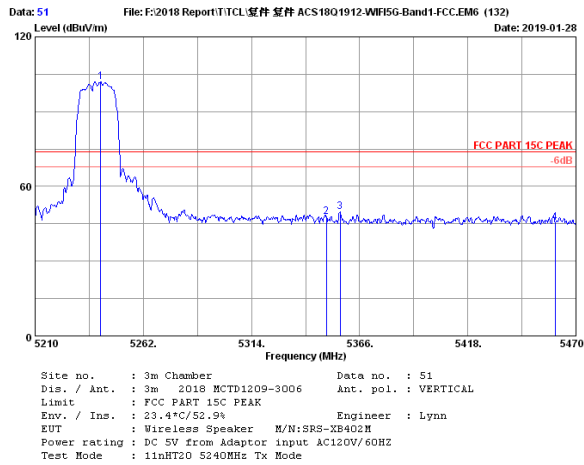


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.46	33.70	15.30	87.64	34.65	101.99	74.00	-27.99	Peak
2	5350.00	33.35	15.55	33.45	34.67	47.68	74.00	26.32	Peak
3	5356.64	33.35	15.55	35.45	34.67	49.68	74.00	24.32	Peak
4	5460.00	33.05	15.76	31.35	34.69	45.47	74.00	28.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

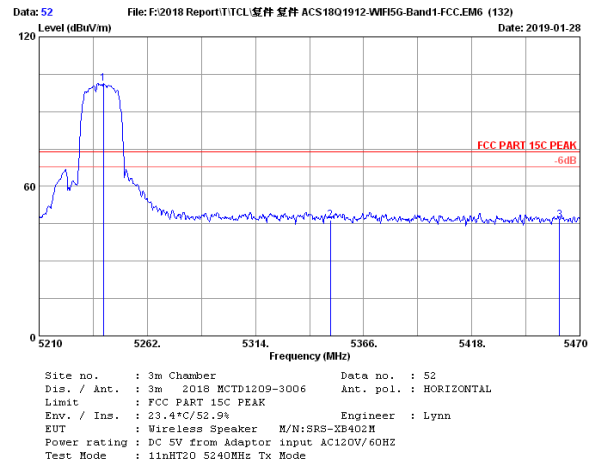

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5240.94	33.70	15.30	86.99	34.65	101.34	74.00	-27.34	Peak
2	5350.00	33.35	15.55	32.18	34.67	46.41	74.00	27.59	Peak
3	5460.12	33.05	15.76	32.29	34.69	46.41	74.00	27.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

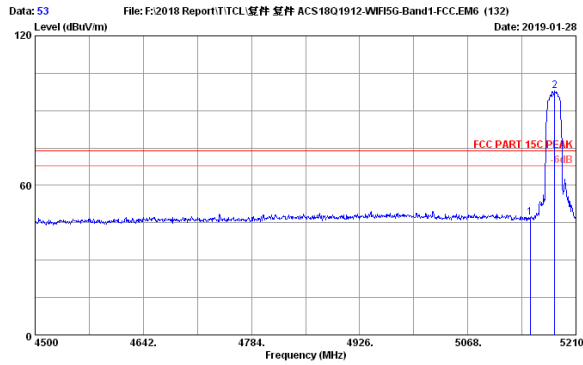

Site no. : 3m Chamber Data no. : 53  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	32.58	34.63	47.02	74.00	26.98	Peak
2	5182.31	33.85	15.19	83.57	34.64	97.97	74.00	-23.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

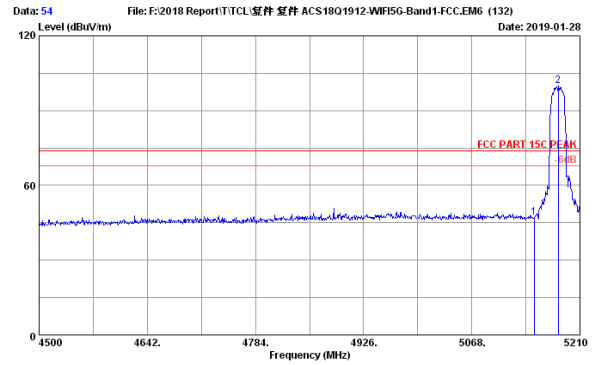

Site no. : 3m Chamber Data no. : 54  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	32.62	34.63	47.06	74.00	26.94	Peak
2	5181.60	33.85	15.19	85.49	34.64	99.89	74.00	-25.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

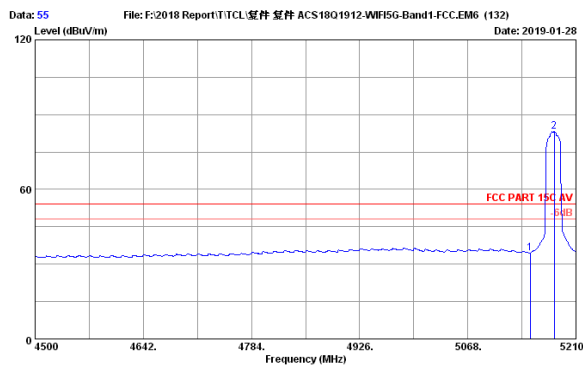

Site no. : 3m Chamber Data no. : 55  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	20.14	34.63	34.58	54.00	19.42	Average
2	5181.60	33.85	15.19	68.91	34.64	83.31	54.00	-29.31	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

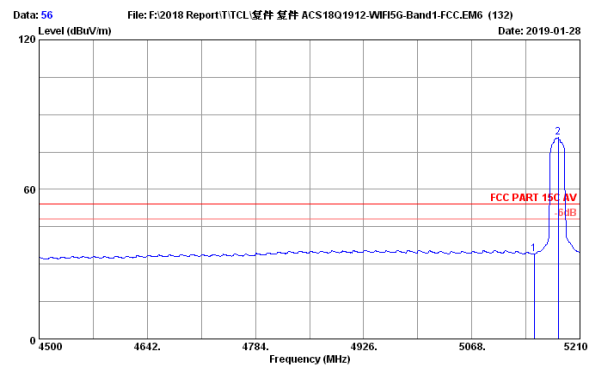

Site no. : 3m Chamber Data no. : 56  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5180MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	19.64	34.63	34.08	54.00	19.92	Average
2	5181.60	33.85	15.19	66.38	34.64	80.78	54.00	-26.78	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

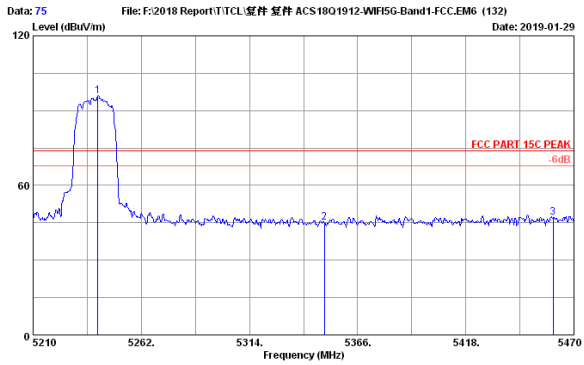

Site no. : 3m Chamber Data no. : 75  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.20	33.70	15.30	81.74	34.65	96.09	74.00	-22.09	Peak
2	5350.00	33.35	15.55	31.03	34.67	45.26	74.00	28.74	Peak
3	5460.00	33.05	15.76	32.90	34.69	47.02	74.00	26.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

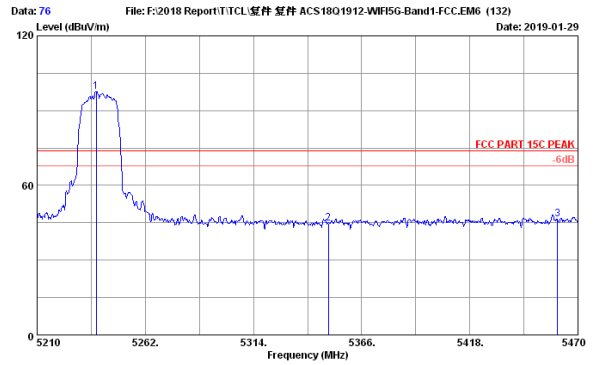

Site no. : 3m Chamber Data no. : 76  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5238.34	33.70	15.30	83.28	34.65	97.63	74.00	-23.63	Peak
2	5350.00	33.35	15.55	30.45	34.67	44.66	74.00	29.32	Peak
3	5460.12	33.05	15.76	32.38	34.69	46.50	74.00	27.50	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

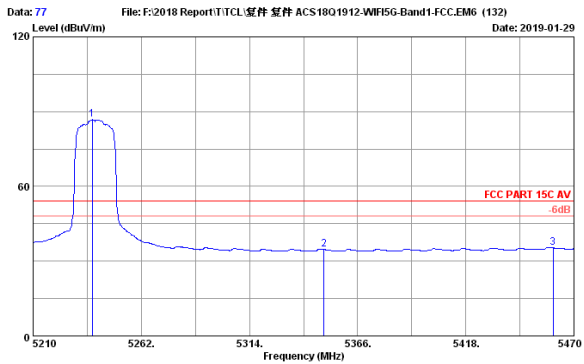

Site no. : 3m Chamber Data no. : 77  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5240MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5238.34	33.70	15.30	72.54	34.65	86.89	54.00	-32.89	Average
2	5349.88	33.35	15.55	20.48	34.67	34.71	54.00	19.29	Average
3	5460.00	33.05	15.76	21.19	34.69	35.31	54.00	18.69	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

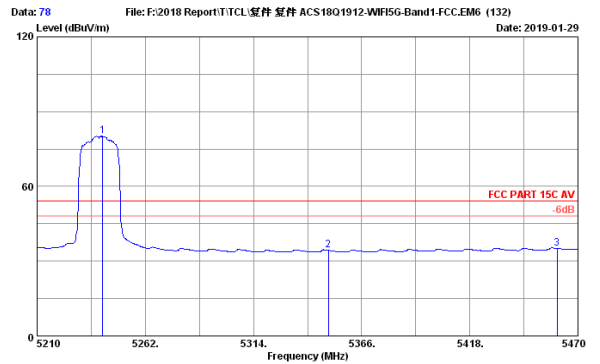

Site no. : 3m Chamber Data no. : 78  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5240MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5241.46	33.70	15.30	65.85	34.65	80.20	54.00	-26.20	Average
2	5350.00	33.35	15.55	20.21	34.67	34.44	54.00	19.56	Average
3	5460.00	33.05	15.76	21.05	34.69	35.17	54.00	18.83	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

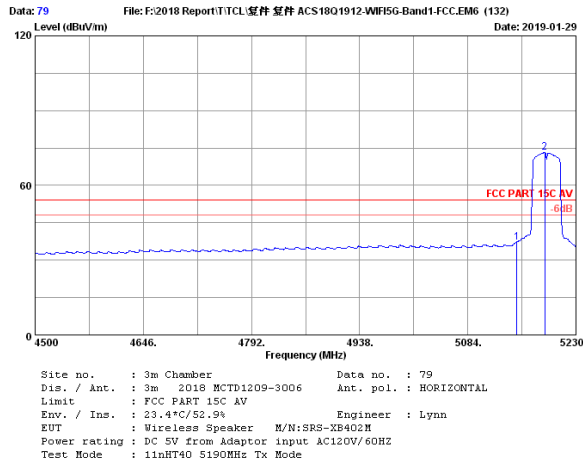


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	22.77	34.63	37.21	54.00	16.79	Average
2	5187.66	33.85	15.19	58.76	34.64	73.16	54.00	-19.16	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

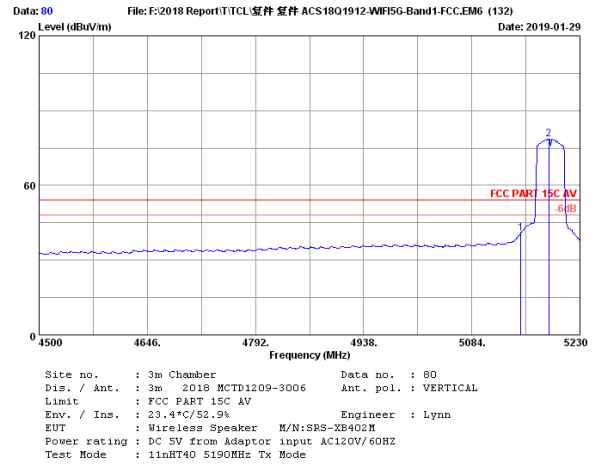


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	26.23	34.63	40.67	54.00	13.33	Average
2	5187.66	33.85	15.19	64.19	34.64	78.59	54.00	-24.59	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

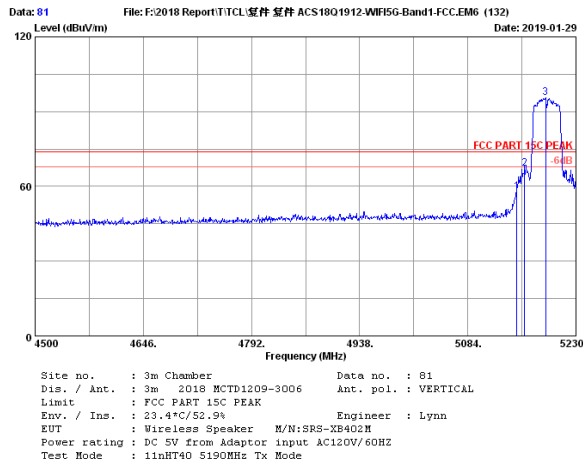


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	43.41	34.63	57.85	74.00	16.15	Peak
2	5160.65	33.90	15.16	52.78	34.63	67.21	74.00	6.79	Peak
3	5189.12	33.85	15.19	81.05	34.64	95.45	74.00	-21.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

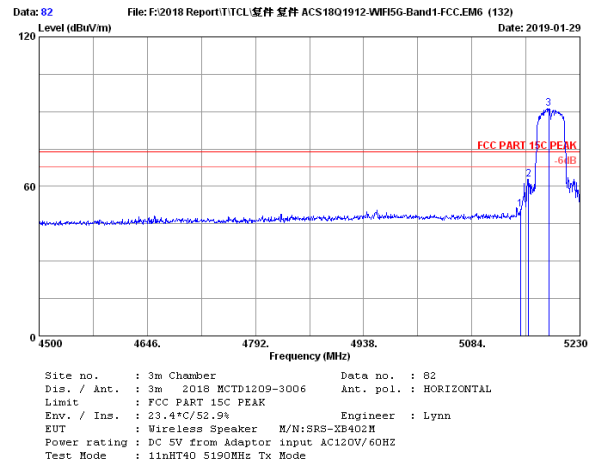


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5149.70	33.95	15.12	36.24	34.63	50.68	74.00	23.32	Peak
2	5160.65	33.90	15.16	48.41	34.63	62.84	74.00	11.16	Peak
3	5187.66	33.85	15.19	76.96	34.64	91.36	74.00	-17.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

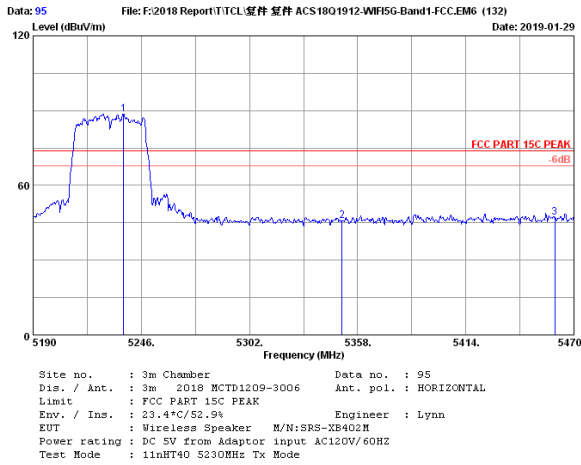


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5236.76	33.70	15.30	74.31	34.65	88.66	74.00	-14.66	Peak
2	5350.00	33.35	15.55	31.65	34.67	45.88	74.00	28.12	Peak
3	5460.00	33.05	15.76	33.17	34.69	47.29	74.00	26.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

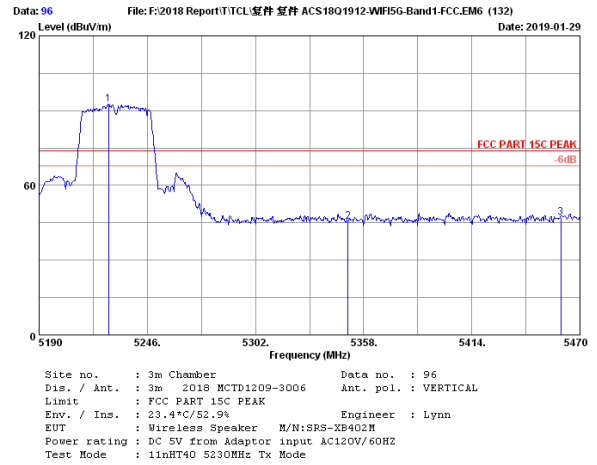


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5225.84	33.70	15.30	78.25	34.65	92.60	74.00	-18.60	Peak
2	5350.00	33.35	15.55	31.33	34.67	45.56	74.00	28.44	Peak
3	5460.00	33.05	15.76	33.14	34.69	47.26	74.00	26.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

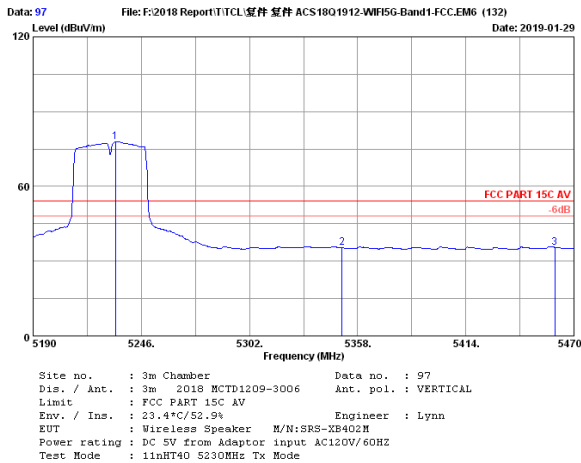


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5232.56	33.70	15.30	63.59	34.65	77.94	54.00	-23.94	Average
2	5350.00	33.35	15.55	21.09	34.67	35.32	54.00	18.68	Average
3	5460.00	33.05	15.76	21.44	34.69	35.56	54.00	18.44	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

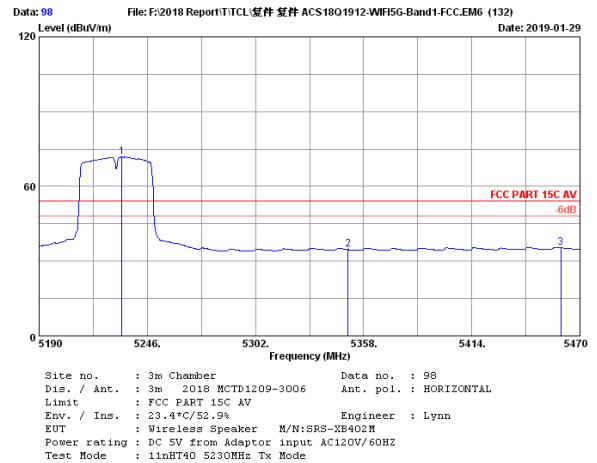

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5232.84	33.70	15.30	57.44	34.65	71.79	54.00	-17.79	Average
2	5350.00	33.35	15.55	20.40	34.67	34.63	54.00	19.37	Average
3	5460.00	33.05	15.76	21.29	34.69	35.41	54.00	18.59	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

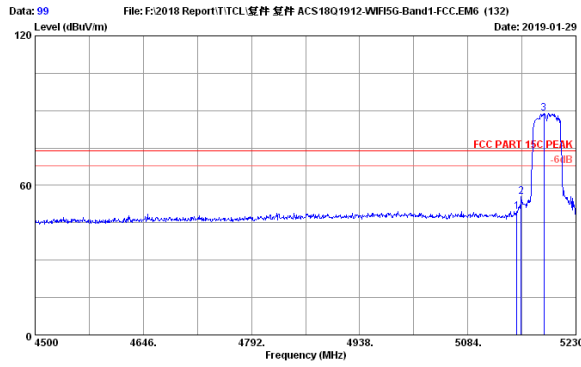

Site no. : 3m Chamber Data no. : 99  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5190MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	34.93	34.63	49.37	74.00	24.63	Peak
2	5156.27	33.95	15.12	40.93	34.63	55.37	74.00	18.63	Peak
3	5186.93	33.85	15.19	74.67	34.64	89.07	74.00	-15.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

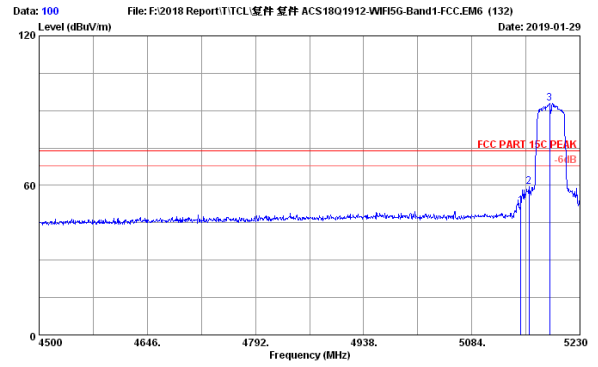

Site no. : 3m Chamber Data no. : 100  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5190MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	37.38	34.63	51.82	74.00	22.18	Peak
2	5161.38	33.90	15.16	45.22	34.63	59.65	74.00	14.35	Peak
3	5189.12	33.85	15.19	78.43	34.64	92.83	74.00	-18.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

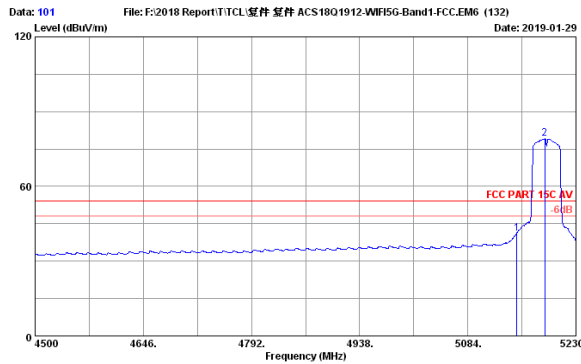

Site no. : 3m Chamber Data no. : 101  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5190MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	26.55	34.63	40.99	54.00	13.01	Average
2	5187.66	33.85	15.19	64.74	34.64	79.14	54.00	-25.14	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

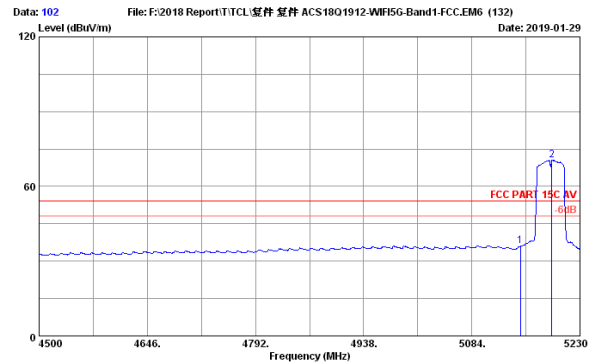

Site no. : 3m Chamber Data no. : 102  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5190MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5149.70	33.95	15.12	21.56	34.63	36.00	54.00	18.00	Average
2	5192.04	33.80	15.23	56.01	34.64	70.40	54.00	-16.40	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

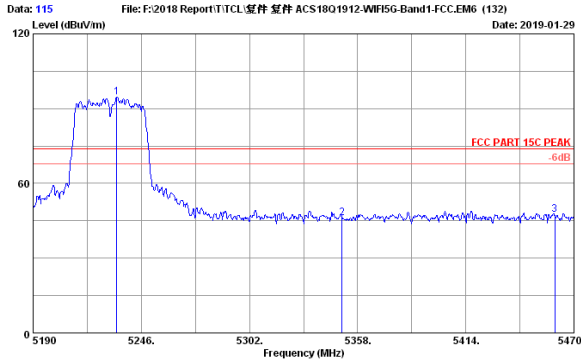

Site no. : 3m Chamber Data no. : 115  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5230MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5233.40	33.70	15.30	80.17	34.65	94.52	74.00	-20.52	Peak
2	5350.00	33.35	15.55	31.86	34.67	46.09	74.00	27.91	Peak
3	5460.00	33.05	15.76	33.40	34.69	47.52	74.00	26.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

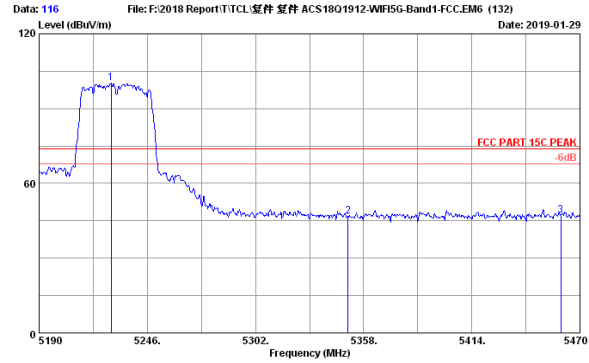

Site no. : 3m Chamber Data no. : 116  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5230MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5227.24	33.70	15.30	85.76	34.65	100.11	74.00	-26.11	Peak
2	5350.00	33.35	15.55	32.55	34.67	46.70	74.00	27.22	Peak
3	5460.00	33.05	15.76	33.05	34.69	47.17	74.00	26.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

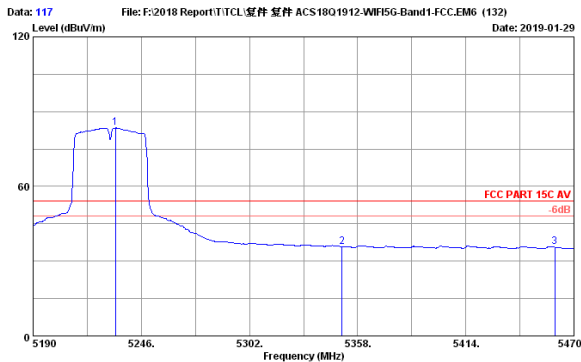

Site no. : 3m Chamber Data no. : 117  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5230MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5232.56	33.70	15.30	69.05	34.65	83.40	54.00	-29.40	Average
2	5350.00	33.35	15.55	21.64	34.67	35.87	54.00	18.13	Average
3	5460.00	33.05	15.76	21.53	34.69	35.65	54.00	18.35	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

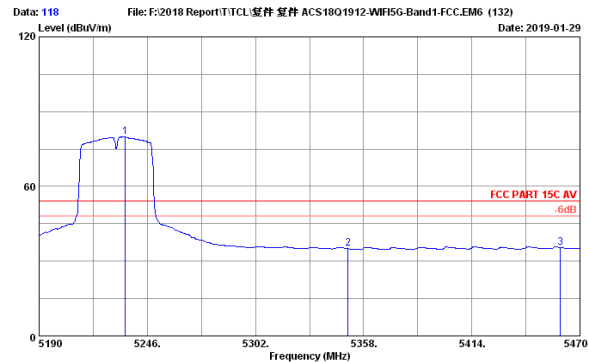


Site no. : 3m Chamber Data no. : 118  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5230MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5234.52	33.70	15.30	65.47	34.65	79.82	54.00	-25.82	Average
2	5350.00	33.35	15.55	20.78	34.67	35.01	54.00	18.99	Average
3	5459.92	33.05	15.76	21.35	34.69	35.47	54.00	18.53	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.




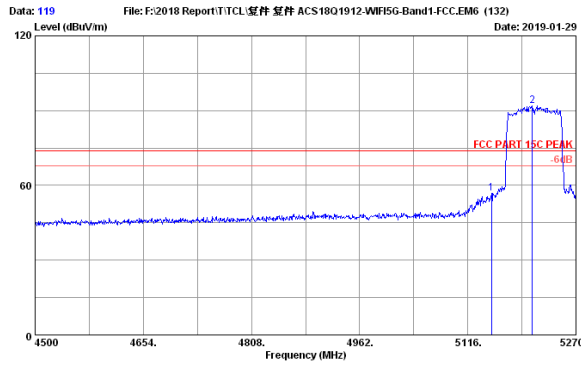

Site no. : 3m Chamber Data no. : 119  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5210MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	42.22	34.63	56.66	74.00	17.34	Peak
2	5207.63	33.75	15.26	77.58	34.64	91.95	74.00	-17.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

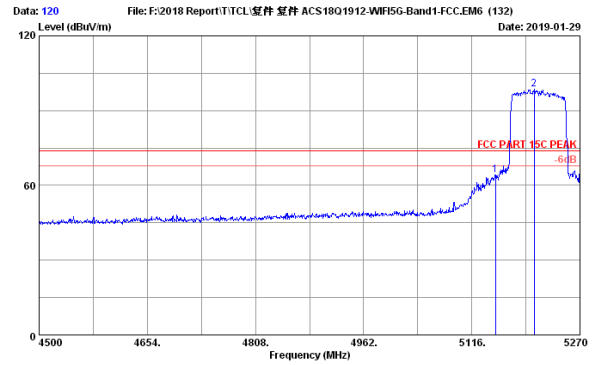

Site no. : 3m Chamber Data no. : 120  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5210MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	49.75	34.63	64.19	74.00	9.81	Peak
2	5204.55	33.80	15.23	84.35	34.64	98.74	74.00	-24.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

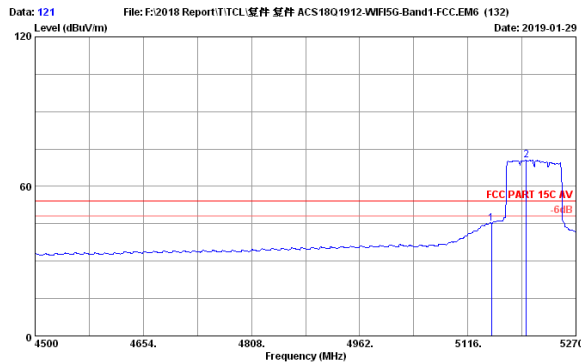

Site no. : 3m Chamber Data no. : 121  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5210MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	30.57	34.63	45.01	54.00	8.99	Average
2	5199.16	33.80	15.23	56.08	34.64	70.47	54.00	-16.47	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

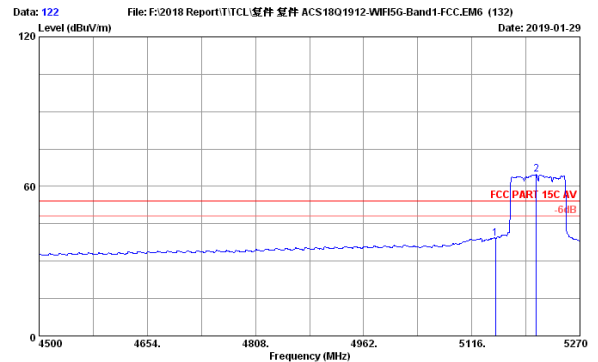

Site no. : 3m Chamber Data no. : 122  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5210MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	24.69	34.63	39.13	54.00	14.87	Average
2	5207.63	33.75	15.26	50.32	34.64	64.69	54.00	-10.69	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

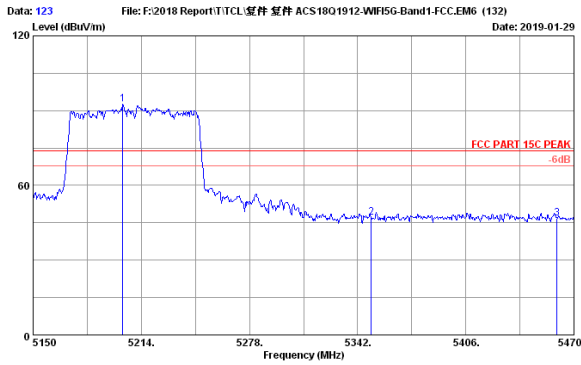

Site no. : 3m Chamber Data no. : 123  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5210MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5203.12	33.80	15.23	78.11	34.64	92.50	74.00	-18.50	Peak
2	5350.00	33.35	15.55	32.97	34.67	47.20	74.00	26.80	Peak
3	5460.00	33.05	15.76	32.77	34.69	46.89	74.00	27.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

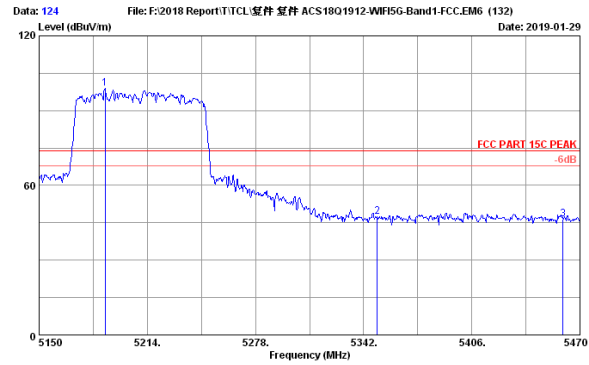

Site no. : 3m Chamber Data no. : 124  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5210MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5189.04	33.85	15.19	84.47	34.64	98.87	74.00	-24.87	Peak
2	5350.00	33.35	15.55	33.09	34.67	47.32	74.00	26.68	Peak
3	5460.00	33.05	15.76	32.22	34.69	46.34	74.00	27.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

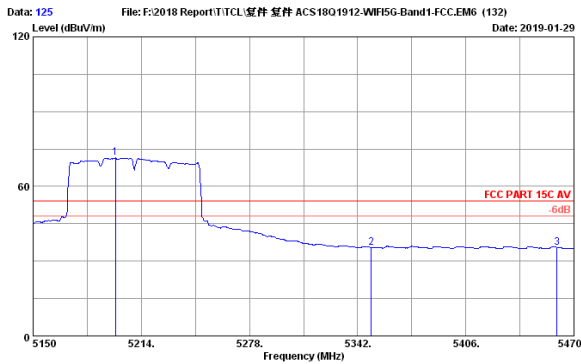

Site no. : 3m Chamber Data no. : 125  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5210MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5198.64	33.80	15.23	56.98	34.64	71.37	54.00	-17.37	Average
2	5350.00	33.35	15.55	21.29	34.67	35.52	54.00	18.48	Average
3	5460.00	33.05	15.76	21.44	34.69	35.56	54.00	18.44	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

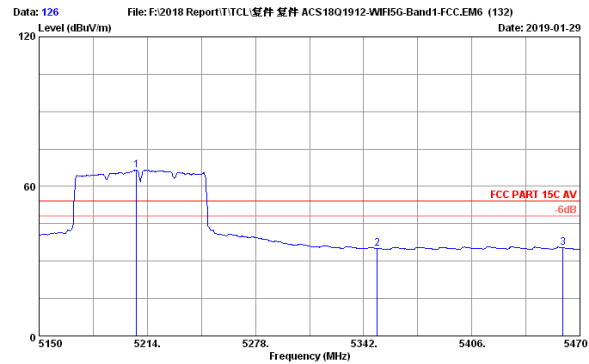


Site no. : 3m Chamber Data no. : 126  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5210MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5207.60	33.75	15.26	52.22	34.64	66.59	54.00	-12.59	Average
2	5350.00	33.35	15.55	20.88	34.67	35.11	54.00	18.89	Average
3	5460.00	33.05	15.76	21.30	34.69	35.42	54.00	18.58	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

5260-5320MHz Band:

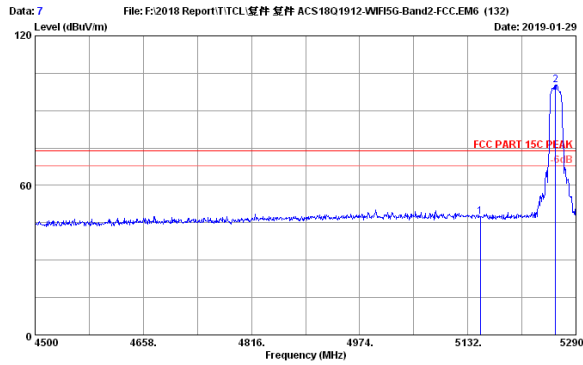


File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band2-FCC.EM6 (132)  
Date: 2019-01-29

Site no. : 3m Chamber Data no. : 7  
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
EUT : Wireless Speaker M/N:SPS-XB402M  
Power rating : DC 5V from Adaptor input AC120V/60HZ  
Test Mode : 11a 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	32.98	34.63	47.42	74.00	26.58	Peak
2	5259.98	33.60	15.37	86.07	34.65	100.39	74.00	-26.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
2. The emission levels that are 20dB below the official limit are not reported.

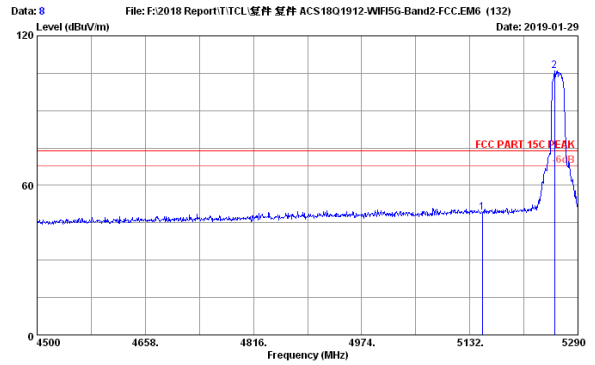


File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band2-FCC.EM6 (132)  
Date: 2019-01-29

Site no. : 3m Chamber Data no. : 8  
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
EUT : Wireless Speaker M/N:SPS-XB402M  
Power rating : DC 5V from Adaptor input AC120V/60HZ  
Test Mode : 11a 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	34.79	34.63	49.23	74.00	24.77	Peak
2	5256.03	33.65	15.33	91.75	34.65	106.08	74.00	-32.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
2. The emission levels that are 20dB below the official limit are not reported.

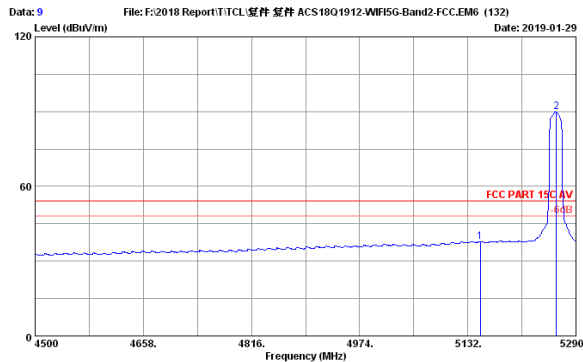


File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band2-FCC.EM6 (132)  
Date: 2019-01-29

Site no. : 3m Chamber Data no. : 9  
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
EUT : Wireless Speaker M/N:SPS-XB402M  
Power rating : DC 5V from Adaptor input AC120V/60HZ  
Test Mode : 11a 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	23.36	34.63	37.80	54.00	16.20	Average
2	5261.56	33.60	15.37	75.60	34.65	89.92	54.00	-35.92	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
2. The emission levels that are 20dB below the official limit are not reported.

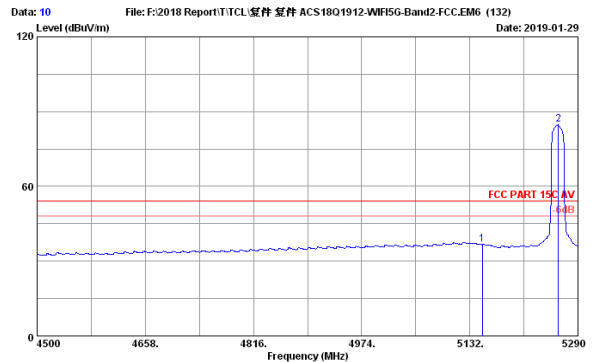


File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band2-FCC.EM6 (132)  
Date: 2019-01-29

Site no. : 3m Chamber Data no. : 10  
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
EUT : Wireless Speaker M/N:SPS-XB402M  
Power rating : DC 5V from Adaptor input AC120V/60HZ  
Test Mode : 11a 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	22.32	34.63	36.76	54.00	17.24	Average
2	5261.56	33.60	15.37	70.53	34.65	84.85	54.00	-30.85	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
2. The emission levels that are 20dB below the official limit are not reported.

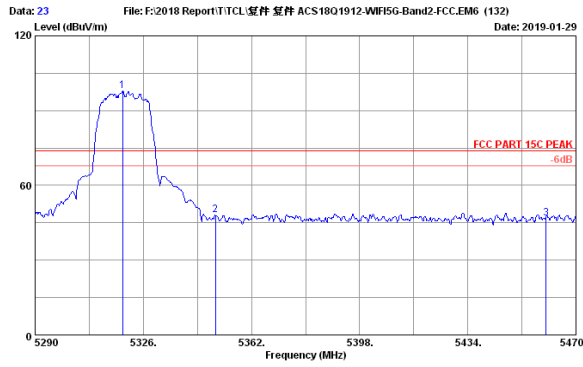

Site no. : 3m Chamber Data no. : 23  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.98	33.45	15.48	83.51	34.66	97.78	74.00	-23.78	Peak
2	5350.00	33.35	15.55	33.81	34.67	48.04	74.00	25.96	Peak
3	5460.00	33.05	15.76	32.56	34.69	46.68	74.00	27.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

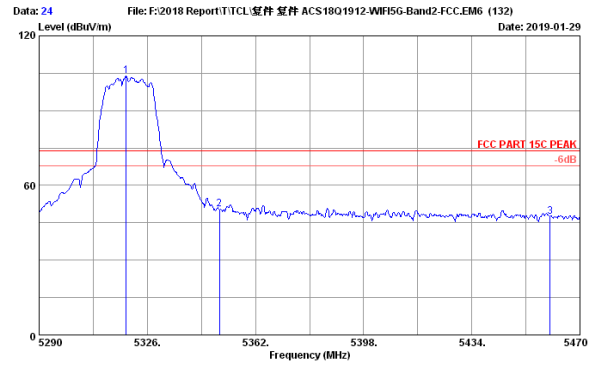

Site no. : 3m Chamber Data no. : 24  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.98	33.45	15.48	89.67	34.66	103.94	74.00	-29.94	Peak
2	5350.00	33.35	15.55	36.13	34.67	50.36	74.00	23.64	Peak
3	5460.00	33.05	15.76	33.20	34.69	47.32	74.00	26.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

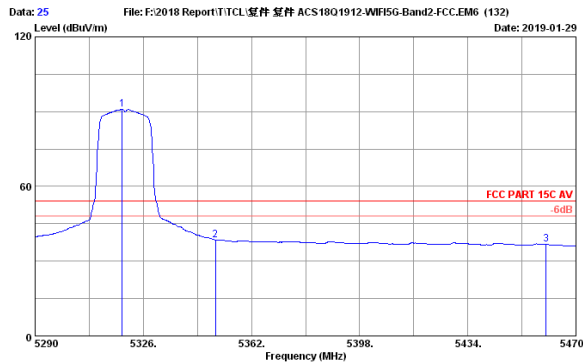

Site no. : 3m Chamber Data no. : 25  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.98	33.45	15.48	76.64	34.66	90.91	54.00	-36.91	Average
2	5350.00	33.35	15.55	24.32	34.67	38.55	54.00	15.45	Average
3	5460.00	33.05	15.76	22.68	34.69	36.80	54.00	17.20	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

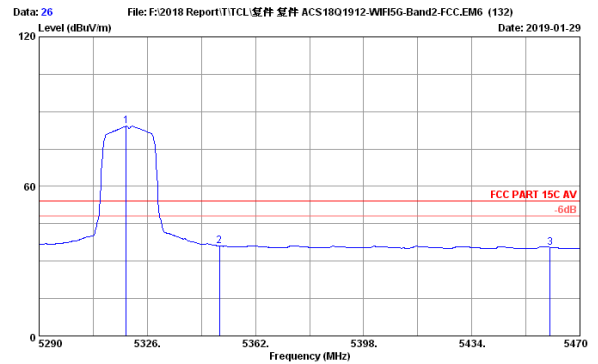

Site no. : 3m Chamber Data no. : 26  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.98	33.45	15.48	69.91	34.66	84.18	54.00	-30.18	Average
2	5350.00	33.35	15.55	21.80	34.67	36.03	54.00	17.97	Average
3	5460.00	33.05	15.76	21.45	34.69	35.57	54.00	18.43	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

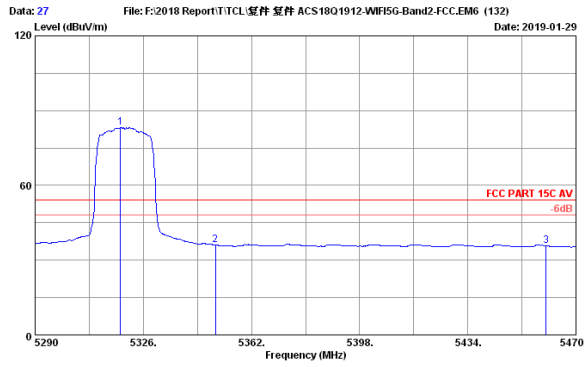

Site no. : 3m Chamber Data no. : 27  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.44	33.45	15.48	68.96	34.66	83.23	54.00	-29.23	Average
2	5350.00	33.35	15.55	21.80	34.67	36.03	54.00	17.97	Average
3	5460.00	33.05	15.76	21.69	34.69	35.81	54.00	18.19	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

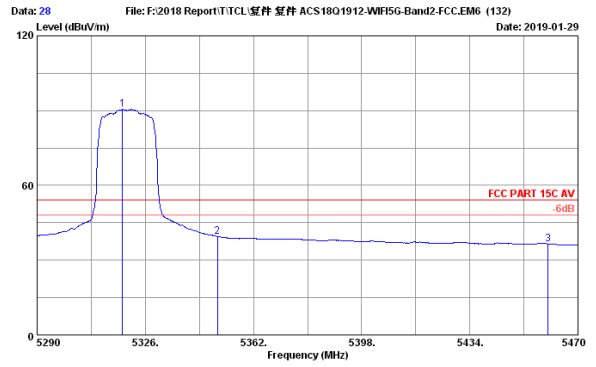

Site no. : 3m Chamber Data no. : 28  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.44	33.45	15.48	76.26	34.66	90.53	54.00	-36.53	Average
2	5350.00	33.35	15.55	25.30	34.67	39.53	54.00	14.47	Average
3	5460.00	33.05	15.76	22.45	34.69	36.57	54.00	17.43	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

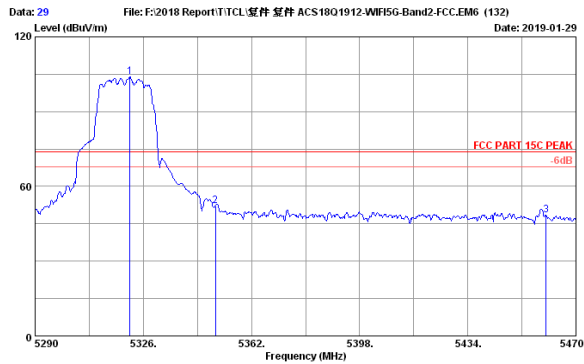

Site no. : 3m Chamber Data no. : 29  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5321.50	33.45	15.48	89.60	34.66	103.87	74.00	-29.87	Peak
2	5350.00	33.35	15.55	37.92	34.67	52.15	74.00	21.85	Peak
3	5460.00	33.05	15.76	34.50	34.69	48.62	74.00	25.38	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

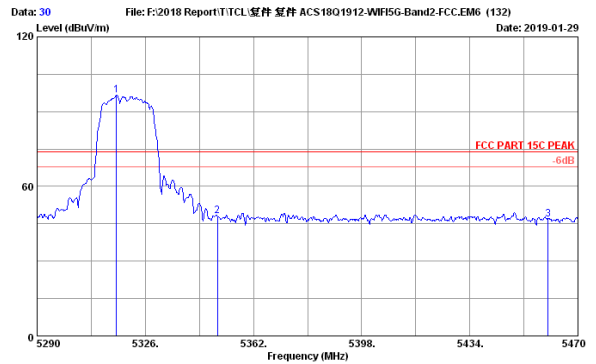

Site no. : 3m Chamber Data no. : 30  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5316.46	33.45	15.48	82.17	34.66	96.44	74.00	-22.44	Peak
2	5350.00	33.35	15.55	33.87	34.67	48.10	74.00	25.90	Peak
3	5460.00	33.05	15.76	32.73	34.69	46.85	74.00	27.15	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

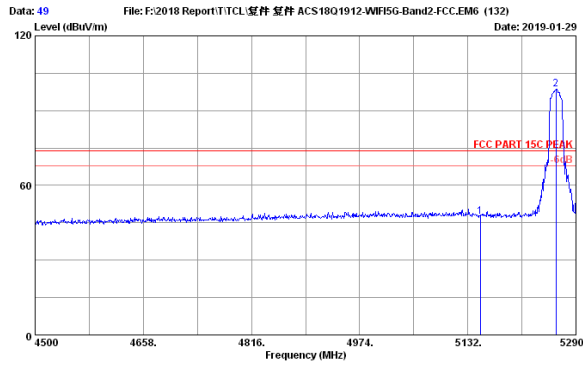

Site no. : 3m Chamber Data no. : 49  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	32.90	34.63	47.34	74.00	26.66	Peak
2	5260.77	33.60	15.37	84.27	34.65	98.59	74.00	-24.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

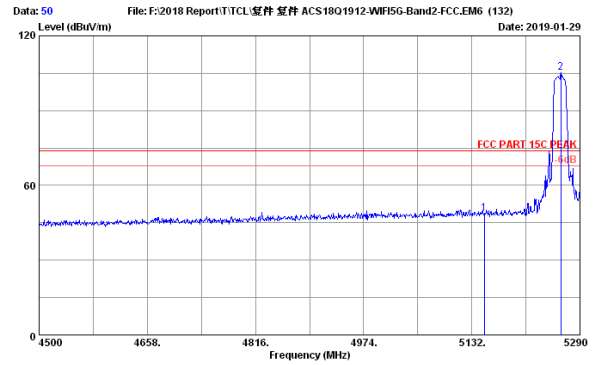

Site no. : 3m Chamber Data no. : 50  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	34.52	34.63	48.96	74.00	25.04	Peak
2	5262.35	33.60	15.37	90.93	34.65	105.25	74.00	-31.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

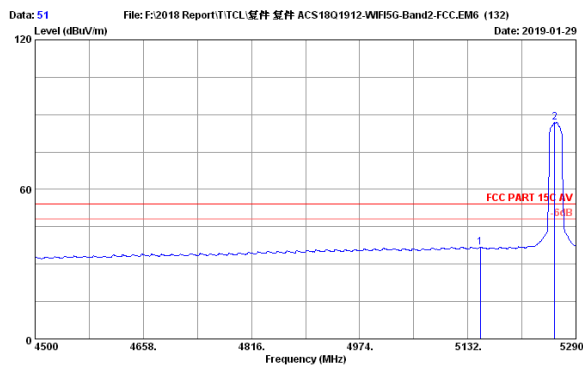

Site no. : 3m Chamber Data no. : 51  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	22.27	34.63	36.71	54.00	17.29	Average
2	5259.19	33.60	15.37	72.59	34.65	86.91	54.00	-32.91	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

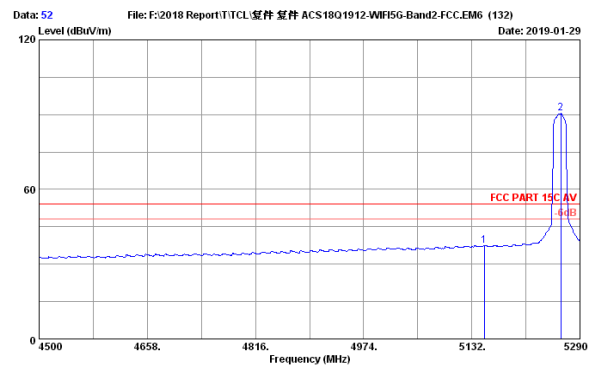

Site no. : 3m Chamber Data no. : 52  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	22.92	34.63	37.36	54.00	16.64	Average
2	5262.35	33.60	15.37	76.24	34.65	90.56	54.00	-36.56	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

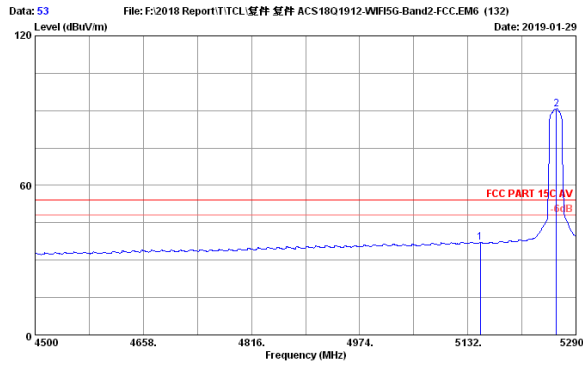

Site no. : 3m Chamber Data no. : 53  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	22.65	34.63	37.09	54.00	16.91	Average
2	5261.56	33.60	15.37	76.42	34.65	90.74	54.00	-36.74	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

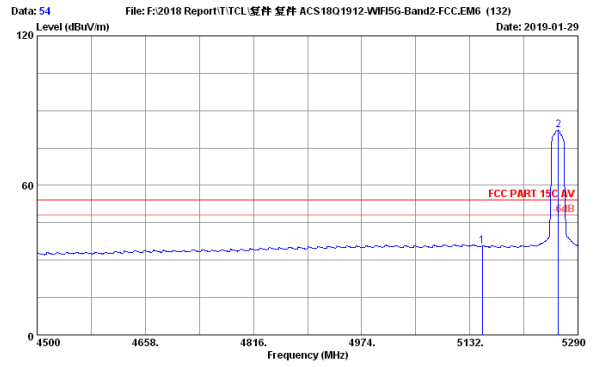

Site no. : 3m Chamber Data no. : 54  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	21.45	34.63	35.89	54.00	18.11	Average
2	5261.56	33.60	15.37	67.76	34.65	82.08	54.00	-28.08	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

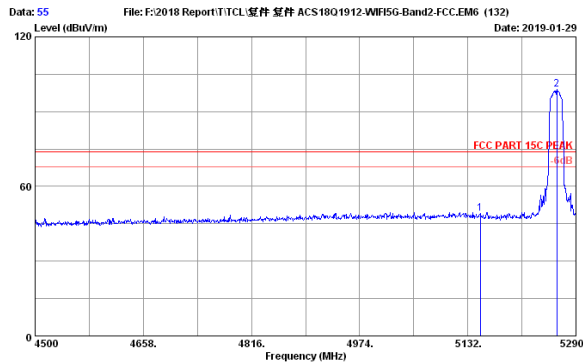

Site no. : 3m Chamber Data no. : 55  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	34.85	34.63	49.29	74.00	24.71	Peak
2	5262.35	33.60	15.37	84.51	34.65	98.83	74.00	-24.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

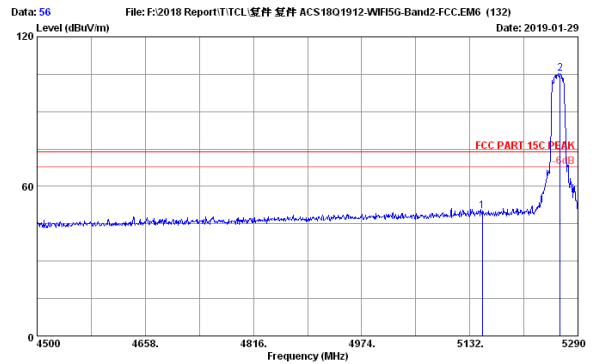

Site no. : 3m Chamber Data no. : 56  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5260MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	35.61	34.63	50.05	74.00	23.95	Peak
2	5263.93	33.60	15.37	90.97	34.65	105.29	74.00	-31.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

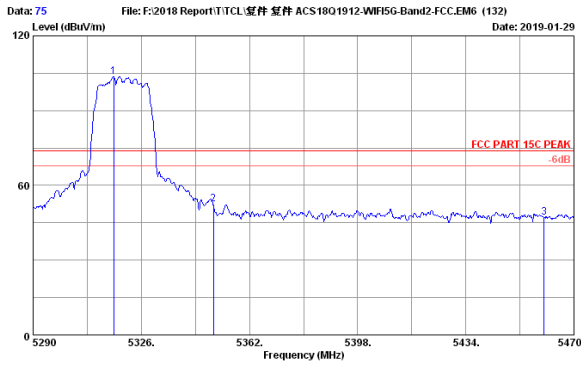

Site no. : 3m Chamber Data no. : 75  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.44	33.45	15.48	89.40	34.66	103.67	74.00	-29.67	Peak
2	5350.00	33.35	15.55	38.18	34.67	52.41	74.00	21.59	Peak
3	5460.00	33.05	15.76	33.06	34.69	47.18	74.00	26.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

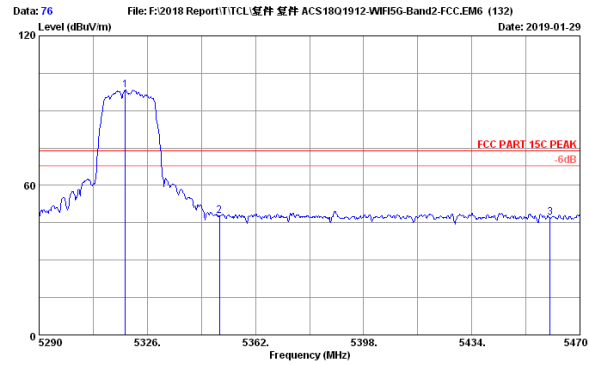

Site no. : 3m Chamber Data no. : 76  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.62	33.45	15.48	83.87	34.66	98.14	74.00	-24.14	Peak
2	5350.00	33.35	15.55	33.67	34.67	47.90	74.00	26.10	Peak
3	5460.00	33.05	15.76	32.97	34.69	47.09	74.00	26.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

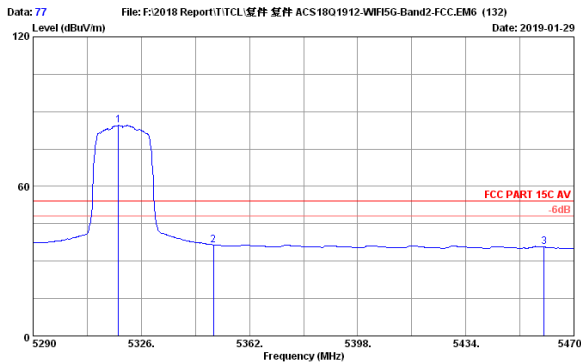

Site no. : 3m Chamber Data no. : 77  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.44	33.45	15.48	70.24	34.66	84.51	54.00	-30.51	Average
2	5350.00	33.35	15.55	22.32	34.67	36.55	54.00	17.45	Average
3	5460.00	33.05	15.76	21.57	34.69	35.69	54.00	18.31	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

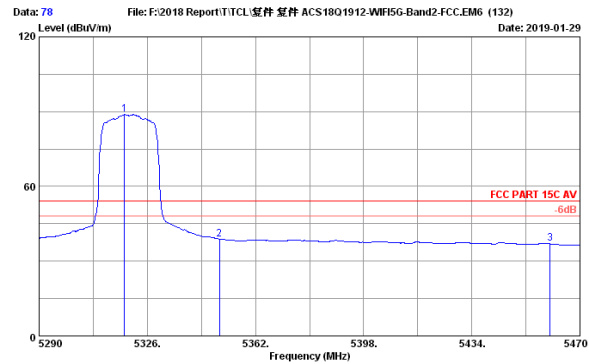


Site no. : 3m Chamber Data no. : 78  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5320MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5318.44	33.45	15.48	74.61	34.66	88.88	54.00	-34.88	Average
2	5350.00	33.35	15.55	24.67	34.67	38.90	54.00	15.10	Average
3	5460.00	33.05	15.76	22.86	34.69	36.98	54.00	17.02	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



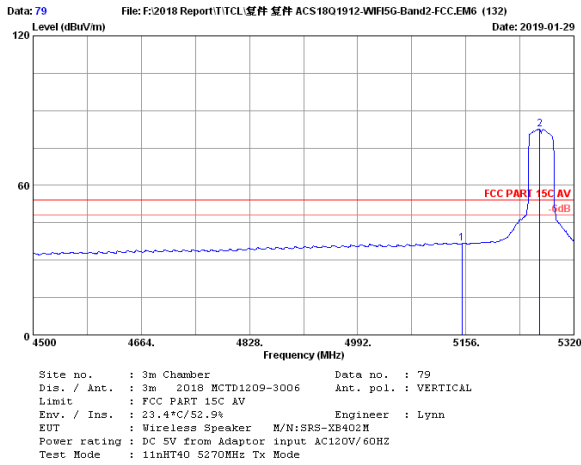


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	22.24	34.63	36.68	54.00	17.32	Average
2	5268.34	33.60	15.37	68.24	34.65	82.56	54.00	-28.56	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

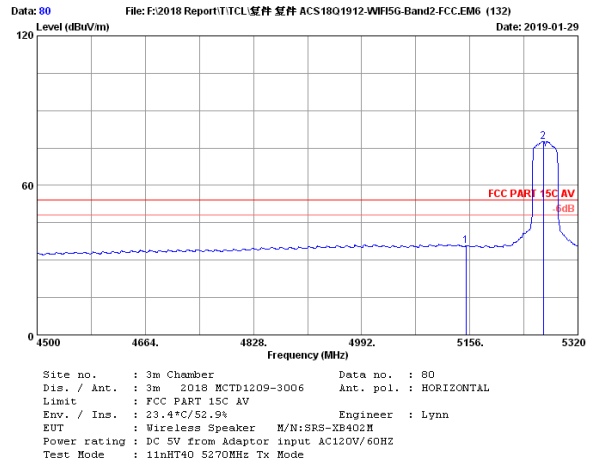


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	21.25	34.63	35.69	54.00	18.31	Average
2	5267.52	33.60	15.37	63.31	34.65	77.63	54.00	-23.63	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

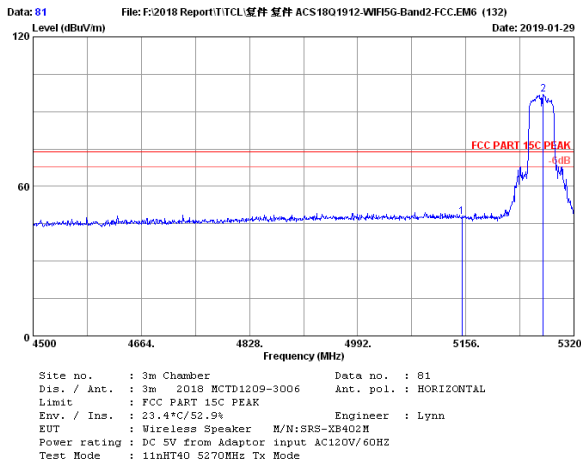


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	33.35	34.63	47.79	74.00	26.21	Peak
2	5273.26	33.60	15.37	82.56	34.66	96.87	74.00	-22.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

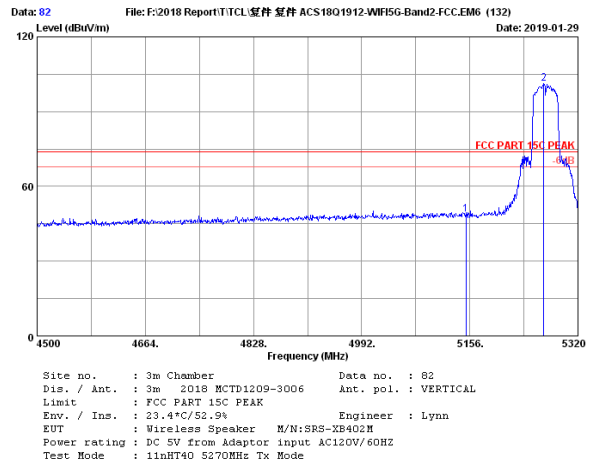

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	34.24	34.63	48.68	74.00	25.32	Peak
2	5268.34	33.60	15.37	86.84	34.65	101.16	74.00	-27.16	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

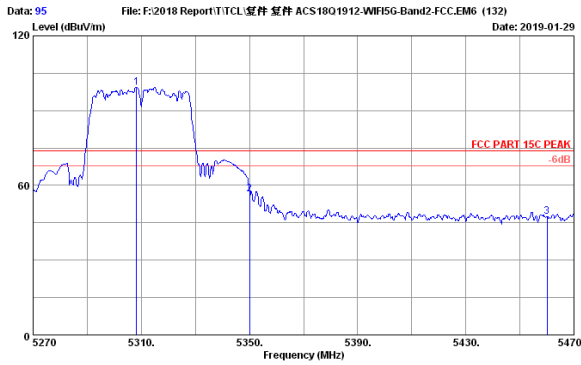

Site no. : 3m Chamber Data no. : 95  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5308.20	33.50	15.44	85.14	34.66	99.42	74.00	-25.42	Peak
2	5350.00	33.35	15.55	42.29	34.67	56.52	74.00	17.48	Peak
3	5460.00	33.05	15.76	33.41	34.69	47.53	74.00	26.47	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

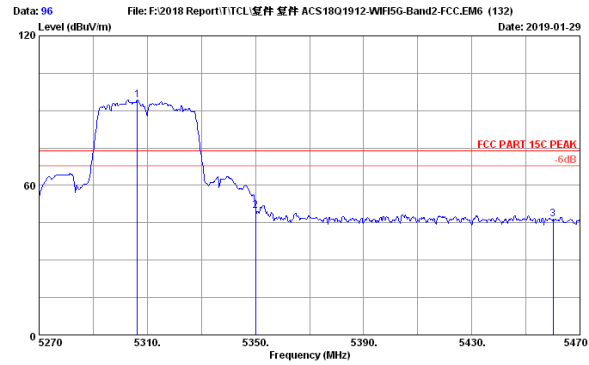

Site no. : 3m Chamber Data no. : 96  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5306.40	33.50	15.44	80.01	34.66	94.29	74.00	-20.29	Peak
2	5350.00	33.35	15.55	35.60	34.67	49.83	74.00	24.17	Peak
3	5460.00	33.05	15.76	32.32	34.69	46.44	74.00	27.56	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

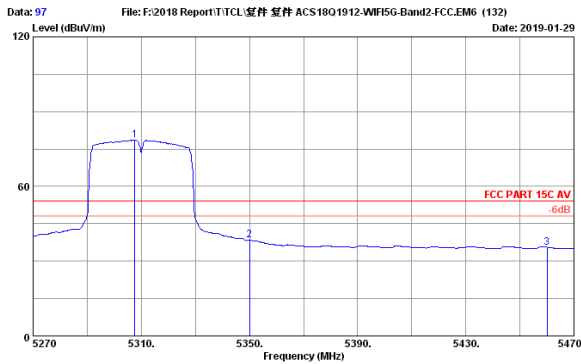

Site no. : 3m Chamber Data no. : 97  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5307.60	33.50	15.44	64.23	34.66	78.51	54.00	-24.51	Average
2	5350.00	33.35	15.55	24.26	34.67	38.49	54.00	15.51	Average
3	5460.00	33.05	15.76	21.48	34.69	35.60	54.00	18.40	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

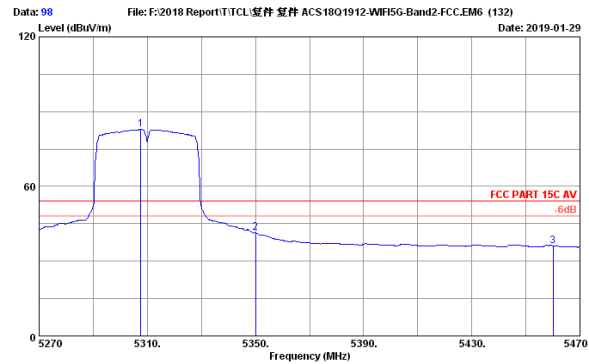

Site no. : 3m Chamber Data no. : 98  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5307.60	33.50	15.44	68.56	34.66	82.84	54.00	-28.84	Average
2	5350.00	33.35	15.55	27.19	34.67	41.42	54.00	12.58	Average
3	5460.00	33.05	15.76	22.08	34.69	36.20	54.00	17.80	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

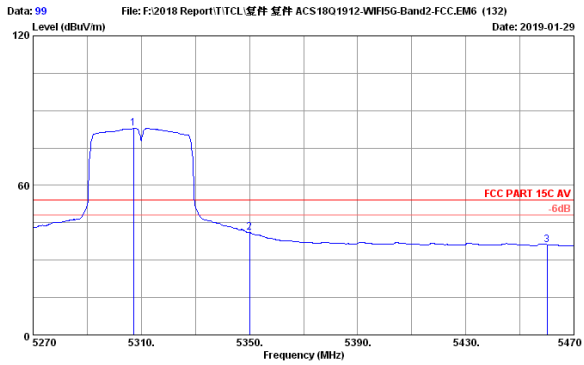

Site no. : 3m Chamber Data no. : 99  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5307.20	33.50	15.44	68.57	34.66	82.85	54.00	-28.85	Average
2	5350.00	33.35	15.55	26.99	34.67	41.22	54.00	12.78	Average
3	5460.00	33.05	15.76	22.14	34.69	36.26	54.00	17.74	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

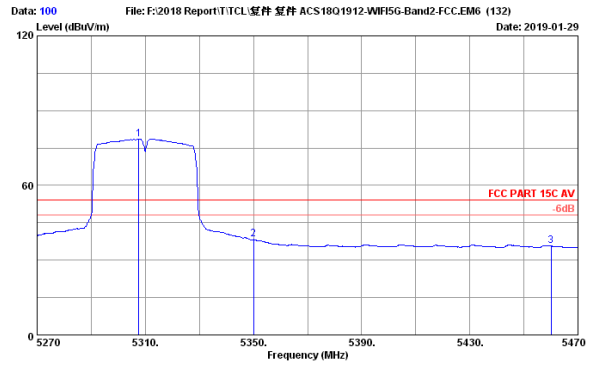

Site no. : 3m Chamber Data no. : 100  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5307.60	33.50	15.44	64.26	34.66	78.54	54.00	-24.54	Average
2	5350.00	33.35	15.55	24.07	34.67	38.30	54.00	15.70	Average
3	5460.00	33.05	15.76	21.54	34.69	35.66	54.00	18.34	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

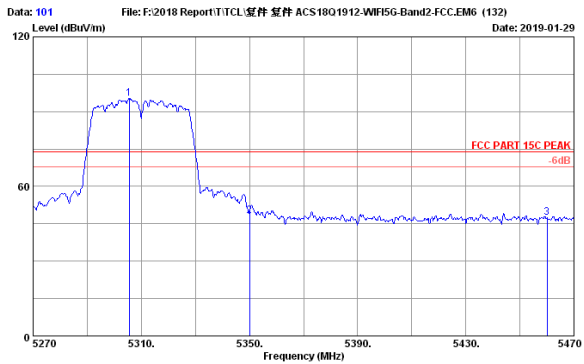

Site no. : 3m Chamber Data no. : 101  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5305.60	33.50	15.44	80.98	34.66	95.26	74.00	-21.26	Peak
2	5350.00	33.35	15.55	33.83	34.67	48.06	74.00	25.94	Peak
3	5460.00	33.05	15.76	33.42	34.69	47.54	74.00	26.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

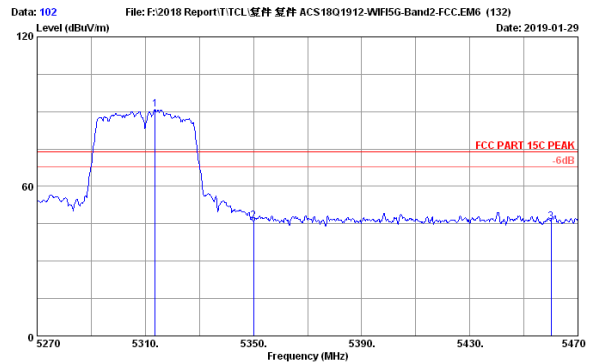

Site no. : 3m Chamber Data no. : 102  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5310MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5313.60	33.45	15.48	76.49	34.66	90.76	74.00	-16.76	Peak
2	5350.00	33.35	15.55	31.83	34.67	46.06	74.00	27.94	Peak
3	5460.00	33.05	15.76	31.84	34.69	45.96	74.00	28.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

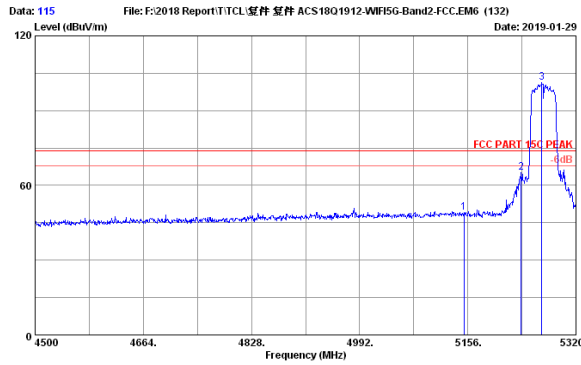

Site no. : 3m Chamber Data no. : 115  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5270MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	34.56	34.63	49.00	74.00	25.00	Peak
2	5237.18	33.70	15.30	50.74	34.65	65.09	74.00	8.91	Peak
3	5268.34	33.60	15.37	86.99	34.65	101.31	74.00	-27.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

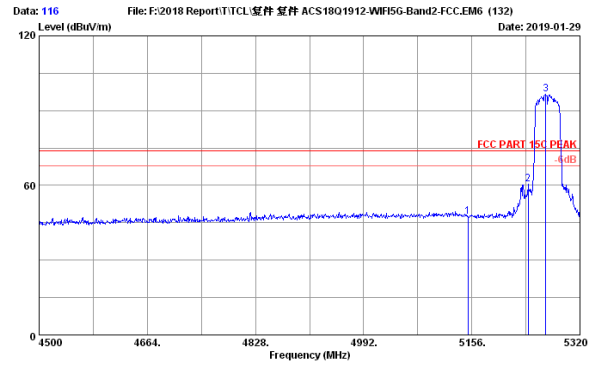

Site no. : 3m Chamber Data no. : 116  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5270MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	32.97	34.63	47.41	74.00	26.59	Peak
2	5241.28	33.70	15.30	46.25	34.65	60.60	74.00	13.40	Peak
3	5268.34	33.60	15.37	82.19	34.65	96.51	74.00	-22.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

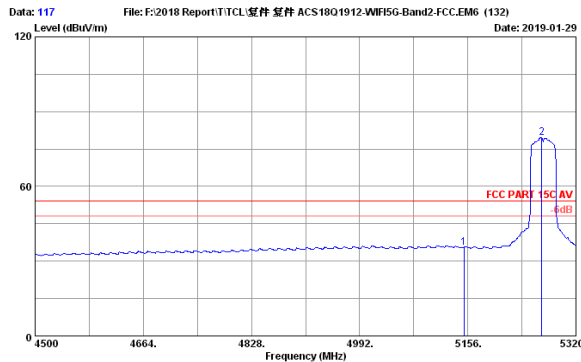

Site no. : 3m Chamber Data no. : 117  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5270MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	21.11	34.63	35.55	54.00	18.45	Average
2	5268.34	33.60	15.37	65.15	34.65	79.47	54.00	-25.47	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

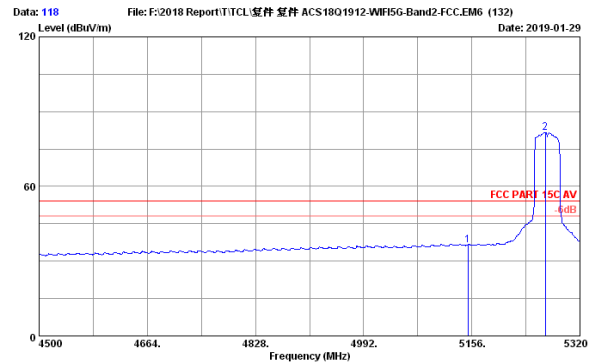

Site no. : 3m Chamber Data no. : 118  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5270MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	22.05	34.63	36.49	54.00	17.51	Average
2	5267.52	33.60	15.37	67.31	34.65	81.63	54.00	-27.63	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

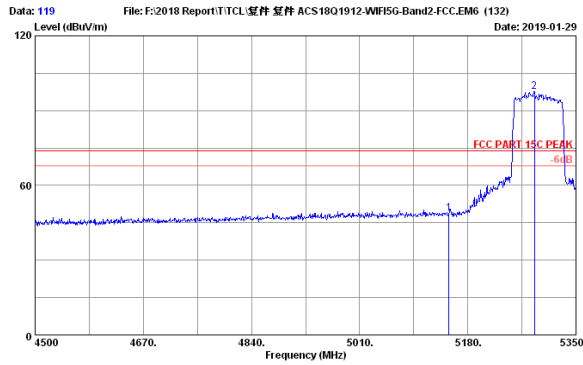

Site no. : 3m Chamber Data no. : 119  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5290MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	34.48	34.63	48.92	74.00	25.08	Peak
2	5284.55	33.55	15.41	83.36	34.66	97.66	74.00	-23.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

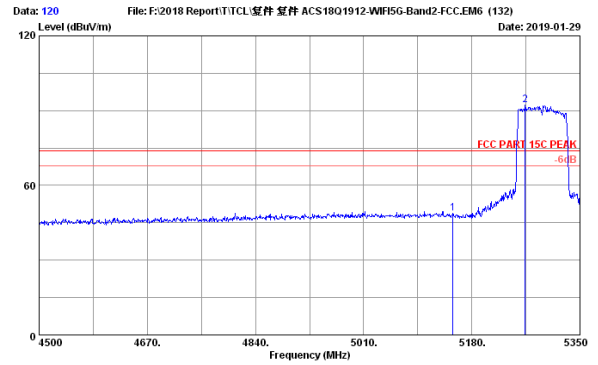

Site no. : 3m Chamber Data no. : 120  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5290MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	34.42	34.63	48.66	74.00	25.14	Peak
2	5264.15	33.60	15.37	77.85	34.65	92.17	74.00	-18.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

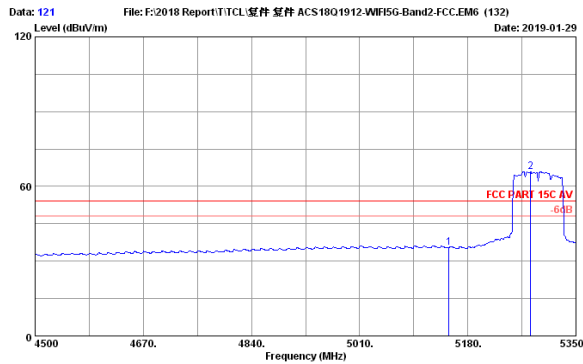

Site no. : 3m Chamber Data no. : 121  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5290MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	20.87	34.63	35.31	54.00	18.69	Average
2	5278.60	33.55	15.41	51.59	34.66	65.89	54.00	-11.89	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

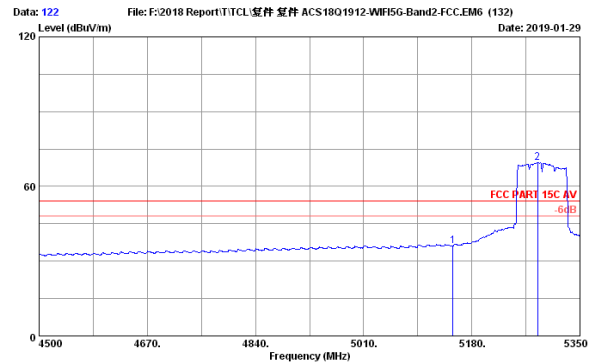

Site no. : 3m Chamber Data no. : 122  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5290MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5150.00	33.95	15.12	21.77	34.63	36.21	54.00	17.79	Average
2	5283.70	33.55	15.41	55.17	34.66	69.47	54.00	-15.47	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

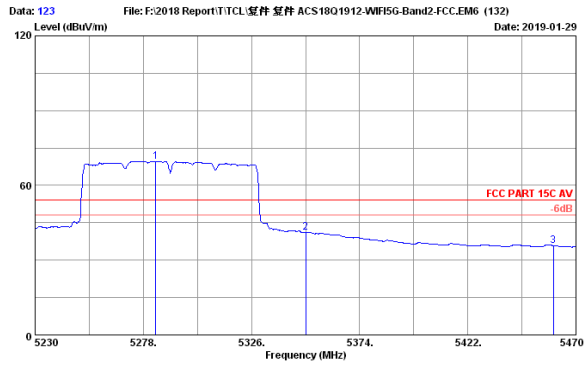

Site no. : 3m Chamber Data no. : 123  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5290MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5283.52	33.55	15.41	55.38	34.66	69.68	54.00	-15.68	Average
2	5350.00	33.35	15.55	26.96	34.67	41.19	54.00	12.81	Average
3	5460.00	33.05	15.76	21.71	34.69	35.83	54.00	18.17	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

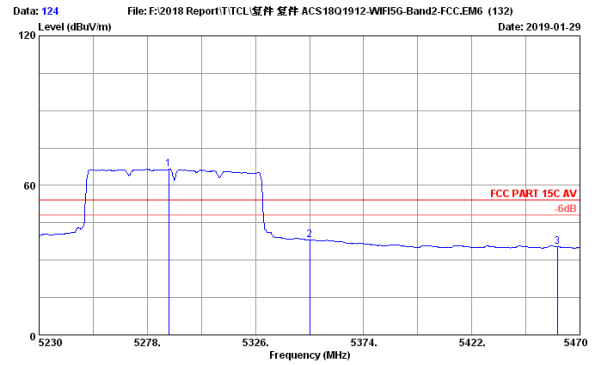

Site no. : 3m Chamber Data no. : 124  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5290MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5287.60	33.55	15.41	52.25	34.66	66.55	54.00	-12.55	Average
2	5350.00	33.35	15.55	23.93	34.67	38.16	54.00	15.84	Average
3	5460.00	33.05	15.76	21.38	34.69	35.50	54.00	18.50	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

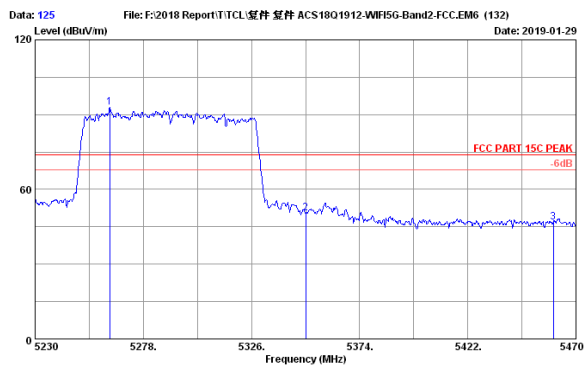

Site no. : 3m Chamber Data no. : 125  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5290MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5263.12	33.60	15.37	76.45	34.65	92.77	74.00	-18.77	Peak
2	5350.00	33.35	15.55	36.32	34.67	50.55	74.00	23.45	Peak
3	5460.00	33.05	15.76	32.77	34.69	46.89	74.00	27.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

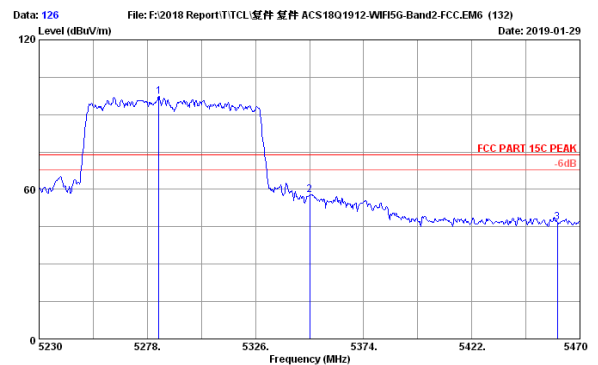


Site no. : 3m Chamber Data no. : 126  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5290MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5283.04	33.55	15.41	82.88	34.66	97.18	74.00	-23.18	Peak
2	5350.00	33.35	15.55	43.63	34.67	57.86	74.00	16.14	Peak
3	5460.00	33.05	15.76	32.83	34.69	46.95	74.00	27.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

5500-5700MHz Band:

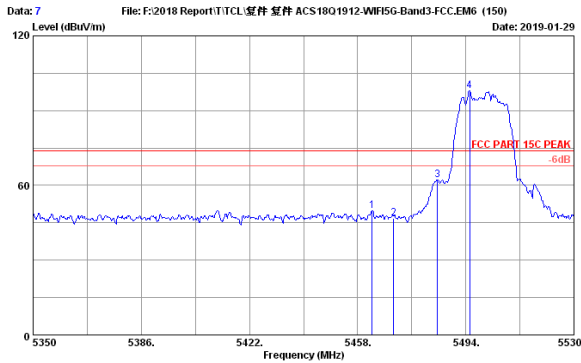


File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band3-FCC.EM6 (150)  
Date: 2019-01-29

Site no. : 3m Chamber Data no. : 7  
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
EUT : Wireless Speaker M/N:SPS-XB402M  
Power rating : DC 5V from Adaptor input AC120V/60HZ  
Test Mode : 11a 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5462.86	33.00	15.80	35.83	34.69	49.94	74.00	24.06	Peak
2	5470.00	33.00	15.80	32.81	34.69	46.92	74.00	27.08	Peak
3	5484.64	32.95	15.83	45.12	34.70	62.20	74.00	11.80	Peak
4	5495.26	32.95	15.83	83.90	34.70	97.98	74.00	-23.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
2. The emission levels that are 20dB below the official limit are not reported.

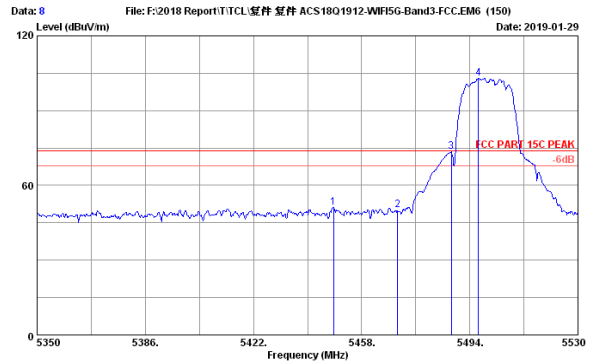


File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band3-FCC.EM6 (150)  
Date: 2019-01-29

Site no. : 3m Chamber Data no. : 8  
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
EUT : Wireless Speaker M/N:SPS-XB402M  
Power rating : DC 5V from Adaptor input AC120V/60HZ  
Test Mode : 11a 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5448.64	33.05	15.76	37.19	34.69	51.31	74.00	22.69	Peak
2	5470.00	33.00	15.80	35.97	34.69	50.08	74.00	23.92	Peak
3	5487.88	32.95	15.83	59.34	34.70	79.42	74.00	0.58	Peak
4	5496.88	32.90	15.87	88.98	34.70	103.05	74.00	-29.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
2. The emission levels that are 20dB below the official limit are not reported.

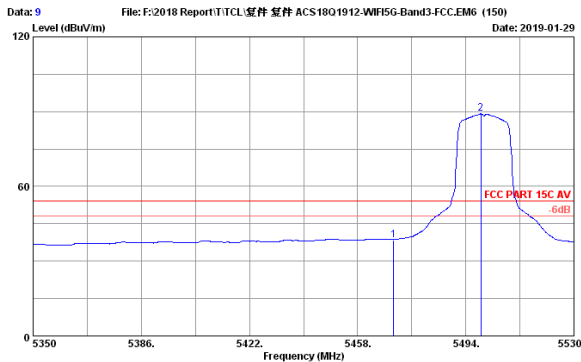


File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band3-FCC.EM6 (150)  
Date: 2019-01-29

Site no. : 3m Chamber Data no. : 9  
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
EUT : Wireless Speaker M/N:SPS-XB402M  
Power rating : DC 5V from Adaptor input AC120V/60HZ  
Test Mode : 11a 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	24.45	34.69	38.56	54.00	15.44	Average
2	5499.04	32.90	15.87	75.07	34.70	89.14	54.00	-35.14	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
2. The emission levels that are 20dB below the official limit are not reported.


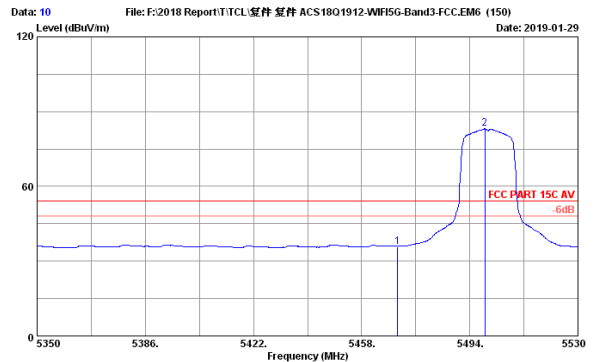


File: F:\2018 Report\TTC\附件 附件 ACS1801912-WIFI5G-Band3-FCC.EM6 (150)  
Date: 2019-01-29

Site no. : 3m Chamber Data no. : 10  
Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV  
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
EUT : Wireless Speaker M/N:SPS-XB402M  
Power rating : DC 5V from Adaptor input AC120V/60HZ  
Test Mode : 11a 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	21.65	34.69	35.76	54.00	18.24	Average
2	5499.04	32.90	15.87	69.05	34.70	83.12	54.00	-29.12	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
2. The emission levels that are 20dB below the official limit are not reported.

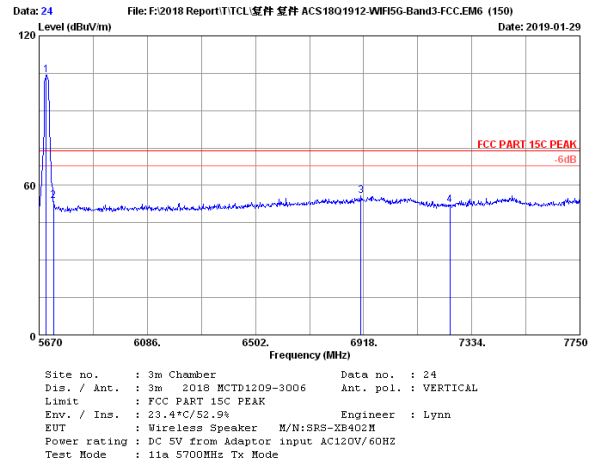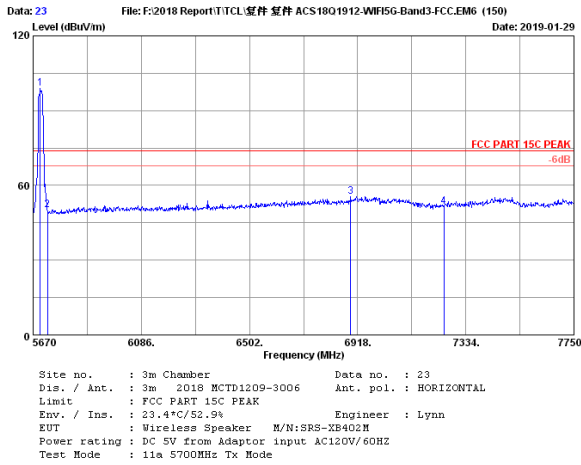


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5697.04	33.17	16.26	84.14	34.62	98.95	74.00	-24.95	Peak
2	5725.00	33.21	16.33	35.31	34.61	50.24	74.00	23.76	Peak
3	6890.96	35.65	18.34	36.01	34.41	55.59	74.00	18.41	Peak
4	7250.00	36.06	18.70	31.27	34.48	51.55	74.00	22.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5697.04	33.17	16.26	89.62	34.62	104.43	74.00	-30.43	Peak
2	5725.00	33.21	16.33	38.82	34.61	53.75	74.00	20.25	Peak
3	6907.60	35.69	18.36	36.28	34.41	55.92	74.00	18.08	Peak
4	7250.00	36.06	18.70	31.93	34.48	52.21	74.00	21.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

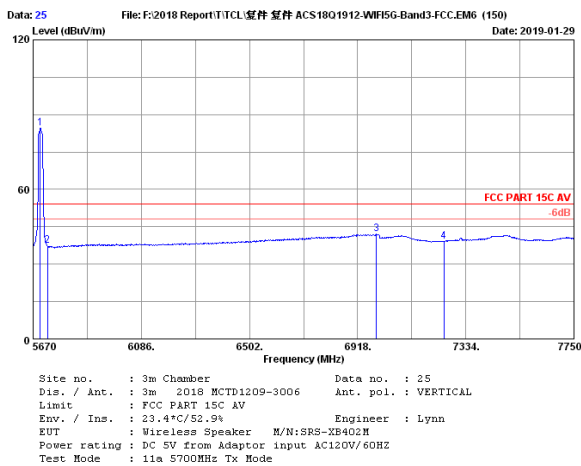

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5697.04	33.17	16.26	69.63	34.62	84.44	54.00	-30.44	Average
2	5725.00	33.21	16.33	22.35	34.61	37.28	54.00	16.72	Average
3	6890.80	35.86	18.47	22.10	34.40	42.03	54.00	11.97	Average
4	7250.00	36.06	18.70	18.93	34.48	39.21	54.00	14.79	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

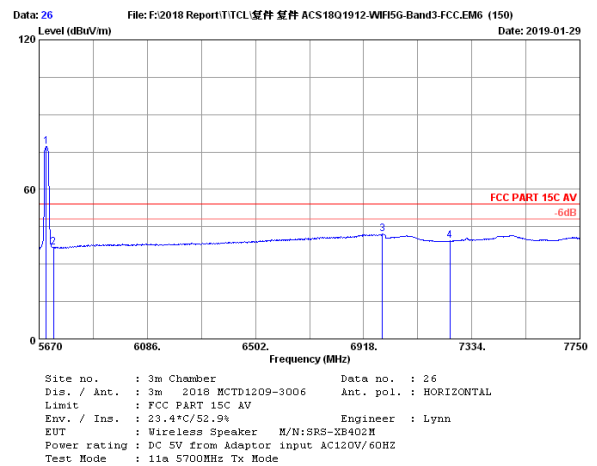

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5697.04	33.17	16.26	62.54	34.62	77.35	54.00	-23.35	Average
2	5725.00	33.21	16.33	21.71	34.61	36.64	54.00	17.36	Average
3	6890.80	35.86	18.47	22.14	34.40	42.07	54.00	11.93	Average
4	7250.00	36.06	18.70	19.01	34.48	39.29	54.00	14.71	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.




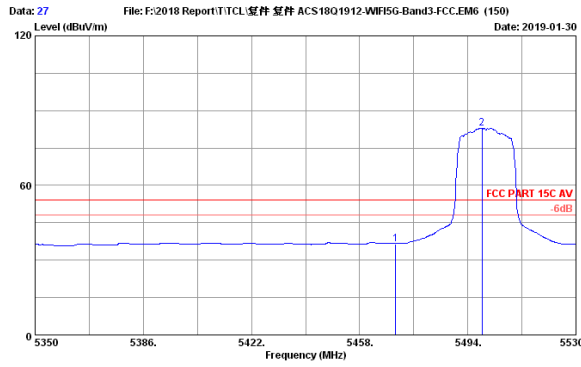

Site no. : 3m Chamber Data no. : 27  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11n20 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	22.37	34.69	36.48	54.00	17.52	Average
2	5498.68	32.90	15.87	68.96	34.70	83.03	54.00	-29.03	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

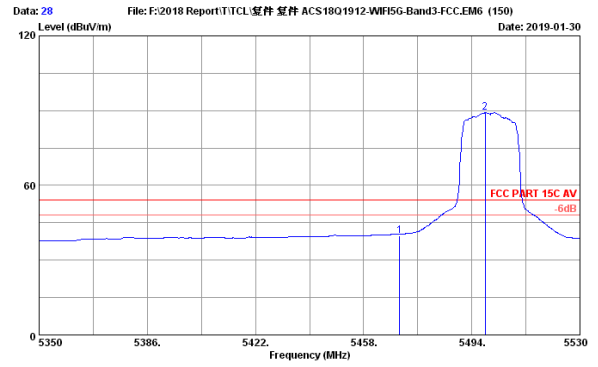

Site no. : 3m Chamber Data no. : 28  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11n20 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	25.83	34.69	39.94	54.00	14.06	Average
2	5498.50	32.90	15.87	75.19	34.70	89.26	54.00	-35.26	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

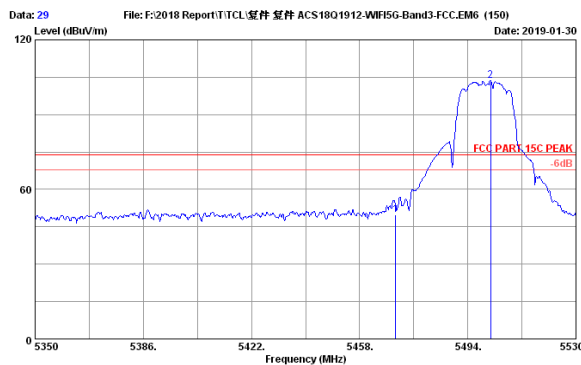

Site no. : 3m Chamber Data no. : 29  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11n20 5500MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	35.73	34.69	49.84	74.00	24.16	Peak
2	5501.56	32.90	15.87	89.58	34.69	103.66	74.00	-29.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

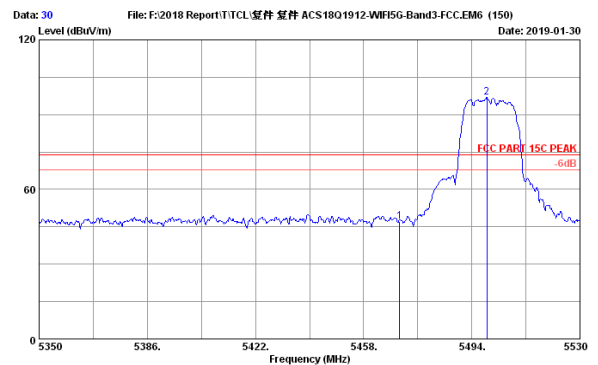

Site no. : 3m Chamber Data no. : 30  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11n20 5500MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	33.02	34.69	47.13	74.00	26.87	Peak
2	5499.04	32.90	15.87	82.81	34.70	96.88	74.00	-22.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

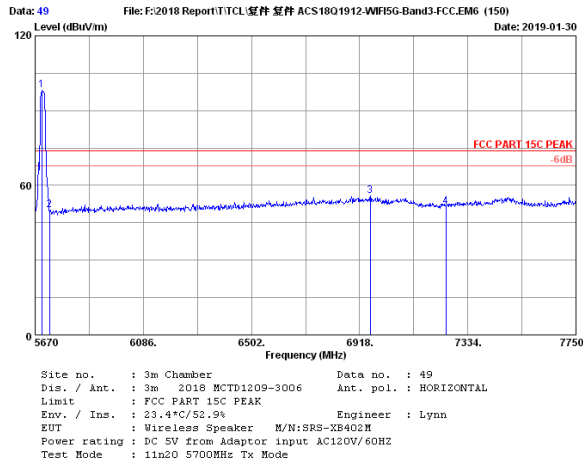


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5694.96	33.17	16.26	83.52	34.62	98.33	74.00	-24.33	Peak
2	5725.00	33.21	16.33	35.07	34.61	50.00	74.00	24.00	Peak
3	6990.80	35.86	18.45	35.91	34.40	55.78	74.00	18.22	Peak
4	7250.00	36.06	18.70	31.36	34.48	51.64	74.00	22.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

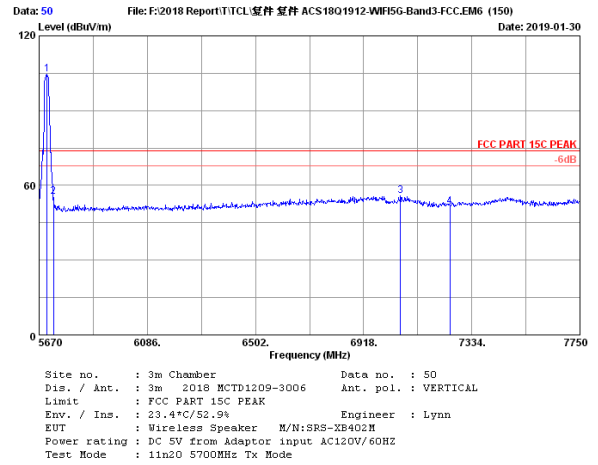


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5701.20	33.19	16.29	89.71	34.62	104.57	74.00	-30.57	Peak
2	5725.00	33.21	16.33	40.65	34.61	55.58	74.00	18.42	Peak
3	7059.44	35.93	18.54	35.80	34.42	55.85	74.00	18.15	Peak
4	7250.00	36.06	18.70	31.35	34.48	51.63	74.00	22.37	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

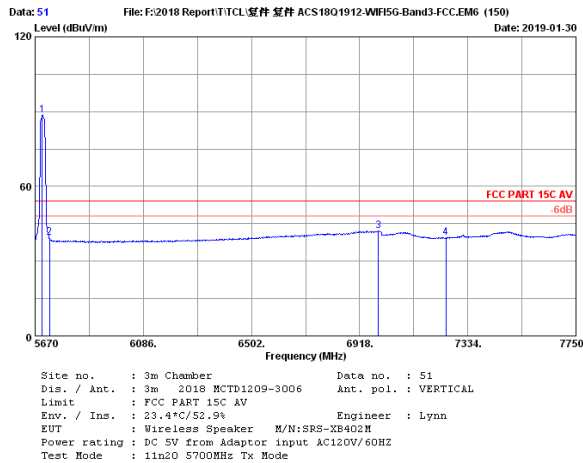


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5697.04	33.17	16.26	73.68	34.62	88.49	54.00	-34.49	Average
2	5725.00	33.21	16.33	24.40	34.61	39.33	54.00	14.67	Average
3	6990.80	35.86	18.47	22.21	34.40	42.14	54.00	11.86	Average
4	7250.00	36.06	18.70	19.02	34.48	39.30	54.00	14.70	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

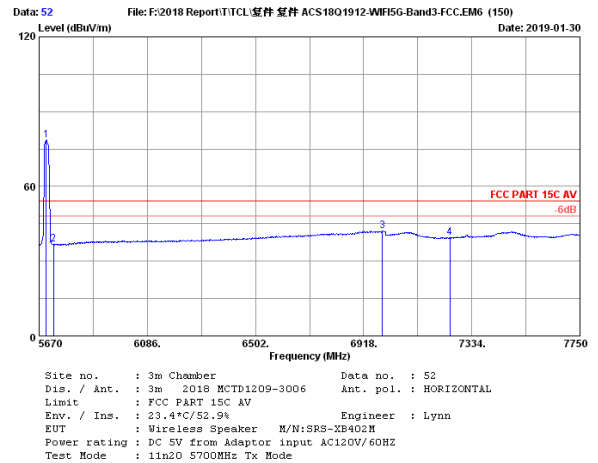

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5697.04	33.17	16.26	63.85	34.62	78.66	54.00	-24.66	Average
2	5725.00	33.21	16.33	21.72	34.61	36.65	54.00	17.35	Average
3	6990.80	35.86	18.47	22.19	34.40	42.12	54.00	11.88	Average
4	7250.00	36.06	18.70	19.10	34.48	39.38	54.00	14.62	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

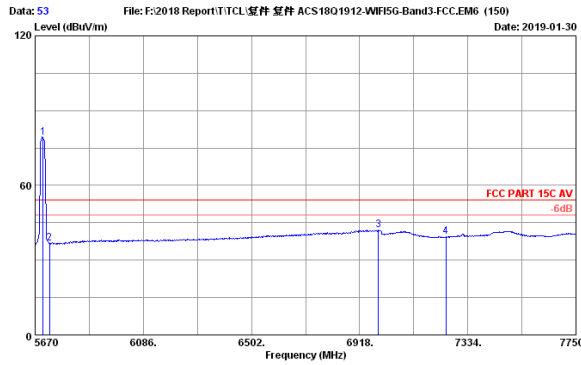

Site no. : 3m Chamber Data no. : 53  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11ac20 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5701.20	33.19	16.29	64.47	34.62	79.33	54.00	-25.33	Average
2	5725.00	33.21	16.33	21.96	34.61	36.89	54.00	17.11	Average
3	6990.80	35.86	18.47	22.09	34.40	42.02	54.00	11.98	Average
4	7250.00	36.06	18.70	19.06	34.48	39.34	54.00	14.66	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

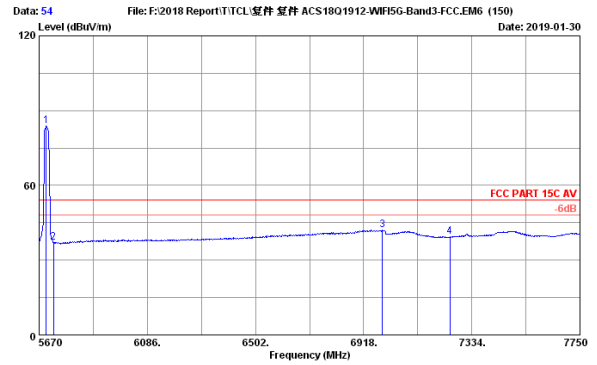

Site no. : 3m Chamber Data no. : 54  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11ac20 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5697.04	33.17	16.26	69.05	34.62	83.86	54.00	-29.86	Average
2	5725.00	33.21	16.33	22.33	34.61	37.26	54.00	16.74	Average
3	6990.80	35.86	18.47	22.14	34.40	42.07	54.00	11.93	Average
4	7250.00	36.06	18.70	19.07	34.48	39.35	54.00	14.65	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

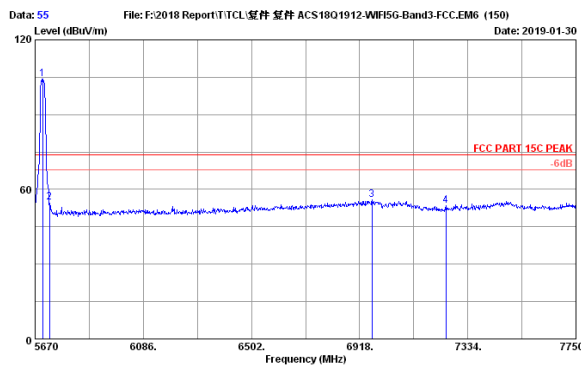

Site no. : 3m Chamber Data no. : 55  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11ac20 5700MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5699.12	33.17	16.26	89.55	34.62	104.36	74.00	-30.36	Peak
2	5725.00	33.21	16.33	40.02	34.61	54.95	74.00	19.05	Peak
3	6989.84	35.82	18.45	35.81	34.40	55.68	74.00	18.32	Peak
4	7250.00	36.06	18.70	33.11	34.48	53.39	74.00	20.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

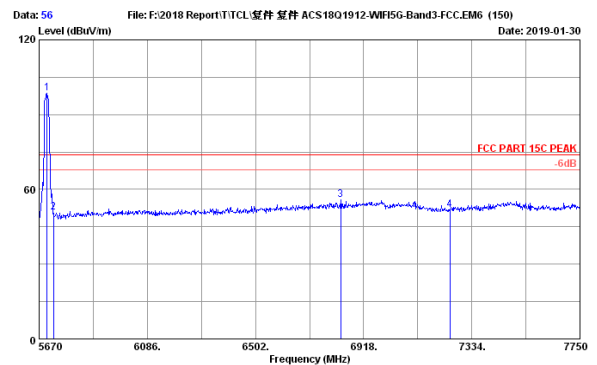

Site no. : 3m Chamber Data no. : 56  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11ac20 5700MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5701.20	33.19	16.29	83.61	34.62	98.47	74.00	-24.47	Peak
2	5725.00	33.21	16.33	35.75	34.61	50.68	74.00	23.32	Peak
3	6989.84	35.49	18.23	36.43	34.42	55.73	74.00	18.27	Peak
4	7250.00	36.06	18.70	31.53	34.48	51.81	74.00	22.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

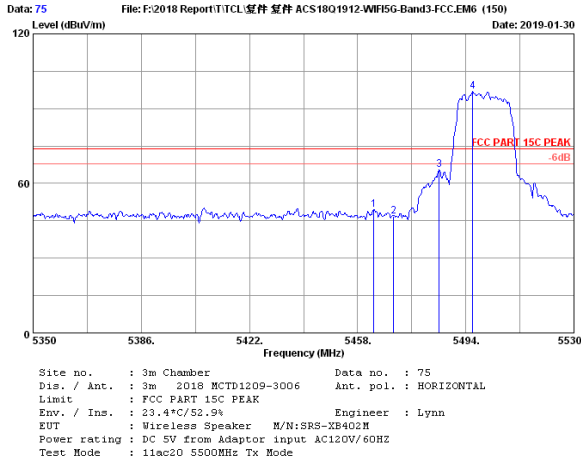


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5463.40	33.00	15.80	35.36	34.69	49.47	74.00	24.53	Peak
2	5470.00	33.00	15.80	32.80	34.69	46.91	74.00	27.09	Peak
3	5485.18	32.95	15.83	51.33	34.70	65.41	74.00	8.59	Peak
4	5496.34	32.95	15.83	62.70	34.70	96.78	74.00	-22.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

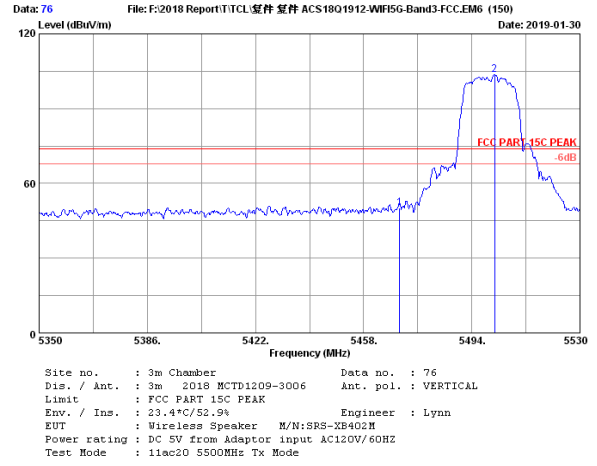


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	35.95	34.69	50.06	74.00	23.94	Peak
2	5501.56	32.90	15.87	89.45	34.69	103.53	74.00	-29.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

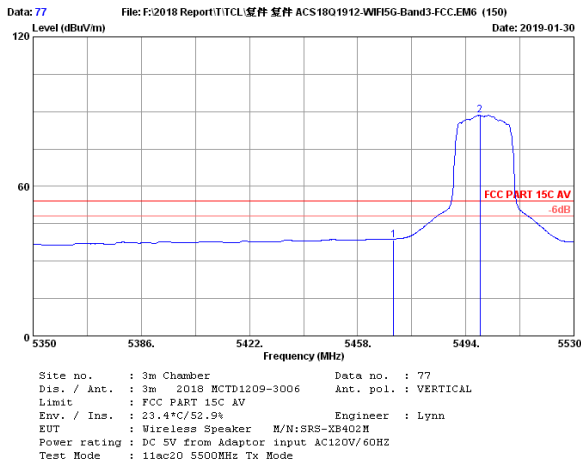


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	24.26	34.69	38.37	54.00	15.63	Average
2	5498.68	32.90	15.87	74.52	34.70	88.59	54.00	-34.59	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

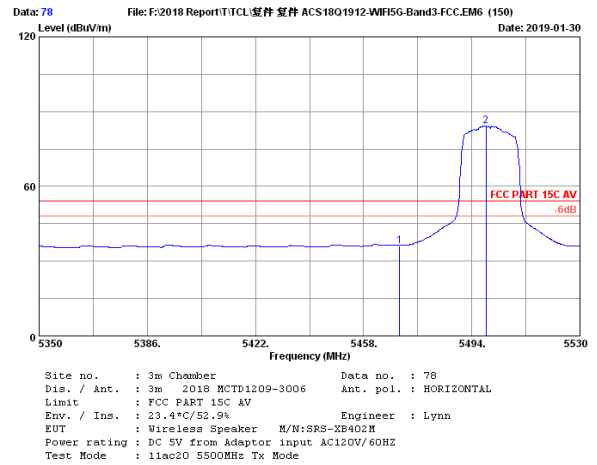

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	21.88	34.69	35.99	54.00	18.01	Average
2	5498.68	32.90	15.87	70.26	34.70	84.33	54.00	-30.33	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

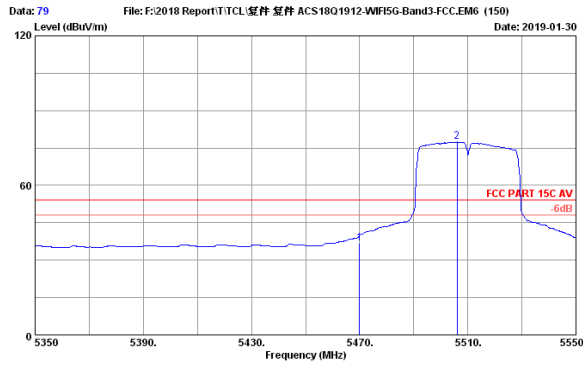

Site no. : 3m Chamber Data no. : 79  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11n40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	22.79	34.69	36.90	54.00	17.10	Average
2	5506.00	32.90	15.87	63.32	34.69	77.40	54.00	-23.40	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

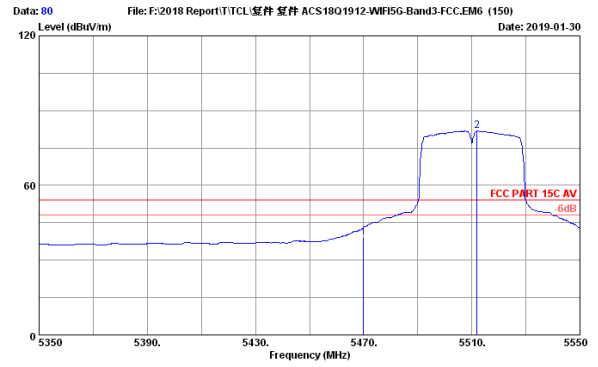

Site no. : 3m Chamber Data no. : 80  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11n40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	24.86	34.69	38.97	54.00	15.03	Average
2	5512.00	32.90	15.87	67.74	34.69	81.82	54.00	-27.82	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

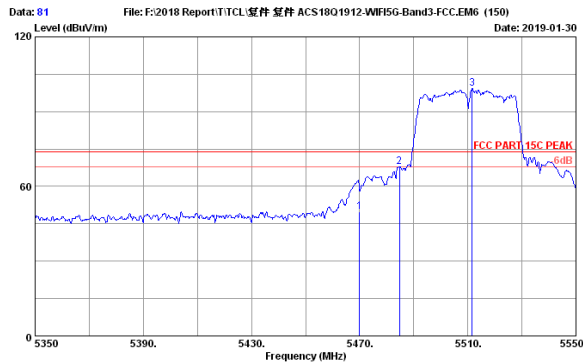

Site no. : 3m Chamber Data no. : 81  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11n40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	35.74	34.69	49.85	74.00	24.15	Peak
2	5484.80	32.95	15.83	53.77	34.70	67.85	74.00	6.15	Peak
3	5511.60	32.90	15.87	85.09	34.69	99.17	74.00	-25.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

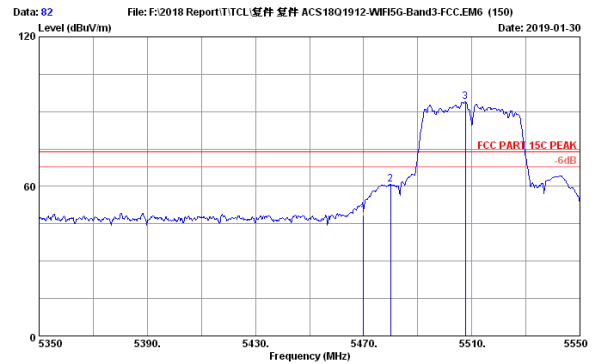

Site no. : 3m Chamber Data no. : 82  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11n40 5510MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	34.48	34.69	48.59	74.00	25.41	Peak
2	5480.00	32.95	15.83	46.63	34.70	60.71	74.00	13.29	Peak
3	5507.60	32.90	15.87	79.79	34.69	93.87	74.00	-19.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

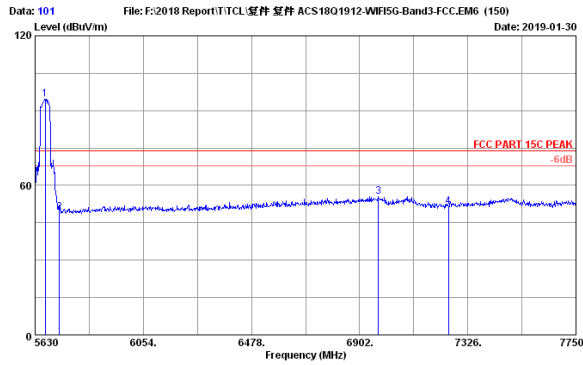

Site no. : 3m Chamber Data no. : 101  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11n40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5670.28	33.14	16.22	75.96	34.63	94.69	74.00	-20.69	Peak
2	5725.00	33.21	16.33	34.15	34.61	49.08	74.00	24.92	Peak
3	6976.20	35.86	18.47	35.69	34.40	55.62	74.00	18.38	Peak
4	7250.00	36.06	18.70	31.25	34.48	51.53	74.00	22.47	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

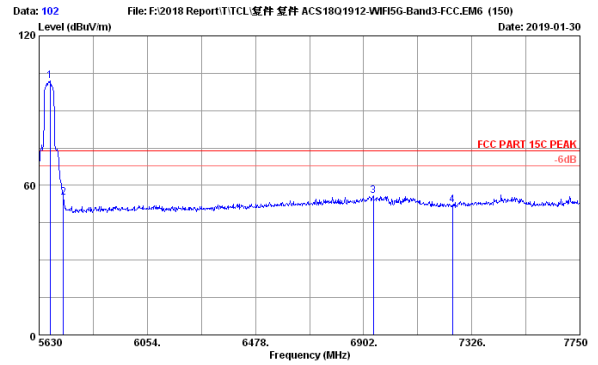

Site no. : 3m Chamber Data no. : 102  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11n40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5672.40	33.14	16.22	87.13	34.63	101.86	74.00	-27.86	Peak
2	5725.00	33.21	16.33	40.36	34.61	55.29	74.00	18.71	Peak
3	6990.16	35.73	18.39	36.09	34.41	55.80	74.00	18.20	Peak
4	7250.00	36.06	18.70	31.92	34.48	52.20	74.00	21.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

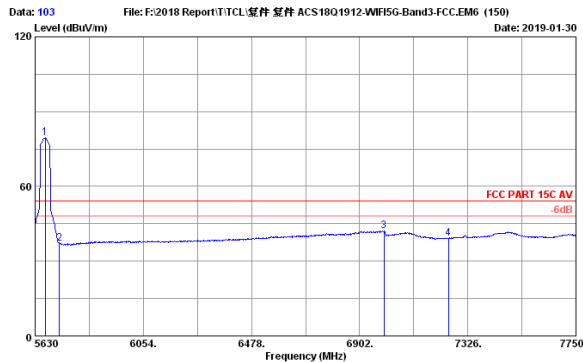

Site no. : 3m Chamber Data no. : 103  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11n40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5670.28	33.14	16.22	64.66	34.63	79.39	54.00	-25.39	Average
2	5725.00	33.21	16.33	22.14	34.61	37.07	54.00	16.93	Average
3	6997.40	35.90	18.50	22.16	34.40	42.16	54.00	11.84	Average
4	7250.00	36.06	18.70	18.91	34.48	39.19	54.00	14.81	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

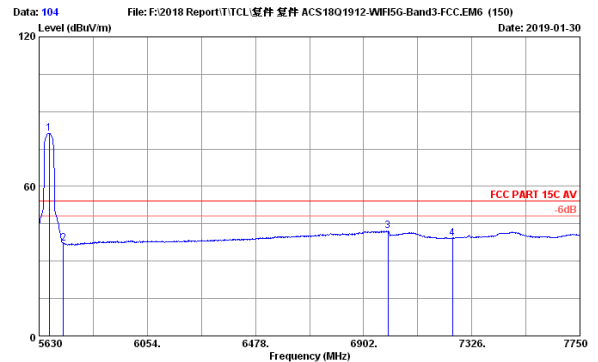

Site no. : 3m Chamber Data no. : 104  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11n40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5670.28	33.14	16.22	66.66	34.63	81.39	54.00	-27.39	Average
2	5725.00	33.21	16.33	22.14	34.61	37.07	54.00	16.93	Average
3	6997.40	35.90	18.50	22.14	34.40	42.14	54.00	11.86	Average
4	7250.00	36.06	18.70	18.94	34.48	39.22	54.00	14.78	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

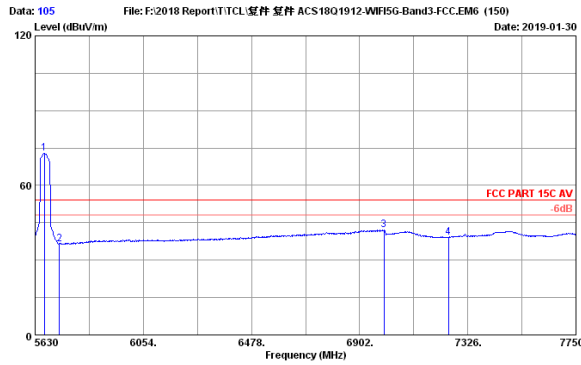

Site no. : 3m Chamber Data no. : 105  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11ac40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5666.04	33.12	16.19	58.21	34.63	72.89	54.00	-18.89	Average
2	5725.00	33.21	16.33	21.66	34.61	36.59	54.00	17.41	Average
3	6997.40	35.90	18.50	22.14	34.40	42.14	54.00	11.86	Average
4	7250.00	36.06	18.70	18.91	34.48	39.19	54.00	14.81	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

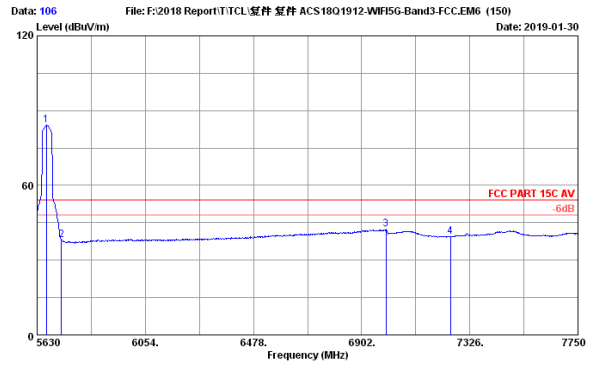

Site no. : 3m Chamber Data no. : 106  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11ac40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5666.04	33.12	16.19	69.41	34.63	84.09	54.00	-30.09	Average
2	5725.00	33.21	16.33	23.05	34.61	37.98	54.00	16.02	Average
3	6997.40	35.90	18.50	22.31	34.40	42.31	54.00	11.69	Average
4	7250.00	36.06	18.70	19.14	34.48	39.42	54.00	14.58	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

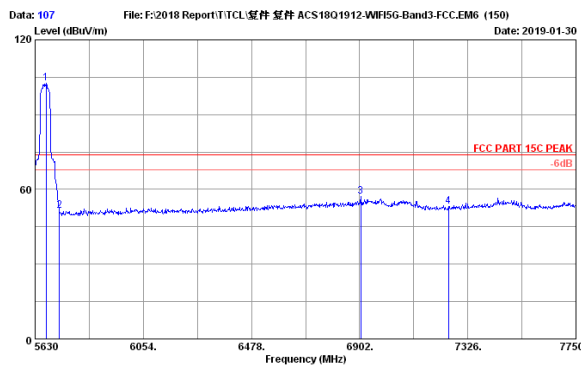

Site no. : 3m Chamber Data no. : 107  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11ac40 5670MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5672.40	33.14	16.22	87.85	34.63	102.58	74.00	-28.58	Peak
2	5725.00	33.21	16.33	36.38	34.61	51.31	74.00	22.69	Peak
3	6906.24	35.65	18.34	37.63	34.41	57.21	74.00	16.79	Peak
4	7250.00	36.06	18.70	32.87	34.48	53.15	74.00	20.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

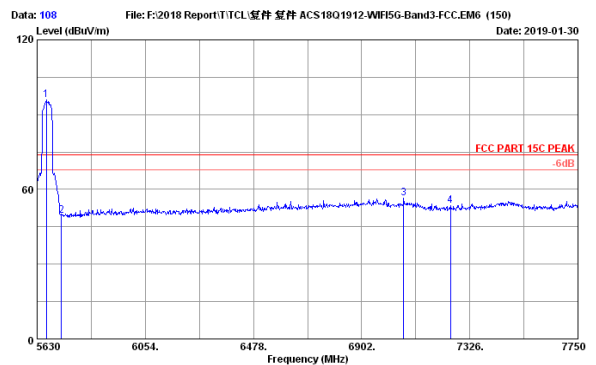

Site no. : 3m Chamber Data no. : 108  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11ac40 5670MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5666.04	33.12	16.19	81.29	34.63	95.97	74.00	-21.97	Peak
2	5725.00	33.21	16.33	34.69	34.61	49.62	74.00	24.38	Peak
3	7067.36	35.94	18.55	36.44	34.42	56.51	74.00	17.49	Peak
4	7250.00	36.06	18.70	33.35	34.48	53.63	74.00	20.37	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

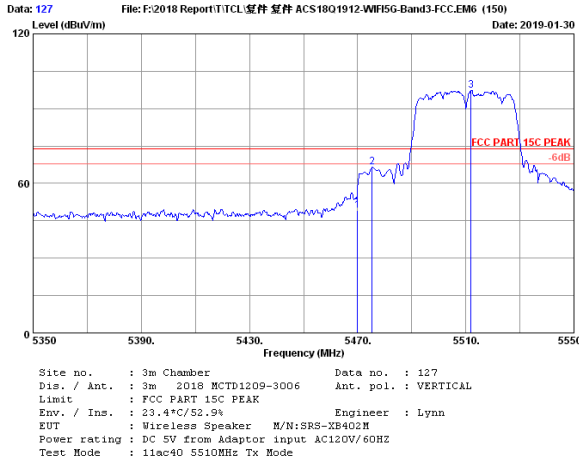


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	35.02	34.69	49.13	74.00	24.87	Peak
2	5475.40	33.00	15.80	52.31	34.70	66.41	74.00	7.59	Peak
3	5512.00	32.90	15.87	83.35	34.69	97.43	74.00	-23.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

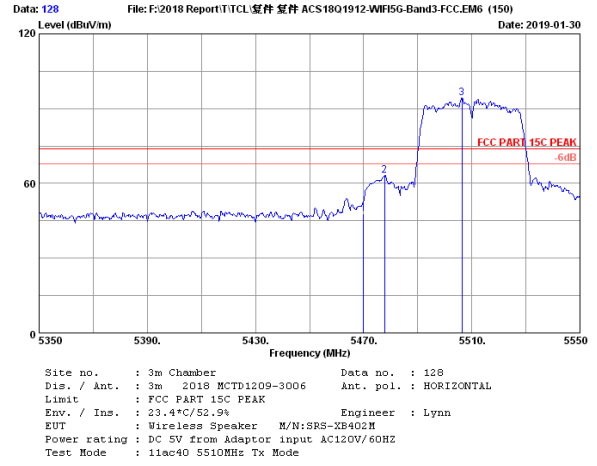


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	33.55	34.69	47.66	74.00	26.34	Peak
2	5477.80	33.00	15.80	48.97	34.70	63.07	74.00	10.93	Peak
3	5506.40	32.90	15.87	80.13	34.69	94.21	74.00	-20.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

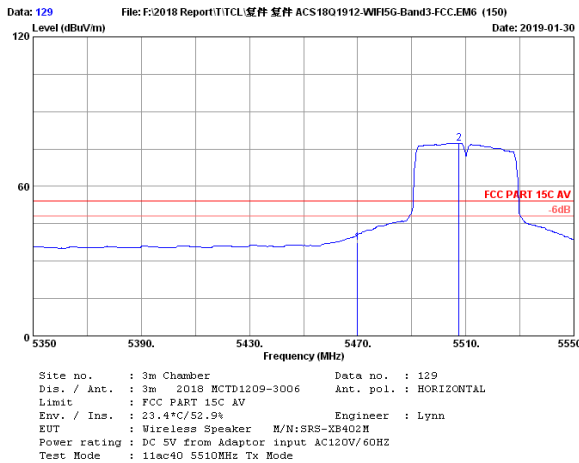

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	23.17	34.69	37.28	54.00	16.72	Average
2	5507.40	32.90	15.87	63.22	34.69	77.30	54.00	-23.30	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

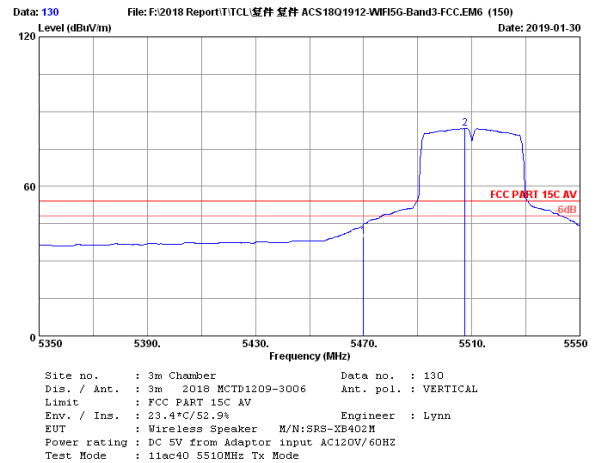

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	25.64	34.69	39.75	54.00	14.25	Average
2	5507.40	32.90	15.87	69.12	34.69	83.20	54.00	-29.20	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.




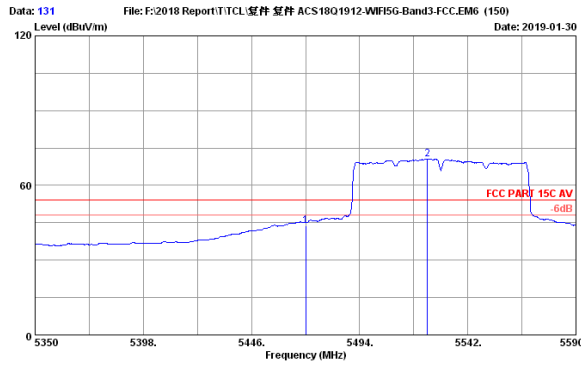

Site no. : 3m Chamber Data no. : 131  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11ac80 5530MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	29.61	34.69	43.72	54.00	10.28	Average
2	5524.00	32.92	15.90	56.42	34.69	70.55	54.00	-16.55	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

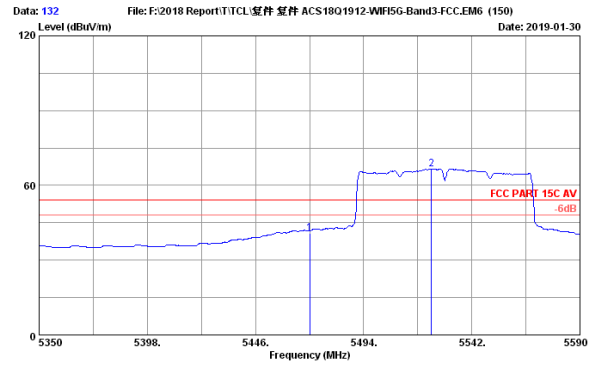

Site no. : 3m Chamber Data no. : 132  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11ac80 5530MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5470.00	33.00	15.80	26.83	34.69	40.94	54.00	13.06	Average
2	5524.00	32.92	15.90	52.50	34.69	66.63	54.00	-12.63	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

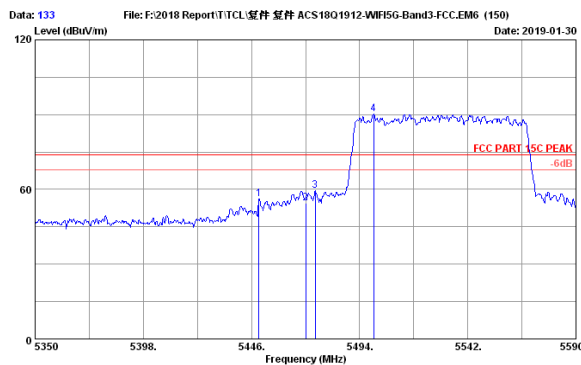

Site no. : 3m Chamber Data no. : 133  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11ac80 5530MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5449.36	33.05	15.76	42.06	34.69	56.18	74.00	17.82	Peak
2	5470.00	33.00	15.80	40.37	34.69	54.48	74.00	19.52	Peak
3	5474.32	33.00	15.80	45.33	34.69	59.44	74.00	14.56	Peak
4	5500.24	32.90	15.87	76.17	34.70	90.24	74.00	-16.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

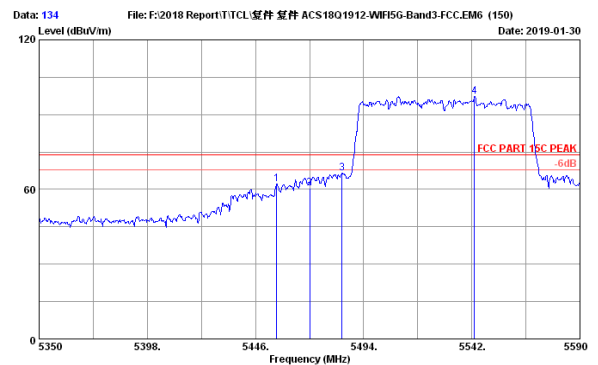

Site no. : 3m Chamber Data no. : 134  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11ac80 5530MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5455.36	33.05	15.76	48.21	34.69	62.33	74.00	11.67	Peak
2	5470.00	33.00	15.80	46.33	34.69	60.44	74.00	13.56	Peak
3	5484.40	32.95	15.83	52.28	34.70	66.36	74.00	7.64	Peak
4	5543.20	32.95	15.94	83.07	34.69	97.28	74.00	-23.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

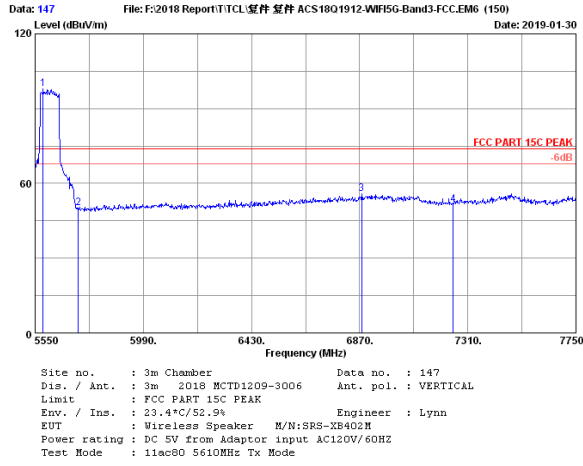


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5583.00	33.02	16.05	83.62	34.66	98.03	74.00	-24.03	Peak
2	5725.00	33.21	16.33	35.16	34.61	50.09	74.00	23.91	Peak
3	6878.80	35.61	18.31	36.30	34.41	55.81	74.00	18.19	Peak
4	7250.00	36.06	18.70	31.27	34.48	51.55	74.00	22.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

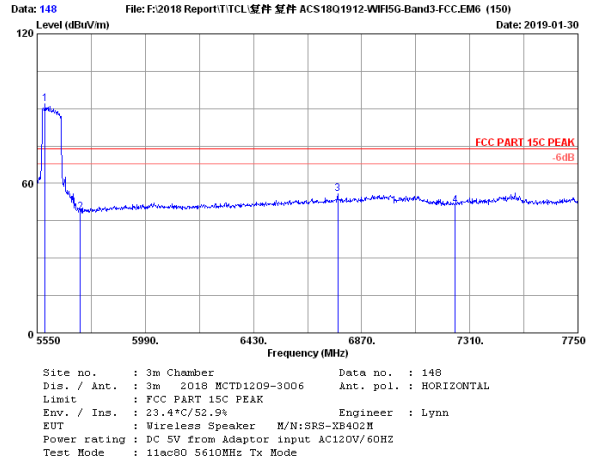


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5583.00	33.02	16.05	77.46	34.66	91.87	74.00	-17.87	Peak
2	5725.00	33.21	16.33	33.63	34.61	48.56	74.00	25.44	Peak
3	6873.20	35.36	18.15	36.63	34.42	55.72	74.00	18.28	Peak
4	7250.00	36.06	18.70	30.99	34.48	51.27	74.00	22.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

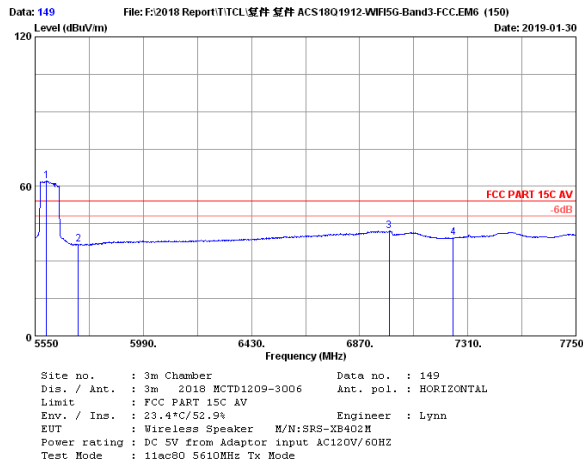

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5596.20	33.02	16.05	47.67	34.66	62.08	54.00	-8.08	Average
2	5725.00	33.21	16.33	21.79	34.61	36.72	54.00	17.28	Average
3	6991.00	35.86	18.47	22.11	34.40	42.04	54.00	11.96	Average
4	7250.00	36.06	18.70	19.02	34.48	39.30	54.00	14.70	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

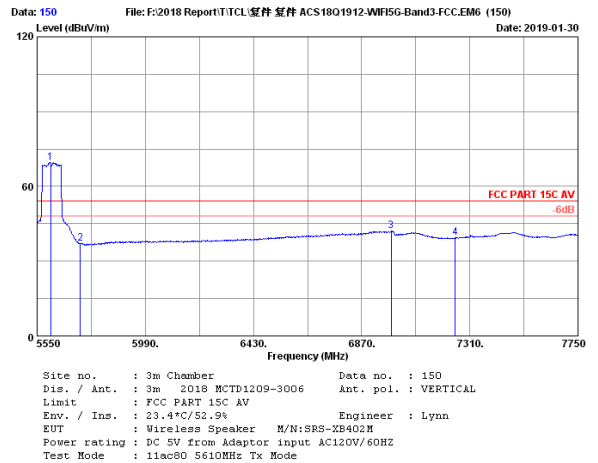

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5605.00	33.04	16.08	55.06	34.65	69.53	54.00	-15.53	Average
2	5725.00	33.21	16.33	22.15	34.61	37.08	54.00	16.92	Average
3	6991.00	35.86	18.47	22.13	34.40	42.06	54.00	11.94	Average
4	7250.00	36.06	18.70	19.06	34.48	39.34	54.00	14.66	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.


5745-5825MHz Band:

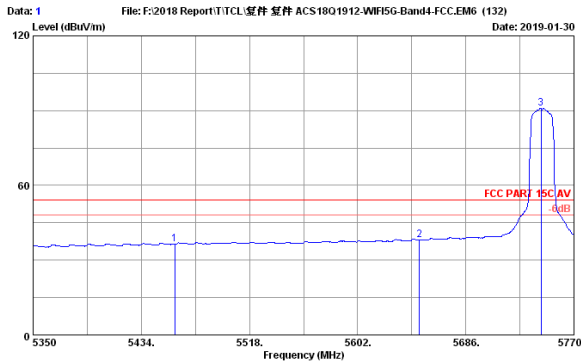

Site no. : 3m Chamber Data no. : 1  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	22.18	34.69	36.30	54.00	17.70	Average
2	5650.00	33.12	16.19	23.42	34.64	38.09	54.00	15.91	Average
3	5744.38	33.24	16.37	75.94	34.60	90.95	54.00	-36.95	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

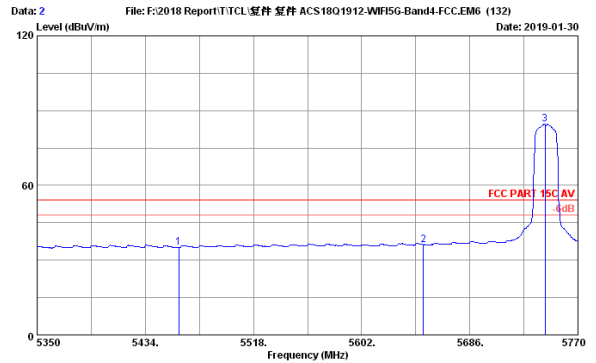

Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	21.03	34.69	35.15	54.00	18.85	Average
2	5650.00	33.12	16.19	21.59	34.64	36.26	54.00	17.74	Average
3	5744.38	33.24	16.37	69.68	34.60	84.69	54.00	-30.69	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

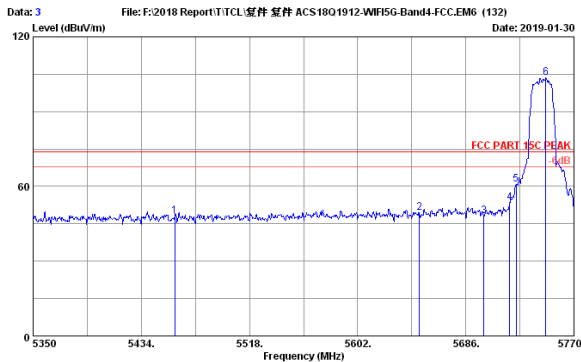

Site no. : 3m Chamber Data no. : 3  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	34.03	34.69	48.15	74.00	25.85	Peak
2	5650.00	33.12	16.19	34.65	34.64	49.32	74.00	24.68	Peak
3	5700.00	33.17	16.26	33.26	34.62	48.07	74.00	25.93	Peak
4	5720.00	33.21	16.33	38.45	34.61	53.38	74.00	20.62	Peak
5	5725.00	33.21	16.33	45.82	34.61	60.75	74.00	13.25	Peak
6	5748.16	33.24	16.37	88.65	34.60	103.66	74.00	-29.66	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

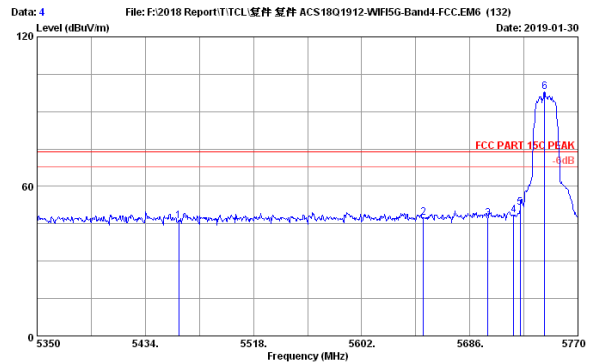

Site no. : 3m Chamber Data no. : 4  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11a 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	32.16	34.69	46.28	74.00	27.72	Peak
2	5650.00	33.12	16.19	32.88	34.64	47.55	74.00	26.45	Peak
3	5700.00	33.17	16.26	32.40	34.62	47.21	74.00	26.79	Peak
4	5720.00	33.21	16.33	33.45	34.61	48.38	74.00	25.62	Peak
5	5725.00	33.21	16.33	36.58	34.61	51.51	74.00	22.49	Peak
6	5748.96	33.24	16.37	82.80	34.60	97.81	74.00	-23.81	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

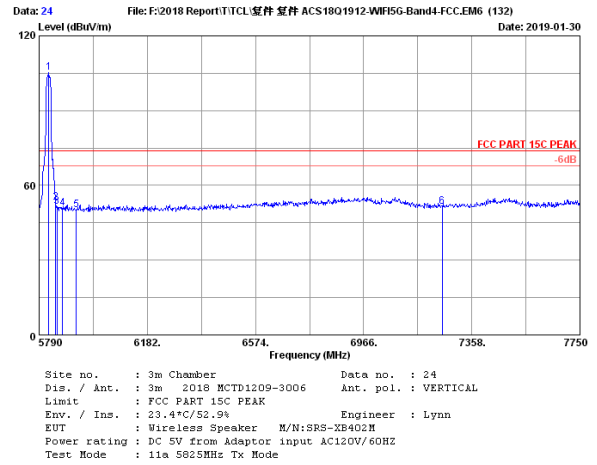
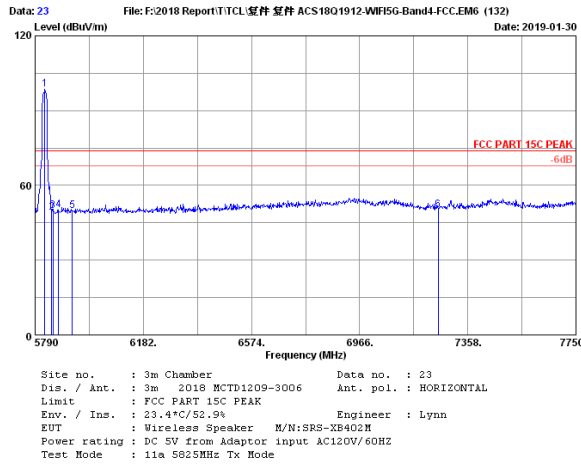


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.28	33.36	16.54	83.21	34.57	98.54	74.00	-24.54	Peak
2	5850.00	33.38	16.58	33.74	34.56	49.14	74.00	24.86	Peak
3	5855.00	33.41	16.62	34.23	34.56	49.70	74.00	24.30	Peak
4	5875.00	33.43	16.65	34.63	34.55	50.16	74.00	23.84	Peak
5	5925.00	33.50	16.76	34.08	34.53	49.81	74.00	24.19	Peak
6	7250.00	36.06	18.70	29.91	34.48	50.19	74.00	23.81	Peak

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.28	33.36	16.54	89.89	34.57	105.22	74.00	-31.22	Peak
2	5850.00	33.38	16.58	37.83	34.56	53.23	74.00	20.77	Peak
3	5855.00	33.41	16.62	35.91	34.56	51.38	74.00	22.62	Peak
4	5875.00	33.43	16.65	35.15	34.55	50.68	74.00	23.32	Peak
5	5925.00	33.50	16.76	34.51	34.53	50.24	74.00	23.76	Peak
6	7250.00	36.06	18.70	31.15	34.48	51.43	74.00	22.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

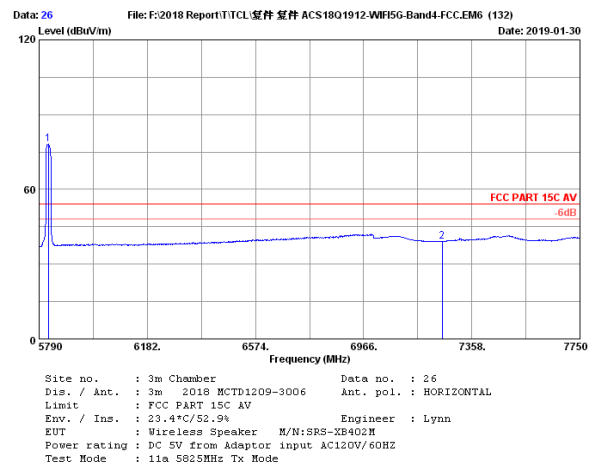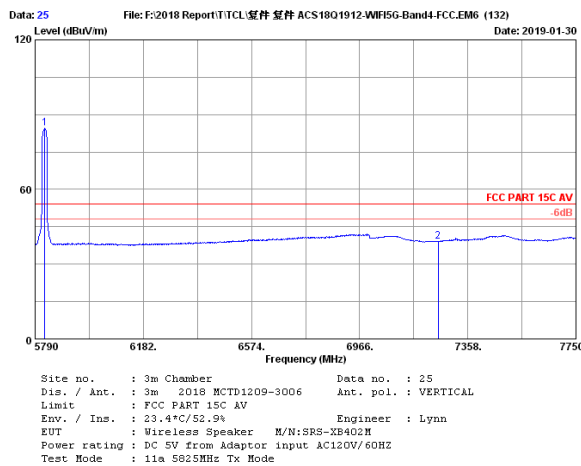


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.28	33.36	16.54	69.21	34.57	84.54	54.00	-30.54	Average
2	7250.00	36.06	18.70	18.88	34.48	39.16	54.00	14.84	Average

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.32	33.36	16.54	62.91	34.57	78.24	54.00	-24.24	Average
2	7250.00	36.06	18.70	18.93	34.48	39.21	54.00	14.79	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

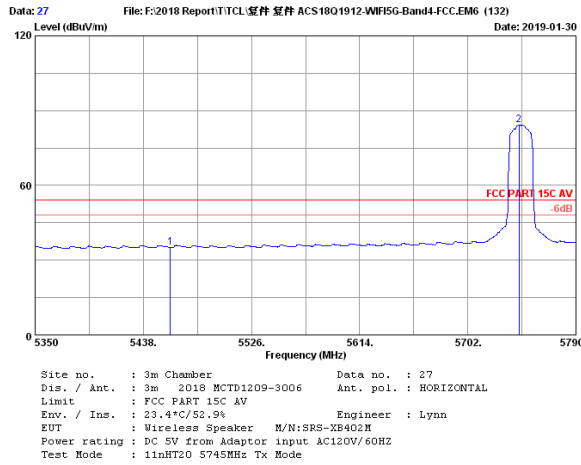


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	21.07	34.69	35.19	54.00	18.81	Average
2	5743.80	33.24	16.37	69.31	34.60	84.32	54.00	-30.32	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

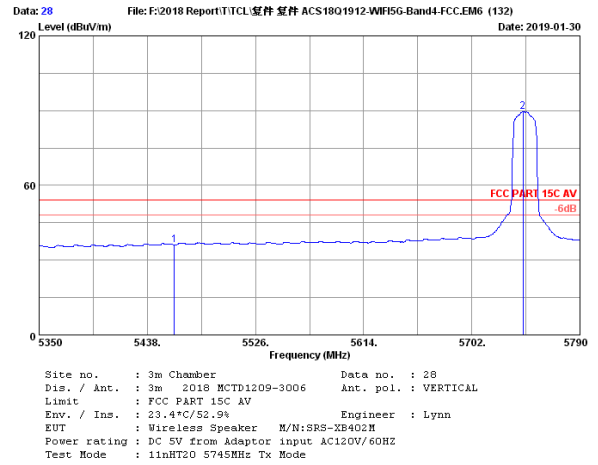


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	22.15	34.69	36.27	54.00	17.73	Average
2	5743.80	33.24	16.37	74.71	34.60	89.72	54.00	-35.72	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

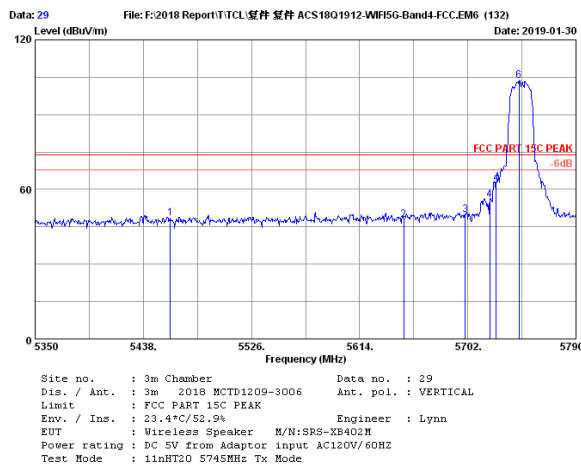



No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	34.44	34.69	48.56	74.00	25.44	Peak
2	5650.00	33.12	16.19	33.10	34.64	47.77	74.00	26.23	Peak
3	5700.00	33.17	16.26	35.03	34.62	49.84	74.00	24.16	Peak
4	5720.00	33.21	16.33	40.81	34.61	55.74	74.00	18.26	Peak
5	5725.00	33.21	16.33	46.45	34.61	61.38	74.00	12.62	Peak
6	5743.80	33.24	16.37	88.65	34.60	103.66	74.00	-29.66	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

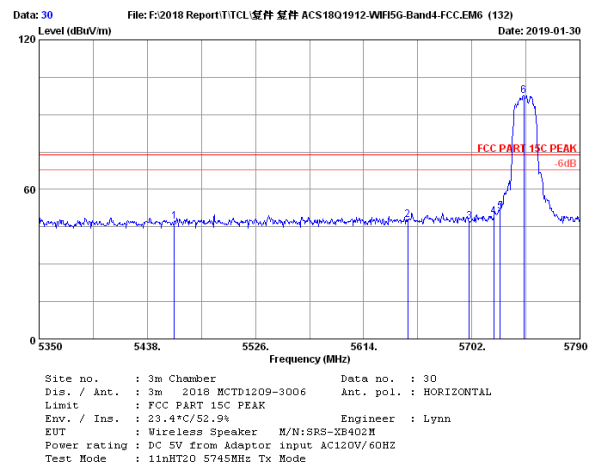

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	33.17	34.69	47.29	74.00	26.71	Peak
2	5650.00	33.12	16.19	33.20	34.64	47.87	74.00	26.13	Peak
3	5700.00	33.17	16.26	32.38	34.62	47.19	74.00	26.81	Peak
4	5720.00	33.21	16.33	34.05	34.61	48.98	74.00	25.02	Peak
5	5725.00	33.21	16.33	36.24	34.61	51.17	74.00	22.83	Peak
6	5743.80	33.24	16.37	82.63	34.60	97.64	74.00	-23.64	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

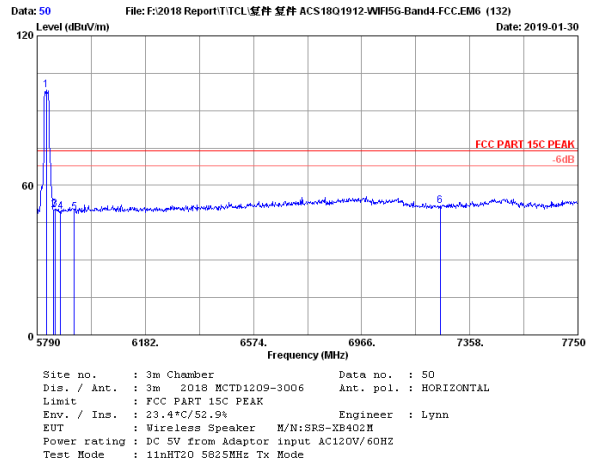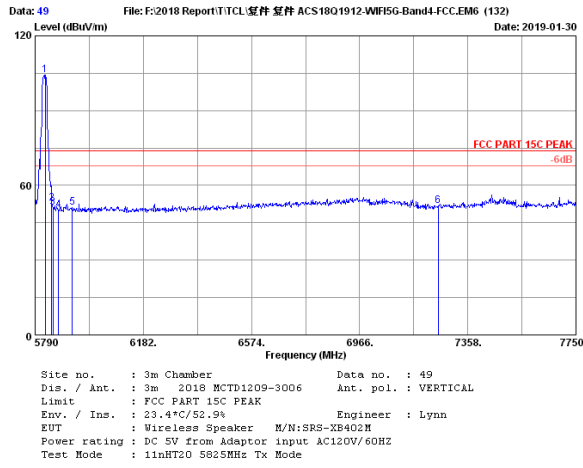


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5827.24	33.36	16.54	88.84	34.57	104.17	74.00	-30.17	Peak
2	5850.00	33.38	16.58	37.28	34.56	52.68	74.00	21.32	Peak
3	5855.00	33.41	16.62	35.74	34.56	51.21	74.00	22.79	Peak
4	5875.00	33.43	16.65	34.68	34.55	50.21	74.00	23.79	Peak
5	5925.00	33.50	16.76	35.47	34.53	51.20	74.00	22.80	Peak
6	7250.00	36.06	18.70	31.55	34.48	51.83	74.00	22.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.32	33.36	16.54	83.10	34.57	98.43	74.00	-24.43	Peak
2	5850.00	33.38	16.58	34.85	34.56	50.25	74.00	23.75	Peak
3	5855.00	33.41	16.62	34.94	34.56	50.41	74.00	23.59	Peak
4	5875.00	33.43	16.65	34.05	34.55	49.58	74.00	24.42	Peak
5	5925.00	33.50	16.76	33.38	34.53	49.11	74.00	24.89	Peak
6	7250.20	36.06	18.70	31.42	34.48	51.70	74.00	22.30	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

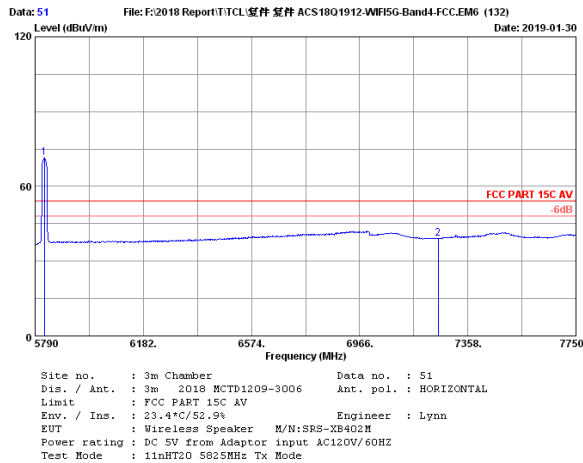


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.32	33.36	16.54	56.11	34.57	71.44	54.00	-17.44	Average
2	7250.00	36.06	18.70	18.92	34.48	39.20	54.00	14.80	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

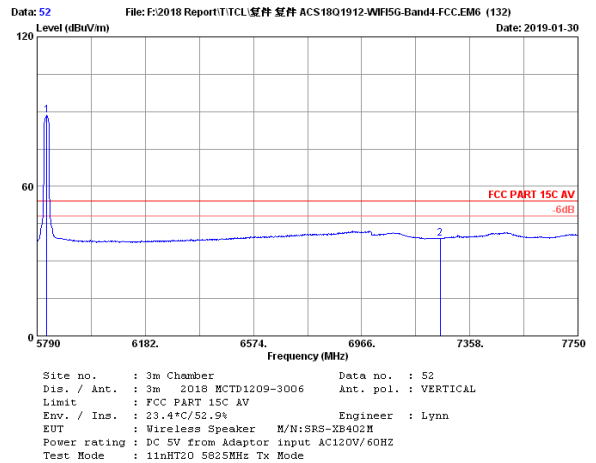

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.28	33.36	16.54	73.25	34.57	88.58	54.00	-34.58	Average
2	7250.20	36.06	18.70	18.94	34.48	39.22	54.00	14.78	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

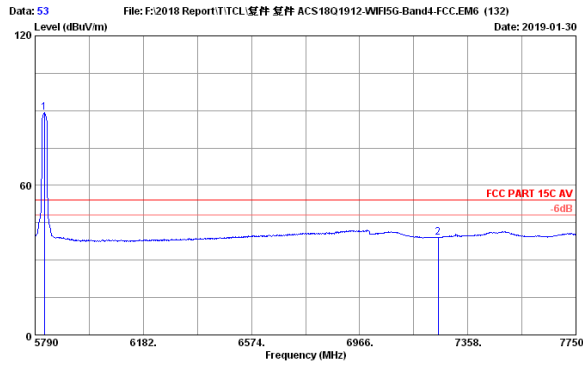

Site no. : 3m Chamber Data no. : 53  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.32	33.36	16.54	73.77	34.57	89.10	54.00	-35.10	Average
2	7250.00	36.06	18.70	18.94	34.48	39.22	54.00	14.78	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

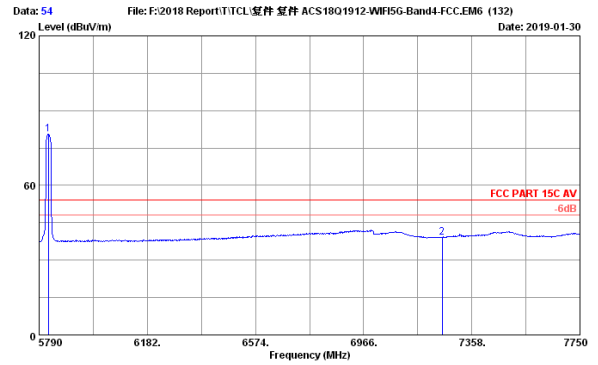

Site no. : 3m Chamber Data no. : 54  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.32	33.36	16.54	65.32	34.57	80.65	54.00	-26.65	Average
2	7250.00	36.06	18.70	18.91	34.48	39.19	54.00	14.81	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

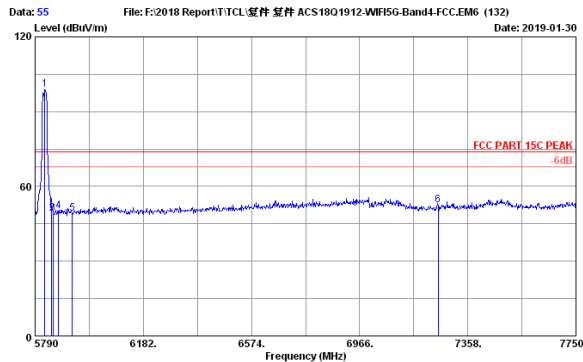

Site no. : 3m Chamber Data no. : 55  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.28	33.36	16.54	83.75	34.57	99.08	74.00	-25.08	Peak
2	5850.00	33.38	16.58	33.85	34.56	49.25	74.00	24.75	Peak
3	5855.00	33.41	16.62	33.78	34.56	49.25	74.00	24.75	Peak
4	5874.28	33.43	16.65	34.52	34.55	50.05	74.00	23.95	Peak
5	5925.00	33.50	16.76	33.28	34.53	49.01	74.00	24.99	Peak
6	7250.00	36.06	18.70	32.07	34.48	52.35	74.00	21.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

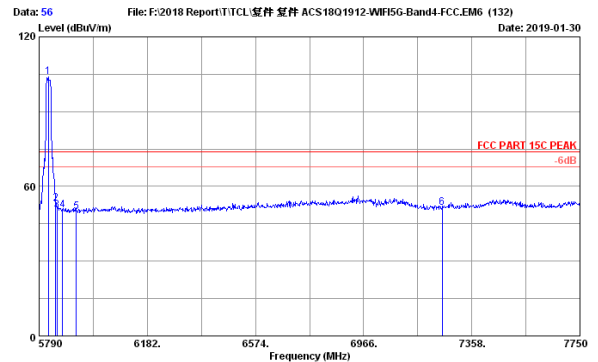

Site no. : 3m Chamber Data no. : 56  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5825MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.32	33.36	16.54	88.75	34.57	104.08	74.00	-30.08	Peak
2	5850.00	33.38	16.58	37.72	34.56	53.12	74.00	20.88	Peak
3	5855.00	33.41	16.62	34.97	34.56	50.44	74.00	23.56	Peak
4	5875.00	33.43	16.65	34.90	34.55	50.43	74.00	23.57	Peak
5	5925.00	33.50	16.76	34.08	34.53	49.81	74.00	24.19	Peak
6	7250.00	36.06	18.70	31.20	34.48	51.48	74.00	22.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

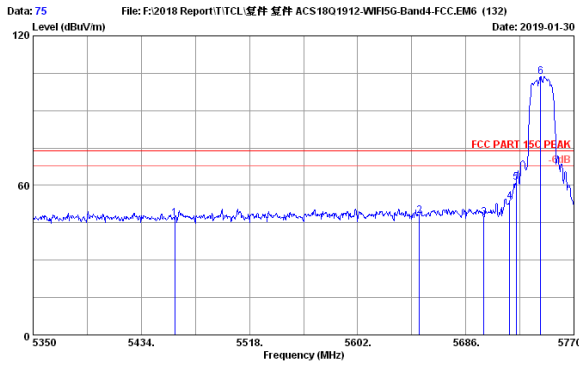

Site no. : 3m Chamber Data no. : 75  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	32.51	34.69	46.63	74.00	27.37	Peak
2	5650.00	33.12	16.19	33.27	34.64	47.94	74.00	26.06	Peak
3	5700.00	33.17	16.26	32.32	34.62	47.13	74.00	26.87	Peak
4	5720.00	33.21	16.33	36.65	34.61	53.58	74.00	20.42	Peak
5	5725.00	33.21	16.33	46.35	34.61	61.28	74.00	12.72	Peak
6	5743.96	33.24	16.37	88.65	34.60	103.66	74.00	-29.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

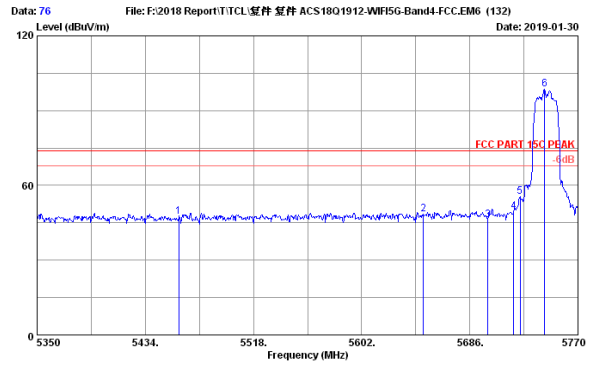

Site no. : 3m Chamber Data no. : 76  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.04	33.05	15.76	33.43	34.69	47.55	74.00	26.45	Peak
2	5650.00	33.12	16.19	33.68	34.64	48.35	74.00	25.65	Peak
3	5700.00	33.17	16.26	31.45	34.62	46.26	74.00	27.74	Peak
4	5720.00	33.21	16.33	34.42	34.61	49.35	74.00	24.65	Peak
5	5725.06	33.21	16.33	40.54	34.61	55.47	74.00	18.53	Peak
6	5743.96	33.24	16.37	83.45	34.60	98.46	74.00	-24.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

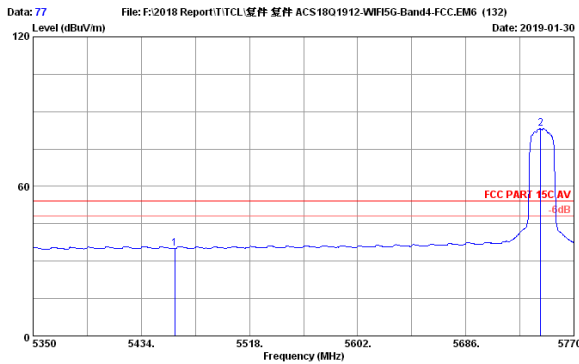

Site no. : 3m Chamber Data no. : 77  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	20.98	34.69	35.10	54.00	18.90	Average
2	5743.96	33.24	16.37	68.17	34.60	83.18	54.00	-29.18	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

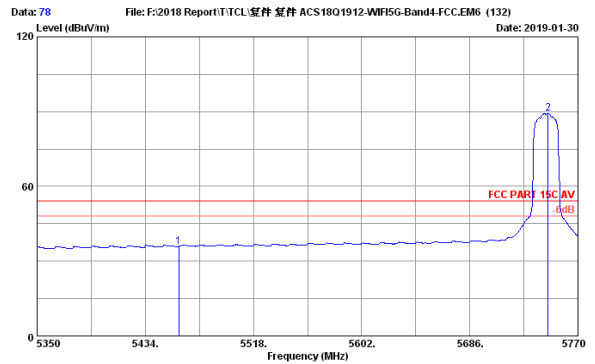


Site no. : 3m Chamber Data no. : 78  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT20 5745MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	21.81	34.69	35.93	54.00	18.07	Average
2	5746.90	33.24	16.37	74.30	34.60	89.31	54.00	-35.31	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.




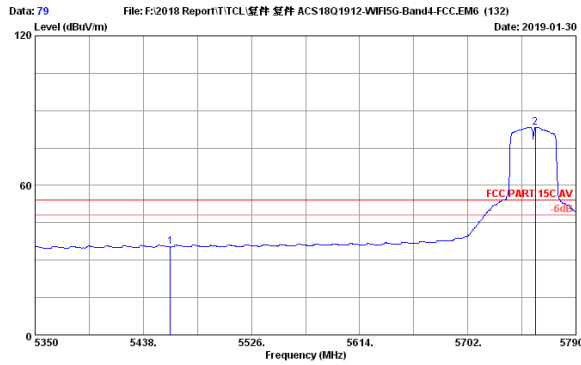

Site no. : 3m Chamber Data no. : 79  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	21.19	34.69	35.31	54.00	18.69	Average
2	5757.00	33.26	16.40	68.24	34.59	83.31	54.00	-29.31	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

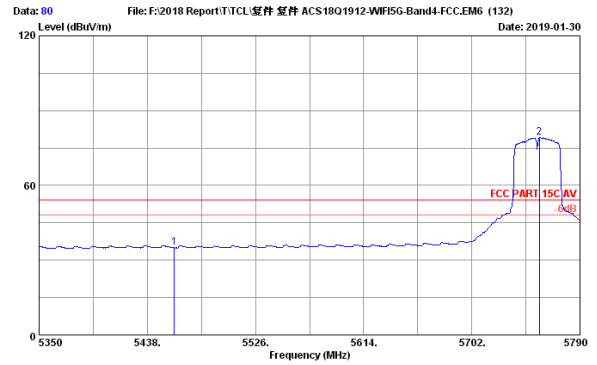

Site no. : 3m Chamber Data no. : 80  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	20.82	34.69	34.94	54.00	19.06	Average
2	5757.00	33.26	16.40	64.04	34.59	79.11	54.00	-25.11	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

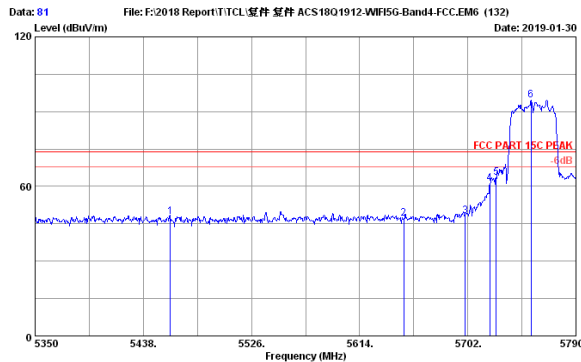

Site no. : 3m Chamber Data no. : 81  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	33.69	34.69	47.81	74.00	26.19	Peak
2	5650.00	33.12	16.19	32.59	34.64	47.26	74.00	26.74	Peak
3	5700.00	33.17	16.26	33.33	34.62	48.14	74.00	25.86	Peak
4	5720.00	33.21	16.33	46.40	34.61	61.33	74.00	12.67	Peak
5	5725.00	33.21	16.33	45.55	34.61	63.48	74.00	10.52	Peak
6	5753.48	33.26	16.40	79.58	34.60	94.64	74.00	-20.64	Peak



Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

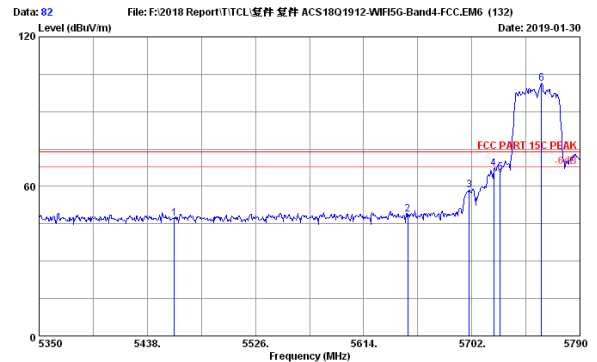

Site no. : 3m Chamber Data no. : 82  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11nHT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	33.15	34.69	47.27	74.00	26.73	Peak
2	5650.00	33.12	16.19	34.01	34.64	48.68	74.00	25.32	Peak
3	5700.00	33.17	16.26	43.73	34.62	58.54	74.00	15.46	Peak
4	5720.00	33.21	16.33	52.13	34.61	67.06	74.00	6.94	Peak
5	5725.00	33.21	16.33	50.69	34.61	65.62	74.00	8.38	Peak
6	5758.76	33.26	16.40	86.15	34.59	101.22	74.00	-27.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

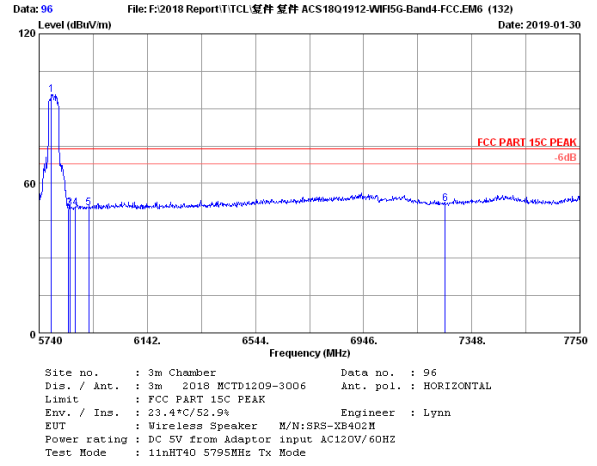
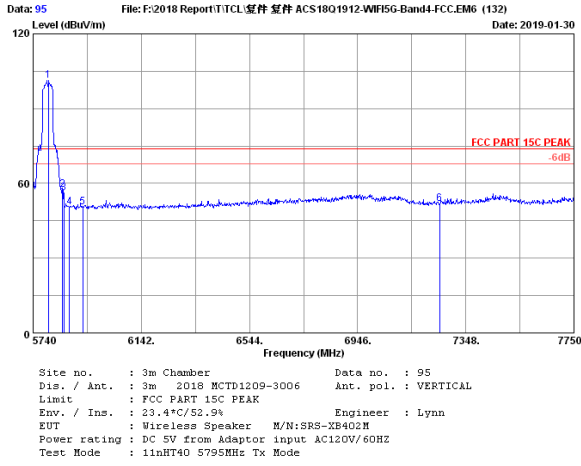


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5796.28	33.31	16.47	86.23	34.58	101.43	74.00	-27.43	Peak
2	5850.00	33.38	16.58	41.95	34.56	57.35	74.00	16.65	Peak
3	5855.00	33.41	16.62	40.53	34.56	56.00	74.00	18.00	Peak
4	5875.00	33.43	16.65	35.10	34.55	50.63	74.00	23.37	Peak
5	5925.00	33.50	16.76	34.65	34.53	50.38	74.00	23.62	Peak
6	7250.00	36.06	18.70	31.51	34.48	51.79	74.00	22.21	Peak

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5786.23	33.31	16.47	80.51	34.58	95.71	74.00	-21.71	Peak
2	5850.00	33.38	16.58	34.40	34.56	49.80	74.00	24.20	Peak
3	5855.00	33.41	16.62	34.64	34.56	50.11	74.00	23.89	Peak
4	5875.00	33.43	16.65	34.59	34.55	50.12	74.00	23.88	Peak
5	5925.00	33.50	16.76	34.45	34.53	50.18	74.00	23.82	Peak
6	7249.51	36.06	18.70	31.61	34.48	51.89	74.00	22.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

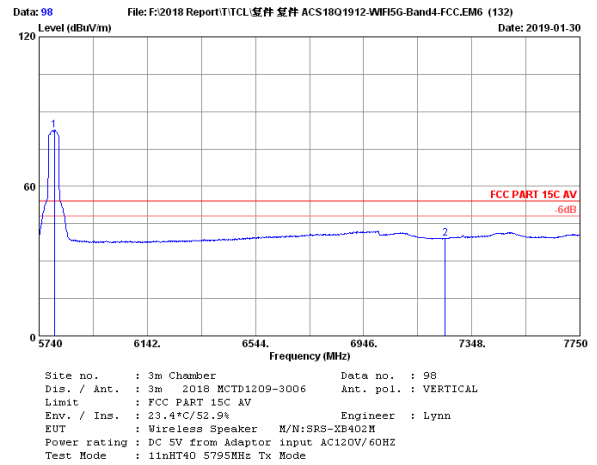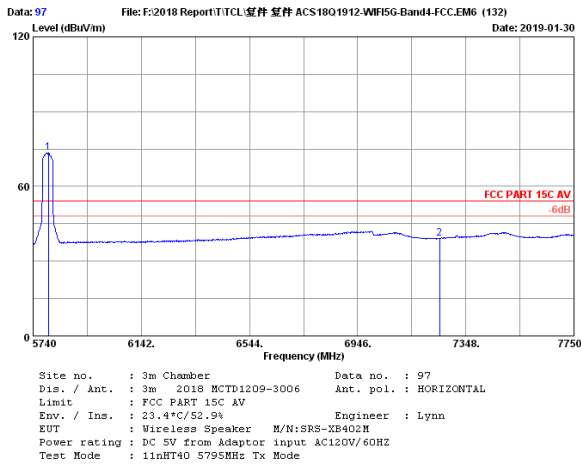


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5796.28	33.31	16.47	58.27	34.58	73.47	54.00	-19.47	Average
2	7250.00	36.06	18.70	18.87	34.48	39.15	54.00	14.85	Average

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5796.28	33.31	16.47	67.48	34.58	82.68	54.00	-28.68	Average
2	7249.51	36.06	18.70	18.87	34.48	39.15	54.00	14.85	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

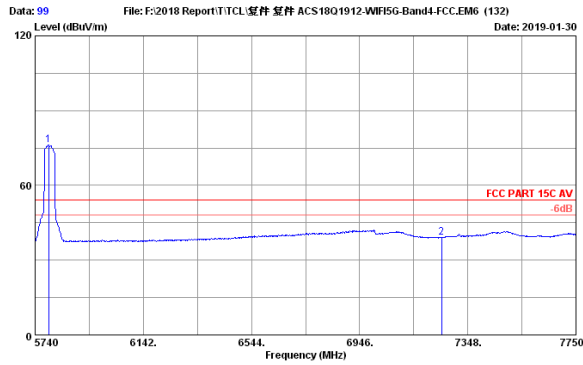

Site no. : 3m Chamber Data no. : 99  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5795MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5790.25	33.31	16.47	61.09	34.58	76.29	54.00	-22.29	Average
2	7250.00	36.06	18.70	18.82	34.48	39.10	54.00	14.90	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

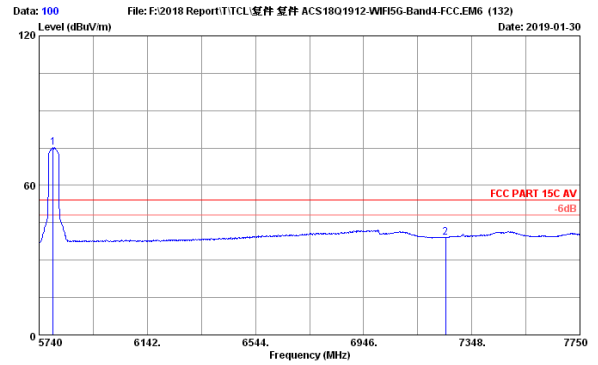

Site no. : 3m Chamber Data no. : 100  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5795MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5792.26	33.31	16.47	59.91	34.58	75.11	54.00	-21.11	Average
2	7250.00	36.06	18.70	18.84	34.48	39.12	54.00	14.88	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

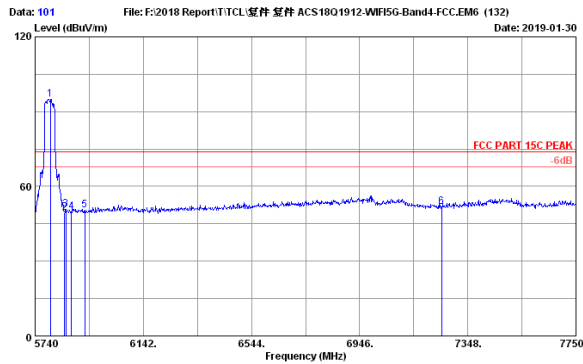

Site no. : 3m Chamber Data no. : 101  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5795MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5796.28	33.31	16.47	79.67	34.58	94.87	74.00	-20.87	Peak
2	5850.00	33.38	16.58	33.99	34.56	49.39	74.00	24.61	Peak
3	5855.00	33.41	16.62	35.38	34.56	50.85	74.00	23.15	Peak
4	5875.00	33.43	16.65	34.37	34.55	49.90	74.00	24.10	Peak
5	5925.00	33.50	16.76	34.65	34.53	50.38	74.00	23.62	Peak
6	7250.00	36.06	18.70	31.50	34.48	51.78	74.00	22.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

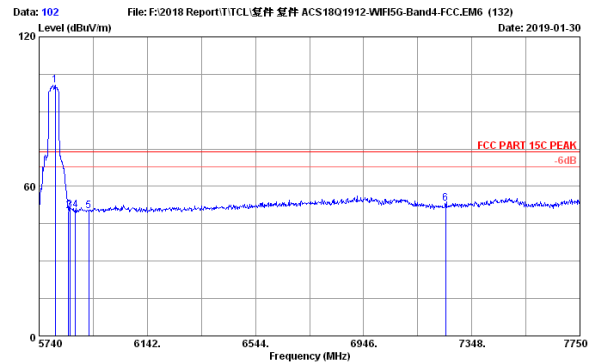

Site no. : 3m Chamber Data no. : 102  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5795MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5800.30	33.31	16.47	85.52	34.58	100.72	74.00	-26.72	Peak
2	5850.00	33.38	16.58	34.86	34.56	50.26	74.00	23.74	Peak
3	5855.00	33.41	16.62	35.01	34.56	50.48	74.00	23.52	Peak
4	5875.00	33.43	16.65	34.95	34.55	50.48	74.00	23.52	Peak
5	5925.00	33.50	16.76	34.37	34.53	50.10	74.00	23.90	Peak
6	7250.00	36.06	18.70	32.76	34.48	53.04	74.00	20.96	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

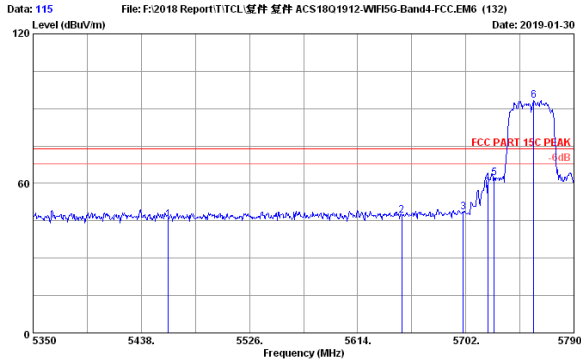

Site no. : 3m Chamber Data no. : 115  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	31.35	34.69	45.47	74.00	28.53	Peak
2	5650.00	33.12	16.19	32.54	34.64	47.21	74.00	26.79	Peak
3	5700.00	33.17	16.26	33.57	34.62	48.38	74.00	25.62	Peak
4	5720.00	33.21	16.33	45.16	34.61	60.09	74.00	13.91	Peak
5	5725.00	33.21	16.33	47.16	34.61	62.09	74.00	11.91	Peak
6	5757.44	33.26	16.40	78.09	34.59	93.16	74.00	-19.16	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

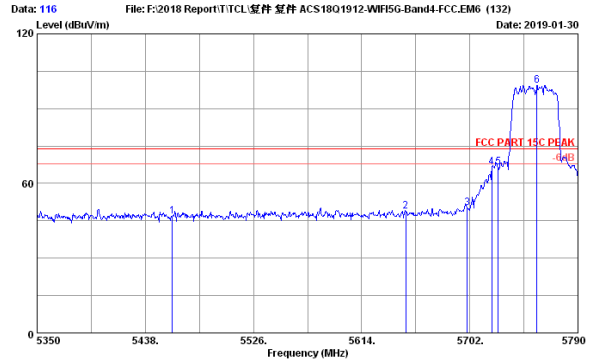

Site no. : 3m Chamber Data no. : 116  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	32.52	34.69	46.64	74.00	27.36	Peak
2	5650.00	33.12	16.19	33.98	34.64	48.65	74.00	25.35	Peak
3	5700.00	33.17	16.26	35.38	34.62	50.16	74.00	23.84	Peak
4	5720.00	33.21	16.33	51.65	34.61	66.58	74.00	7.42	Peak
5	5725.00	33.21	16.33	51.52	34.61	66.45	74.00	7.55	Peak
6	5756.56	33.26	16.40	84.37	34.59	99.44	74.00	-25.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

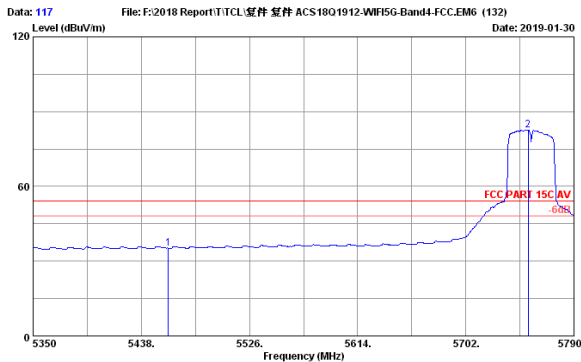

Site no. : 3m Chamber Data no. : 117  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	21.08	34.69	35.20	54.00	18.80	Average
2	5752.60	33.26	16.40	67.49	34.60	82.55	54.00	-28.55	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

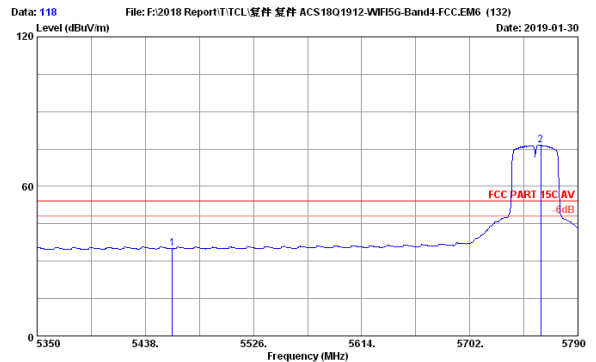

Site no. : 3m Chamber Data no. : 118  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT40 5755MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	20.81	34.69	34.93	54.00	19.07	Average
2	5759.64	33.26	16.40	61.51	34.59	76.58	54.00	-22.58	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

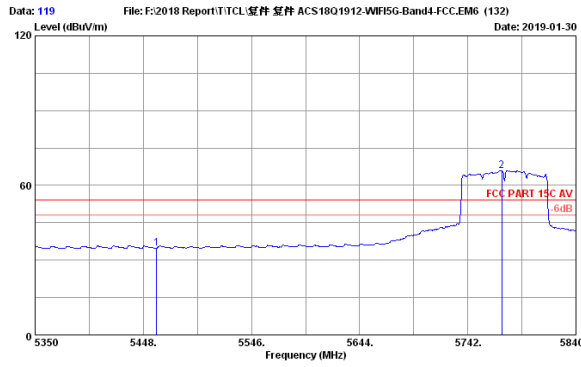

Site no. : 3m Chamber Data no. : 119  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5775MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	20.81	34.69	34.93	54.00	19.07	Average
2	5772.87	33.29	16.44	50.83	34.59	65.97	54.00	-11.97	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

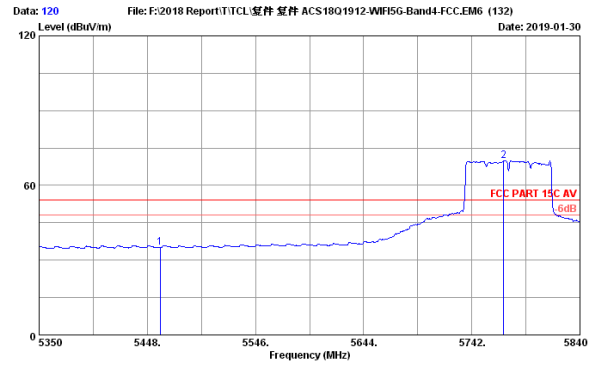

Site no. : 3m Chamber Data no. : 120  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5775MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5459.76	33.05	15.76	20.90	34.69	35.02	54.00	18.98	Average
2	5770.91	33.29	16.44	54.81	34.59	69.95	54.00	-15.95	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

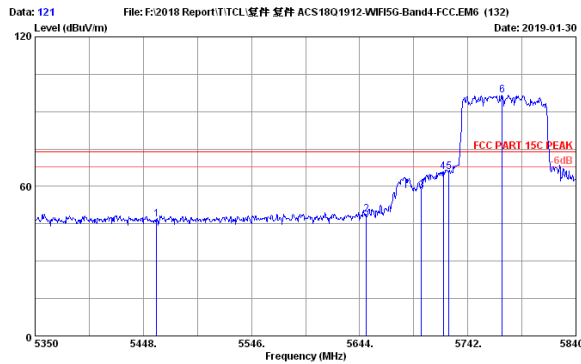

Site no. : 3m Chamber Data no. : 121  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5775MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.00	33.05	15.76	32.76	34.69	46.88	74.00	27.12	Peak
2	5650.00	33.12	16.19	34.06	34.64	48.73	74.00	25.27	Peak
3	5700.00	33.17	16.26	43.45	34.62	58.26	74.00	15.74	Peak
4	5720.00	33.21	16.33	50.77	34.61	65.70	74.00	8.30	Peak
5	5724.85	33.21	16.33	50.98	34.61	65.91	74.00	8.09	Peak
6	5773.36	33.29	16.44	81.62	34.59	96.76	74.00	-22.76	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

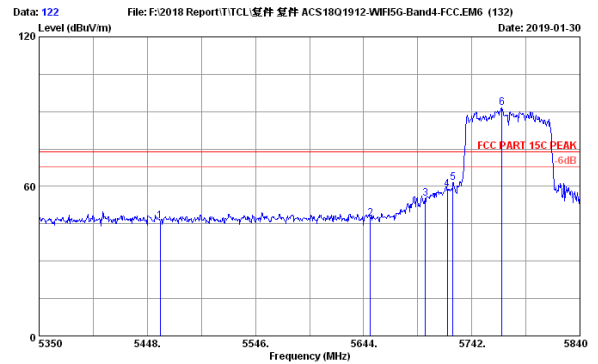

Site no. : 3m Chamber Data no. : 122  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402H  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5775MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5459.76	33.05	15.76	32.03	34.69	46.15	74.00	27.85	Peak
2	5650.00	33.12	16.19	32.31	34.64	46.98	74.00	27.02	Peak
3	5700.00	33.17	16.26	40.25	34.62	55.06	74.00	18.94	Peak
4	5720.00	33.21	16.33	43.83	34.61	58.76	74.00	15.24	Peak
5	5725.00	33.21	16.33	46.49	34.61	61.42	74.00	12.58	Peak
6	5769.44	33.29	16.44	76.48	34.59	91.62	74.00	-17.62	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

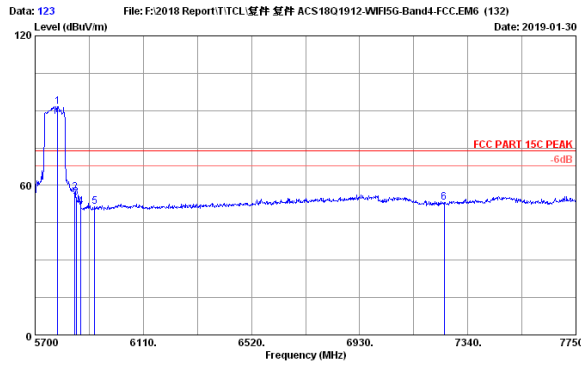

Site no. : 3m Chamber Data no. : 123  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5775MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5786.10	33.31	16.47	76.46	34.58	91.66	74.00	-17.66	Peak
2	5850.00	33.38	16.58	41.72	34.56	57.12	74.00	16.88	Peak
3	5855.00	33.41	16.62	39.69	34.56	55.16	74.00	18.84	Peak
4	5874.25	33.43	16.65	35.83	34.55	51.36	74.00	22.64	Peak
5	5925.00	33.50	16.76	35.68	34.53	51.41	74.00	22.59	Peak
6	7250.00	36.06	18.70	32.91	34.48	53.19	74.00	20.81	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

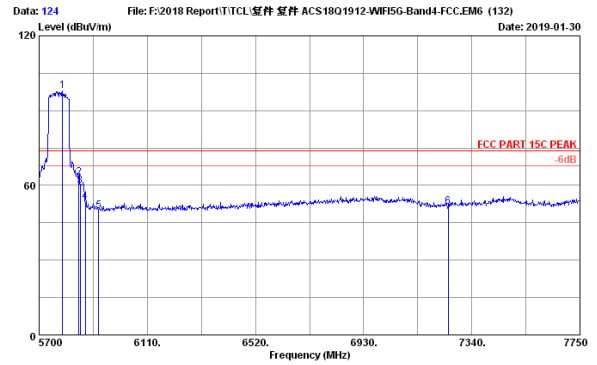

Site no. : 3m Chamber Data no. : 124  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5775MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5788.15	33.31	16.47	82.87	34.58	98.07	74.00	-24.07	Peak
2	5850.00	33.38	16.58	47.79	34.56	63.19	74.00	10.81	Peak
3	5855.00	33.41	16.62	44.45	34.56	59.92	74.00	14.08	Peak
4	5875.00	33.43	16.65	38.02	34.55	53.55	74.00	20.45	Peak
5	5925.00	33.50	16.76	34.19	34.53	49.92	74.00	24.08	Peak
6	7250.00	36.06	18.70	31.30	34.48	51.58	74.00	22.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

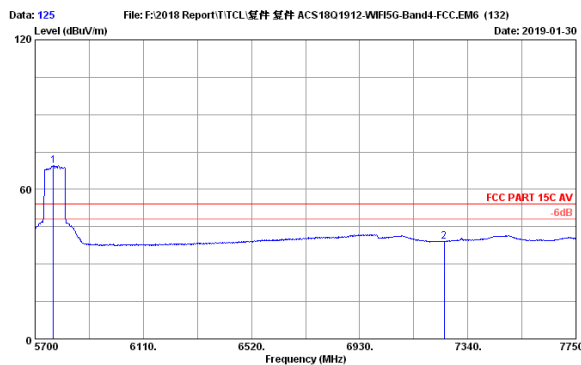

Site no. : 3m Chamber Data no. : 125  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5775MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5769.70	33.29	16.44	54.35	34.59	69.49	54.00	-15.49	Average
2	7250.00	36.06	18.70	18.87	34.48	39.15	54.00	14.85	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

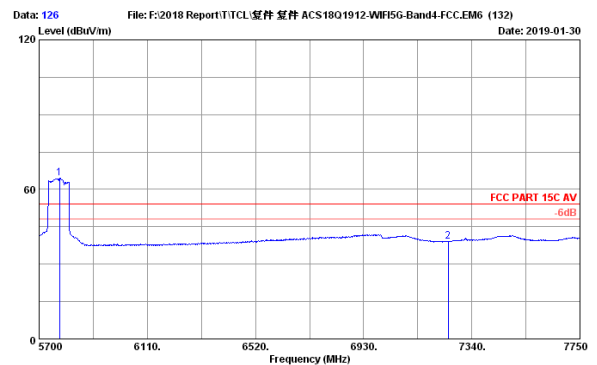

Site no. : 3m Chamber Data no. : 126  
 Dis. / Ant. : 3m 2018 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn  
 EUT : Wireless Speaker M/N:SRS-XB402M  
 Power rating : DC 5V from Adaptor input AC120V/60HZ  
 Test Mode : 11acVHT80 5775MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5777.90	33.29	16.44	49.41	34.59	64.55	54.00	-10.55	Average
2	7250.00	36.06	18.70	18.87	34.48	39.15	54.00	14.85	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.