


# Appendix B. Co-location



# 1. Results of Radiated Emissions for Co-located

Temperature	<b>26°</b> ℃	Humidity	60%
Test Engineer	Jim Huang	Configurations	2.4GHz + Bluetooth

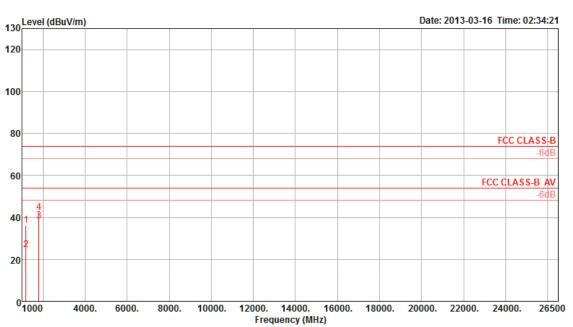


		Freq	Level	Limit Line	Over Limit	Read Level	Cable PreampAntenna Loss Factor Factor I			Rema rk	T/Pos		Pol/Phase	
	-	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	Cm		
	1 2	1196.26 1197.08									209 209		HORIZONTAL HORIZONTAL	
Ľ	<u>3 a</u> 4 p	<u>1812.52</u> 1812.68	<u>38.25</u> 42.41		<u>-15.75</u> -31.59					Average Peak	<u>217</u> 217		HORIZONTAL HORIZONTAL	

#### Horizontal



## Vertial

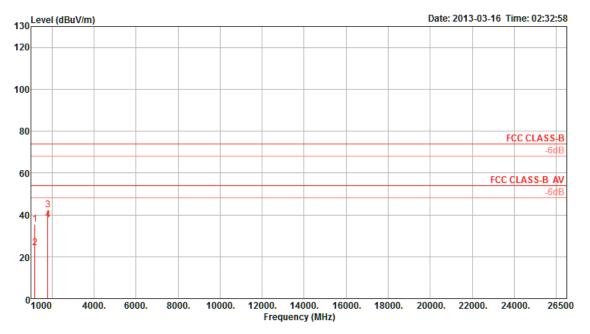


	Freq	Level		Over Limit					Remark	T/Pos	A/Pos	Pol/Phase
-	MHz	dBuV/m	$\overline{dBuV/\mathfrak{m}}$	dB	dBuV	dB	dB	dB/m		deg	Cm	
3 р	1196.79 1196.88 1812.45 1812.47	24.36 42.28	54.00 74.00	-29.64 -31.72	33.54 47.27	2.00 2.52	35.58 34.87	24.40 27.36	Average Peak	184 184 248 248	100 100	VERTICAL VERTICAL VERTICAL VERTICAL



Temperature	<b>26℃</b>	Humidity	60%
Test Engineer	Jim Huang	Configurations	5GHz + Bluetooth


Horizontal

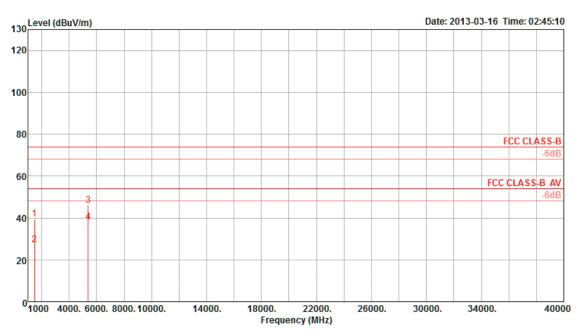

	Freq	Level		Over Limit						T/Pos	A/Pos	Pol/Phase
-	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	Cm	
3 р	1495.07 1495.46 5395.77 5395.89	27.34 45.94	54.00 74.00	-26.66 -28.06	34.78 42.52	2.25 4.50	35.09 34.62	33.54	Average Peak	204 204 130 130	100 100	HORIZONTAL HORIZONTAL HORIZONTAL HORIZONTAL



## Vertial

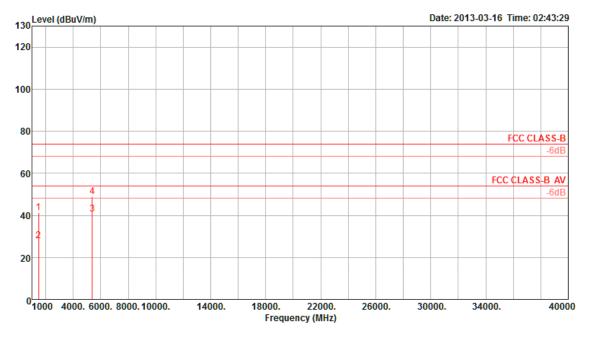

	Freq	Level	Limit Line	Over Limit	Read Le <del>v</del> el	Cable Loss	Preamp <i>l</i> Factor	Antenna Factor	Rema rk	T/Pos		Pol/Phase	
-	MHz	dBuV/m	dBuV/m	dB	dBu∛	dB	dB	dB/m		deg	Cm		
$\frac{1}{2}$	1495.92 1496.65									167 167		VERTICAL VERTICAL	
3 a	<u>5395.85</u> 5395.96	40.41	54.00	-13.59	36.99	4.50	34.62	33.54	Average	268 268	1200	VERTICAL VERTICAL	