



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Sony Corporation
Applicant Address	1-7-1 Konan, Minato-ku, Tokyo 108-0075, Japan
FCC ID	AK8SVF13NA1EL
Manufacturer's company	Sony Corporation
Manufacturer Address	1-7-1 Konan, Minato-ku, Tokyo 108-0075, Japan

Product Name	Personal Computer
Brand Name	SONY
Model Name	SVF13NA1EL
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2402 ~ 2480MHz
Received Date	Jul. 26, 2013
Final Test Date	Oct. 17, 2013
Submission Type	Original Equipment

Statement

Test result included is only for the Bluetooth LE part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart C** and **KDB 558074 D01 v03r01**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies	5
3.5. Table for Test Modes.....	5
3.6. Table for Testing Locations.....	6
3.7. Table for Supporting Units	6
3.8. Table for Parameters of Test Software Setting	6
3.9. EUT Operation during Test	6
3.10. Duty Cycle.....	7
3.11. Test Configurations	8
4. TEST RESULT	11
4.1. AC Power Line Conducted Emissions Measurement.....	11
4.2. Maximum Conducted Output Power Measurement.....	15
4.3. Power Spectral Density Measurement	17
4.4. 6dB Spectrum Bandwidth Measurement	21
4.5. Radiated Emissions Measurement	24
4.6. Emissions Measurement	34
4.7. Antenna Requirements	40
5. LIST OF MEASURING EQUIPMENTS	41
6. TEST LOCATION.....	43
7. MEASUREMENT UNCERTAINTY.....	44
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. CO-LOCATION REPORT	B1 ~ B5



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR372647AB	Rev. 01	Initial issue of report	Oct. 14, 2013
FR372647AB	Rev. 02	Added NFC function and re-test AC Power Line Conducted Emissions and Radiated Emissions (30MHz ~ 1GHz)	Oct. 17, 2013



1. CERTIFICATE OF COMPLIANCE

Product Name : Personal Computer
Brand Name : SONY
Model No. : SVF13NA1EL
Applicant : Sony Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 26, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written in a cursive style and is positioned above a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	12.19 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	25.78 dB
4.3	15.247(e)	Power Spectral Density	Complies	17.79 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.15 dB
4.6	15.247(d)	Band Edge Emissions	Complies	2.48 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	From power adapter and battery
Modulation	DSSS
Data Rate (Mbps)	GFSK: 1
Frequency Range	2402 ~ 2480MHz
Channel Number	40 (37 hopping + 3 advertising channel)
Channel Band Width (99%)	1.06 MHz
Maximum Conducted Output Power	4.22 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

Power	Brand	Model	Rating
Adapter	SONY	VGP-AC19V73	Input: 100-240Vac, 50/60Hz, 1.0A Output1: 19.5Vdc, 2.0A Output2: 5.0Vdc, 1.0A
LITHIUM ION BATTERY	SONY	VGP-BPS41	11.25Vdc, 3140mAh

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	P/N	Antenna Type	Connector	Gain (dBi)	
						2.4GHz	5GHz
1	VAIO	IRX-7660(B)	PANT13A00002-9-xx	PIFA Antenna	I-PEX	1.82	1.07
2	VAIO	IRX-7660(B)	PANT13A00002-9-xx	PIFA Antenna	I-PEX	-1.42	0.18

Note:

For IEEE 802.11 abg mode (1TX, 2RX):

Both Chain 1 and Chain 2 can be used as transmitting/receiving antenna, but only one of them is used as transmitting antenna.

Both Chain 1 and Chain 2 could receive simultaneously.

The EUT supports the antenna with TX diversity function.

Chain 2 generated the worst case than Chain 1, so it is tested and recorded in the report.

For IEEE 802.11 n/ac mode (1TX/2TX, 2RX):

The EUT can support 1TX and 2TX functions.

For 1TX, 2RX

Both Chain 1 and Chain 2 can be used as transmitting/receiving antenna, but only one of them is used as transmitting antenna.

Both Chain 1 and Chain 2 could receive simultaneously.

The EUT supports the antenna with TX diversity function.

Chain 2 generated the worst case than Chain 1, so it is tested and recorded in the report.


For 2TX, 2RX

Both Chain 1 and Chain 2 can be used as transmitting/receiving antenna.

Both Chain 1 and Chain 2 could transmit/receive simultaneously.

For Bluetooth mode (1TX, 1RX):

Only Chain 2 can be use as transmitting/receiving antenna.

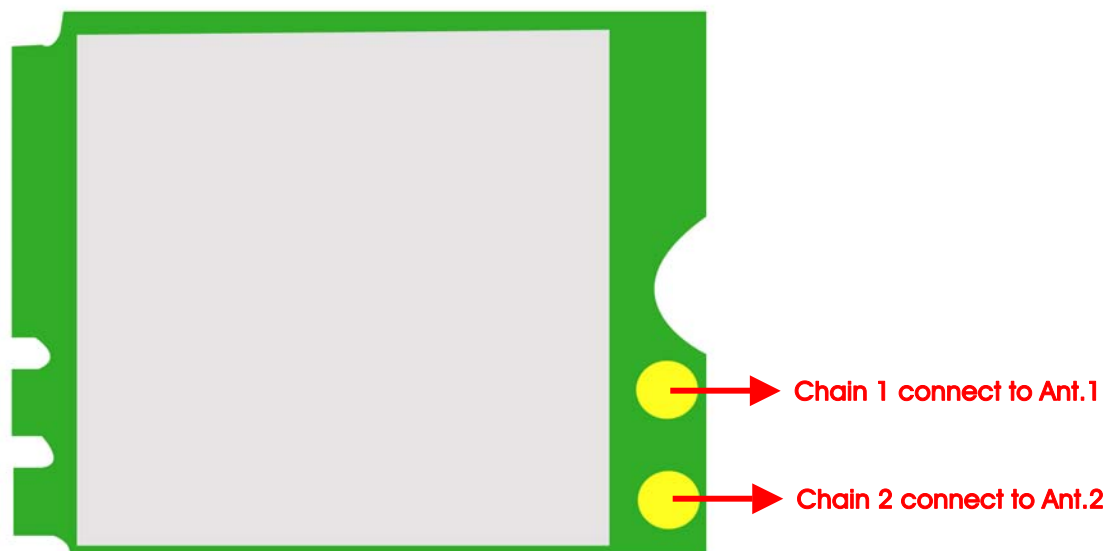

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	20	2442 MHz
	1	2404 MHz	:	:
	2	2406 MHz	37	2476 MHz
	:	:	38	2478 MHz
	18	2438 MHz	39	2480 MHz
	19	2440 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power Power Spectral Density	GFSK	1 Mbps	0/20/39	2
6dB Spectrum Bandwidth	GFSK	1 Mbps	0/20/39	2
Radiated Emissions 9kHz~1GHz	CTX	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	GFSK	1 Mbps	0/20/39	2
Band Edge Emissions	GFSK	1 Mbps	0/20/39	2

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT (CTX) with 2.4GHz WLAN, BT and NFC function

Mode 2. EUT (CTX) with 5GHz WLAN, BT and NFC function

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission test:

The EUT for Radiated emission test was performed at stand, laptop and slate mode and the worst-case was found at slate mode. So the measurement will follow this same test configuration.

For below 1GHz:

Mode 1: EUT (CTX) with 2.4GHz WLAN, BT and NFC function – Slate Mode

Mode 2: EUT (CTX) with 5GHz WLAN, BT and NFC function – Slate Mode

Mode 1 is the worst case, so it was selected to record in this test report.

For Above 1GHz:

Mode 1: EUT (CTX) – Slate Mode

<For Co-location Test>:

The EUT could be applied with 2.4GHz/5GHz WLAN function and Bluetooth function and share common antenna; therefore Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz/5GHz WLAN function and Bluetooth function.

Mode 1: EUT (CTX) with 2.4GHz WLAN and BT function – Slate Mode

Mode 2: EUT (CTX) with 5GHz WLAN and BT function – Slate Mode

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

For AC Power Conducted Emissions and Radiated Emissions Below 1GHz

Support Unit	Brand	Model	FCC ID
RFID Card	-	-	-

For Radiated Emissions Above 1GHz

N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.


Power Parameters:

Test Software Version	DRTU , version 1.6.4-726		
Frequency	2402 MHz	2442 MHz	2480 MHz
Power Parameters	37	37	37

3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.10. Duty Cycle

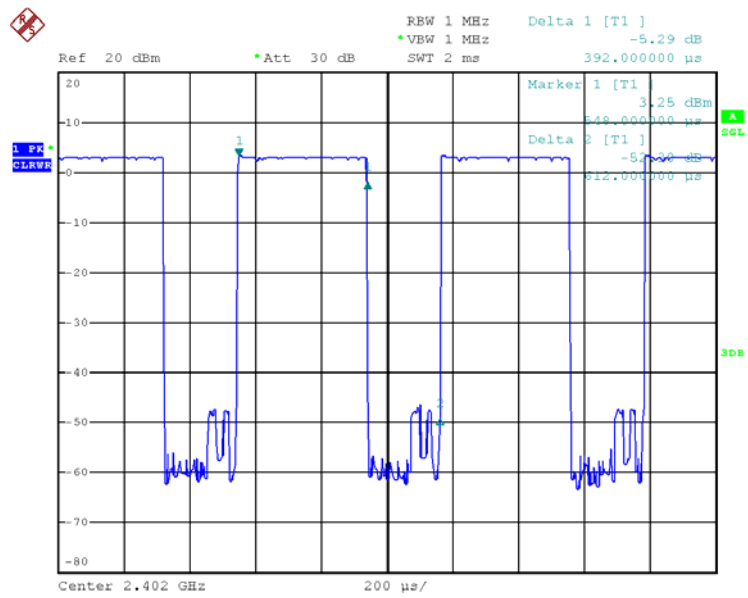

Date: 3.OCT.2013 23:36:04

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions

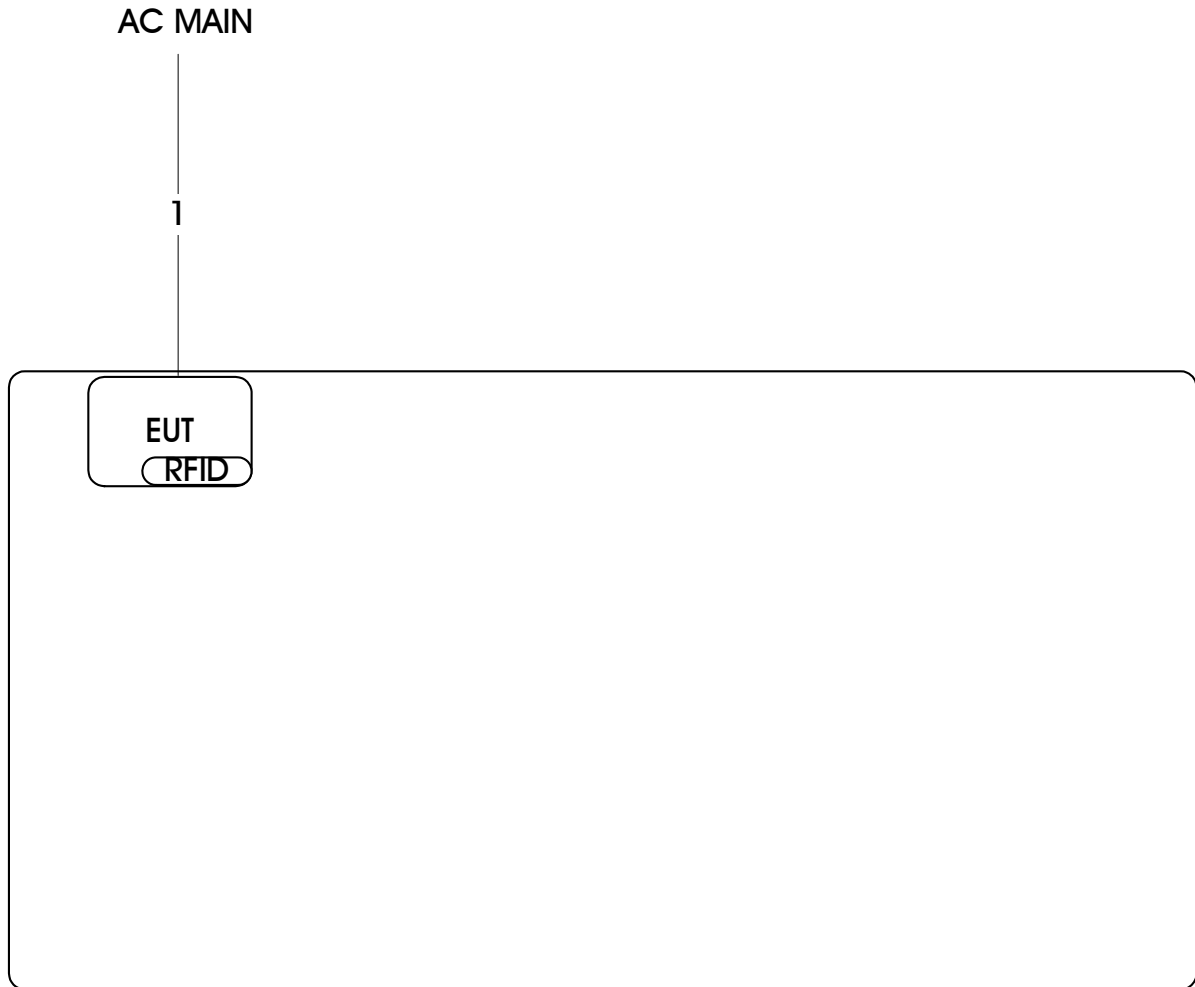

Item	Connection	Shielded	Length(m)	Remark
1	Power Cable	No	2.6m	-


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

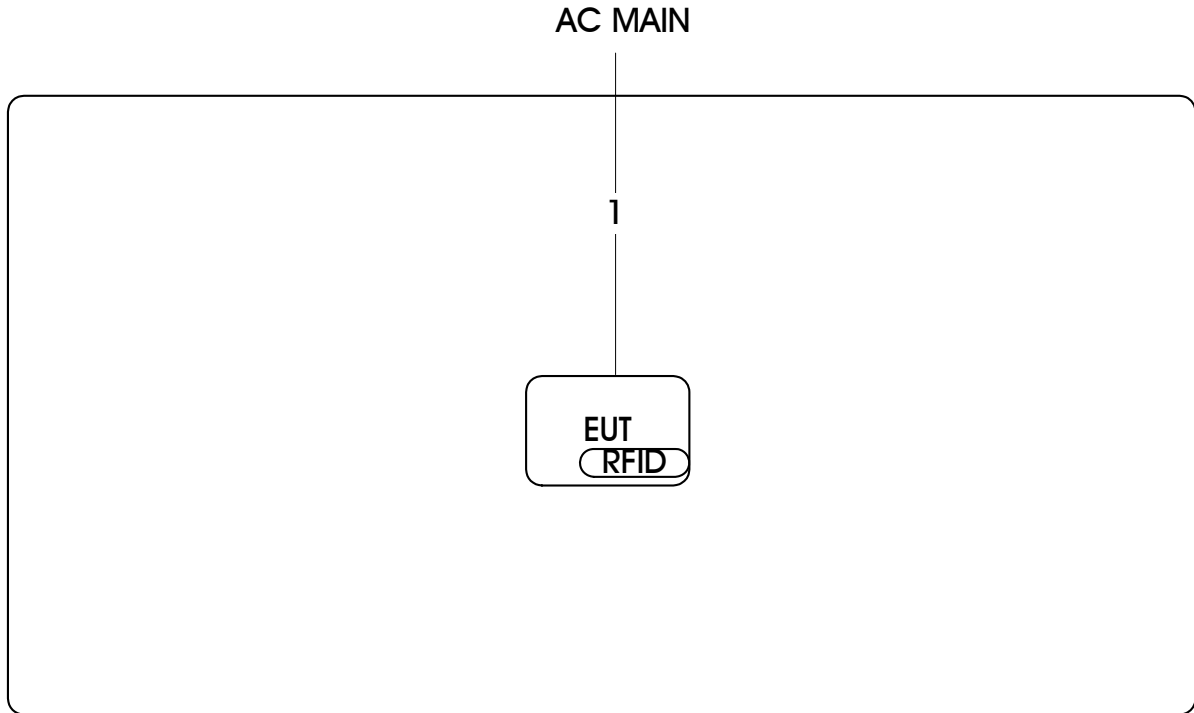

Item	Connection	Shielded	Length(m)	Remark
1	Power Cable	No	2.6m	-

Test Configuration: above 1GHz

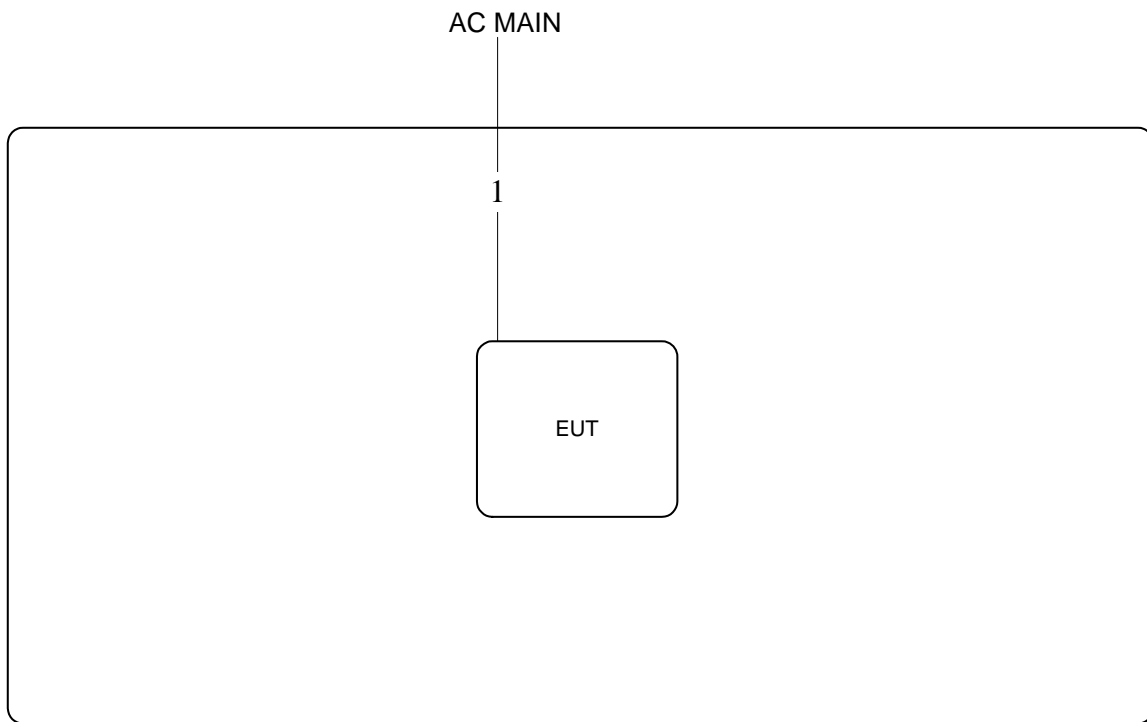

Item	Connection	Shielded	Length(m)	Remark
1	Power Cable	No	2.6m	-

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

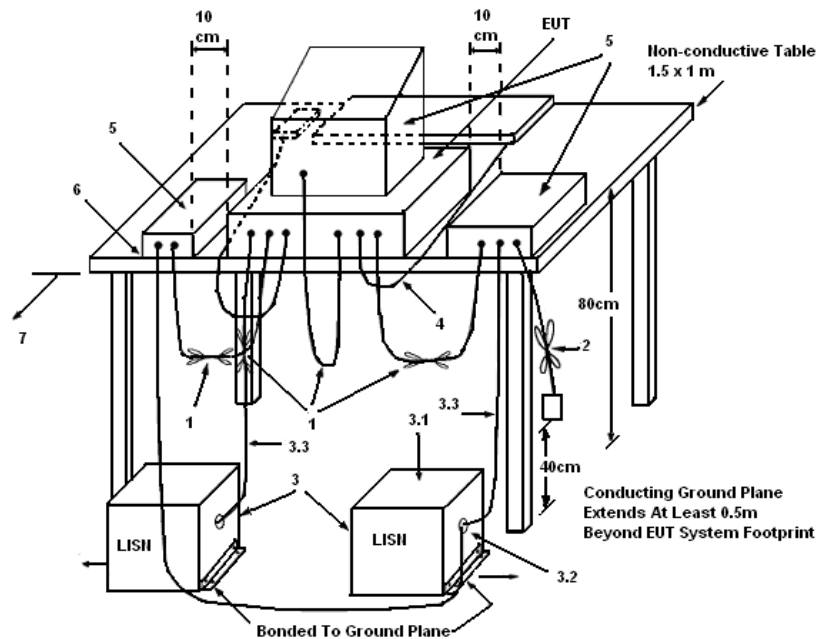

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	48%
Test Engineer	Sin Chang	Phase	Line
Configuration	Mode 1		

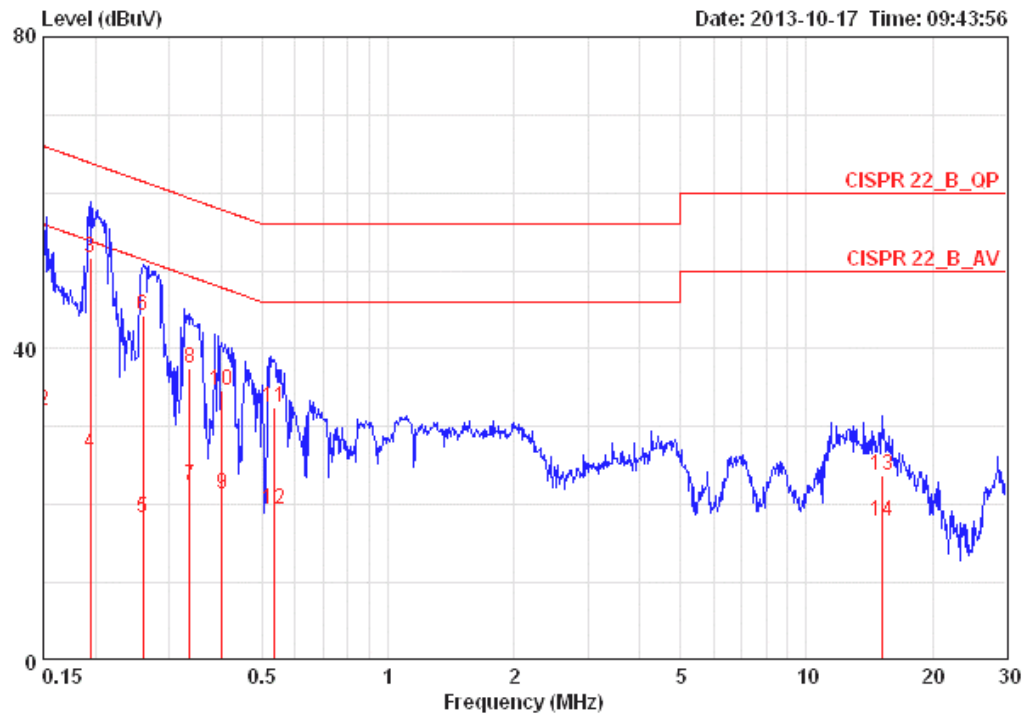

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15000	47.32	-18.68	66.00	46.99	0.15	0.18	LINE	QP
2	0.15000	32.09	-23.91	56.00	31.76	0.15	0.18	LINE	AVERAGE
3	0.19447	51.66	-12.19	63.84	51.31	0.15	0.20	LINE	QP
4	0.19447	26.66	-27.19	53.84	26.31	0.15	0.20	LINE	AVERAGE
5	0.26026	18.33	-33.09	51.42	17.98	0.15	0.20	LINE	AVERAGE
6	0.26026	44.24	-17.18	61.42	43.89	0.15	0.20	LINE	QP
7	0.33562	22.51	-26.80	49.31	22.16	0.15	0.20	LINE	AVERAGE
8	0.33562	37.50	-21.81	59.31	37.15	0.15	0.20	LINE	QP
9	0.40187	21.47	-26.34	47.81	21.12	0.15	0.20	LINE	AVERAGE
10	0.40187	34.73	-23.08	57.81	34.38	0.15	0.20	LINE	QP
11	0.53498	32.50	-23.50	56.00	32.15	0.15	0.20	LINE	QP
12	0.53498	19.38	-26.62	46.00	19.03	0.15	0.20	LINE	AVERAGE
13	15.146	23.73	-36.27	60.00	22.83	0.49	0.41	LINE	QP
14	15.146	17.82	-32.18	50.00	16.92	0.49	0.41	LINE	AVERAGE

Temperature	24°C	Humidity	48%
Test Engineer	Sin Chang	Phase	Neutral
Configuration	Mode 1		

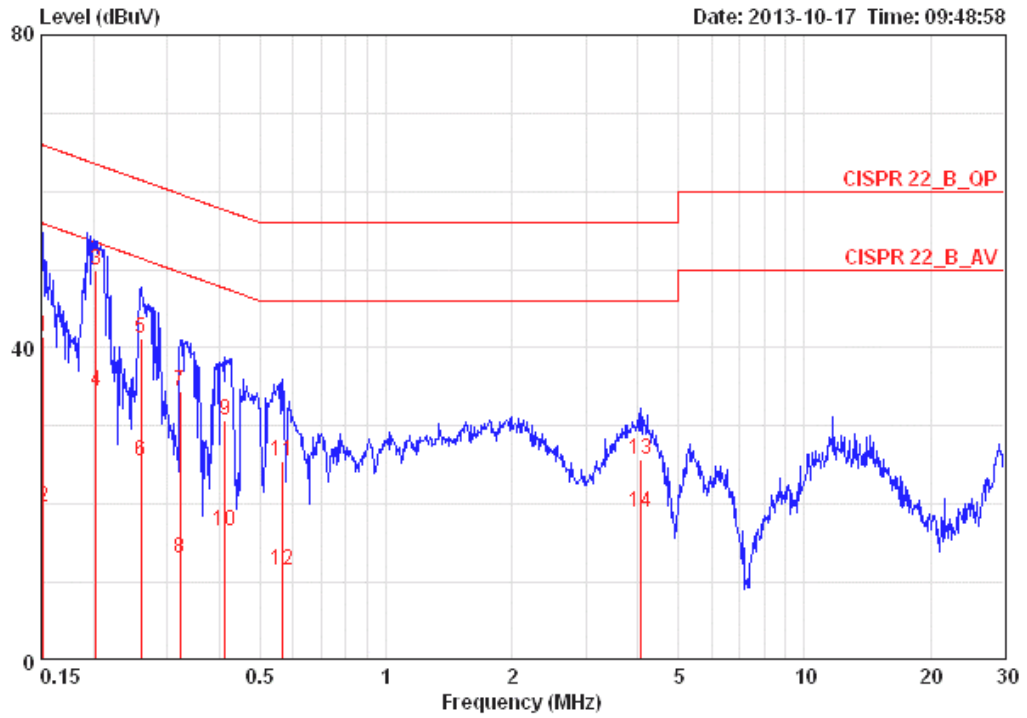

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15160	41.32	-24.59	65.91	41.07	0.07	0.18	NEUTRAL	QP
2	0.15160	19.57	-36.34	55.91	19.32	0.07	0.18	NEUTRAL	AVERAGE
3	0.20289	49.90	-13.59	63.49	49.63	0.07	0.20	NEUTRAL	QP
4	0.20289	34.34	-19.15	53.49	34.07	0.07	0.20	NEUTRAL	AVERAGE
5	0.26026	41.23	-20.19	61.42	40.96	0.07	0.20	NEUTRAL	QP
6	0.26026	25.48	-25.94	51.42	25.21	0.07	0.20	NEUTRAL	AVERAGE
7	0.32169	34.55	-25.11	59.66	34.28	0.07	0.20	NEUTRAL	QP
8	0.32169	13.01	-36.65	49.66	12.74	0.07	0.20	NEUTRAL	AVERAGE
9	0.41266	30.82	-26.77	57.59	30.55	0.07	0.20	NEUTRAL	QP
10	0.41266	16.66	-30.93	47.59	16.39	0.07	0.20	NEUTRAL	AVERAGE
11	0.56409	25.43	-30.57	56.00	25.16	0.07	0.20	NEUTRAL	QP
12	0.56409	11.51	-34.49	46.00	11.24	0.07	0.20	NEUTRAL	AVERAGE
13	4.070	25.75	-30.25	56.00	25.32	0.13	0.30	NEUTRAL	QP
14	4.070	19.00	-27.00	46.00	18.57	0.13	0.30	NEUTRAL	AVERAGE

Note: Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 9.2.2.
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

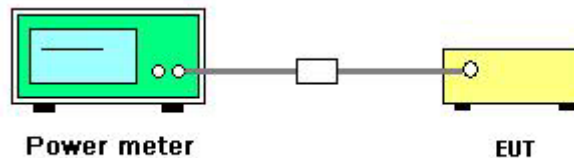

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	GFSK
Test Date	Oct. 03, 2013		

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	3.18	30.00	Complies
20	2442 MHz	3.94	30.00	Complies
39	2480 MHz	4.22	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	5-30 % greater than the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test procedures refer KDB 558074 D01 v03r01 section 10.2 Method PKPSD (peak PSD) and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

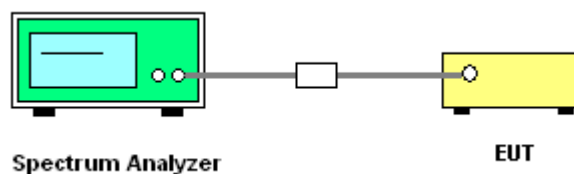

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density


Temperature	25°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	GFSK

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
0	2402 MHz	-11.15	8.00	Complies
20	2442 MHz	-10.46	8.00	Complies
39	2480 MHz	-9.79	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

Power Density Plot on Configuration Bluetooth / 2480 MHz

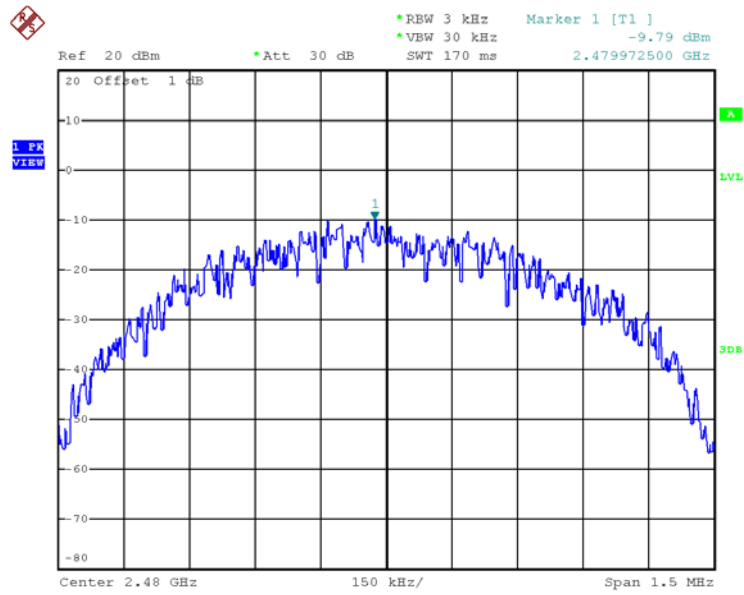

Date: 3.OCT.2013 23:30:11

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 5.1.1 EBW Measurement Procedure
3. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

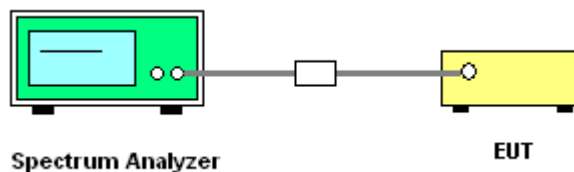

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth


Temperature	25°C	Humidity	60%
Test Engineer	Magic Lai	Configurations	GFSK

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
0	2402 MHz	0.65	1.06	500	Complies
20	2442 MHz	0.64	1.05	500	Complies
39	2480 MHz	0.66	1.06	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

6 dB Bandwidth Plot on Configuration Bluetooth / 2442 MHz

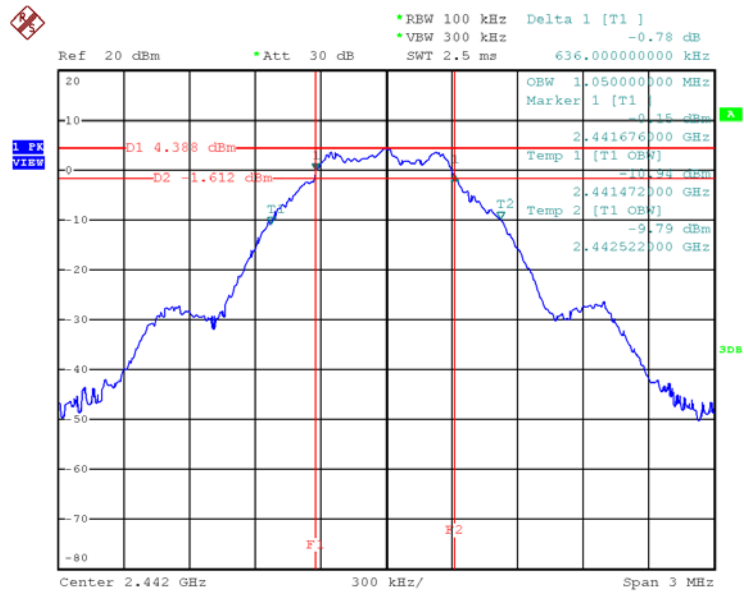

Date: 3.OCT.2013 23:32:57

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

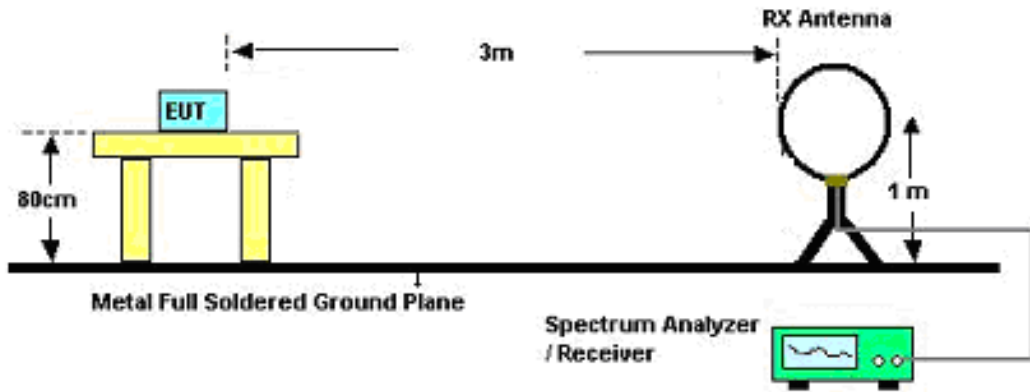

For Radiated Emissions: 30MHz~1GHz

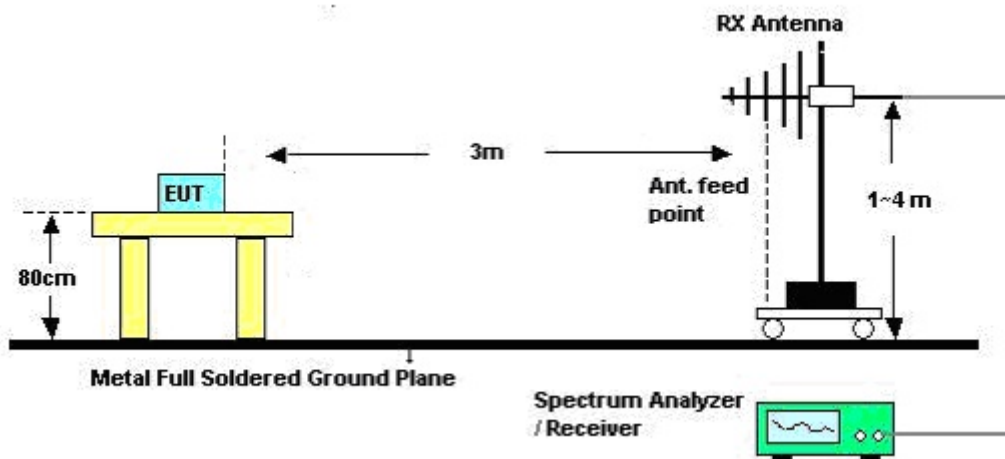

For Radiated Emissions: Above 1GHz

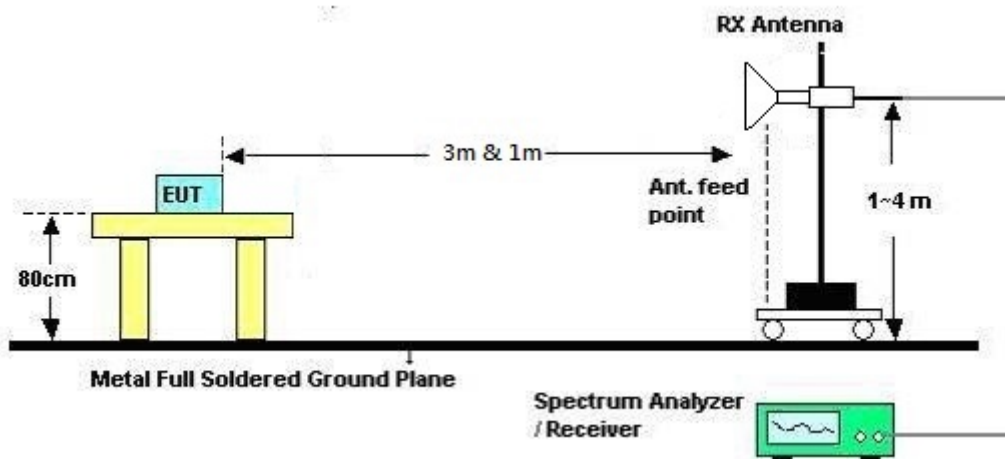

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	40%
Test Engineer	YC Chen	Test Date	Oct. 16, 2013
Configurations	Mode 1 / CTX		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	40%
Test Engineer	YC Chen	Configurations	Mode 1 / CTX

Horizontal

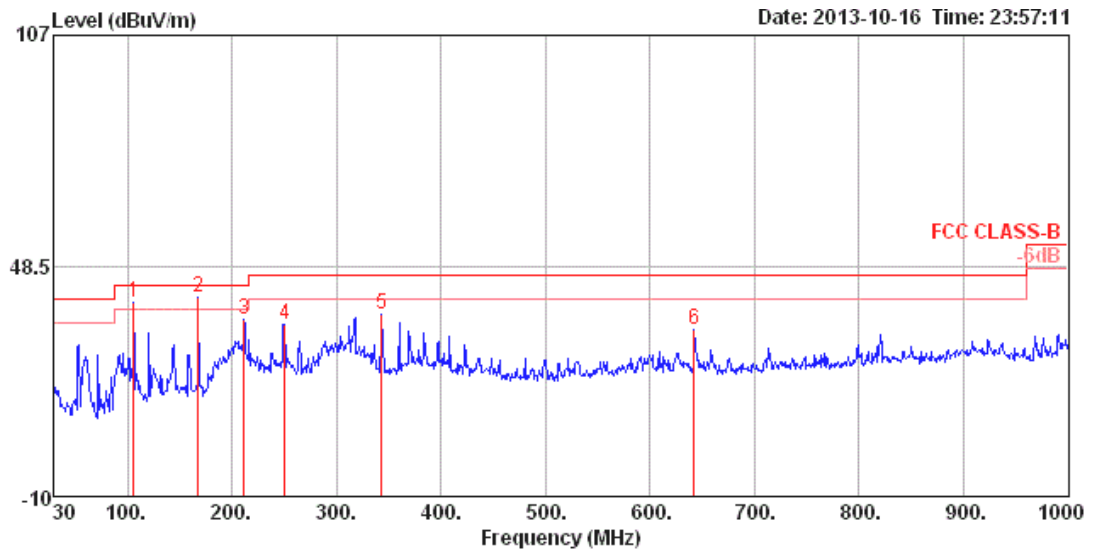

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	105.66	39.42	43.50	-4.08	58.74	1.22	11.03	31.57	300	276	HORIZONTAL Peak
2	167.74	40.35	43.50	-3.15	61.06	1.57	9.25	31.53	200	309	HORIZONTAL Peak
3	211.39	34.91	43.50	-8.59	56.11	1.78	8.44	31.42	200	131	HORIZONTAL Peak
4	250.19	33.63	46.00	-12.37	51.31	1.90	11.91	31.49	200	155	HORIZONTAL Peak
5	343.31	36.21	46.00	-9.79	51.20	2.30	14.06	31.35	100	53	HORIZONTAL Peak
6	642.07	32.12	46.00	-13.88	41.68	3.21	18.68	31.45	100	152	HORIZONTAL Peak

Vertical

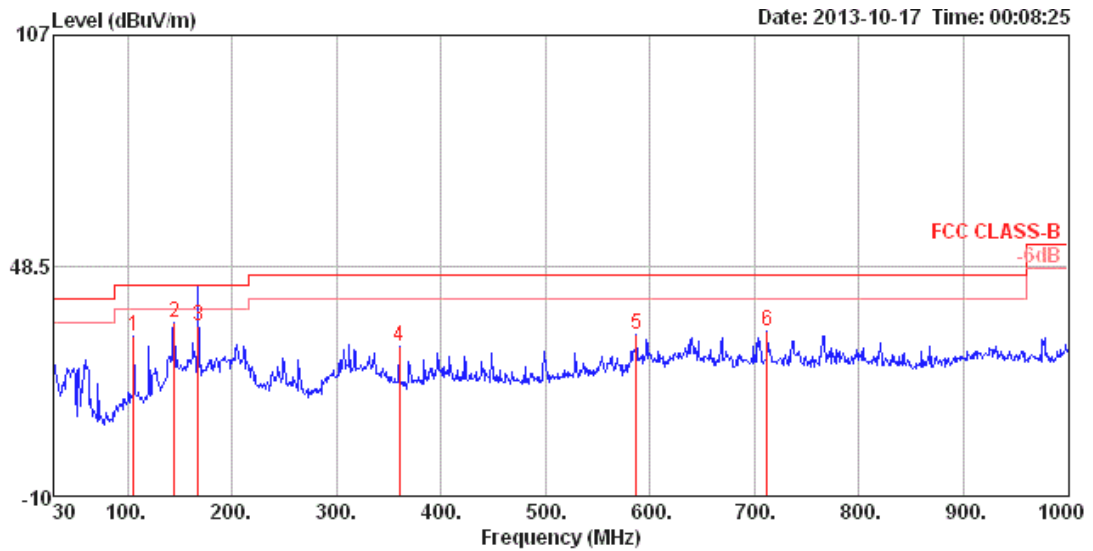

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	105.66	30.57	43.50	-12.93	49.89	1.22	11.03	31.57	100	230	VERTICAL Peak
2	144.46	34.07	43.50	-9.43	53.67	1.43	10.51	31.54	100	131	VERTICAL Peak
3	167.74	33.16	43.50	-10.34	53.87	1.57	9.25	31.53	100	167	VERTICAL QP
4	359.80	28.11	46.00	-17.89	42.43	2.35	14.66	31.33	100	198	VERTICAL Peak
5	586.78	30.96	46.00	-15.04	40.75	3.07	18.34	31.20	100	135	VERTICAL Peak
6	711.91	31.89	46.00	-14.11	40.59	3.43	19.14	31.27	100	185	VERTICAL Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	25°C	Humidity	40%
Test Engineer	YC Chen	Configurations	Channel 0
Test Date	Oct. 01, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.82	31.54	54.00	-22.46	27.53	5.85	33.36	35.20	Average	100	334	VERTICAL
2	4803.93	46.03	74.00	-27.97	42.02	5.85	33.36	35.20	Peak	100	334	VERTICAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4803.92	31.01	54.00	-22.99	27.00	5.85	33.36	35.20	Average	100	275	HORIZONTAL
2	4804.48	45.11	74.00	-28.89	41.10	5.85	33.36	35.20	Peak	100	275	HORIZONTAL



Temperature	25°C	Humidity	40%
Test Engineer	YC Chen	Configurations	Channel 20
Test Date	Oct. 01, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.68	32.41	54.00	-21.59	28.21	5.92	33.48	35.20	Average	100	249	HORIZONTAL
2	4881.81	45.99	74.00	-28.01	41.79	5.92	33.48	35.20	Peak	100	249	HORIZONTAL
3	7326.82	35.56	54.00	-18.44	27.34	7.14	36.51	35.43	Average	100	116	HORIZONTAL
4	7326.15	49.64	74.00	-24.36	41.42	7.14	36.51	35.43	Peak	100	116	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4881.07	46.25	74.00	-27.75	42.05	5.92	33.48	35.20	Peak	100	187	VERTICAL
2	4881.59	32.27	54.00	-21.73	28.07	5.92	33.48	35.20	Average	100	187	VERTICAL
3	7326.24	35.46	54.00	-18.54	27.24	7.14	36.51	35.43	Average	100	303	VERTICAL
4	7326.87	49.48	74.00	-24.52	41.26	7.14	36.51	35.43	Peak	100	303	VERTICAL



Temperature	25°C	Humidity	40%
Test Engineer	YC Chen	Configurations	Channel 39
Test Date	Oct. 01, 2013		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4959.82	33.01	54.00	-20.99	28.57	6.00	33.64	35.20	Average	100	231	HORIZONTAL
2	4960.18	46.70	74.00	-27.30	42.26	6.00	33.64	35.20	Peak	100	231	HORIZONTAL
3	7440.16	35.62	54.00	-18.38	27.21	7.20	36.69	35.48	Average	100	346	HORIZONTAL
4	7440.41	49.85	74.00	-24.15	41.44	7.20	36.69	35.48	Peak	100	346	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	4959.75	47.01	74.00	-26.99	42.57	6.00	33.64	35.20	Peak	100	90	VERTICAL
2	4959.92	32.93	54.00	-21.07	28.49	6.00	33.64	35.20	Average	100	90	VERTICAL
3	7439.67	35.53	54.00	-18.47	27.12	7.20	36.69	35.48	Average	100	207	VERTICAL
4	7439.70	50.38	74.00	-23.62	41.97	7.20	36.69	35.48	Peak	100	207	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB 558074 D01 v03r01 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.
2. The radiated emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.
Only worst data of each operating mode is presented.

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	40%
Test Engineer	YC Chen	Configurations	Channel 0, 20, 39
Test Date	Oct. 01, 2013		

Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2362.00	48.40	54.00	-5.60	16.36	4.07	27.97	0.00	Average	100	81	HORIZONTAL
2	2362.00	56.51	74.00	-17.49	24.47	4.07	27.97	0.00	Peak	100	81	HORIZONTAL
3	2402.00	97.05			64.87	4.09	28.09	0.00	Average	100	81	HORIZONTAL
4	2402.00	101.82			69.64	4.09	28.09	0.00	Peak	100	81	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 20

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2379.60	47.14	54.00	-6.86	15.05	4.08	28.01	0.00	Average	108	100	VERTICAL
2	2379.60	56.92	74.00	-17.08	24.83	4.08	28.01	0.00	Peak	108	100	VERTICAL
3	2442.00	98.11			65.80	4.13	28.18	0.00	Average	108	100	VERTICAL
4	2442.00	103.01			70.70	4.13	28.18	0.00	Peak	108	100	VERTICAL
5	2499.80	58.99	74.00	-15.01	26.52	4.17	28.30	0.00	Peak	108	100	VERTICAL
6	2499.90	51.52	54.00	-2.48	19.05	4.17	28.30	0.00	Average	108	100	VERTICAL

Item 3, 4 are the fundamental frequency at 2442 MHz.

Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	2480.00	98.62			66.20	4.16	28.26	0.00	Average	103	81	VERTICAL
2	2480.00	103.65			71.23	4.16	28.26	0.00	Peak	103	81	VERTICAL
3	2483.50	49.88	54.00	-4.12	17.46	4.16	28.26	0.00	Average	103	81	VERTICAL
4	2483.50	59.53	74.00	-14.47	27.11	4.16	28.26	0.00	Peak	103	81	VERTICAL


Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band
Plot on Configuration / Reference Level

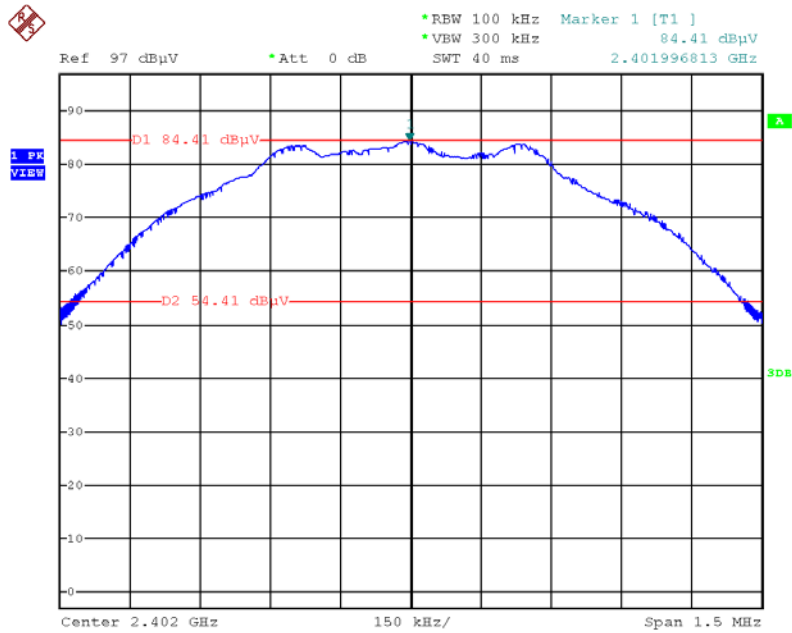


Date: 1.OCT.2013 23:39:22

Plot on Configuration For Bluetooth 4.0 / Channel 0 / 30MHz~2400MHz (down 30dBc)

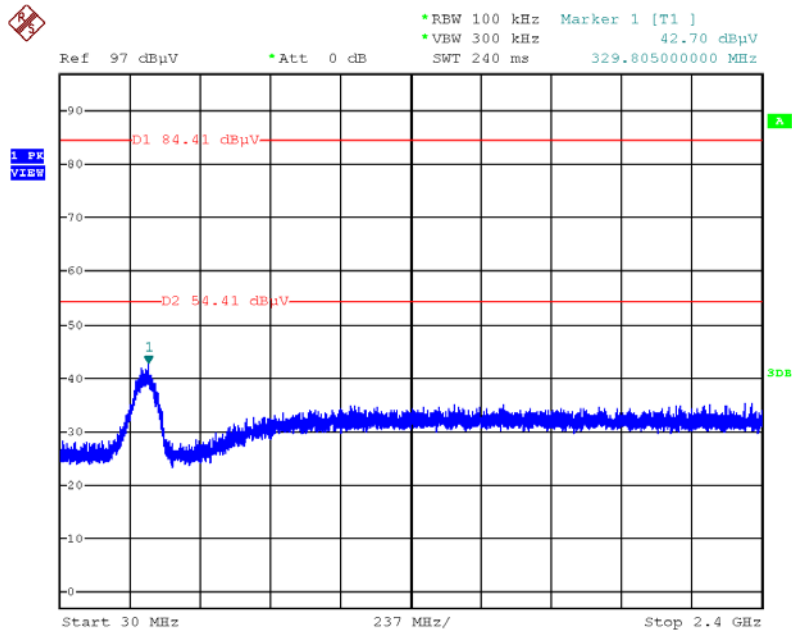


Date: 1.OCT.2013 23:40:10

Plot on Configuration For Bluetooth 4.0 / Channel 0 / 2500MHz~26500MHz (down 30dBc)

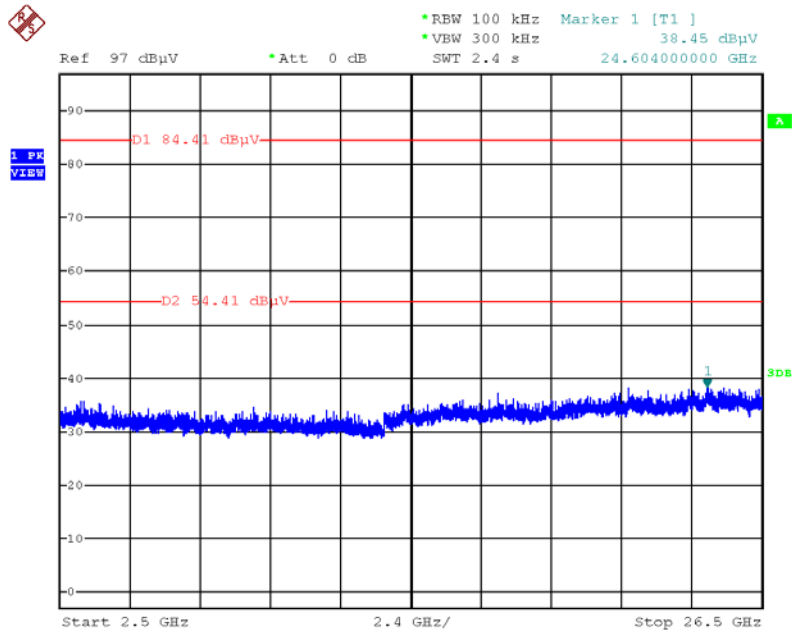


Date: 1.OCT.2013 23:41:14

Plot on Configuration For Bluetooth 4.0 / Channel 39 / 30MHz~2400MHz (down 30dBc)

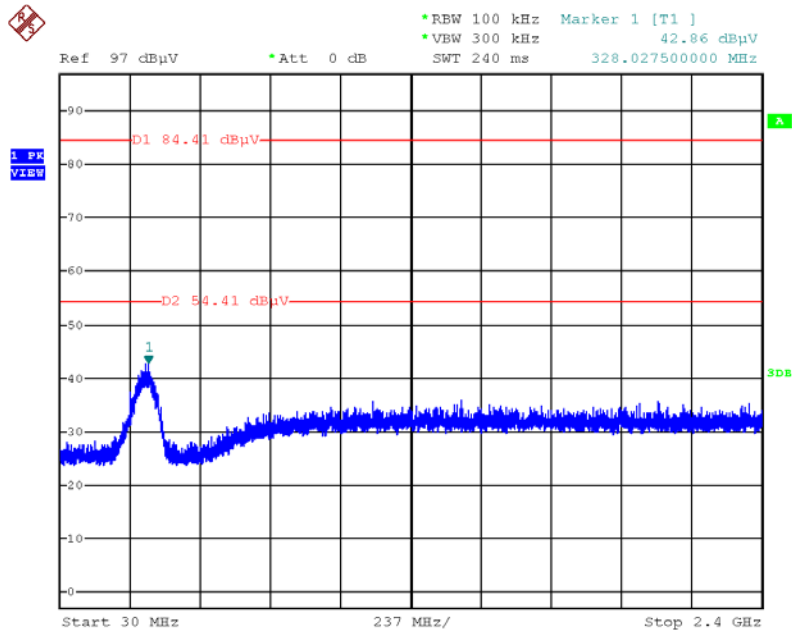

Date: 1.OCT.2013 23:43:33

Plot on Configuration For Bluetooth 4.0 / Channel 39 / 2500MHz~26500MHz (down 30dBc)

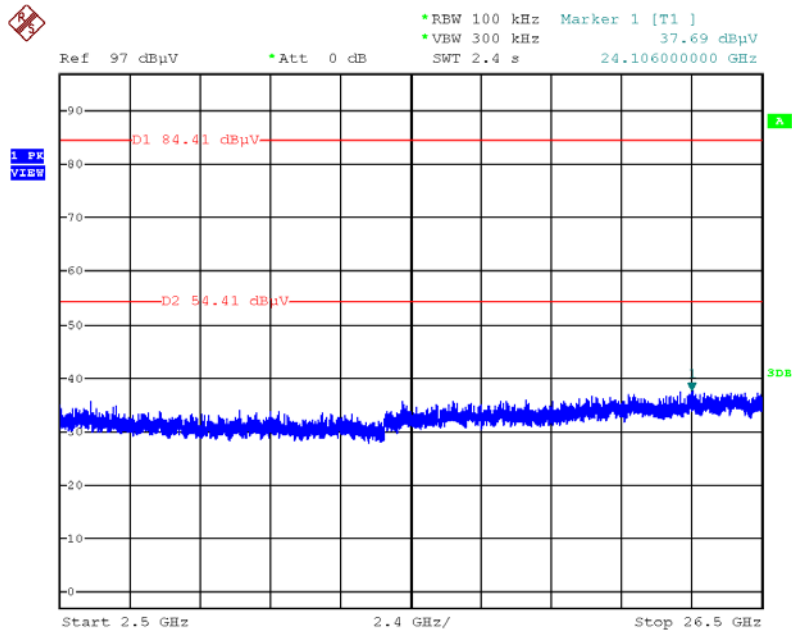

Date: 1.OCT.2013 23:42:35

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Jul. 17, 2013	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 30, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz - 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz - 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz - 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. MEASUREMENT UNCERTAINTY

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1= AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060
Combined standard uncertainty $U_c(y)$				1.2
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				2.4

Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	± 0.173	dB	K=1	0.086
Cable loss	± 0.174	dB	K=2	0.087
Antenna gain	± 0.169	dB	K=2	0.084
Site imperfection	± 0.433	dB	Triangular	0.214
Pre-amplifier gain	± 0.366	dB	K=2	0.183
Transmitter antenna	± 1.200	dB	Rectangular	0.600
Signal generator	± 0.461	dB	Rectangular	0.231
Mismatch	± 0.080	dB	U-shape	0.040
Spectrum analyzer	± 0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.778
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.555

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.191	dB	K=1	0.095
Cable loss	±0.169	dB	K=2	0.084
Antenna gain	±0.191	dB	K=2	0.096
Site imperfection	±0.582	dB	Triangular	0.291
Pre-amplifier gain	±0.304	dB	K=2	0.152
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.839
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.678

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	±0.186	dB	K=1	0.093
Cable loss	±0.167	dB	K=2	0.083
Antenna gain	±0.190	dB	K=2	0.095
Site imperfection	±0.488	dB	Triangular	0.244
Pre-amplifier gain	±0.269	dB	K=2	0.134
Transmitter antenna	±1.200	dB	Rectangular	0.600
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				1.771
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				3.541

Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of x_i			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	±0.038	dB	K=2	0.019
Attenuator	±0.047	dB	K=2	0.024
Power Meter specification	±0.300	dB	Triangular	0.150
Power Sensor specification	±0.300	dB	Rectangular	0.150
Signal generator	±0.461	dB	Rectangular	0.231
Mismatch	±0.080	dB	U-shape	0.040
Spectrum analyzer	±0.500	dB	Rectangular	0.250
Combined standard uncertainty $U_c(y)$				0.863
Measuring uncertainty for a level of confidence of 95% $U=2U_c(y)$				1.726