

RADIO TEST REPORT


(for Bluetooth classic)

Project No. : JB-Z0644
Client : Sony Corporation
Client's Address : 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Product Name : Wireless Noise Canceling Stereo Headset
Model No. : WH-1000XM4
FCC ID : AK8WH1000XM4
Test Standard : 47 CFR Part 15 Subpart C
Sample Receipt Date : November 13, 2019
Test Date : November 19, 2019 to November 29, 2019
Report Date : December 12, 2019
Test Result : Complied

Notice:

- * These test results relate only to the items (combination equipment, test configuration, operation condition etc.) tested.
- * This report shall not be reproduced except in full, without written approval of the laboratory.
- * This report must not be used by the client to claim product endorsement by A2LA or any agency of the U.S.
- * Hereby certify that no party is subject to a denial of federal benefits pursuant to section 5301 of the Anti-Drug Abuse Act.
- * All test results are traceable to the national and / or international standards.
- * The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory.

Reported by:



Takanori Oho
Technical Manager
EMC/RF Test Laboratory, Main Lab.
Design Technology Division

Approved Signatory:



Teruki Kurihara
Technical Manager
EMC/RF Test Laboratory, Main Lab.
Design Technology Division



Format No.: NV1-1-01 Version 5.0

TABLE OF CONTENTS

1. General Information	3
1.1. Description of Equipment Under Test (EUT).....	3
1.2. Summary of Test Result.....	4
1.3. Tested Methodology	4
1.4. Measurement Procedures	4
1.5. Test Location	6
1.6. Uncertainty	6
2. Test Specification.....	7
2.1. Validation	7
2.2. Operating Condition.....	7
2.3. Special Accessories	7
2.4. EUT Modifications	7
2.5. Configuration of EUT System.....	8
2.6. View of Measurement Facility.....	9
3. Test Data.....	10
3.1. 20dB Bandwidth.....	10
3.2. Carrier Frequency Separation.....	12
3.3. Number of Hopping Frequencies	13
3.4. Time of Occupancy (Dwell Time).....	14
3.5. Maximum Peak Conducted Output Power.....	17
3.6. Radiated Spurious Emissions.....	18
3.7. Conducted Spurious Emissions for Band Edge.....	59
4. Method of Calculation.....	60
4.1. Time of Occupancy (Dwell Time).....	60
4.2. Maximum Peak Conducted Output Power.....	60
4.3. Radiated Spurious Emissions.....	61
4.4. Conducted Spurious Emissions for Band Edge.....	61
5. List of Test Equipment	62
5.1. Antenna-port Conducted Measurements.....	62
5.2. Radiated Spurious Emissions.....	62
6. Photographs of test setup	63
6.1. Antenna-port Conducted Measurements Photo(s)	63
6.2. Radiated Spurious Emissions Photo(s).....	64

Note

- indicates that the listed condition, standard or equipment is applicable for this report.
-indicates that the listed condition, standard or equipment is not applicable for this report.

Revision History

Revision	Date	Overview	Page
JB-Z0644 (Original)	December 12, 2019	-	-

Disclaimer

This report includes the information provided by the customer as below;

- Cover page : Client and product related information
- Clause 1.1 : Description of Device Under Test (EUT)
- Clause 2 : Operating Mode / conditions

* The laboratory is not responsible for results affected by the above information.

1. General Information

1.1. Description of Equipment Under Test (EUT)

General Specification

Test Sample Condition : Prototype Pre-production Mass-production
 Product Name : Wireless Noise Canceling Stereo Headset
 Trade Name : SONY
 Model No. : WH-1000XM4
 Serial No. : 1100090, 1100209
 Power Rating of the EUT : DC 3.7 V (The EUT was supplied with the power from the built-in battery)

Similar model(s) to be covered by this report

Model No. : None

Radio Specification

Function of the Equipment : Transceiver
 Operating Frequency : 2402 - 2480 MHz
 Modulation Type : FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK)
 Channel Spacing : 1 MHz
 Channel Bandwidth : 1 MHz
 Number of channels : 79
 Antenna Type : Chip Antenna
 Antenna Connector Type : None
 Antenna Gain : 1.6 dBi
 Operating Temperature : +0 to +40 deg.C

1.2. Summary of Test Result

Test Item	Test Method	Worst Margin	Results	Note
AC Power-line Conducted Emissions	-	-	N/A	*2
20dB Bandwidth	Conducted	Refer to the test data	Complied	-
Carrier Frequency Separation	Conducted	Refer to the test data	Complied	-
Number of Hopping Frequencies	Conducted	Refer to the test data	Complied	-
Time of Occupancy (Dwell Time)	Conducted	Refer to the test data	Complied	-
Maximum Peak Conducted Output Power	Conducted	15.10 dB	Complied	-
Radiated Spurious Emissions	Radiated	11.4 dB (AV) 4960.000 MHz Horizontal	Complied	-
Conducted Spurious Emissions for Band Edge	Conducted	39.76 dB 2399.99 MHz	Complied	*1

Note

- *1: Conducted Spurious Emissions measurement was tested for the only frequencies in the non-restricted carrier band edges, since the spurious emissions in other non-restricted band were complied with Radiated Spurious Emissions measurement.
- *2: This item was not applied to the EUT since its transmission is stopped when the battery is being charged by the PC connected to AC Power-line.

Other requirements

Part 15.31(e) Supply voltage requirement

: Complied (The EUT was tested with a new battery.)

Part 15.203 / 212 Antenna requirement

: Complied (The EUT has an internal antenna which cannot be replaced by users.)

1.3. Tested Methodology

Test Standard : 47 CFR Part15 Subpart C

Test Method : ANSI C63.10 - 2013
KDB 558074 D01 15.247 Meas Guidance v05r02

Test Condition

Radiated Spurious Emissions

Test Distance : 3 m 10m (9 kHz to 30 MHz)
 3 m 10m (30 MHz to 1000 MHz)
 3 m (1 GHz to 26.5 GHz)

Dimensions of the EUT table : 0.8 m (below 1 GHz) or 1.5 m (above 1 GHz) height, 1.5 m width and 1 m depth.

Dimensions of validated test volume : 2 m diameter, 3 m top height, 0.5 m bottom height.

1.4. Measurement Procedures

We performed the measurements in accordance with NV3-12, available upon the request.

- No deviation
 Deviation from the above procedure

The summary of the above procedure is mentioned below

Antenna-port Conducted Measurements

1. Antenna-port of the EUT was connected to the power sensor (Maximum Peak Conducted Output Power) or the spectrum analyzer. (other test items).
2. For each EUT operation mode, the Antenna-port Conducted Measurements were measured with the power sensor or the spectrum analyzer.

Test Item	Detector	RBW
Antenna-port Conducted Measurements		
20dB Bandwidth	Peak	30 kHz
Carrier Frequency Separation	Peak	100 kHz
Number of Hopping Frequencies	Peak	100 kHz
Time of Occupancy (Dwell Time)	Peak	1 MHz
Maximum Peak Conducted Output Power	Peak	-
Conducted Spurious Emissions for Band Edge	Peak	100 kHz

Radiated Spurious Emissions

1. The non-conductive table (EUT table) made of (FRP, Styrene Foam, other non-conductive material) was placed in the center of the turntable.
2. The EUT was placed on the center of the tabletop.
3. The test antenna was placed away from the EUT at test distance.
4. The limits were compensated the distance factor with follows;
 - 9 kHz to 490 kHz [Limit at 3 m] = [Limit at 300 m] + 40log (300[m] / 3[m])
 - 490 kHz to 30 MHz [Limit at 3 m] = [Limit at 30 m] + 40log (30[m] / 3[m])
5. Find the worst arrangement of the EUT according to follows;
 - Rotating the turntable and/or scanning the antenna.
 - On every condition, exploring the highest emissions with the spectrum analyzer. (9 kHz to 26.5 GHz, peak detector)
6. On the worst arrangement of the EUT found in above, choose the six highest harmonics or spurious emissions on the spectrum data. (*excluding carrier band edges)
The final measurements of all test operating modes carried out on these emissions as follows;

The test antenna and the turntable were performed with follows;

	9 kHz to 30 MHz	30 MHz to 1000 MHz	1 GHz to 26.5 GHz
Antenna	Loop Antenna	Bi-conical Antenna, Log-periodic Antenna	Horn Antenna
Antenna scanning range	1 m, Vertical, 360 degrees	1 m to 4 m, Horizontal and Vertical	1 m to 4 m *, Horizontal and Vertical
Turntable rotating range	360 degrees	360 degrees	360 degrees

*: When the measurement frequencies above 1 GHz, final measurements are performed keeping the antenna in the "cone of radiation" from EUT area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.

Instruments settings were carried out with follows;

	9 kHz to 90 kHz 110 kHz to 490 kHz	90 kHz to 110 kHz 490 kHz to 30 MHz	30 MHz to 1000 MHz	1 GHz to 26.5 GHz
Detector	Peak / Average	Quasi-peak	Quasi-peak	Peak / Average
RBW	200 Hz (6 dB) or 9 kHz (6 dB) *1	200 Hz (6 dB) or 9 kHz (6 dB) *1	120 kHz (6 dB)	1 MHz (6 dB)
VBW	N/A	N/A	N/A	3 MHz (for peak) 10 kHz (for average) *2
Instrument	EMI test receiver	EMI test receiver	EMI test receiver	Spectrum analyzer

*1: When the measurement frequencies below 150 kHz, RBW: 200 Hz was used.

*2: VBW setting (for average) was higher than 1/T. (T is the minimum transmission duration)

7. If the final measurement result exceeded the limit in non-restricted band(excluding carrier band edges), the measurement is carried out additionally with follows:

Measurement points

- Fundamental Frequency
- Frequency that exceeded the limit in non-restricted band (excluding carrier band edges)

	9 kHz to 150 kHz	150 kHz to 30 MHz	30 MHz to 26.5 GHz
Detector	Peak	Peak	Peak
RBW	300 Hz (6 dB) *	10 kHz (6 dB) *	100 kHz (6 dB)
Instrument	Spectrum analyzer	Spectrum analyzer	Spectrum analyzer

*: Correction factor of RBW was compensated to a measurement result by the following formula.

$$\text{C.F. of RBW [dB]} = 10 \cdot \log(100 \text{ kHz} / \text{used RBW})$$

8. Although these tests for below 30MHz were performed other than open field area test site, adequate comparison measurements were confirmed against 30 m open field area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.
- Further these test for above 1GHz were performed test site complied with CISPR 16-1-4.
- In the case of EUT size smaller than the validated test volume, the antenna position is adjusted such that the distance between the EUT and the antenna reference point is identical to the 3m used for the S-VSWR validation measurements. These method based on clause 7.3.1 of CISPR16-1-4 Edition 4, therefore correcting distance factor is not applied.

1.5. Test Location

Test Facility Name : Sony Global Manufacturing & Operations Corporation
EMC/RF Test Laboratory, Main Lab.

Address : 8-4 Shiomi Kisarazu-shi Chiba-ken, 292-0834, Japan

Phone : +81 438 37 2750

A2LA Certificate No. : 3203.01

Cert. Validated Date : October 31, 2021

Antenna-port Conducted Measurements

Shielded Room

4th Site SR1

Radiated Spurious Emissions

Semi-Anechoic chamber

4th Site EMC Site

1.6. Uncertainty

Test Item	Frequency	4th Site SR1
Maximum Conducted Output Power	1 GHz to 6 GHz	± 0.84 dB
Conducted Spurious Emissions	below 6 GHz	± 1.25 dB

Test Item	Frequency	Distance	4th Site	EMC Site
AC Power-line Conducted Emissions	150 kHz to 30 MHz	-	± 3.34 dB	± 3.35 dB
Radiated Emissions	9 kHz to 30 MHz	3m	± 2.60 dB	± 3.13 dB
	30 MHz to 1000 MHz	3m	± 4.96 dB	± 5.26 dB
	1 GHz to 18 GHz	3m	± 5.22 dB	± 5.50 dB
	18 GHz to 26.5 GHz	3m	± 5.36 dB	± 5.63 dB

2. Test Specification

2.1. Validation

The system was configured for testing in a typical (as a customer would normally use it).
The tests were conducted with the worst-case modes as follows.

2.2. Operating Condition

The tests have been carried out the following conditions.

[Transmitting mode]

Test Items	Test Channels	Packet Type *1 *2 *3
Radiated Spurious Emissions (below 1GHz) *4	2402 MHz	BDR : DH5
20dB Bandwidth, Maximum Peak Conducted Output Power, Radiated Spurious Emissions (above 1GHz)	2402 MHz 2441 MHz 2480 MHz	BDR : DH5 EDR : 3DH5
Carrier Frequency Separation, Number of Hopping Frequencies, Time of Occupancy (Dwell Time)	Hopping ON	BDR : DH5 EDR : 3DH5
Conducted Spurious Emissions for Band Edge	2402 MHz	BDR : DH5 EDR : 3DH5

Note

*1: Inquiry mode was not performed based on the result of pre-compliance testing.

*2: The worst packet type has been decided based on the result of maximum duty cycle and pre-compliance testing in the actual product specification.

*3: Packet type for EDR has been decided based on the result of Maximum Peak Conducted Output Power.

*4: The test was performed with the representative mode that had been found as the worst emissions while exploratory testing.

The Software for Operating Mode

Software Name : WCN Combo Tool
Software Version : 2.1749.00

2.3. Special Accessories

Special accessories needed for connecting the EUT to achieve compliance:

Item	Manufacturer	Model No.	Serial No.	Remark
-	-	-	-	-

2.4. EUT Modifications

- No equipment modification to achieve compliance to the standard levels was done during the tests.
 Equipment was modified to achieve compliance to the standard level as below.

Responsible Party Signature

Typed/ Print Name :
Responsible Party :
Position :
Date :

2.5. Configuration of EUT System

Antenna-port Conducted Measurements


[EUT and Associated Equipment (AE)]

Symbol	EUT/AE	Item	Manufacturer	Model No.	Serial No.
A	EUT	Wireless Noise Canceling Stereo Headset	SONY	WH-1000XM4	1100090

[Type of Cable]

Symbol	Description	Identification (Manufacturer etc.)	Shielded Yes / No	Ferrite Core	Length (m)	Bundled
-	-	-	-	-	-	-

[Connecting Diagram]



Radiated Spurious Emissions


[EUT and Associated Equipment (AE)]

Symbol	EUT/AE	Item	Manufacturer	Model No.	Serial No.
A	EUT	Wireless Noise Canceling Stereo Headset	SONY	WH-1000XM4	1100209

[Type of Cable]

Symbol	Description	Identification (Manufacturer etc.)	Shielded Yes / No	Ferrite Core	Length (m)	Bundled
-	-	-	-	-	-	-


[Connecting Diagram]




2.6. View of Measurement Facility

Radiated spurious emissions


< 9 kHz - 30 MHz >

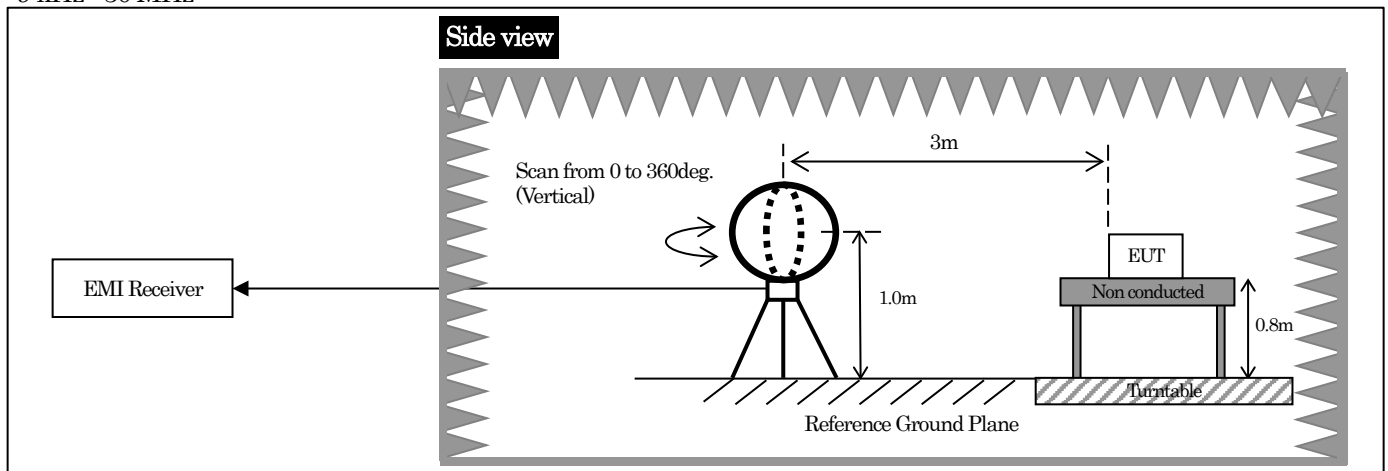

< 30 MHz - 1000 MHz >

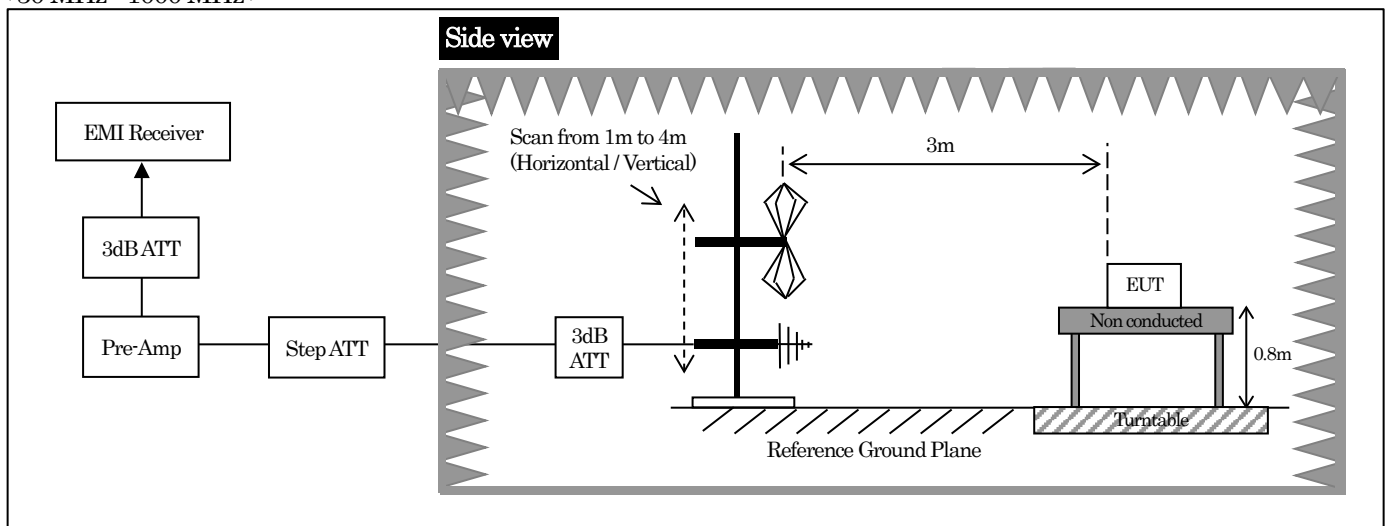

< 1 GHz - 26.5 GHz >

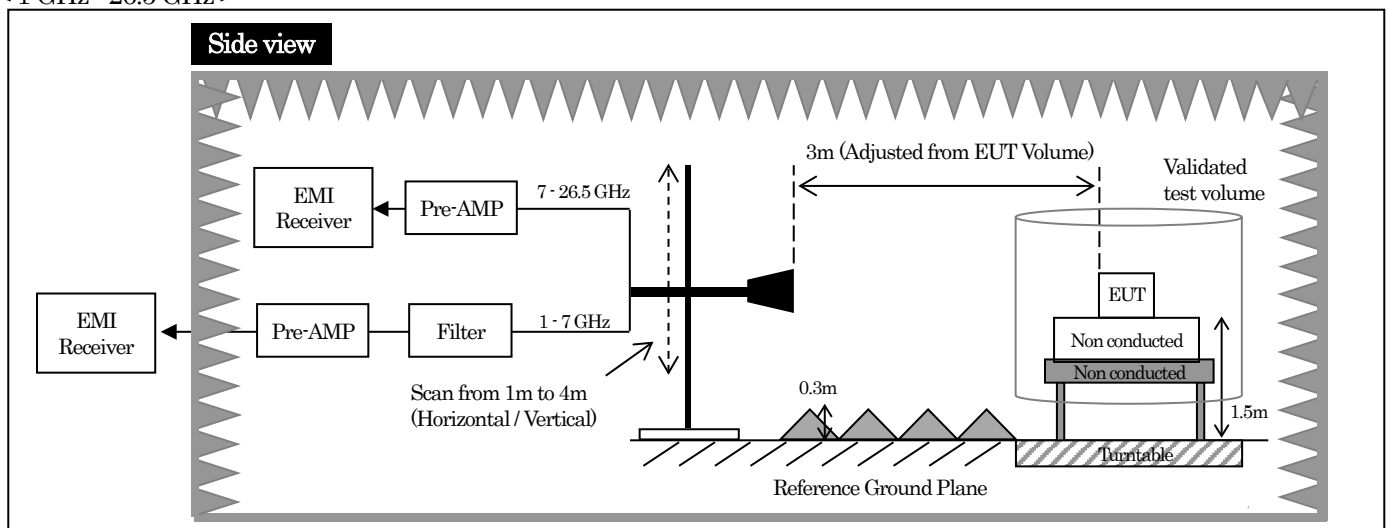

3. Test Data

3.1. 20dB Bandwidth

- 1) Ambient temperature : 23.3 deg.C
- 2) Relative humidity : 62.5 %
- 3) Date of measurement : November 19, 2019
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode		Channel [MHz]	Result [MHz]	Limit [MHz]
BDR	DH5	2402	0.953	-
		2441	0.954	-
		2480	0.954	-
EDR	3DH5	2402	1.279	-
		2441	1.277	-
		2480	1.277	-

[BDR / 2402 MHz]



[BDR / 2441 MHz]



[BDR / 2480 MHz]



[EDR / 2402 MHz]



[EDR / 2441 MHz]




[EDR / 2480 MHz]



3.2. Carrier Frequency Separation

- 1) Ambient temperature : 23.3 deg.C
- 2) Relative humidity : 62.5 %
- 3) Date of measurement : November 19, 2019
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode


Mode		Reading [kHz]	Limit [kHz]
BDR	DH5	1009.2	≧ 636.2
EDR	3DH5	1036.8	≧ 852.8

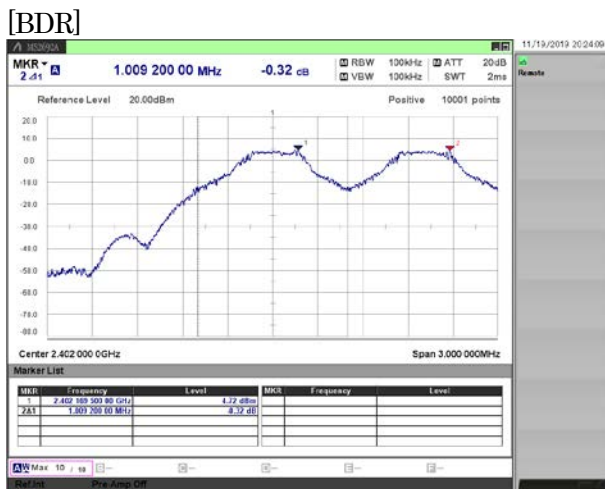

3.3. Number of Hopping Frequencies

- 1) Ambient temperature : 23.3 deg.C
- 2) Relative humidity : 62.5 %
- 3) Date of measurement : November 19, 2019
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode		Number [channel]	Limit [channel]
BDR	DH5	79	≥ 15
EDR	3DH5	79	≥ 15


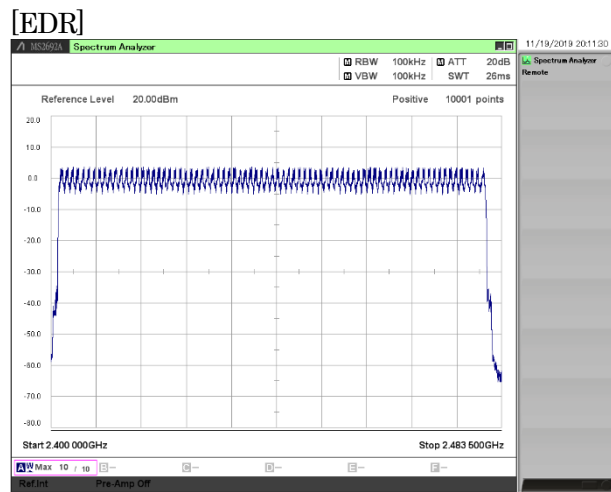


3.4. Time of Occupancy (Dwell Time)



- 1) Ambient temperature : 23.3 deg.C
- 2) Relative humidity : 62.5 %
- 3) Date of measurement : November 19, 2019
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode	Channel [MHz]	Dwell Time [msec]	Cycle [time]	Result [msec]	Limit [msec]	
BDR	DH5	2402	2.87	15.5	281.2	≤ 400.0
		2441	2.87	17.7	321.2	≤ 400.0
		2480	2.87	17.4	315.7	≤ 400.0
EDR	3DH5	2402	2.88	18.0	327.4	≤ 400.0
		2441	2.88	20.4	371.0	≤ 400.0
		2480	2.88	17.9	325.6	≤ 400.0



[BDR / 2402 MHz]

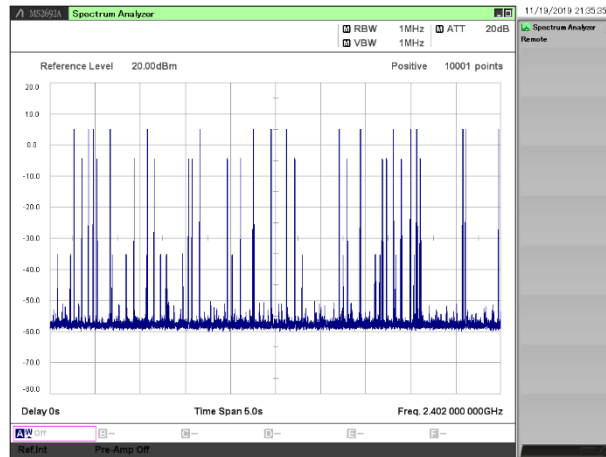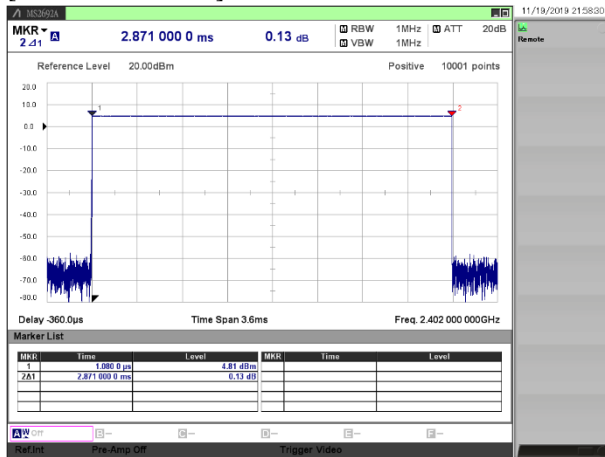



[BDR / 2441 MHz]

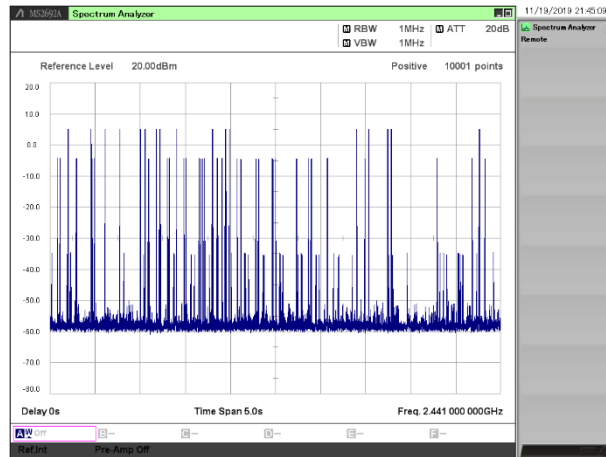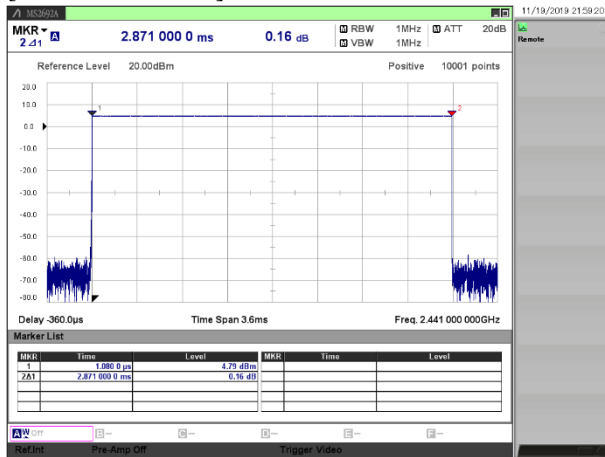



[BDR / 2480 MHz]

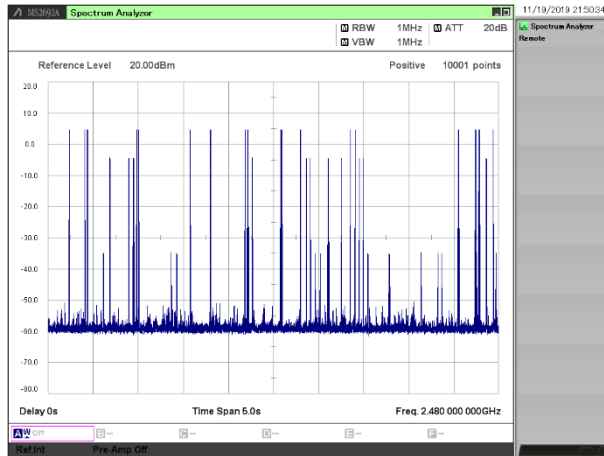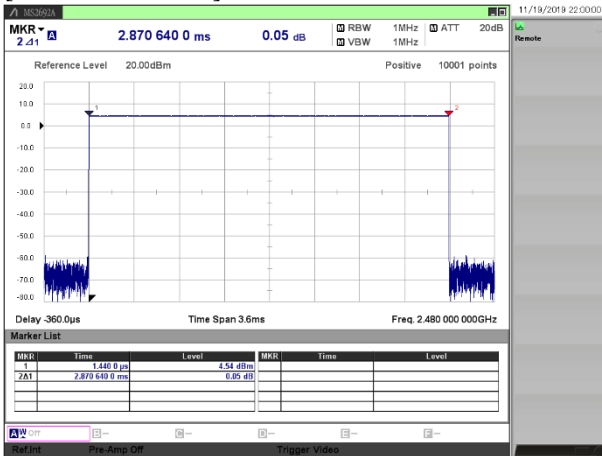



[EDR / 2402 MHz]

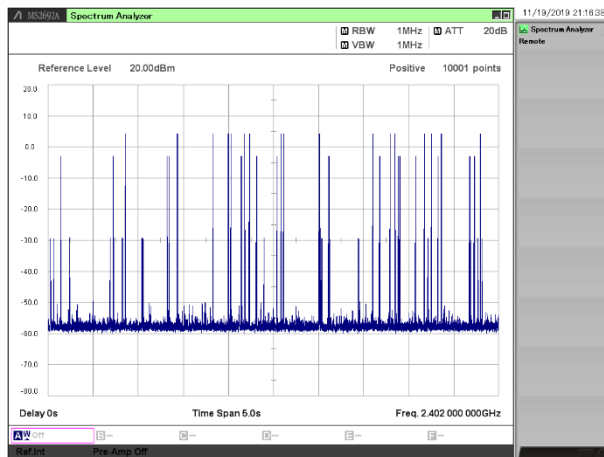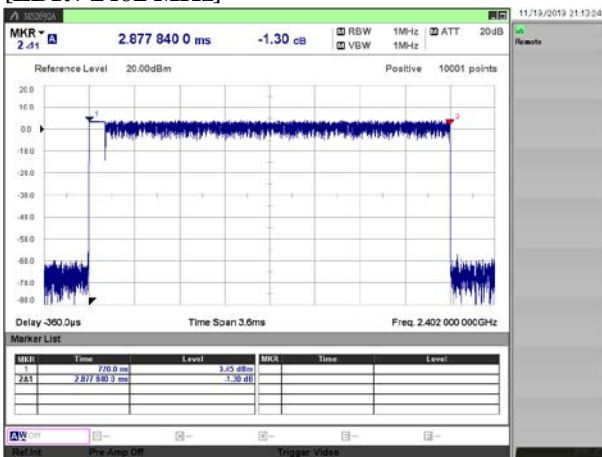

[EDR / 2441 MHz]

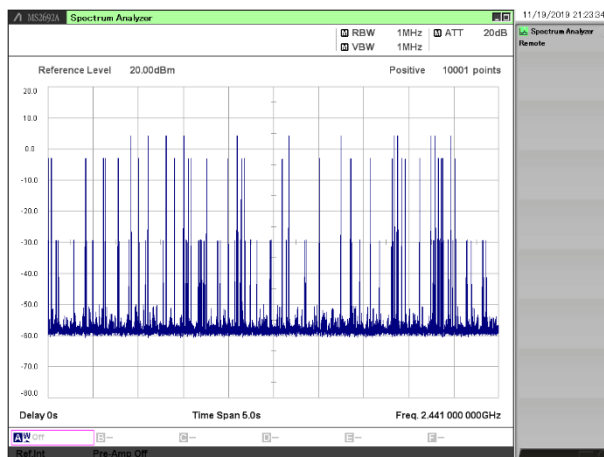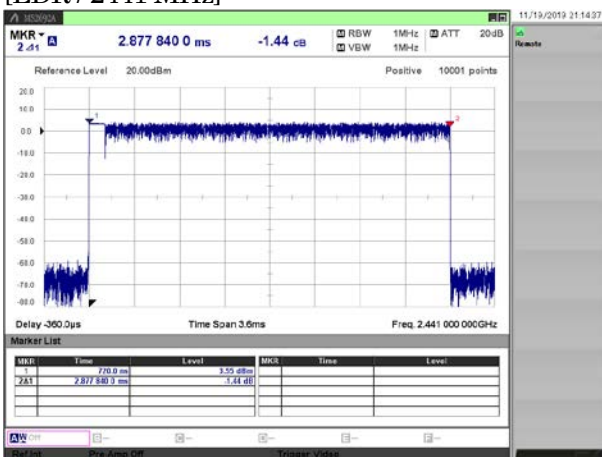

[EDR / 2480 MHz]

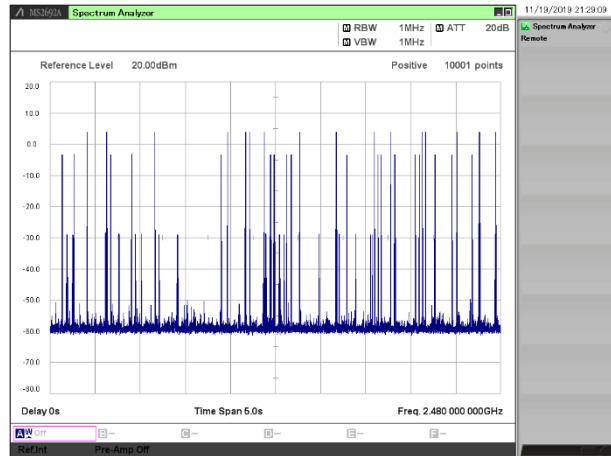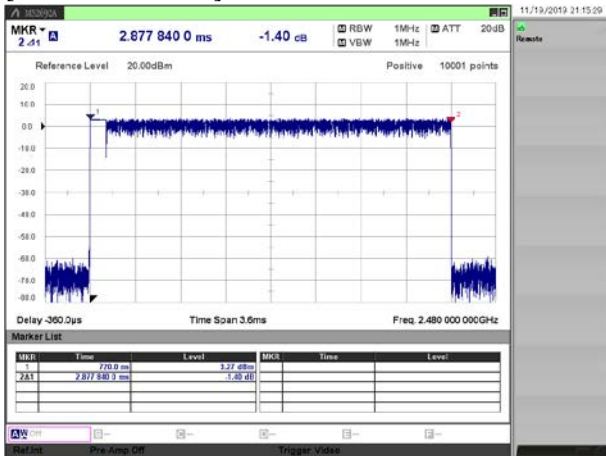

3.5. Maximum Peak Conducted Output Power

- 1) Ambient temperature : 23.3 deg.C
- 2) Relative humidity : 62.5 %
- 3) Date of measurement : November 19, 2019
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Maximum Peak Conducted Output Power

Mode		Channel [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result(PK) [dBm]	Result(PK) [W]	Limit [dBm]	Limit [W]	Margin [dB]
BDR	DH5	2402	5.42	0.40	5.82	0.00382	20.97	0.125	15.15
		2441	5.47	0.40	5.87	0.00386	20.97	0.125	15.10
		2480	5.18	0.40	5.58	0.00361	20.97	0.125	15.39
EDR	2DH5	2402	5.02	0.40	5.42	0.00348	20.97	0.125	15.55
		2441	5.06	0.40	5.46	0.00352	20.97	0.125	15.51
		2480	4.78	0.40	5.18	0.00330	20.97	0.125	15.79
	3DH5	2402	5.33	0.40	5.73	0.00374	20.97	0.125	15.24
		2441	5.33	0.40	5.73	0.00374	20.97	0.125	15.24
		2480	5.10	0.40	5.50	0.00355	20.97	0.125	15.47

Duty Cycle check

Mode		Channel [MHz]	T(on+off) [msec]	T(on) [msec]	Duty Cycle [%]
BDR	DH1	2441	1.250	0.368	29.42
	DH3	2441	2.500	1.623	64.92
	DH5	2441	3.750	2.871	76.56
EDR	2DH1	2441	1.250	0.376	30.10
	2DH3	2441	2.500	1.627	65.08
	2DH5	2441	3.750	2.876	76.69
	3DH1	2441	1.250	0.376	30.08
	3DH3	2441	2.500	1.627	65.08
	3DH5	2441	3.750	2.878	76.73

3.6. Radiated Spurious Emissions


1) Date of measurement

9 kHz to 30 MHz	: November 29, 2019
30 MHz to 1000 MHz	: November 29, 2019
1 GHz to 7 GHz	: November 25, 2019
7 GHz to 18 GHz	: November 26, 2019
18 GHz to 26.5 GHz	: November 26, 2019

The test data is mentioned as follows.

* Although "Height" in radiated emissions data, which shows the height of the boom of the antenna mast, might exceed 400.0 cm. because of the antenna tilt positioner attached to the edge of the boom for the bore-sighting measurement, the height of the reference point of the antenna does not exceed 400.0 cm.

9 kHz to 30 MHz
 [BDR / 2402 MHz]

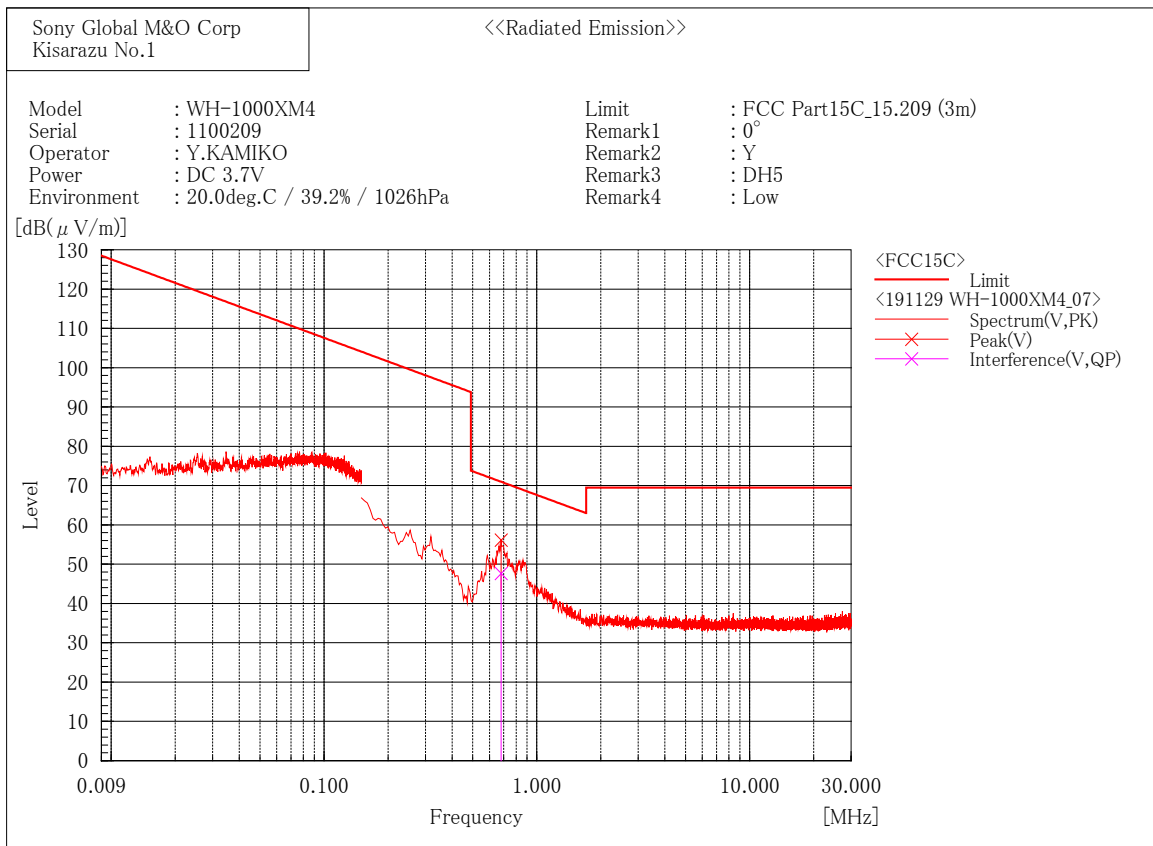


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	0.680	27.9	19.7	47.6	71.0	23.4	100.0	137.4

30 MHz to 1000 MHz
[BDR / 2402 MHz]

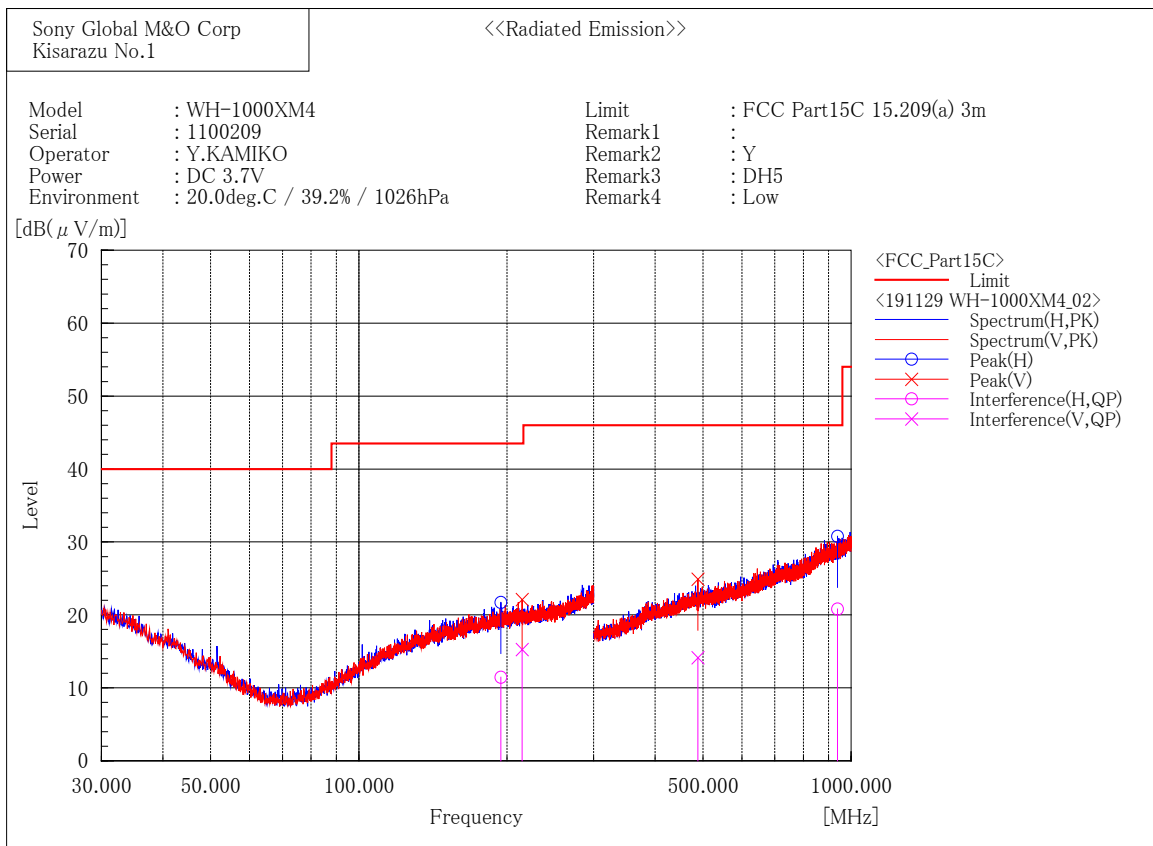

Final Result


--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	194.340	19.3	-7.8	11.5	43.5	32.0	191.3	5.6
2	938.867	19.8	1.0	20.8	46.0	25.2	400.0	82.2

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	214.775	22.5	-7.3	15.2	43.5	28.3	400.0	356.3
2	488.300	19.7	-5.5	14.2	46.0	31.8	399.0	107.6

1 GHz to 7 GHz
[BDR (DH5) / 2402 MHz]

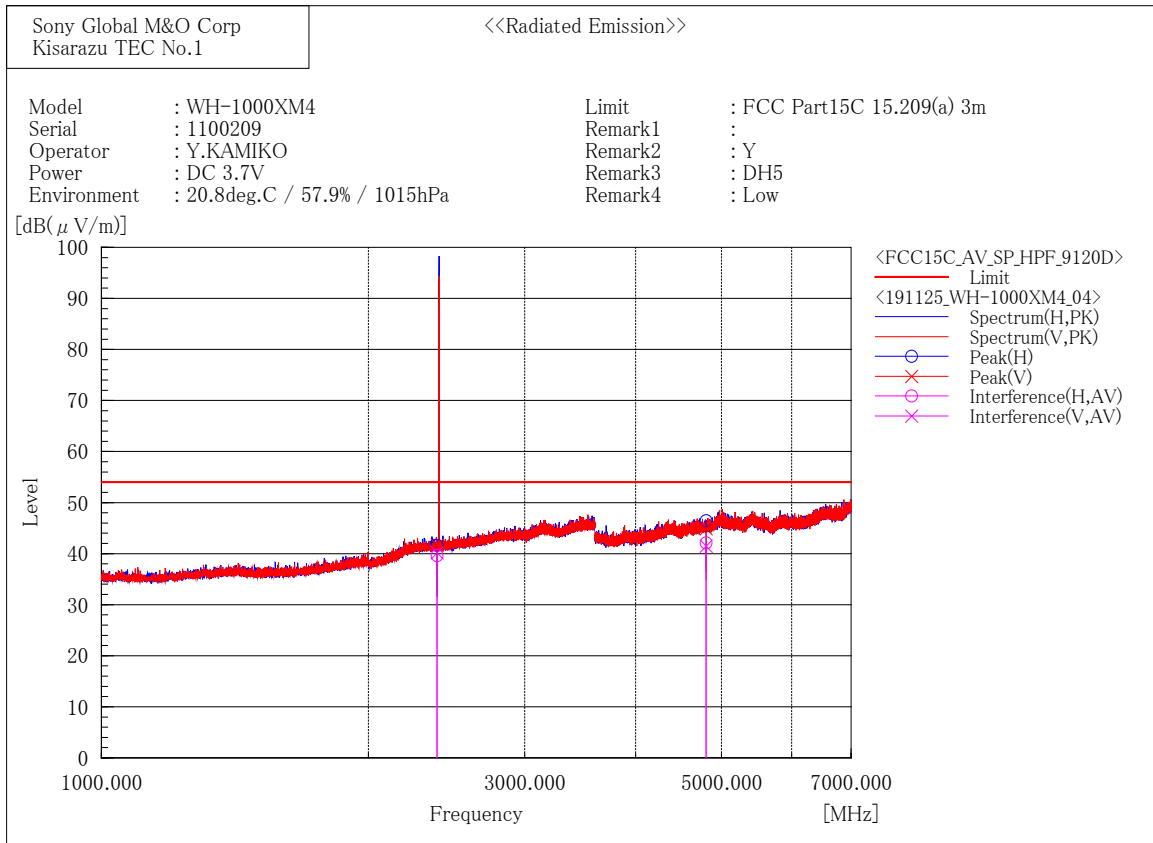

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2390.000	36.9	2.7	39.6	54.0	14.4	431.0	191.1
2	4804.000	31.2	10.9	42.1	54.0	11.9	233.2	253.5

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2390.000	37.5	2.7	40.2	54.0	13.8	100.0	221.1
2	4804.000	30.6	10.9	41.5	54.0	12.5	196.9	288.3

[BDR(DH5) / 2441 MHz]

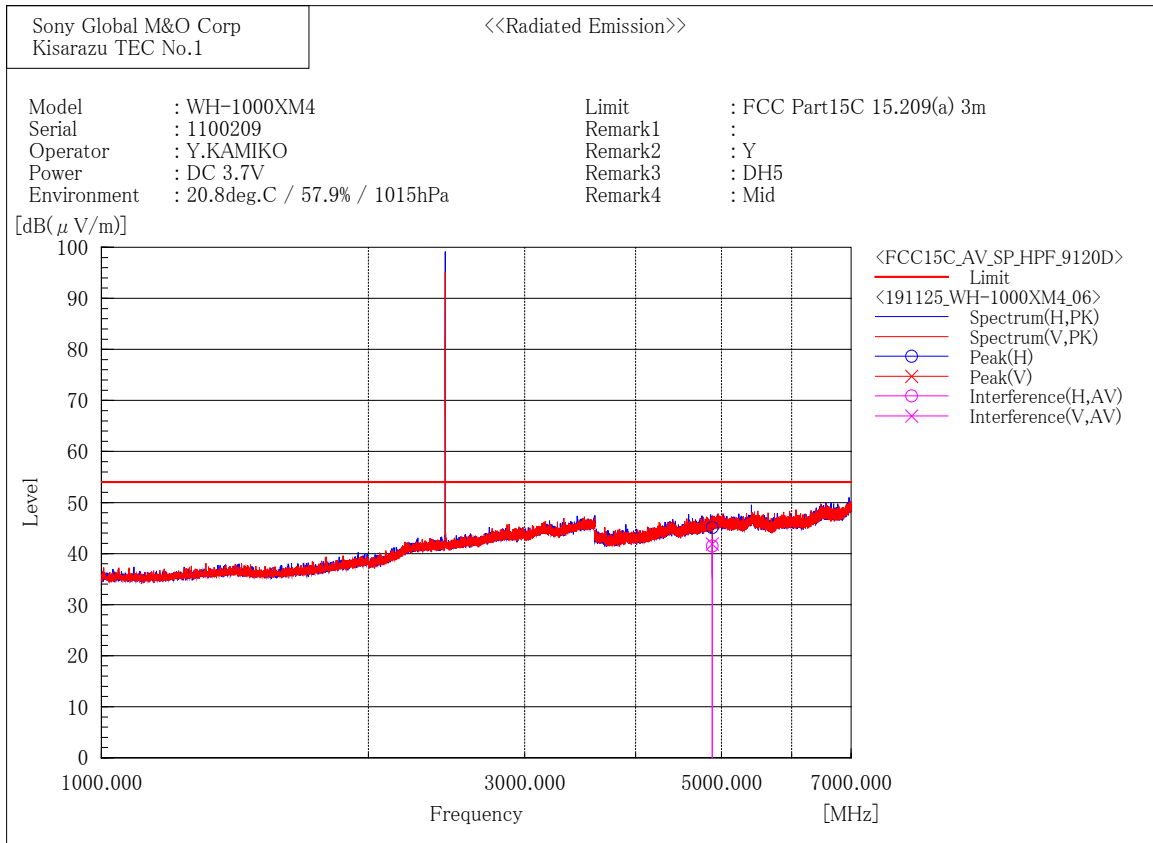

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.000	30.5	11.0	41.5	54.0	12.5	165.5	247.1

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.000	30.9	11.0	41.9	54.0	12.1	254.1	264.0

[BDR(DH5) / 2480 MHz]

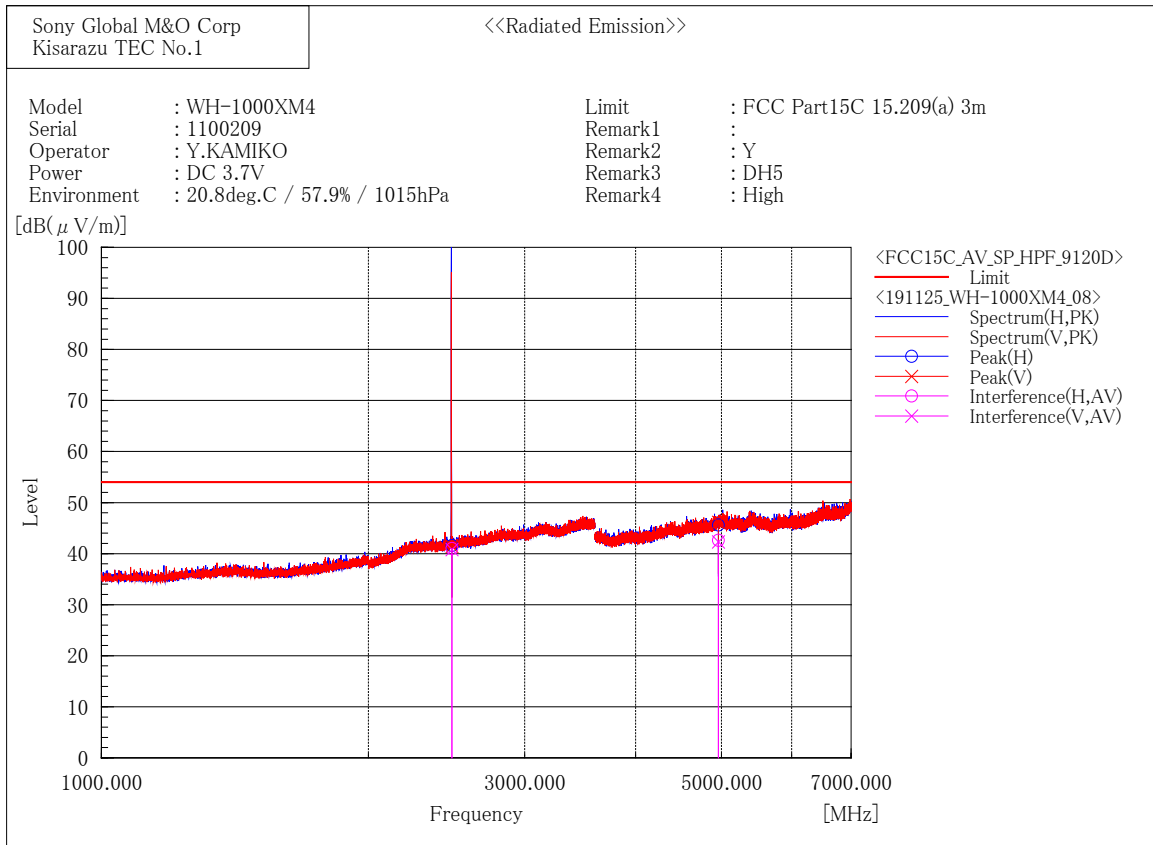

Final Result


--- Horizontal Polarization (AV) ---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	37.9	3.1	41.0	54.0	13.0	129.2	315.2
2	4960.000	31.3	11.3	42.6	54.0	11.4	126.9	179.2

--- Vertical Polarization (AV) ---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	37.7	3.1	40.8	54.0	13.2	152.9	62.3
2	4960.000	31.0	11.3	42.3	54.0	11.7	183.6	320.0

[BDR(DH5) / 2402 MHz]

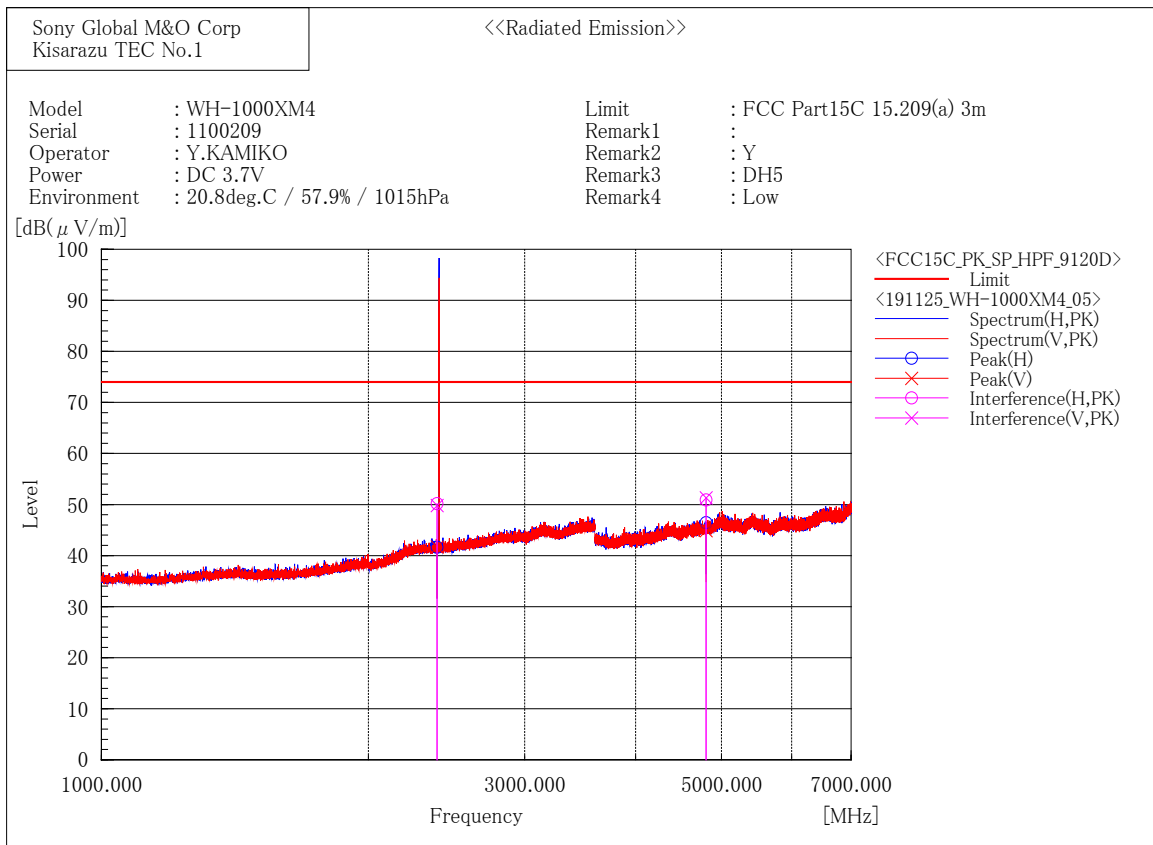

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2390.000	47.5	2.7	50.2	74.0	23.8	431.0	182.7
2	4804.000	40.0	10.9	50.9	74.0	23.1	232.3	258.3

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2390.000	47.1	2.7	49.8	74.0	24.2	102.7	239.5
2	4804.000	40.4	10.9	51.3	74.0	22.7	198.9	283.3

[BDR(DH5) / 2441 MHz]

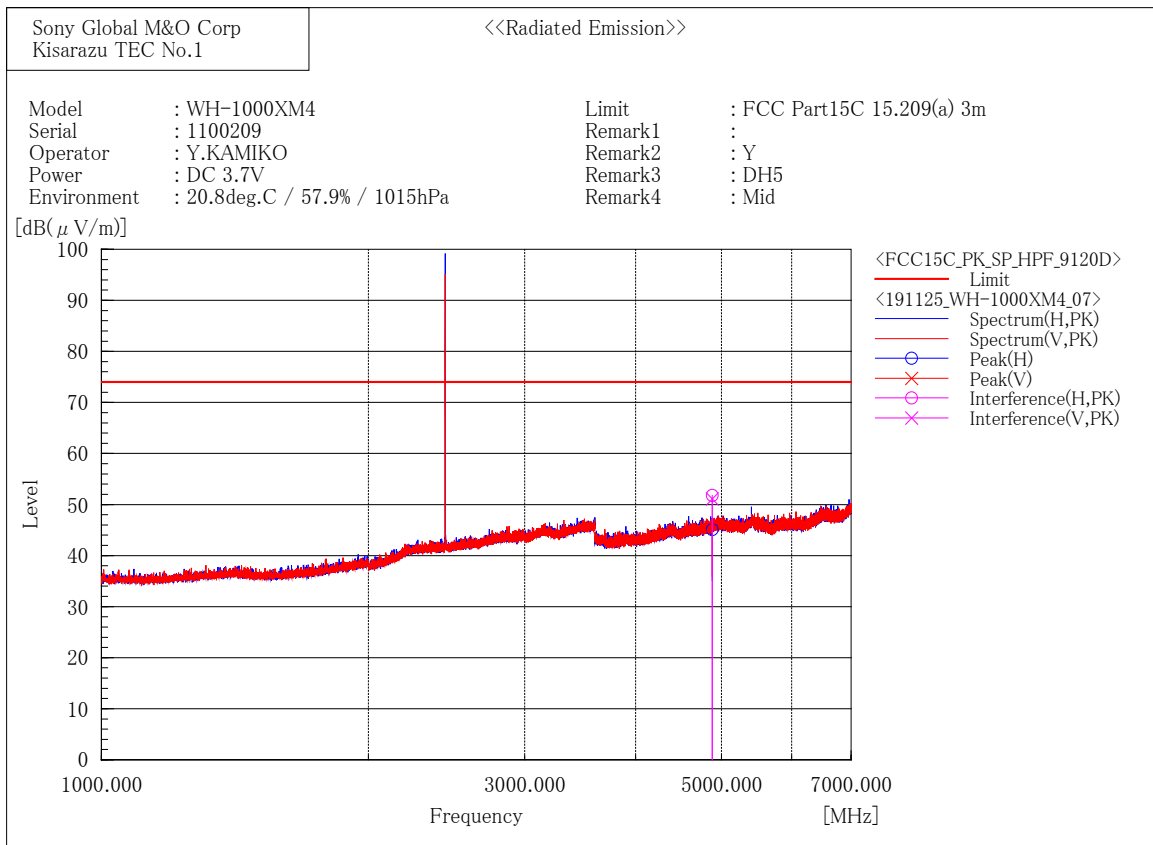

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.000	40.8	11.0	51.8	74.0	22.2	166.4	249.4

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.000	40.1	11.0	51.1	74.0	22.9	254.1	268.3

[BDR(DH5) / 2480 MHz]

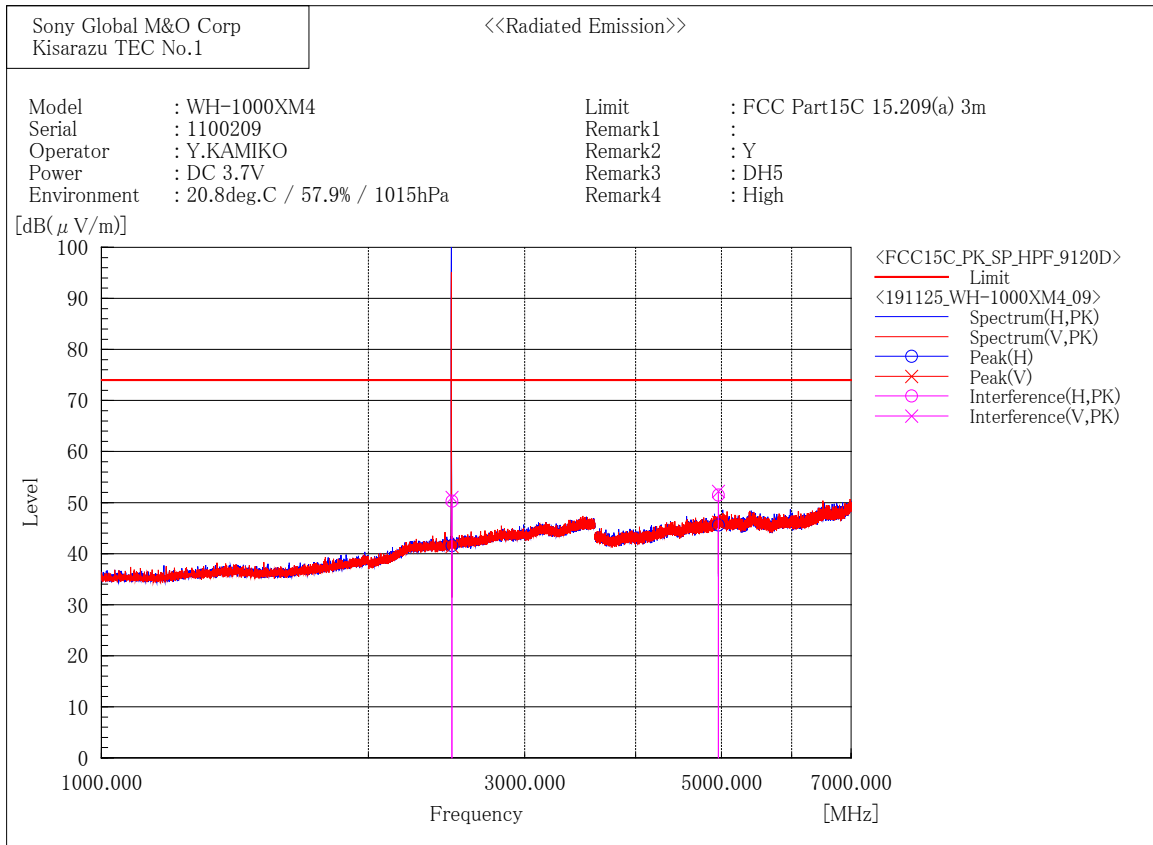

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	47.2	3.1	50.3	74.0	23.7	133.2	321.9
2	4960.000	40.2	11.3	51.5	74.0	22.5	130.9	183.6

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	47.9	3.1	51.0	74.0	23.0	155.4	70.9
2	4960.000	40.9	11.3	52.2	74.0	21.8	185.3	0.2

[EDR(3DH5) / 2402 MHz]

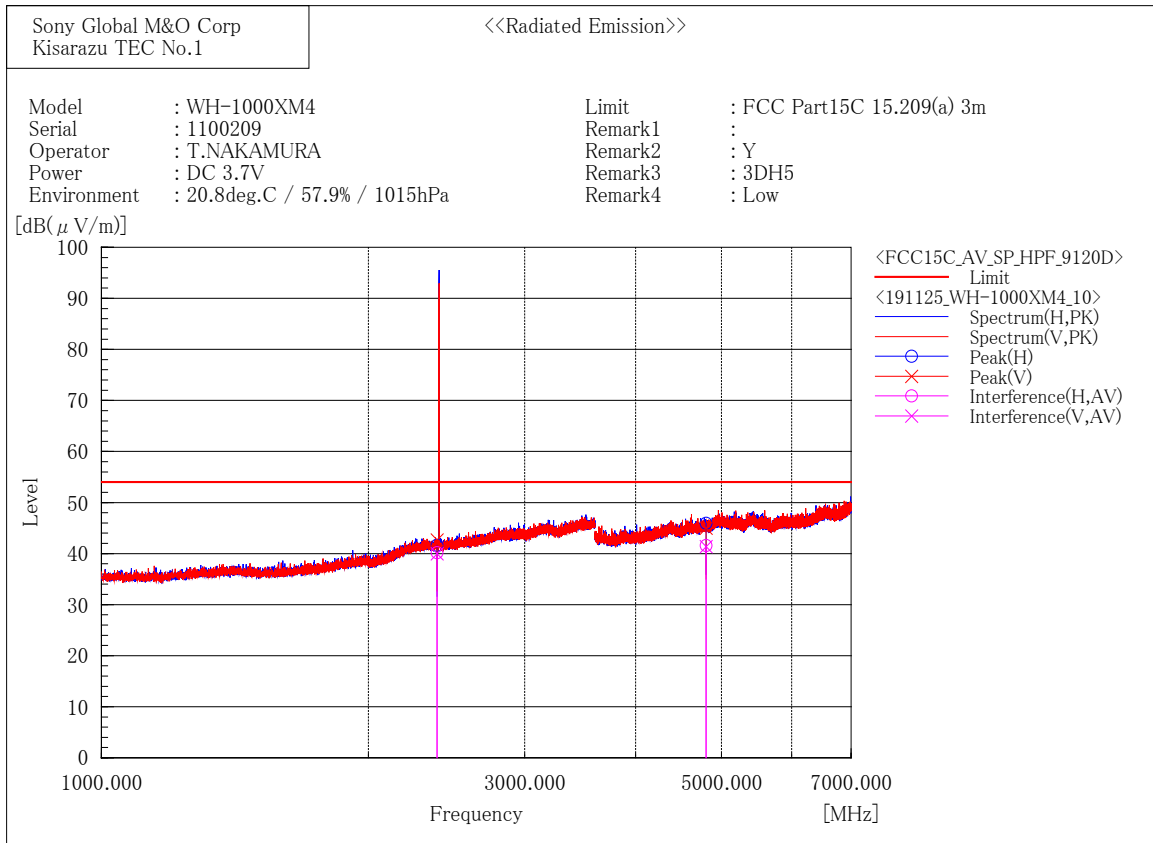

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2390.000	37.5	2.7	40.2	54.0	13.8	274.4	73.4
2	4804.000	30.7	10.9	41.6	54.0	12.4	195.8	60.0

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2390.000	37.3	2.7	40.0	54.0	14.0	239.8	262.9
2	4804.000	30.5	10.9	41.4	54.0	12.6	144.0	315.7

[EDR(3DH5) / 2441 MHz]

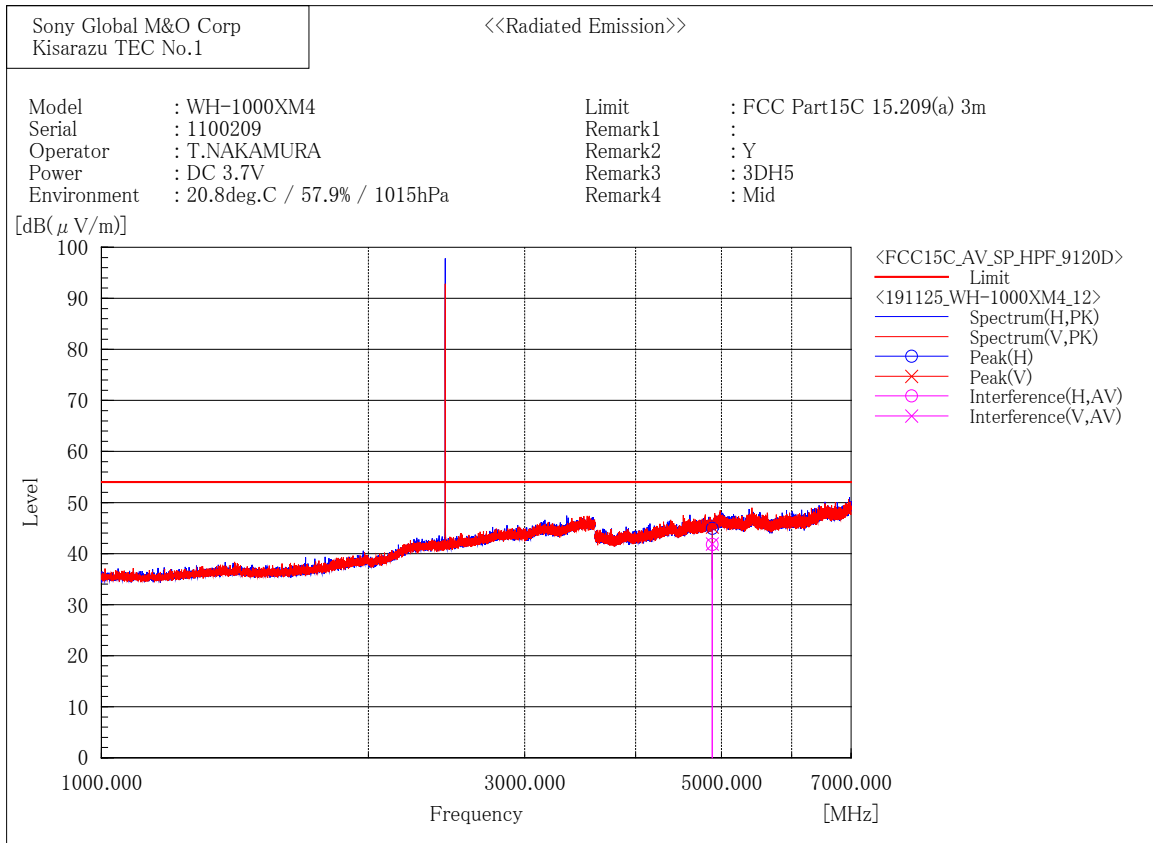

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.000	30.8	11.0	41.8	54.0	12.2	202.6	199.4

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.000	30.9	11.0	41.9	54.0	12.1	206.8	188.6

[EDR(3DH5) / 2480 MHz]

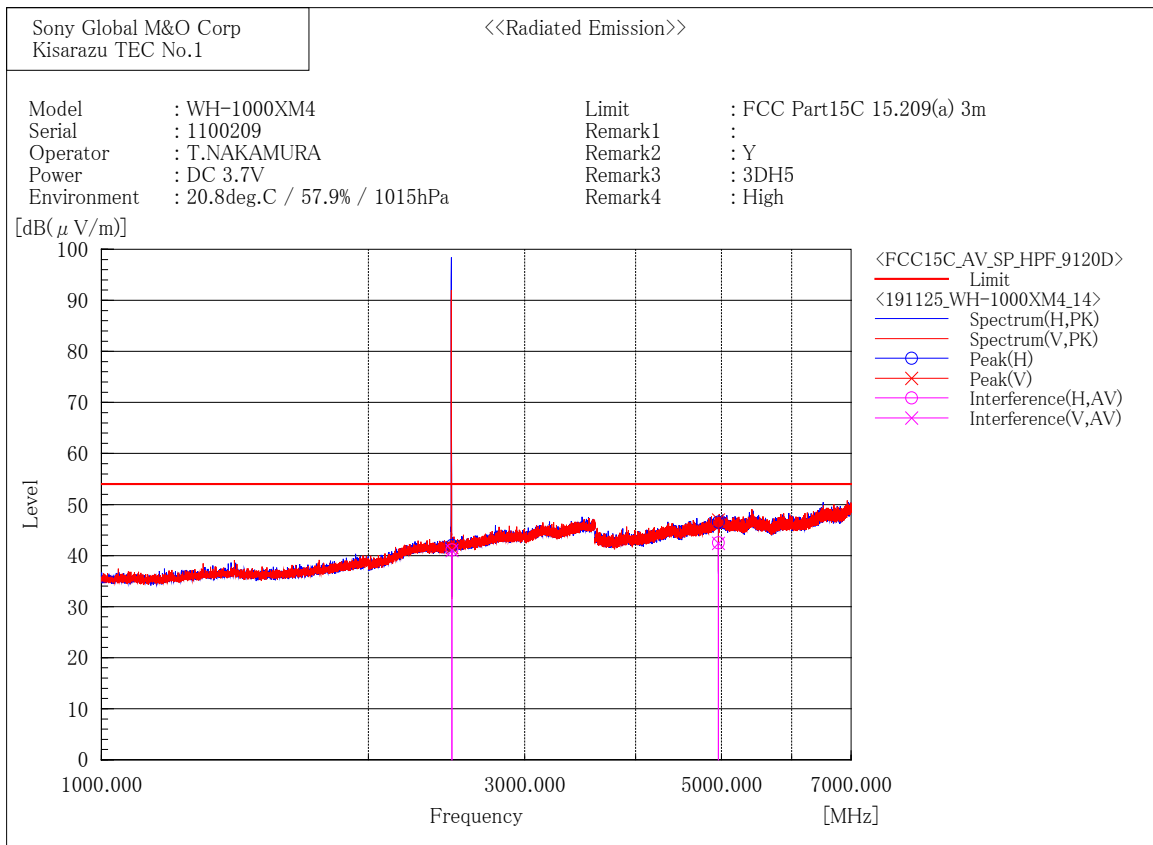

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	38.0	3.1	41.1	54.0	12.9	100.0	68.4
2	4960.000	31.2	11.3	42.5	54.0	11.5	364.9	192.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	37.9	3.1	41.0	54.0	13.0	132.4	39.8
2	4960.000	31.1	11.3	42.4	54.0	11.6	129.7	105.3

[EDR(3DH5) / 2402 MHz]

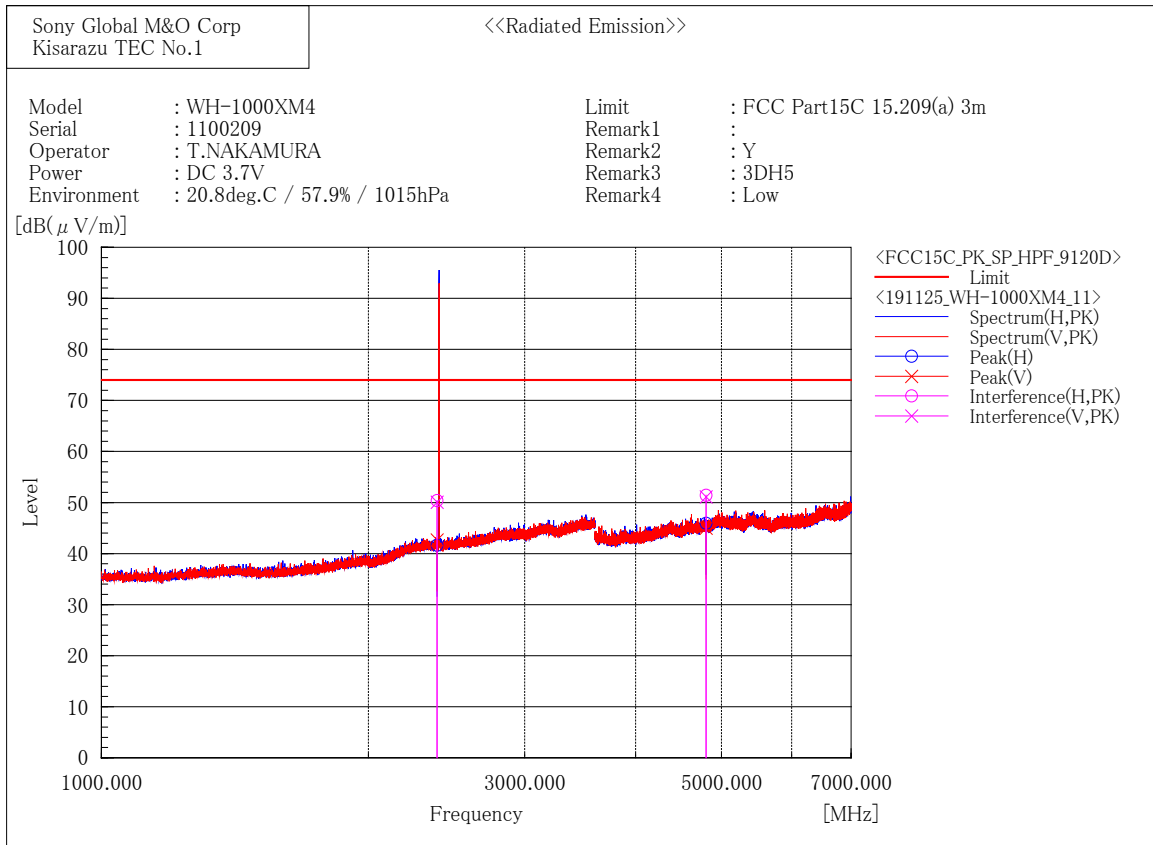

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2390.000	47.7	2.7	50.4	74.0	23.6	271.0	75.3
2	4804.000	40.5	10.9	51.4	74.0	22.6	191.5	63.6

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2390.000	47.4	2.7	50.1	74.0	23.9	234.9	265.2
2	4804.000	40.2	10.9	51.1	74.0	22.9	139.0	320.9

[EDR(3DH5) / 2441 MHz]

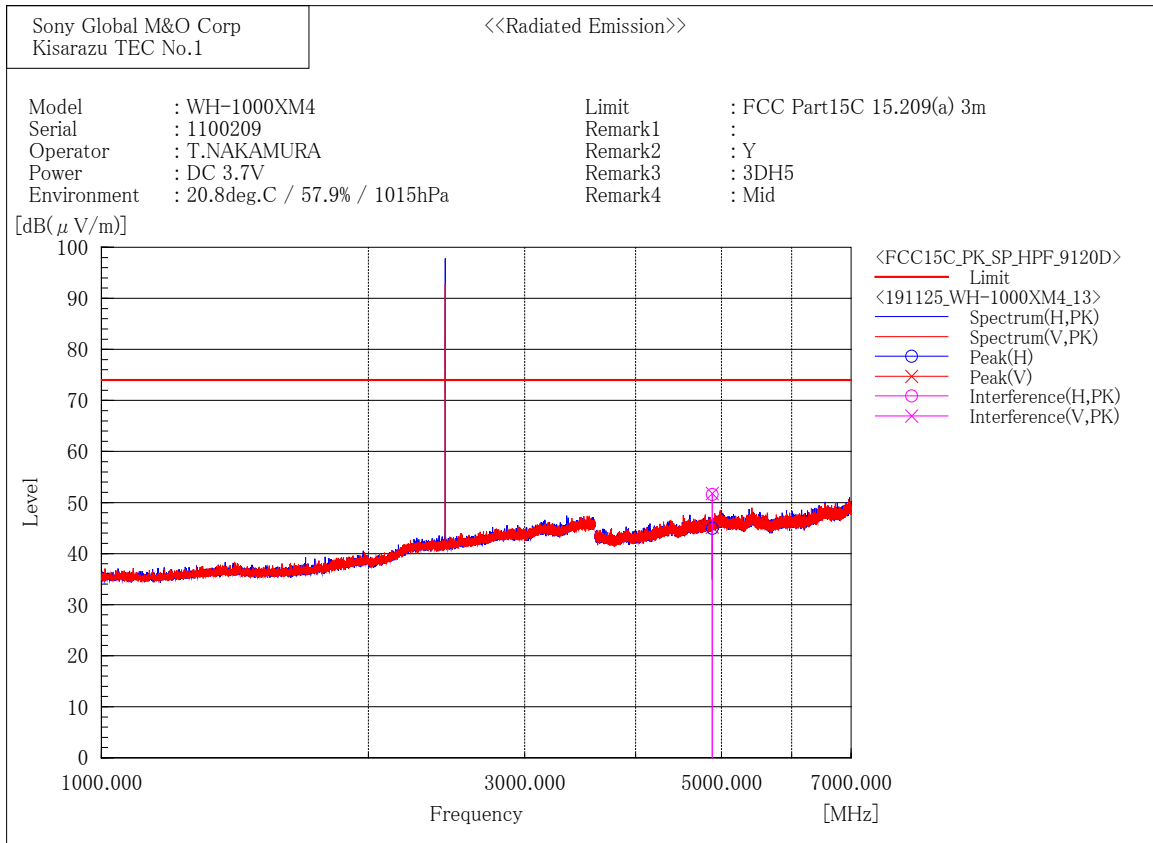

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.000	40.6	11.0	51.6	74.0	22.4	197.3	213.5

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	4882.000	40.8	11.0	51.8	74.0	22.2	201.3	195.7

[EDR(3DH5) / 2480 MHz]

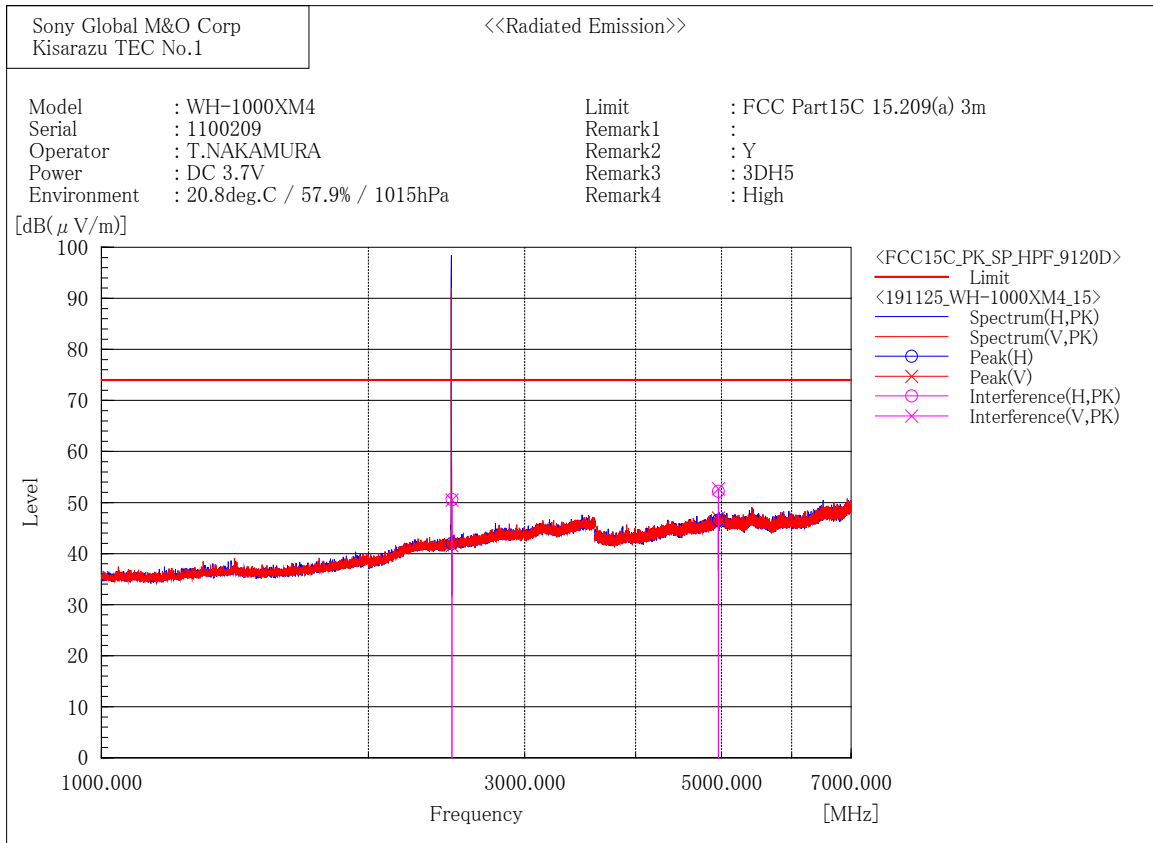

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	47.5	3.1	50.6	74.0	23.4	100.0	67.3
2	4960.000	40.9	11.3	52.2	74.0	21.8	362.8	195.3

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	2483.500	47.4	3.1	50.5	74.0	23.5	133.9	40.4
2	4960.000	41.4	11.3	52.7	74.0	21.3	128.1	105.8

7 GHz to 18 GHz
[BDR(DH5) / 2402 MHz]

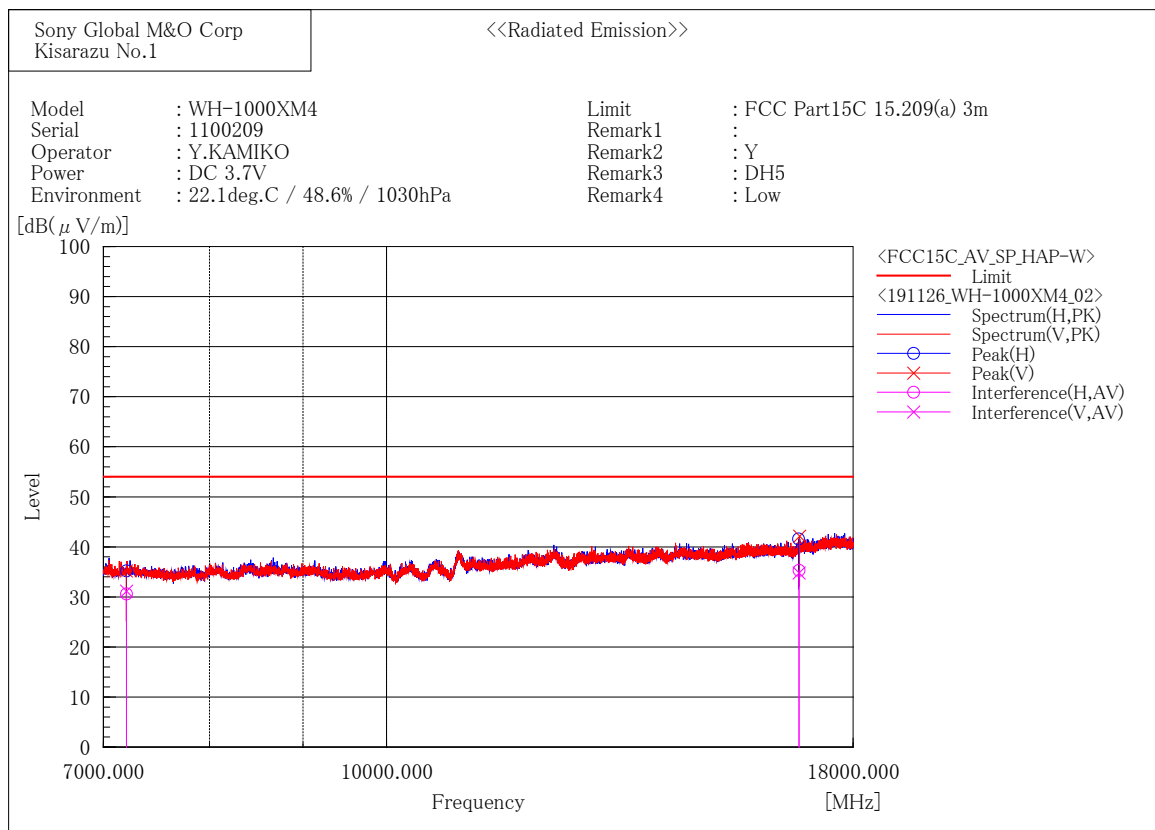

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.000	38.5	-7.9	30.6	54.0	23.4	130.6	266.8
2	16814.000	36.8	-1.5	35.3	54.0	18.7	330.4	35.7

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.000	39.1	-7.9	31.2	54.0	22.8	100.0	331.1
2	16814.000	36.3	-1.5	34.8	54.0	19.2	207.4	170.1

[BDR(DH5) / 2441 MHz]

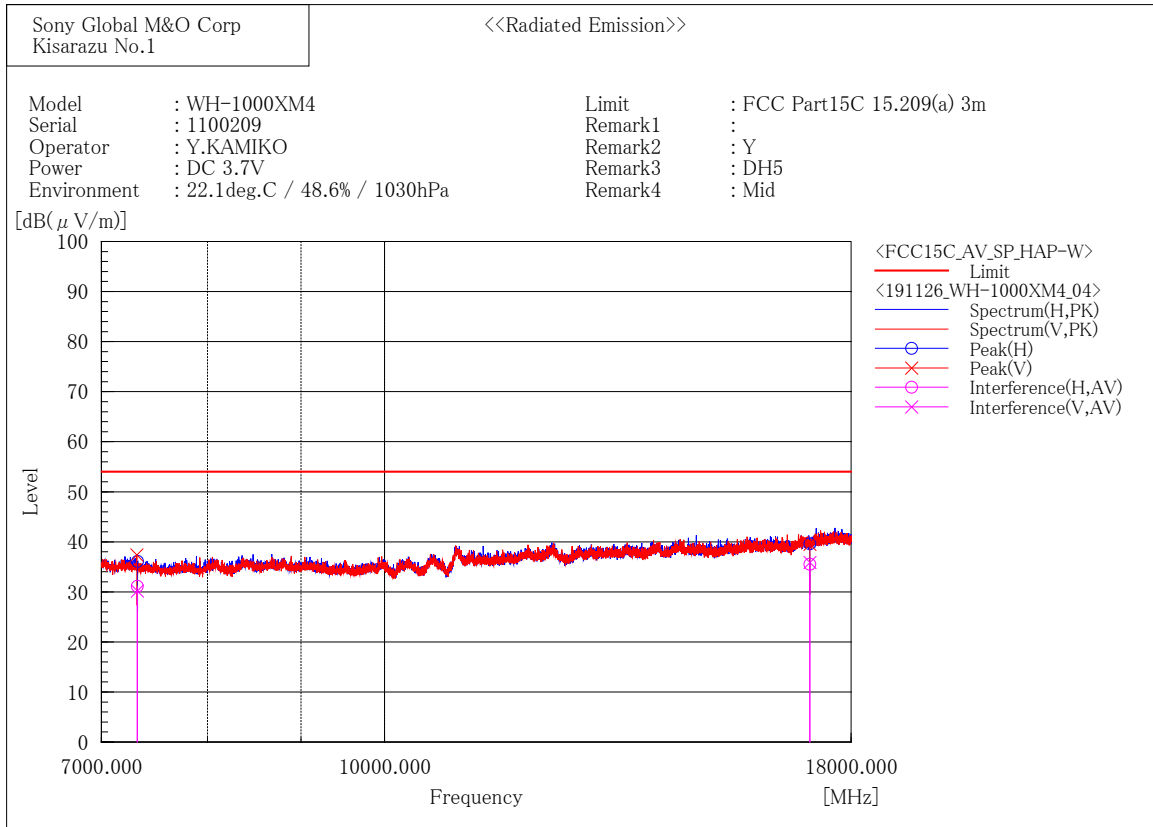

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.000	39.0	-7.9	31.1	54.0	22.9	418.0	337.5
2	17087.000	35.9	-0.4	35.5	54.0	18.5	126.0	313.0

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.000	38.1	-7.9	30.2	54.0	23.8	100.0	203.1
2	17087.000	36.3	-0.4	35.9	54.0	18.1	211.7	62.2

[BDR(DH5) / 2480 MHz]

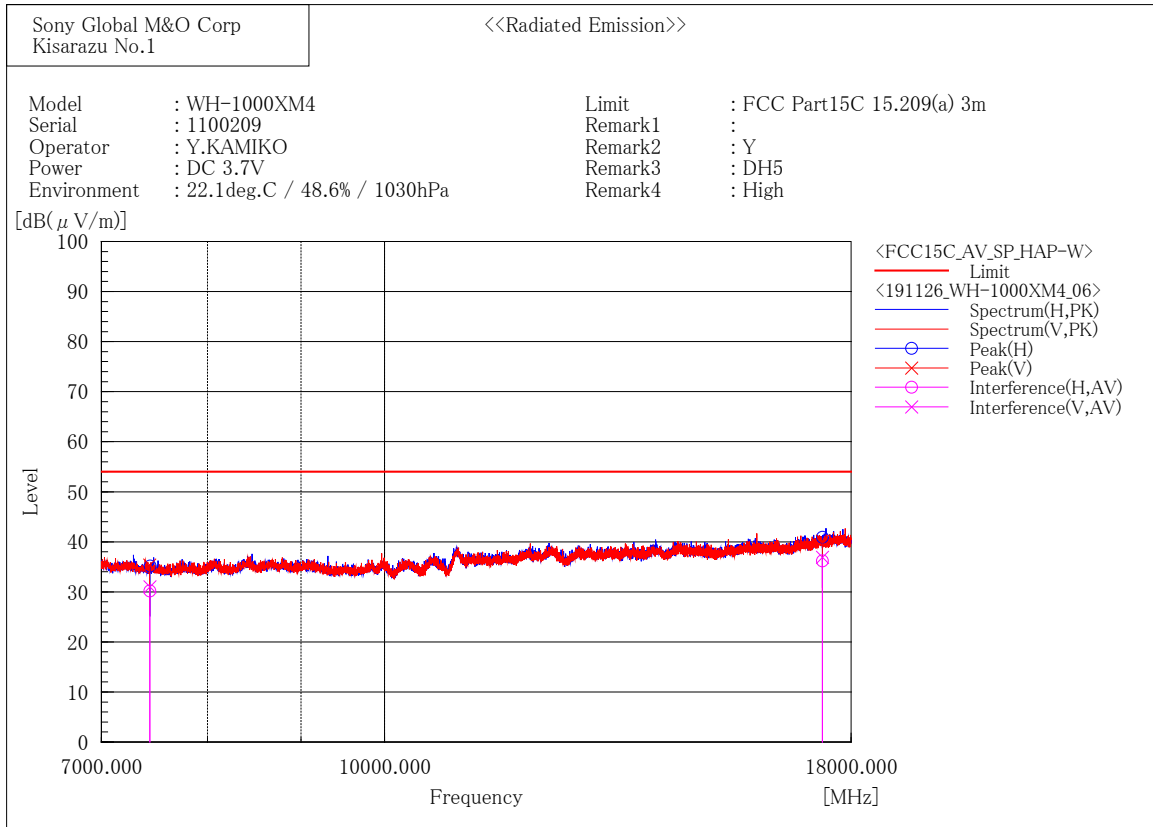

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7440.000	38.1	-7.9	30.2	54.0	23.8	187.4	182.5
2	17360.000	36.4	-0.2	36.2	54.0	17.8	419.0	58.9

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7440.000	38.9	-7.9	31.0	54.0	23.0	377.7	79.1
2	17360.000	37.1	-0.2	36.9	54.0	17.1	386.9	198.7

[BDR(DH5) / 2402 MHz]

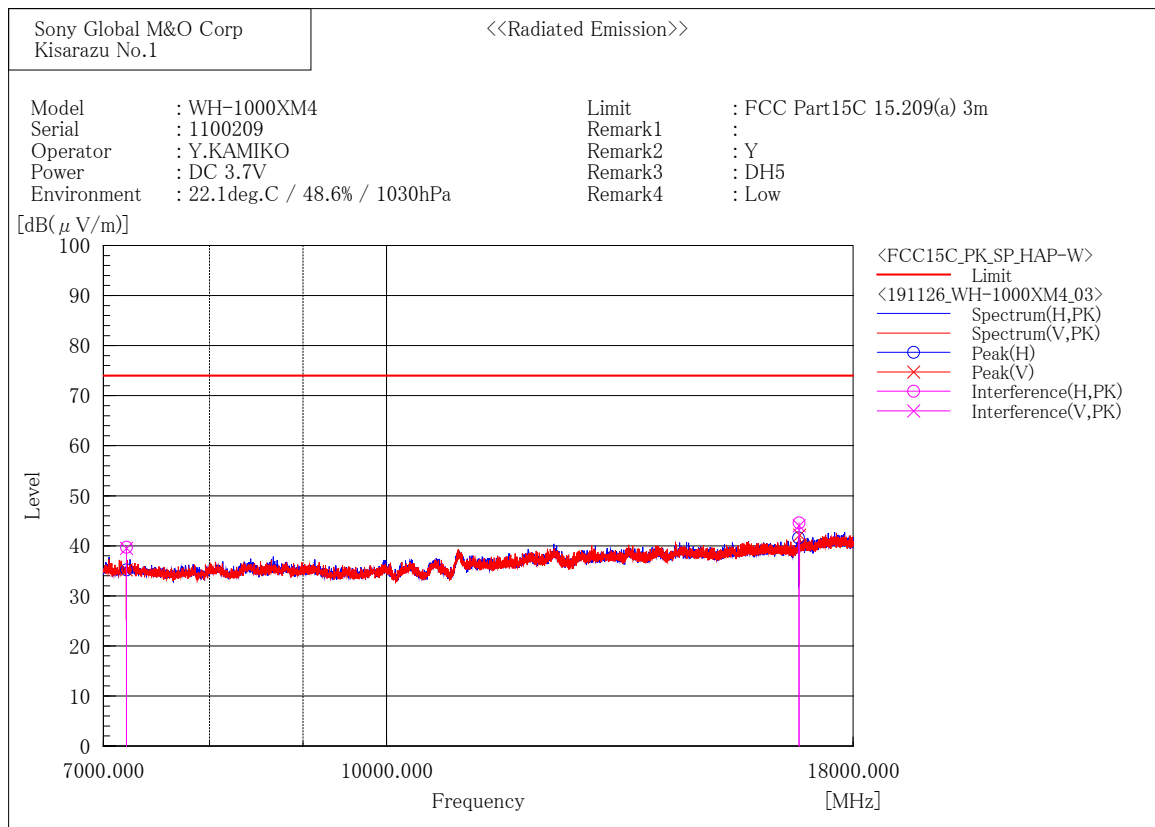

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.000	47.6	-7.9	39.7	74.0	34.3	130.0	270.1
2	16814.000	46.1	-1.5	44.6	74.0	29.4	328.4	41.0

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.000	47.4	-7.9	39.5	74.0	34.5	100.0	335.1
2	16814.000	45.5	-1.5	44.0	74.0	30.0	207.0	172.0

[BDR(DH5) / 2441 MHz]

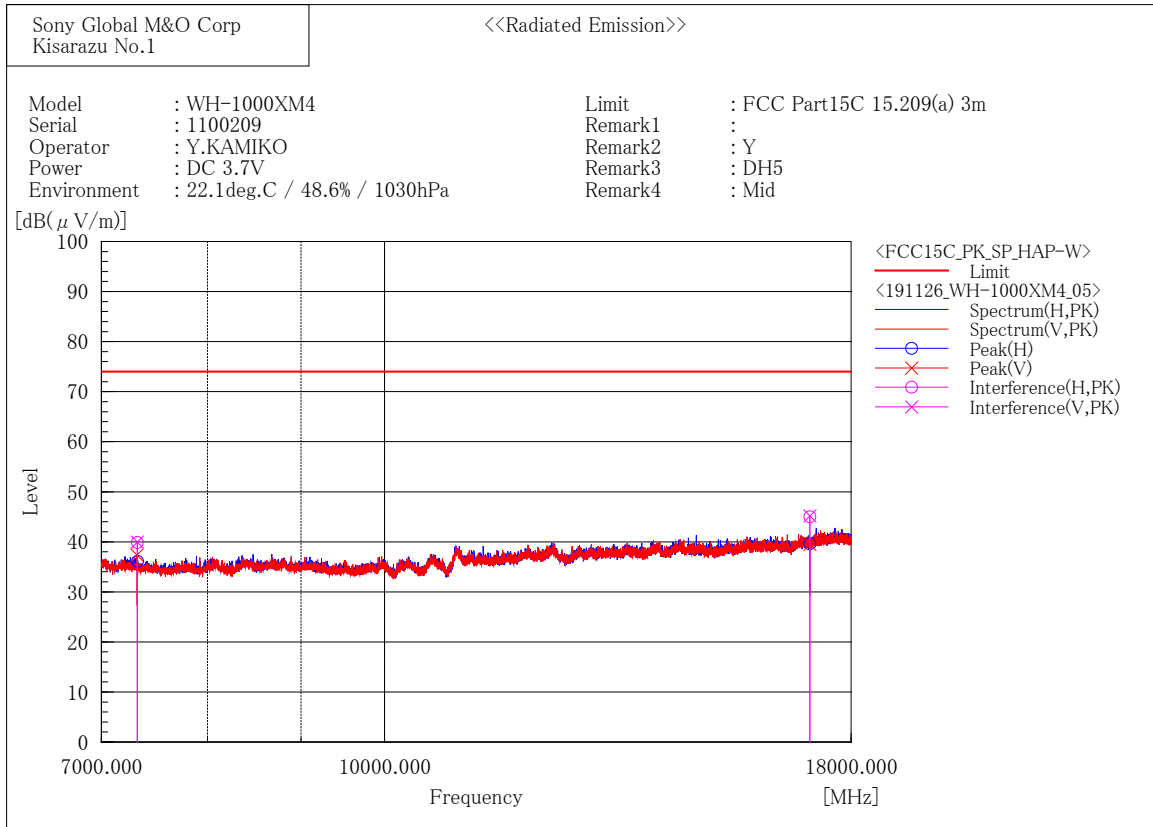

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.000	47.8	-7.9	39.9	74.0	34.1	416.3	336.4
2	17087.000	45.4	-0.4	45.0	74.0	29.0	126.0	316.5

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.000	47.9	-7.9	40.0	74.0	34.0	100.0	201.3
2	17087.000	45.6	-0.4	45.2	74.0	28.8	211.0	53.7

[BDR(DH5) / 2480 MHz]

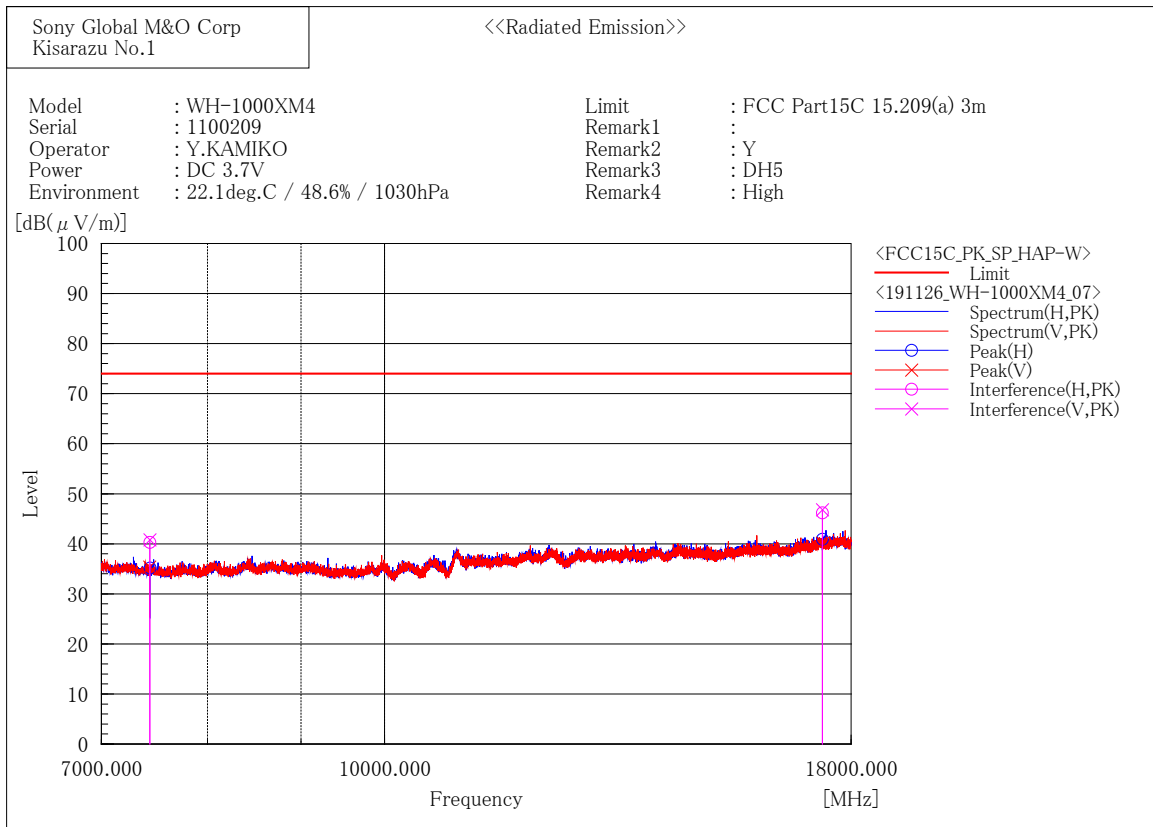

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7440.000	48.2	-7.9	40.3	74.0	33.7	186.9	186.7
2	17360.000	46.4	-0.2	46.2	74.0	27.8	414.9	55.4

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7440.000	48.7	-7.9	40.8	74.0	33.2	377.9	79.4
2	17360.000	47.0	-0.2	46.8	74.0	27.2	388.6	190.2

[EDR(3DH5) / 2402 MHz]

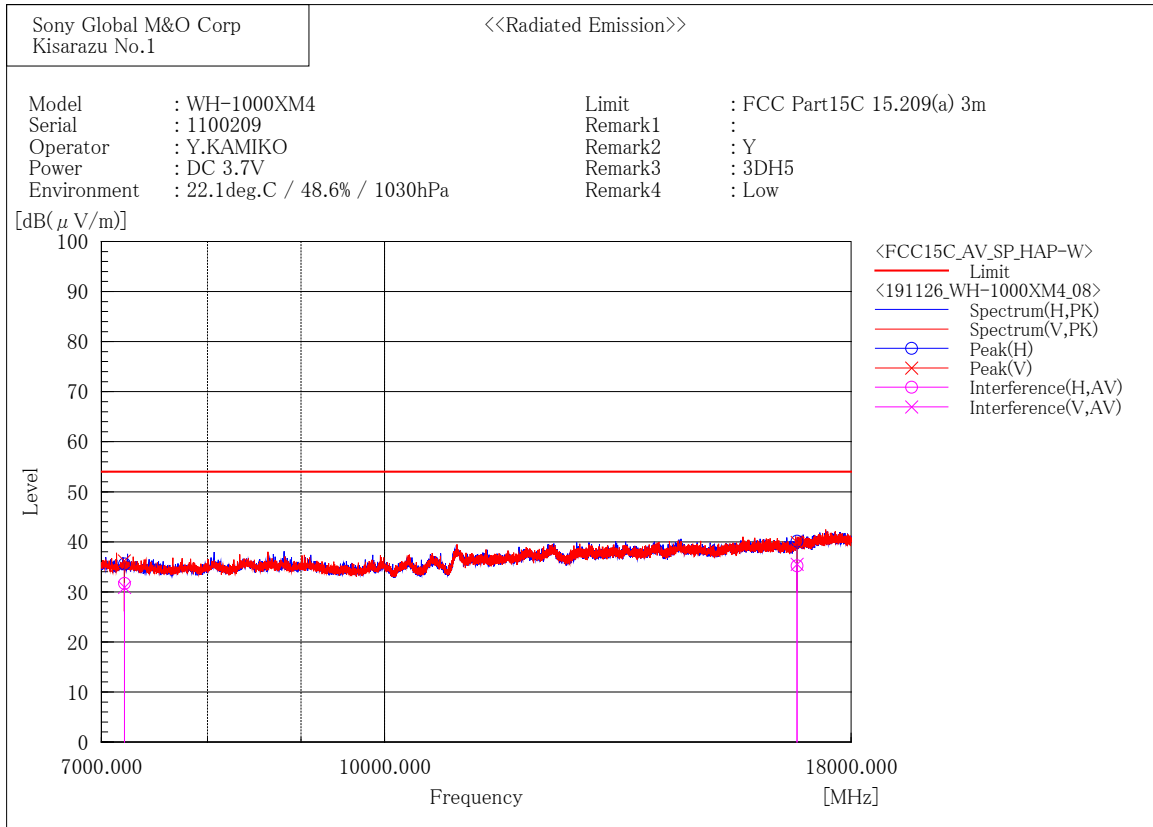

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.000	39.6	-7.9	31.7	54.0	22.3	429.3	289.8
2	16814.000	36.7	-1.5	35.2	54.0	18.8	132.2	302.4

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.000	38.8	-7.9	30.9	54.0	23.1	422.0	115.1
2	16814.000	37.0	-1.5	35.5	54.0	18.5	422.8	304.4

[EDR(3DH5) / 2441 MHz]

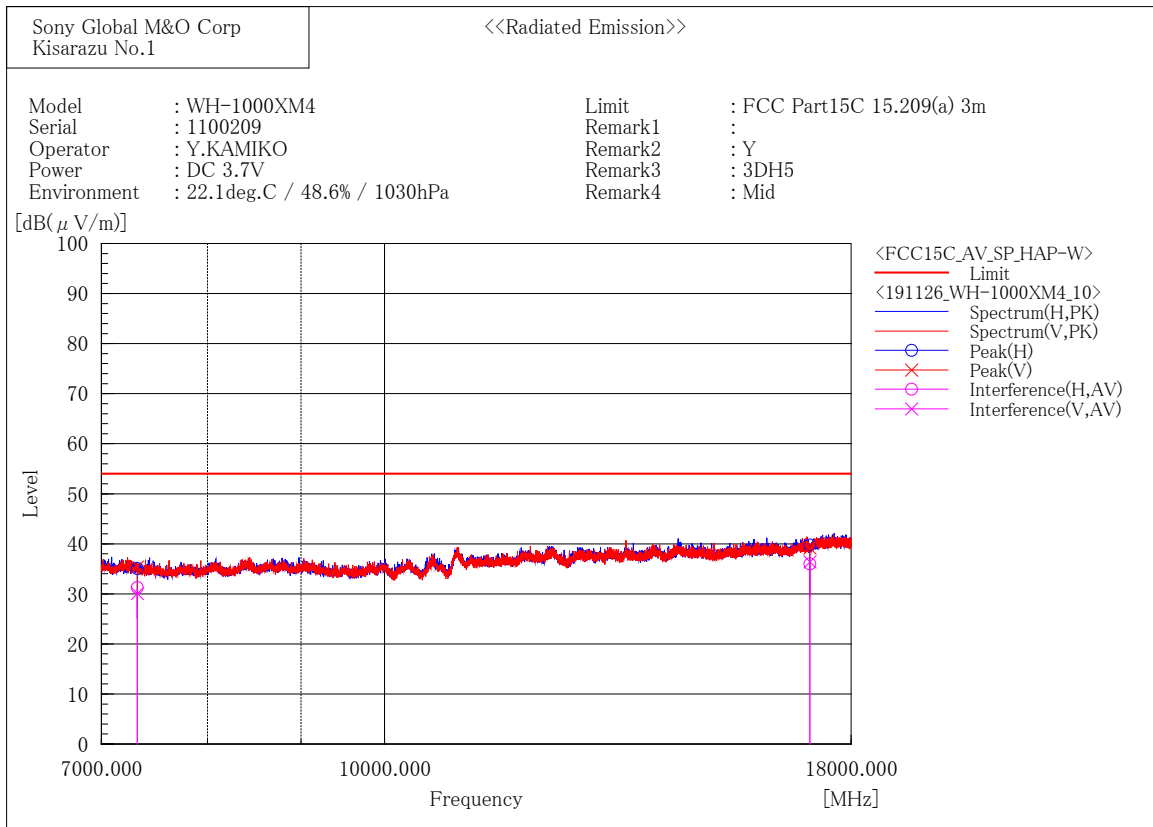

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.000	39.2	-7.9	31.3	54.0	22.7	398.1	321.7
2	17087.000	36.4	-0.4	36.0	54.0	18.0	216.6	359.7

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.000	38.0	-7.9	30.1	54.0	23.9	100.0	358.4
2	17087.000	36.8	-0.4	36.4	54.0	17.6	147.0	9.3

[EDR(3DH5) / 2480 MHz]

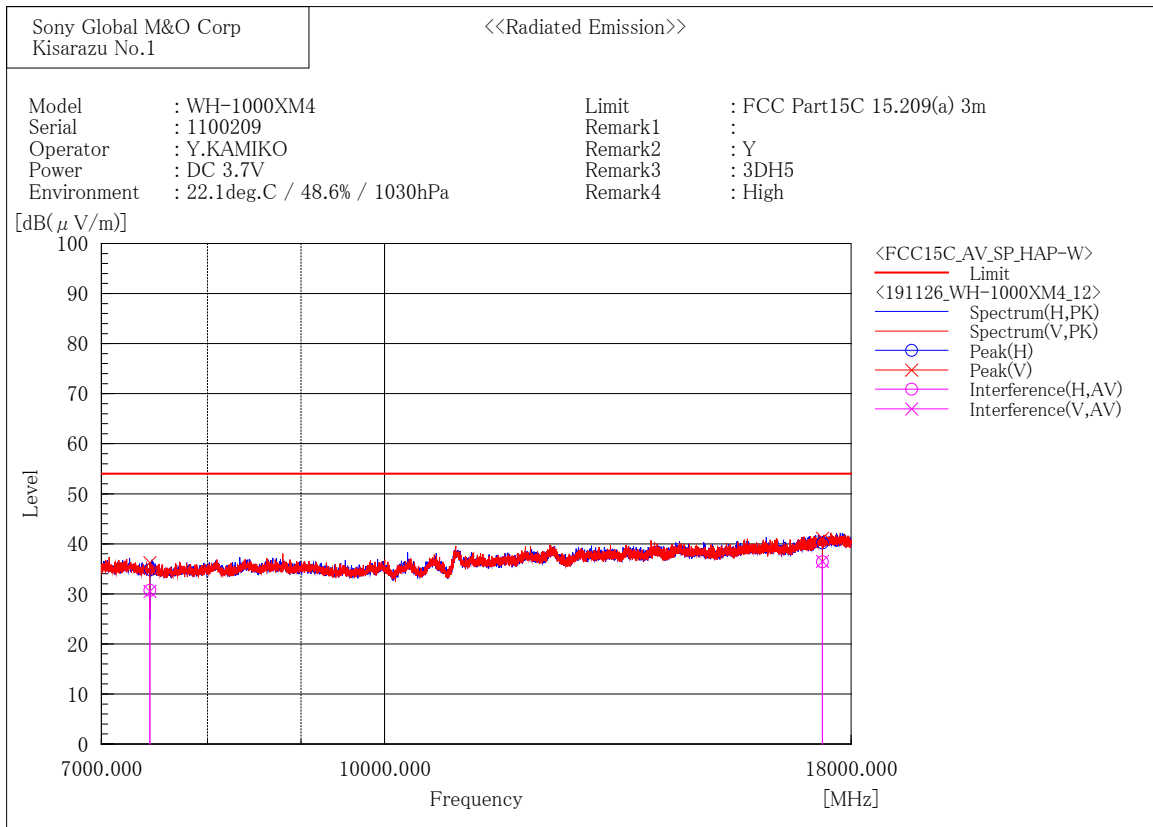

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7440.000	38.6	-7.9	30.7	54.0	23.3	431.0	279.8
2	17360.000	36.6	-0.2	36.4	54.0	17.6	122.0	268.7

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7440.000	38.4	-7.9	30.5	54.0	23.5	285.0	327.7
2	17360.000	36.7	-0.2	36.5	54.0	17.5	392.5	270.1

[EDR(3DH5) / 2402 MHz]

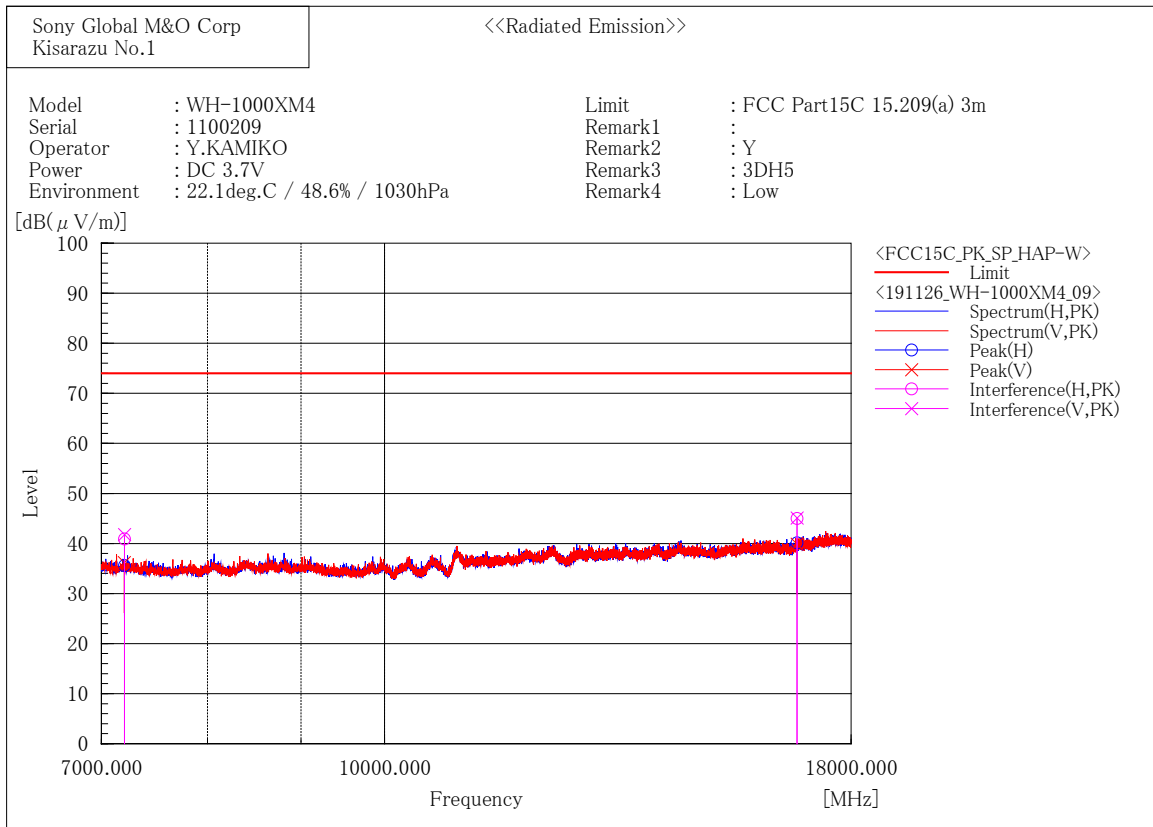

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.000	48.8	-7.9	40.9	74.0	33.1	424.0	282.9
2	16814.000	46.5	-1.5	45.0	74.0	29.0	132.0	304.8

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7206.000	49.7	-7.9	41.8	74.0	32.2	422.7	118.8
2	16814.000	46.6	-1.5	45.1	74.0	28.9	425.2	306.0

[EDR(3DH5) / 2441 MHz]

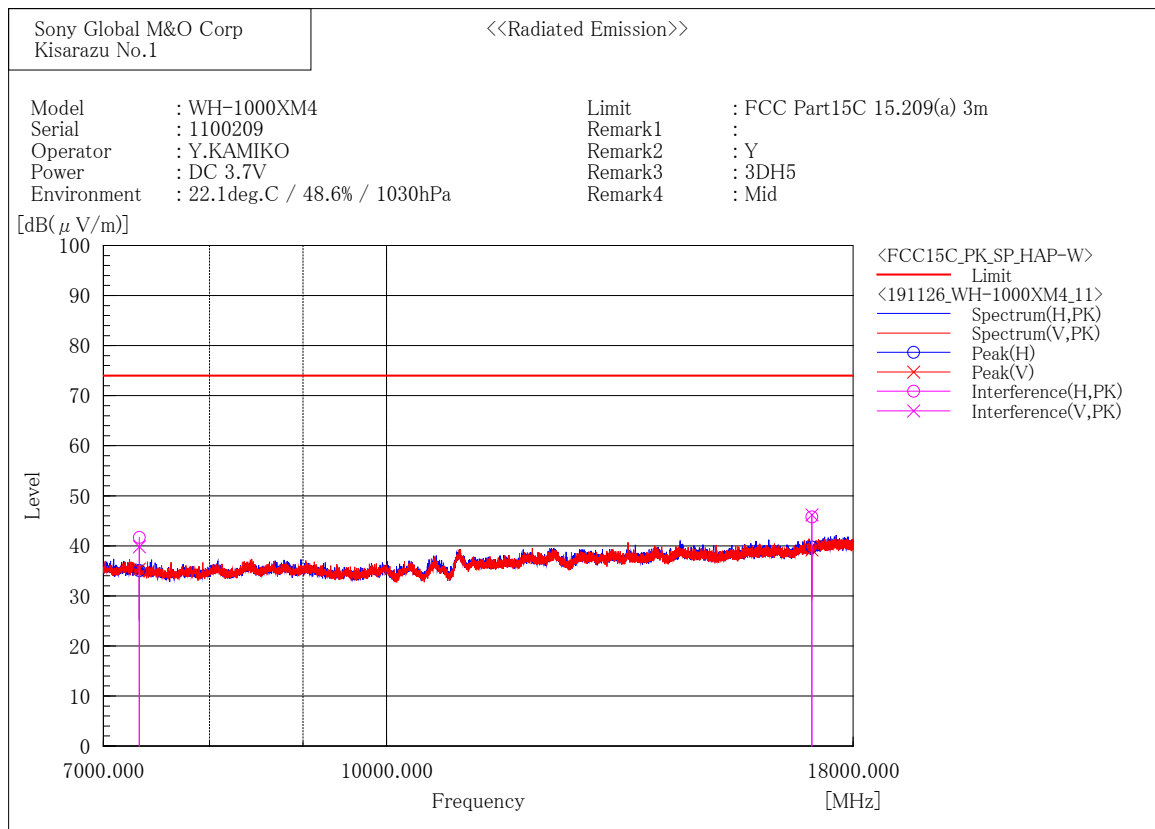

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.000	49.6	-7.9	41.7	74.0	32.3	400.5	319.0
2	17087.000	46.2	-0.4	45.8	74.0	28.2	217.0	346.8

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7323.000	47.7	-7.9	39.8	74.0	34.2	100.0	0.5
2	17087.000	46.6	-0.4	46.2	74.0	27.8	151.4	4.1

[EDR(3DH5) / 2480 MHz]

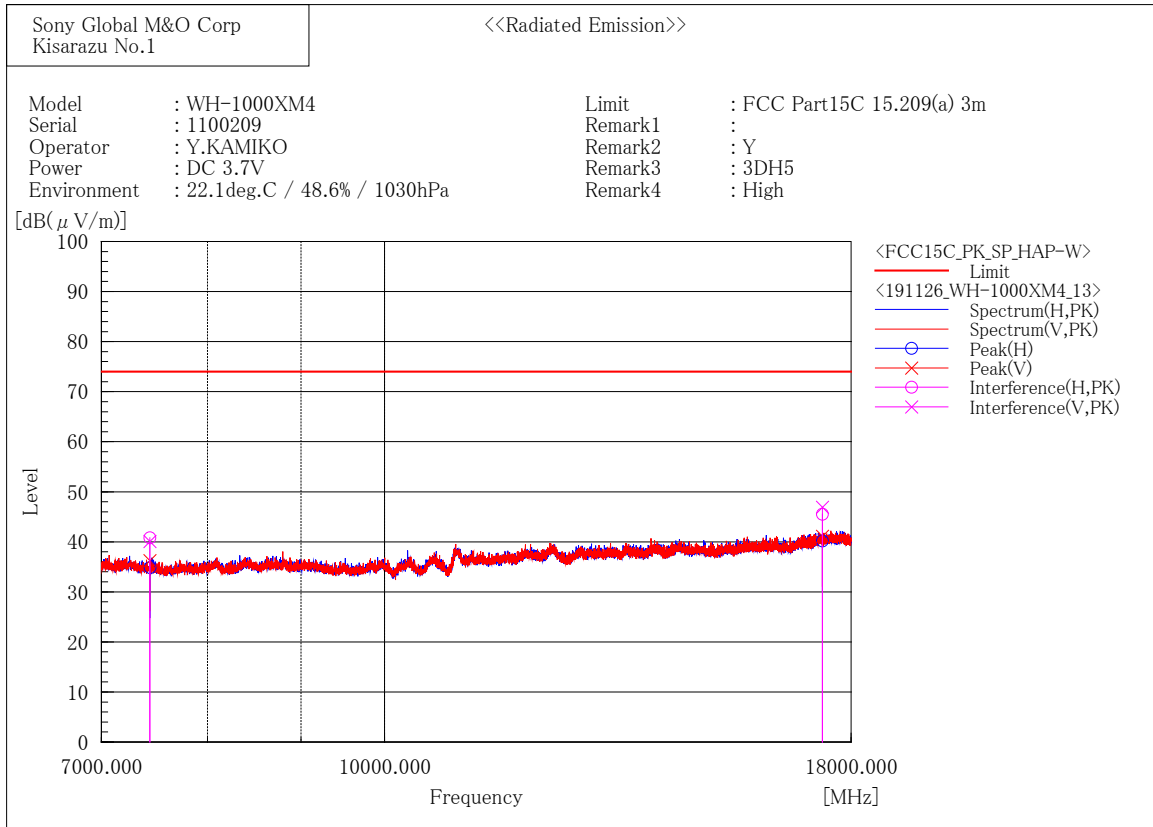

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7440.000	48.7	-7.9	40.8	74.0	33.2	431.0	276.8
2	17360.000	45.7	-0.2	45.5	74.0	28.5	121.1	269.7

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	7440.000	48.0	-7.9	40.1	74.0	33.9	285.4	329.3
2	17360.000	47.1	-0.2	46.9	74.0	27.1	393.8	267.0

18 GHz to 26.5 GHz
[BDR(DH5) / 2402 MHz]

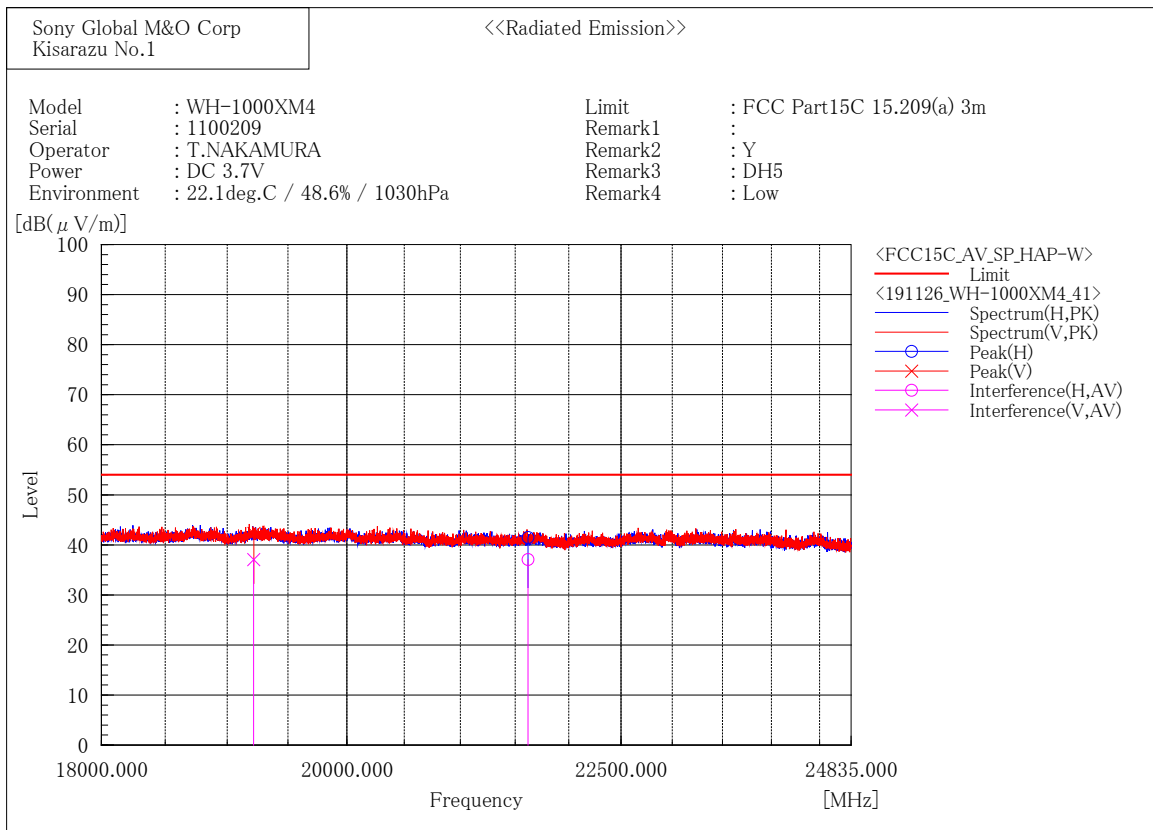

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21618.000	38.9	-1.8	37.1	54.0	16.9	251.8	94.9

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19216.000	37.9	-0.8	37.1	54.0	16.9	213.2	317.2

[BDR(DH5) / 2441 MHz]

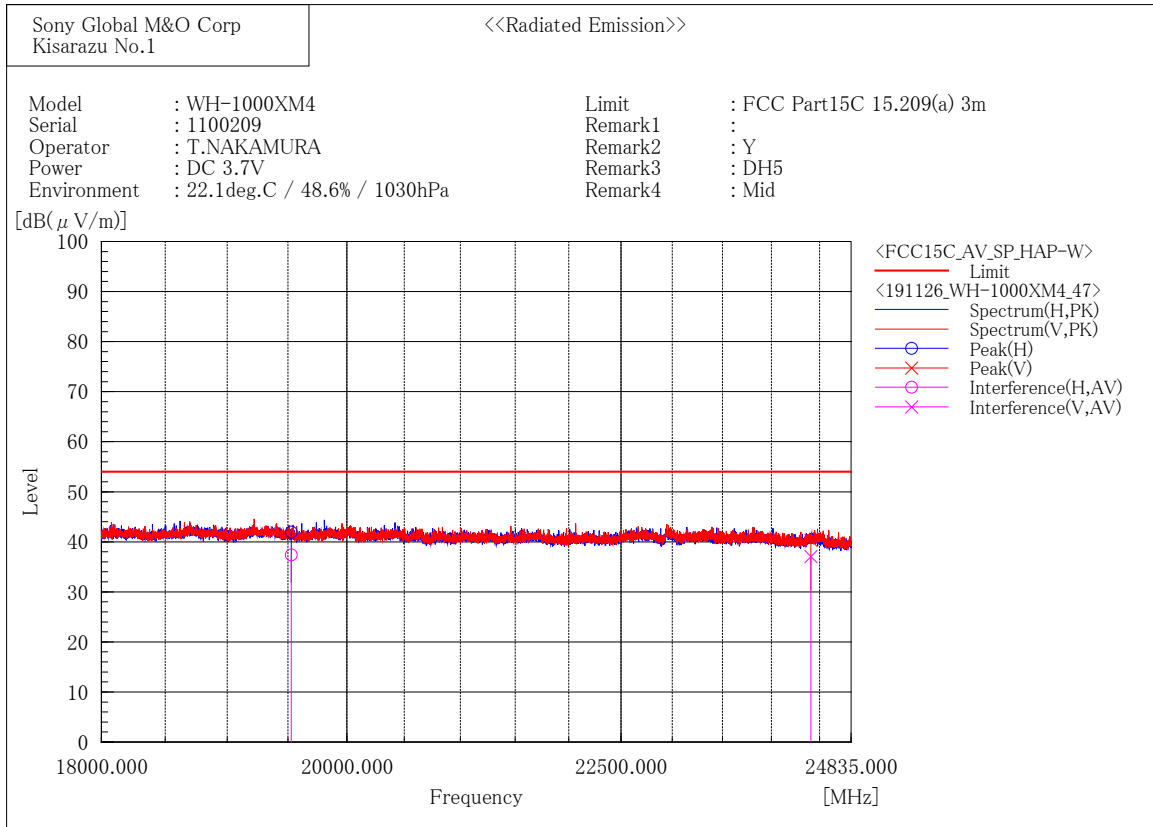

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19528.000	38.2	-0.8	37.4	54.0	16.6	319.8	173.1

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24410.000	39.7	-2.6	37.1	54.0	16.9	293.6	286.1

[BDR(DH5) / 2480 MHz]

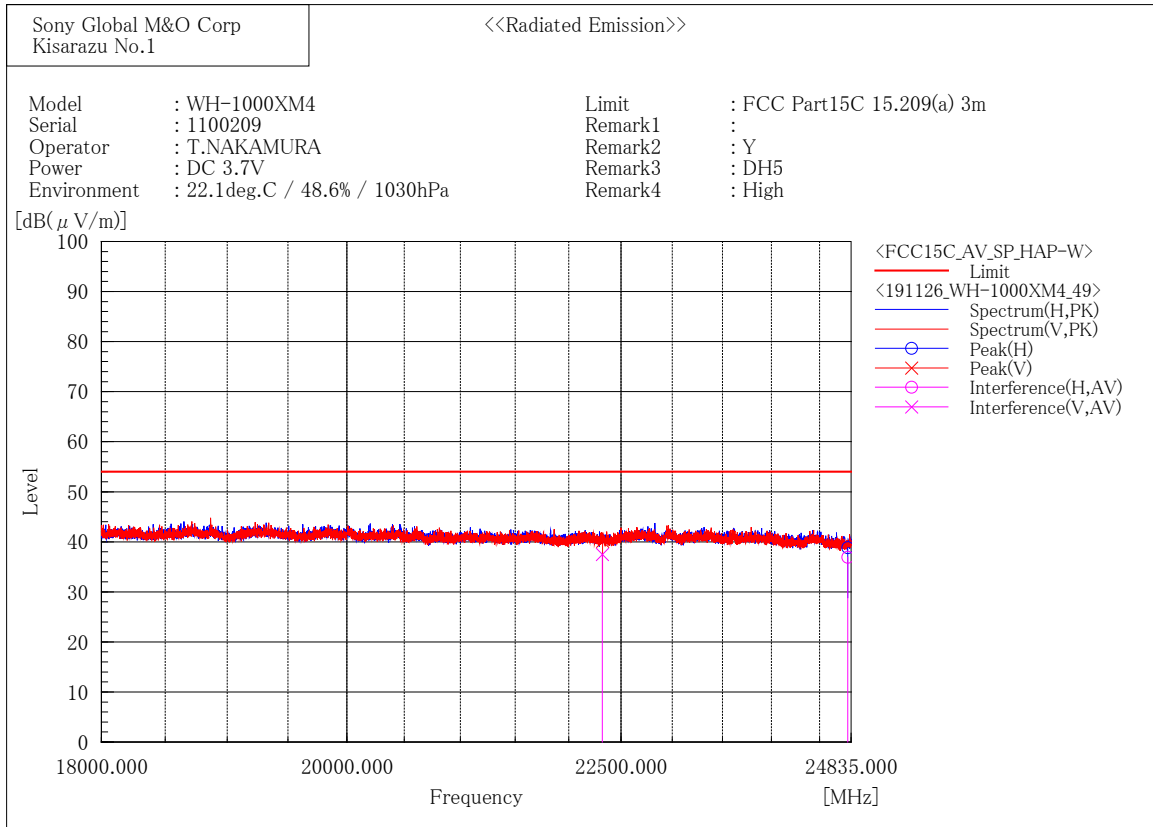

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24800.000	39.7	-2.8	36.9	54.0	17.1	278.9	153.7

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	22320.000	39.5	-2.0	37.5	54.0	16.5	197.0	17.9

[BDR(DH5) / 2402 MHz]

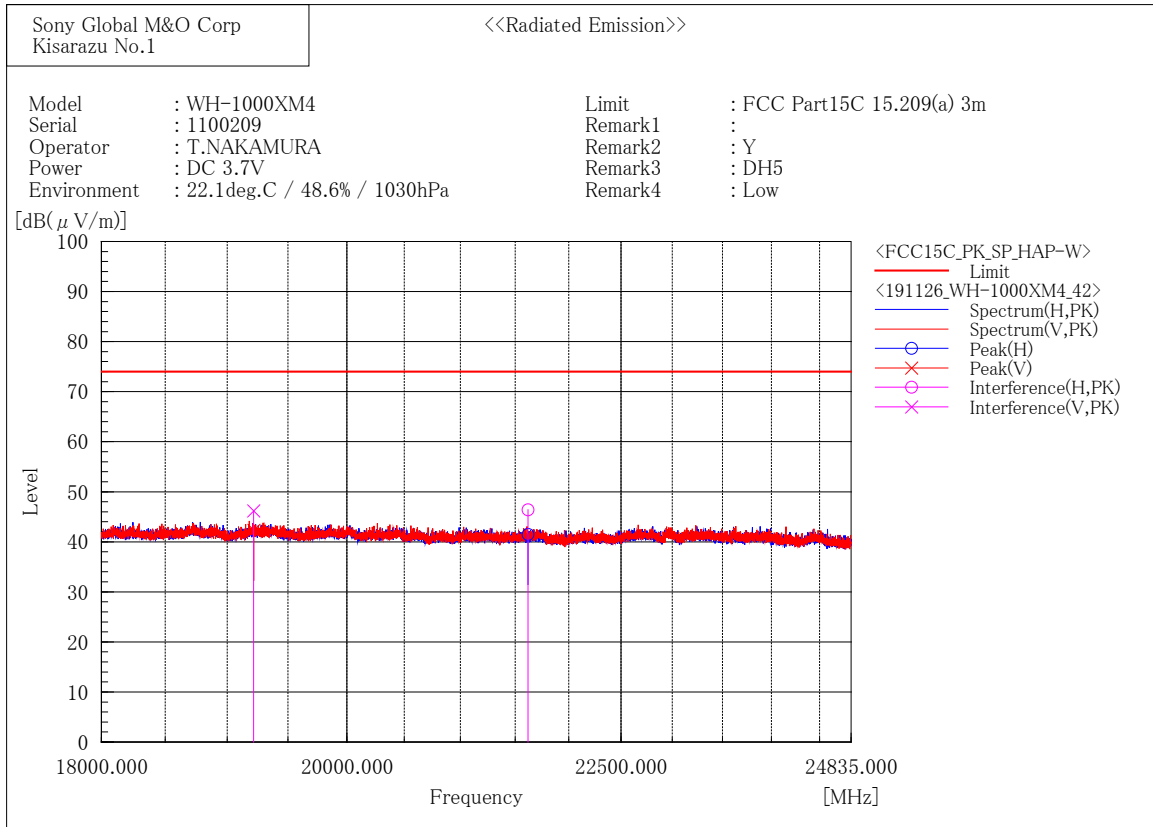

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21618.000	48.2	-1.8	46.4	74.0	27.6	247.9	96.5

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19216.000	47.0	-0.8	46.2	74.0	27.8	188.6	342.9

[BDR(DH5) / 2441 MHz]

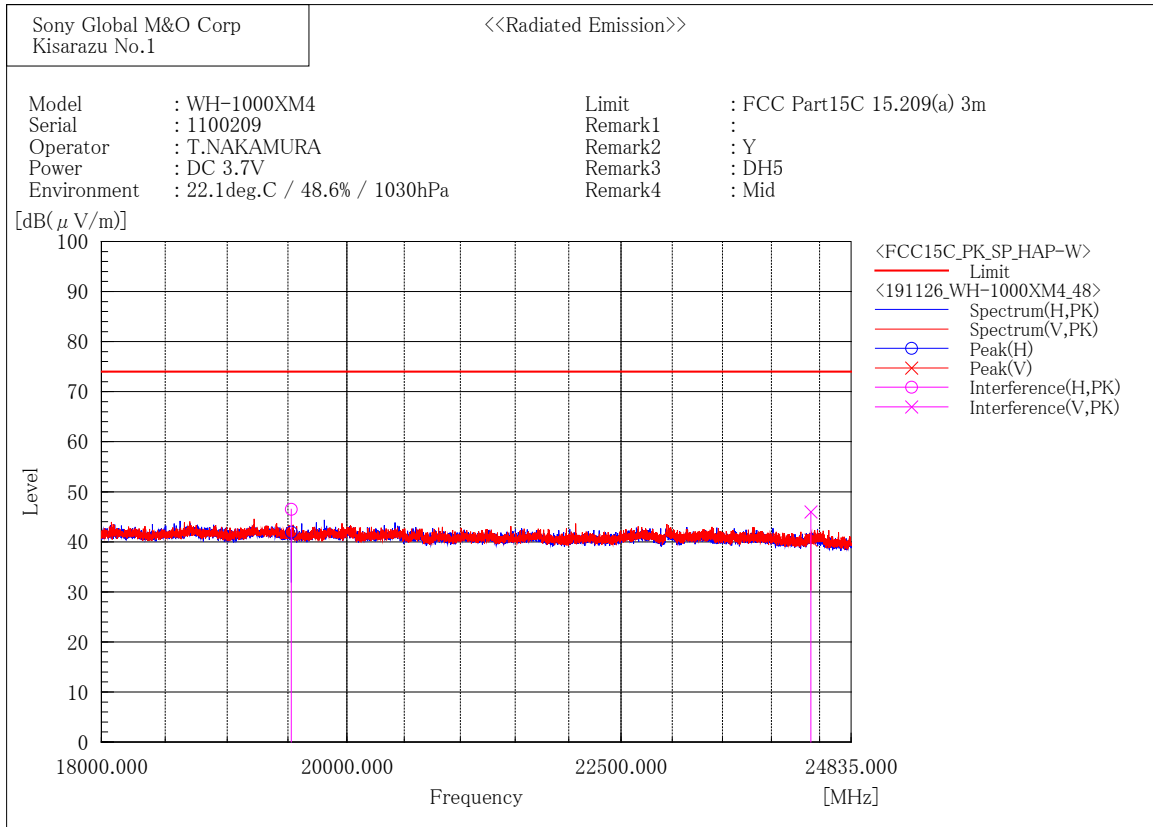

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19528.000	47.3	-0.8	46.5	74.0	27.5	299.1	194.0

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24410.000	48.6	-2.6	46.0	74.0	28.0	262.4	300.1

[BDR(DH5) / 2480 MHz]

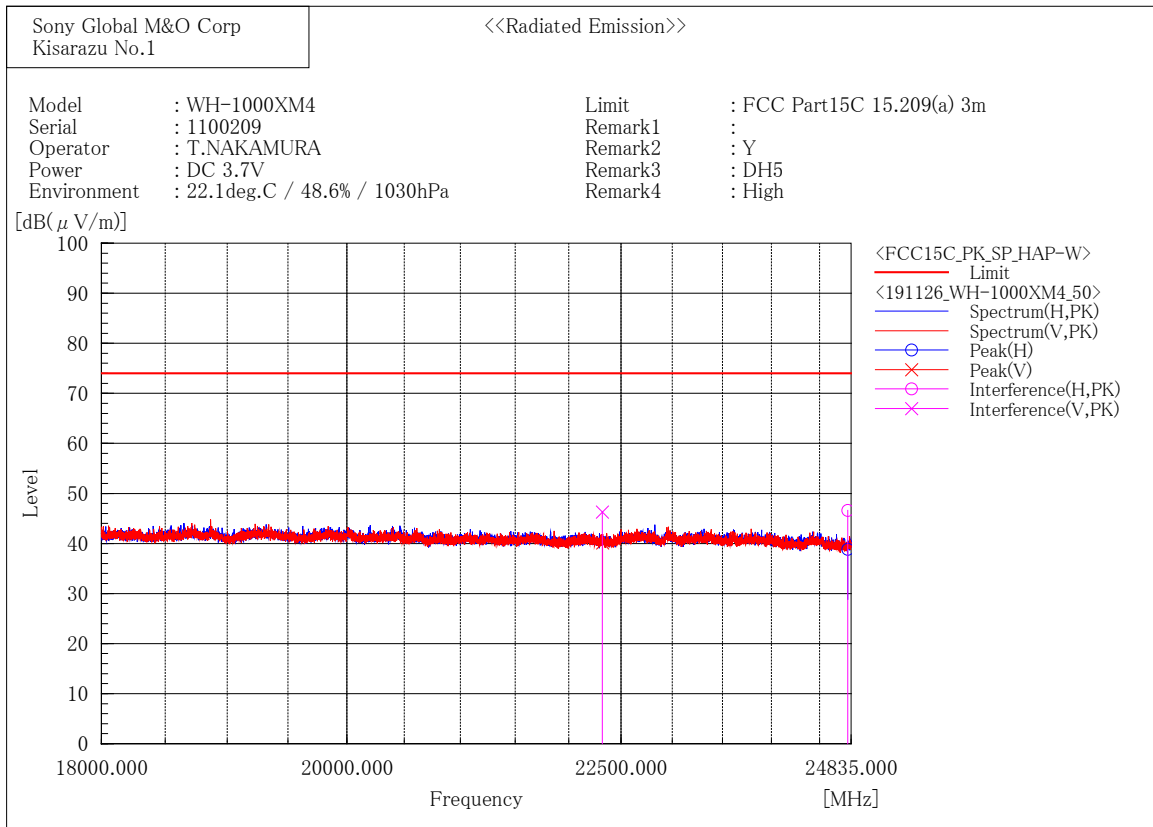

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24800.000	49.4	-2.8	46.6	74.0	27.4	266.2	163.0

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	22320.000	48.3	-2.0	46.3	74.0	27.7	194.0	20.3

[EDR(3DH5) / 2402 MHz]

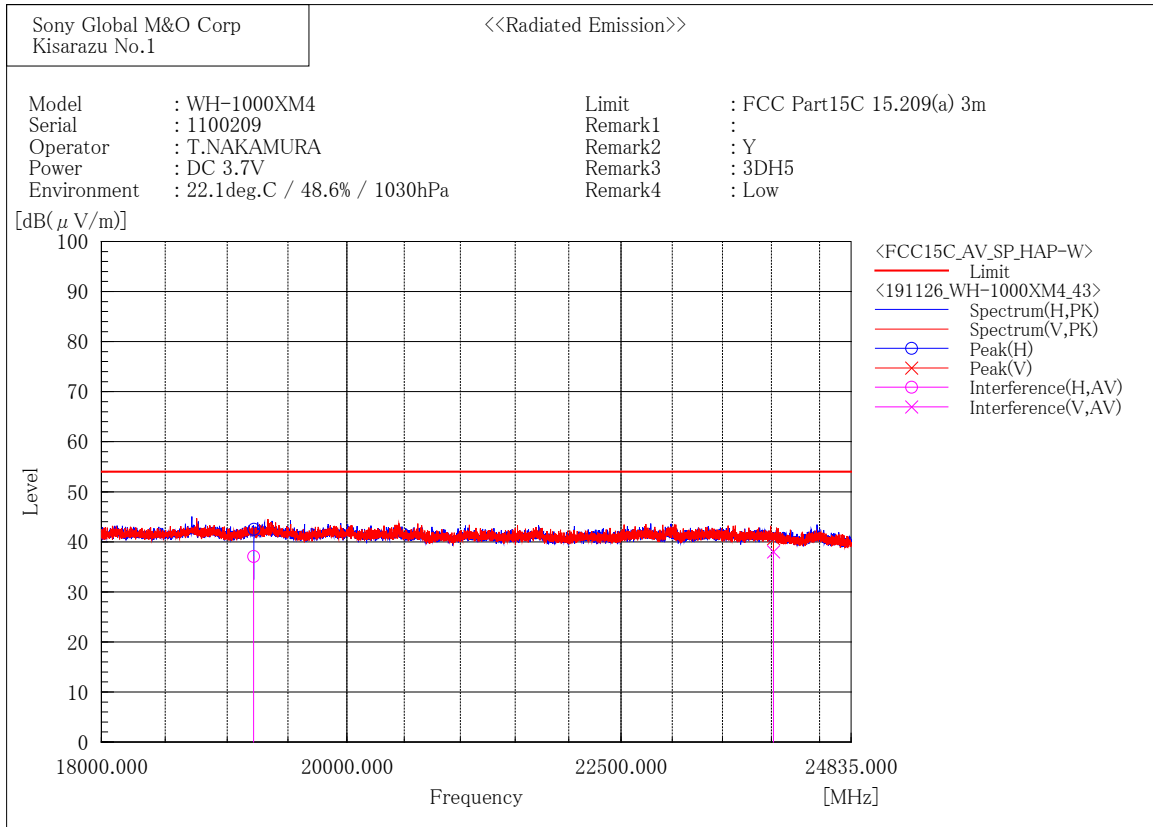

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19216.000	37.9	-0.8	37.1	54.0	16.9	226.8	244.8

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24020.000	40.3	-2.3	38.0	54.0	16.0	222.5	74.6

[EDR(3DH5) / 2441 MHz]

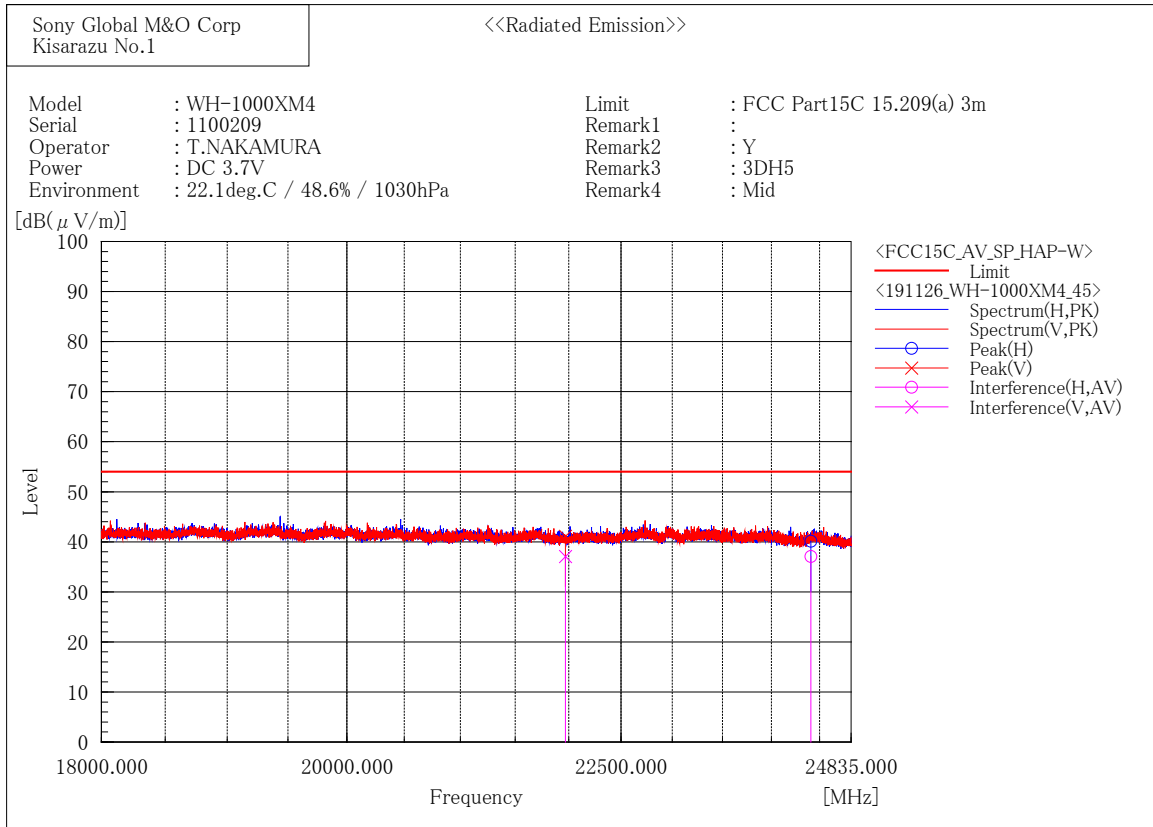

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24410.000	39.7	-2.6	37.1	54.0	16.9	161.8	121.2

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21969.000	39.1	-2.0	37.1	54.0	16.9	100.0	168.4

[EDR(3DH5) / 2480 MHz]

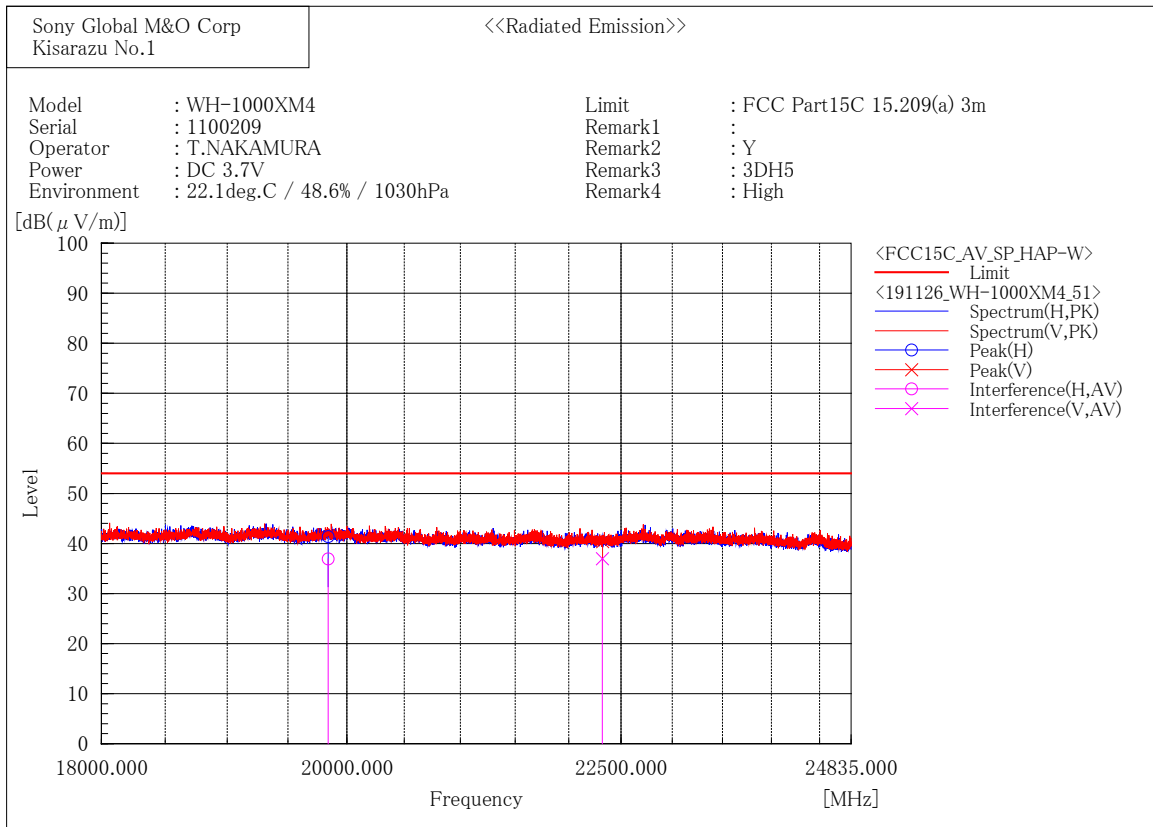

Final Result


--- Horizontal Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19840.000	37.8	-0.9	36.9	54.0	17.1	125.7	124.7

--- Vertical Polarization (AV)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	22320.000	39.0	-2.0	37.0	54.0	17.0	145.4	41.9

[EDR(3DH5) / 2402 MHz]

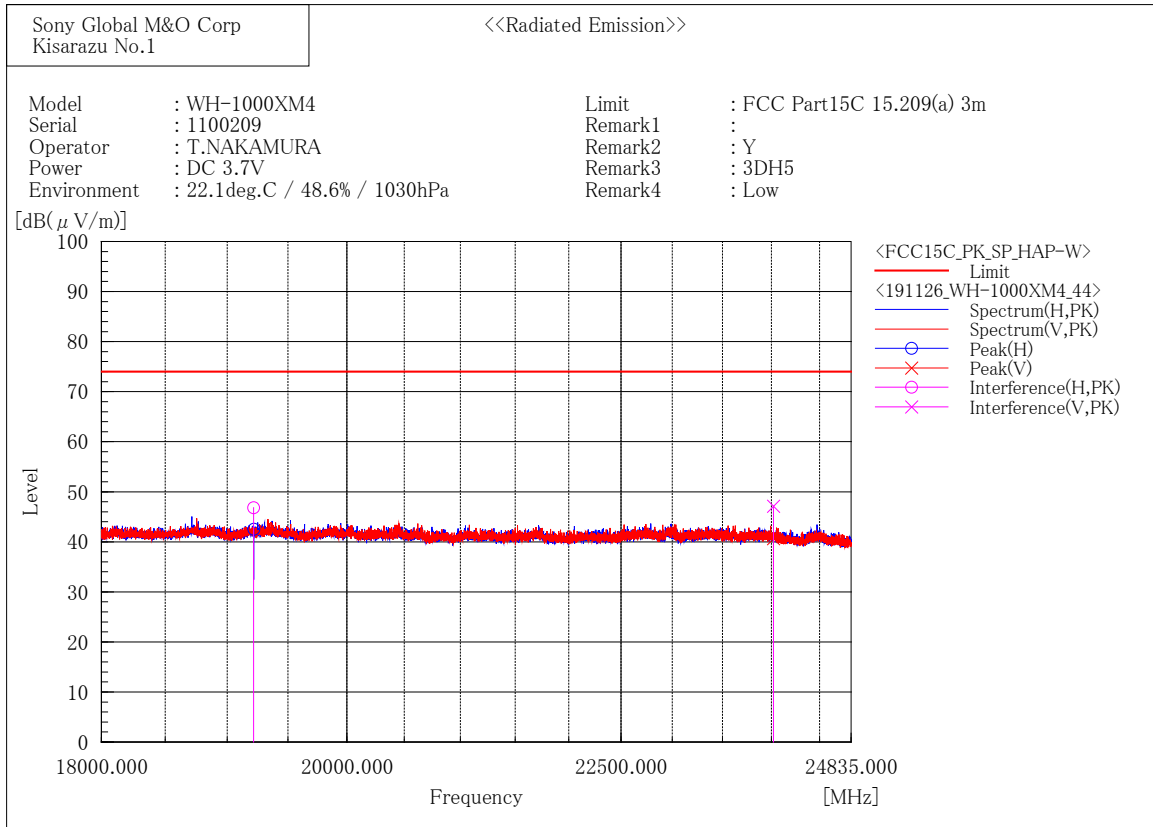

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19216.000	47.6	-0.8	46.8	74.0	27.2	216.0	246.4

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24020.000	49.4	-2.3	47.1	74.0	26.9	216.0	77.2

[EDR(3DH5) / 2441 MHz]

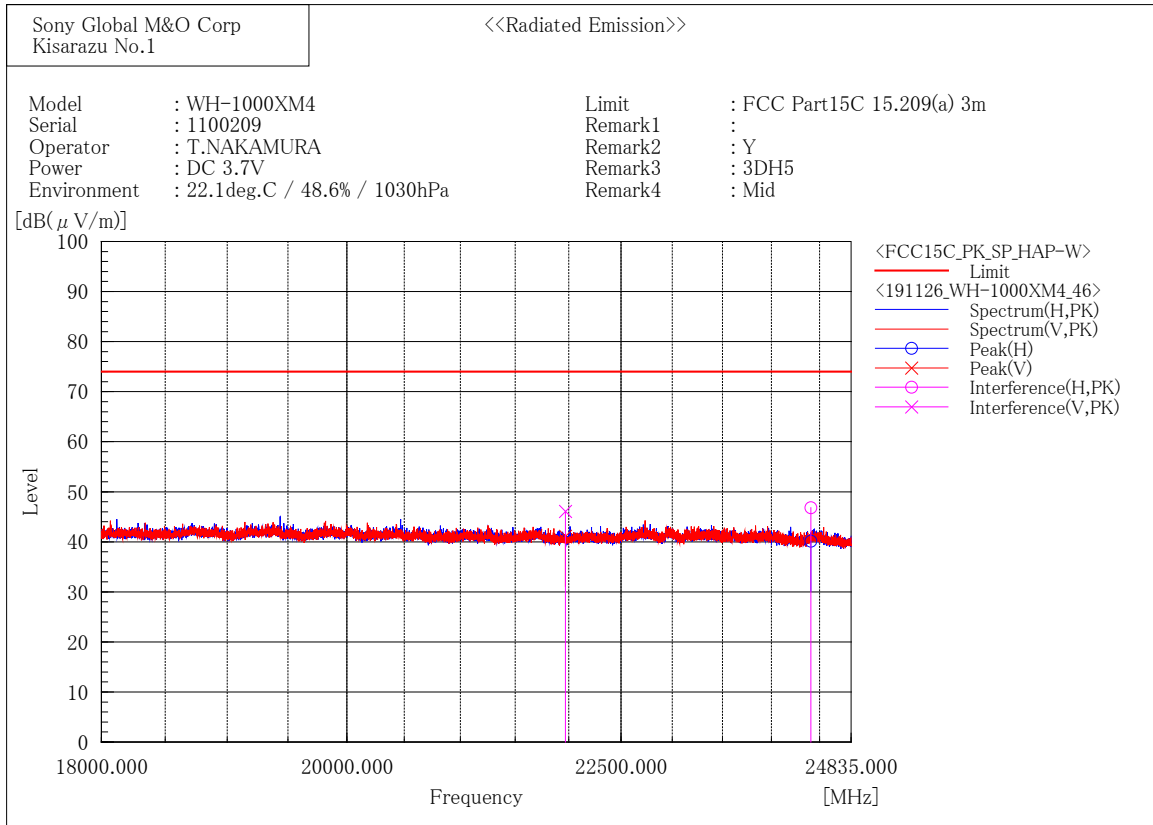

Final Result


--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	24410.000	49.4	-2.6	46.8	74.0	27.2	156.9	122.6

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	21969.000	48.1	-2.0	46.1	74.0	27.9	100.0	173.0

[EDR(3DH5) / 2480 MHz]

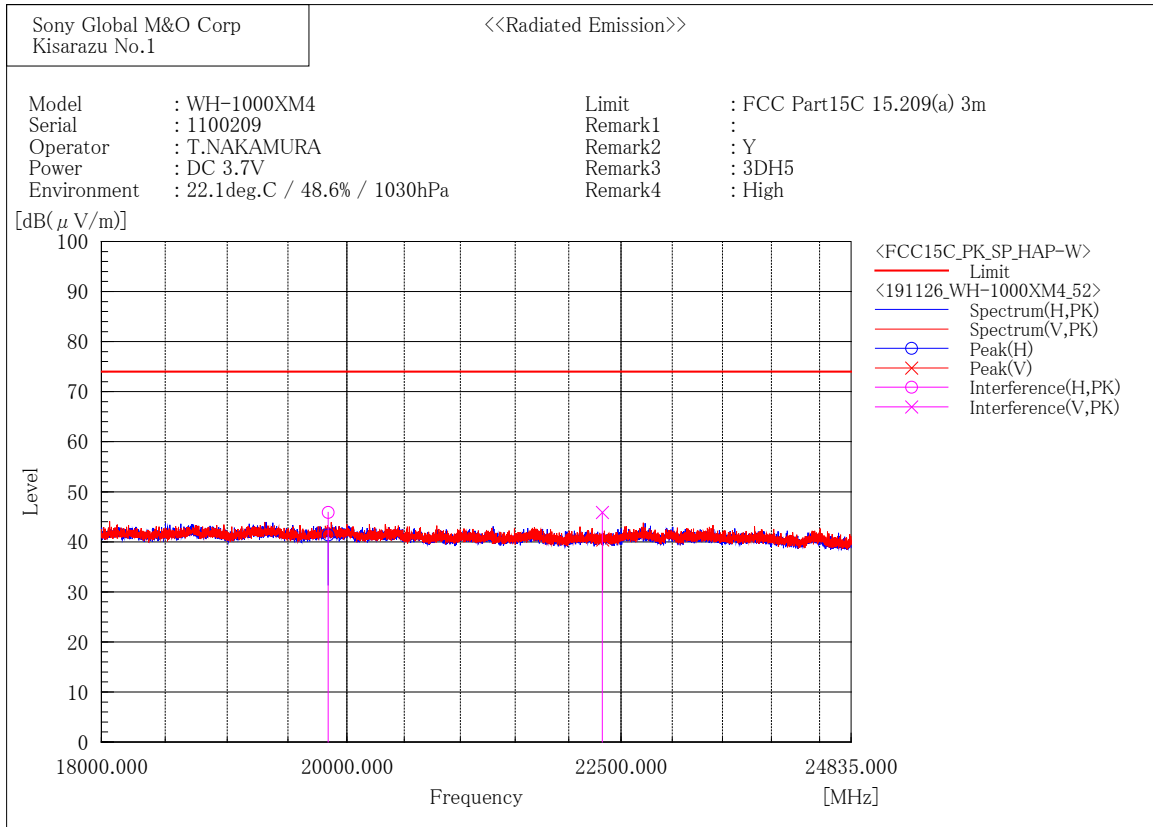

Final Result

--- Horizontal Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	19840.000	46.8	-0.9	45.9	74.0	28.1	120.6	128.7

--- Vertical Polarization (PK)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	22320.000	47.9	-2.0	45.9	74.0	28.1	137.4	46.9


2.4 GHz Restricted-Band Edge (Plot data)

These plot data show peak (trace blue) and average (trace black) spectrum for worst case emissions in the restricted-band edges. (Restricted band edges: below 2390 MHz and above 2483.5 MHz)

The result of the final radiated spurious emissions measurement refers in previous pages.


[BDR / 2402 MHz]

Horizontal

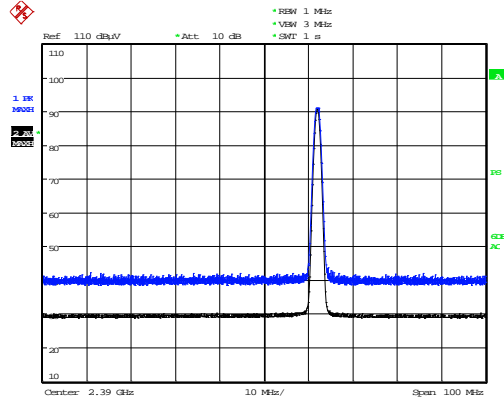

Date: 25.NOV.2019 12:53:17


Vertical

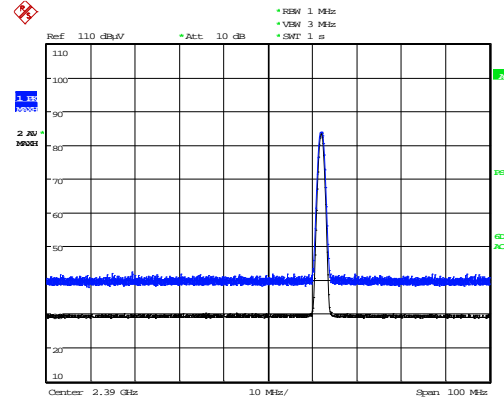

Date: 25.NOV.2019 13:03:02


[BDR / 2480 MHz]

Horizontal

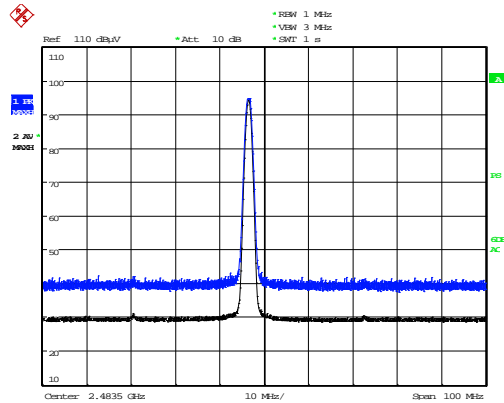

Date: 25.NOV.2019 15:40:01


Vertical

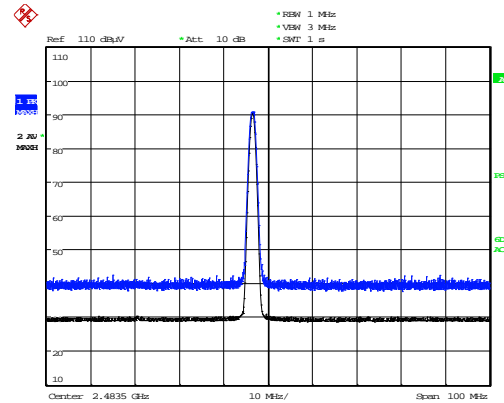

Date: 25.NOV.2019 15:49:52


[EDR / 2402 MHz]

Horizontal

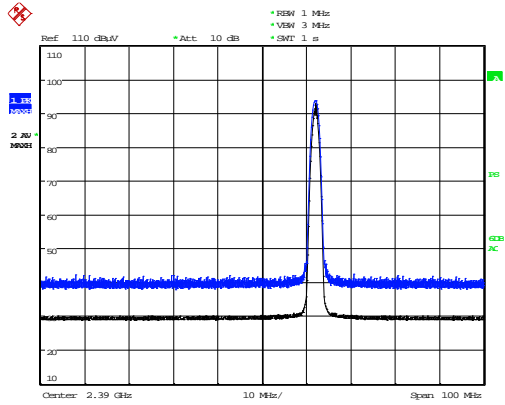

Date: 25.NOV.2019 18:38:57


Vertical

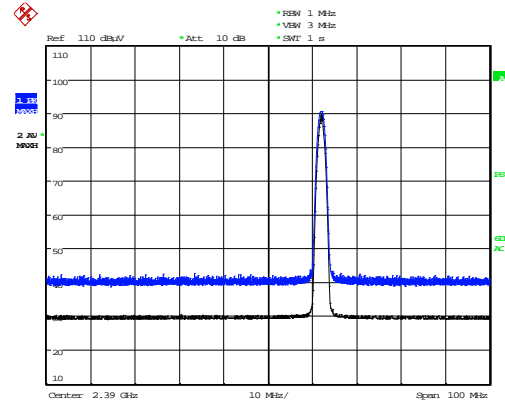

Date: 25.NOV.2019 18:27:39


[EDR / 2480 MHz]

Horizontal

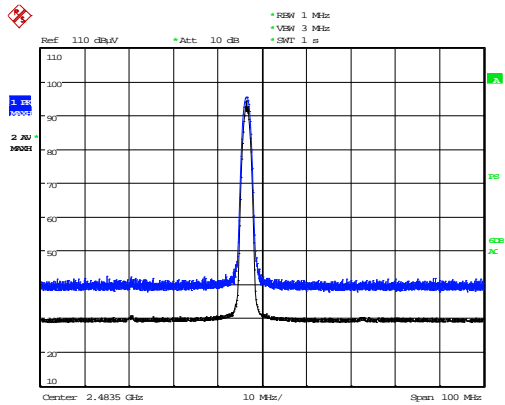

Date: 25.NOV.2019 20:13:03

Vertical

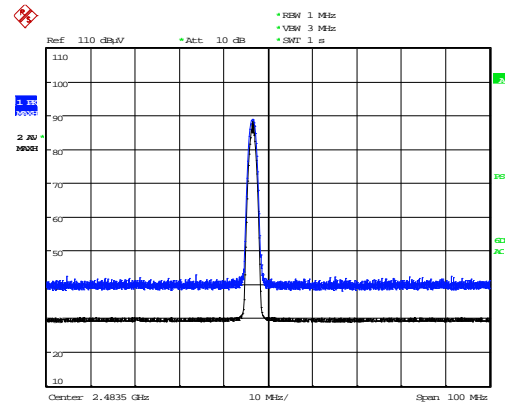


Date: 25.NOV.2019 20:05:58

3.7. Conducted Spurious Emissions for Band Edge


- 1) Ambient temperature : 23.3 deg.C
- 2) Relative humidity : 62.5 %
- 3) Date of measurement : November 19, 2019
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode		Channel [MHz]	Frequency [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result(PK) [dBm]	Limit [dBm]	Margin [dB]
BDR	DH5	2402	2402.16	4.87	0.70	5.57	-	-
			2399.99	-54.89	0.70	-54.19	-14.4	39.76
EDR	3DH5	2402	2402.16	3.60	0.70	4.30	-	-
			2399.99	-56.50	0.70	-55.80	-15.7	40.10

[BDR]

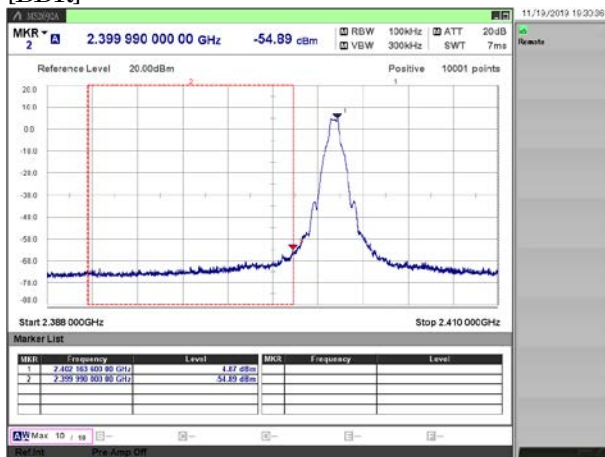

[EDR]

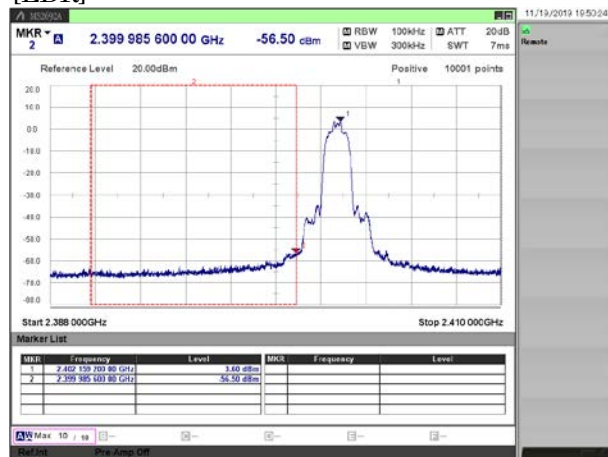

4. Method of Calculation

4.1. Time of Occupancy (Dwell Time)

Method of calculation : Software
 Software Name : SW-0308
 Software Version : Ver.4

Test Result [msec] = Dwell Time [msec] * Cycle [time] * 31.6 [sec] / Sweep Time [sec]

Note (a) Dwell Time : Transmission duration of 1 hopping.
 (b) Cycle : Number of hopping appearances on the spectrum analyzer.
 (The average of 10 measurements if it is random hopping equipment)
 (c) 31.6 : 0.4 [sec] * Number of Hopping Frequencies (79)
 (d) Sweep Time : Sweep time settings on the spectrum analyzer.

4.2. Maximum Peak Conducted Output Power

Method of calculation : Software
 Software Name : SW-0308
 Software Version : Ver.4

Test Result (PK) [dBm] = Meter Reading [dBm] + C.F. [dB]

Test Result (AV) [dBm] = Meter Reading [dBm] + C.F. [dB] + Duty Factor [dB]

Duty Cycle [%] = $T (Tx\ ON\ Time) / T_{(on+off)} (Tx\ ON\ Time + Tx\ OFF\ Time) * 100$

Note (a) Meter Reading : Reading of the power meter
 (b) C.F. : System Cable Loss + EUT Cable Loss
 (c) Duty Factor : $10\log \{(Tx\ ON\ Time + Tx\ OFF\ Time) / (Tx\ ON\ Time)\}$

4.3. Radiated Spurious Emissions

Method of calculation : Software
Software Name : V-Scan
Software Version : Ver.4.0.30

Test Result [dBuV/ m] = Meter Reading [dBuV] + C.F. [dB/ m]

Note (a) Meter Reading : Reading of the EMI test receiver or the spectrum analyzer.
(b) C.F. : Antenna Factor (including Balun Loss) + System GainLoss
: Antenna Factor (including Balun Loss) + System GainLoss + 20 log (3 m/ 10 m)

4.4. Conducted Spurious Emissions for Band Edge

Method of calculation : Software
Software Name : SW-0308
Software Version : Ver.4

Test Result [dBm] = Meter Reading [dBm] + C.F. [dB]

Note (a) Meter Reading : Reading of the spectrum analyzer.
(b) C.F. : System Cable Loss + EUT Cable Loss

5. List of Test Equipment

All test results are traceable to the national and/or international standards.

5.1. Antenna-port Conducted Measurements

	Ctrl#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Interval	Last Cal.
-	W0140	Spectrum Analyzer	FSU26	200717	Rohde & Schwarz	12 months	19.09.22
x	W0100	Spectrum Analyzer	MS2692A	6201338954	Anritsu	12 months	19.05.09
x	W0006	Power Meter	N1911A	MY50000295	Agilent Technologies	12 months	19.10.10
x	W0007	Power Sensor	N1922A	MY50180022	Agilent Technologies	12 months	19.10.10
-	W0029	10dB Attenuator	8493C	76549	Agilent Technologies	12 months	19.09.22
-	WC0002	RF Cable	SUCOFLEX 102	34124/2	HUBER + SUHNER	12 months	19.09.22
-	WC0003	RF Cable	SUCOFLEX 102	34127/2	HUBER + SUHNER	12 months	19.09.22
-	WC0004	RF Cable	SUCOFLEX 102	34288/2	HUBER + SUHNER	12 months	19.09.22
x	WC0005	RF Cable	SUCOFLEX 102	34287/2	HUBER + SUHNER	12 months	19.09.22
-	WC0006	RF Cable	SUCOFLEX 102	34289/2	HUBER + SUHNER	12 months	19.09.22
-	WC0007	RF Cable	SUCOFLEX 102	34286/2	HUBER + SUHNER	12 months	19.09.22
-	M0720	Thermometer	TH-321	140036	AS ONE	12 months	19.07.22
x	M0719	Thermometer	TH-321	140053	AS ONE	12 months	19.05.20

5.2. Radiated Spurious Emissions

	Ctrl#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Interval	Last Cal.
-	M0562	EMI Receiver	ESU26	100068	Rohde & Schwarz	12 months	19.07.08
-	M0959	EMI Receiver	ESU40	100041	Rohde & Schwarz	12 months	19.03.17
x	M0486	EMI Receiver	ESU40	100050	Rohde & Schwarz	12 months	19.09.22
x	M0685	EMI Receiver	N9038A	MY52260159	Agilent Technologies	12 months	19.03.01
x	A0057	Horn Antenna	HAP06-18W	00000037	Toyo Corporation	12 months	19.06.01
x	A0073	Loop Antenna	HFH2-Z2	100171	Rohde & Schwarz	12 months	18.12.10
x	A0089	Biconical Antenna	BBA9106	VHA91032835	Schwarzbeck	12 months	18.12.03
x	A0088	Log periodic Antenna	UHALP9108A1	0649	Schwarzbeck	12 months	18.12.03
x	A0064	Horn Antenna	BBHA9120D	746	Schwarzbeck	12 months	19.11.17
-	A0078	Horn Antenna	HAP06-18W	00000070	Toyo Corporation	12 months	19.11.17
x	A0058	Horn Antenna	HAP18-26W	00000016	Toyo Corporation	12 months	18.12.01
x	CS0017	N-RE Cable System 1	-	-	-	12 months	19.11.17
x	CS0018	N-RE Cable System 2	-	-	-	12 months	19.11.17
x	CS0045	N-3m EMF Cable System	-	-	-	12 months	19.11.17
x	CS0074/0075	N-RE Cable SYSTEM 4	-	-	-	12 months	19.11.17
x	M0126	Step Attenuator	8494H	3837M01144	Agilent Technologies	12 months	19.11.17
x	M0752	Pre Amplifier	310N	320621	SONOMA INSTRUMENT	12 months	19.11.17
x	M0128	3dB Attenuator	8491A	53541	Agilent Technologies	12 months	19.11.17
x	M0609	3dB Attenuator	8491B	MY39265960	Agilent Technologies	12 months	19.11.17
x	M0737	GHz Filter Box	FB-G1	001	Sony EMCS	12 months	19.11.17
x	M5079	Temperature Meter	608-H2	41475953	testo	12 months	19.10.28
x	M5062	Scientific Ambient Monitor	0560 6220	39515563/802	testo	12 months	19.08.02

About calibration interval

Valid until the end of the month listed in "Cal. Int." column.