



RADIO TEST REPORT

Test Report No. : 12327512S-C

Applicant : Sony Corporation
Type of Equipment : Wireless Noise Canceling Stereo Headset
Model No. : WI-C600N
FCC ID : AK8WIC600N
Test regulation : FCC Part 15 Subpart C: 2018
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. This test report covers EMC technical requirements.
It does not cover administrative issues such as Manual or non-EMC test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: May 20 to 31, 2018

Representative test engineer:

M. Hosaka

Makoto Hosaka
Engineer
Consumer Technology Division

Approved by:

T. Imamura

Toyokazu Imamura
Leader
Consumer Technology Division



- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".

UL Japan, Inc.
Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

13-EM-F0429

| CONTENTS | PAGE |
|---|-------------|
| SECTION 1: Customer information..... | 4 |
| SECTION 2: Equipment under test (E.U.T.)..... | 4 |
| SECTION 3: Test specification, procedures & results..... | 5 |
| SECTION 4: Operation of E.U.T. during testing..... | 8 |
| SECTION 5: Radiated Spurious Emission | 9 |
| SECTION 7: Antenna Terminal Conducted Tests..... | 11 |
| APPENDIX 1: Test data | 12 |
| 6 dB Bandwidth and 99 % Occupied Bandwidth..... | 12 |
| Maximum Peak Output Power | 14 |
| Average Output Power | 15 |
| Radiated Spurious Emission | 17 |
| Conducted Spurious Emission | 23 |
| Conducted Spurious Emission | 24 |
| Conducted Spurious Emission | 25 |
| Power Density | 26 |
| APPENDIX 2: Test instruments | 28 |
| APPENDIX 3: Photographs of test setup | 29 |
| Radiated Spurious Emission | 29 |
| Pre-check of Worst Case Position..... | 30 |

SECTION 1: Customer information

Company Name : Sony Corporation
Address : 1-7-1 Konan Minato-ku, Tokyo, 108-0075, Japan
Telephone Number : +604-3835019
Contact Person : Maizatul Akmal Binti Mat Zan

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Wireless Noise Canceling Stereo Headset
Model No. : WI-C600N
Serial No. : Refer to Section 4, Clause 4.2
Rating : DC 3.7 V: Built-in lithium-ion rechargeable battery
DC 5 V: When charged using USB
Receipt Date of Sample : May 10, 2018
Country of Mass-production : Malaysia
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model: WI-C600N (referred to as the EUT in this report) is a Wireless Noise Canceling Stereo Headset.

Radio Specification

Bluetooth Low Energy

Radio Type : Transceiver
Frequency of Operation : 2402 MHz - 2480 MHz
Modulation : GFSK
Antenna type : Chip Antenna
Antenna Gain : 2.85 dBi
Clock frequency (Maximum) : 26 MHz (XTAL)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on March 12, 2018 and effective April 11, 2018

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

* Also the EUT complies with FCC Part 15 Subpart B. Refer to the test report: 12327512S-E.

3.2 Procedures and results

| Item | Test Procedure | Specification | Worst margin | Results | Remarks |
|---|---|--|---|-----------|---|
| Conducted Emission | FCC: ANSI C63.10-2013 6. Standard test methods ----- IC: RSS-Gen 8.8 | FCC: Section 15.207 ----- IC: RSS-Gen 8.8 | N/A | N/A | *1) |
| 6dB Bandwidth | FCC: KDB 558074 D01 DTS Meas Guidance v04 ----- IC: - | FCC: Section 15.247(a)(2) ----- IC: RSS-247 5.2(a) | See data. | Complied | Conducted |
| Maximum Peak Output Power | FCC: KDB 558074 D01 DTS Meas Guidance v04 ----- IC: RSS-Gen 6.12 | FCC: Section 15.247(b)(3) ----- IC: RSS-247 5.4(d) | | Complied | Conducted |
| Power Density | FCC: KDB 558074 D01 DTS Meas Guidance v04 ----- IC: - | FCC: Section 15.247(e) ----- IC: RSS-247 5.2(b) | | Complied | Conducted |
| Spurious Emission Restricted Band Edges | FCC: KDB 558074 D01 DTS Meas Guidance v04 ----- IC: RSS-Gen 6.13 | FCC: Section15.247(d) ----- IC: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10 | 4.6 dB 7206.000 MHz, AV, Vert. Tx BT LE, 2402 MHz | Complied# | Conducted (below 30 MHz)/ Radiated (above 30 MHz) *2) |

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) The EUT operates with a battery. AC Line can be connected to the EUT via other device's USB port; however, the EUT stops transmission during recharging. Therefore, the test is not applicable to the EUT.

*2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 DTS Meas Guidance v04 12.2.7.

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

The EUT is a battery-operated device and test was performed with the full-charged battery. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.3 Addition to standard

| Item | Test Procedure | Specification | Worst margin | Results | Remarks |
|------------------------|-----------------|---------------|--------------|---------|-----------|
| 99% Occupied Bandwidth | IC: RSS-Gen 6.6 | IC: - | N/A | - | Conducted |

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Shonan EMC Lab.

| Item | Frequency range | Uncertainty (+/-) | | | | | |
|--|-----------------|-------------------|----------------|----------------|----------------|--------------|--|
| | | No. 1 SAC / SR | No. 2 SAC / SR | No. 3 SAC / SR | No. 4 SAC / SR | No. 5,6,8 SR | |
| Radiated emission (Measurement distance: 3 m) | 9 kHz-30 MHz | 3.2 dB | 3.2 dB | 3.3 dB | - | - | |
| | 30 MHz-200 MHz | 4.9 dB | 4.8 dB | 4.9 dB | - | - | |
| | 200 MHz-1 GHz | 6.1 dB | 6.1 dB | 6.1 dB | - | - | |
| | 1 GHz-6 GHz | 4.7 dB | 4.7 dB | 4.7 dB | - | - | |
| | 6 GHz-18 GHz | 5.3 dB | 5.3 dB | 5.3 dB | - | - | |
| | 18 GHz-40 GHz | 5.6 dB | 5.6 dB | 5.6 dB | - | - | |
| Radiated emission (Measurement distance: 1 m) | 1 GHz-18 GHz | 5.6 dB | 5.6 dB | 5.6 dB | - | - | |
| | 18 GHz-40 GHz | 5.9 dB | 5.9 dB | 5.9 dB | - | - | |

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

| Antenna terminal test | Uncertainty (+/-) |
|---|-------------------|
| Power Measurement above 1 GHz (Average Detector)_SPM-06 | 0.48 dB |
| Power Measurement above 1 GHz (Peak Detector)_SPM-06 | 0.66 dB |
| Power Measurement above 1 GHz (Average Detector)_SPM-07 | 0.47 dB |
| Power Measurement above 1 GHz (Peak Detector)_SPM-07 | 0.64 dB |
| Power Measurement above 1 GHz (Average Detector)_SPM-13 | 0.90 dB |
| Power Measurement above 1 GHz (Peak Detector)_SPM-13 | 1.04 dB |
| Spurious emission (Conducted) below 1GHz | 1.8 dB |
| Spurious emission (Conducted) 1 GHz-3 GHz | 1.7 dB |
| Spurious emission (Conducted) 3 GHz-18 GHz | 2.5 dB |
| Spurious emission (Conducted) 18 GHz-26.5 GHz | 2.5 dB |
| Spurious emission (Conducted) 26.5 GHz-40 GHz | 2.7 dB |
| Bandwidth Measurement | 1.01 % |
| Duty cycle and Time Measurement | 0.012 % |

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.
1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN
Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401
JAB Accreditation No. RTL02610
FCC Test Firm Registration Number: 839876

| Test site | IC Registration Number | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Maximum measurement distance |
|----------------------------|------------------------|----------------------------|--|------------------------------|
| No.1 Semi-anechoic chamber | 2973D-1 | 20.6 x 11.3 x 7.65 | 20.6 x 11.3 | 10 m |
| No.2 Semi-anechoic chamber | 2973D-2 | 20.6 x 11.3 x 7.65 | 20.6 x 11.3 | 10 m |
| No.3 Semi-anechoic chamber | 2973D-3 | 12.7 x 7.7 x 5.35 | 12.7 x 7.7 | 5 m |
| No.4 Semi-anechoic chamber | - | 8.1 x 5.1 x 3.55 | 8.1 x 5.1 | - |
| No.1 Shielded room | - | 6.8 x 4.1 x 2.7 | 6.8 x 4.1 | - |
| No.2 Shielded room | - | 6.8 x 4.1 x 2.7 | 6.8 x 4.1 | - |
| No.3 Shielded room | - | 6.3 x 4.7 x 2.7 | 6.3 x 4.7 | - |
| No.4 Shielded room | - | 4.4 x 4.7 x 2.7 | 4.4 x 4.7 | - |
| No.5 Shielded room | - | 7.8 x 6.4 x 2.7 | 7.8 x 6.4 | - |
| No.6 Shielded room | - | 7.8 x 6.4 x 2.7 | 7.8 x 6.4 | - |
| No.8 shielded room | - | 3.45 x 5.5 x 2.4 | 3.45 x 5.5 | - |
| No.1 Measurement room | - | 2.55 x 4.1 x 2.5 | - | - |

3.6 Test data, Test instruments, and Test set up


Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

| Mode | Frequency | Remarks* |
|---|------------------------------|----------|
| Bluetooth Low Energy | 2402 MHz, 2440 MHz, 2480 MHz | PN9 |
| <p>*Power of the EUT was set by the software as follows; - Power Setting: Fixed - Software: CSR BlueSuite BlueTest3 Version 2.6.6</p> <p>*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p> | | |

4.2 Configuration and peripherals

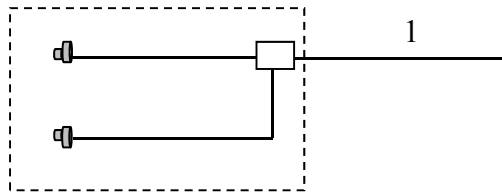

A: EUT

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT

| No. | Item | Model number | Serial number | Manufacturer | Remarks |
|-----|---|--------------|----------------------------|------------------|---------|
| A | Wireless Noise Canceling Stereo Headset | WI-C600N | 1000232 *1) 1000227 *2) | Sony Corporation | EUT |

*1) Used for Antenna Terminal conducted test

*2) Used for Radiated Emission test

List of cables used

| No. | Name | Length (m) | Shield | | Remarks |
|-----|-----------|------------|----------|-----------|---------|
| | | | Cable | Connector | |
| 1 | USB Cable | 0.2 | Shielded | Shielded | - |

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 5: Radiated Spurious Emission

Test Procedure

It was measured based on "11.0 Emissions in non-restricted frequency bands" of "KDB 558074 D01 DTS Meas Guidance v04".

[For below 1 GHz]

EUT was placed on a platform of nominal size, 1.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The table is made of expanded polystyrol and expanded polypropylene and the table top is covered with polycarbonate. That has very low permittivity. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

| | | | |
|--------------|-------------------|------------------|-------------|
| Frequency | 30 MHz to 200 MHz | 200 MHz to 1 GHz | Above 1 GHz |
| Antenna Type | Biconical | Logperiodic | Horn |

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(IC) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (IC).

| | | | | |
|-----------------|---------------|---|---|---|
| Frequency | Below 1 GHz | Above 1 GHz | | 20 dBc |
| Instrument used | Test Receiver | Spectrum Analyzer | | Spectrum Analyzer |
| Detector | QP | PK | AV *1) | PK |
| IF Bandwidth | BW 120 kHz | RBW: 1 MHz VBW: 3 MHz | Average Power Method: <u>12.2.5.2</u> RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (Linear voltage) Trace: 100 traces Duty factor was added to the results. | RBW: 100 kHz VBW: 300 kHz |
| Test Distance | 3 m | 3.92 m *2) (1 GHz – 13 GHz), 1 m *3) (13 GHz – 26.5 GHz) | | 3.92 m *2) (1 GHz – 13 GHz), 1 m *3) (13 GHz – 26.5 GHz) |

*1) Average Power Measurement was performed based on 6.0 & 12.2.5 of "KDB 558074 D01 DTS Meas Guidance v04".

*2) Distance Factor: $20 \times \log(3.92 \text{ m} / 3.0 \text{ m}) = 2.33 \text{ dB}$

*3) Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

| Antenna polarization | Frequency | | | |
|----------------------|-------------|-----------------|------------------|-------------------|
| | Below 1 GHz | 1 GHz - 2.8 GHz | 2.8 GHz - 13 GHz | 13 GHz - 26.5 GHz |
| Horizontal | X | Z | Z | X |
| Vertical | X | X | Y | X |

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz
Test data : APPENDIX
Test result : Pass

SECTION 7: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

| Test | Span | RBW | VBW | Sweep time | Detector | Trace | Instrument used |
|---------------------------------|---|-----------------|--------------------|-------------------|------------------|--------------|---------------------------------|
| 6dB Bandwidth | 10 MHz | 100 kHz | 300 kHz | Auto | Peak | Max Hold | Spectrum Analyzer |
| 99% Occupied Bandwidth *1) | Enough width to display emission skirts | 1 to 5 % of OBW | Three times of RBW | Auto | Peak | Max Hold | Spectrum Analyzer |
| Maximum Peak Output Power | - | - | - | Auto | Peak/Average *2) | - | Power Meter (Sensor: 50 MHz BW) |
| Peak Power Density | 1.5 times the 6dB Bandwidth | 3 kHz | 9.1 kHz | Auto | Peak | Max Hold | Spectrum Analyzer *3) |
| Conducted Spurious Emission *4) | 9kHz to 150kHz | 200 Hz | 620 Hz | Auto | Peak | Max Hold | Spectrum Analyzer |
| | 150kHz to 30MHz | 10 kHz | 30 kHz | | | | |

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 10.2 Method PKPSD (peak PSD) of "KDB 558074 D01 DTS Meas Guidance v04".

*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


APPENDIX 1: Test data

6 dB Bandwidth and 99 % Occupied Bandwidth

Report No. 12327512S-C
Test place Shonan EMC Lab. No.5 Shielded Room
Date May 31, 2018
Temperature / Humidity 25 deg. C / 47 % RH
Engineer Makoto Hosaka
Mode Tx

| Mode | Frequency [MHz] | 99% Occupied Bandwidth [kHz] | 6dB Bandwidth [kHz] | Limit for 6dB Bandwidth [MHz] |
|-------|--------------------|------------------------------------|------------------------|-------------------------------------|
| BT LE | 2402 | 1039.0 | 721.793 | > 0.5000 |
| | 2440 | 1037.4 | 716.572 | > 0.5000 |
| | 2480 | 1036.0 | 730.329 | > 0.5000 |

6dB Bandwidth and 99 % Occupied Bandwidth

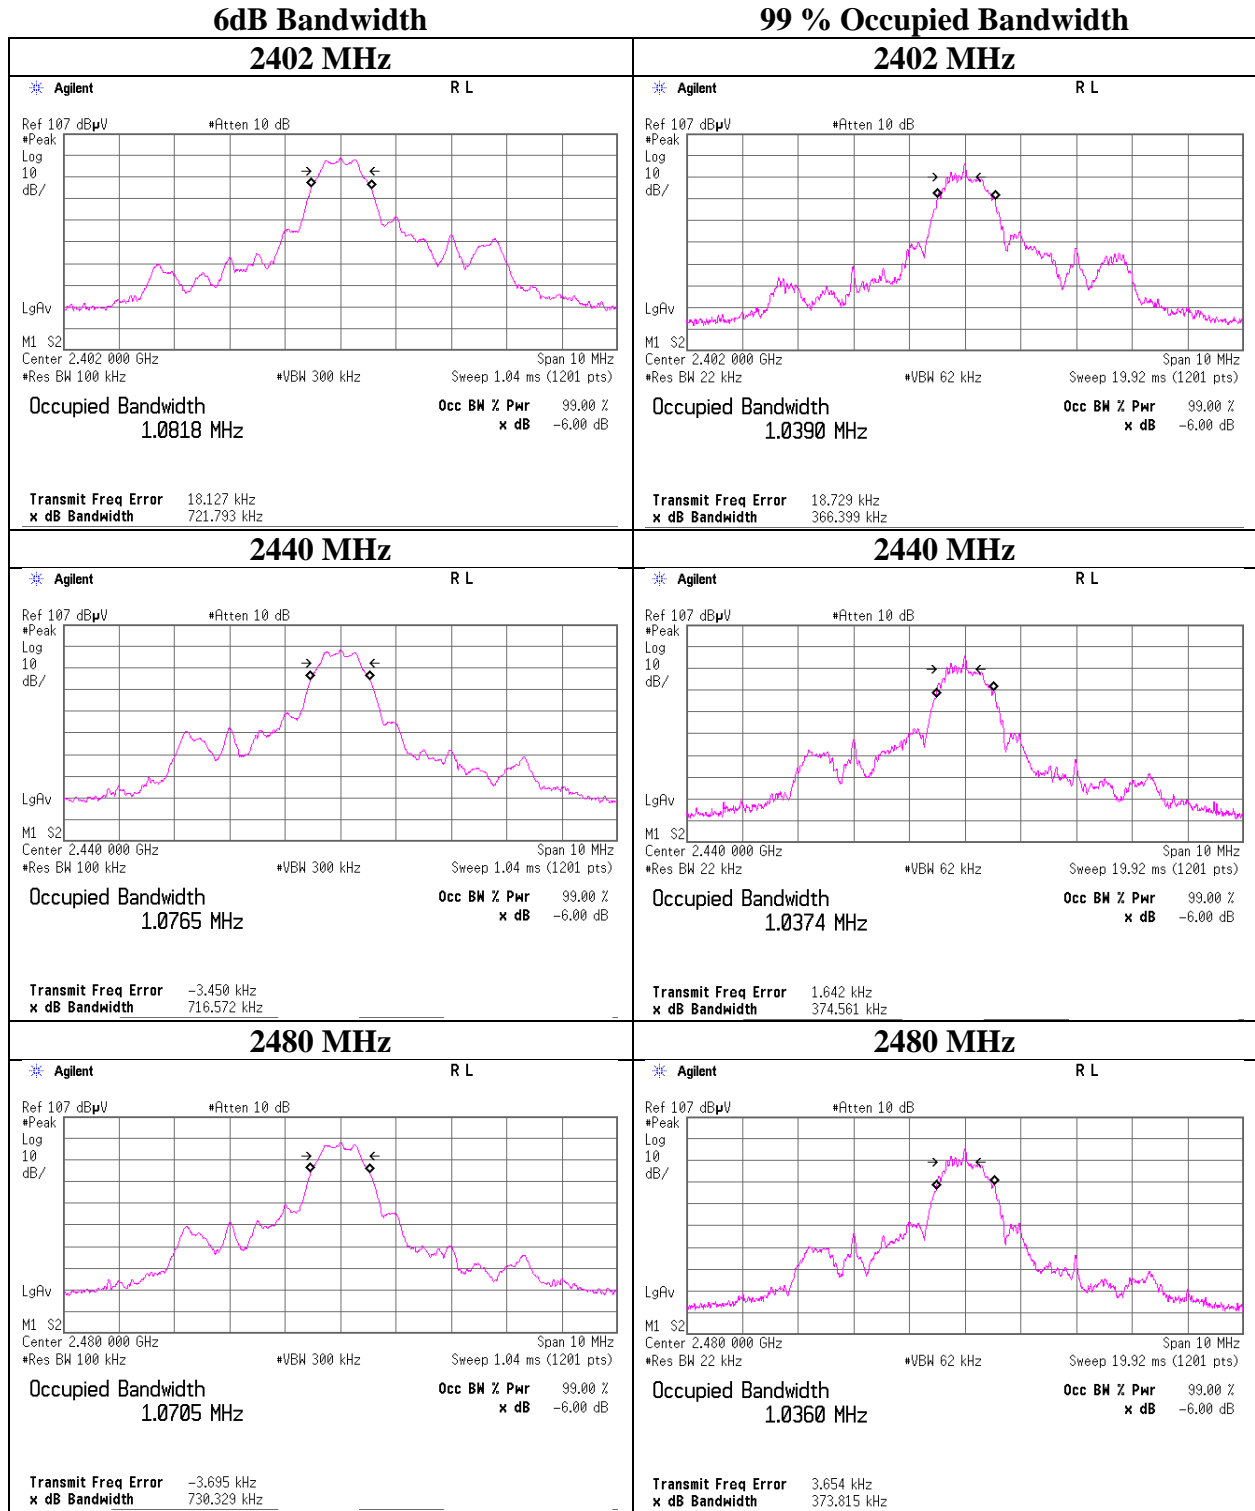

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Maximum Peak Output Power

Report No. 12327512S-C
Test place Shonan EMC Lab. No.5 Shielded Room
Date May 29, 2018
Temperature / Humidity 25 deg. C / 46 % RH
Engineer Makoto Hosaka
Mode Tx

| Freq. [MHz] | Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Conducted Power | | | | |
|----------------|------------------|-----------------------|------------------------|-----------------|------|-------|------|----------------|
| | | | | Result | | Limit | | Margin [dB] |
| | | | | [dBm] | [mW] | [dBm] | [mW] | |
| 2402 | -10.53 | 1.22 | 9.86 | 0.55 | 1.14 | 30.00 | 1000 | 29.45 |
| 2440 | -10.78 | 1.22 | 9.86 | 0.30 | 1.07 | 30.00 | 1000 | 29.70 |
| 2480 | -11.16 | 1.23 | 9.85 | -0.08 | 0.98 | 30.00 | 1000 | 30.08 |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Average Output Power
(Reference data for RF Exposure)

Report No. 12327512S-C
Test place Shonan EMC Lab. No.5 Shielded Room
Date May 29, 2018
Temperature / Humidity 25 deg. C / 46 % RH
Engineer Makoto Hosaka
Mode Tx

BT LE

| Freq. [MHz] | Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Result (Time average) | | Duty factor [dB] | Result (Burst power average) | |
|----------------|------------------|-----------------------|------------------------|--------------------------|------|------------------------|---------------------------------|------|
| | | | | [dBm] | [mW] | | [dBm] | [mW] |
| 2402 | -13.37 | 1.22 | 9.86 | -2.29 | 0.59 | 1.70 | -0.59 | 0.87 |
| 2440 | -13.64 | 1.22 | 9.86 | -2.56 | 0.55 | 1.70 | -0.86 | 0.82 |
| 2480 | -13.99 | 1.23 | 9.85 | -2.91 | 0.51 | 1.70 | -1.21 | 0.76 |

Sample Calculation:


Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Result (Burst power average) = Time average + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.

Burst rate confirmation

Report No. 12327512S-C
 Test place Shonan EMC Lab. No.5 Shielded Room
 Date May 31, 2018
 Temperature / Humidity 25 deg. C / 47 % RH
 Engineer Makoto Hosaka
 Mode Tx

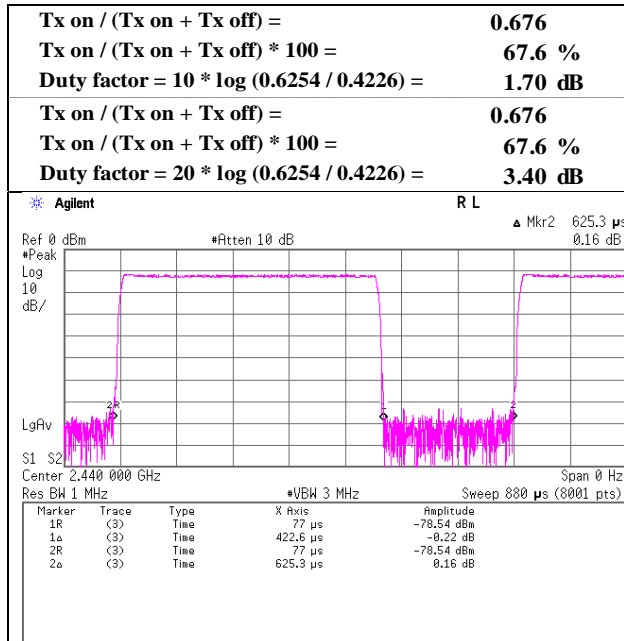

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

| | | | |
|------------------------|---------------------|---------------------|----------------------|
| Report No. | 12327512S-C | | |
| Test place | Shonan EMC Lab. | | |
| Semi Anechoic Chamber | No.1 | No.1 | No.1 |
| Date | May 21, 2016 | May 20, 2016 | May 21, 2016 |
| Temperature / Humidity | 25 deg. C / 31 % RH | 22 deg. C / 45 % RH | 23 deg. C / 35 % RH |
| Engineer | Kazuya Noda | Yasumasa Owaki | Kazutaka Takeyama |
| | (30 MHz -1 GHz) | (1 GHz - 2.8 GHz) | (2.8 GHz - 26.5 GHz) |
| Mode | Tx BT LE, 2402 MHz | | |

(* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|--------|
| Hori. | 155.999 | QP | 28.04 | 14.82 | 8.89 | 31.78 | 0.00 | 19.97 | 43.50 | 23.5 | 196 | 61 | |
| Hori. | 160.000 | QP | 30.17 | 14.94 | 8.92 | 31.78 | 0.00 | 22.25 | 43.50 | 21.2 | 186 | 244 | |
| Hori. | 595.194 | QP | 21.27 | 19.08 | 8.30 | 32.01 | 0.00 | 16.64 | 46.00 | 29.3 | 100 | 359 | |
| Hori. | 655.059 | QP | 21.25 | 19.51 | 8.58 | 32.06 | 0.00 | 17.28 | 46.00 | 28.7 | 100 | 0 | |
| Hori. | 901.429 | QP | 21.15 | 22.00 | 9.67 | 31.35 | 0.00 | 21.47 | 46.00 | 24.5 | 100 | 359 | |
| Hori. | 2390.000 | PK | 44.26 | 27.14 | 14.49 | 36.58 | 2.33 | 51.64 | 73.90 | 22.2 | 167 | 54 | |
| Hori. | 2557.984 | PK | 45.55 | 27.63 | 14.65 | 36.52 | 2.33 | 53.64 | 73.90 | 20.2 | 146 | 168 | |
| Hori. | 4804.000 | PK | 44.79 | 31.13 | 7.16 | 36.88 | 2.33 | 48.53 | 73.90 | 25.3 | 164 | 337 | |
| Hori. | 7206.000 | PK | 44.67 | 36.35 | 8.80 | 37.26 | 2.33 | 54.89 | 73.90 | 19.0 | 150 | 0 | |
| Hori. | 19219.990 | PK | 51.84 | 40.04 | 11.73 | 48.16 | -9.54 | 45.91 | 73.90 | 27.9 | 157 | 234 | |
| Vert. | 194.781 | QP | 21.57 | 16.59 | 9.02 | 31.77 | 0.00 | 15.41 | 43.50 | 28.0 | 100 | 0 | |
| Vert. | 515.250 | QP | 21.58 | 17.89 | 7.98 | 31.94 | 0.00 | 15.51 | 46.00 | 30.4 | 100 | 359 | |
| Vert. | 616.006 | QP | 25.68 | 19.25 | 8.39 | 32.02 | 0.00 | 21.30 | 46.00 | 24.7 | 100 | 129 | |
| Vert. | 2390.000 | PK | 44.85 | 27.14 | 14.49 | 36.58 | 2.33 | 52.23 | 73.90 | 21.6 | 141 | 42 | |
| Vert. | 2558.388 | PK | 43.73 | 27.63 | 14.65 | 36.52 | 2.33 | 51.82 | 73.90 | 22.0 | 150 | 359 | |
| Vert. | 4804.000 | PK | 45.96 | 31.13 | 7.16 | 36.88 | 2.33 | 49.70 | 73.90 | 24.2 | 125 | 187 | |
| Vert. | 7206.000 | PK | 44.52 | 36.35 | 8.80 | 37.26 | 2.33 | 54.74 | 73.90 | 19.1 | 150 | 0 | |
| Vert. | 19219.990 | PK | 50.57 | 40.04 | 11.73 | 48.16 | -9.54 | 44.64 | 73.90 | 29.2 | 168 | 163 | |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(3.92 m / 3.0 m) = 2.33 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Average measurement value with duty factor

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|----------------------|-----------------|----------------|-------------|--------|
| Hori. | 2390.000 | AV | 34.55 | 27.14 | 14.49 | 36.58 | 3.40 | 2.33 | 45.33 | 53.90 | 8.6 | *1) |
| Hori. | 2557.984 | AV | 35.82 | 27.63 | 14.65 | 36.52 | 3.40 | 2.33 | 47.31 | 53.90 | 6.6 | |
| Hori. | 4804.000 | AV | 35.24 | 31.13 | 7.16 | 36.88 | 3.40 | 2.33 | 42.38 | 53.90 | 11.5 | |
| Hori. | 7206.000 | AV | 35.59 | 36.35 | 8.80 | 37.26 | 3.40 | 2.33 | 49.21 | 53.90 | 4.7 | |
| Hori. | 19219.990 | AV | 46.50 | 40.04 | 11.73 | 48.16 | 3.40 | -9.54 | 43.97 | 53.90 | 9.9 | |
| Vert. | 2390.000 | AV | 33.10 | 27.14 | 14.49 | 36.58 | 3.40 | 2.33 | 43.88 | 53.90 | 10.0 | *1) |
| Vert. | 2558.388 | AV | 34.70 | 27.63 | 14.65 | 36.52 | 3.40 | 2.33 | 46.19 | 53.90 | 7.7 | |
| Vert. | 4804.000 | AV | 36.79 | 31.13 | 7.16 | 36.88 | 3.40 | 2.33 | 43.93 | 53.90 | 10.0 | |
| Vert. | 7206.000 | AV | 35.63 | 36.35 | 8.80 | 37.26 | 3.40 | 2.33 | 49.25 | 53.90 | 4.6 | |
| Vert. | 19219.990 | AV | 44.11 | 40.04 | 11.73 | 48.16 | 3.40 | -9.54 | 41.58 | 53.90 | 12.3 | |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(3.92 m / 3.0 m) = 2.33 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Duty factor Calculation chart" sheet.

*1) Not out of band emission (Leakage Power)

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|---------|
| Hori. | 2402.000 | PK | 88.67 | 27.18 | 14.50 | 36.57 | 2.33 | 96.11 | - | - | Carrier |
| Hori. | 2400.000 | PK | 42.63 | 27.17 | 14.50 | 36.58 | 2.33 | 50.05 | 76.11 | 26.1 | |
| Vert. | 2402.000 | PK | 88.01 | 27.18 | 14.50 | 36.57 | 2.33 | 95.45 | - | - | Carrier |
| Vert. | 2400.000 | PK | 38.65 | 27.17 | 14.50 | 36.58 | 2.33 | 46.07 | 75.45 | 29.4 | |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(3.92 m / 3.0 m) = 2.33 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

UL Japan, Inc.

Shonan EMC Lab.



1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission
(Reference Plot for band-edge)

Report No. 12327512S-C
Test place Shonan EMC Lab.
Semi Anechoic Chamber No.1
Date May 20, 2016
Temperature / Humidity 22 deg. C / 45 % RH
Engineer Yasumasa Owaki
Mode Tx BT LE, 2402 MHz

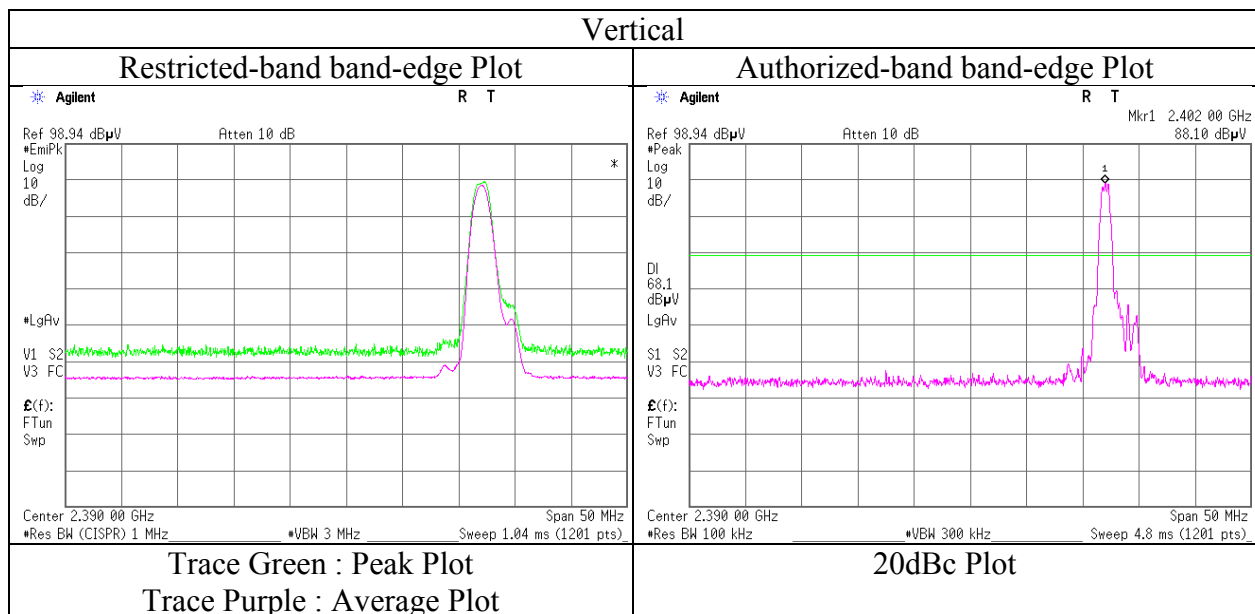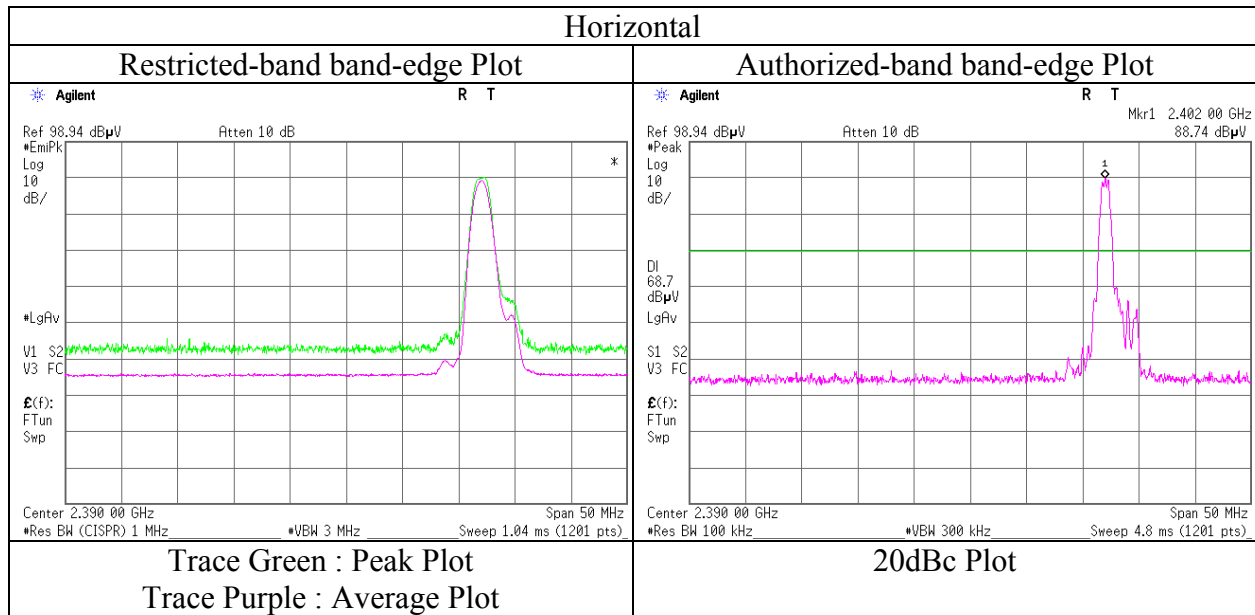

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

| | | | |
|------------------------|---------------------|---------------------|----------------------|
| Report No. | 12327512S-C | | |
| Test place | Shonan EMC Lab. | | |
| Semi Anechoic Chamber | No.1 | No.1 | No.1 |
| Date | May 21, 2016 | May 20, 2016 | May 21, 2016 |
| Temperature / Humidity | 25 deg. C / 31 % RH | 22 deg. C / 45 % RH | 23 deg. C / 35 % RH |
| Engineer | Kazuya Noda | Yasumasa Owaki | Kazutaka Takeyama |
| | (30 MHz - 1 GHz) | (1 GHz - 2.8 GHz) | (2.8 GHz - 26.5 GHz) |
| Mode | Tx BT LE, 2440 MHz | | |

(* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|--------|
| Hori. | 156.001 | QP | 29.73 | 14.82 | 8.89 | 31.78 | 0.00 | 21.66 | 43.50 | 21.8 | 194 | 62 | |
| Hori. | 160.000 | QP | 30.64 | 14.94 | 8.92 | 31.78 | 0.00 | 22.72 | 43.50 | 20.7 | 189 | 235 | |
| Hori. | 336.003 | QP | 28.21 | 14.22 | 7.15 | 31.77 | 0.00 | 17.81 | 46.00 | 28.1 | 100 | 51 | |
| Hori. | 636.026 | QP | 21.57 | 19.38 | 8.49 | 32.05 | 0.00 | 17.39 | 46.00 | 28.6 | 100 | 359 | |
| Hori. | 880.432 | QP | 21.35 | 21.75 | 9.60 | 31.45 | 0.00 | 21.25 | 46.00 | 24.7 | 100 | 0 | |
| Hori. | 2598.003 | PK | 45.12 | 27.72 | 14.69 | 36.53 | 2.33 | 53.33 | 73.90 | 20.5 | 135 | 230 | |
| Hori. | 4880.000 | PK | 44.75 | 31.30 | 7.25 | 36.90 | 2.33 | 48.73 | 73.90 | 25.1 | 116 | 107 | |
| Hori. | 7320.000 | PK | 44.19 | 36.51 | 8.93 | 37.44 | 2.33 | 54.52 | 73.90 | 19.3 | 150 | 0 | |
| Hori. | 19516.230 | PK | 53.72 | 40.02 | 11.89 | 47.70 | -9.54 | 48.39 | 73.90 | 25.5 | 168 | 231 | |
| Vert. | 174.498 | QP | 21.60 | 15.74 | 8.96 | 31.78 | 0.00 | 14.52 | 43.50 | 28.9 | 100 | 0 | |
| Vert. | 365.996 | QP | 21.44 | 14.86 | 7.32 | 31.79 | 0.00 | 11.83 | 46.00 | 34.1 | 100 | 359 | |
| Vert. | 600.011 | QP | 25.66 | 19.15 | 8.32 | 32.00 | 0.00 | 21.13 | 46.00 | 24.8 | 100 | 292 | |
| Vert. | 2598.000 | PK | 44.06 | 27.72 | 14.69 | 36.53 | 2.33 | 52.27 | 73.90 | 21.6 | 150 | 359 | |
| Vert. | 4880.000 | PK | 45.37 | 31.30 | 7.25 | 36.90 | 2.33 | 49.35 | 73.90 | 24.5 | 107 | 204 | |
| Vert. | 7320.000 | PK | 44.21 | 36.51 | 8.93 | 37.44 | 2.33 | 54.54 | 73.90 | 19.3 | 150 | 0 | |
| Vert. | 19516.010 | PK | 51.50 | 40.02 | 11.89 | 47.70 | -9.54 | 46.17 | 73.90 | 27.7 | 157 | 199 | |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(3.92 m / 3.0 m) = 2.33 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Average measurement value with duty factor

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|----------------------|-----------------|----------------|-------------|--------|
| Hori. | 2598.003 | AV | 36.18 | 27.72 | 14.69 | 36.53 | 3.40 | 2.33 | 47.79 | 53.90 | 6.1 | |
| Hori. | 4880.000 | AV | 35.49 | 31.30 | 7.25 | 36.90 | 3.40 | 2.33 | 42.87 | 53.90 | 11.0 | |
| Hori. | 7320.000 | AV | 34.69 | 36.51 | 8.93 | 37.44 | 3.40 | 2.33 | 48.42 | 53.90 | 5.5 | |
| Hori. | 19516.230 | AV | 49.01 | 40.02 | 11.89 | 47.70 | 3.40 | -9.54 | 47.08 | 53.90 | 6.8 | |
| Vert. | 2598.000 | AV | 32.96 | 27.72 | 14.69 | 36.53 | 3.40 | 2.33 | 44.57 | 53.90 | 9.3 | |
| Vert. | 4880.000 | AV | 36.63 | 31.30 | 7.25 | 36.90 | 3.40 | 2.33 | 44.01 | 53.90 | 9.9 | |
| Vert. | 7320.000 | AV | 34.74 | 36.51 | 8.93 | 37.44 | 3.40 | 2.33 | 48.47 | 53.90 | 5.4 | |
| Vert. | 19516.010 | AV | 45.02 | 40.02 | 11.89 | 47.70 | 3.40 | -9.54 | 43.09 | 53.90 | 10.8 | |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(3.92 m / 3.0 m) = 2.33 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Duty factor Calculation chart" sheet.

*1) Not out of band emission (Leakage Power)

Radiated Spurious Emission

| | | | |
|------------------------|--------------------------------|-------------------------------------|---|
| Report No. | 12327512S-C | | |
| Test place | Shonan EMC Lab. | | |
| Semi Anechoic Chamber | No.1 | No.1 | No.1 |
| Date | May 21, 2016 | May 20, 2016 | May 21, 2016 |
| Temperature / Humidity | 25 deg. C / 31 % RH | 22 deg. C / 45 % RH | 23 deg. C / 35 % RH |
| Engineer | Kazuya Noda (30 MHz -1 GHz) | Yasumasa Owaki (1 GHz - 2.8 GHz) | Kazutaka Takeyama (2.8 GHz - 26.5 GHz) |
| Mode | Tx BT LE, 2480 MHz | | |

(* PK: Peak, AV: Average, QP: Quasi-Peak)

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [deg] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|----------------------|-----------------|----------------|-------------|-------------|-------------|--------|
| Hori. | 156.000 | QP | 25.86 | 14.82 | 8.89 | 31.78 | 0.00 | 17.79 | 43.50 | 25.7 | 202 | 54 | |
| Hori. | 160.000 | QP | 32.87 | 14.94 | 8.92 | 31.78 | 0.00 | 24.95 | 43.50 | 18.5 | 196 | 240 | |
| Hori. | 336.004 | QP | 28.43 | 14.22 | 7.15 | 31.77 | 0.00 | 18.03 | 46.00 | 27.9 | 100 | 73 | |
| Hori. | 758.812 | QP | 21.74 | 20.34 | 9.04 | 31.93 | 0.00 | 19.19 | 46.00 | 26.8 | 100 | 0 | |
| Hori. | 930.788 | QP | 21.21 | 22.10 | 9.76 | 31.13 | 0.00 | 21.94 | 46.00 | 24.0 | 100 | 359 | |
| Hori. | 2483.500 | PK | 46.95 | 27.45 | 14.59 | 36.52 | 2.33 | 54.80 | 73.90 | 19.1 | 179 | 80 | |
| Hori. | 2635.968 | PK | 45.72 | 27.81 | 14.72 | 36.53 | 2.33 | 54.05 | 73.90 | 19.8 | 149 | 134 | |
| Hori. | 4960.000 | PK | 44.53 | 31.48 | 7.35 | 36.93 | 2.33 | 48.76 | 73.90 | 25.1 | 140 | 268 | |
| Hori. | 7440.000 | PK | 43.11 | 36.68 | 9.07 | 37.63 | 2.33 | 53.56 | 73.90 | 20.3 | 150 | 0 | |
| Hori. | 19836.000 | PK | 53.09 | 39.99 | 12.01 | 47.72 | -9.54 | 47.83 | 73.90 | 26.0 | 170 | 99 | |
| Vert. | 176.540 | QP | 21.35 | 15.85 | 8.95 | 31.77 | 0.00 | 14.38 | 43.50 | 29.1 | 100 | 0 | |
| Vert. | 600.006 | QP | 24.95 | 19.15 | 8.32 | 32.00 | 0.00 | 20.42 | 46.00 | 25.5 | 100 | 294 | |
| Vert. | 818.229 | QP | 22.35 | 20.95 | 9.30 | 31.78 | 0.00 | 20.82 | 46.00 | 25.1 | 100 | 0 | |
| Vert. | 2483.500 | PK | 46.35 | 27.45 | 14.59 | 36.52 | 2.33 | 54.20 | 73.90 | 19.7 | 170 | 38 | |
| Vert. | 2635.988 | PK | 45.69 | 27.81 | 14.72 | 36.53 | 2.33 | 54.02 | 73.90 | 19.8 | 161 | 114 | |
| Vert. | 4960.000 | PK | 45.43 | 31.48 | 7.35 | 36.93 | 2.33 | 49.66 | 73.90 | 24.2 | 155 | 210 | |
| Vert. | 7440.000 | PK | 42.91 | 36.68 | 9.07 | 37.63 | 2.33 | 53.36 | 73.90 | 20.5 | 150 | 0 | |
| Vert. | 19836.000 | PK | 49.38 | 39.99 | 12.01 | 47.72 | -9.54 | 44.12 | 73.90 | 29.7 | 156 | 123 | |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(3.92 m / 3.0 m) = 2.33 dB

13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Average measurement value with duty factor

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Distance Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|----------------------|-----------------|----------------|-------------|--------|
| Hori. | 2483.500 | AV | 36.48 | 27.45 | 14.59 | 36.52 | 3.40 | 2.33 | 47.73 | 53.90 | 6.2 | *1) |
| Hori. | 2635.968 | AV | 36.64 | 27.81 | 14.72 | 36.53 | 3.40 | 2.33 | 48.37 | 53.90 | 5.5 | |
| Hori. | 4960.000 | AV | 34.98 | 31.48 | 7.35 | 36.93 | 3.40 | 2.33 | 42.61 | 53.90 | 11.3 | |
| Hori. | 7440.000 | AV | 34.33 | 36.68 | 9.07 | 37.63 | 3.40 | 2.33 | 48.18 | 53.90 | 5.7 | |
| Hori. | 19836.000 | AV | 48.83 | 39.99 | 12.01 | 47.72 | 3.40 | -9.54 | 46.97 | 53.90 | 6.9 | |
| Vert. | 2483.500 | AV | 35.78 | 27.45 | 14.59 | 36.52 | 3.40 | 2.33 | 47.03 | 53.90 | 6.9 | *1) |
| Vert. | 2635.988 | AV | 36.38 | 27.81 | 14.72 | 36.53 | 3.40 | 2.33 | 48.11 | 53.90 | 5.8 | |
| Vert. | 4960.000 | AV | 35.74 | 31.48 | 7.35 | 36.93 | 3.40 | 2.33 | 43.37 | 53.90 | 10.5 | |
| Vert. | 7440.000 | AV | 34.23 | 36.68 | 9.07 | 37.63 | 3.40 | 2.33 | 48.08 | 53.90 | 5.8 | |
| Vert. | 19836.000 | AV | 43.29 | 39.99 | 12.01 | 47.72 | 3.40 | -9.54 | 41.43 | 53.90 | 12.5 | |

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 13 GHz : 20log(3.92 m / 3.0 m) = 2.33 dB



13 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Duty factor Calculation chart" sheet.

*1) Not out of band emission (Leakage Power)

Radiated Spurious Emission
(Reference Plot for band-edge)


Report No. 12327512S-C
Test place Shonan EMC Lab.
Semi Anechoic Chamber No.1
Date May 20, 2016
Temperature / Humidity 22 deg. C / 45 % RH
Engineer Yasumasa Owaki
Mode Tx BT LE, 2480 MHz

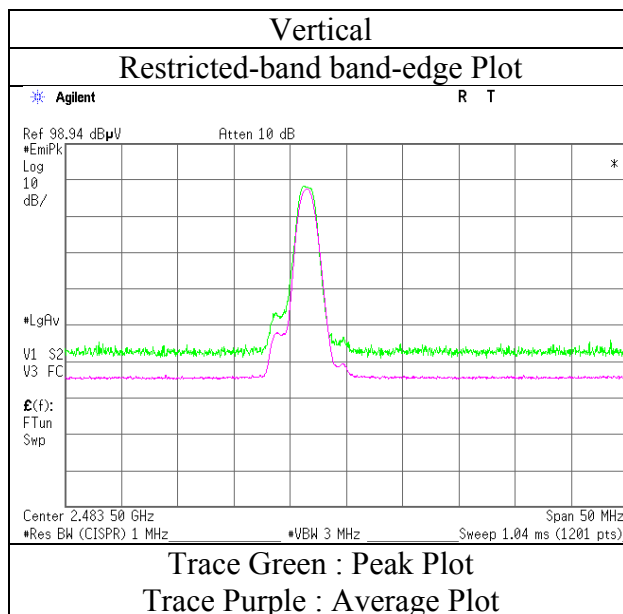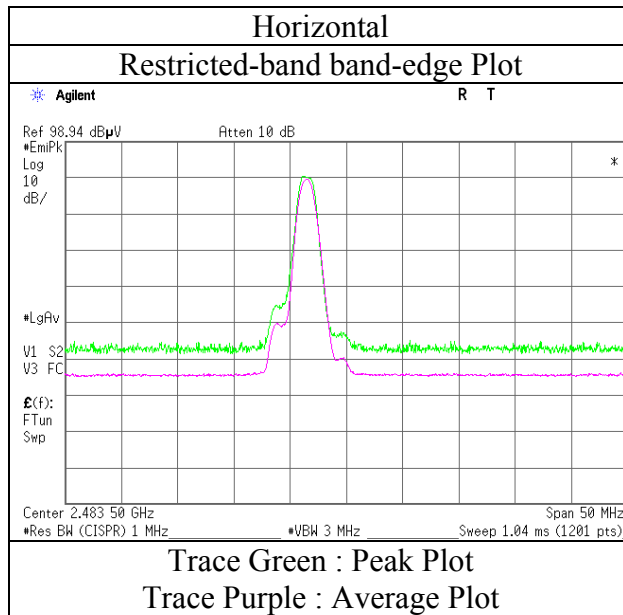

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case)


| | | | |
|------------------------|---------------------------------|-------------------------------------|---|
| Report No. | 12327512S-C | | |
| Test place | Shonan EMC Lab. | | |
| Semi Anechoic Chamber | No.1 | No.1 | No.1 |
| Date | May 21, 2016 | May 20, 2016 | May 21, 2016 |
| Temperature / Humidity | 25 deg. C / 31 % RH | 22 deg. C / 45 % RH | 23 deg. C / 35 % RH |
| Engineer | Kazuya Noda (30 MHz - 1 GHz) | Yasumasa Owaki (1 GHz - 2.8 GHz) | Kazutaka Takeyama (2.8 GHz - 26.5 GHz) |
| Mode | Tx BT LE, 2402 MHz | | |

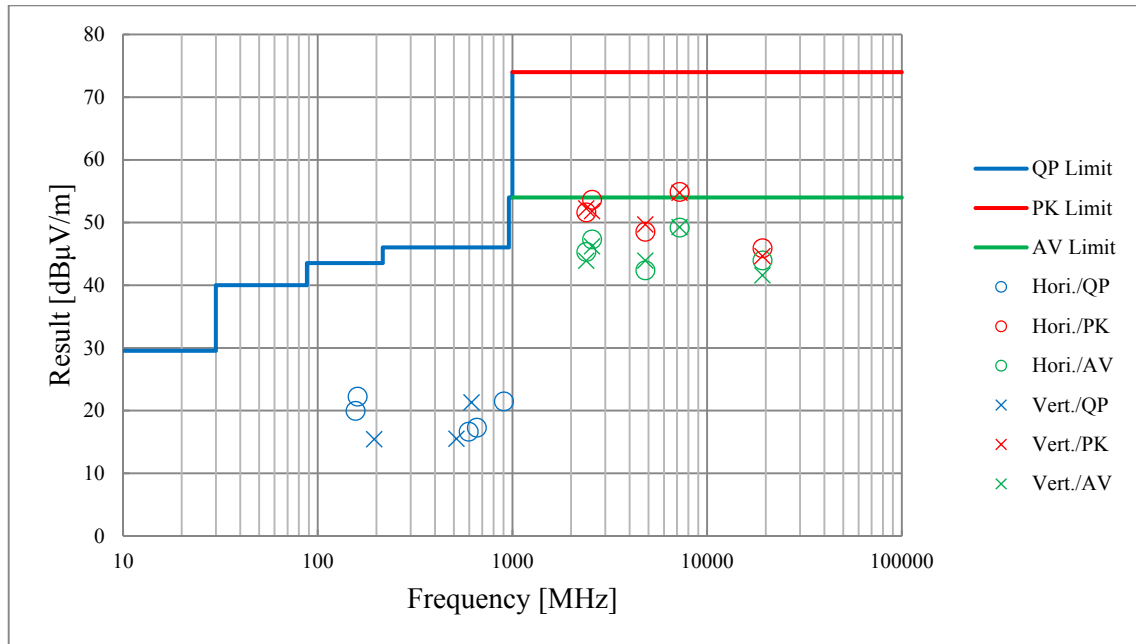

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Report No. 12327512S-C
 Test place Shonan EMC Lab. No.5 Shielded Room
 Date May 31, 2018
 Temperature / Humidity 25 deg. C / 74 % RH
 Engineer Makoto Hosaka
 Mode Tx 2402 MHz

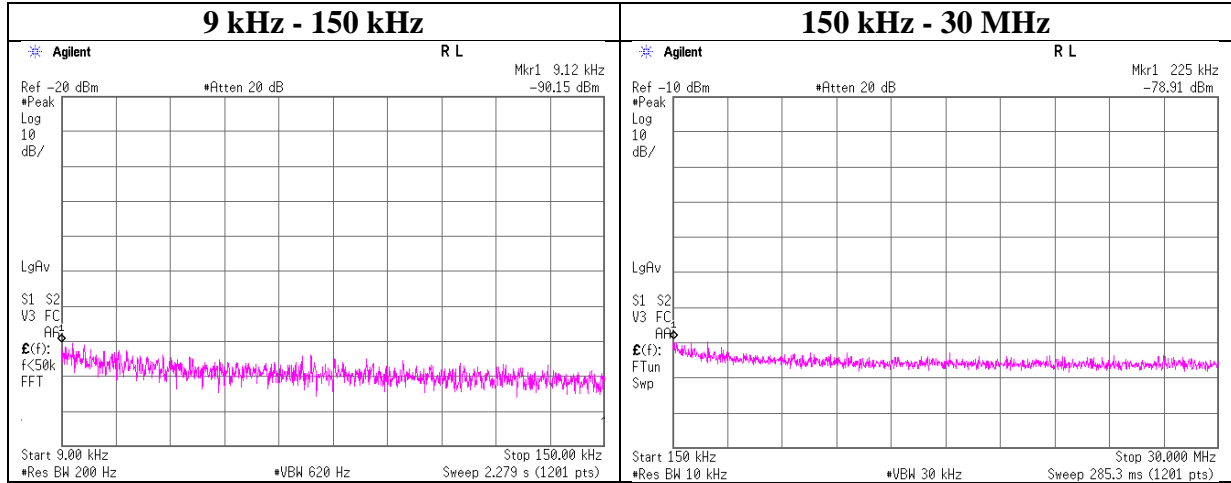

| Frequency [kHz] | Reading [dBm] | Cable Loss [dB] | Attenuator Loss [dB] | Antenna Gain [dBi] | N (Number of Output) | EIRP [dBm] | Distance [m] | Ground bounce [dB] | E (field strength) [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|-----------------|---------------|-----------------|----------------------|--------------------|----------------------|------------|--------------|--------------------|-----------------------------|----------------|-------------|--------|
| 9.12 | -90.15 | 0.01 | 9.83 | 2.85 | 1 | -77.5 | 300 | 6.0 | -16.2 | 48.4 | 64.6 | |
| 225.00 | -78.91 | 0.01 | 9.83 | 2.85 | 1 | -66.2 | 300 | 6.0 | -5.0 | 20.5 | 25.5 | |


$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

Conducted Spurious Emission

Report No. 12327512S-C
 Test place Shonan EMC Lab. No.5 Shielded Room
 Date May 31, 2018
 Temperature / Humidity 25 deg. C / 74 % RH
 Engineer Makoto Hosaka
 Mode Tx 2440 MHz

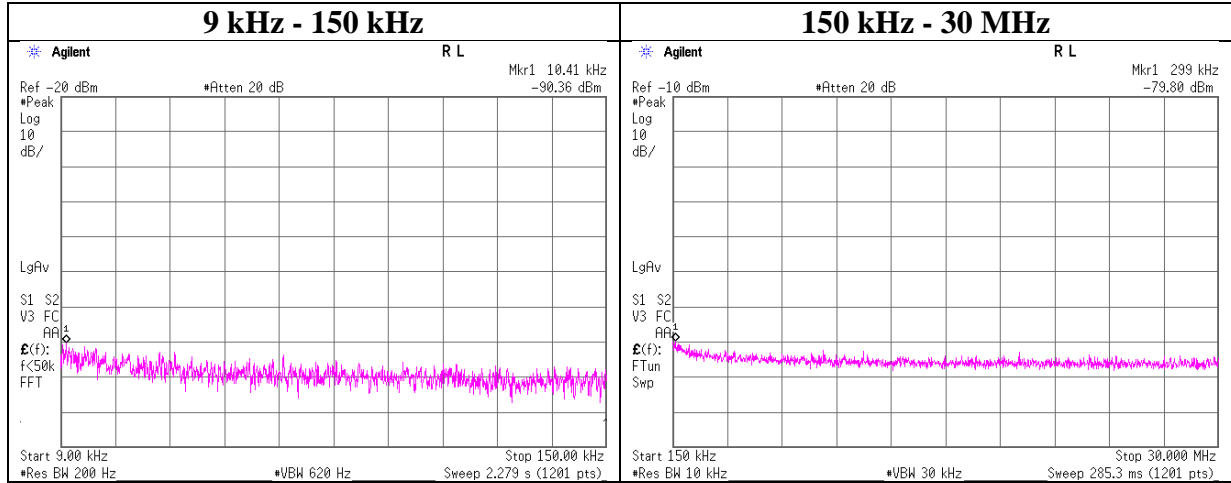

| Frequency [kHz] | Reading [dBm] | Cable Loss [dB] | Attenuator Loss [dB] | Antenna Gain [dBi] | N (Number of Output) | EIRP [dBm] | Distance [m] | Ground bounce [dB] | E (field strength) [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|-----------------|---------------|-----------------|----------------------|--------------------|----------------------|------------|--------------|--------------------|-----------------------------|----------------|-------------|--------|
| 10.41 | -90.36 | 0.01 | 9.83 | 2.85 | 1 | -77.7 | 300 | 6.0 | -16.4 | 47.2 | 63.6 | |
| 299.00 | -79.80 | 0.01 | 9.83 | 2.85 | 1 | -67.1 | 300 | 6.0 | -5.9 | 18.0 | 23.9 | |


$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$$

N: Number of output

Conducted Spurious Emission

Report No. 12327512S-C
Test place Shonan EMC Lab. No.5 Shielded Room
Date May 31, 2018
Temperature / Humidity 25 deg. C / 74 % RH
Engineer Makoto Hosaka
Mode Tx 2480 MHz

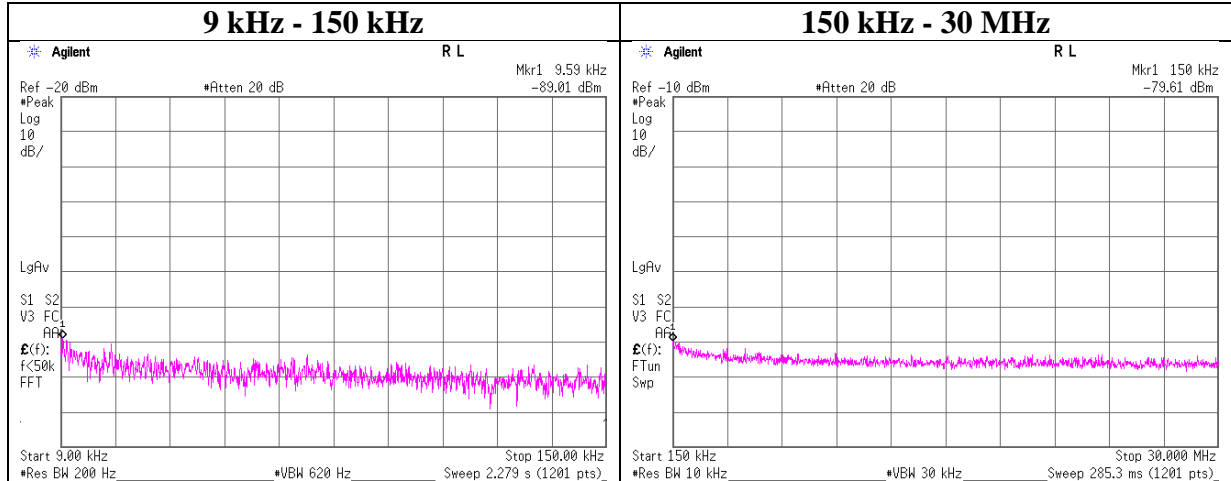

| Frequency [kHz] | Reading [dBm] | Cable Loss [dB] | Attenuator Loss [dB] | Antenna Gain [dBi] | N (Number of Output) | EIRP [dBm] | Distance [m] | Ground bounce [dB] | E (field strength) [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|-----------------|---------------|-----------------|----------------------|--------------------|----------------------|------------|--------------|--------------------|-----------------------------|----------------|-------------|--------|
| 9.59 | -89.01 | 0.01 | 9.83 | 2.85 | 1 | -76.3 | 300 | 6.0 | -15.1 | 47.9 | 63.0 | |
| 150.00 | -79.61 | 0.01 | 9.83 | 2.85 | 1 | -66.9 | 300 | 6.0 | -5.7 | 24.0 | 29.7 | |

$$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$$

$$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$$

N: Number of output

Power Density

Report No. 12327512S-C
Test place Shonan EMC Lab. No.5 Shielded Room
Date May 31, 2018
Temperature / Humidity 25 deg. C / 74 % RH
Engineer Makoto Hosaka
Mode Tx

BT LE

| Freq. [MHz] | Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Result [dBm] | Limit [dBm] | Margin [dB] |
|----------------|------------------|-----------------------|------------------------|-----------------|----------------|----------------|
| 2412.00 | -26.77 | 1.22 | 9.86 | -15.69 | 8.00 | 23.69 |
| 2437.00 | -27.11 | 1.22 | 9.86 | -16.03 | 8.00 | 24.03 |
| 2462.00 | -27.42 | 1.23 | 9.85 | -16.34 | 8.00 | 24.34 |

Sample Calculation:


Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

*The equipment and cables were not used for factor 0 dB of the data sheets.


Power Density

BT LE


2402 MHz

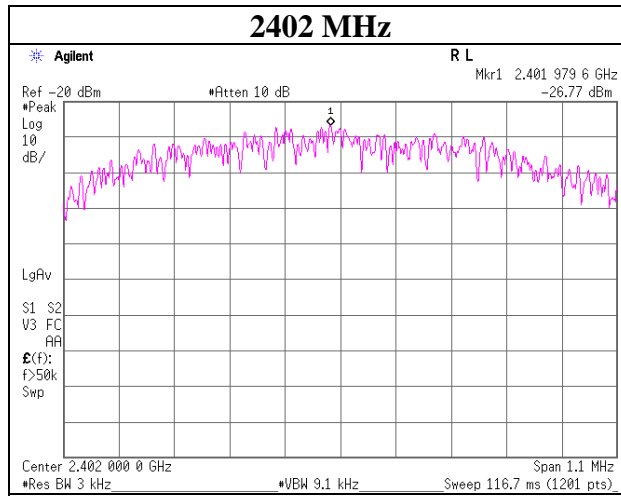

2440 MHz

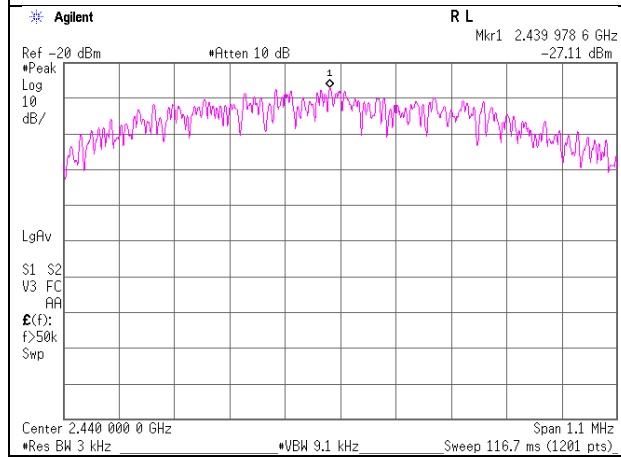

2480 MHz

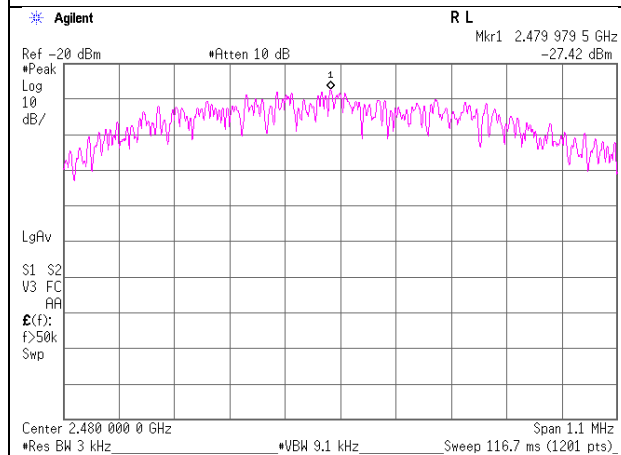

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

APPENDIX 2: Test instruments

Test Instruments

| Control No. | Instrument | Manufacturer | Model No | Serial No | Test Item | Calibration Date * Interval(month) |
|--|------------------------------|--|--|----------------------------|-----------|---------------------------------------|
| SAF-05 | Pre Amplifier | TOYO Corporation | TPA0118-36 | 1440490 | RE | 2018/02/15 * 12 |
| SAF-08 | Pre Amplifier | TOYO Corporation | HAP18-26W | 00000019 | RE | 2018/03/27 * 12 |
| SCC-G05 | Coaxial Cable | Junkosha | J12J102207-00 | APR-30-15-037 | RE | 2018/01/29 * 12 |
| SCC-G22 | Coaxial Cable | Suhner | SUCOFLEX 104 | 296199/4 | RE | 2018/05/11 * 12 |
| SCC-G40 | Coaxial Cable | Junkosha | MWX221-01000 NFSNMS/B | 1612S005 | RE | 2018/01/29 * 12 |
| SCC-G33 | Coaxial Cable | Junkosha | MWX241-01000 KMSKMS | - | RE | 2018/04/20 * 12 |
| SCC-G45 | Coaxial Cable | HUBER+SUHNER | SUCOFLEX 102 E | 800137/2EA | RE | 2018/03/28 * 12 |
| SHA-01 | Horn Antenna | Schwarzbeck | BBHA9120D | 9120D-725 | RE | 2017/08/14 * 12 |
| SHA-04 | Horn Antenna | ETS LINDGREN | 3160-09 | LM9861 | RE | 2017/07/11 * 12 |
| SAT10-06 | Attenuator | Agilent | 8493C-010 | 74865 | RE | 2017/11/22 * 12 |
| SFL-18 | Highpass Filter | MICRO-TRONICS | HPM50111 | 119 | RE | 2018/04/20 * 12 |
| SOS-01 | Humidity Indicator | A&D | AD-5681 | 4062555 | RE | 2017/10/30 * 12 |
| KSA-08 | Spectrum Analyzer | Agilent | E4446A | MY46180525 | RE | 2017/10/10 * 12 |
| SSA-02 | Spectrum Analyzer | Agilent | E4448A | MY48250106 | RE | 2018/03/05 * 12 |
| KJM-09 | Measure | KOMELON | KMC-36 | - | RE | - |
| SAEC-01(SVS WR) | Semi-Anechoic Chamber | TDK | SAEC-01(SVSW R) | 1 | RE | 2017/07/20 * 12 |
| COTS-SEMI-1 | EMI Software | TSJ | TEPTO-DV(RE, CE,RFL,MF) | - | RE | - |
| STS-01 | Digital Hitester | Hioki | 3805-50 | 080997812 | RE | 2017/10/16 * 12 |
| SAEC-01(NSA) | Semi-Anechoic Chamber | TDK | SAEC-01(NSA) | 1 | RE | 2017/06/09 * 12 |
| SAF-01 | Pre Amplifier | SONOMA | 310N | 290211 | RE | 2018/02/16 * 12 |
| KAT6-04 | Attenuator | INMET | 18N-6dB | - | RE | 2017/12/14 * 12 |
| SAT3-09 | Attenuator | JFW | 50HF-003N | - | RE | 2017/08/24 * 12 |
| SBA-01 | Biconical Antenna | Schwarzbeck | BBA9106 | 91032664 | RE | 2017/10/21 * 12 |
| SCC-A1/A3/A5/ A7/A8/A13/SRS E-01 | Coaxial Cable&RF Selector | Fujikura/Fujikura/Suhn er/Suhner/Suhner/Suhn er/TOYO | 8D2W/12DSFA/ 141PE/141PE/14 1PE/141PE/NS4 906 | -/0901-269(RF Selector) | RE | 2018/04/12 * 12 |
| SCC-A2/A4/A6/ A7/A8/A13/SRSE -01 | Coaxial Cable&RF Selector | Fujikura/Fujikura/Suhn er/Suhner/Suhner/Suhn er/TOYO | 8D2W/12DSFA/1 41PE/141PE/141 PE/141PE/NS490 6 | -/0901-269(RF Selector) | RE | 2018/04/12 * 12 |
| SLA-05 | Logperiodic Antenna | Schwarzbeck | VUSLP9111B | 193 | RE | 2017/12/10 * 12 |
| STR-07 | Test Receiver | Rohde & Schwarz | ESU26 | 100484 | RE | 2017/09/26 * 12 |
| SPM-13 | Power Meter | KEYSIGHT | 8990B | MY51000448 | AT | 2018/05/18 * 12 |
| SPSS-06 | Power sensor | KEYSIGHT | N1923A | MY57270004 | AT | 2018/05/18 * 12 |
| SSA-03 | Spectrum Analyzer | Agilent | E4448A | MY48250152 | AT | 2017/08/20 * 12 |
| SAT10-12 | Attenuator | Weinschel Corp. | 54A-10 | 81601 | AT | 2018/03/22 * 12 |
| SCC-G12 | Coaxial Cable | Suhner | SUCOFLEX 102 | 30790/2 | AT | 2018/03/19 * 12 |
| SOS-09 | Humidity Indicator | A&D | AD-5681 | 4061484 | AT | 2017/12/21 * 12 |

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

**Test item: RE: Radiated Emission test
AT: Antenna Terminal Conducted test**

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401