

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 5955MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\3

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

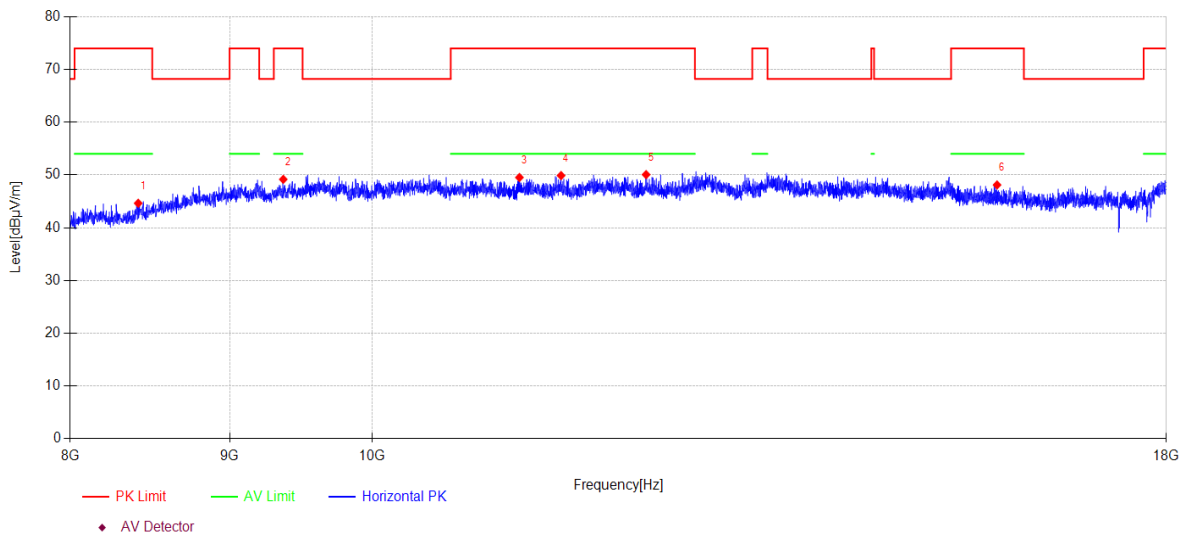

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8412.000	41.76	37.50	6.76	-41.38	44.64	74.00	29.36	PK	Horizontal
2	9365.000	42.21	38.70	7.02	-38.76	49.17	74.00	24.83	PK	Horizontal
3	11153.000	41.96	39.25	7.47	-39.16	49.52	74.00	24.48	PK	Horizontal
4	11502.000	42.33	39.20	7.69	-39.33	49.89	74.00	24.11	PK	Horizontal
5	12249.000	42.34	39.30	8.09	-39.66	50.07	74.00	23.93	PK	Horizontal
6	15881.000	40.38	38.14	8.88	-39.29	48.11	74.00	25.89	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 5955MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\4

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

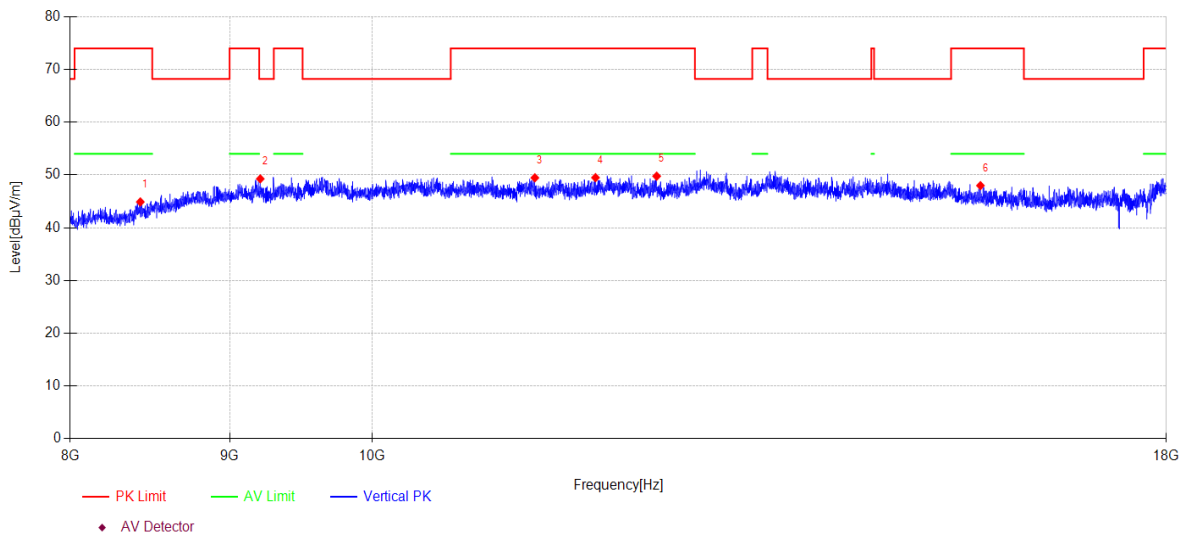

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8425.000	41.95	37.50	6.77	-41.33	44.89	74.00	29.11	PK	Vertical
2	9207.000	42.43	38.60	7.01	-38.78	49.26	68.20	18.94	PK	Vertical
3	11281.000	41.93	39.20	7.55	-39.22	49.46	74.00	24.54	PK	Vertical
4	11799.000	42.20	38.90	7.87	-39.47	49.50	74.00	24.50	PK	Vertical
5	12345.000	42.03	39.30	8.13	-39.69	49.77	74.00	24.23	PK	Vertical
6	15687.000	39.84	38.51	8.81	-39.17	47.99	74.00	26.01	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6175MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\5

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

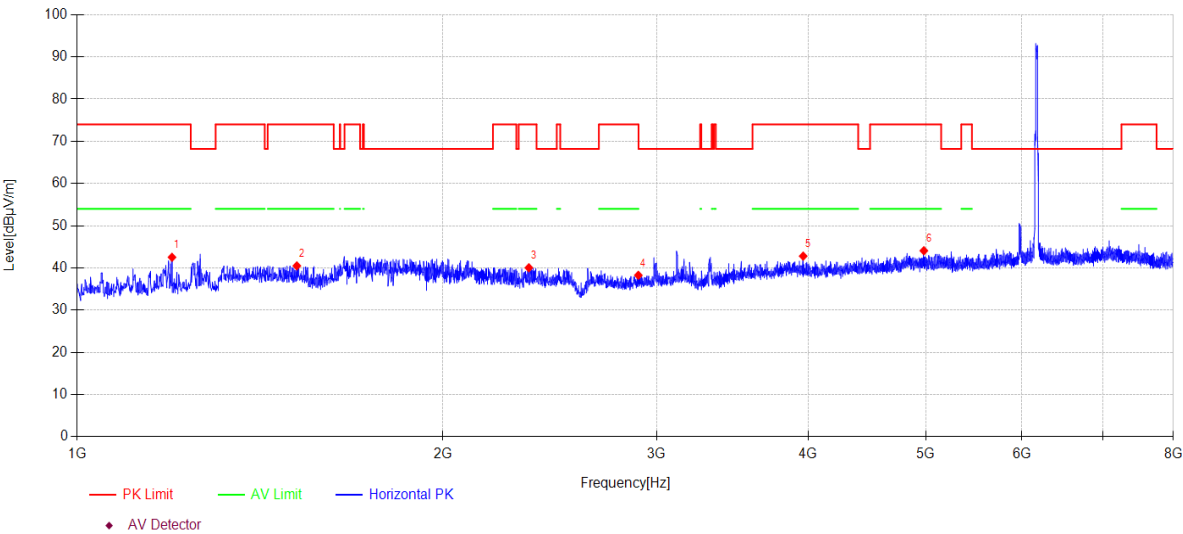

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1196.700	51.98	24.89	2.57	-36.91	42.53	74.00	31.47	PK	Horizontal
2	1516.600	49.29	25.27	2.88	-36.95	40.49	74.00	33.51	PK	Horizontal
3	2355.200	47.40	27.12	3.55	-38.02	40.05	74.00	33.95	PK	Horizontal
4	2899.100	45.78	28.19	3.85	-39.55	38.27	74.00	35.73	PK	Horizontal
5	3963.800	47.69	31.04	4.50	-40.43	42.80	74.00	31.20	PK	Horizontal
6	4983.700	45.83	33.17	5.17	-40.09	44.08	74.00	29.92	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6175MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\6

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

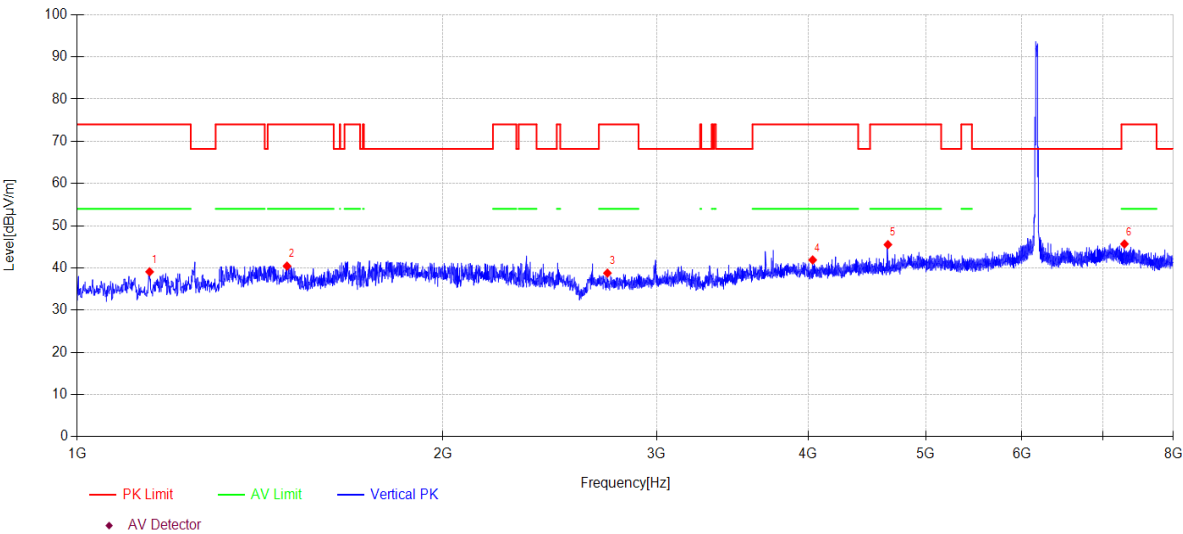

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1147.000	48.68	24.78	2.52	-36.90	39.08	74.00	34.92	PK	Vertical
2	1488.600	49.08	25.45	2.85	-36.94	40.44	74.00	33.56	PK	Vertical
3	2733.900	46.54	27.57	3.76	-39.09	38.78	74.00	35.22	PK	Vertical
4	4035.200	46.82	30.97	4.54	-40.44	41.89	74.00	32.11	PK	Vertical
5	4654.700	48.76	32.02	4.95	-40.21	45.52	74.00	28.48	PK	Vertical
6	7291.600	44.10	36.88	6.12	-41.43	45.67	74.00	28.33	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6175MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\7

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

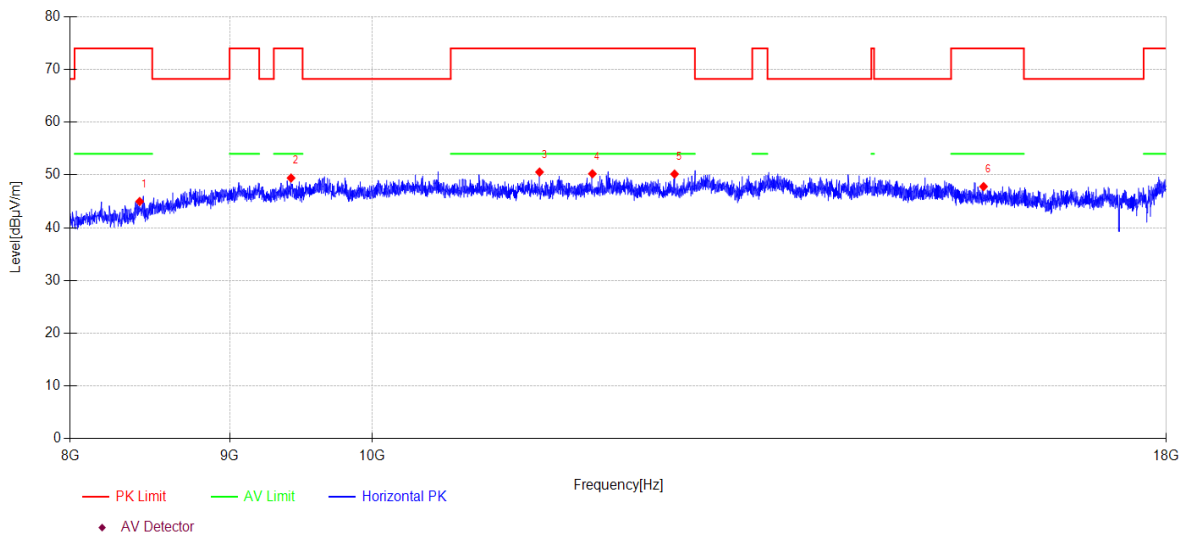

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8421.000	42.04	37.50	6.77	-41.34	44.97	74.00	29.03	PK	Horizontal
2	9419.000	42.45	38.70	7.03	-38.76	49.42	74.00	24.58	PK	Horizontal
3	11320.000	42.99	39.22	7.58	-39.24	50.55	74.00	23.45	PK	Horizontal
4	11772.000	42.90	38.93	7.85	-39.45	50.23	74.00	23.77	PK	Horizontal
5	12510.000	42.33	39.40	8.20	-39.76	50.17	74.00	23.83	PK	Horizontal
6	15723.000	39.71	38.45	8.83	-39.19	47.80	74.00	26.20	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6175MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\8

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

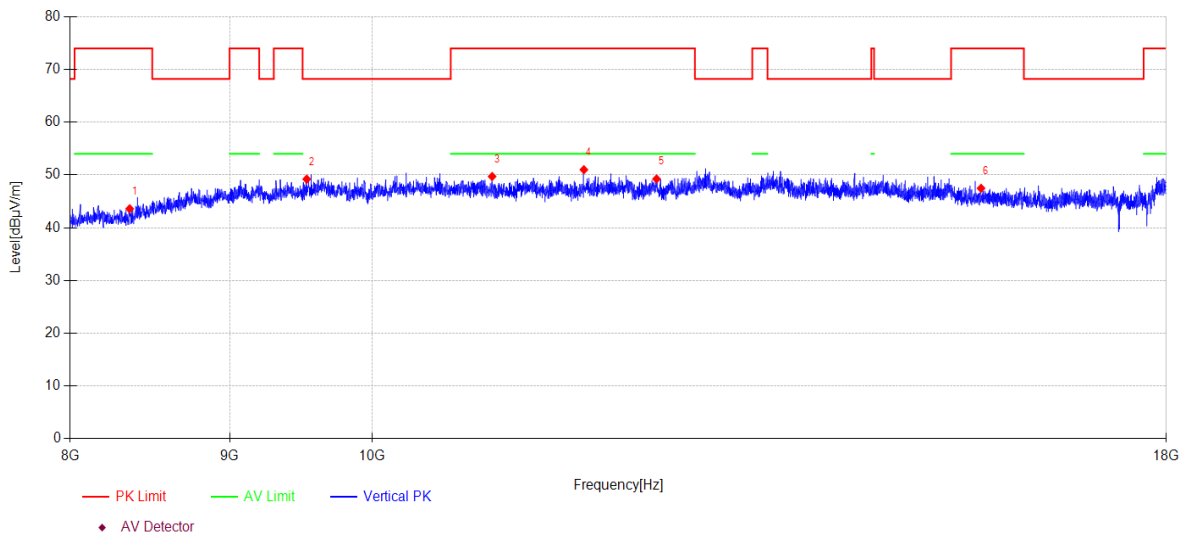

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8359.000	41.14	37.34	6.74	-41.62	43.60	74.00	30.40	PK	Vertical
2	9529.000	42.29	38.64	7.03	-38.75	49.21	68.20	18.99	PK	Vertical
3	10930.000	42.11	39.30	7.36	-39.06	49.71	74.00	24.29	PK	Vertical
4	11698.000	43.61	39.00	7.81	-39.42	51.00	74.00	23.00	PK	Vertical
5	12344.000	41.51	39.30	8.13	-39.69	49.25	74.00	24.75	PK	Vertical
6	15694.000	39.32	38.51	8.82	-39.18	47.47	74.00	26.53	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6415MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\9

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

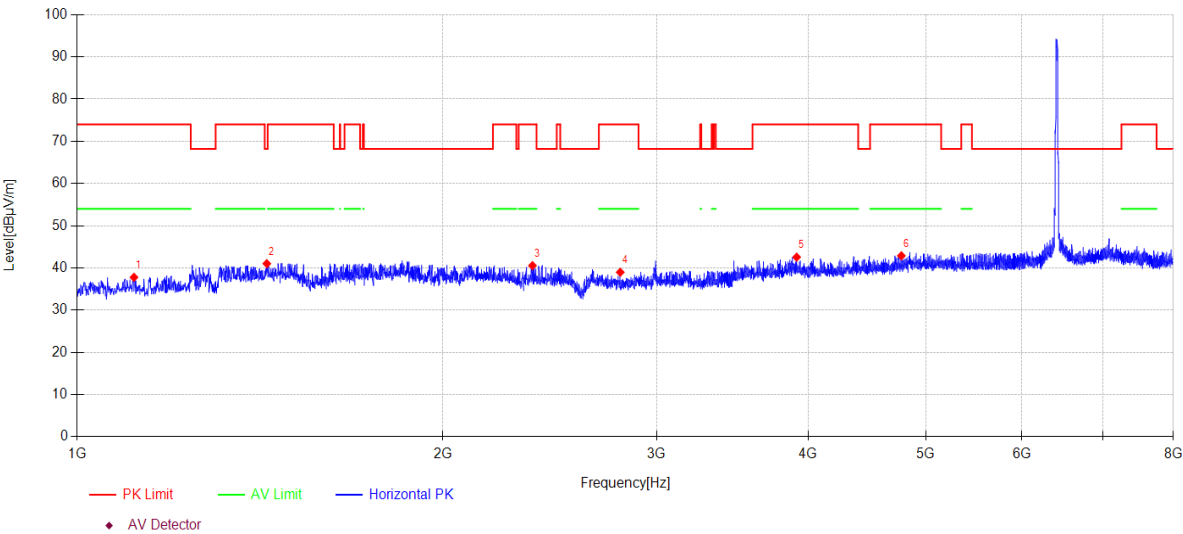

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1113.400	47.60	24.58	2.49	-36.89	37.78	74.00	36.22	PK	Horizontal
2	1432.600	49.93	25.23	2.80	-36.94	41.02	68.20	27.18	PK	Horizontal
3	2371.300	47.86	27.19	3.56	-38.06	40.55	74.00	33.45	PK	Horizontal
4	2801.100	47.04	27.41	3.80	-39.28	38.97	74.00	35.03	PK	Horizontal
5	3914.800	47.32	31.17	4.47	-40.40	42.56	74.00	31.44	PK	Horizontal
6	4775.100	45.61	32.40	5.03	-40.16	42.88	74.00	31.12	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6415MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\10

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

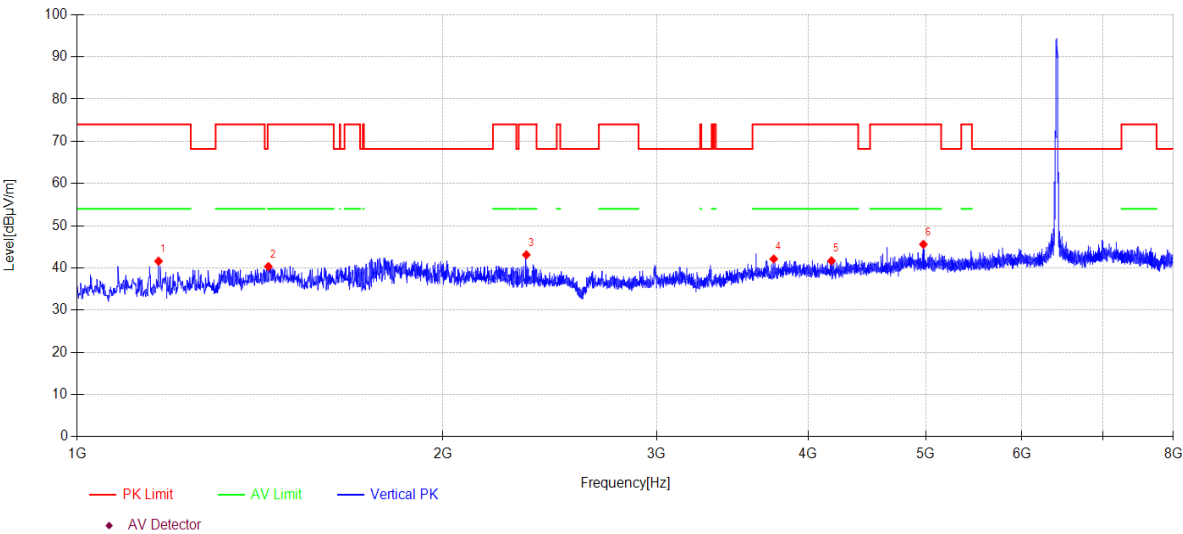

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1166.600	51.13	24.83	2.54	-36.90	41.60	74.00	32.40	PK	Vertical
2	1436.800	49.22	25.25	2.80	-36.94	40.33	74.00	33.67	PK	Vertical
3	2344.000	50.50	27.06	3.54	-37.98	43.12	74.00	30.88	PK	Vertical
4	3748.200	47.55	30.50	4.37	-40.30	42.12	74.00	31.88	PK	Vertical
5	4182.200	46.23	31.20	4.64	-40.38	41.69	74.00	32.31	PK	Vertical
6	4978.800	47.34	33.16	5.17	-40.09	45.58	74.00	28.42	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6415MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\11

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

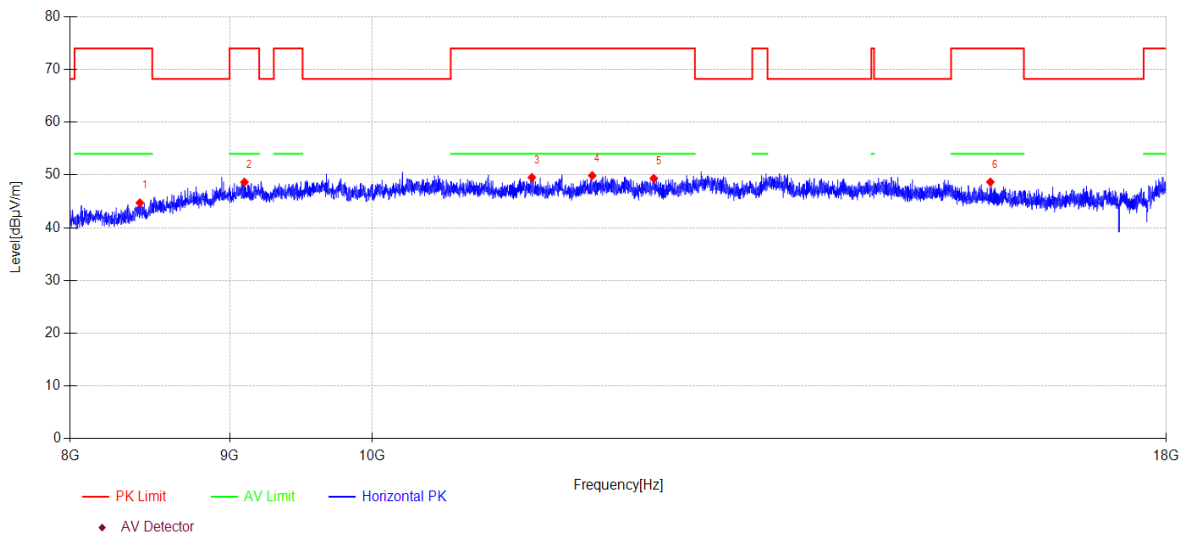

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8422.000	41.79	37.50	6.77	-41.34	44.72	74.00	29.28	PK	Horizontal
2	9100.000	41.90	38.50	7.01	-38.78	48.63	74.00	25.37	PK	Horizontal
3	11256.000	41.99	39.20	7.54	-39.21	49.52	74.00	24.48	PK	Horizontal
4	11770.000	42.55	38.93	7.85	-39.45	49.88	74.00	24.12	PK	Horizontal
5	12319.000	41.60	39.30	8.12	-39.68	49.34	74.00	24.66	PK	Horizontal
6	15803.000	40.76	38.29	8.85	-39.24	48.66	74.00	25.34	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6415MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\12

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

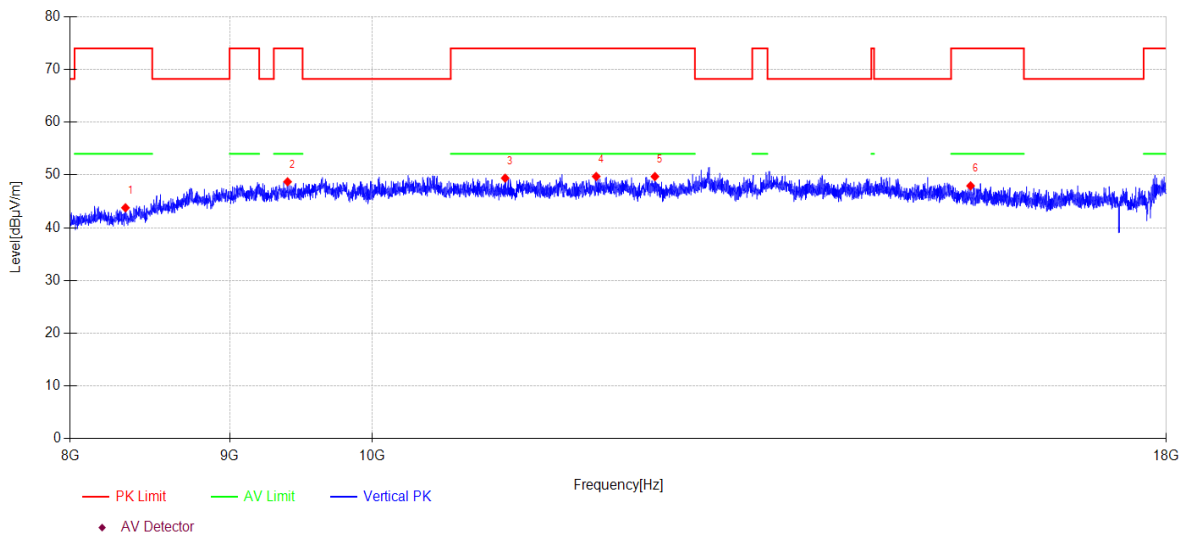

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8333.000	41.48	37.30	6.73	-41.73	43.78	74.00	30.22	PK	Vertical
2	9395.000	41.75	38.70	7.02	-38.76	48.71	74.00	25.29	PK	Vertical
3	11036.000	41.81	39.30	7.40	-39.11	49.40	74.00	24.60	PK	Vertical
4	11805.000	42.42	38.90	7.87	-39.47	49.72	74.00	24.28	PK	Vertical
5	12329.000	41.97	39.30	8.12	-39.69	49.70	74.00	24.30	PK	Vertical
6	15573.000	39.62	38.65	8.77	-39.10	47.94	74.00	26.06	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6435MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\13

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

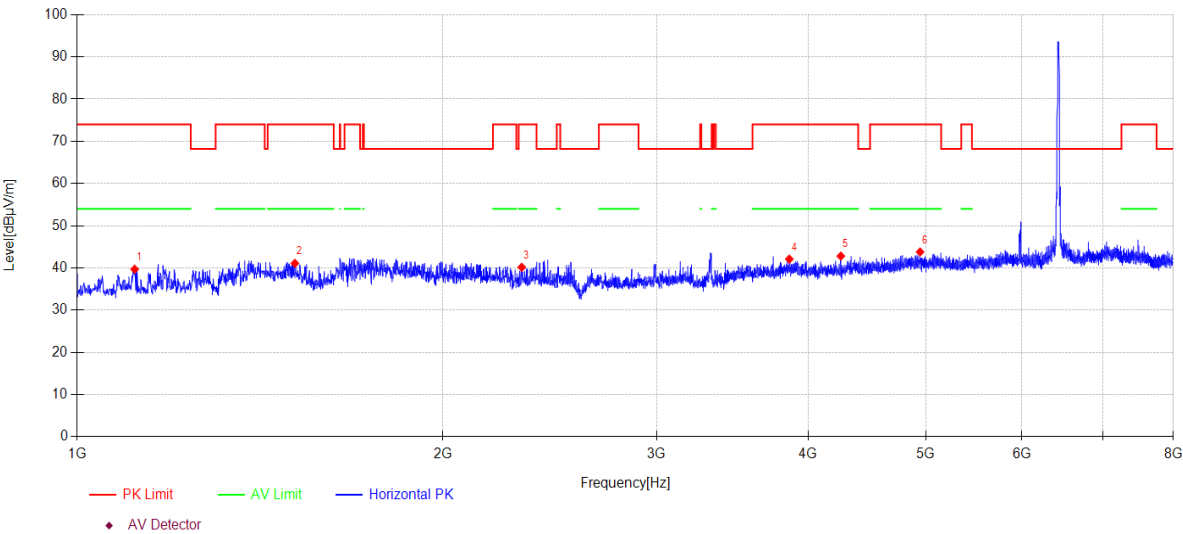

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1114.800	49.51	24.59	2.49	-36.89	39.70	74.00	34.30	PK	Horizontal
2	1511.000	49.81	25.35	2.88	-36.95	41.09	74.00	32.91	PK	Horizontal
3	2323.700	47.62	26.94	3.53	-37.93	40.16	74.00	33.84	PK	Horizontal
4	3860.900	47.05	30.97	4.44	-40.37	42.09	74.00	31.91	PK	Horizontal
5	4257.100	47.04	31.43	4.69	-40.35	42.81	74.00	31.19	PK	Horizontal
6	4948.000	45.64	33.10	5.15	-40.10	43.79	74.00	30.21	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6435MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\14

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

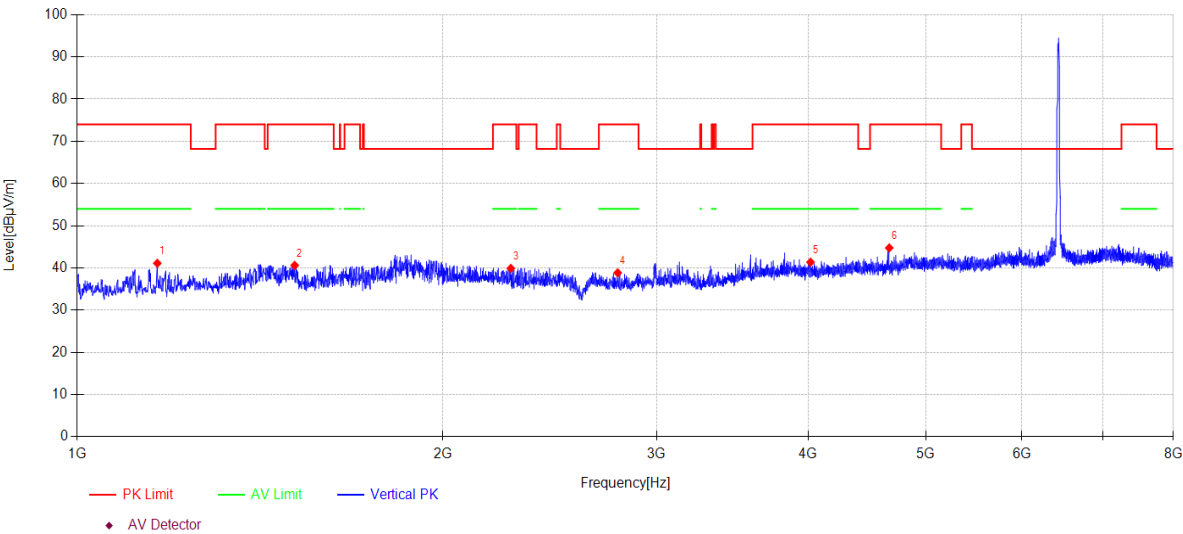

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1163.800	50.63	24.83	2.54	-36.90	41.10	74.00	32.90	PK	Vertical
2	1510.300	49.33	25.36	2.87	-36.95	40.61	74.00	33.39	PK	Vertical
3	2276.100	47.15	27.04	3.50	-37.79	39.90	74.00	34.10	PK	Vertical
4	2787.800	46.85	27.45	3.79	-39.24	38.85	74.00	35.15	PK	Vertical
5	4019.100	46.34	30.94	4.53	-40.44	41.37	74.00	32.63	PK	Vertical
6	4666.600	47.92	32.07	4.96	-40.20	44.75	74.00	29.25	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6435MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\15

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

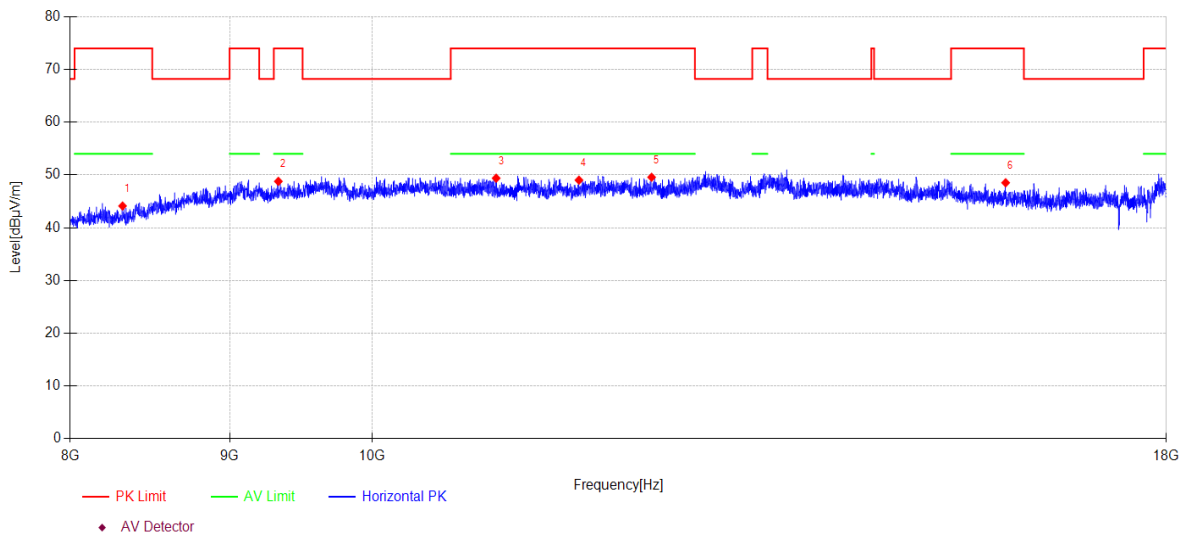

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8315.000	41.90	37.30	6.73	-41.81	44.12	74.00	29.88	PK	Horizontal
2	9331.000	41.88	38.66	7.02	-38.77	48.79	74.00	25.21	PK	Horizontal
3	10963.000	41.80	39.30	7.37	-39.08	49.39	74.00	24.61	PK	Horizontal
4	11655.000	41.64	39.00	7.78	-39.40	49.02	74.00	24.98	PK	Horizontal
5	12299.000	41.84	39.30	8.11	-39.68	49.57	74.00	24.43	PK	Horizontal
6	15982.000	40.94	38.02	8.91	-39.35	48.52	74.00	25.48	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6435MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\16

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

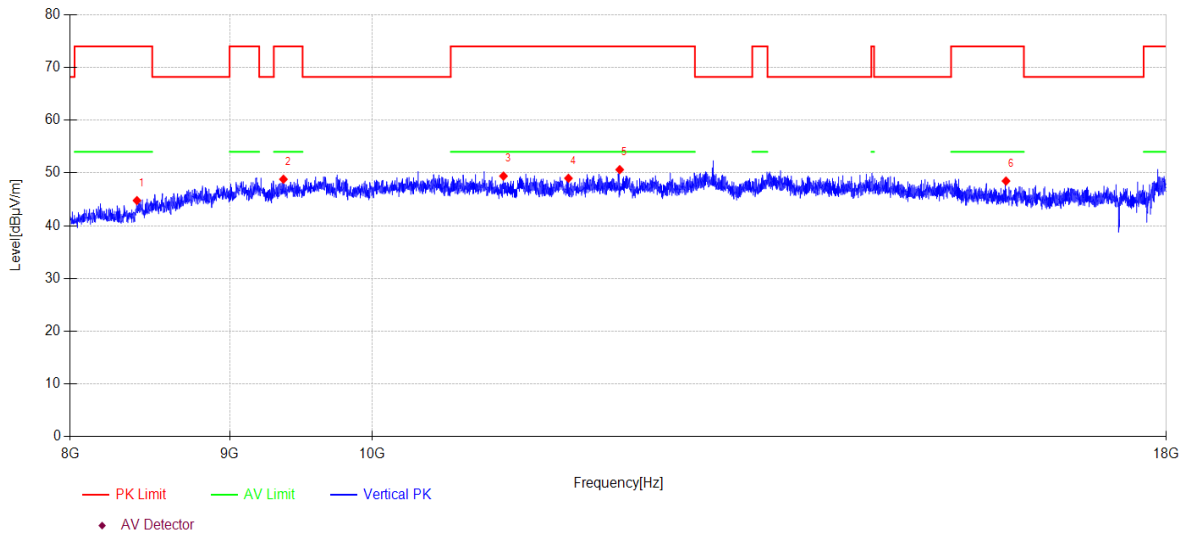

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8404.000	41.94	37.50	6.76	-41.42	44.78	74.00	29.22	PK	Vertical
2	9366.000	41.85	38.70	7.02	-38.76	48.81	74.00	25.19	PK	Vertical
3	11022.000	41.82	39.30	7.39	-39.10	49.41	74.00	24.59	PK	Vertical
4	11565.000	41.56	39.07	7.72	-39.36	48.99	74.00	25.01	PK	Vertical
5	12012.000	42.99	39.21	7.99	-39.56	50.63	74.00	23.37	PK	Vertical
6	15986.000	40.89	38.01	8.92	-39.35	48.47	74.00	25.53	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6475MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\17

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

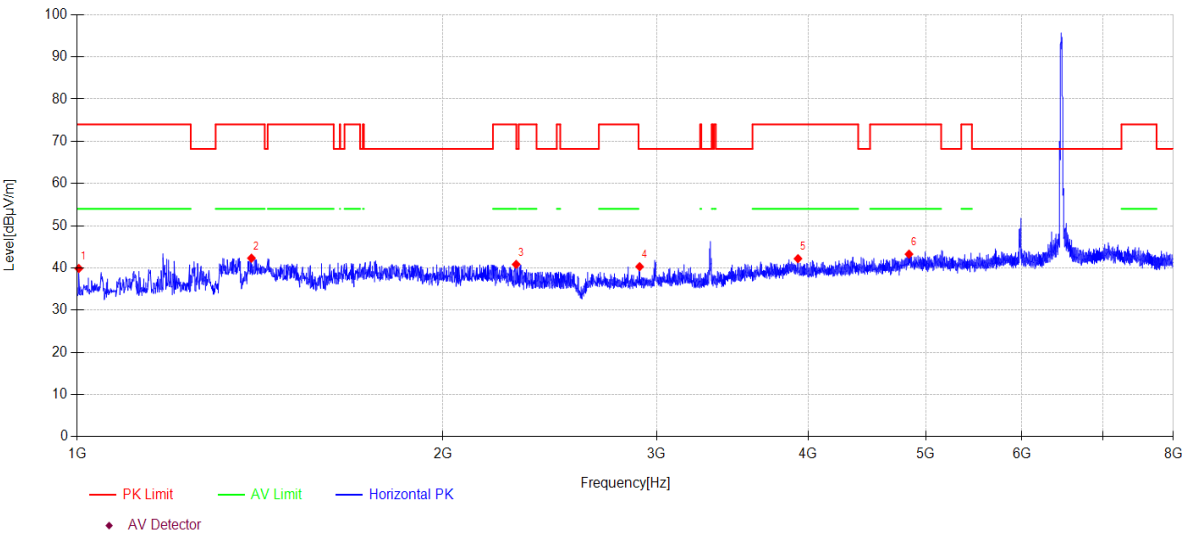

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	1002.800	49.97	24.40	2.38	-36.88	39.87	74.00	34.13	PK	Horizontal
2	1391.300	51.43	25.05	2.76	-36.93	42.31	74.00	31.69	PK	Horizontal
3	2299.200	48.37	26.81	3.52	-37.86	40.84	74.00	33.16	PK	Horizontal
4	2906.100	47.79	28.22	3.86	-39.57	40.30	68.20	27.90	PK	Horizontal
5	3924.600	46.98	31.15	4.47	-40.40	42.20	74.00	31.80	PK	Horizontal
6	4845.100	44.66	33.67	5.08	-40.14	43.27	74.00	30.73	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6475MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\18

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

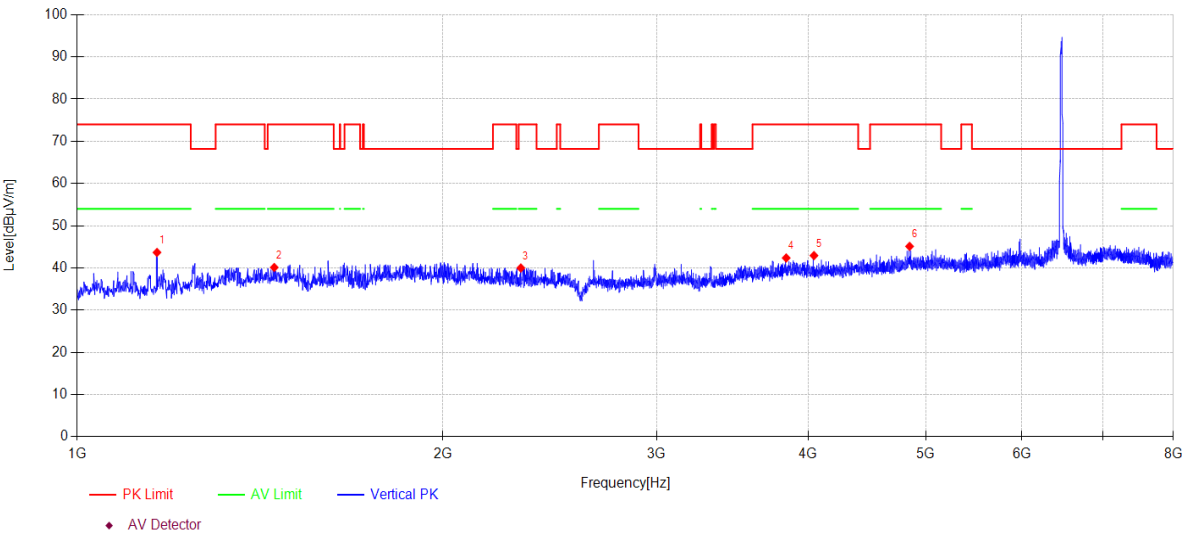

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1163.100	53.21	24.83	2.54	-36.90	43.68	74.00	30.32	PK	Vertical
2	1452.900	48.93	25.31	2.82	-36.94	40.12	74.00	33.88	PK	Vertical
3	2319.500	47.45	26.92	3.53	-37.91	39.99	74.00	34.01	PK	Vertical
4	3837.800	47.45	30.85	4.42	-40.35	42.37	74.00	31.63	PK	Vertical
5	4045.700	47.82	30.99	4.55	-40.43	42.93	74.00	31.07	PK	Vertical
6	4850.000	46.37	33.80	5.08	-40.14	45.11	74.00	28.89	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6475MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\19

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

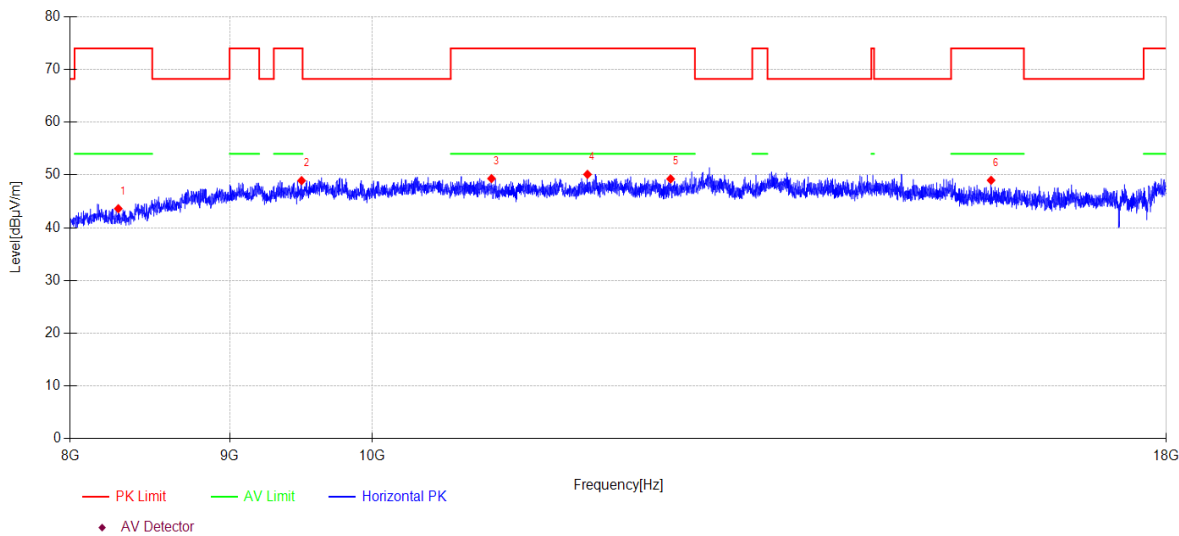

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8289.000	41.55	37.28	6.72	-41.93	43.62	74.00	30.38	PK	Horizontal
2	9493.000	41.96	38.70	7.03	-38.76	48.93	74.00	25.07	PK	Horizontal
3	10925.000	41.72	39.30	7.36	-39.06	49.32	74.00	24.68	PK	Horizontal
4	11729.000	42.75	38.97	7.82	-39.43	50.11	74.00	23.89	PK	Horizontal
5	12473.000	41.44	39.37	8.18	-39.74	49.25	74.00	24.75	PK	Horizontal
6	15811.000	41.10	38.28	8.86	-39.25	48.99	74.00	25.01	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6475MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\20

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

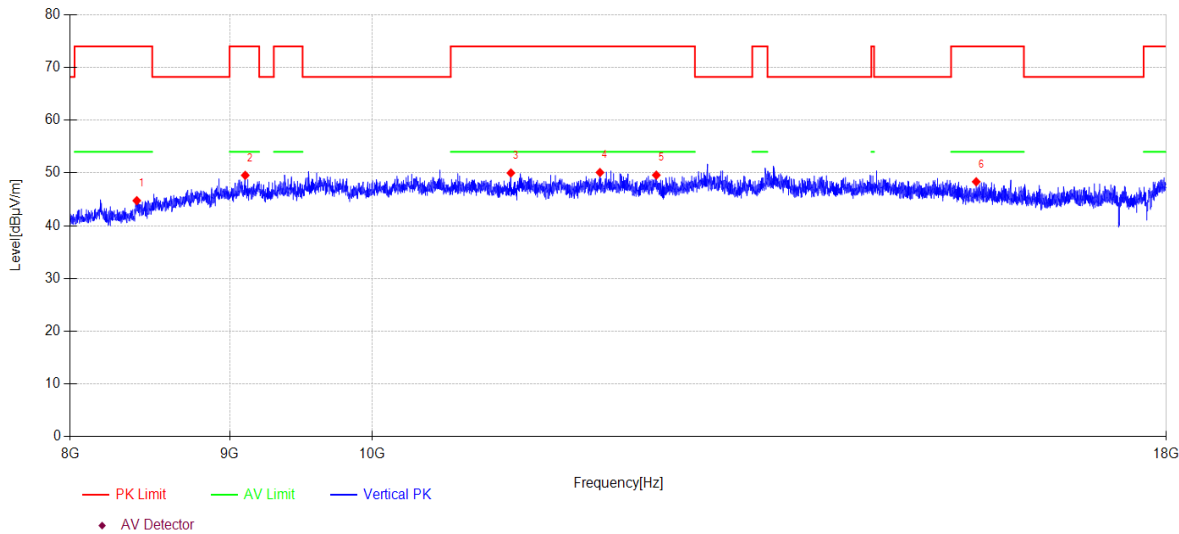

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	8403.000	41.91	37.50	6.76	-41.42	44.75	74.00	29.25	PK	Vertical
2	9105.000	42.82	38.50	7.01	-38.78	49.55	74.00	24.45	PK	Vertical
3	11083.000	42.40	39.30	7.43	-39.13	50.00	74.00	24.00	PK	Vertical
4	11838.000	42.78	38.90	7.89	-39.48	50.09	74.00	23.91	PK	Vertical
5	12342.000	41.85	39.30	8.13	-39.69	49.59	74.00	24.41	PK	Vertical
6	15638.000	40.11	38.56	8.80	-39.14	48.33	74.00	25.67	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6515MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\21

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

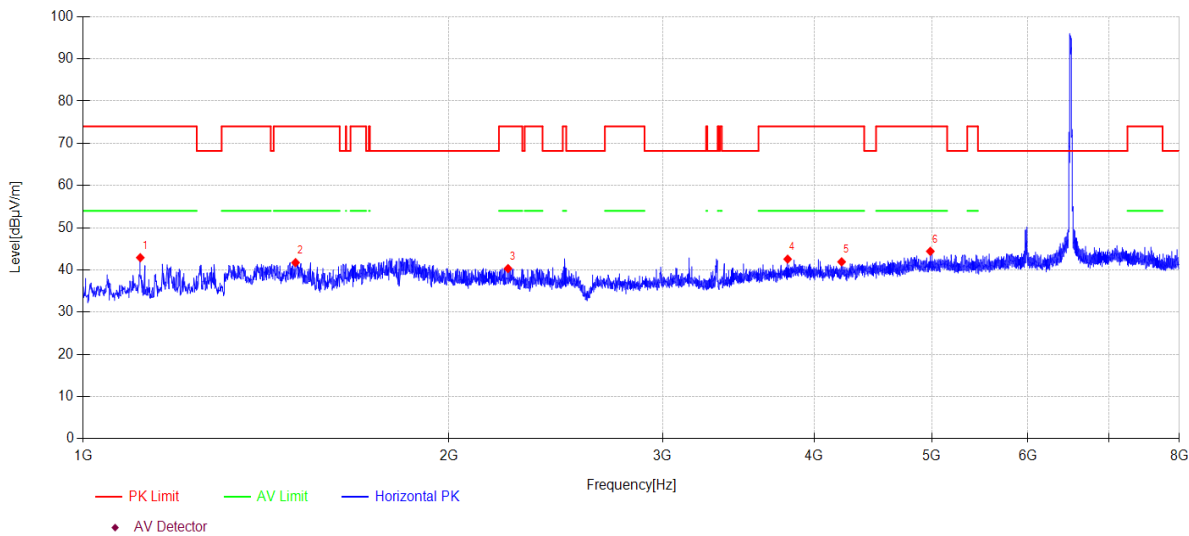

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	1114.100	52.73	24.58	2.49	-36.89	42.91	74.00	31.09	PK	Horizontal
2	1495.600	50.34	25.48	2.86	-36.94	41.74	74.00	32.26	PK	Horizontal
3	2238.300	47.11	27.42	3.48	-37.68	40.33	74.00	33.67	PK	Horizontal
4	3804.900	47.77	30.72	4.40	-40.33	42.56	74.00	31.44	PK	Horizontal
5	4215.100	46.36	31.26	4.66	-40.37	41.91	74.00	32.09	PK	Horizontal
6	4987.900	46.14	33.18	5.17	-40.08	44.41	74.00	29.59	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6515MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\22

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

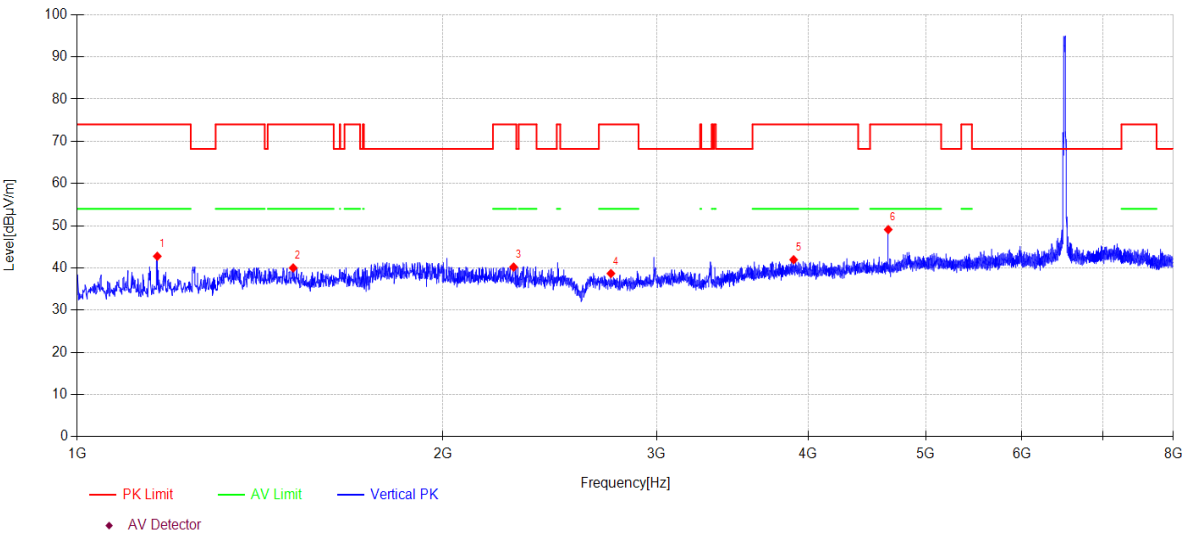

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1163.800	52.29	24.83	2.54	-36.90	42.76	74.00	31.24	PK	Vertical
2	1506.100	48.67	25.41	2.87	-36.95	40.00	74.00	34.00	PK	Vertical
3	2288.000	47.61	26.92	3.51	-37.83	40.21	74.00	33.79	PK	Vertical
4	2752.100	46.46	27.59	3.77	-39.14	38.68	74.00	35.32	PK	Vertical
5	3892.400	46.73	31.15	4.45	-40.38	41.95	74.00	32.05	PK	Vertical
6	4657.500	52.32	32.03	4.95	-40.21	49.09	74.00	24.91	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6515MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\23

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

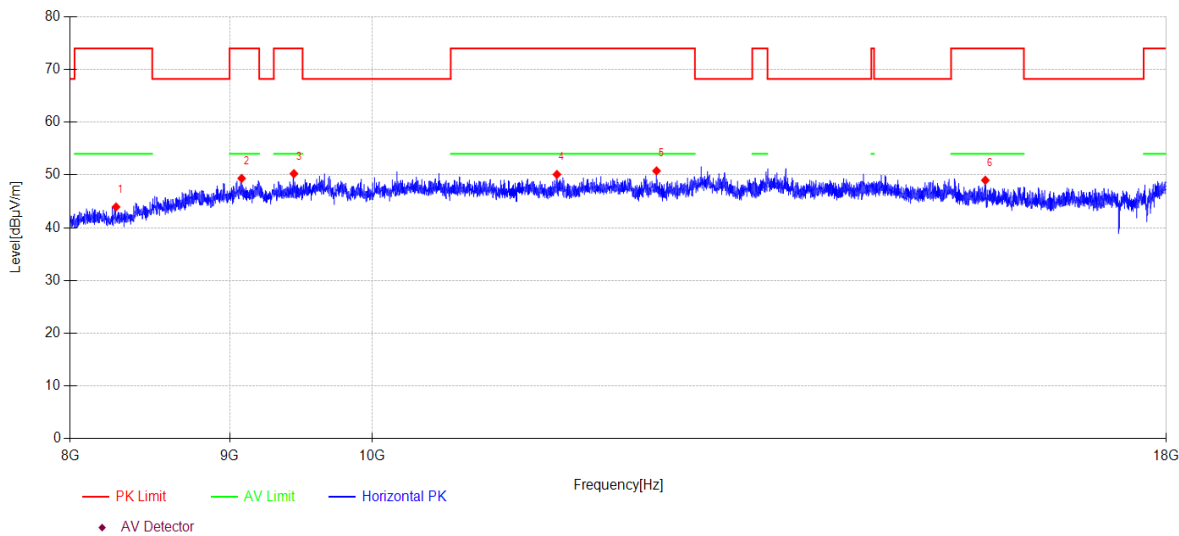

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8275.000	41.97	37.25	6.71	-41.99	43.94	74.00	30.06	PK	Horizontal
2	9081.000	42.67	38.46	7.00	-38.78	49.35	74.00	24.65	PK	Horizontal
3	9439.000	43.27	38.70	7.03	-38.76	50.24	74.00	23.76	PK	Horizontal
4	11467.000	42.52	39.23	7.66	-39.31	50.10	74.00	23.90	PK	Horizontal
5	12344.000	43.03	39.30	8.13	-39.69	50.77	74.00	23.23	PK	Horizontal
6	15744.000	40.96	38.41	8.83	-39.21	48.99	74.00	25.01	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6515MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\24

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

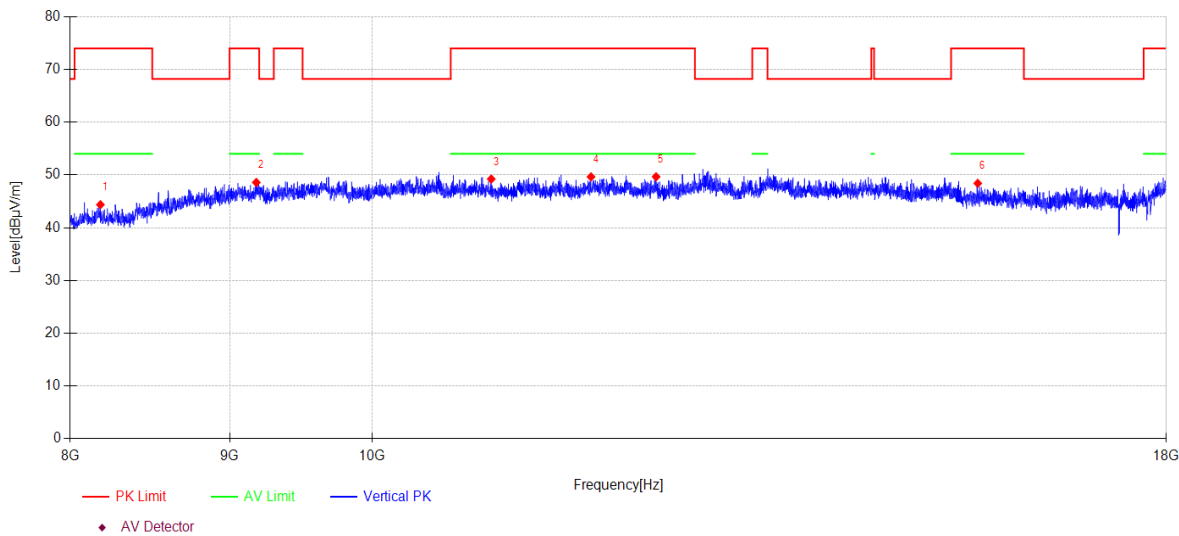

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8180.000	42.97	37.14	6.67	-42.41	44.37	74.00	29.63	PK	Vertical
2	9180.000	41.80	38.56	7.01	-38.78	48.59	74.00	25.41	PK	Vertical
3	10923.000	41.63	39.30	7.36	-39.06	49.23	74.00	24.77	PK	Vertical
4	11760.000	42.32	38.94	7.84	-39.45	49.65	74.00	24.35	PK	Vertical
5	12340.000	41.92	39.30	8.13	-39.69	49.66	74.00	24.34	PK	Vertical
6	15656.000	40.22	38.54	8.80	-39.15	48.41	74.00	25.59	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6535MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\25

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

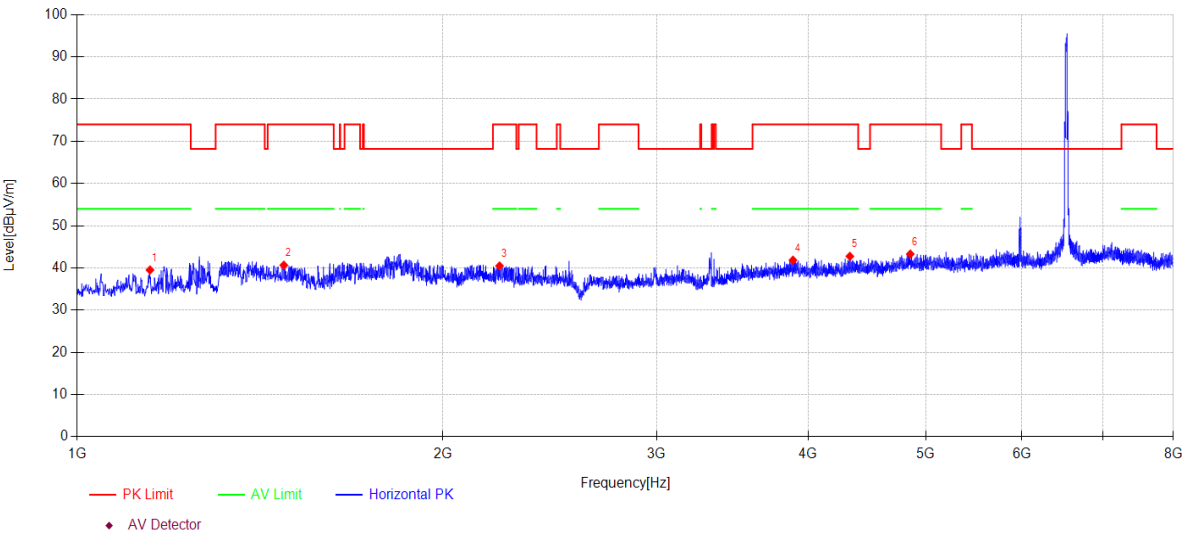

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1147.700	49.11	24.79	2.52	-36.90	39.52	74.00	34.48	PK	Horizontal
2	1479.500	49.32	25.42	2.85	-36.94	40.65	74.00	33.35	PK	Horizontal
3	2227.800	47.12	27.52	3.48	-37.65	40.47	74.00	33.53	PK	Horizontal
4	3887.500	46.64	31.13	4.45	-40.38	41.84	74.00	32.16	PK	Horizontal
5	4330.600	46.74	31.60	4.74	-40.33	42.75	74.00	31.25	PK	Horizontal
6	4857.000	44.65	33.69	5.09	-40.13	43.30	74.00	30.70	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6535MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\26

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

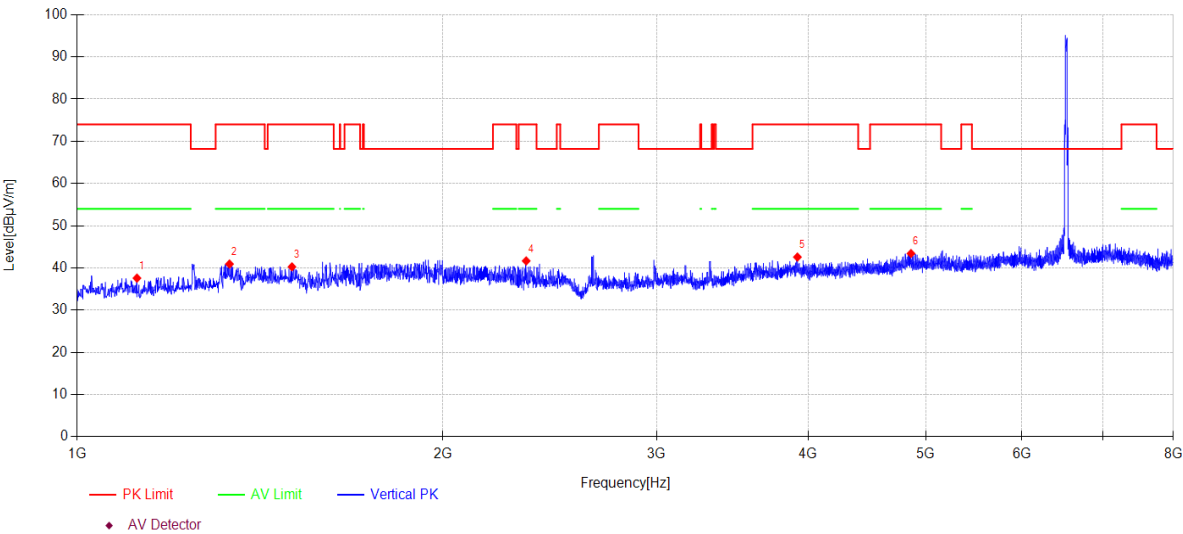

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1119.700	47.37	24.62	2.50	-36.90	37.59	74.00	36.41	PK	Vertical
2	1334.600	50.40	24.74	2.70	-36.92	40.92	74.00	33.08	PK	Vertical
3	1502.600	48.89	25.46	2.87	-36.95	40.27	74.00	33.73	PK	Vertical
4	2343.300	49.05	27.06	3.54	-37.98	41.67	74.00	32.33	PK	Vertical
5	3920.400	47.35	31.16	4.47	-40.40	42.58	74.00	31.42	PK	Vertical
6	4863.300	44.87	33.59	5.09	-40.13	43.42	74.00	30.58	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6535MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\27

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

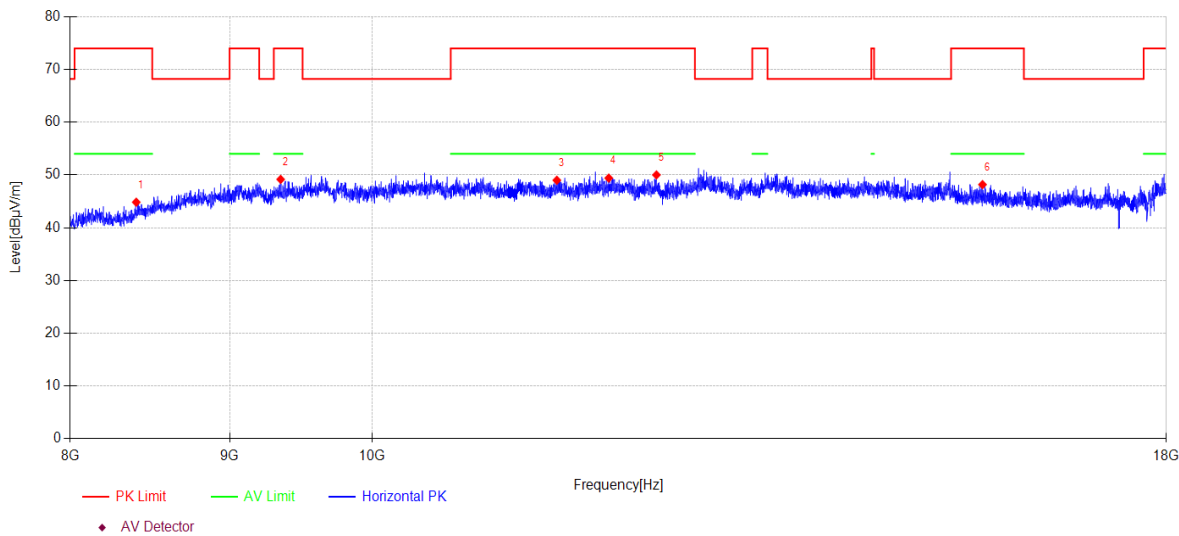

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8400.000	42.02	37.50	6.76	-41.44	44.84	74.00	29.16	PK	Horizontal
2	9347.000	42.22	38.69	7.02	-38.77	49.16	74.00	24.84	PK	Horizontal
3	11466.000	41.42	39.23	7.66	-39.31	49.00	74.00	25.00	PK	Horizontal
4	11915.000	42.04	38.95	7.94	-39.52	49.41	74.00	24.59	PK	Horizontal
5	12343.000	42.27	39.30	8.13	-39.69	50.01	74.00	23.99	PK	Horizontal
6	15711.000	40.07	38.48	8.82	-39.19	48.18	74.00	25.82	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6535MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\28

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

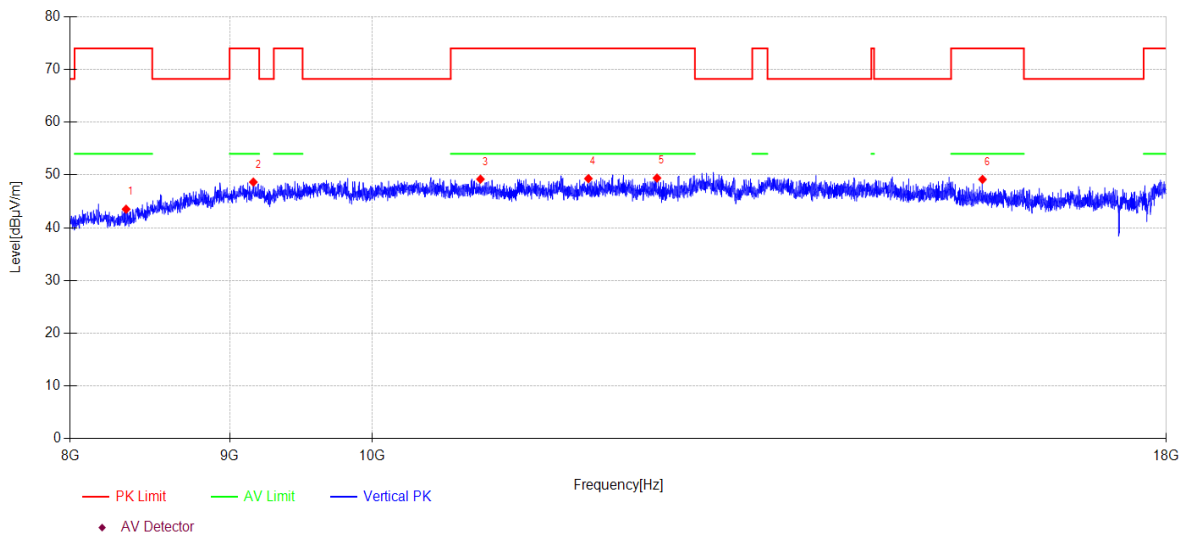

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8337.000	41.19	37.30	6.73	-41.71	43.51	74.00	30.49	PK	Vertical
2	9160.000	41.90	38.52	7.01	-38.78	48.65	74.00	25.35	PK	Vertical
3	10836.000	41.54	39.36	7.33	-39.03	49.20	74.00	24.80	PK	Vertical
4	11737.000	41.96	38.96	7.83	-39.44	49.31	74.00	24.69	PK	Vertical
5	12348.000	41.69	39.30	8.13	-39.70	49.42	74.00	24.58	PK	Vertical
6	15711.000	41.05	38.48	8.82	-39.19	49.16	74.00	24.84	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6695MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\29

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

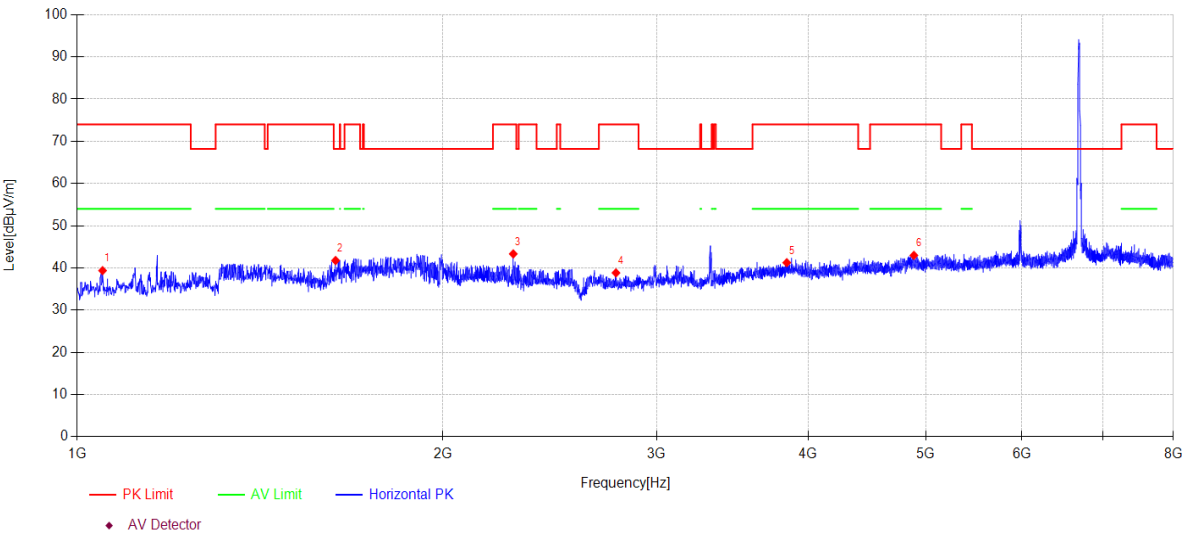

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1049.000	49.43	24.40	2.43	-36.89	39.37	74.00	34.63	PK	Horizontal
2	1632.100	50.07	25.66	2.99	-36.96	41.76	68.20	26.44	PK	Horizontal
3	2286.600	50.71	26.93	3.51	-37.82	43.33	74.00	30.67	PK	Horizontal
4	2778.700	46.76	27.49	3.79	-39.21	38.83	74.00	35.17	PK	Horizontal
5	3842.000	46.31	30.87	4.42	-40.35	41.25	74.00	32.75	PK	Horizontal
6	4889.900	44.83	33.16	5.11	-40.12	42.98	74.00	31.02	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6695MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\30

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

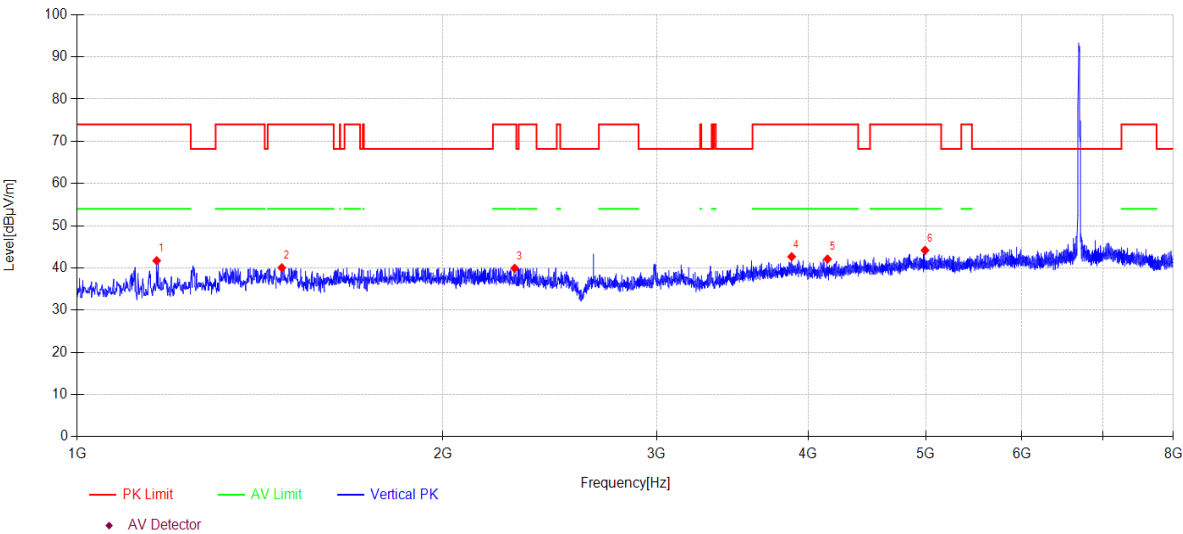

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1162.400	51.26	24.82	2.54	-36.90	41.72	74.00	32.28	PK	Vertical
2	1473.900	48.74	25.40	2.84	-36.94	40.04	74.00	33.96	PK	Vertical
3	2292.900	47.37	26.87	3.51	-37.84	39.91	74.00	34.09	PK	Vertical
4	3877.700	47.53	31.07	4.45	-40.38	42.67	74.00	31.33	PK	Vertical
5	4150.700	46.68	31.20	4.62	-40.39	42.11	74.00	31.89	PK	Vertical
6	4994.200	45.89	33.19	5.18	-40.08	44.18	74.00	29.82	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6695MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\31

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

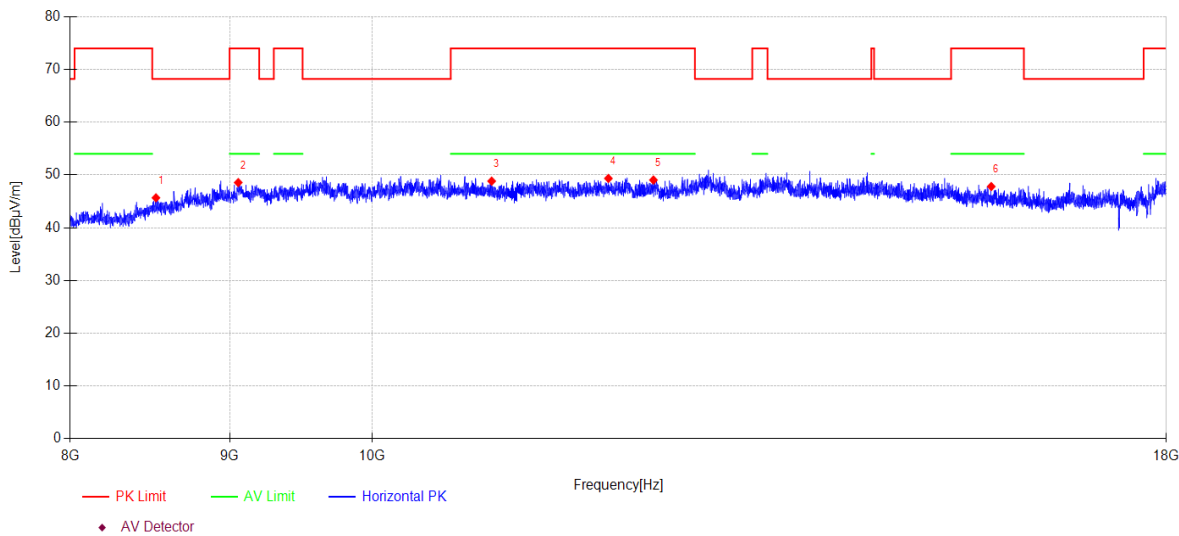

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	8523.000	41.96	37.79	6.81	-40.89	45.67	68.20	22.53	PK	Horizontal
2	9058.000	41.93	38.42	7.00	-38.79	48.56	74.00	25.44	PK	Horizontal
3	10926.000	41.23	39.30	7.36	-39.06	48.83	74.00	25.17	PK	Horizontal
4	11912.000	41.98	38.94	7.94	-39.52	49.34	74.00	24.66	PK	Horizontal
5	12316.000	41.30	39.30	8.12	-39.68	49.04	74.00	24.96	PK	Horizontal
6	15813.000	39.93	38.27	8.86	-39.25	47.81	74.00	26.19	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6695MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\32

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

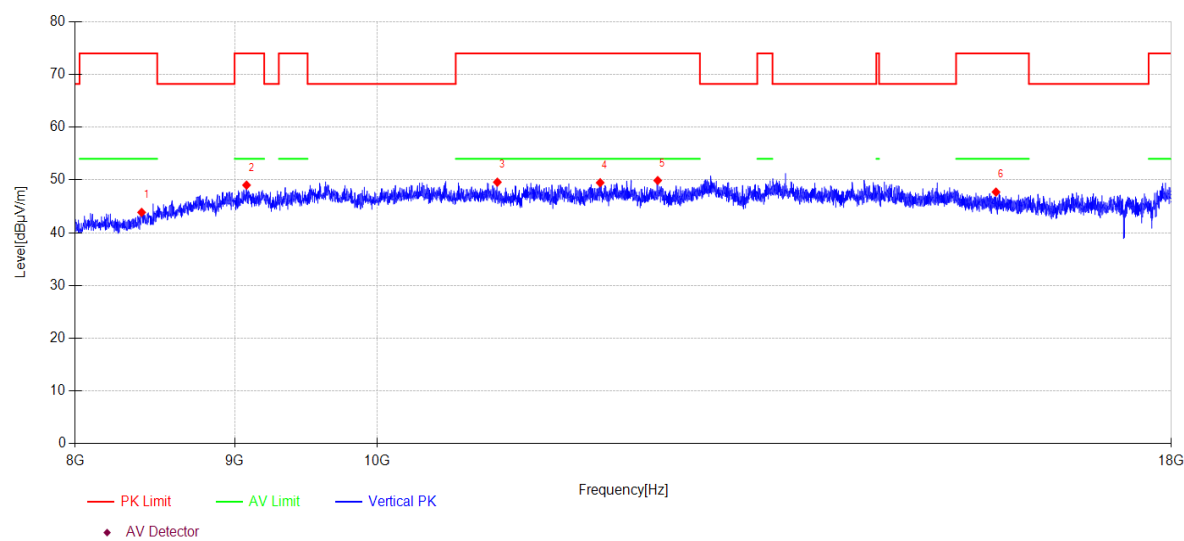

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8402.000	41.03	37.50	6.76	-41.43	43.86	74.00	30.14	PK	Vertical
2	9080.000	42.34	38.46	7.00	-38.78	49.02	74.00	24.98	PK	Vertical
3	10932.000	41.98	39.30	7.36	-39.06	49.58	74.00	24.42	PK	Vertical
4	11796.000	42.17	38.90	7.87	-39.46	49.48	74.00	24.52	PK	Vertical
5	12309.000	42.16	39.30	8.12	-39.68	49.90	74.00	24.10	PK	Vertical
6	15810.000	39.83	38.28	8.86	-39.25	47.72	74.00	26.28	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6855MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\33

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

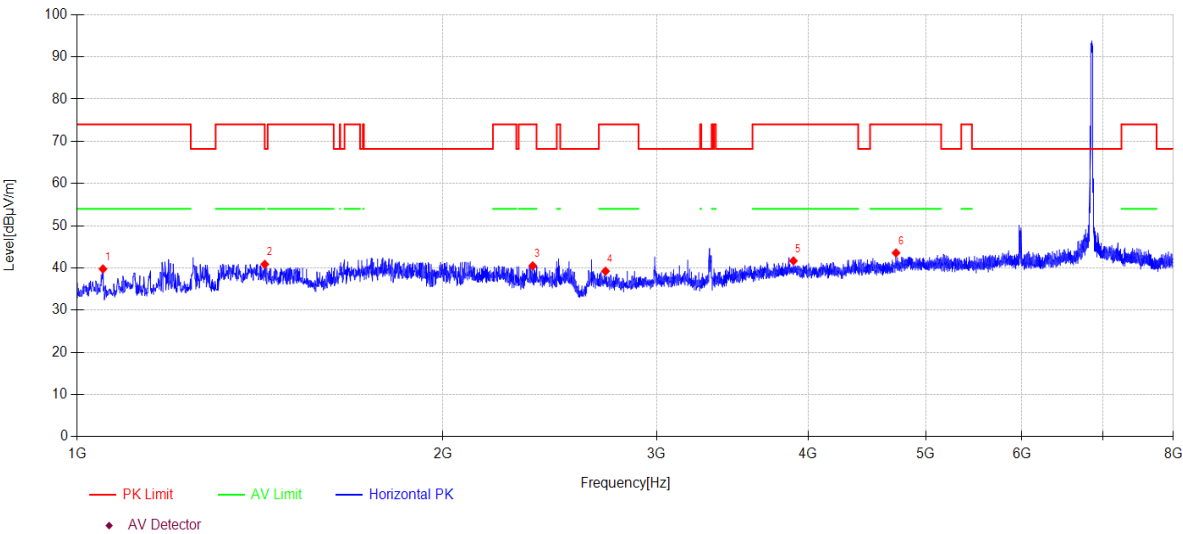

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1049.700	49.82	24.40	2.43	-36.89	39.76	74.00	34.24	PK	Horizontal
2	1427.000	49.80	25.21	2.79	-36.94	40.86	68.20	27.34	PK	Horizontal
3	2372.700	47.81	27.19	3.56	-38.06	40.50	74.00	33.50	PK	Horizontal
4	2724.100	46.98	27.55	3.76	-39.06	39.23	74.00	34.77	PK	Horizontal
5	3891.000	46.46	31.15	4.45	-40.38	41.68	74.00	32.32	PK	Horizontal
6	4726.800	46.49	32.25	5.00	-40.18	43.56	74.00	30.44	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6855MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\34

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

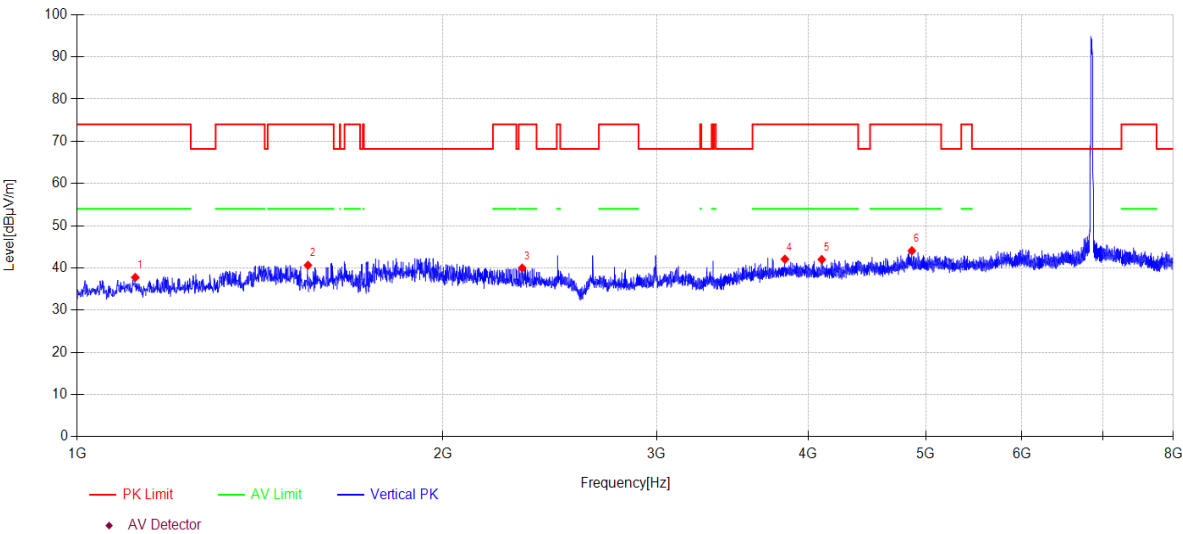

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1116.200	47.56	24.60	2.49	-36.90	37.75	74.00	36.25	PK	Vertical
2	1548.800	49.85	24.82	2.91	-36.95	40.63	74.00	33.37	PK	Vertical
3	2325.800	47.42	26.95	3.53	-37.93	39.97	74.00	34.03	PK	Vertical
4	3828.700	47.20	30.81	4.42	-40.35	42.08	74.00	31.92	PK	Vertical
5	4105.900	46.71	31.11	4.59	-40.41	42.00	74.00	32.00	PK	Vertical
6	4871.700	45.66	33.45	5.10	-40.13	44.08	74.00	29.92	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6855MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\35

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

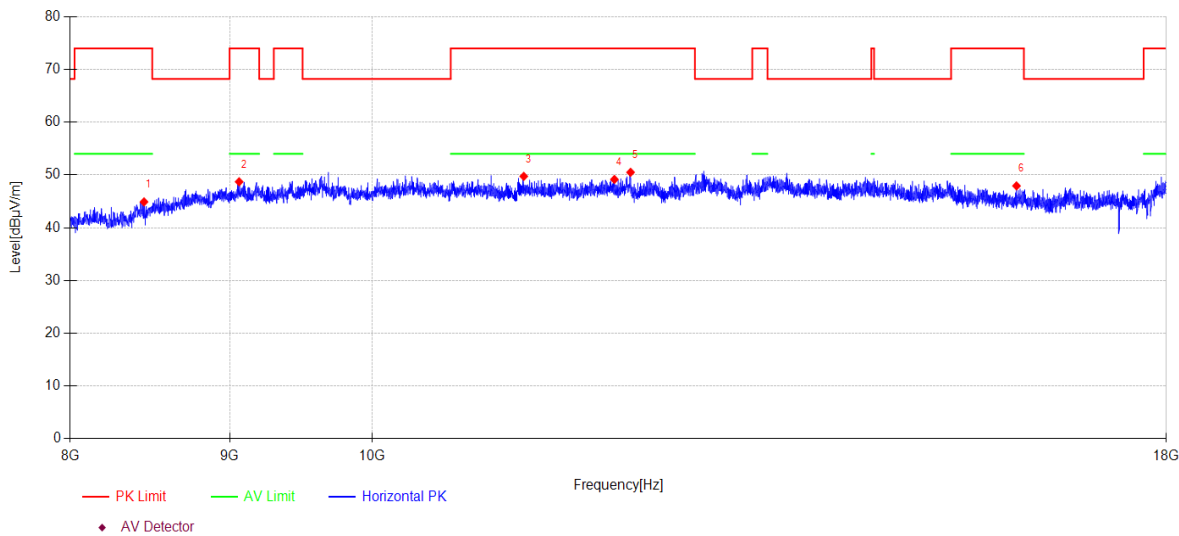

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8448.000	41.84	37.50	6.78	-41.22	44.90	74.00	29.10	PK	Horizontal
2	9064.000	42.07	38.43	7.00	-38.79	48.71	74.00	25.29	PK	Horizontal
3	11189.000	42.21	39.21	7.50	-39.18	49.74	74.00	24.26	PK	Horizontal
4	11965.000	41.63	39.10	7.97	-39.54	49.16	74.00	24.84	PK	Horizontal
5	12109.000	42.77	39.30	8.03	-39.60	50.50	74.00	23.50	PK	Horizontal
6	16111.000	40.53	37.89	8.96	-39.45	47.93	74.00	26.07	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6855MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\36

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

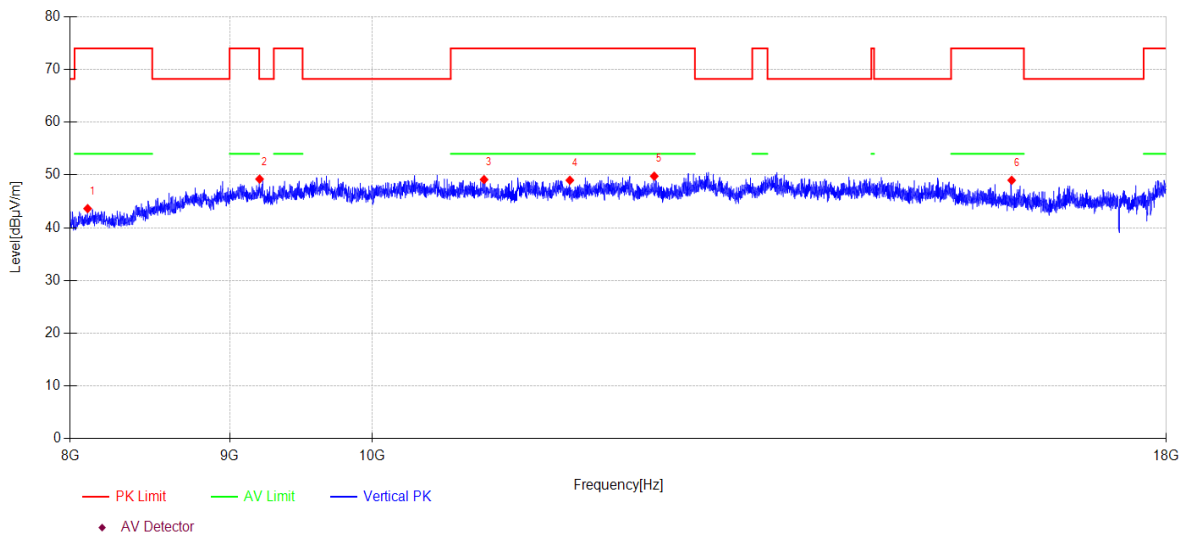

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8103.000	42.54	37.20	6.64	-42.75	43.63	74.00	30.37	PK	Vertical
2	9202.000	42.39	38.60	7.01	-38.78	49.22	68.20	18.98	PK	Vertical
3	10865.000	41.49	39.34	7.34	-39.04	49.13	74.00	24.87	PK	Vertical
4	11577.000	41.58	39.05	7.73	-39.36	49.00	74.00	25.00	PK	Vertical
5	12323.000	42.04	39.30	8.12	-39.69	49.77	74.00	24.23	PK	Vertical
6	16054.000	41.50	37.95	8.94	-39.40	48.99	74.00	25.01	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6875MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\37

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

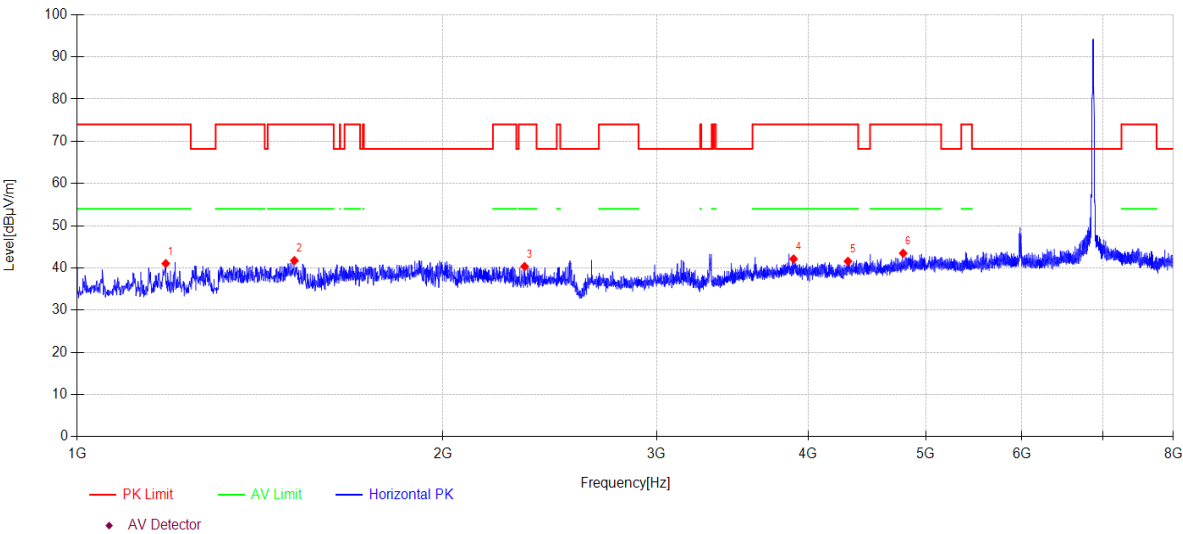

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	1182.700	50.51	24.87	2.56	-36.90	41.04	74.00	32.96	PK	Horizontal
2	1509.600	50.45	25.37	2.87	-36.95	41.74	74.00	32.26	PK	Horizontal
3	2336.300	47.74	27.02	3.54	-37.96	40.34	74.00	33.66	PK	Horizontal
4	3892.400	46.91	31.15	4.45	-40.38	42.13	74.00	31.87	PK	Horizontal
5	4315.200	45.58	31.60	4.73	-40.33	41.58	74.00	32.42	PK	Horizontal
6	4791.200	46.14	32.46	5.04	-40.16	43.48	74.00	30.52	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6875MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\38

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

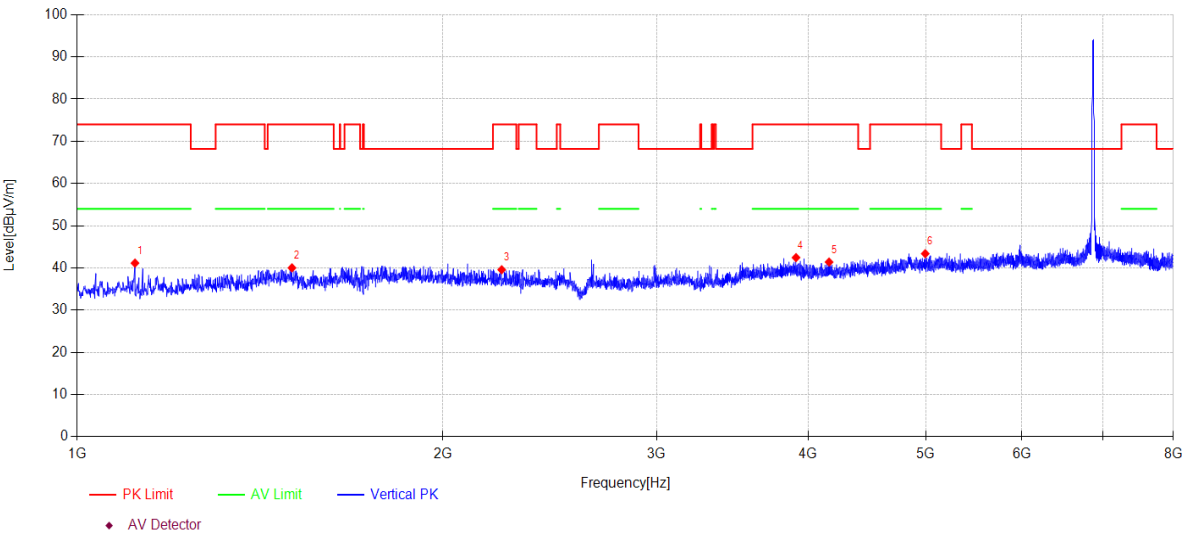

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1115.500	50.96	24.59	2.49	-36.90	41.14	74.00	32.86	PK	Vertical
2	1502.600	48.64	25.46	2.87	-36.95	40.02	74.00	33.98	PK	Vertical
3	2236.900	46.35	27.43	3.48	-37.68	39.58	74.00	34.42	PK	Vertical
4	3909.900	47.20	31.18	4.47	-40.40	42.45	74.00	31.55	PK	Vertical
5	4163.300	45.95	31.20	4.63	-40.39	41.39	74.00	32.61	PK	Vertical
6	4996.300	45.09	33.19	5.18	-40.08	43.38	74.00	30.62	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6875MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\39

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

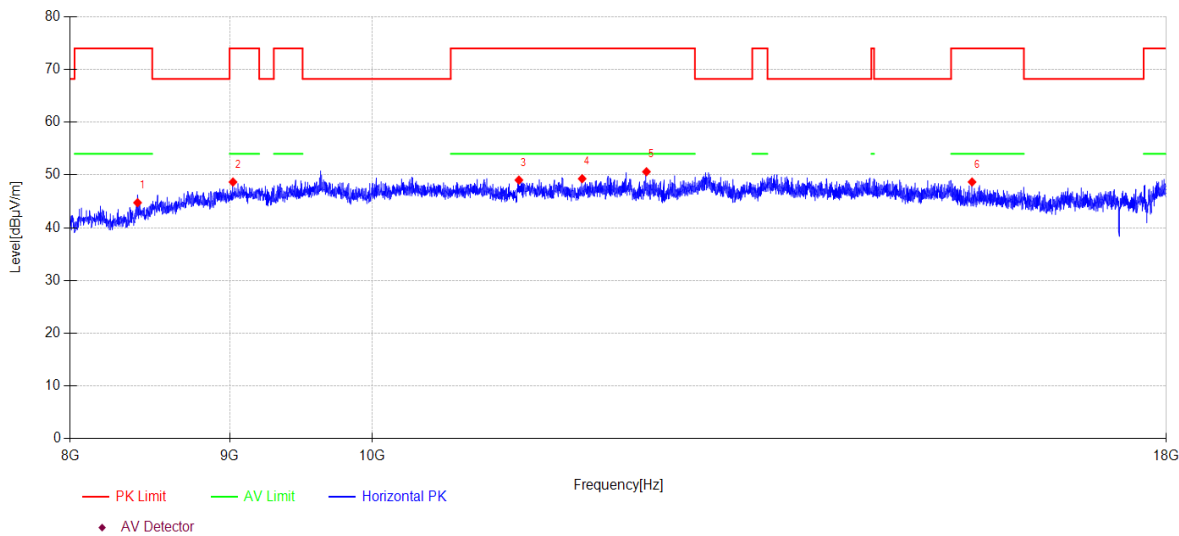

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8408.000	41.88	37.50	6.76	-41.40	44.74	74.00	29.26	PK	Horizontal
2	9023.000	42.10	38.35	7.00	-38.79	48.66	74.00	25.34	PK	Horizontal
3	11149.000	41.47	39.25	7.47	-39.16	49.03	74.00	24.97	PK	Horizontal
4	11683.000	41.90	39.00	7.80	-39.41	49.29	74.00	24.71	PK	Horizontal
5	12252.000	42.88	39.30	8.09	-39.66	50.61	74.00	23.39	PK	Horizontal
6	15590.000	40.38	38.62	8.78	-39.11	48.67	74.00	25.33	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6875MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\40

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

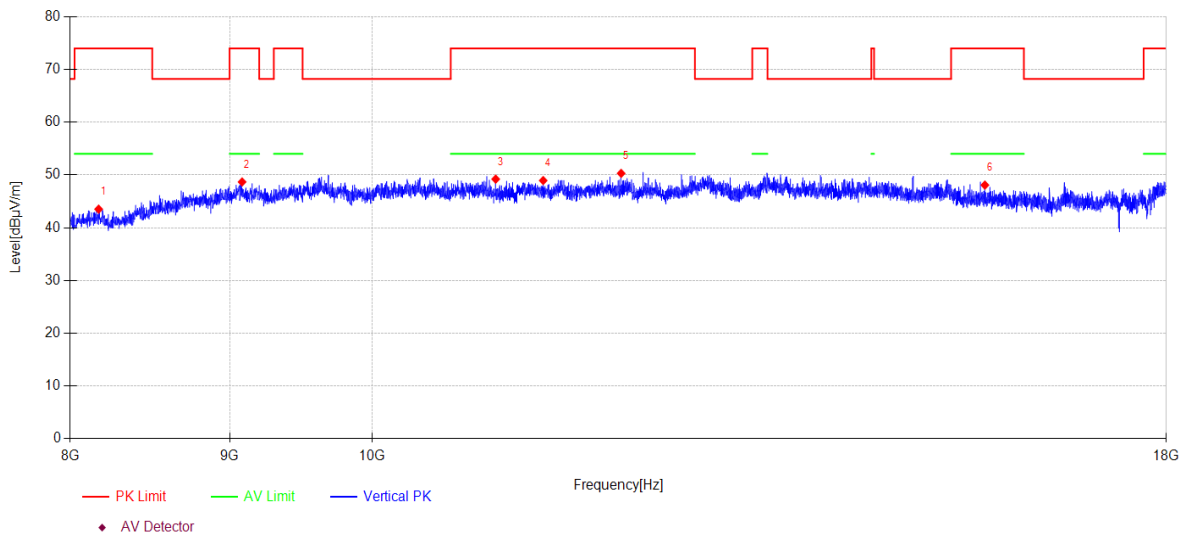

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8169.000	42.14	37.16	6.67	-42.45	43.52	74.00	30.48	PK	Vertical
2	9084.000	41.98	38.47	7.01	-38.78	48.68	74.00	25.32	PK	Vertical
3	10959.000	41.61	39.30	7.37	-39.07	49.21	74.00	24.79	PK	Vertical
4	11351.000	41.36	39.25	7.59	-39.25	48.95	74.00	25.05	PK	Vertical
5	12025.000	42.64	39.23	8.00	-39.57	50.30	74.00	23.70	PK	Vertical
6	15739.000	40.03	38.42	8.83	-39.20	48.08	74.00	25.92	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6895MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\41

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

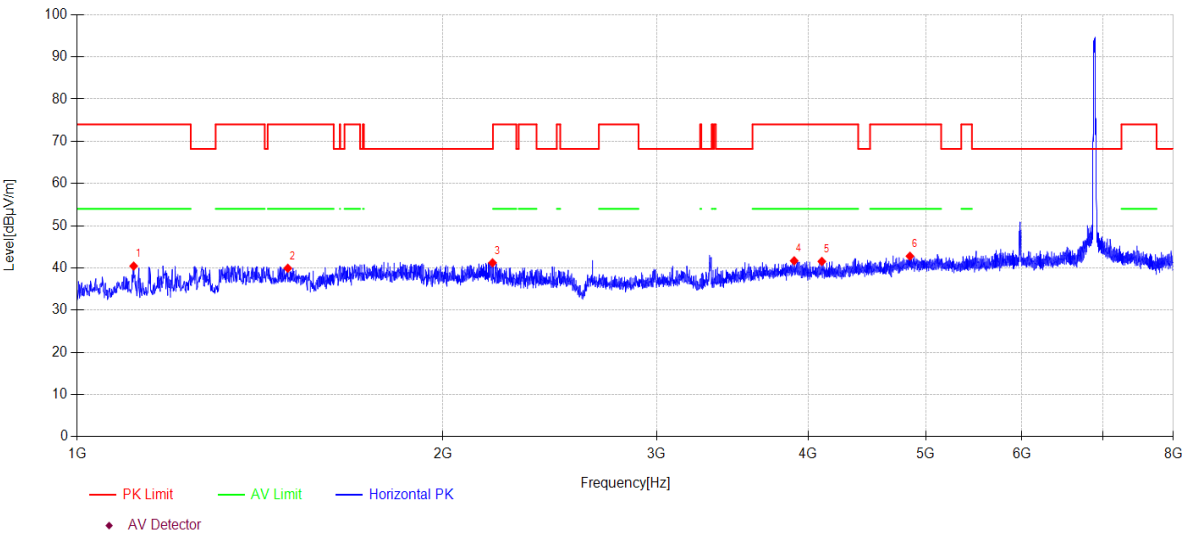

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1112.700	50.26	24.58	2.49	-36.89	40.44	74.00	33.56	PK	Horizontal
2	1490.700	48.54	25.46	2.86	-36.94	39.92	74.00	34.08	PK	Horizontal
3	2198.400	47.54	27.79	3.46	-37.57	41.22	68.20	26.98	PK	Horizontal
4	3896.600	46.44	31.18	4.46	-40.39	41.69	74.00	32.31	PK	Horizontal
5	4106.600	46.25	31.11	4.59	-40.41	41.54	74.00	32.46	PK	Horizontal
6	4853.500	44.09	33.74	5.08	-40.13	42.78	74.00	31.22	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6895MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\42

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

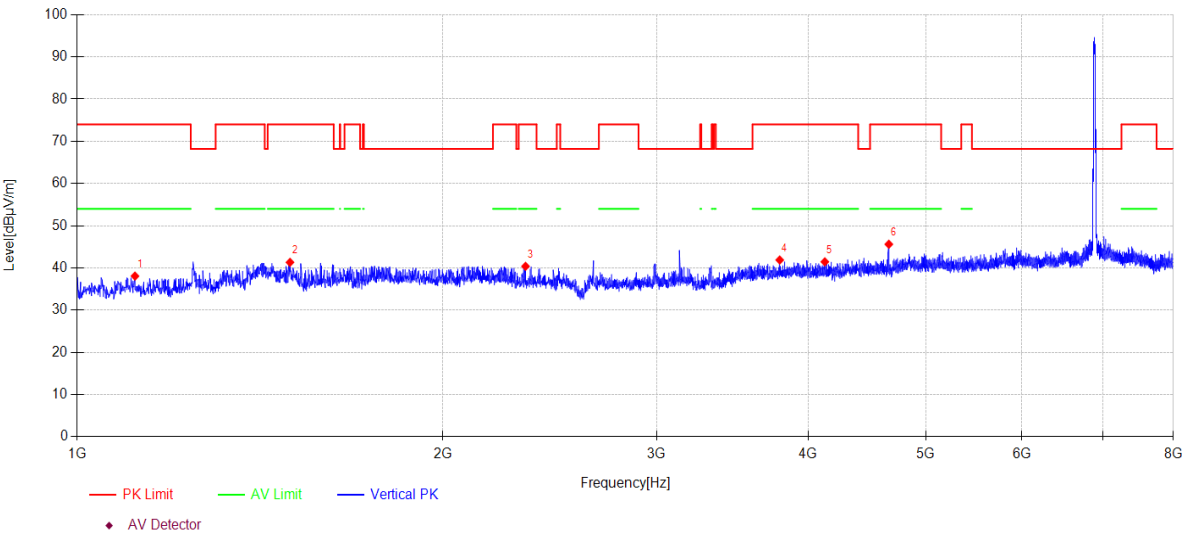

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1115.500	47.89	24.59	2.49	-36.90	38.07	74.00	35.93	PK	Vertical
2	1497.000	49.92	25.49	2.86	-36.94	41.33	74.00	32.67	PK	Vertical
3	2340.500	47.78	27.04	3.54	-37.97	40.39	74.00	33.61	PK	Vertical
4	3790.900	47.15	30.66	4.39	-40.32	41.88	74.00	32.12	PK	Vertical
5	4129.700	46.09	31.16	4.61	-40.40	41.46	74.00	32.54	PK	Vertical
6	4663.100	48.80	32.05	4.96	-40.20	45.61	74.00	28.39	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6895MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\43

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

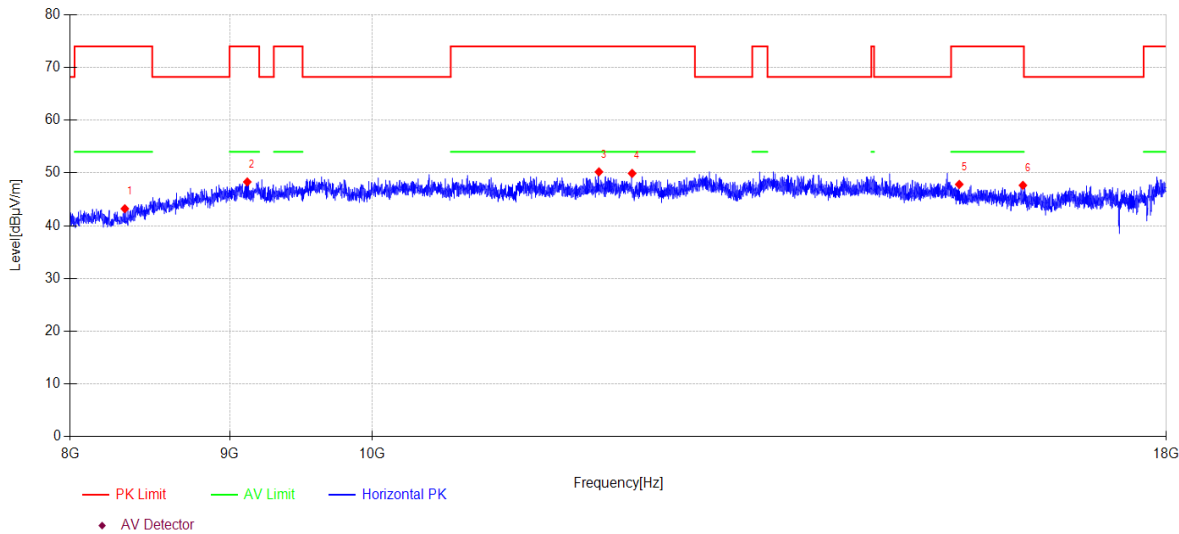

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8329.000	40.94	37.30	6.73	-41.75	43.22	74.00	30.78	PK	Horizontal
2	9119.000	41.57	38.50	7.01	-38.78	48.30	74.00	25.70	PK	Horizontal
3	11829.000	42.90	38.90	7.89	-39.48	50.21	74.00	23.79	PK	Horizontal
4	12123.000	42.19	39.30	8.04	-39.61	49.92	74.00	24.08	PK	Horizontal
5	15443.000	39.22	38.91	8.73	-39.03	47.83	74.00	26.17	PK	Horizontal
6	16188.000	40.37	37.81	8.99	-39.51	47.66	74.00	26.34	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6895MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\44

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

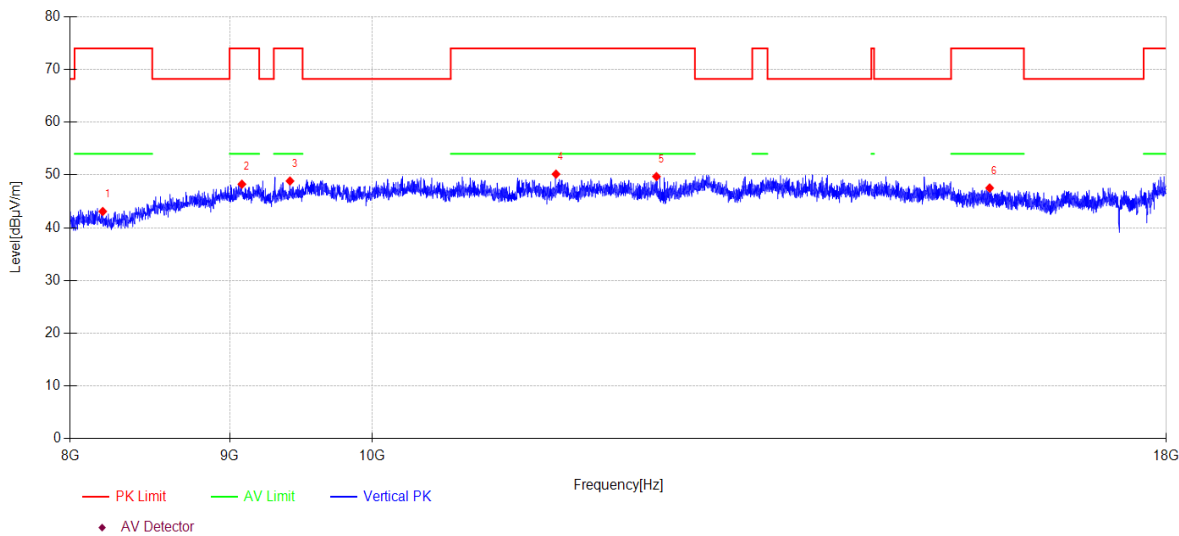

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	8194.000	41.63	37.11	6.68	-42.34	43.08	74.00	30.92	PK	Vertical
2	9083.000	41.56	38.47	7.00	-38.78	48.25	74.00	25.75	PK	Vertical
3	9412.000	41.89	38.70	7.02	-38.76	48.85	74.00	25.15	PK	Vertical
4	11459.000	42.57	39.24	7.66	-39.31	50.16	74.00	23.84	PK	Vertical
5	12343.000	41.96	39.30	8.13	-39.69	49.70	74.00	24.30	PK	Vertical
6	15794.000	39.61	38.31	8.85	-39.24	47.53	74.00	26.47	PK	Vertical

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6995MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\45

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

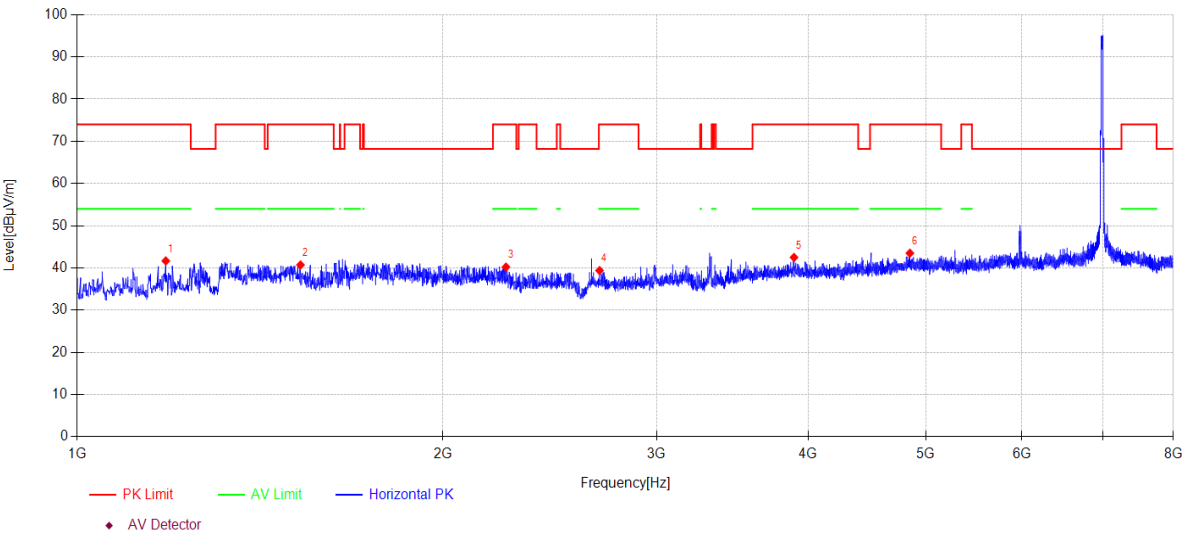

Data List										
N O.	Freq. [MHz]	Reading [dBµV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	1182.700	51.14	24.87	2.56	-36.90	41.67	74.00	32.33	PK	Horizontal
2	1527.100	49.65	25.12	2.89	-36.95	40.71	74.00	33.29	PK	Horizontal
3	2255.100	47.21	27.25	3.49	-37.73	40.22	74.00	33.78	PK	Horizontal
4	2693.300	47.11	27.51	3.74	-38.97	39.39	74.00	34.61	PK	Horizontal
5	3895.200	47.26	31.17	4.46	-40.39	42.50	74.00	31.50	PK	Horizontal
6	4852.800	44.79	33.76	5.08	-40.13	43.50	74.00	30.50	PK	Horizontal

Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2024-07-20

Tested By:

Genliu

EUT:

WIFI+BT Module

Model Number:

WXT2HM2001

Test Mode:

AX20 MIMO 6995MHz

Power Supply:

DC 3.3V

Condition:

Temp:24.5°C;Humi:47.4%

Test Site:

DDT 3# Chamber


File Path:

d:\ts\2024 report data\Q24052405\FCC AOBVE 6G\46

Memo:

Sample Number:S24052405-001 Power Setting:14

Test Graph

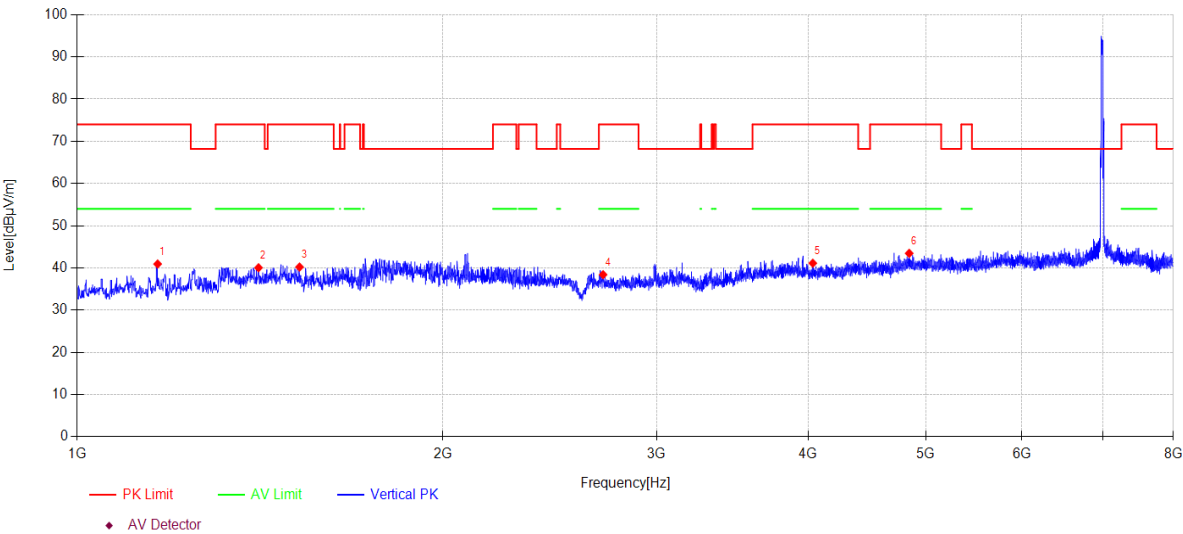

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1164.500	50.46	24.83	2.54	-36.90	40.93	74.00	33.07	PK	Vertical
2	1410.200	49.06	25.14	2.78	-36.93	40.05	74.00	33.95	PK	Vertical
3	1524.300	49.11	25.16	2.89	-36.95	40.21	74.00	33.79	PK	Vertical
4	2711.500	46.15	27.52	3.75	-39.02	38.40	74.00	35.60	PK	Vertical
5	4036.600	46.06	30.97	4.54	-40.44	41.13	74.00	32.87	PK	Vertical
6	4846.500	44.81	33.71	5.08	-40.14	43.46	74.00	30.54	PK	Vertical

- Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.