







RADIO TEST REPORT

Test Report No. 14568085S-C-R2

Customer	Sony Group Corporation
Description of EUT	IEEE 802.11 1X1 a/b/g/n/ac/ax Wireless LAN + Bluetooth 5.2 + 802.15.4 Tri-radio 12 x 12 LGA Module
Model Number of EUT	AW-XM553
FCC ID	AK8XM553
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied (Refer to SECTION 3)
Issue Date	May 19, 2023
Remarks	Bluetooth Low Energy part(s) This EUT uses Bluetooth and IEEE 802.11 a/n (20 MHz / 40 MHz) only.

Representative Test Engineer	Approved By
	
Kenichi Adachi Engineer	Toyokazu Imamura Leader
 	
CERTIFICATE 1266.03	
<input type="checkbox"/> The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.	
<input checked="" type="checkbox"/> There is no testing item of "Non-accreditation".	

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 21.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc Shonan EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the customer for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 14568085S-C

This report is a revised version of 14568085S-C-R1. 14568085S-C-R1 is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14568085S-C	April 3, 2023	-
1	14568085S-C-R1	May 16, 2023	p.5: Corrected the rating from “DC 3.3 V and DC 1.8 V” to “DC 3.3 V”. p.7: Corrected from “The RF Module has its own regulator. The RF Module is constantly provided with voltage through the regulator regardless of input voltage.” to “This EUT provides stable voltage constantly to RF Module regardless of input voltage.” p.10: Added the test program used for radiated emission tests.
2	14568085S-C-R2	May 19, 2023	p.7: Corrected from “This EUT provides stable voltage constantly to RF Module regardless of input voltage.” to “The EUT is constantly provided with stable voltage from the host device regardless of input voltage.”

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadrature Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test Specification, Procedures & Results	7
SECTION 4: Operation of EUT during testing.....	10
SECTION 5: Conducted Emission	13
SECTION 6: Radiated Spurious Emission	14
SECTION 7: Antenna Terminal Conducted Tests.....	16
APPENDIX 1: Test Data	17
Conducted Emission	17
99 % Occupied Bandwidth and 6 dB Bandwidth	18
Maximum Peak Output Power & Average Power (reference data for RF Exposure)	21
Burst rate confirmation	22
Radiated Spurious Emission	23
Conducted Spurious Emission	43
Power Density	44
APPENDIX 2: Test Instruments.....	46
APPENDIX 3: Photographs of Test Setup.....	48
Conducted Emission	48
Radiated Spurious Emission	49
Pre-check of Worst Case Position.....	50
Antenna Terminal Conducted Tests.....	52

SECTION 1: Customer Information

Company Name	Sony Group Corporation
Address	1-7-1 Konan Minato-ku, Tokyo, 108-0075 Japan
Contact Person	Kazuhiko Nagano

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	IEEE 802.11 1X1 a/b/g/n/ac/ax Wireless LAN + Bluetooth 5.2 + 802.15.4 Tri-radio 12 x 12 LGA Module
Model Number	AW-XM553
Serial Number	Refer to SECTION 4.2
Condition	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	November 10, 2022
Test Date	November 11, 2022 to January 19, 2023

2.2 Product Description

General Specification

Rating	DC 3.3 V
Operating temperature	0 deg. C to 70 deg. C

Radio Specification

Bluetooth (BR / EDR / Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	BT: FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK) BT LE: GFSK
Antenna Type	Type D (IW611-IW620-D): Dipole Antenna Type G (IW611-IW620-G): Dipole Antenna
Antenna Gain	Type D (IW611-IW620-D): 0.38 dBi max (include 100 mm antenna cable) Type G (IW611-IW620-G): 0.29 dBi max (include 100 mm antenna cable)

WLAN (IEEE802.11a/11n-20/11n-40)

Equipment Type	Transceiver	
Frequency of Operation	20 MHz Band:	5180 MHz to 5240 MHz 5260 MHz to 5320 MHz 5500 MHz to 5700 MHz 5745 MHz to 5825 MHz
	40 MHz Band:	5190 MHz to 5230 MHz 5270 MHz to 5310 MHz 5510 MHz to 5670 MHz 5755 MHz to 5795 MHz
Type of Modulation	OFDM	
Antenna Type	Type D (IW611-IW620-D): Dipole Antenna Type G (IW611-IW620-G): Dipole Antenna	
Antenna Gain	Type D (IW611-IW620-D): 1.68 dBi max (include 100 mm antenna cable) Type G (IW611-IW620-G): 1.36 dBi max (include 100 mm antenna cable)	

* This test report applies to Bluetooth Low Energy mode.

* Following channels are not used.

- 20 MHz Bandwidth (5600 MHz - 5640 MHz)
- 40 MHz Bandwidth (5590 MHz - 5630 MHz)

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ----- ISED: RSS-Gen 8.8	15.5 dB, 1.01880 MHz, QP, L1	Complied a)	-
6 dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(2) ----- ISED: RSS-247 5.2(a)	See data.	Complied b)	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section 15.247(b)(3) ----- ISED: RSS-247 5.4(d)		Complied c)	Conducted
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(e) ----- ISED: RSS-247 5.2(b)		Complied d)	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ----- ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10		2.0 dB 2384.875 MHz, AV, Hori 2384.875 MHz, AV, Vert. Mode: Tx BT LE 2 M-PHY 2402 MHz with Tx 11n-20 5580 MHz	Complied e), f)
<p>Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.</p> <p>*1) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6.</p> <p>a) Refer to APPENDIX 1 (data of Conducted Emission) b) Refer to APPENDIX 1 (data of 99 % Occupied Bandwidth and 6 dB Bandwidth) c) Refer to APPENDIX 1 (data of Maximum Peak Output Power) d) Refer to APPENDIX 1 (data of Power Density) e) Refer to APPENDIX 1 (data of Conducted Spurious Emission) f) Refer to APPENDIX 1 (data of Radiated Spurious Emission)</p>					

FCC Part 15.31 (e)

The EUT is constantly provided with stable voltage from the host device regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

The EUT has a unique antenna connector (U.FL). Therefore, the equipment complies with the requirement of 15.203/212.

3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99 % Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	b)	Conducted
b) Refer to APPENDIX 1 (data of 99 % Occupied Bandwidth and 6 dB Bandwidth)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.

Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Item	Frequency range	Uncertainty (+/-)
Conducted emission (AC Mains) LISN	150 kHz-30 MHz	3.1 dB
Radiated emission (Measurement distance: 3 m)	9 kHz-30 MHz	3.3 dB
	30 MHz-200 MHz	4.8 dB
	200 MHz-1 GHz	6.1 dB
	1 GHz-6 GHz	4.7 dB
	6 GHz-18 GHz	5.3 dB
	18 GHz-40 GHz	5.5 dB
Radiated emission (Measurement distance: 1 m)	1 GHz-18 GHz	5.6 dB
	18 GHz-40 GHz	5.8 dB

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)_SPM-06	1.3 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-06	2.1 dB
Power Measurement above 1 GHz (Average Detector)_SPM-07	1.1 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-07	1.2 dB
Power Measurement above 1 GHz (Average Detector)_SPM-13	1.1 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-13	1.4 dB
Spurious emission (Conducted) below 1 GHz	0.84 dB
Conducted emissions Power Density Measurement 1 GHz-3 GHz	0.86 dB
Conducted emissions Power Density Measurement 3 GHz-18 GHz	2.4 dB
Spurious emission (Conducted) 18 GHz-26.5 GHz	2.4 dB
Spurious emission (Conducted) 26.5 GHz-40 GHz	2.2 dB
Bandwidth Measurement	0.012 %
Duty cycle and Time Measurement	0.27 %
Temperature_SCH-01	0.87 deg.C.
Humidity_SCH-01	3.5 %
Temperature_SCH-02	2.0 deg.C.
Humidity_SCH-02	6.7 %
Voltage	0.92 %

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 Japan

Telephone: +81 463 50 6400

A2LA Certificate Number: 1266.03

(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room	-	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	-	2.55 x 4.1 x 2.5	-	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)


Mode	Remarks*
Bluetooth Low Energy (BT LE) 1M-PHY Uncoded PHY (1M-PHY)	Maximum Packet Size, PRBS9
Bluetooth Low Energy (BT LE) 2M-PHY Uncoded PHY (2M-PHY)	Maximum Packet Size, PRBS9
<p>*Power of the EUT was set by the software as follows; Power Setting: 4 Software: IW611 BT Test Version 1.3 (For antenna terminal conducted tests) (Date: 2022.11.10, Storage location: Driven by connected PC) Dut LabTool, Version 1.0.0.29 (For radiated emission tests) (Date: 2022.12.15, Storage location: Driven by connected PC)</p> <p>*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p>	

*The Details of Operating Mode(s)

Test Item	Operating Mode	Tested frequency
Conducted Emission, Radiated Spurious Emission (Below 1 GHz) Conducted Spurious Emission	Tx BT LE, 2M-PHY *1)	2402 MHz
Radiated Spurious Emission (Above 1 GHz), Maximum Peak Output Power, Power Density, 6 dB Bandwidth, 99 % Occupied Bandwidth,	Tx BT LE, 1M-PHY Tx BT LE, 2M-PHY	2402 MHz 2440 MHz 2480 MHz
Radiated Spurious Emission (Above 1 GHz)	Tx BT LE, 1M-PHY with Tx 11n-20 5580 MHz Tx BT LE, 2M-PHY with Tx 11n-20 5580 MHz	2402 MHz 2480 MHz
<p>*1) Conducted emissions and Spurious emissions for frequencies below 1 GHz were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.</p>		

4.2 Configuration and Peripherals

<Radiated Emission test and Conducted Emission test >

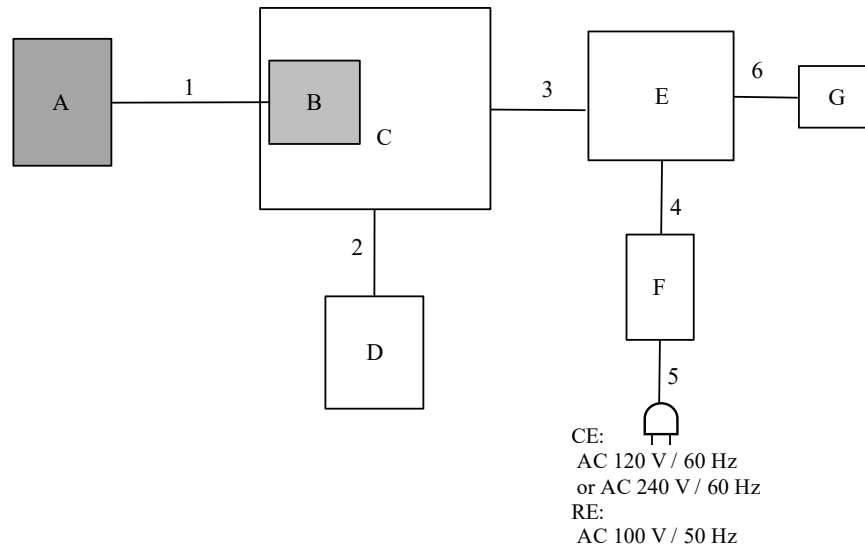

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

*As a result of comparing AC 120 V and AC 240 V at pre-check, conducted emission test was performed with AC 120 V of the worst voltage as representative.

** The antenna used in these tests were the worst of two type of antennas in the pre-check.
(Type D (=IW611-IW620-D) or Type G (=IW611-IW620-G))

** The antenna cable used in these tests were the worst of two type of antenna cable in the pre-check.
(100 mm or 800 mm)

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Antenna	Type D	001	SONY	EUT
		Type G	001	SONY	EUT
B	IEEE 802.11 1X1 a/b/g/n/ac/ax Wireless LAN + Bluetooth 5.2 + 802.15.4 Tri-radio 12 x 12 LGA Module	AW-XM553	2C:3B:70:E7:BB:D8	AzureWave	EUT
C	Evaluation board	AW-XM553-EVB	2-01-221122	AzureWave	-
D	Jig Board	AW-NM383	1256-13	AzureWave	-
E	Laptop Computer	FMVNA8HEC	R9312957	FUJITSU	-
F	AC Adapter	SED100P2-19.0	CP293664-01	Lenovo	-
G	HDD	-	-	Transcend	-


List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Antenna	0.1 *1) 0.8 *2)	Shielded	Shielded	-
2	Signal	0.15	Unshielded	Unshielded	-
3	USB	1.0	Shielded	Shielded	-
4	DC	0.9	Unshielded	Unshielded	-
5	AC	0.9	Unshielded	Unshielded	-
6	USB	1.8	Shielded	Shielded	-

*1) Used for Radiated Emission test above 1 GHz

*2) Used for Radiated Emission test below 1 GHz and Conducted Emission test

<Antenna Terminal conducted test>

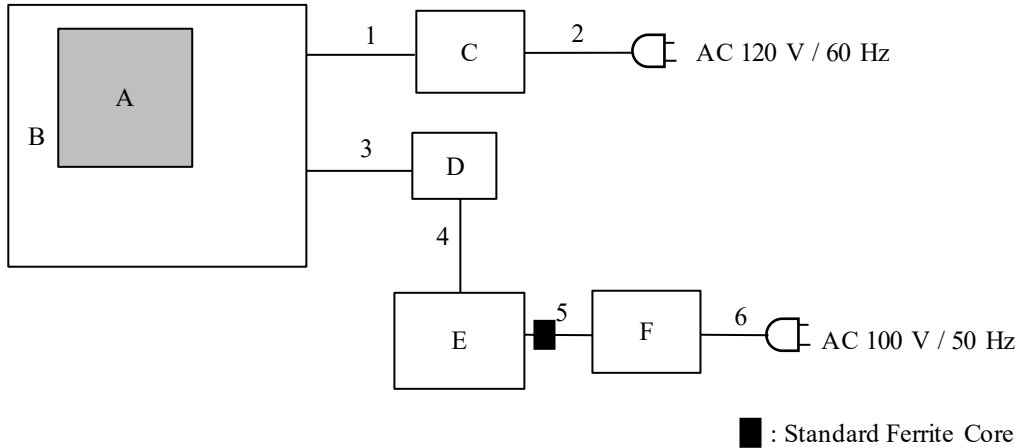

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	IEEE 802.11 1X1 a/b/g/n/ac/ax Wireless LAN + Bluetooth 5.2 + 802.15.4 Tri-radio 12 x 12 LGA Module	AW-XM553	14-D4-24-DE-11-29	AzureWave	EUT
B	AE-C EVT	AE-C EVT	015	SONY	-
C	AC Adapter	AC-M1215WW	M2220096354	SONY	-
D	Jig Board	EBISU JIG	0001	SONY	-
E	Laptop Computer	7666-77J	LV-B8PVT 08/05	Lenovo	-
F	AC Adapter	42T4422	11S42T4422Z1ZF3D9BV4XN	Lenovo	-

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC	1.0	Unshielded	Unshielded	-
2	AC	0.6	Unshielded	Unshielded	-
3	Signal	0.15	Unshielded	Unshielded	-
4	USB	1.2	Shielded	Shielded	-
5	DC	1.8	Unshielded	Unshielded	-
6	AC	0.9	Unshielded	Unshielded	-

SECTION 5: Conducted Emission

Test Procedure and Conditions

EUT was placed on a urethane platform of nominal size, 1.0 m by 2.0 m, raised 0.8 m above the conducting ground plane.

The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals, was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN).

1) For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to 40 cm height to the ground plane.

The AC Mains Terminal Continuous Disturbance Voltage has been measured with the EUT via AC Adapter in a Shielded room.


The EUT via AC Adapter was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Detector	: QP and CISPR AV
Measurement Range	: 0.15 MHz to 30 MHz
Test Data	: APPENDIX
Test Result	: Pass

Figure 1: Test Setup

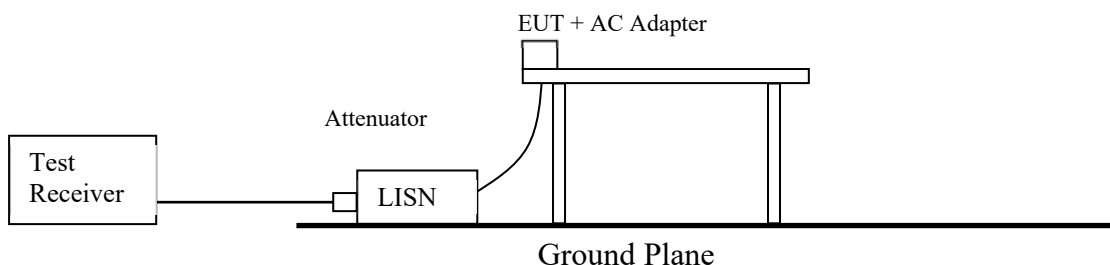

SECTION 6: Radiated Spurious Emission

Test Procedure

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.0 m by 2.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.


20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument Used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	<u>11.12.2.5.2</u> RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (Linear voltage) Trace: 100 traces Duty factor was added to the results.	RBW: 100 kHz VBW: 300 kHz

*1) Average Power Measurement was performed based on ANSI C63.10-2013.

Figure 2: Test Setup


Below 1 GHz

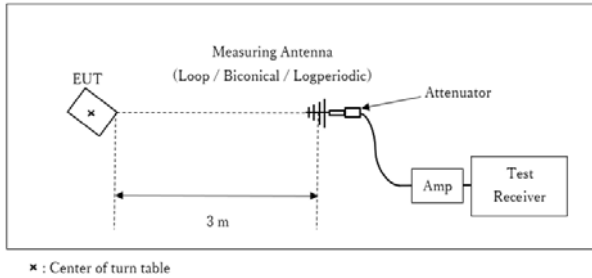

Test Distance: 3 m

* : Center of turn table

1 GHz to 10 GHz

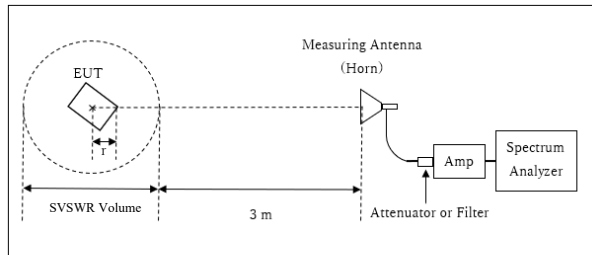


Distance Factor: $20 \times \log(3.89 \text{ m} / 3.0 \text{ m}) = 2.26 \text{ dB}$
* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.89 \text{ m}$

SVSWR Volume : 2.0 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.11 \text{ m}$

r : Radius of an outer periphery of EUT
* : Center of turn table

10 GHz to 26.5 GHz

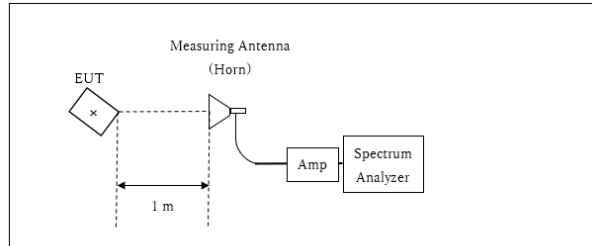

Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$
*Test Distance: 1 m

* : Center of turn table

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT and antenna to see the position of maximum noise, and the test was made at the position that has the maximum noise.
- The one of antenna was used for this test to be worst data in the pre-check.
- The one of antenna cable were used for this test to be worst data in the pre-check.

		Conducted emission	Below 30 MHz	1-2.8 GHz	2.8-10 GHz	10-18 GHz	18-26.5 GHz
EUT (module)	Horizontal	-	X	X	X	X	X
	Vertical		X	X	X	X	X
Antenna	Horizontal	-	X	X	X	X	X
	Vertical		X	Z	X	X	X
Used antenna	Horizontal	Type D	Type D	Type D	Type D	Type D	Type D
	Vertical		Type D	Type D	Type D	Type D	Type D
Antenna cable	Horizontal	800 mm	800 mm	100 mm	100 mm	100 mm	100 mm
	Vertical		800 mm	100 mm	100 mm	100 mm	100 mm

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement Range : 30 MHz to 26.5 GHz
Test Data : APPENDIX
Test Result : Pass

SECTION 7: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
6 dB Bandwidth	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/ Average *2)	-	Power Meter (Sensor: 160 MHz BW)
Peak Power Density	1.5 times the 6 dB Bandwidth	3 kHz	9.1 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4) *5)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".

*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.

*5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

Test Data : **APPENDIX**

Test Result : **Pass**

APPENDIX 1: Test Data

Conducted Emission

DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Shonan EMC Lab. No.3 Shielded Room
Date : 2023/01/11

Mode : Tx BLE 2M 2402 MHz
Power : AC 120 V / 60 Hz
Temp./Humi. : 22 deg.C / 34 %RH

Remarks : ANT(Type D), RF cable: 800 mm

Limit : FCC_Part 15 Subpart C(15.207)

Engineer : Takahiro Suzuki

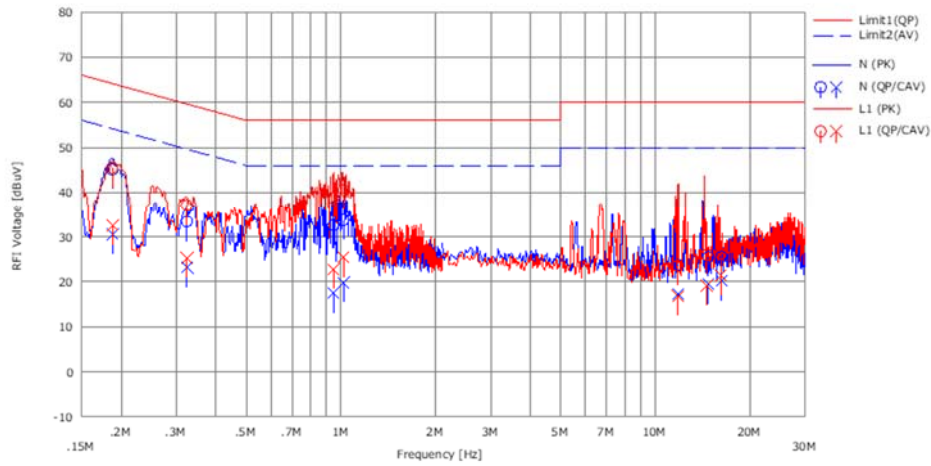

No.	Freq. [MHz]	Reading		C.Fac. [dB]	Results		Limit		Margin		Phase	Comment
		(QP) [dBuV]	(CAV) [dBuV]		(QP) [dBuV]	(CAV) [dBuV]	(QP) [dBuV]	(AV) [dBuV]	(QP) [dB]	(AV) [dB]		
1	0.18733	32.64	18.11	12.43	45.07	30.54	64.15	54.15	19.0	23.6	LI	
2	0.32358	20.95	10.68	12.44	33.39	23.12	59.61	49.61	26.2	26.4	LI	
3	0.94678	20.00	4.98	12.50	32.50	17.48	56.00	46.00	23.5	28.5	LI	
4	1.01880	21.23	7.27	12.49	33.72	19.76	56.00	46.00	22.2	26.2	LI	
5	11.83189	10.69	4.26	13.01	23.70	17.27	60.00	50.00	36.3	32.7	LI	
6	14.75800	12.35	6.28	13.13	25.48	19.41	60.00	50.00	34.5	30.5	LI	
7	16.26500	12.29	7.02	13.19	25.48	20.21	60.00	50.00	34.5	29.7	LI	
8	0.18733	33.04	20.08	12.44	45.48	32.52	64.15	54.15	18.6	21.6	LI	
9	0.32358	24.64	12.87	12.44	37.08	25.31	59.61	49.61	22.5	24.3	LI	
10	0.94678	26.25	10.24	12.50	38.75	22.74	56.00	46.00	17.2	23.2	LI	
11	1.01880	27.99	12.92	12.50	40.49	25.42	56.00	46.00	15.5	20.5	LI	
12	11.83189	10.63	3.86	12.93	23.56	16.79	60.00	50.00	36.4	33.2	LI	
13	14.56000	13.00	6.07	13.00	26.00	19.07	60.00	50.00	34.0	30.9	LI	
14	16.16900	13.18	8.34	13.05	26.23	21.39	60.00	50.00	33.7	28.6	LI	

Calculation: Result[dBuV]=Reading[dBuV]+C.Fac(LISN(AMN)+Cable+ATT)[dB]
LISN(AMN):SLS-05

99 % Occupied Bandwidth and 6 dB Bandwidth

Test place Shonan EMC Lab. No.5 Shielded Room
Date November 17, 2022
Temperature / Humidity 25 deg. C / 39 % RH
Engineer Miku Ikudome
Mode Tx BT LE

BT LE 1 M-PHY


Frequency [MHz]	99 % Occupied Bandwidth [kHz]	6 dB Bandwidth [MHz]	Limit for 6 dB Bandwidth [MHz]
2402	1041.9	0.734	> 0.5000
2440	1040.9	0.735	> 0.5000
2480	1041.5	0.738	> 0.5000

BT LE 2 M-PHY

Frequency [MHz]	99 % Occupied Bandwidth [kHz]	6 dB Bandwidth [MHz]	Limit for 6 dB Bandwidth [MHz]
2402	2071.6	1.203	> 0.5000
2440	1565.6	1.238	> 0.5000
2480	2074.1	1.191	> 0.5000


99 % Occupied Bandwidth and 6 dB Bandwidth

BT LE 1 M-PHY

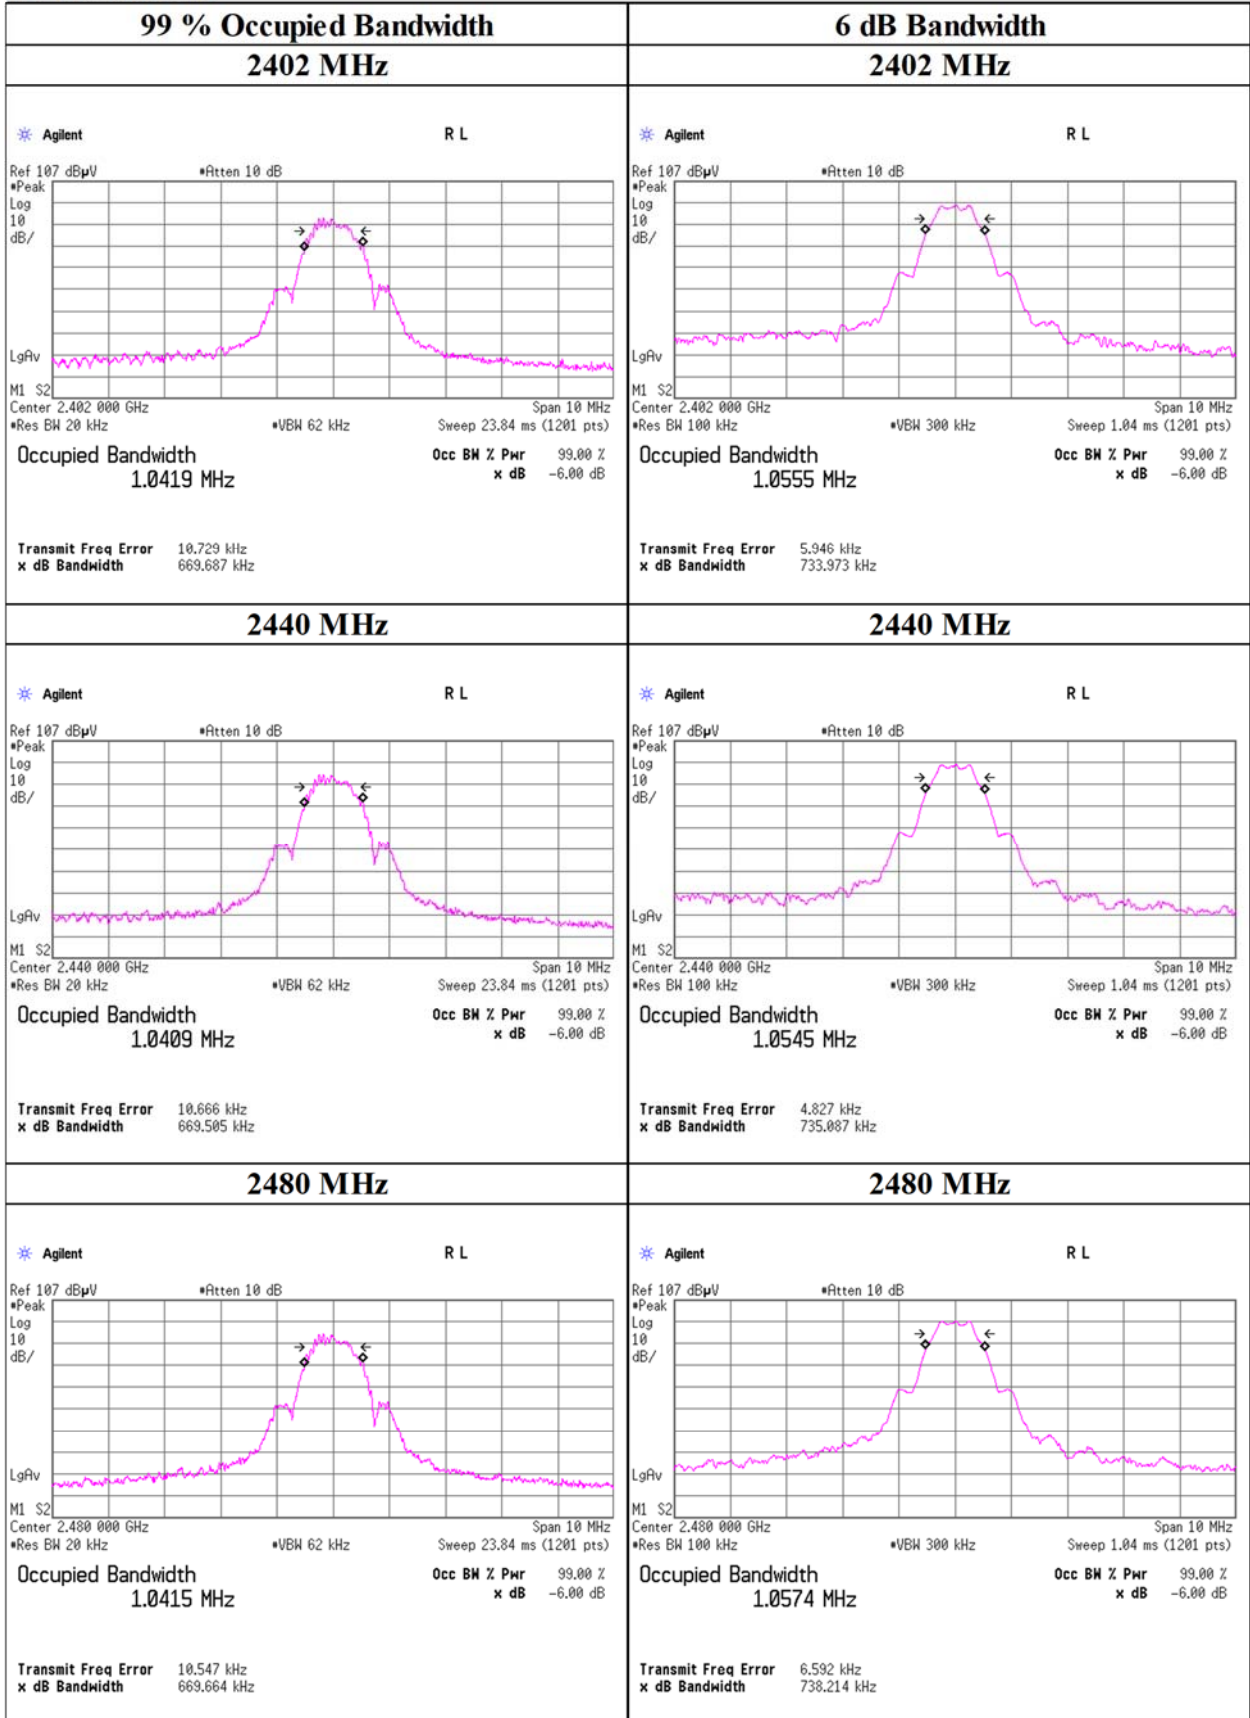

99 % Occupied Bandwidth and 6 dB Bandwidth

BT LE 2 M-PHY

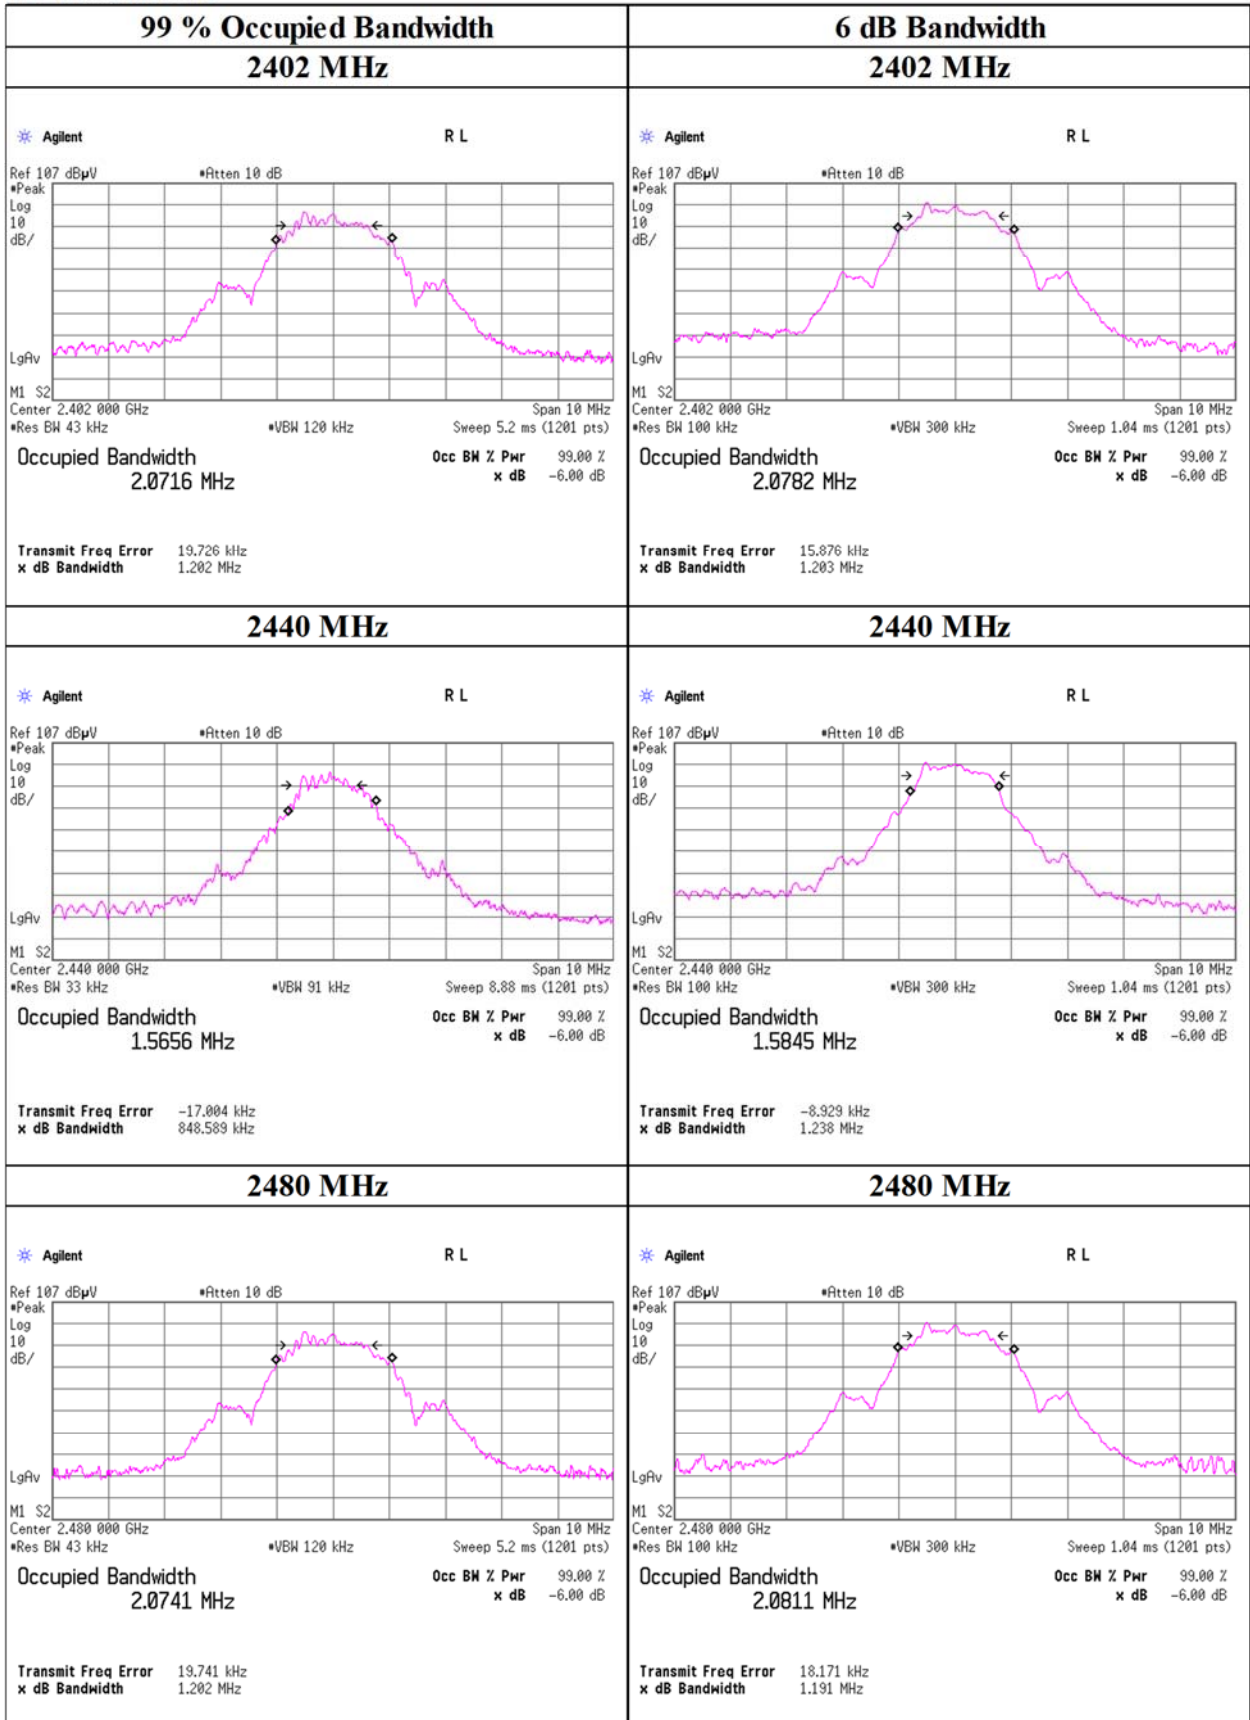

Maximum Peak Output Power & Average Power (reference data for RF Exposure)

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	November 16, 2022
Temperature / Humidity	24 deg. C / 34 % RH
Engineer	Miku Ikudome
Mode	Tx BT LE

BT LE 1 M-PHY

Maximum peak output power

Freq.	Reading	Cable Loss	Atten. Loss	Conducted Power					e.i.r.p. for RSS-247					
				Result		Limit		Margin	Antenna Gain	Result		Limit		Margin
				[dBm]	[mW]	[dBm]	[mW]			[dB]	[dBi]	[dBm]	[mW]	
2402	-7.32	0.99	9.82	3.49	2.23	30.00	1000	26.51	0.38	3.87	2.44	36.02	4000	32.15
2440	-7.45	1.01	9.82	3.38	2.18	30.00	1000	26.62	0.38	3.76	2.38	36.02	4000	32.26
2480	-7.71	1.01	9.82	3.12	2.05	30.00	1000	26.88	0.38	3.50	2.24	36.02	4000	32.52

BT LE 2 M-PHY

Maximum peak output power

Freq.	Reading	Cable Loss	Atten. Loss	Conducted Power					e.i.r.p. for RSS-247					
				Result		Limit		Margin	Antenna Gain	Result		Limit		Margin
				[dBm]	[mW]	[dBm]	[mW]			[dB]	[dBi]	[dBm]	[mW]	
2402	-7.29	0.99	9.82	3.52	2.25	30.00	1000	26.48	0.38	3.90	2.45	36.02	4000	32.12
2440	-7.37	1.01	9.82	3.46	2.22	30.00	1000	26.54	0.38	3.84	2.42	36.02	4000	32.18
2480	-7.66	1.01	9.82	3.17	2.07	30.00	1000	26.83	0.38	3.55	2.26	36.02	4000	32.47

Sample Calculation:

Result = Reading + Cable Loss + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

*The equipment and cables were not used for factor 0 dB of the data sheets.

All comparison were carried out on same frequency and measurement factors.

BT LE 1 M-PHY

Average output power (reference data for RF exposure)

Antenna:

Freq.	Reading	Cable Loss	Atten. Loss	Result (Time average)		Duty factor	Result (Burst power average)	
				[dBm]	[mW]		[dB]	[mW]
2402	-10.17	0.99	9.82	0.64	1.16	1.99	2.63	1.83
2440	-10.28	1.01	9.82	0.55	1.14	1.99	2.54	1.80
2480	-10.58	1.01	9.82	0.25	1.06	1.99	2.24	1.68

BT LE 2 M-PHY

Average output power (reference data for RF exposure)

Antenna:

Freq.	Reading	Cable Loss	Atten. Loss	Result (Time average)		Duty factor	Result (Burst power average)	
				[dBm]	[mW]		[dB]	[mW]
2402	-12.94	0.99	9.82	-2.13	0.61	4.72	2.59	1.81
2440	-13.06	1.01	9.82	-2.23	0.60	4.72	2.49	1.77
2480	-13.36	1.01	9.82	-2.53	0.56	4.72	2.19	1.65

Sample Calculation:

Result (Time average) = Reading + Cable Loss + Attenuator Loss

Result (Burst power average) = Result (Time average) + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.

Burst rate confirmation


Test place Shonan EMC Lab. No.5 Shielded Room
Date November 11, 2022
Temperature / Humidity 26 deg. C / 30 % RH
Engineer Kenichi Adachi
Mode Tx BT LE

BT LE 1 M-PHY (for Average power) *1)

BT LE 2 M-PHY (for Average power) *3)

BT LE 1 M-PHY (for Radiated emission) *2)

BT LE 2 M-PHY (for Radiated emission) *4)

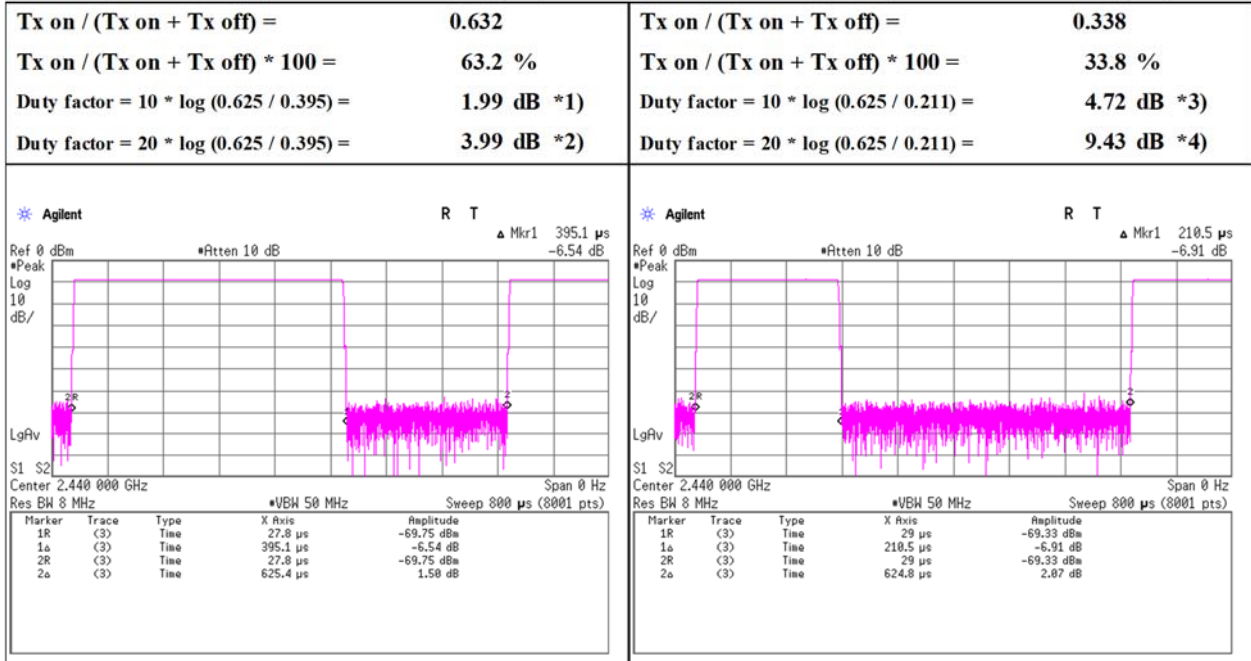

* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.1	No.3	No.3
Date	December 23, 2022	January 10, 2023	January 9, 2023
Temperature / Humidity	23 deg.C, 35 %RH	20 deg.C, 28 %RH	20 deg.C, 27 %RH
Engineer	Yohsuke Matsuzawa	Miku Ikudome	Takahiro Kawakami
	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx BT LE 1 M-PHY 2402 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	45.21	27.85	14.86	39.62	2.26	50.56	73.9	23.3	195	279	-
Hori.	4804.000	PK	51.00	31.54	6.95	42.87	2.26	48.88	73.9	25.0	100	249	-
Hori.	7206.000	PK	48.17	37.37	8.41	43.39	2.26	52.82	73.9	21.0	150	0	-
Hori.	9608.000	PK	48.28	38.89	9.68	43.21	2.26	55.90	73.9	18.0	150	0	-
Hori.	7206.000	AV	38.78	37.37	8.41	43.39	2.26	43.43	53.9	10.4	150	0	Floor noise
Hori.	9608.000	AV	36.65	38.89	9.68	43.21	2.26	44.27	53.9	9.6	150	0	Floor noise
Vert.	2390.000	PK	45.52	27.85	14.86	39.62	2.26	50.87	73.9	23.0	150	286	-
Vert.	4804.000	PK	47.75	31.54	6.95	42.87	2.26	45.63	73.9	28.2	150	0	-
Vert.	7206.000	PK	48.53	37.37	8.41	43.39	2.26	53.18	73.9	20.7	150	0	-
Vert.	9608.000	PK	48.26	38.89	9.68	43.21	2.26	55.88	73.9	18.0	150	0	-
Vert.	4804.000	AV	38.98	31.54	6.95	42.87	2.26	36.86	53.9	17.0	150	0	Floor noise
Vert.	7206.000	AV	38.89	37.37	8.41	43.39	2.26	43.54	53.9	10.3	150	0	Floor noise
Vert.	9608.000	AV	38.49	38.89	9.68	43.21	2.26	46.11	53.9	7.7	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	AV	36.16	27.85	14.86	39.62	3.99	2.26	45.50	53.9	8.4	*1)
Hori.	4804.000	AV	42.48	31.54	6.95	42.87	3.99	2.26	44.35	53.9	9.5	-
Vert.	2390.000	AV	36.51	27.85	14.86	39.62	3.99	2.26	45.85	53.9	8.0	*1)

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	92.90	27.83	14.88	39.62	2.26	98.25	-	-	Carrier
Hori.	2392.772	PK	43.22	27.84	14.87	39.62	2.26	48.57	78.2	29.6	-
Hori.	2400.000	PK	39.20	27.83	14.88	39.62	2.26	44.55	78.2	33.6	-
Vert.	2402.000	PK	92.61	27.83	14.88	39.62	2.26	97.96	-	-	Carrier
Vert.	2392.745	PK	41.38	27.84	14.87	39.62	2.26	46.73	77.9	31.1	-
Vert.	2400.000	PK	39.33	27.83	14.88	39.62	2.26	44.68	77.9	33.2	-



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.1
Date	December 23, 2022
Temperature / Humidity	23 deg.C, 35 %RH
Engineer	Yohsuke Matsuzawa (1 GHz -2.8 GHz)
Mode	Tx BT LE 1 M-PHY 2402 MHz

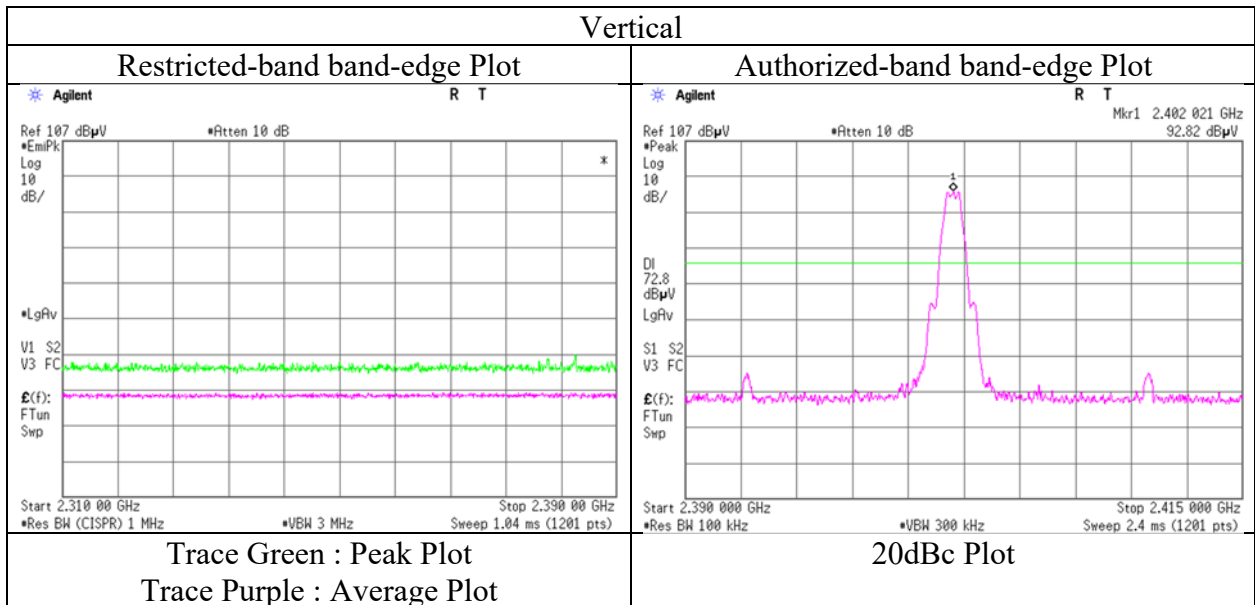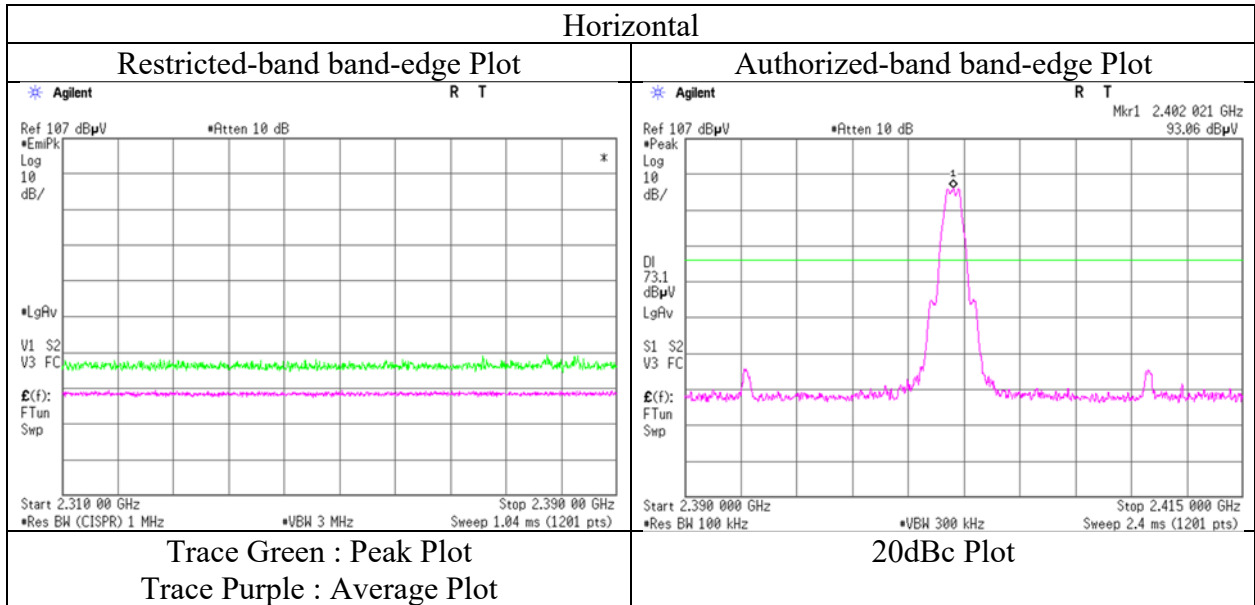

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.1	No.3	No.3
Date	December 23, 2022	January 10, 2023	January 9, 2023
Temperature / Humidity	23 deg.C, 35 %RH	20 deg.C, 28 %RH	20 deg.C, 27 %RH
Engineer	Yohsuke Matsuzawa	Miku Ikudome	Takahiro Kawakami
	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx BT LE 1 M-PHY 2440 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4880.000	PK	51.25	31.64	6.99	42.83	2.26	49.31	73.9	24.5	117	238	-
Hori.	7320.000	PK	48.37	37.46	8.45	43.52	2.26	53.02	73.9	20.8	150	0	-
Hori.	9760.000	PK	48.18	39.17	9.75	43.02	2.26	56.34	73.9	17.5	150	0	-
Hori.	7320.000	AV	39.08	37.46	8.45	43.52	2.26	43.73	53.9	10.1	150	0	Floor noise
Hori.	9760.000	AV	38.62	39.17	9.75	43.02	2.26	46.78	53.9	7.1	150	0	Floor noise
Vert.	4880.000	PK	48.49	31.64	6.99	42.83	2.26	46.55	73.9	27.3	150	0	-
Vert.	7320.000	PK	48.45	37.46	8.45	43.52	2.26	53.10	73.9	20.8	150	0	-
Vert.	9760.000	PK	47.67	39.17	9.75	43.02	2.26	55.83	73.9	18.0	150	0	-
Vert.	4880.000	AV	38.87	31.64	6.99	42.83	2.26	36.93	53.9	16.9	150	0	Floor noise
Vert.	7320.000	AV	39.01	37.46	8.45	43.52	2.26	43.66	53.9	10.2	150	0	Floor noise
Vert.	9760.000	AV	38.46	39.17	9.75	43.02	2.26	46.62	53.9	7.2	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	4880.000	AV	42.26	31.64	6.99	42.83	3.99	2.26	44.31	53.9	9.5	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Burst rate confirmation" sheet.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.1	No.3	No.3
Date	December 23, 2022	January 10, 2023	January 9, 2023
Temperature / Humidity	23 deg.C, 35 %RH	20 deg.C, 28 %RH	20 deg.C, 27 %RH
Engineer	Yusuke Tanikawara	Miku Ikudome	Takahiro Kawakami
Mode	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
	Tx BT LE 1 M-PHY 2480 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	49.10	27.72	14.98	39.65	2.26	54.41	73.9	19.4	155	277	-
Hori.	2488.736	PK	51.16	27.72	14.98	39.66	2.26	56.46	73.9	17.4	155	277	-
Hori.	2498.007	PK	48.73	27.71	14.99	39.66	2.26	54.03	73.9	19.8	155	277	-
Hori.	4960.000	PK	51.06	31.81	7.05	42.80	2.26	49.38	73.9	24.5	119	274	-
Hori.	7440.000	PK	48.75	37.61	8.51	43.65	2.26	53.48	73.9	20.4	150	0	-
Hori.	9920.000	PK	48.51	39.03	9.83	42.82	2.26	56.81	73.9	17.0	150	0	-
Hori.	7440.000	AV	38.68	37.61	8.51	43.65	2.26	43.41	53.9	10.4	150	0	Floor noise
Hori.	9920.000	AV	37.77	39.03	9.83	42.82	2.26	46.07	53.9	7.8	150	0	Floor noise
Vert.	2483.500	PK	49.65	27.72	14.98	39.65	2.26	54.96	73.9	18.9	149	270	-
Vert.	2488.779	PK	51.37	27.72	14.98	39.66	2.26	56.67	73.9	17.2	149	270	-
Vert.	2498.004	PK	48.62	27.71	14.99	39.66	2.26	53.92	73.9	19.9	149	270	-
Vert.	4960.000	PK	48.14	31.81	7.05	42.80	2.26	46.46	73.9	27.4	150	0	-
Vert.	7440.000	PK	48.50	37.61	8.51	43.65	2.26	53.23	73.9	20.6	150	0	-
Vert.	9920.000	PK	48.08	39.03	9.83	42.82	2.26	56.38	73.9	17.5	150	0	-
Vert.	4960.000	AV	39.03	31.81	7.05	42.80	2.26	37.35	53.9	16.5	150	0	Floor noise
Vert.	7440.000	AV	39.28	37.61	8.51	43.65	2.26	44.01	53.9	9.8	150	0	Floor noise
Vert.	9920.000	AV	38.52	39.03	9.83	42.82	2.26	46.82	53.9	7.0	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	36.22	27.72	14.98	39.65	3.99	2.26	45.52	53.9	8.3	*1)
Hori.	2488.736	AV	36.11	27.72	14.98	39.66	3.99	2.26	45.40	53.9	8.4	-
Hori.	2498.007	AV	36.06	27.71	14.99	39.66	3.99	2.26	45.35	53.9	8.5	-
Hori.	4960.000	AV	41.44	31.81	7.05	42.80	3.99	2.26	43.75	53.9	10.1	-
Vert.	2483.500	AV	36.39	27.72	14.98	39.65	3.99	2.26	45.69	53.9	8.2	*1)
Vert.	2488.779	AV	36.26	27.72	14.98	39.66	3.99	2.26	45.55	53.9	8.3	-
Vert.	2498.004	AV	35.98	27.71	14.99	39.66	3.99	2.26	45.27	53.9	8.6	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB



10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.1
Date	December 23, 2022
Temperature / Humidity	23 deg.C, 35 %RH
Engineer	Yusuke Tanikawara (1 GHz -2.8 GHz)
Mode	Tx BT LE 1 M-PHY 2480 MHz

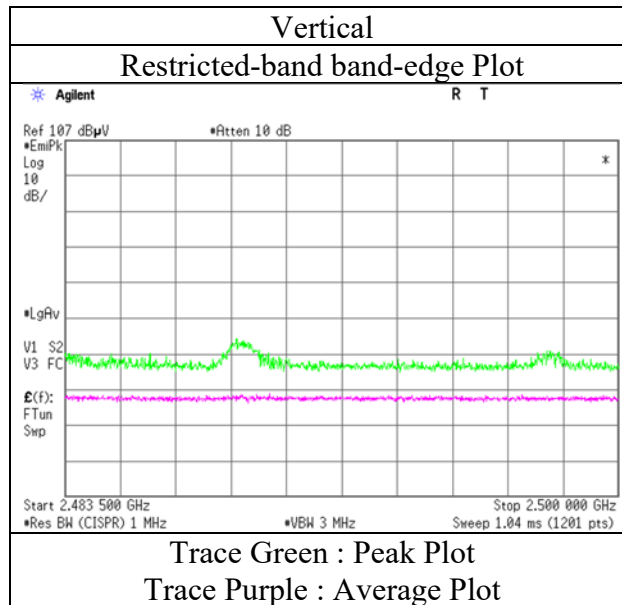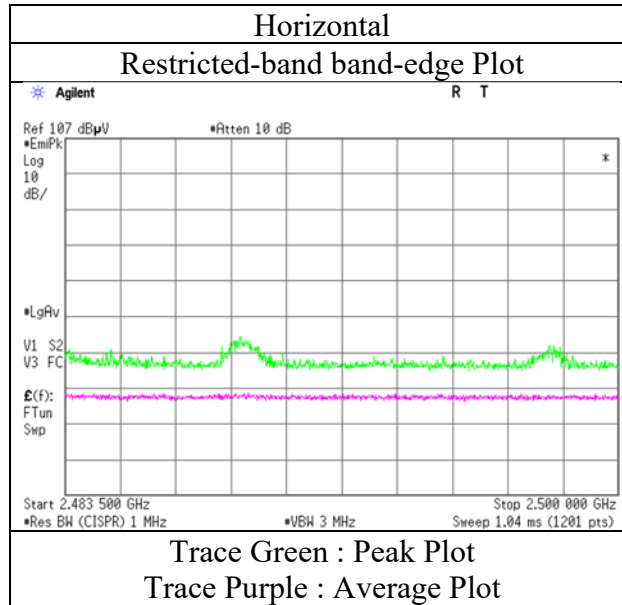

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.			
Semi Anechoic Chamber	No.3	No.1	No.3	No.3
Date	January 11, 2023	December 23, 2022	January 10, 2023	January 9, 2023
Temperature / Humidity	23 deg.C, 27 %RH	23 deg.C, 35 %RH	20 deg.C, 28 %RH	20 deg.C, 27 %RH
Engineer	Miku Ikudome	Yusuke Tanikawara	Miku Ikudome	Takahiro Kawakami
Mode	(30 MHz -1 GHz)	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
	Tx BT LE 2 M-PHY 2402 MHz			

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	99.759	QP	53.25	10.19	7.38	32.12	0.00	38.70	43.5	4.8	310	336	-
Hori.	166.377	QP	40.35	15.43	7.88	32.05	0.00	31.61	43.5	11.8	191	35	-
Hori.	199.981	QP	39.90	16.52	7.87	32.02	0.00	32.27	43.5	11.2	172	275	-
Hori.	499.448	QP	46.75	17.79	9.51	31.91	0.00	42.14	46.0	3.8	100	192	-
Hori.	632.689	QP	43.59	19.54	10.03	31.89	0.00	41.27	46.0	4.7	135	15	-
Hori.	796.692	QP	41.10	20.75	10.61	31.59	0.00	40.87	46.0	5.1	125	234	-
Hori.	2390.000	PK	45.56	27.85	14.86	39.62	2.26	50.91	73.9	22.9	145	247	-
Hori.	4804.000	PK	50.86	31.54	6.95	42.87	2.26	48.74	73.9	25.1	120	256	-
Hori.	7206.000	PK	48.31	37.37	8.41	43.39	2.26	52.96	73.9	20.9	150	0	-
Hori.	9608.000	PK	48.21	38.89	9.68	43.21	2.26	55.83	73.9	18.0	150	0	-
Hori.	7206.000	AV	38.41	37.37	8.41	43.39	2.26	43.06	53.9	10.8	150	0	Floor noise
Hori.	9608.000	AV	38.58	38.89	9.68	43.21	2.26	46.20	53.9	7.7	150	0	Floor noise
Vert.	52.271	QP	46.43	10.47	6.77	32.15	0.00	31.52	40.0	8.4	100	280	-
Vert.	115.763	QP	48.23	12.65	7.24	32.10	0.00	36.02	43.5	7.4	100	210	-
Vert.	499.447	QP	44.04	17.79	9.51	31.91	0.00	39.43	46.0	6.5	175	258	-
Vert.	796.949	QP	38.54	20.75	10.61	31.59	0.00	38.31	46.0	7.6	132	344	-
Vert.	2390.000	PK	45.48	27.85	14.86	39.62	2.26	50.83	73.9	23.0	175	283	-
Vert.	4804.000	PK	48.06	31.54	6.95	42.87	2.26	45.94	73.9	27.9	150	0	-
Vert.	7206.000	PK	47.61	37.37	8.41	43.39	2.26	52.26	73.9	21.6	150	0	-
Vert.	9608.000	PK	47.97	38.89	9.68	43.21	2.26	55.59	73.9	18.3	150	0	-
Vert.	4804.000	AV	38.83	31.54	6.95	42.87	2.26	36.71	53.9	17.1	150	0	Floor noise
Vert.	7206.000	AV	38.77	37.37	8.41	43.39	2.26	43.42	53.9	10.4	150	0	Floor noise
Vert.	9608.000	AV	38.52	38.89	9.68	43.21	2.26	46.14	53.9	7.7	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	AV	36.09	27.85	14.86	39.62	9.43	2.26	50.87	53.9	3.0	*1)
Hori.	4804.000	AV	39.88	31.54	6.95	42.87	9.43	2.26	47.19	53.9	6.7	-
Vert.	2390.000	AV	35.97	27.85	14.86	39.62	9.43	2.26	50.75	53.9	3.1	*1)

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	93.20	27.83	14.88	39.62	2.26	98.55	-	-	Carrier
Hori.	2392.518	PK	43.45	27.84	14.87	39.62	2.26	48.80	78.5	29.7	-
Hori.	2400.000	PK	61.23	27.83	14.88	39.62	2.26	66.58	78.5	11.9	-
Vert.	2402.000	PK	93.08	27.83	14.88	39.62	2.26	98.43	-	-	Carrier
Vert.	2392.523	PK	43.34	27.84	14.87	39.62	2.26	48.69	78.4	29.7	-
Vert.	2400.000	PK	61.22	27.83	14.88	39.62	2.26	66.57	78.4	11.8	-



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

**Radiated Spurious Emission
(Reference Plot for band-edge)**

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.1
Date	December 23, 2022
Temperature / Humidity	23 deg.C, 35 %RH
Engineer	Yusuke Tanikawara (1 GHz -2.8 GHz)
Mode	Tx BT LE 2 M-PHY 2402 MHz

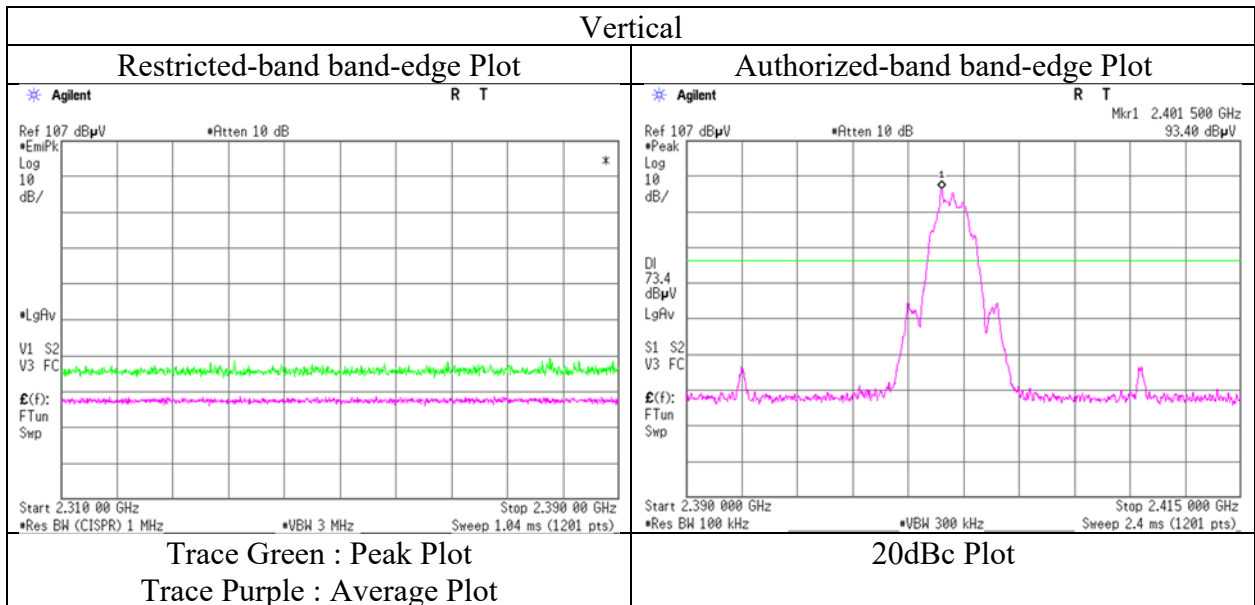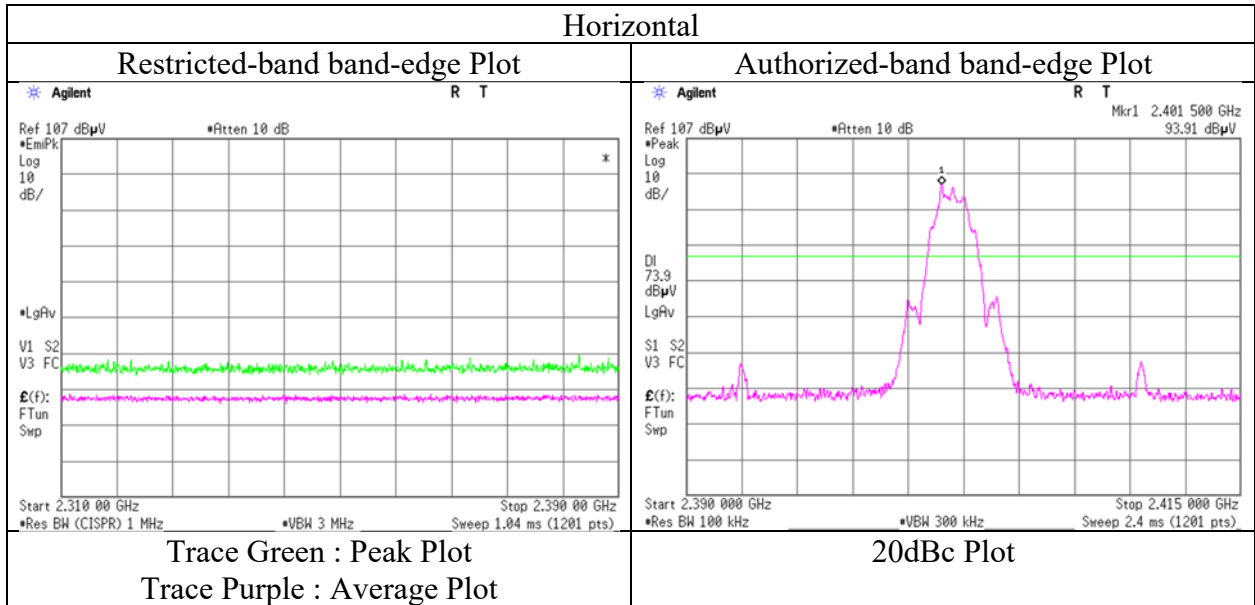

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.1	No.3	No.3
Date	December 23, 2022	January 10, 2023	January 9, 2023
Temperature / Humidity	23 deg.C, 35 %RH	20 deg.C, 28 %RH	20 deg.C, 27 %RH
Engineer	Yusuke Tanikawara	Miku Ikudome	Takahiro Kawakami
	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx BT LE 2 M-PHY 2440 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4880.000	PK	51.14	31.64	6.99	42.83	2.26	49.20	73.9	24.7	114	320	-
Hori.	7320.000	PK	49.04	37.46	8.45	43.52	2.26	53.69	73.9	20.2	150	0	-
Hori.	9760.000	PK	48.23	39.17	9.75	43.02	2.26	56.39	73.9	17.5	150	0	-
Hori.	7320.000	AV	38.44	37.46	8.45	43.52	2.26	43.09	53.9	10.8	150	0	Floor noise
Hori.	9760.000	AV	37.63	39.17	9.75	43.02	2.26	45.79	53.9	8.1	150	0	Floor noise
Vert.	4880.000	PK	48.09	31.64	6.99	42.83	2.26	46.15	73.9	27.7	150	0	-
Vert.	7320.000	PK	48.50	37.46	8.45	43.52	2.26	53.15	73.9	20.7	150	0	-
Vert.	9760.000	PK	47.51	39.17	9.75	43.02	2.26	55.67	73.9	18.2	150	0	-
Vert.	4880.000	AV	38.67	31.64	6.99	42.83	2.26	36.73	53.9	17.1	150	0	Floor noise
Vert.	7320.000	AV	39.07	37.46	8.45	43.52	2.26	43.72	53.9	10.1	150	0	Floor noise
Vert.	9760.000	AV	38.75	39.17	9.75	43.02	2.26	46.91	53.9	6.9	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	4880.000	AV	39.51	31.64	6.99	42.83	9.43	2.26	47.00	53.9	6.9	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Burst rate confirmation" sheet.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.1	No.3	No.3
Date	December 23, 2022	January 10, 2023	January 9, 2023
Temperature / Humidity	23 deg.C, 35 %RH	20 deg.C, 28 %RH	20 deg.C, 27 %RH
Engineer	Yusuke Tanikawara	Miku Ikudome	Takahiro Kawakami
Mode	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
	Tx BT LE 2 M-PHY 2480 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	49.28	27.72	14.98	39.65	2.26	54.59	73.9	19.3	330	270	-
Hori.	2488.528	PK	51.75	27.72	14.98	39.66	2.26	57.05	73.9	16.8	330	270	-
Hori.	2498.005	PK	49.77	27.71	14.99	39.66	2.26	55.07	73.9	18.8	330	270	-
Hori.	4960.000	PK	49.93	31.81	7.05	42.80	2.26	48.25	73.9	25.6	106	253	-
Hori.	7440.000	PK	48.67	37.61	8.51	43.65	2.26	53.40	73.9	20.5	150	0	-
Hori.	9920.000	PK	47.99	39.03	9.83	42.82	2.26	56.29	73.9	17.6	150	0	-
Hori.	7440.000	AV	39.37	37.61	8.51	43.65	2.26	44.10	53.9	9.8	150	0	Floor noise
Hori.	9920.000	AV	38.64	39.03	9.83	42.82	2.26	46.94	53.9	6.9	150	0	Floor noise
Vert.	2483.500	PK	48.59	27.72	14.98	39.65	2.26	53.90	73.9	20.0	176	285	-
Vert.	2488.534	PK	52.47	27.72	14.98	39.66	2.26	57.77	73.9	16.1	176	285	-
Vert.	2498.007	PK	49.32	27.71	14.99	39.66	2.26	54.62	73.9	19.2	176	285	-
Vert.	4960.000	PK	48.33	31.81	7.05	42.80	2.26	46.65	73.9	27.2	150	0	-
Vert.	7440.000	PK	48.71	37.61	8.51	43.65	2.26	53.44	73.9	20.4	150	0	-
Vert.	9920.000	PK	47.94	39.03	9.83	42.82	2.26	56.24	73.9	17.6	150	0	-
Vert.	4960.000	AV	38.97	31.81	7.05	42.80	2.26	37.29	53.9	16.6	150	0	Floor noise
Vert.	7440.000	AV	39.39	37.61	8.51	43.65	2.26	44.12	53.9	9.7	150	0	Floor noise
Vert.	9920.000	AV	38.78	39.03	9.83	42.82	2.26	47.08	53.9	6.8	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	36.54	27.72	14.98	39.65	9.43	2.26	51.28	53.9	2.6	*1)
Hori.	2488.528	AV	36.27	27.72	14.98	39.66	9.43	2.26	51.00	53.9	2.9	-
Hori.	2498.005	AV	35.92	27.71	14.99	39.66	9.43	2.26	50.65	53.9	3.2	-
Hori.	4960.000	AV	39.86	31.81	7.05	42.80	9.43	2.26	47.61	53.9	6.2	-
Vert.	2483.500	AV	36.39	27.72	14.98	39.65	9.43	2.26	51.13	53.9	2.7	*1)
Vert.	2488.534	AV	36.17	27.72	14.98	39.66	9.43	2.26	50.90	53.9	2.9	-
Vert.	2498.007	AV	35.97	27.71	14.99	39.66	9.43	2.26	50.70	53.9	3.2	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB



10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

Radiated Spurious Emission
(Reference Plot for band-edge)



Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.1
Date	December 23, 2022
Temperature / Humidity	23 deg.C, 35 %RH
Engineer	Yusuke Tanikawara (1 GHz -2.8 GHz)
Mode	Tx BT LE 2 M-PHY 2480 MHz

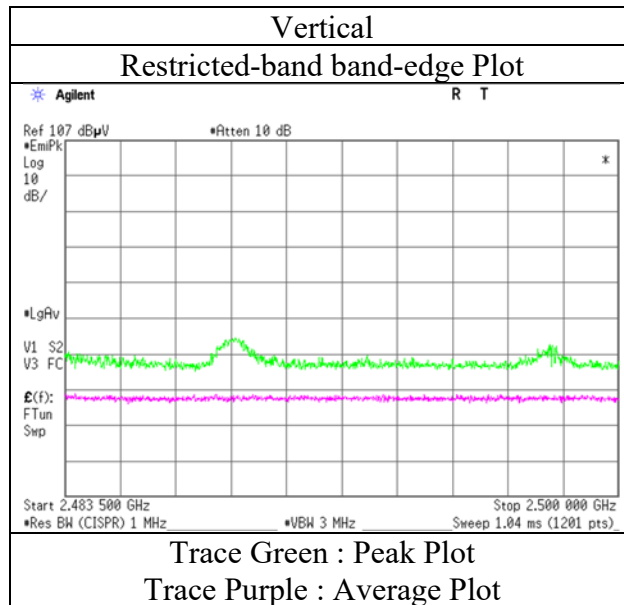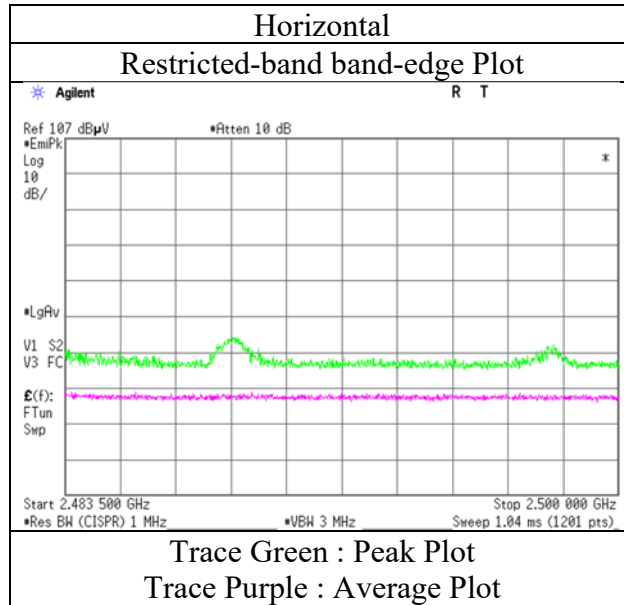

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 14, 2023
Temperature / Humidity	24 deg.C, 29 %RH
Engineer	Kenichi Adachi
	(1 GHz -10 GHz)
Mode	Tx BT LE 1 M-PHY 2402 MHz with Tx 11n-20 5580 MHz

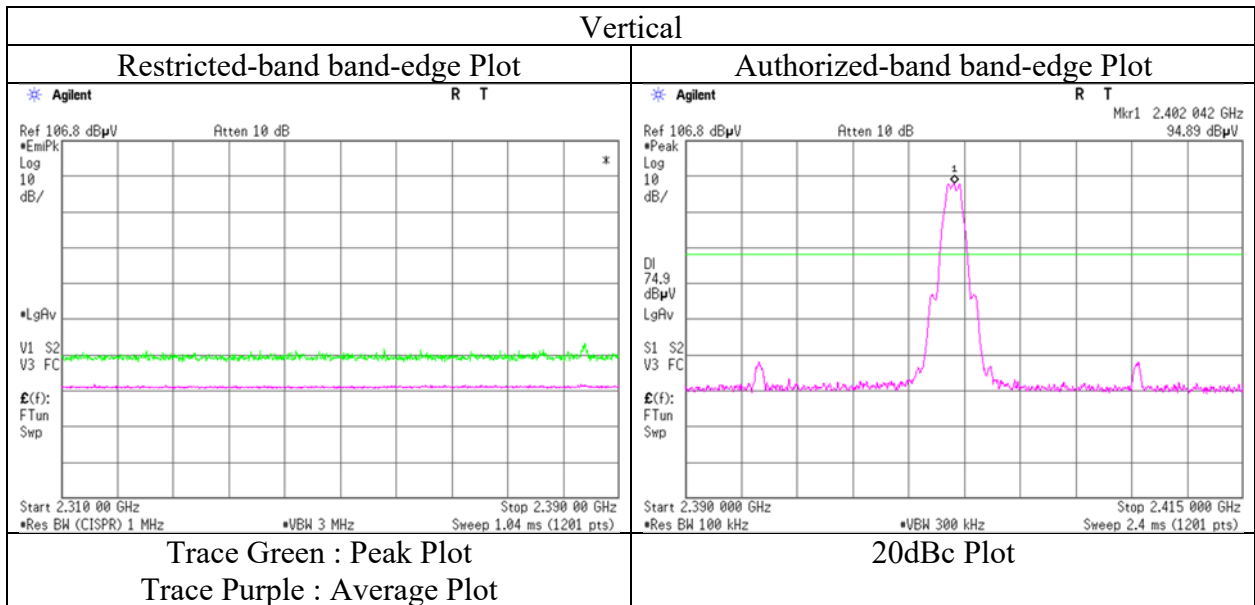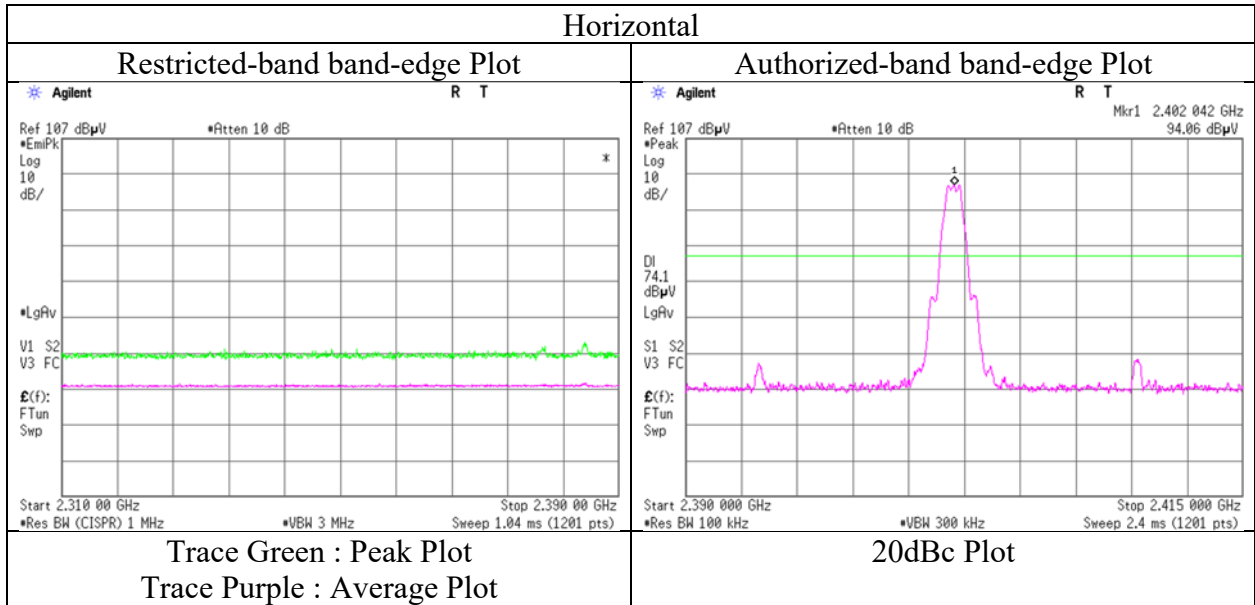

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber No.3
Date January 14, 2023
Temperature / Humidity 24 deg.C, 29 %RH
Engineer Kenichi Adachi
 (1 GHz -10 GHz)
Mode Tx BT LE 1 M-PHY 2480 MHz with Tx 11n-20 5580 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	48.34	28.08	14.61	41.68	2.26	51.61	73.9	22.2	201	269	-
Hori.	2488.278	PK	53.06	28.08	14.61	41.68	2.26	56.33	73.9	17.5	201	269	-
Hori.	2497.036	PK	50.74	28.08	14.62	41.69	2.26	54.01	73.9	19.8	201	269	-
Vert.	2483.500	PK	48.44	28.08	14.61	41.68	2.26	51.71	73.9	22.1	146	283	-
Vert.	2488.278	PK	54.29	28.08	14.61	41.68	2.26	57.56	73.9	16.3	146	283	-
Vert.	2497.036	PK	50.96	28.08	14.62	41.69	2.26	54.23	73.9	19.6	146	283	-



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 14, 2023
Temperature / Humidity	24 deg.C, 29 %RH
Engineer	Kenichi Adachi (1 GHz -10 GHz)
Mode	Tx BT LE 1 M-PHY 2480 MHz with Tx 11n-20 5580 MHz

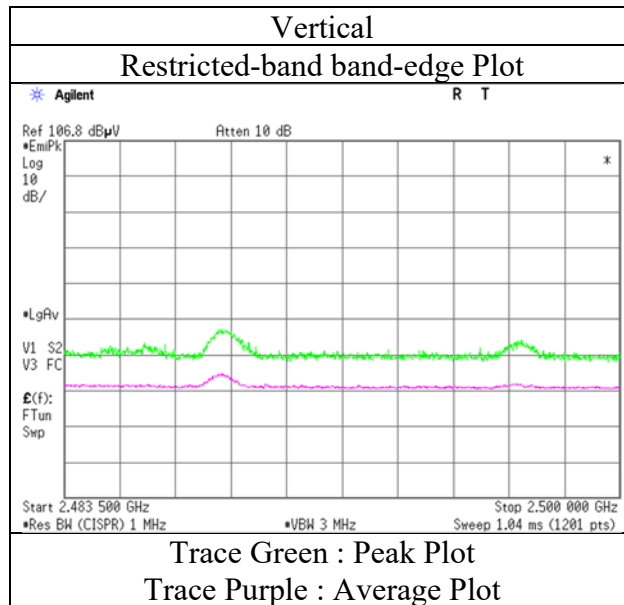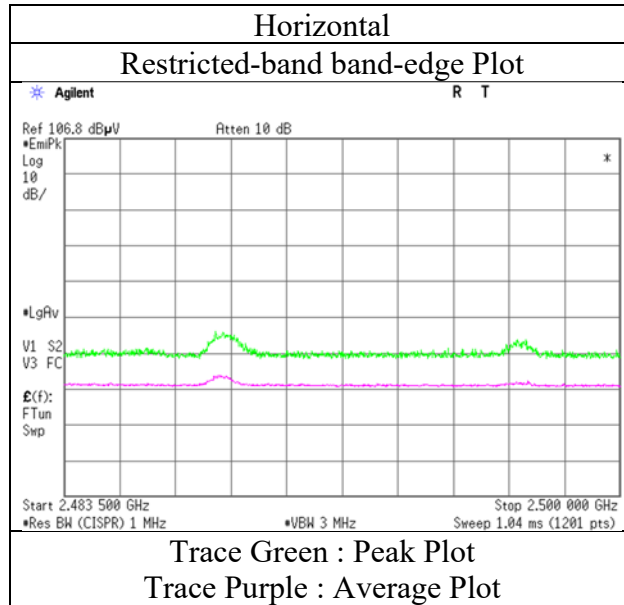

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	January 19, 2023	January 14, 2023	January 18, 2023
Temperature / Humidity	22 deg.C, 29 %RH	24 deg.C, 29 %RH	22 deg.C, 28 %RH
Engineer	Hiromasa Sato	Kenichi Adachi	Yusuke Tanikawara
	(30 MHz -1 GHz)	(1 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx BT LE 2 M-PHY 2402 MHz with Tx 11n-20 5580 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	54.940	QP	36.50	9.59	6.75	32.15	0.00	20.69	40.0	19.3	400	354	-
Hori.	96.012	QP	40.53	9.44	7.45	32.12	0.00	25.30	43.5	18.2	319	6	-
Hori.	381.408	QP	35.61	15.21	9.00	31.91	0.00	27.91	46.0	18.0	100	357	-
Hori.	2384.875	PK	49.05	28.20	14.49	41.63	2.26	52.37	73.9	21.5	207	268	-
Hori.	2390.000	PK	47.54	28.18	14.49	41.63	2.26	50.84	73.9	23.0	207	268	-
Hori.	4804.000	PK	48.96	31.54	6.95	42.87	2.26	46.84	73.9	27.0	147	231	-
Hori.	7206.000	PK	47.94	37.37	8.96	43.39	2.26	53.14	73.9	20.7	150	0	-
Hori.	9608.000	PK	46.51	38.89	10.08	43.21	2.26	54.53	73.9	19.3	150	0	-
Hori.	4804.000	AV	39.08	31.54	6.95	42.87	2.26	36.96	53.9	16.9	147	231	noise floor
Hori.	7206.000	AV	37.88	37.37	8.96	43.39	2.26	43.08	53.9	10.8	150	0	noise floor
Hori.	9608.000	AV	35.72	38.89	10.08	43.21	2.26	43.74	53.9	10.1	150	0	noise floor
Vert.	31.115	QP	33.26	18.29	6.48	32.17	0.00	25.86	40.0	14.1	100	304	-
Vert.	54.936	QP	41.33	9.59	6.75	32.15	0.00	25.52	40.0	14.4	100	268	-
Vert.	114.653	QP	47.10	12.51	7.23	32.11	0.00	34.73	43.5	8.7	100	230	-
Vert.	259.289	QP	33.61	12.16	8.37	31.97	0.00	22.17	46.0	23.8	122	329	-
Vert.	381.647	QP	33.26	15.21	9.00	31.91	0.00	25.56	46.0	20.4	138	5	-
Vert.	609.632	QP	38.55	19.47	9.94	31.90	0.00	36.06	46.0	9.9	100	358	-
Vert.	998.937	QP	25.74	22.45	11.29	30.09	0.00	29.39	53.9	24.5	147	7	-
Vert.	2384.875	PK	48.51	28.20	14.49	41.63	2.26	51.83	73.9	22.0	159	271	-
Vert.	2390.000	PK	47.48	28.18	14.49	41.63	2.26	50.78	73.9	23.1	159	271	-
Vert.	4804.000	PK	48.64	31.54	6.95	42.87	2.26	46.52	73.9	27.3	171	177	-
Vert.	7206.000	PK	47.06	37.37	8.96	43.39	2.26	52.26	73.9	21.6	150	0	-
Vert.	9608.000	PK	46.64	38.89	10.08	43.21	2.26	54.66	73.9	19.2	150	0	-
Vert.	4804.000	AV	39.05	31.54	6.95	42.87	2.26	36.93	53.9	16.9	171	177	noise floor
Vert.	7206.000	AV	37.94	37.37	8.96	43.39	2.26	43.14	53.9	10.7	150	0	noise floor
Vert.	9608.000	AV	35.82	38.89	10.08	43.21	2.26	43.84	53.9	10.0	150	0	noise floor

Result = Reading + Ant. Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2384.875	AV	39.14	28.20	14.49	41.63	9.43	2.26	51.89	53.9	2.0	-
Hori.	2390.000	AV	38.54	28.18	14.49	41.63	9.43	2.26	51.27	53.9	2.6	*1)
Vert.	2384.875	AV	39.08	28.20	14.49	41.63	9.43	2.26	51.83	53.9	2.0	-
Vert.	2390.000	AV	38.46	28.18	14.49	41.63	9.43	2.26	51.19	53.9	2.7	*1)

Result = Reading + Ant. Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	94.98	28.17	14.51	41.64	2.26	98.28	-	-	Carrier
Hori.	2400.000	PK	62.75	28.17	14.51	41.64	2.26	66.05	78.2	12.1	-
Vert.	2402.000	PK	94.78	28.17	14.51	41.64	2.26	98.08	-	-	Carrier
Vert.	2400.000	PK	62.86	28.17	14.51	41.64	2.26	66.16	78.0	11.8	-



Result = Reading + Ant. Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.89 m / 3.0 m) = 2.26 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 14, 2023
Temperature / Humidity	24 deg.C, 29 %RH
Engineer	Kenichi Adachi
	(1 GHz -10 GHz)
Mode	Tx BT LE 2 M-PHY 2402 MHz with Tx 11n-20 5580 MHz

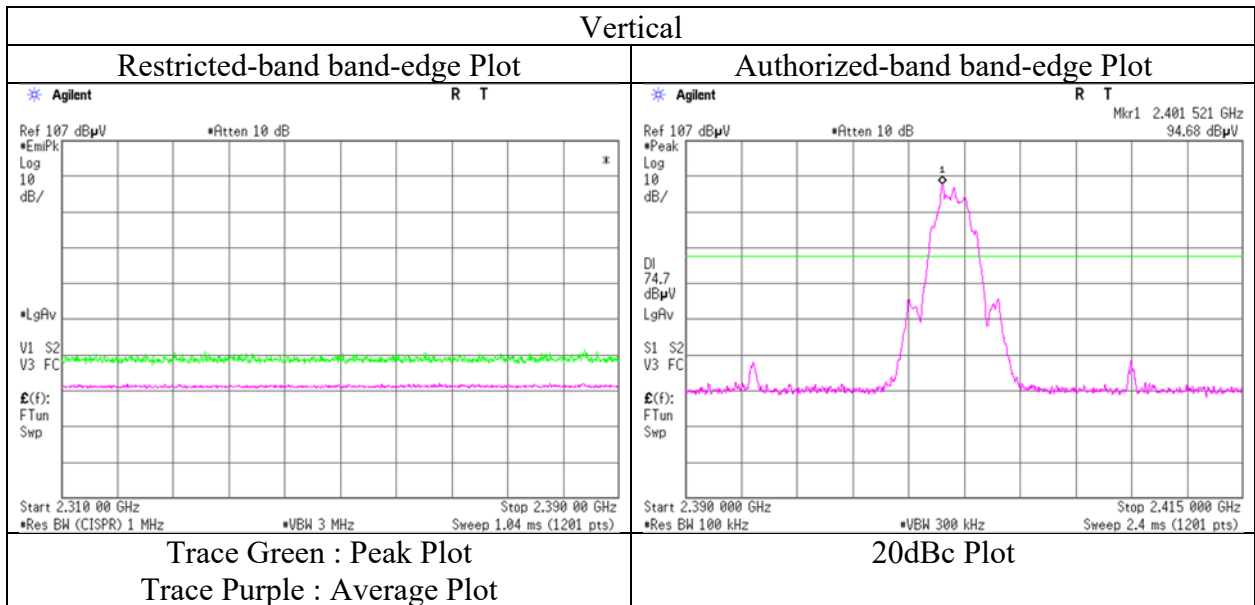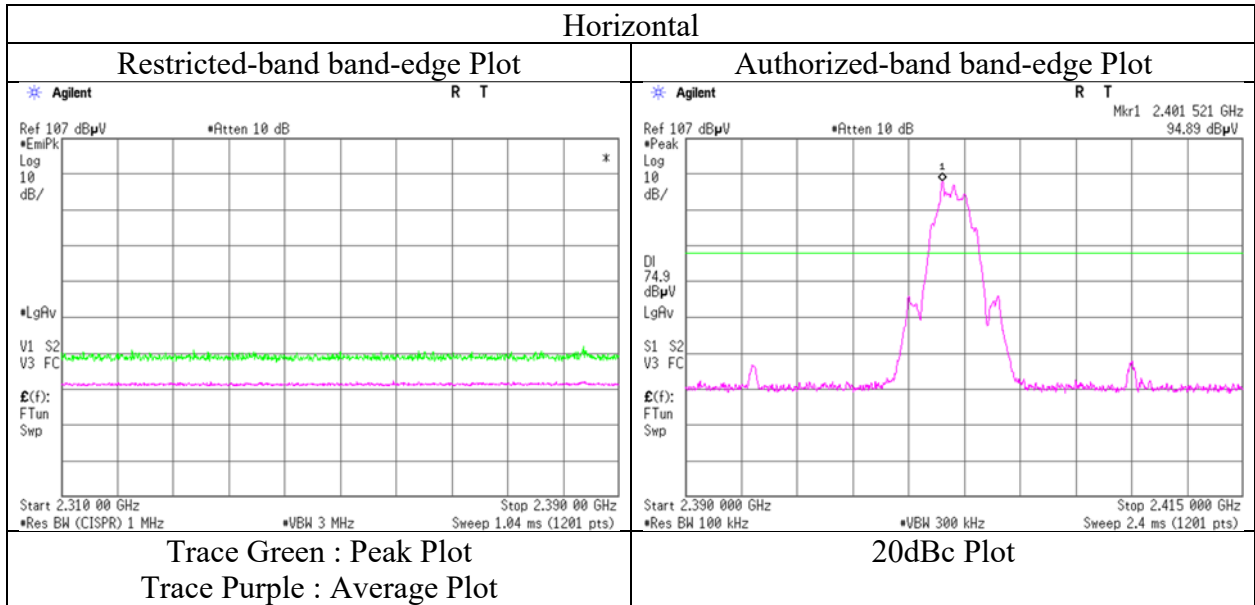

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place Shonan EMC Lab.
Semi Anechoic Chamber No.3
Date January 14, 2023
Temperature / Humidity 24 deg.C, 29 %RH
Engineer Kenichi Adachi
 (1 GHz -10 GHz)
Mode Tx BT LE 2 M-PHY 2480 MHz with Tx 11n-20 5580 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	48.94	28.08	14.61	41.68	2.26	52.21	73.9	21.6	202	259	-
Hori.	2487.886	PK	52.09	28.08	14.61	41.68	2.26	55.36	73.9	18.5	202	259	-
Hori.	2496.925	PK	50.22	28.08	14.62	41.69	2.26	53.49	73.9	20.4	202	259	-
Vert.	2483.500	PK	48.86	28.08	14.61	41.68	2.26	52.13	73.9	21.7	149	282	-
Vert.	2487.886	PK	53.98	28.08	14.61	41.68	2.26	57.25	73.9	16.6	149	282	-
Vert.	2496.925	PK	50.88	28.08	14.62	41.69	2.26	54.15	73.9	19.7	149	282	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	37.78	28.08	14.61	41.68	9.43	2.26	50.48	53.9	3.4	*1)
Hori.	2487.886	AV	37.82	28.08	14.61	41.68	9.43	2.26	50.52	53.9	3.3	-
Hori.	2496.925	AV	37.68	28.08	14.62	41.69	9.43	2.26	50.38	53.9	3.5	-
Vert.	2483.500	AV	37.98	28.08	14.61	41.68	9.43	2.26	50.68	53.9	3.2	*1)
Vert.	2487.886	AV	37.88	28.08	14.61	41.68	9.43	2.26	50.58	53.9	3.3	-
Vert.	2496.925	AV	37.76	28.08	14.62	41.69	9.43	2.26	50.46	53.9	3.4	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.89\text{ m} / 3.0\text{ m}) = 2.26\text{ dB}$



10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Duty factor refer to "Burst rate confirmation" sheet.

*1) Not out of band emission (Leakage Power)

Radiated Spurious Emission
(Reference Plot for band-edge)


Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 14, 2023
Temperature / Humidity	24 deg.C, 29 %RH
Engineer	Kenichi Adachi (1 GHz -10 GHz)
Mode	Tx BT LE 2 M-PHY 2480 MHz with Tx 11n-20 5580 MHz

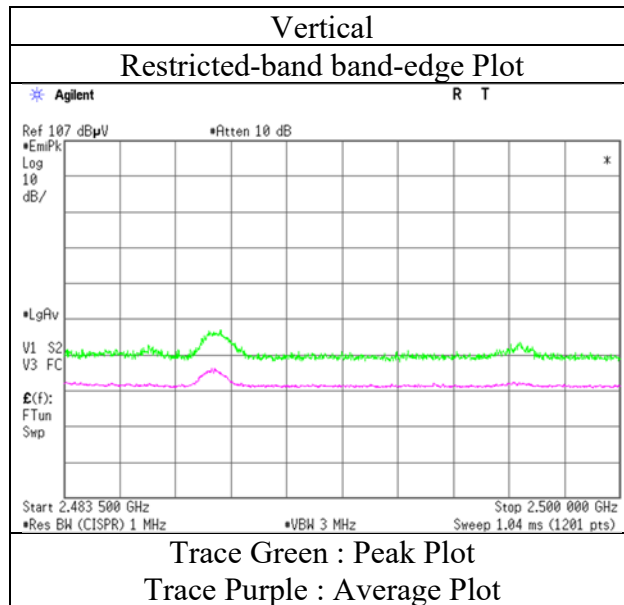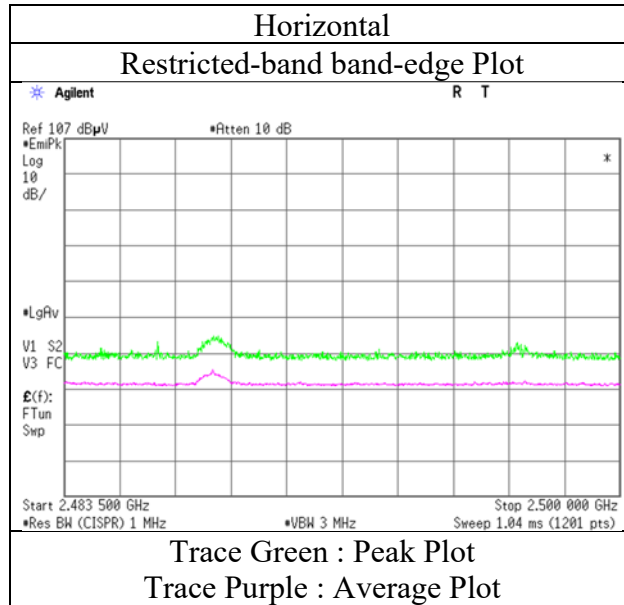

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Peak Output Power)


Test place	Shonan EMC Lab.			
Semi Anechoic Chamber	No.3	No.1	No.3	No.3
Date	January 11, 2023	December 23, 2022	January 10, 2023	January 9, 2023
Temperature / Humidity	23 deg.C, 27 %RH	23 deg.C, 35 %RH	20 deg.C, 28 %RH	20 deg.C, 27 %RH
Engineer	Miku Ikudome	Yusuke Tanikawara	Miku Ikudome	Takahiro Kawakami
	(30 MHz -1 GHz)	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx BT LE 2 M-PHY 2402 MHz			

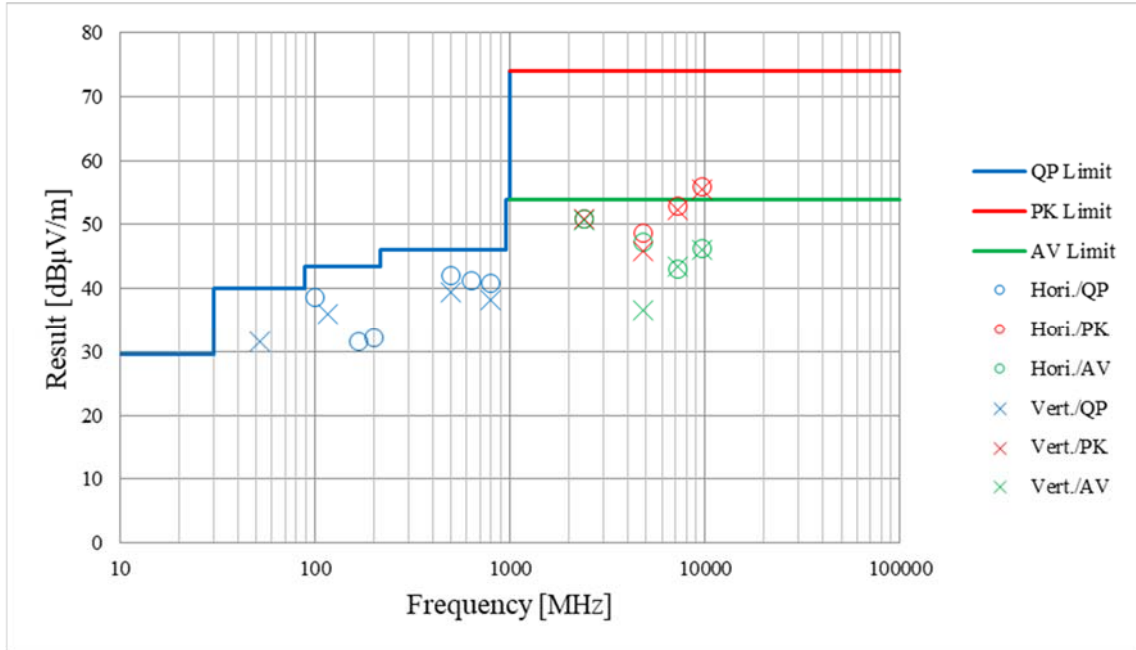

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Peak Output Power)


Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.3
Date	January 19, 2023	January 14, 2023	January 18, 2023
Temperature / Humidity	22 deg.C, 29 %RH	24 deg.C, 29 %RH	22 deg.C, 28 %RH
Engineer	Hiromasa Sato	Kenichi Adachi	Yusuke Tanikawara
	(30 MHz -1 GHz)	(1 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx BT LE 2 M-PHY 2402 MHz with Tx 11n-20 5580 MHz		

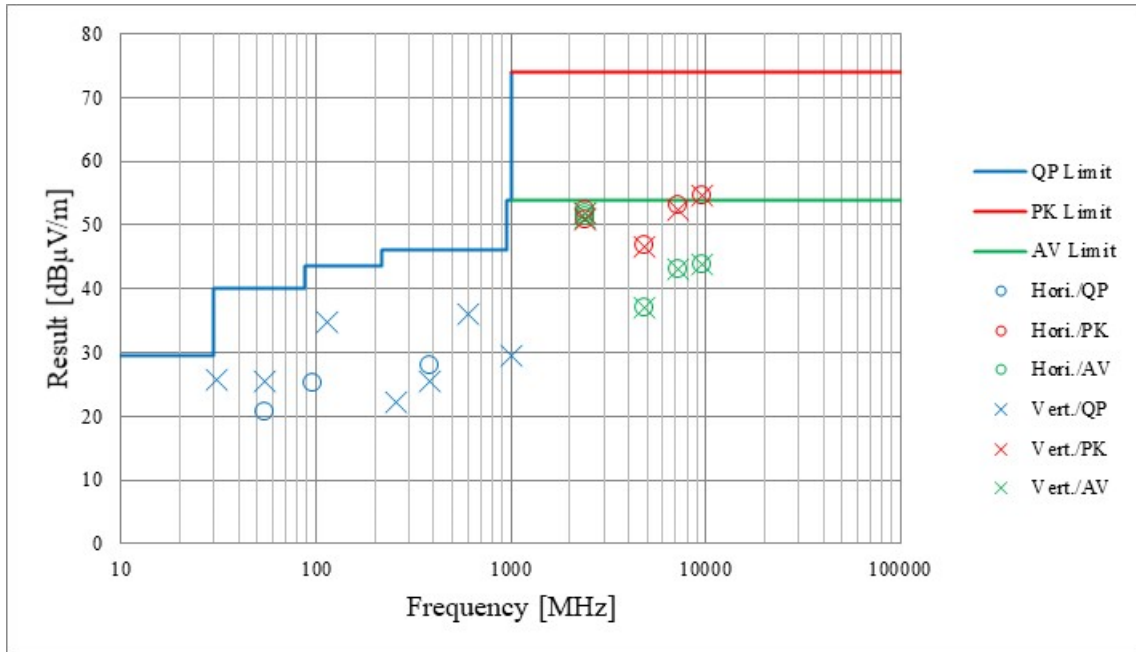

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	November 17, 2022
Temperature / Humidity	25 deg. C / 39 % RH
Engineer	Miku Ikudome
Mode	Tx BT LE 2 M-PHY 2402 MHz

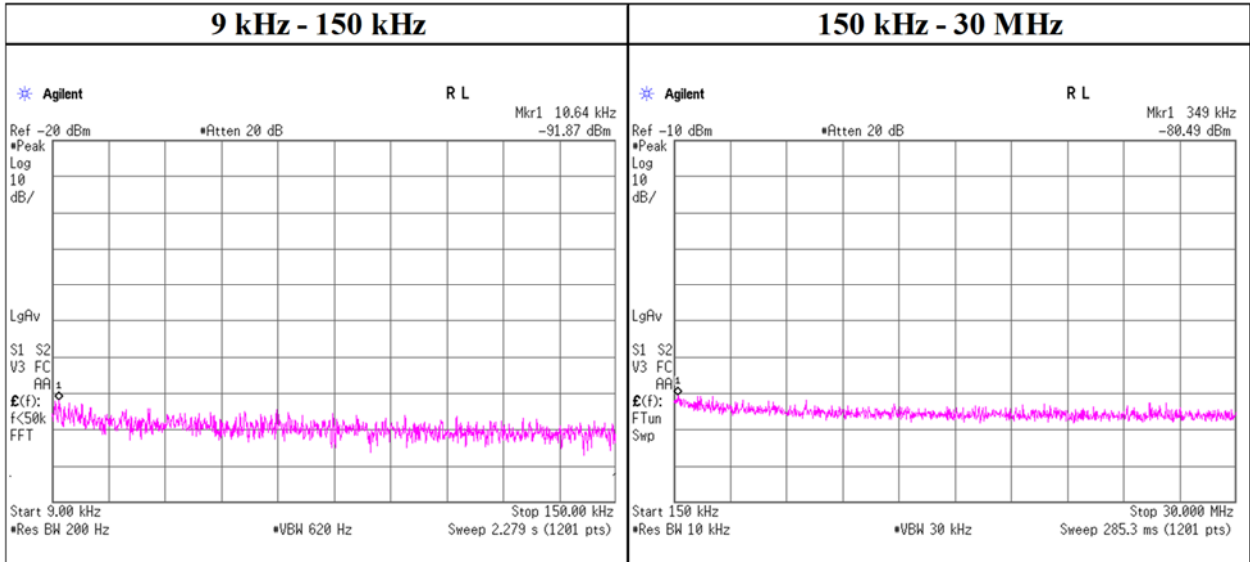

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain * [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
10.64	-91.9	0.0	9.7	2.0	1.0	-80.1	300	6.0	-18.9	47.0	65.9	-
349.00	-80.5	0.0	9.7	2.0	1.0	-68.8	300	6.0	-7.5	16.7	24.2	-

$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log(\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log(N)$

N: Number of output

*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

Power Density

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	November 17, 2022
Temperature / Humidity	25 deg. C / 39 % RH
Engineer	Miku Ikudome
Mode	Tx BT LE

BT LE 1 M-PHY

Frequency [MHz]	Measured Frequency [MHz]	Reading [dBm/3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm/3 kHz]	Limit [dBm/3 kHz]	Margin [dB]
2402	2401.979	-24.44	0.99	9.82	-13.63	8.00	21.63
2440	2439.979	-24.51	1.01	9.82	-13.68	8.00	21.68
2480	2479.979	-24.88	1.01	9.82	-14.05	8.00	22.05

BT LE 2 M-PHY


Frequency [MHz]	Measured Frequency [MHz]	Reading [dBm/3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm/3 kHz]	Limit [dBm/3 kHz]	Margin [dB]
2402	2401.958	-27.20	0.99	9.82	-16.39	8.00	24.39
2440	2439.925	-24.70	1.01	9.82	-13.87	8.00	21.87
2480	2479.957	-27.59	1.01	9.82	-16.76	8.00	24.76

Sample Calculation:

$$\text{Result} = \text{Reading} + \text{Cable Loss} + \text{Attenuator Loss}$$

*The equipment and cables were not used for factor 0 dB of the data sheets.

Power Density

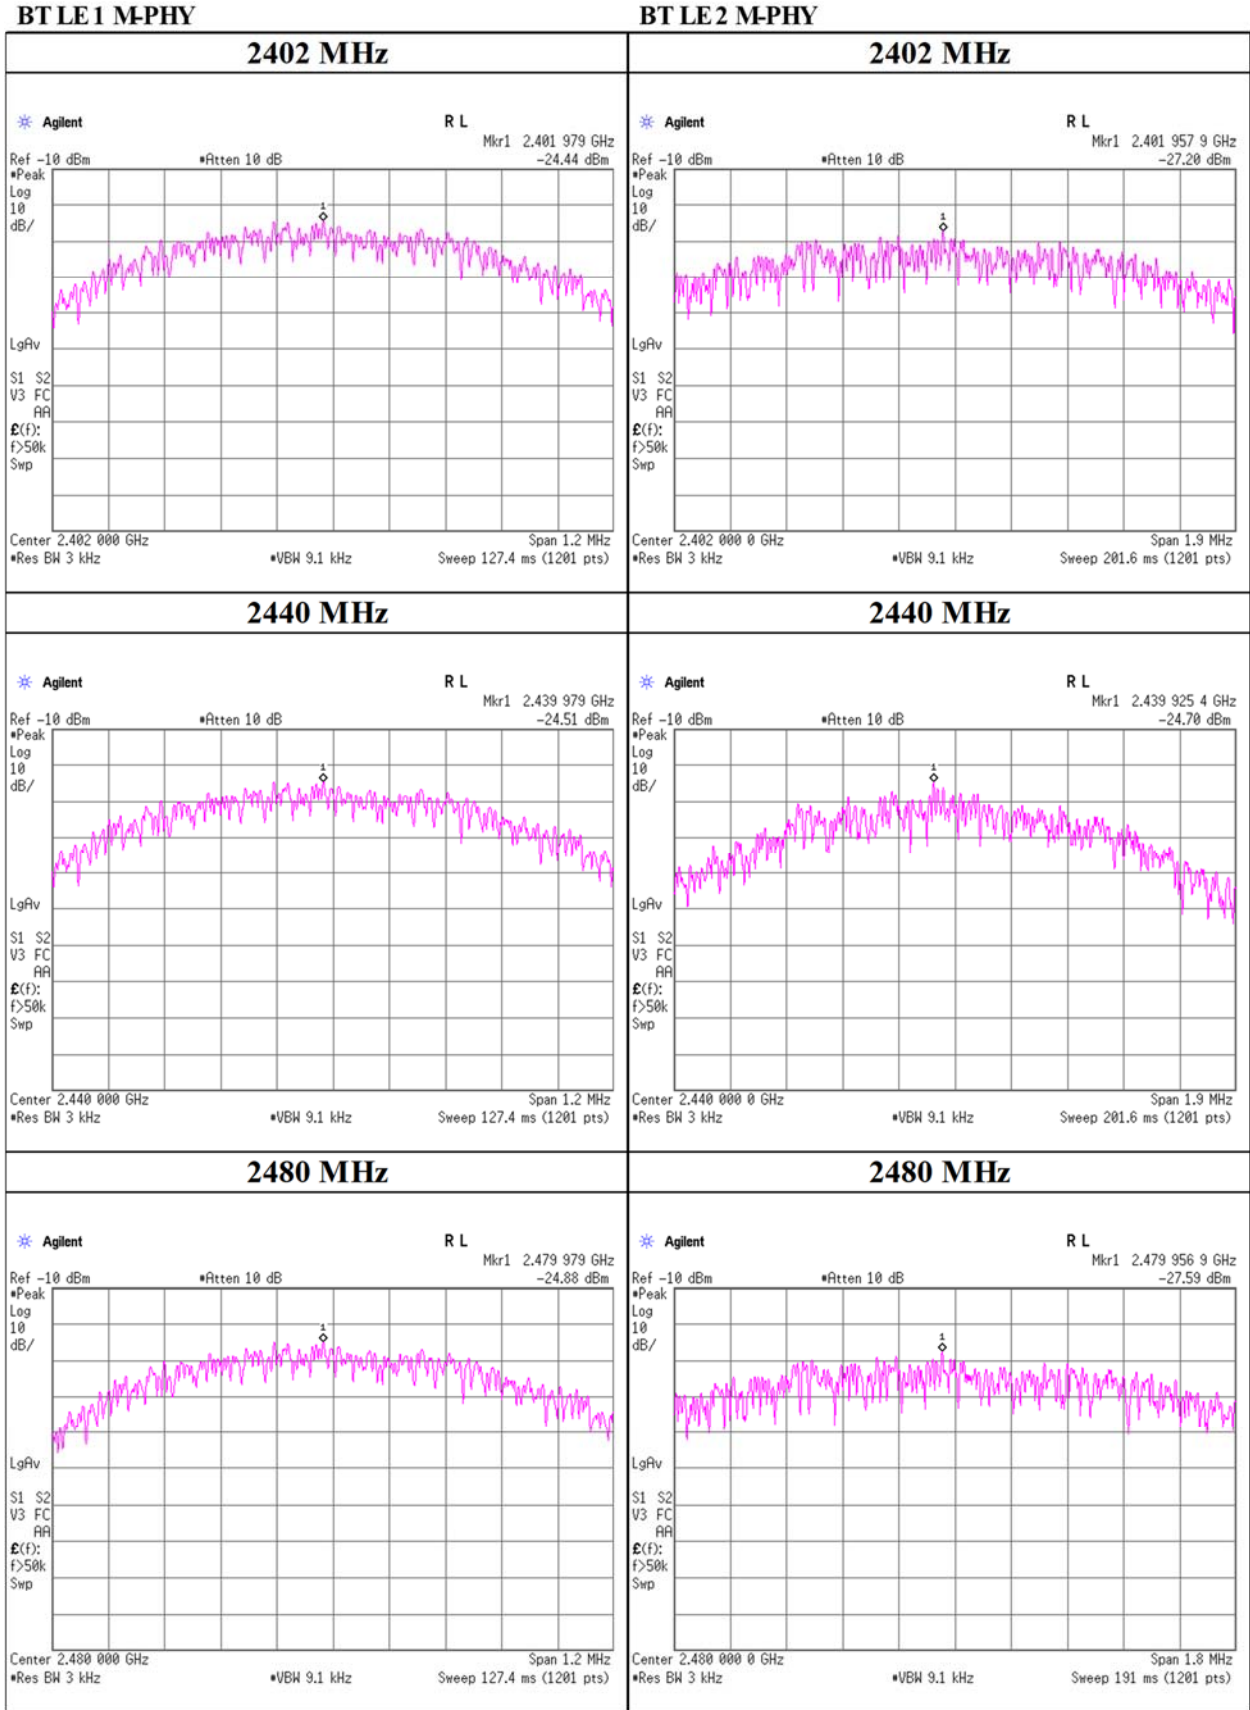

APPENDIX 2: Test Instruments**Test Equipment (1/2)**

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	SAT10-14	154591	Attenuator	Weinschel Corp.	54A-10	81595	2022/04/01	12
AT	SCC-G65	196942	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803416/2	2022/03/01	12
AT	SCC-H23	199603	Microwave cable	RS Pro	R-132G7210 100CO	-	2022/06/03	12
AT	SOS-27	191845	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2022/08/08	12
AT	SPM-13	169910	Power Meter	Keysight Technologies Inc	8990B	MY51000448	2022/11/08	12
AT	SPSS-06	169911	Power sensor	Keysight Technologies Inc	N1923A	MY57270004	2022/11/08	12
AT	SRENT-09	150461	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186392	2022/03/14	12
AT	SSA-02	145800	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY48250106	2022/05/17	12
AT	STS-05	146212	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997828	2022/09/20	12
AT,RE	SSA-03	145801	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY48250152	2022/08/04	12
CE	SAT3-10	144960	Attenuator	JFW	50HF-003N	-	2022/08/23	12
CE	SCC-C9/C10/SRSE-03	145036	Coaxial Cable&RF Selector	Suhner/Suhner/TOYO	RG223U/141PE /NS4906	-/0901-271(RF Selector)	2022/04/20	12
CE	SLS-05	145542	LISN	Rohde & Schwarz	ENV216	100516	2022/02/24	12
CE	SOS-06	146294	Humidity Indicator	A&D Company	AD-5681	4062118	-	-
CE	STM-05	145762	Terminator	TME	CT-01 BP	-	2022/12/16	12
CE,RE	COTS-SEMI-5	170932	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,M E,PE)	-	-	-
CE,RE	KJM-02	146432	Measure	TAJIMA	GL19-55	-	-	-
CE,RE	STR-07	146209	Test Receiver	Rohde & Schwarz	ESU26	100484	2022/09/14	12
CE,RE	STS-03	146210	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997823	2022/09/20	12
RE	KSA-08	145089	Spectrum Analyzer	Keysight Technologies Inc	E4446A	MY46180525	2022/11/01	12
RE	SAEC-01(SVSWR)	145561	Semi-Anechoic Chamber	TDK	SAEC-01(SVSWR)	1	2022/05/13	12
RE	SAEC-03(NSA)	145565	Semi-Anechoic Chamber	TDK	SAEC-03(NSA)	3	2022/04/15	12
RE	SAEC-03(SVSWR)	145566	Semi-Anechoic Chamber	TDK	SAEC-03(SVSWR)	3	2022/05/18	12
RE	SAF-03	145126	Pre Amplifier	SONOMA	310N	290213	2022/02/24	12
RE	SAF-04	145127	Pre Amplifier	Toyo Corporation	TPA0118-36	2072554	2022/05/20	12
RE	SAF-06	145005	Pre Amplifier	Toyo Corporation	TPA0118-36	1440491	2022/02/04	12
RE	SAF-08	145007	Pre Amplifier	Toyo Corporation	HAP18-26W	19	2022/03/03	12
RE	SAJ-03	146105	Antenna Tilt Jig	Intelligent System Engineering Co., Ltd	Antenna Tilt Jig	T-S003	-	-
RE	SAT10-05	145136	Attenuator	Keysight Technologies Inc	8493C-010	74864	2022/10/20	12
RE	SAT10-06	145137	Attenuator	Keysight Technologies Inc	8493C-010	74865	2022/10/20	12
RE	SAT6-13	167094	Attenuator	JFW	50HF-006N	-	2022/02/21	12
RE	SBA-03	145023	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	BBA9106	91032666	2022/05/14	12

Test Equipment (2/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	SCC-C1/C2/C3/C4/C5/C10/SRSE-03	145171	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-271(RF Selector)	2022/04/20	12
RE	SCC-G05	145039	Coaxial Cable	Junkosha	J12J102207-00	APR-30-15-037	2022/01/06	12
RE	SCC-G15	145176	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	2022/03/03	12
RE	SCC-G40	166491	Coaxial Cable	Junkosha	MWX221-01000NFSNMS/B	1612S005	2022/01/06	12
RE	SCC-G41	151617	Coaxial Cable	Junkosha	MWX221-01000NFSNMS/B	1612S006	2022/01/06	12
RE	SCC-G43	156380	Coaxial Cable	Huber+Suhner	SUCOFLEX_104 E	SN MY 13406/4E	2022/05/20	12
RE	SCC-G44	168300	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	800375/4A	2022/11/10	12
RE	SCC-G57	179540	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	802815/2	2022/05/12	12
RE	SCC-G58	183047	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	800287/4A	-	-
RE	SCC-G62	196985	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803650/2	2022/03/08	12
RE	SCC-G70	200010	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	575618/4	2022/07/22	12
RE	SFL-02	145301	Highpass Filter	MICRO-TRONICS	HPM50111	51	2022/10/20	12
RE	SFL-03	145377	Highpass Filter	MICRO-TRONICS	HPM50112	28	2022/10/20	12
RE	SFL-18	145305	Highpass Filter	MICRO-TRONICS	HPM50111	119	2022/03/02	12
RE	SHA-01	145383	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	9120D-725	2022/03/01	12
RE	SHA-03	145501	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	9120D-739	2022/03/16	12
RE	SHA-04	145512	Horn Antenna	ETS-Lindgren	3160-09	00094868	2022/06/06	12
RE	SHA-10	194685	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	711	2022/03/16	12
RE	SJM-22	207279	Measuring Tool, Tape Measure	ASKUL	-	-	-	-
RE	SLA-07	145529	Logperiodic Antenna	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	196	2022/05/14	12
RE	SOS-20	191837	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2022/08/06	12
RE	SOS-23	191840	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2022/08/08	12
RE	STS-01	145792	Digital Hitster	HIOKI E.E. CORPORATION	3805-50	80997812	2022/09/20	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: CE: Conducted Emission
RE: Radiated Emission
AT: Antenna terminal conducted tests