

**BLE-1Mbps:**

EUT: Active Speaker System		
M/N: YY2088C1		
Test date: 2024-08-21	Pressure: 101.3±1.0 kpa	Humidity: 52.4±3.0%
Tested by: Lili	Test site: RF site	Temperature: 23.1±0.6°C

Test Mode	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
GFSK	2402	1.0692	N/A
	2440	1.0670	
	2480	1.0698	
Conclusion: Pass			

GFSK	
2402MHz	2440MHz
<p>Center Freq 2.40200000 GHz</p> <p>Occupied Bandwidth: 1.0692 MHz</p> <p>Total Power: 12.3 dBm</p>	<p>Center Freq 2.44000000 GHz</p> <p>Occupied Bandwidth: 1.0670 MHz</p> <p>Total Power: 12.1 dBm</p>
<p>Center Freq 2.48000000 GHz</p> <p>Occupied Bandwidth: 1.0698 MHz</p> <p>Total Power: 11.9 dBm</p>	---

**BLE-2Mbps:**

EUT: Active Speaker System

M/N: YY2088C1

Test date: 2024-08-21

Pressure: 101.3±1.0 kpa

Humidity: 52.4±3.0%

Tested by: Lili

Test site: RF site

Temperature: 23.1±0.6°C

Test Mode	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK	2402	1241	≥500
	2440	1244	≥500
	2480	1244	≥500


Conclusion : PASS

**GFSK**

**2402MHz**



**2440MHz**

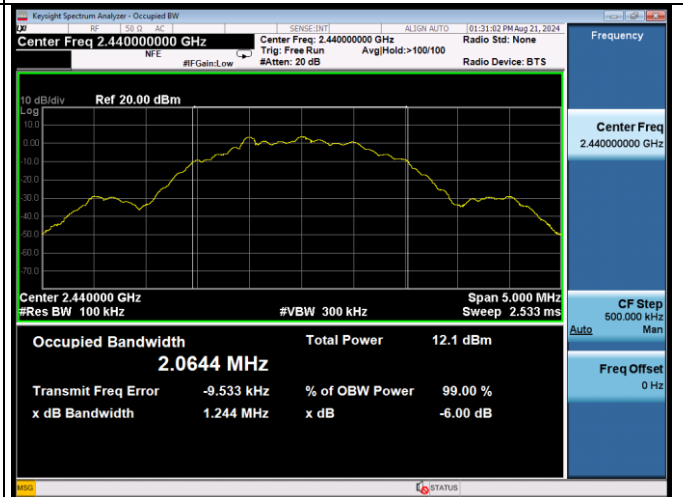

**2480MHz**



**BLE-2Mbps:**

EUT: Active Speaker System

M/N: YY2088C1

Test date: 2024-08-21

Pressure: 101.3±1.0 kpa

Humidity: 52.4±3.0%

Tested by: Lili

Test site: RF site

Temperature: 23.1±0.6°C

Test Mode	Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
GFSK	2402	2.0825	N/A
	2440	2.0853	
	2480	2.0828	

Conclusion: Pass

**GFSK**


**2402MHz**



**2440MHz**



**2480MHz**



## 7. MAXIMUM PEAK OUTPUT POWER TEST

### 7.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
2.	RF Cable	Eastsheep	RM086-SMA/N-JJ-2000	NO.1	Jun.19,24	1 Year
3.	Attenuator(10dB)	Agilent	8491B	MY39269201	Mar.16,24	1 Year

### 7.2. Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm).

### 7.3. Test Procedure

Use the test method descried in ANSI C63.10 clause 11.9.1:

Connected the EUT's Antenna port to PXA signal analyzer;

For Peak output power: Connected the EUT's Antenna port to PXA signal analyzer.

For Average power: Connected the EUT's Antenna port to power meter.

### 7.4. Test Results

EUT: Active Speaker System		
M/N: YY2088C1		
Date: 2024-08-08	Pressure: 102.4 ± 1.0 kpa	Humidity: 54.7 ± 3.0%
Tested by: Lili	Test site: RF site	Temperature: 23.6±0.6℃

#### BLE-1Mbps:

Test Mode	Frequency (MHz)	Power Setting	Peak Output Power (dBm)	Average Power (dBm) (Without Duty cycle Factor)	Duty cycle Factor (dBm)	Average Power (dBm) (with Duty cycle Factor)	Limit (dBm)
GFSK	2402	5	5.602	4.273	0.63	4.903	30
	2440	5	5.456	4.260	0.63	4.890	
	2480	5	5.394	4.168	0.63	4.798	

Conclusion: Pass

Remark: Duty cycle Factor=10\*log(1/duty cycle)

**BLE-2Mbps:**

Test Mode	Frequency (MHz)	Power Setting	Peak Output Power (dBm)	Average Power (dBm) (Without Duty cycle Factor)	Duty cycle Factor (dBm)	Average Power (dBm) (with Duty cycle Factor)	Limit (dBm)
GFSK	2402	5	5.480	3.968	0.57	4.538	30
	2440	5	5.359	3.909	0.57	4.479	
	2480	5	5.301	3.959	0.57	4.529	


Conclusion: Pass

Remark: Duty cycle Factor= $10 \cdot \log(1/\text{duty cycle})$


**BLE-1Mbps:**

**GFSK**



**2402MHz**

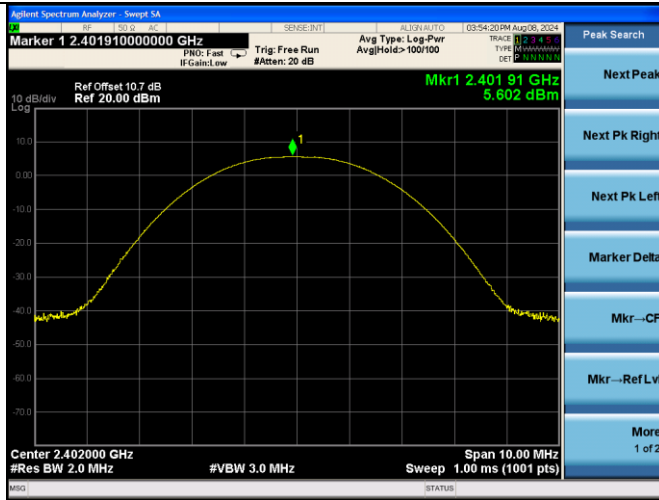

**2440MHz**

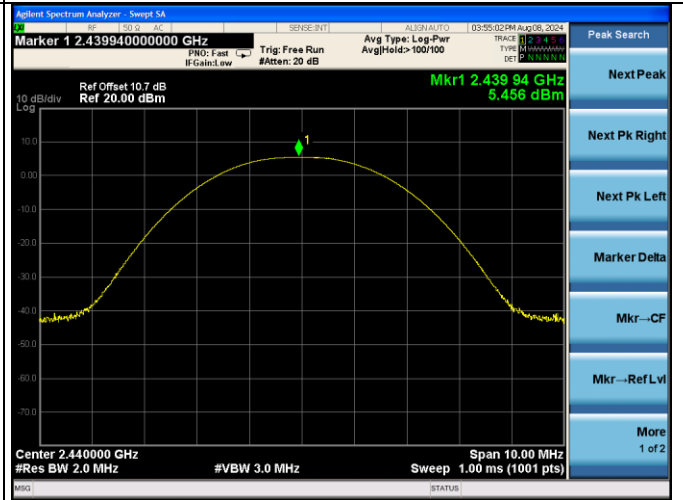


**2480MHz**

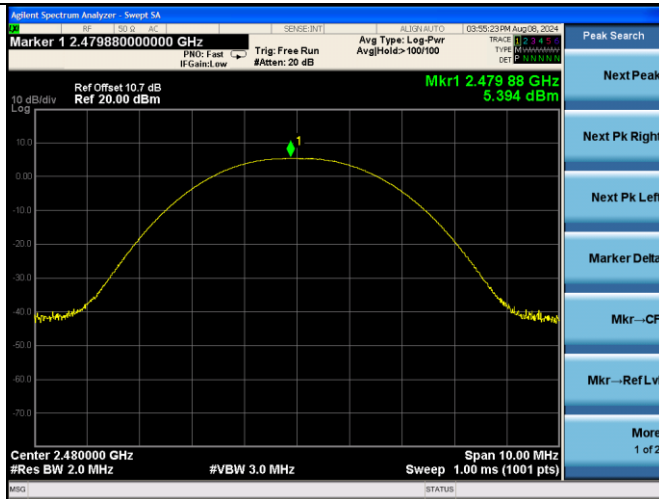


BLE-2Mbps:

GFSK



2402MHz

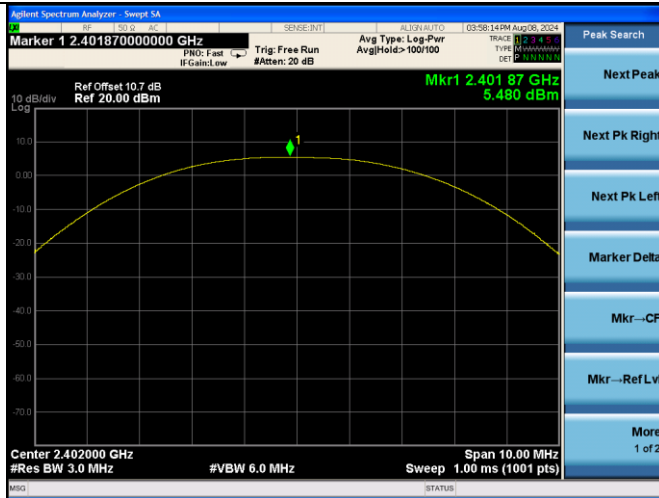

2440MHz

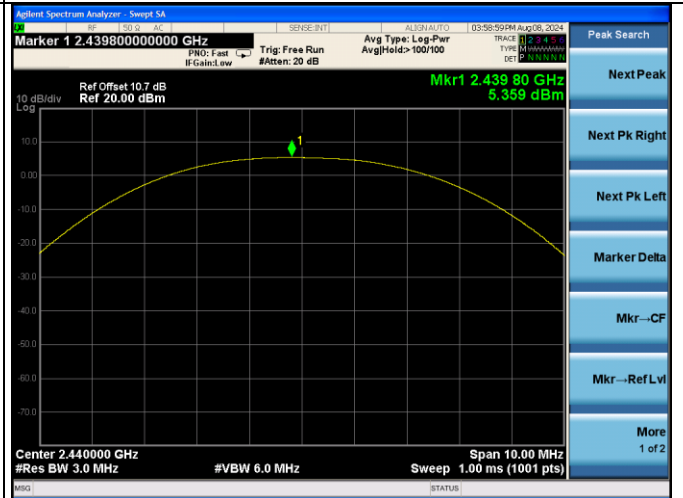

2480MHz

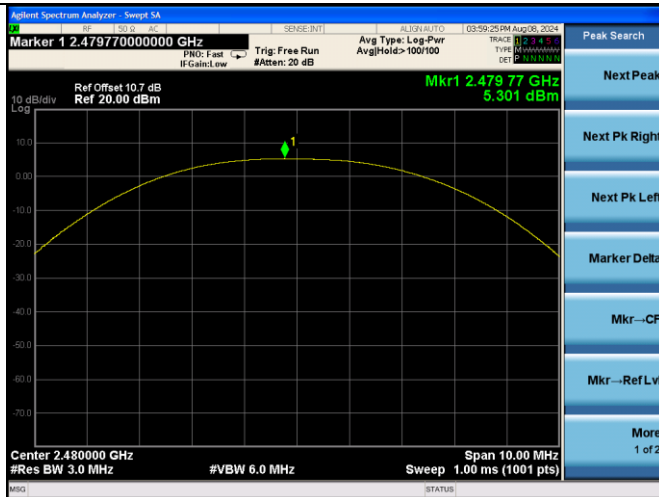

## 8. BAND EDGE COMPLIANCE TEST

### 8.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	3Year
2.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.07,23	1 Year
4.	Amplifier	HP	8447D	2944A11159	Mar.17,24	1 Year
5.	RF Cable	TIMES MICROWAVE	SFT205-NMSM-10.00M	689241	Aug.13,24	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	EMCO	3115	9510-4580	Jan.08,22	3 Year

Note: N/A means Not applicable.

### 8.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 8.3. Test Produce

Use the test method described in ANSI C63.10 clause 6.10:

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relevant band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205

For emissions above two bandwidths away from the band-edge use below produce:

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.



4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:

(a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO

(b) This is pulse Modulation device a duty cycle factor was used to calculate average level based measured peak level.

8.4. Test Results

Pass (The testing data was attached in the next pages.)

Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.


Test Mode	ANT. PLO.	Frequency (MHz)	Peak(dBuv/m)		Margin	Duty cycle factor (dB)	AV(dBuv/m)		Margin	Conclusion
			Emission Level	Limit			Emission Level	Limit		
BLE-1M	V	2390	44.79	74	29.21	-1.253	46.043	54	7.957	Pass
BLE-1M	H	2390	44.00	74	30.00	-1.253	45.253	54	8.747	Pass
BLE-1M	H	2483.5	44.93	74	29.07	-1.253	46.183	54	7.817	Pass
BLE-1M	H	2500	44.79	74	29.21	-1.253	46.043	54	7.957	Pass
BLE-1M	V	2483.5	48.20	74	25.80	-1.253	49.453	54	4.547	Pass
BLE-1M	V	2500	44.47	74	29.53	-1.253	45.723	54	8.277	Pass
BLE-2M	V	2390	45.15	74	28.85	-1.130	46.280	54	7.720	Pass
BLE-2M	H	2390	43.73	74	30.27	-1.130	44.860	54	9.140	Pass
BLE-2M	H	2483.5	45.82	74	28.18	-1.130	46.950	54	7.050	Pass
BLE-2M	H	2500	44.03	74	29.97	-1.130	45.160	54	8.840	Pass
BLE-2M	V	2483.5	48.47	74	23.53	-1.130	49.600	54	4.400	Pass
BLE-2M	V	2500	44.62	74	29.38	-1.130	45.750	54	8.250	Pass

**BLE-1Mbps:**

Data: 45

File: F:\2024 Report\SI\SONY\A1Z2408012\A1Z2408012.EM6 (148)


Date: 2024-09-27

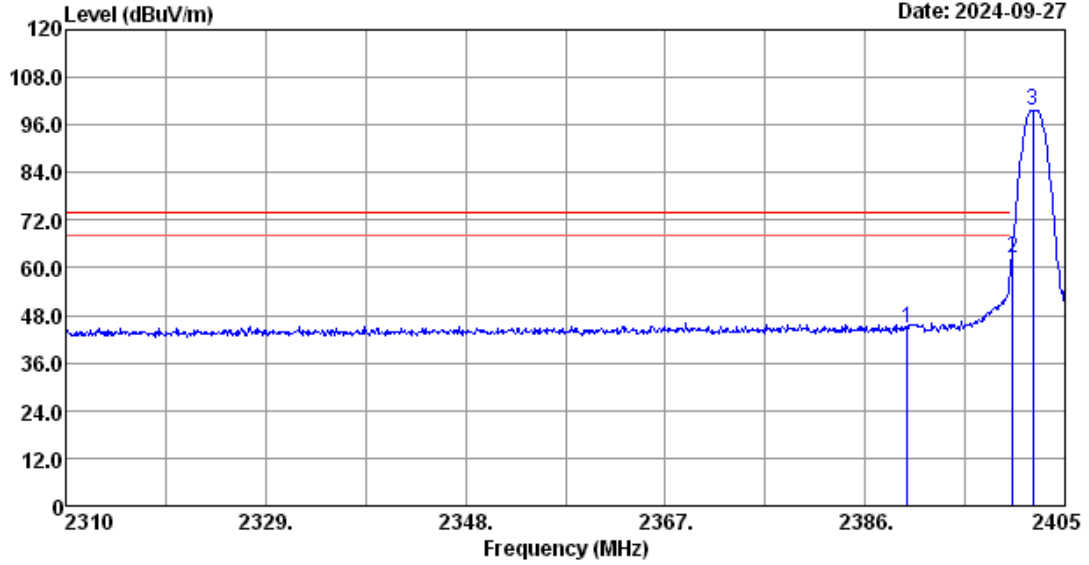

Site no. : 3m Chamber Data no. : 45  
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.8°C/53.9% Engineer : epoch  
 Test Mode : BLE1M 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.10	5.30	43.09	31.70	44.79	74.00	29.21	Peak
2	2400.00	28.10	5.32	60.58	31.70	62.30	-----	-----	Peak
3	2401.96	28.11	5.32	98.02	31.70	99.75	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

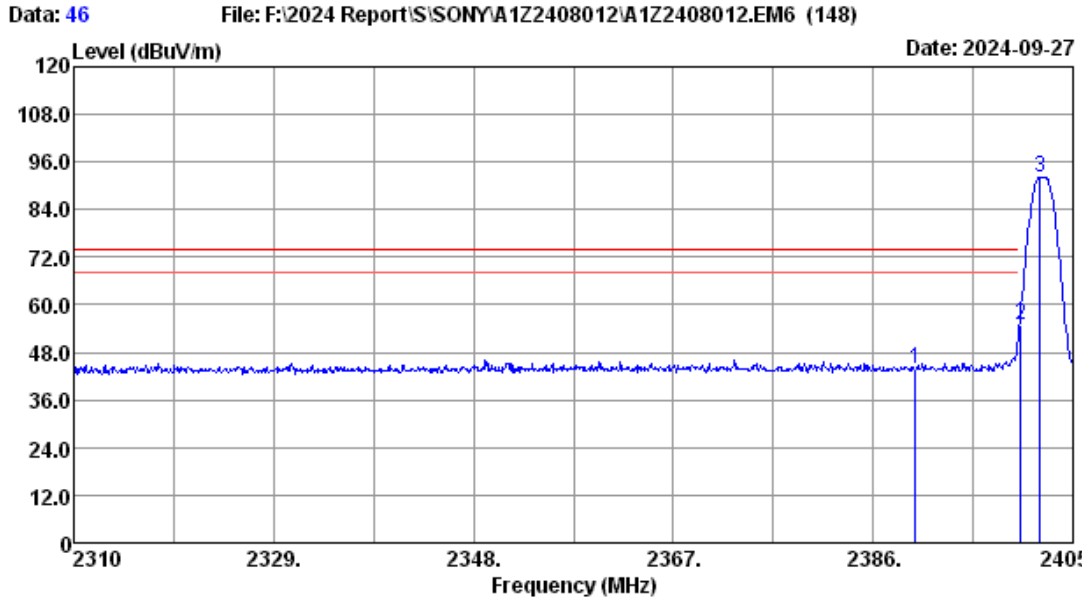

Site no. : 3m Chamber Data no. : 46  
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.8°C/53.9% Engineer : epoch  
 Test Mode : BLE1M 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.10	5.30	42.30	31.70	44.00	74.00	30.00	Peak
2	2400.00	28.10	5.32	53.19	31.70	54.91	-----	-----	Peak
3	2401.87	28.11	5.32	90.54	31.70	92.27	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

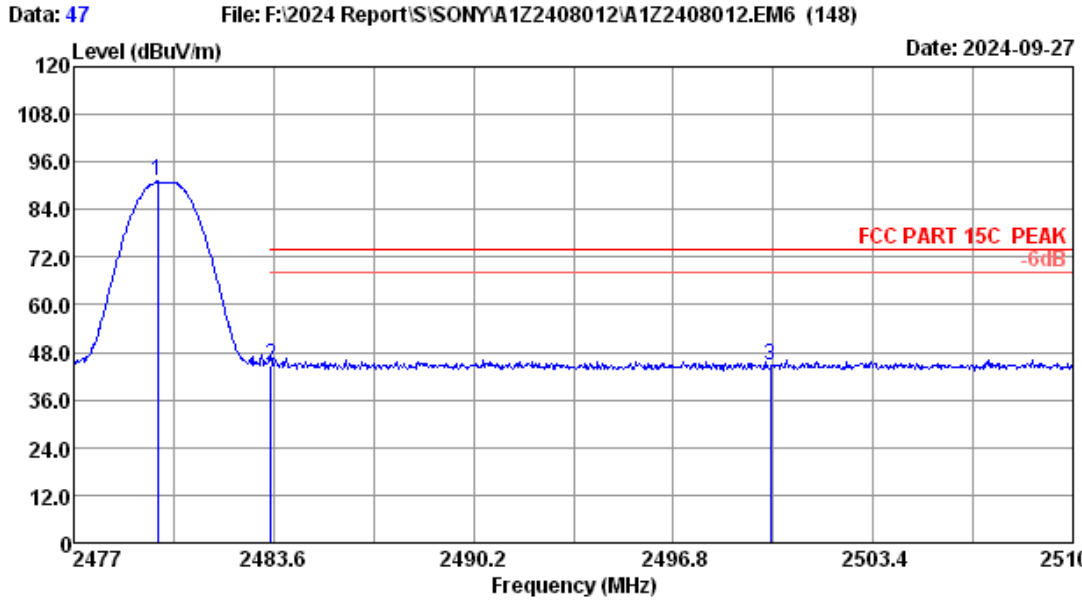

Site no. : 3m Chamber Data no. : 47  
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.8°C/53.9% Engineer : epoch  
 Test Mode : BLE1M 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.77	28.30	5.41	88.98	31.66	91.03	-----	-----	Peak
2	2483.50	28.30	5.41	42.88	31.66	44.93	74.00	29.07	Peak
3	2500.00	28.30	5.44	42.70	31.65	44.79	74.00	29.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

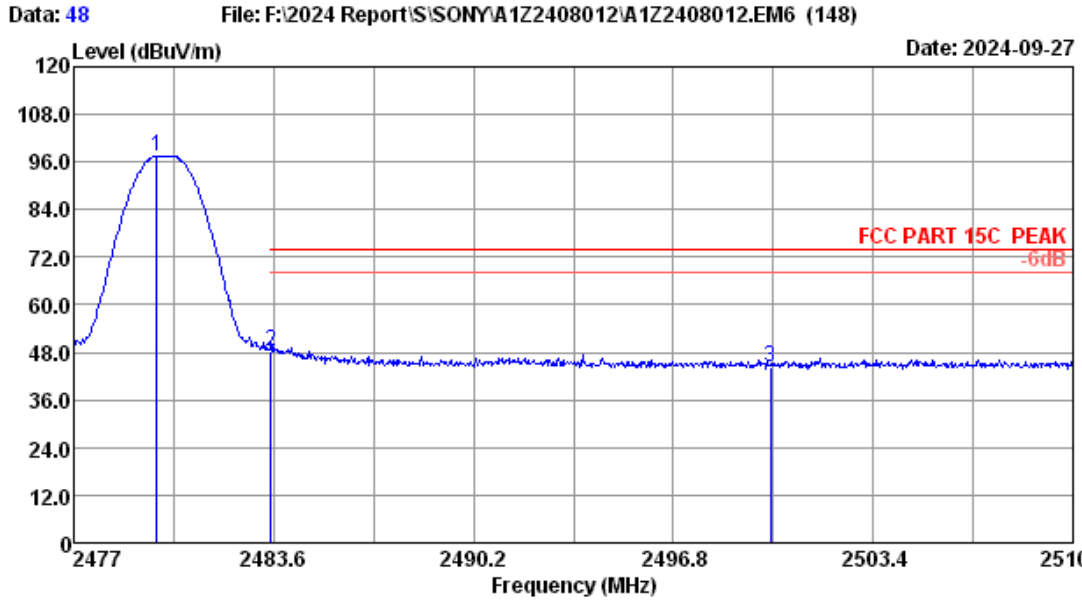

Site no. : 3m Chamber Data no. : 48  
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.8°C/53.9% Engineer : epoch  
 Test Mode : BLE1M 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.74	28.30	5.41	95.45	31.66	97.50	-----	-----	Peak
2	2483.50	28.30	5.41	46.15	31.66	48.20	74.00	25.80	Peak
3	2500.00	28.30	5.44	42.38	31.65	44.47	74.00	29.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

**BLE-2Mbps:**

Data: 67

File: F:\2024 Report\SI\SONY\A1Z2408012\A1Z2408012.EM6 (148)


Date: 2024-09-27

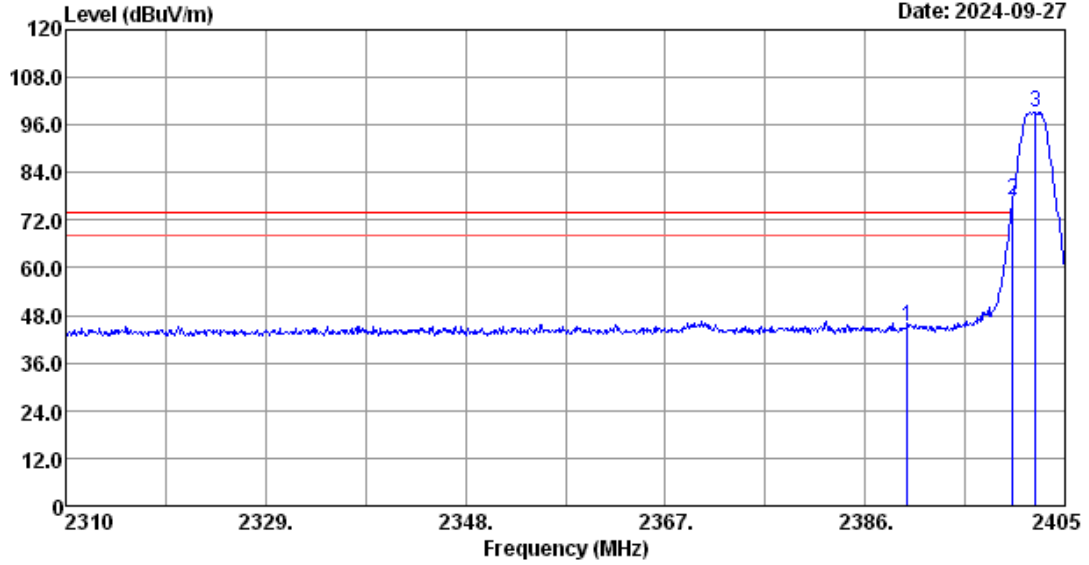

Site no. : 3m Chamber Data no. : 67  
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.8°C/53.9% Engineer : epoch  
 Test Mode : BLE2M 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.10	5.30	43.45	31.70	45.15	74.00	28.85	Peak
2	2400.00	28.10	5.32	75.38	31.70	77.10	-----	-----	Peak
3	2402.25	28.11	5.32	97.34	31.70	99.07	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

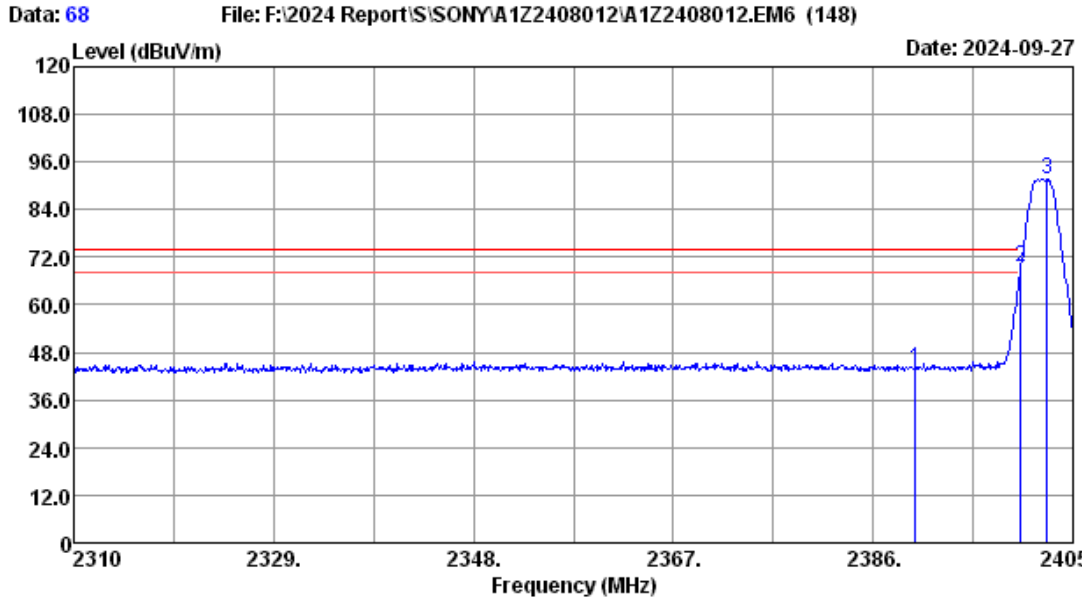

Site no. : 3m Chamber Data no. : 68  
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.8°C/53.9% Engineer : epoch  
 Test Mode : BLE2M 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.10	5.30	42.03	31.70	43.73	74.00	30.27	Peak
2	2400.00	28.10	5.32	67.75	31.70	69.47	-----	-----	Peak
3	2402.53	28.11	5.32	89.83	31.70	91.56	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

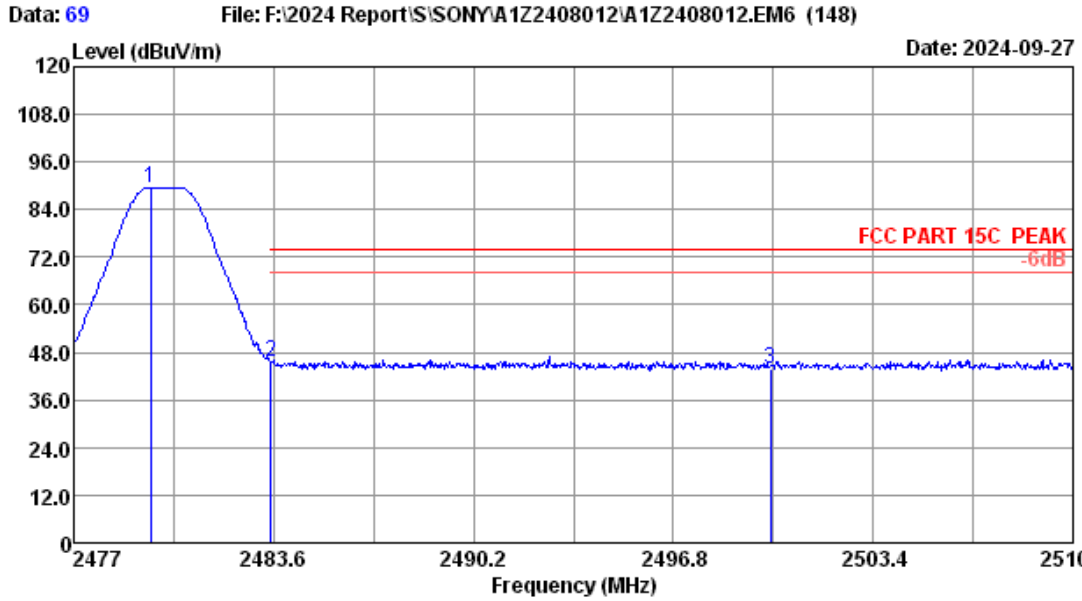


Site no. : 3m Chamber Data no. : 69  
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.8°C/53.9% Engineer : epoch  
 Test Mode : BLE2M 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.54	28.30	5.41	87.61	31.66	89.66	-----	-----	Peak
2	2483.50	28.30	5.41	43.77	31.66	45.82	74.00	28.18	Peak
3	2500.00	28.30	5.44	41.94	31.65	44.03	74.00	29.97	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



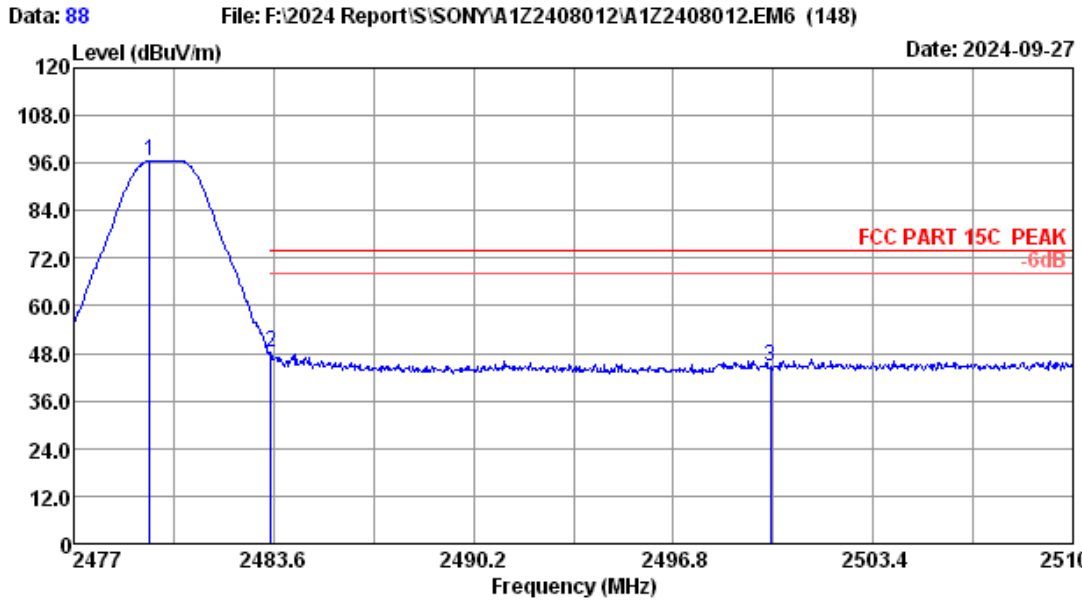

Site no. : 3m Chamber Data no. : 88  
 Dis. / Ant. : 3m 2022 3115-4580 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.8°C/53.9% Engineer : epoch  
 Test Mode : BLE2M 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.51	28.30	5.41	94.56	31.66	96.61	-----	-----	Peak
2	2483.50	28.30	5.41	46.42	31.66	48.47	74.00	25.53	Peak
3	2500.00	28.30	5.44	42.53	31.65	44.62	74.00	29.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 9. POWER SPECTRAL DENSITY TEST

### 9.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
2.	RF Cable	esatsheep	RM086-SMA/N-JJ -2000	NO.1	Jun.19,24	1 Year
3.	Attenuator(10dB)	Agilent	8491B	MY39269201	Mar.16,24	1 Year

### 9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 9.3. Test Procedure

Use the test method described in ANSI C63.10 clause 11.10.2:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

## 9.4. Test Results

EUT: Active Speaker System		
M/N: YY2088C1		
Date: 2024-08-21	Pressure: $102.4 \pm 1.0$ kpa	Humidity: $54.7 \pm 3.0\%$
Tested by: Lili	Test site: RF site	Temperature: $23.6 \pm 0.6^\circ\text{C}$

**BLE-1Mbps:**

Test Mode	Frequency (MHz)	Power density ( dBm/3KHz )	Limit (dBm/3KHz)
GFSK	2402	-10.229	8
	2440	-10.483	8
	2480	-10.491	8
Conclusion : PASS			


**BLE-2Mbps:**

Test Mode	Frequency (MHz)	Power density ( dBm/3KHz )	Limit (dBm/3KHz)
GFSK	2402	-13.732	8
	2440	-13.680	8
	2480	-13.987	8
Conclusion : PASS			

BLE-1Mbps:

GFSK


2402MHz

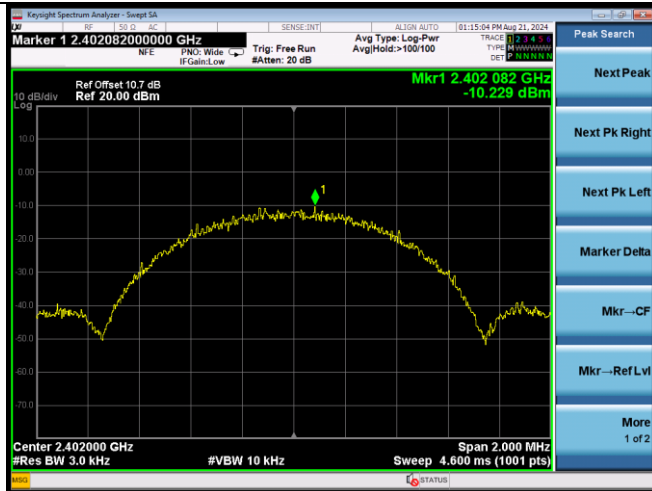

2440MHz



2480MHz



BLE-2Mbps:

GFSK



2402MHz



2440MHz



2480MHz

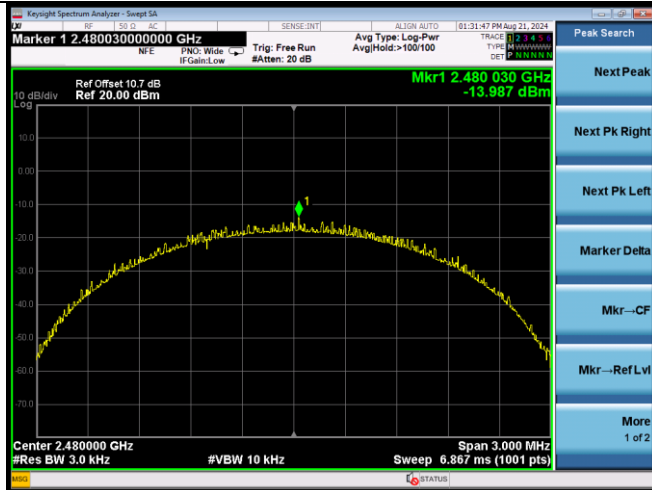

## **10. ANTENNA REQUIREMENT**

### **10.1. STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **10.2. ANTENNA CONNECTED CONSTRUCTION**

The antennas used for this product are PCB Antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.1dBi.

## 11. DEVIATION TO TEST SPECIFICATIONS

[NONE]

..... **THE END** .....