

# RADIO TEST REPORT

(for Bluetooth classic)

Project No. : JB-Z0913-B  
 Client's Control No : AF21021  
 Client : Sony Corporation  
 Client's Address : 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan  
 Product Name : Wireless Stereo Headset  
 Model No. : YY2953  
 FCC ID : AK8YY2953  
 Test Standard : 47 CFR Part 15 Subpart C  
 Sample Receipt Date : May 26, 2021  
 Test Date : June 2, 2021 to June 17, 2021  
 Report Date : October 11, 2021  
 Test Result : Complied

Notice:

- \* These test results relate only to the items (combination equipment, test configuration, operation condition etc.) tested.
- \* This report shall not be reproduced except in full, without written approval of the laboratory.
- \* This report must not be used by the client to claim product endorsement by A2LA or any agency of the U.S.
- \* Hereby certify that no party is subject to a denial of federal benefits pursuant to section 5301 of the Anti-Drug Abuse Act.
- \* All test results are traceable to the national and / or international standards.
- \* The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory.
- \* This report replaces and supersedes all previous versions. Refer to Revision History on the following page.

Reported by:

*H. Takayama*

Hisae Takayama  
 Test Engineer  
 EMC/RF Test Laboratory, Main Lab.  
 Design Technology Division

Approved Signatory:

*T. Yamada*

Takashi Yamada  
 Technical Manager  
 EMC/RF Test Laboratory, Main Lab.  
 Design Technology Division



TESTING CERT #3203.01

Format No.: NV1-1-01 Version 5.0

## TABLE OF CONTENTS

<b>1. General Information .....</b>	<b>3</b>
1.1. Description of Equipment Under Test (EUT).....	3
1.2. Summary of Test Result.....	3
1.3. Tested Methodology .....	4
1.4. Measurement Procedures .....	4
1.5. Test Location.....	6
1.6. Uncertainty .....	6
<b>2. Test Specification.....</b>	<b>7</b>
2.1. Validation .....	7
2.2. Operating Condition.....	7
2.3. Special Accessories .....	7
2.4. EUT Modifications .....	7
2.5. Configuration of EUT System.....	8
2.6. Typical setup arrangement.....	9
<b>3. Test Data.....</b>	<b>10</b>
3.1. 20dB Bandwidth.....	10
3.2. Carrier Frequency Separation.....	12
3.3. Number of Hopping Frequencies .....	13
3.4. Time of Occupancy (Dwell Time).....	14
3.5. Maximum Peak Conducted Output Power.....	18
3.6. Radiated Spurious Emissions.....	20
3.7. Conducted Spurious Emissions for Band Edge.....	32
<b>4. Method of Calculation.....</b>	<b>33</b>
4.1. Time of Occupancy (Dwell Time).....	33
4.2. Maximum Peak Conducted Output Power.....	33
4.3. Radiated Spurious Emissions.....	34
4.4. Conducted Spurious Emissions for Band Edge.....	34
<b>5. List of Test Equipment .....</b>	<b>35</b>
5.1. Antenna-port Conducted Measurements.....	35
5.2. Radiated Spurious Emissions.....	35
<b>6. Photographs of test setup .....</b>	<b>36</b>
6.1. Antenna-port Conducted Measurements Photo(s) .....	36
6.2. Radiated Spurious Emissions Photo(s).....	37

### Note

- indicates that the listed condition, standard or equipment is applicable for this report.  
 indicates that the listed condition, standard or equipment is not applicable for this report.

### Revision History

Revision	Date	Overview	Page
JB-Z0913 (Original)	June 25, 2021	-	-
JB-Z0913-A	June 30, 2021	Changed the Antenna Gain.	P.3
JB-Z0913-B	October 11, 2021	Changed the Product Name	P.1,3, 8

### Disclaimer

This report includes the information provided by the customer as below;

- Cover page : Client and product related information
- Clause 1.1 : Description of Device Under Test (EUT)
- Clause 2 : Operating Mode / conditions

\* The laboratory is not responsible for results affected by the above information.

## 1. General Information

### 1.1. Description of Equipment Under Test (EUT)

#### General Specification

Test Sample Condition :  Prototype       Pre-production       Mass-production  
 Product Name : Wireless Stereo Headset  
 Trade Name : SONY  
 Model No. : YY2953  
 Serial No. : 1120509,1120521  
 Power Rating of the EUT : DC 3.85 V (The EUT is supplied with the power from the built-in battery)

Similar model(s) to be covered by this report

Model No. : None

#### Radio Specification

Function of the Equipment : Transceiver  
 Operating Frequency : 2402 - 2480 MHz  
 Modulation Type : FHSS (GFSK,  $\pi/4$ DQPSK, 8DPSK)  
 Channel Spacing : 1 MHz  
 Channel Bandwidth : 1 MHz  
 Number of channels : 79  
 Antenna Type : Monopole Antenna  
 Antenna Connector Type : None  
 Antenna Gain : Left Unit: -6.0 dBi, Right Unit: -6.0 dBi  
 Operating Temperature : 0.0 deg.C to +40.0 deg.C

### 1.2. Summary of Test Result

Test Item	Test Method	Worst Margin	Results	Note
AC Power-line Conducted Emissions	-	-	N/A	*2
20dB Bandwidth	Conducted	Refer to the test data	Complied	-
Carrier Frequency Separation	Conducted	Refer to the test data	Complied	-
Number of Hopping Frequencies	Conducted	Refer to the test data	Complied	-
Time of Occupancy (Dwell Time)	Conducted	Refer to the test data	Complied	-
Maximum Peak Conducted Output Power	Conducted	11.57 dB	Complied	-
Radiated Spurious Emissions	Radiated	10.0 dB (AV) 2483.500 MHz Horizontal	Complied	-
Conducted Spurious Emissions for Band Edge	Conducted	39.84 dB 2400.00 MHz	Complied	*1

Note

\*1: Conducted Spurious Emissions measurement was tested for the only frequencies in the non-restricted carrier band edges, since the spurious emissions in other non-restricted band were complied with Radiated Spurious Emissions measurement.

\*2: This item was not applied to the EUT since its transmission is stopped when the battery is being charged by the PC connected to AC Power-line.

#### Other requirements

Part 15.31(e) Supply voltage requirement

: Complied (The EUT was tested with a new battery.)

Part 15.203 / 212 Antenna requirement

: Complied (The EUT has an internal antenna which cannot be replaced by users.)

### 1.3. Tested Methodology

Test Standard : 47 CFR Part15 Subpart C  
 Test Method : ANSI C63.10 - 2013  
 KDB 558074 D01 15.247 Meas Guidance v05r02

Test Condition

Radiated Spurious Emissions

Test Distance :  3 m  10m (9 kHz to 30 MHz)  
 3 m  10m (30 MHz to 1000 MHz)  
 3 m (1 GHz to 26.5 GHz)

Dimensions of the EUT table : 0.8 m (below 1 GHz) or 1.5 m (above 1 GHz) height, 1.5m width and 1m depth.

Dimensions of validated test volume : 2.0 m diameter, 3.5 m top height, 0 m bottom height.

### 1.4. Measurement Procedures

We performed the measurements in accordance with NV3-12, available upon the request.

- No deviation
- Deviation from the above procedure

The summary of the above procedure is mentioned below

#### Antenna-port Conducted Measurements

1. Antenna-port of the EUT was connected to the power sensor (Maximum Peak Conducted Output Power) or the spectrum analyzer. (other test items).
2. For each EUT operation mode, the Antenna-port Conducted Measurements were measured with the power sensor or the spectrum analyzer.

Test Item	Detector	RBW
Antenna-port Conducted Measurements		
20dB Bandwidth	Peak	30 kHz
Carrier Frequency Separation	Peak	100 kHz
Number of Hopping Frequencies	Peak	100 kHz
Time of Occupancy (Dwell Time)	Peak	1 MHz
Maximum Peak Conducted Output Power	Peak	-
Conducted Spurious Emissions for Band Edge	Peak	100 kHz

#### Radiated Spurious Emissions

1. The non-conductive table (EUT table) made of ( FRP,  Styrene Foam,  other non-conductive material) was placed in the center of the turntable.
2. The EUT was placed on the center of the tabletop.
3. The test antenna was placed away from the EUT at test distance.
4. The limits were compensated the distance factor with follows;  
 9 kHz to 490 kHz [Limit at 3 m] = [Limit at 300 m] + 40log (300[m] / 3[m])  
 490 kHz to 30 MHz [Limit at 3 m] = [Limit at 30 m] + 40log (30[m] / 3[m])
5. Find the worst arrangement of the EUT according to follows;
  - Rotating the turntable and/or scanning the antenna.
  - On every condition, exploring the highest emissions with the spectrum analyzer. (9 kHz to 26.5 GHz, peak detector)

6. On the worst arrangement of the EUT found in above, choose the six highest harmonics or spurious emissions on the spectrum data.(\*excluding carrier band edges)

The final measurements of all test operating modes carried out on these emissions as follows:

The test antenna and the turntable were performed with follows:

	9 kHz to 30 MHz	30 MHz to 1000 MHz	1 GHz to 26.5 GHz
Antenna	Loop Antenna	Bi-conical Antenna, Log-periodic Antenna	Horn Antenna
Antenna scanning range	1 m, Vertical, 360 degrees	1 m to 4 m, Horizontal and Vertical	1 m to 4 m *, Horizontal and Vertical
Turntable rotating range	360 degrees	360 degrees	360 degrees

\*: When the measurement frequencies above 1 GHz, final measurements are performed keeping the antenna in the "cone of radiation" from EUT area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.

Instruments settings were carried out with follows:

	9 kHz to 90 kHz 110 kHz to 490 kHz	90 kHz to 110 kHz 490 kHz to 30 MHz	30 MHz to 1000 MHz	1 GHz to 26.5 GHz
Detector	Peak / Average	Quasi-peak	Quasi-peak	Peak / Average
RBW	200 Hz (6 dB) or 9 kHz (6 dB) *1	200 Hz (6 dB) or 9 kHz (6 dB) *1	120 kHz (6 dB)	1 MHz (6 dB)
VBW	N/A	N/A	N/A	3 MHz (for peak) 10 kHz (for average) *2
Instrument	EMI test receiver	EMI test receiver	EMI test receiver	Spectrum analyzer

\*1: When the measurement frequencies below 150 kHz, RBW: 200 Hz was used.

\*2: VBW setting (for average) was higher than 1/T. (T is the minimum transmission duration)

7. If the final measurement result exceeded the limit in non-restricted band(excluding carrier band edges), the measurement is carried out additionally with follows:

Measurement points

- Fundamental Frequency
- Frequency that exceeded the limit in non-restricted band (excluding carrier band edges)

	9 kHz to 150 kHz	150 kHz to 30 MHz	30 MHz to 26.5 GHz
Detector	Peak	Peak	Peak
RBW	300 Hz (6 dB) *	10 kHz (6 dB) *	100 kHz (6 dB)
Instrument	Spectrum analyzer	Spectrum analyzer	Spectrum analyzer

\*: Correction factor of RBW was compensated to a measurement result by the following formula.

$$\text{C.F. of RBW [dB]} = 10 * \log (100 \text{ kHz} / \text{used RBW})$$

Measurement points in restricted band (for average result)

- Duty Cycle Correction Factor in any 100ms at measurement point

8. Although these tests for below 30MHz were performed other than open field area test site, adequate comparison measurements were confirmed against 30 m open field area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.

Further these test for above 1GHz were performed test site complied with CISPR 16-1-4.

In the case of EUT size smaller than the validated test volume, the antenna position is adjusted such that the distance between the EUT and the antenna reference point is identical to the 3m used for the S-VSWR validation measurements. These method based on clause 7.3.1 of CISPR16-1-4 Edition 4, therefore correcting distance factor is not applied.

**1.5. Test Location**

Test Facility Name : Sony Global Manufacturing & Operations Corporation  
EMC/RF Test Laboratory, Main Lab.  
Address : 8-4 Shiomi Kisarazu-shi Chiba-ken, 292-0834, Japan  
Phone : +81 438 37 2750

A2LA Certificate No. : 3203.01  
Cert. Validated Date : October 31, 2021

Antenna-port Conducted Measurements

Shielded Room

 4th Site SR1Radiated Spurious Emissions

Semi-Anechoic chamber

 4th Site  EMC Site**1.6. Uncertainty**

Test Item	Frequency	4th Site SR1
Maximum Conducted Output Power	1 GHz to 6 GHz	± 0.84 dB
Conducted Spurious Emissions	below 6 GHz	± 0.92 dB

Test Item	Frequency	Distance	4th Site	EMC Site
AC Power-line Conducted Emissions	150 kHz to 30 MHz	-	± 3.34 dB	± 3.35 dB
Radiated Emissions	9 kHz to 30 MHz	3m	± 2.60 dB	± 3.13 dB
	30 MHz to 1000 MHz	3m	± 4.96 dB	± 5.26 dB
	1 GHz to 18 GHz	3m	± 5.68 dB	± 5.94 dB
	18 GHz to 26.5 GHz	3m	± 4.66 dB	± 4.98 dB

## 2. Test Specification

### 2.1. Validation

The system was configured for testing in a typical (as a customer would normally use it).  
The tests were conducted with the worst-case modes as follows.

### 2.2. Operating Condition

The tests have been carried out the following conditions.

[ Transmitting mode ]

Test Items	Test Channels	Packet Type *1 *2 *3
Radiated Spurious Emissions (below 1GHz) *4	2402 MHz	BDR : DH5
20dB Bandwidth, Maximum Peak Conducted Output Power, Radiated Spurious Emissions (above 1GHz)	2402 MHz 2441 MHz 2480 MHz	BDR : DH5 EDR : 3DH5
Carrier Frequency Separation, Number of Hopping Frequencies, Time of Occupancy (Dwell Time)	Hopping ON	BDR : DH5 EDR : 3DH5
Conducted Spurious Emissions for Band Edge	2402 MHz	BDR : DH5 EDR : 3DH5

Note

\*1: Inquiry mode was not performed based on the result of pre-compliance testing.

\*2: The worst packet type has been decided based on the result of maximum duty cycle and pre-compliance testing in the actual product specification.

\*3: Packet type for EDR has been decided based on the result of Maximum Peak Conducted Output Power.

\*4: The test was performed with the representative mode that had been found as the worst emissions while exploratory testing.

#### The Software for Operating Mode

Software Name : Earbuds BT Test  
Software Version : 0.27

### 2.3. Special Accessories

Special accessories needed for connecting the EUT to achieve compliance:

Item	Manufacturer	Model No.	Serial No.	Remark
-	-	-	-	-

### 2.4. EUT Modifications

- No equipment modification to achieve compliance to the standard levels was done during the tests.  
 Equipment was modified to achieve compliance to the standard level as below.

Responsible Party Signature

\_\_\_\_\_  
Typed/ Print Name :  
Responsible Party :  
Position :  
Date :

## 2.5. Configuration of EUT System

### Antenna-port Conducted Measurements


[ EUT and Associated Equipment (AE) ]

Symbol	EUT/AE	Item	Manufacturer	Model No.	Serial No.
A-1	EUT	Wireless Stereo Headset	SONY	YY2953 (Left Unit)	1120509
A-2	EUT	Wireless Stereo Headset	SONY	YY2953 (Right Unit)	1120509

[ Type of Cable ]

Symbol	Description	Identification (Manufacturer etc.)	Shielded Yes / No	Ferrite Core	Length (m)	Bundled
-	-	-	-	-	-	-

[ Connecting Diagram ]

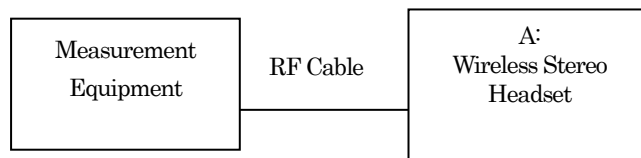

### Radiated Spurious Emissions


[ EUT and Associated Equipment (AE) ]

Symbol	EUT/AE	Item	Manufacturer	Model No.	Serial No.
A-1	EUT	Wireless Stereo Headset	SONY	YY2953 (Left Unit)	1120521
A-2	EUT	Wireless Stereo Headset	SONY	YY2953 (Right Unit)	1120521

[ Type of Cable ]

Symbol	Description	Identification (Manufacturer etc.)	Shielded Yes / No	Ferrite Core	Length (m)	Bundled
-	-	-	-	-	-	-

[ Connecting Diagram ]

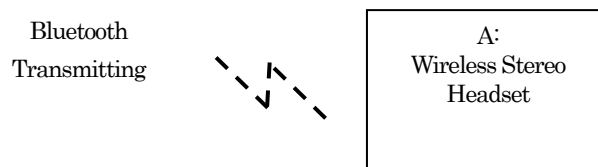





## 2.6. Typical setup arrangement

### Radiated spurious emissions


< 9 kHz - 30 MHz >

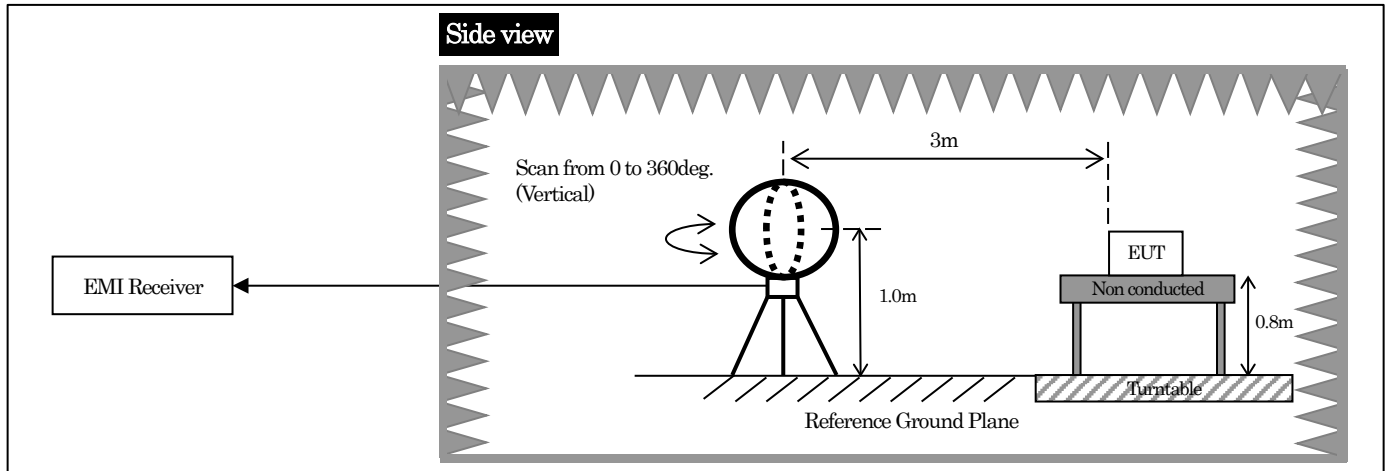

< 30 MHz - 1000 MHz >

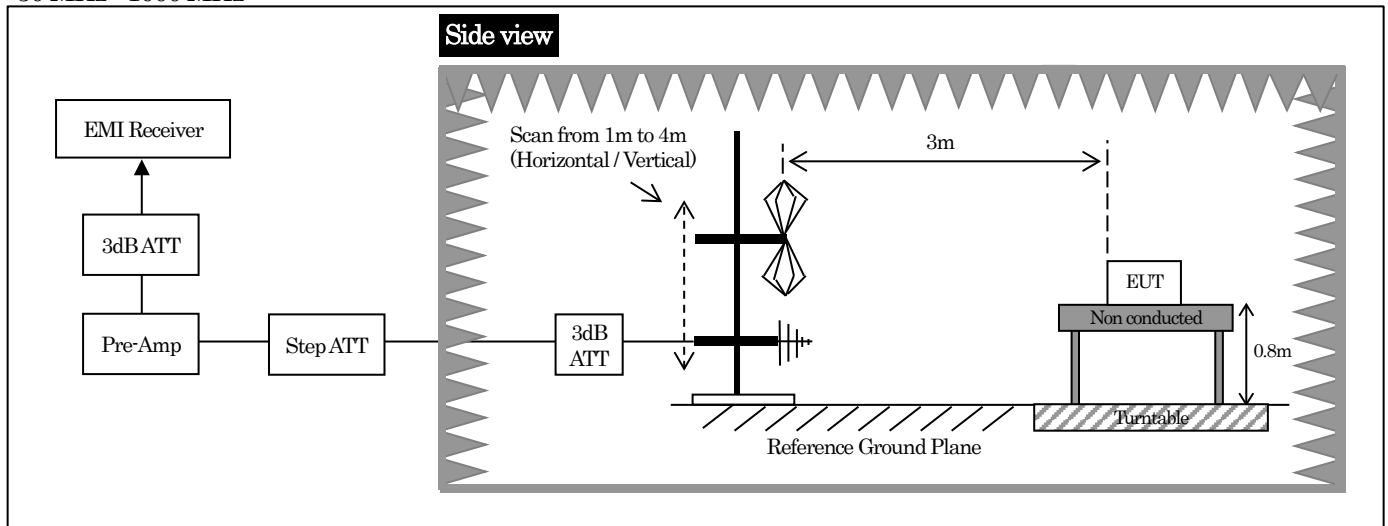

< 1 GHz - 26.5 GHz >

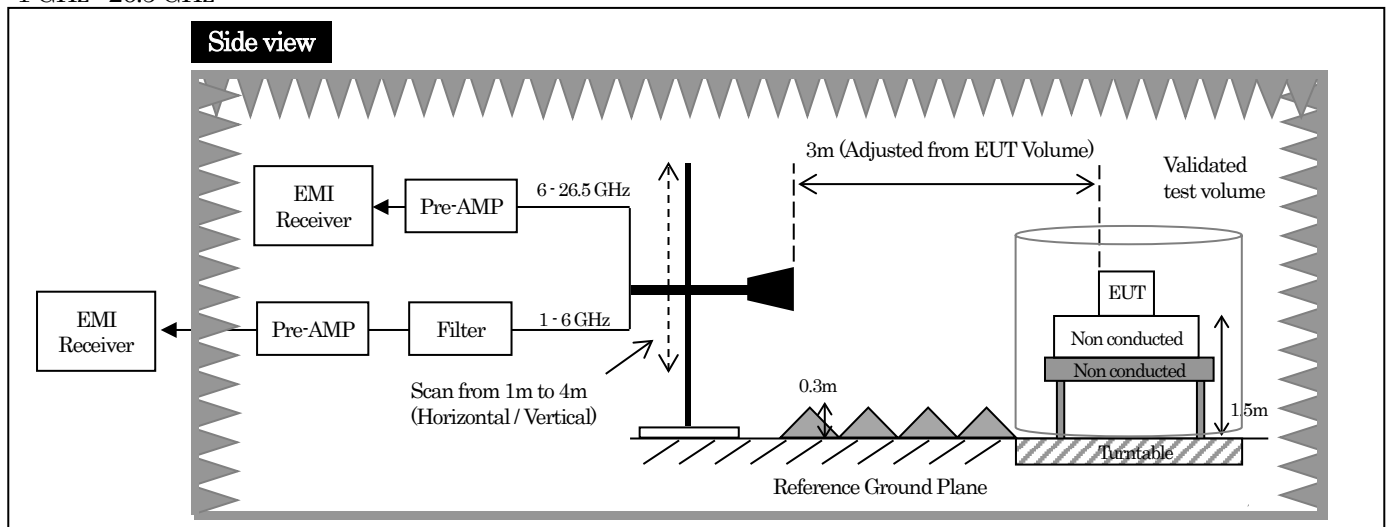

### 3. Test Data


#### 3.1. 20dB Bandwidth

##### Left Unit

Date of measurement	Ambient temperature	Relative humidity	Measured by
June 9, 2021	23.2 deg.C	66.0 %	Mikiko Kouga

Mode		Channel [MHz]	Result [MHz]	Limit [MHz]
BDR	DH5	2402	0.943	-
		2441	0.941	-
		2480	0.941	-
EDR	3DH5	2402	1.247	-
		2441	1.247	-
		2480	1.247	-


[BDR / 2402 MHz]

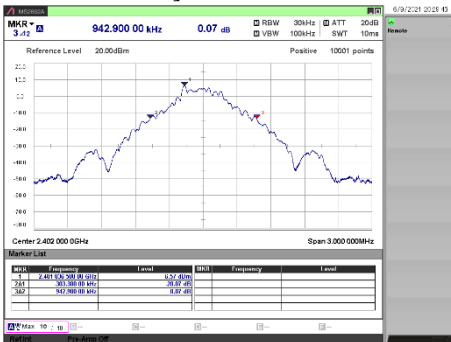


[BDR / 2441 MHz]




[BDR / 2480 MHz]

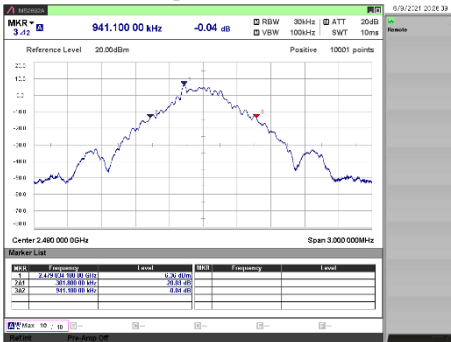


[EDR / 2402 MHz]

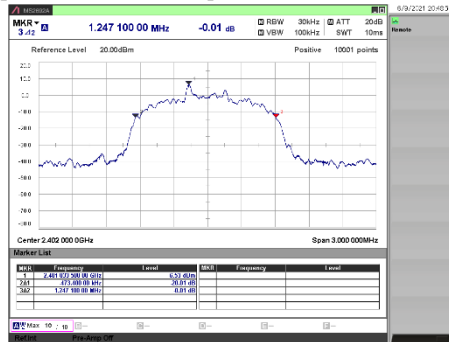

[EDR / 2441 MHz]

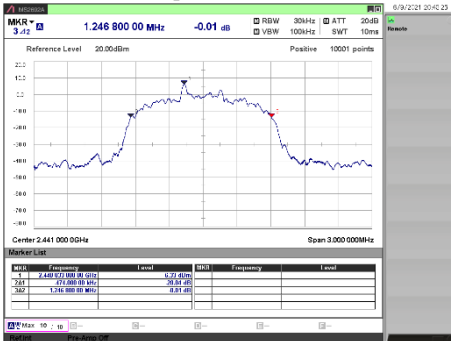

[EDR / 2480 MHz]

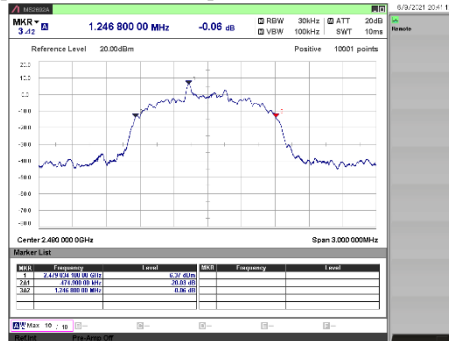

**Right Unit**


Date of measurement	Ambient temperature	Relative humidity	Measured by
June 9, 2021	23.2 deg.C	66.0 %	Mikiko Kouga

Mode		Channel [MHz]	Result [MHz]	Limit [MHz]
BDR	DH5	2402	0.941	-
		2441	0.941	-
		2480	0.941	-
EDR	3DH5	2402	1.247	-
		2441	1.247	-
		2480	1.246	-


[BDR / 2402 MHz]




[BDR / 2441 MHz]

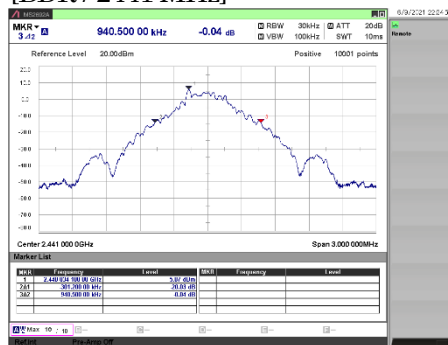


[BDR / 2480 MHz]

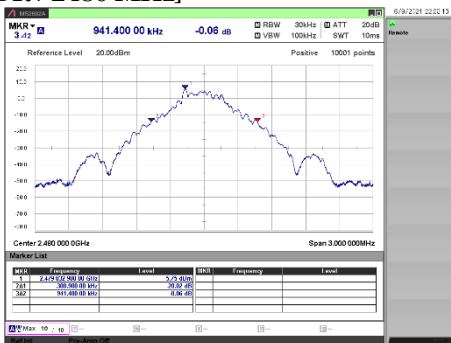


[EDR / 2402 MHz]

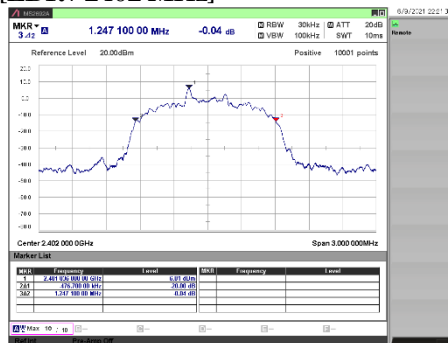

[EDR / 2441 MHz]

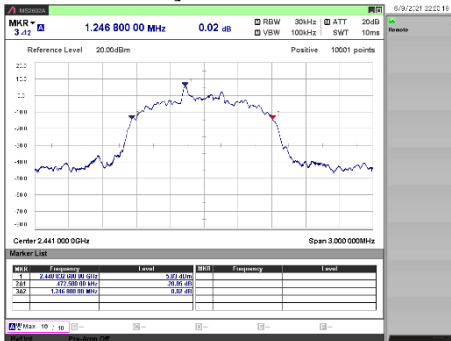

[EDR / 2480 MHz]

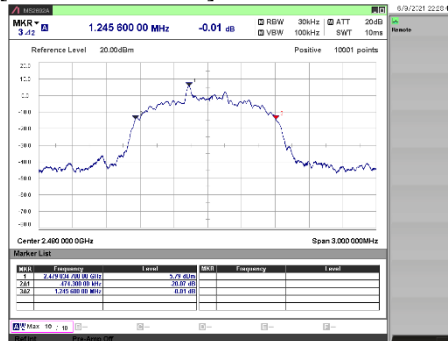


### 3.2. Carrier Frequency Separation

#### Left Unit


Date of measurement	Ambient temperature	Relative humidity	Measured by
June 9, 2021	23.2 deg.C	66.0 %	Mikiko Kouga

Mode		Reading [kHz]	Limit [kHz]
BDR	DH5	1011.0	≥ 628.6
EDR	3DH5	1003.5	≥ 831.4

[BDR]

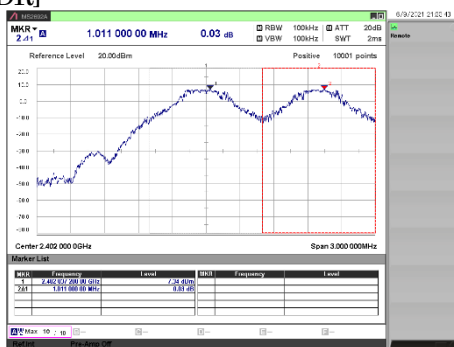

[EDR]

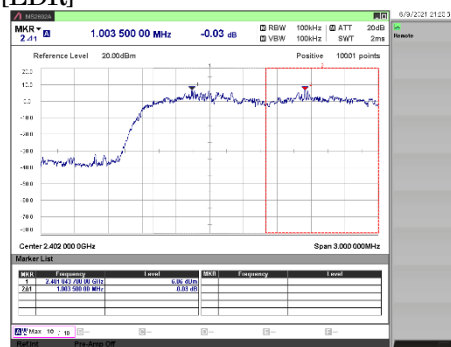


#### Right Unit


Date of measurement	Ambient temperature	Relative humidity	Measured by
June 9, 2021	23.2 deg.C	66.0 %	Mikiko Kouga

Mode		Reading [kHz]	Limit [kHz]
BDR	DH5	972.6	≥ 627.6
EDR	3DH5	985.2	≥ 831.4

[BDR]

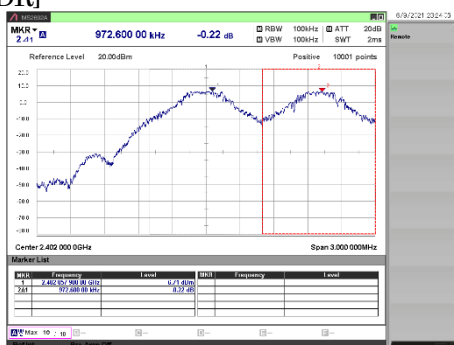

[EDR]

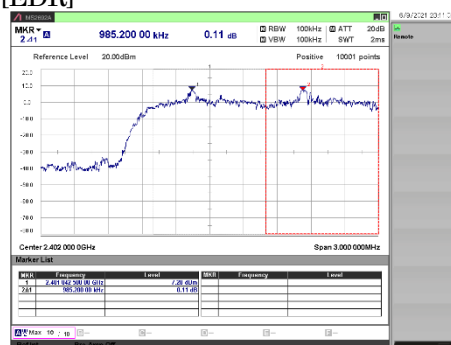


### 3.3. Number of Hopping Frequencies

#### Left Unit


Date of measurement	Ambient temperature	Relative humidity	Measured by
June 9, 2021	23.2 deg.C	66.0 %	Mikiko Kouga

Mode		Number [channel]	Limit [channel]
BDR	DH5	79	≥ 15
EDR	3DH5	79	≥ 15

[BDR]

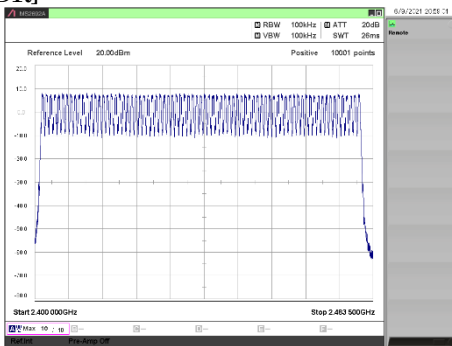

[EDR]

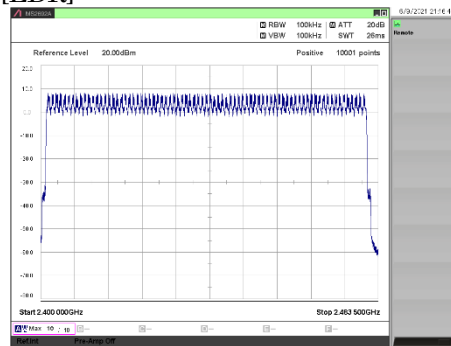


#### Right Unit


Date of measurement	Ambient temperature	Relative humidity	Measured by
June 9, 2021	23.2 deg.C	66.0 %	Mikiko Kouga

Mode		Number [channel]	Limit [channel]
BDR	DH5	79	≥ 15
EDR	3DH5	79	≥ 15

[BDR]

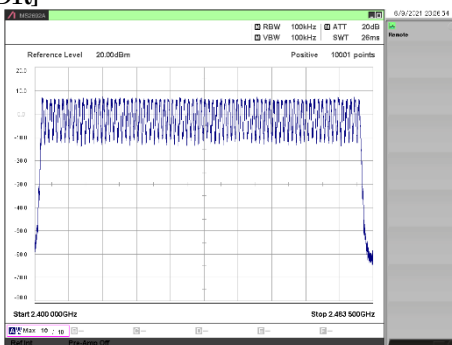

[EDR]

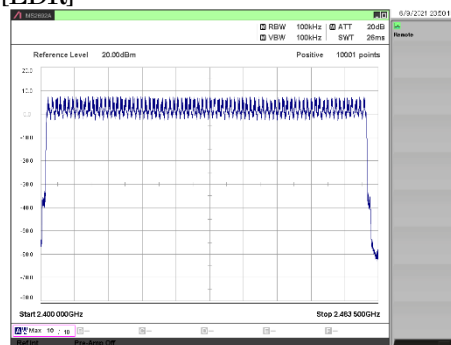



### 3.4. Time of Occupancy (Dwell Time)

#### Left Unit



Date of measurement	Ambient temperature	Relative humidity	Measured by
June 9, 2021	23.2 deg.C	66.0 %	Mikiko Kouga

Mode	Channel [MHz]	Dwell Time [msec]	Cycle [time]	Result [msec]	Limit [msec]	
BDR	DH5	2402	2.88	17.0	309.0	≤ 400.0
		2441	2.88	17.0	309.0	≤ 400.0
		2480	2.88	17.0	309.0	≤ 400.0
EDR	3DH5	2402	2.88	17.0	309.4	≤ 400.0
		2441	2.88	17.0	309.4	≤ 400.0
		2480	2.88	17.0	309.4	≤ 400.0



[BDR / 2402 MHz]

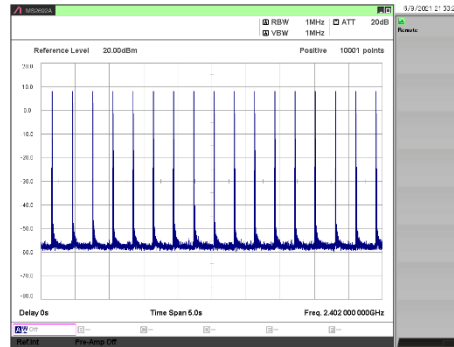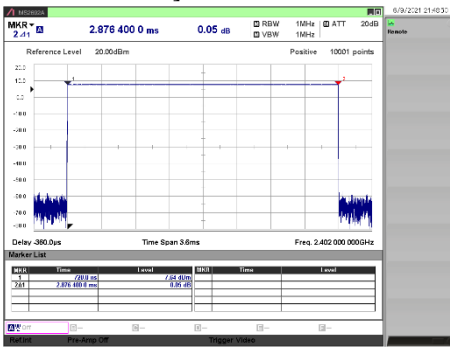



[BDR / 2441 MHz]

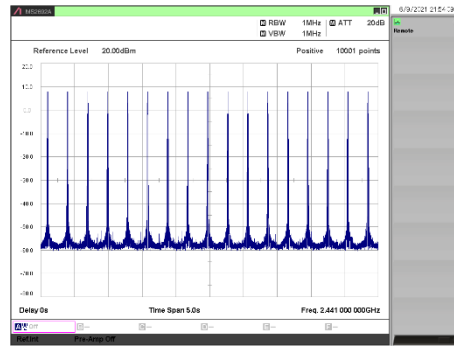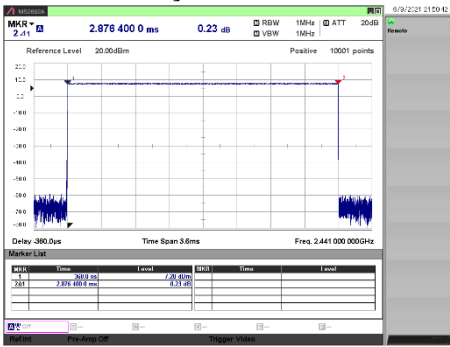



[BDR / 2480 MHz]

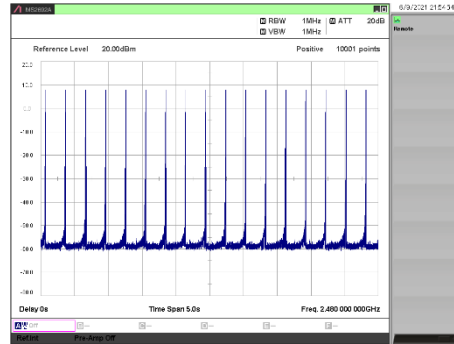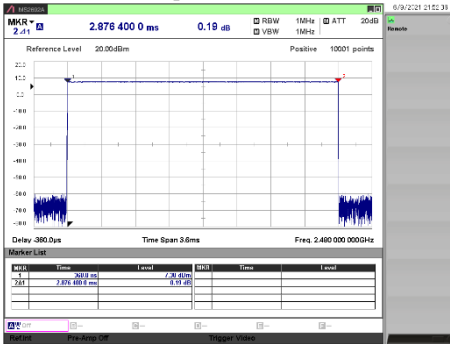



[EDR / 2402 MHz]

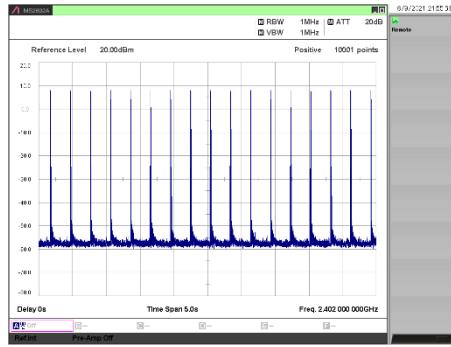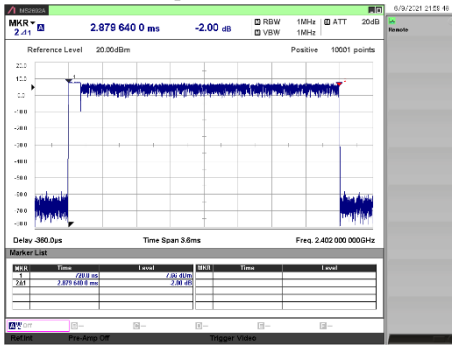

[EDR / 2441 MHz]

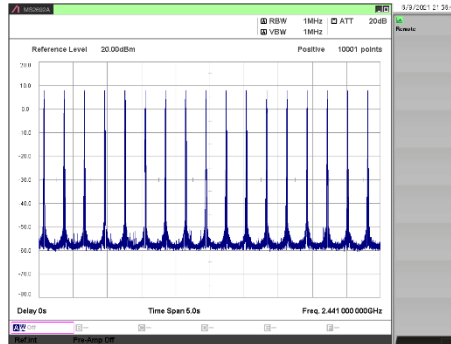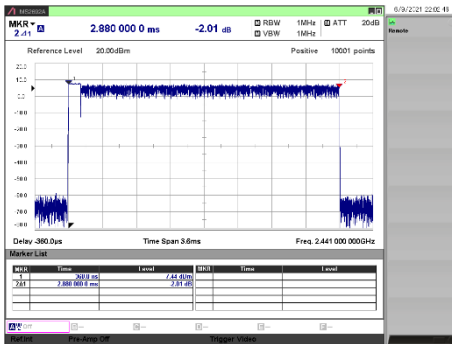

[EDR / 2480 MHz]

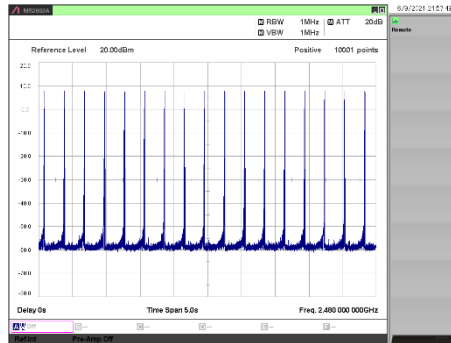
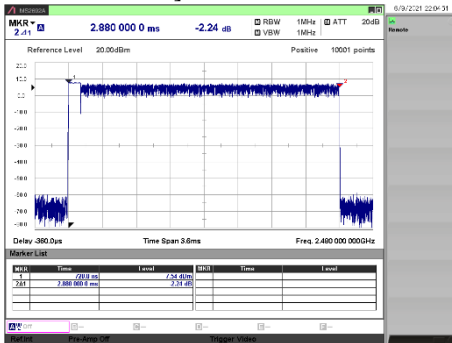


**Right Unit**



Date of measurement	Ambient temperature	Relative humidity	Measured by
June 9, 2021	23.2 deg.C	66.0 %	Mikiko Kouga

Mode	Channel [MHz]	Dwell Time [msec]	Cycle [time]	Result [msec]	Limit [msec]	
BDR	DH5	2402	2.88	17.0	309.0	≤ 400.0
		2441	2.88	17.0	309.0	≤ 400.0
		2480	2.88	17.0	309.0	≤ 400.0
EDR	3DH5	2402	2.88	17.0	309.4	≤ 400.0
		2441	2.88	17.0	309.4	≤ 400.0
		2480	2.88	17.0	309.4	≤ 400.0



[BDR / 2402 MHz]

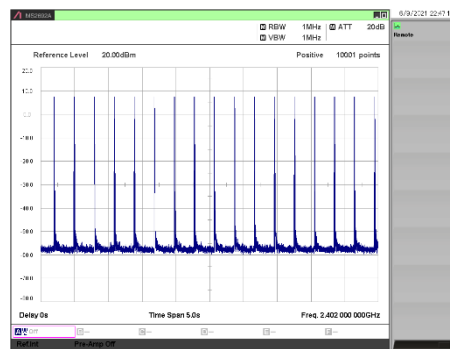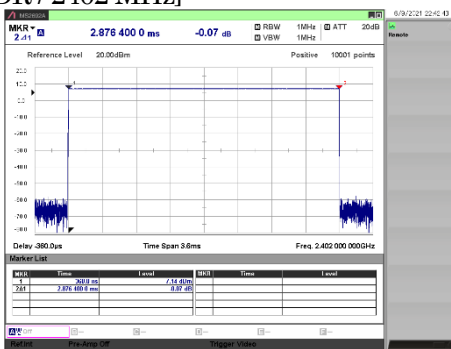

[BDR / 2441 MHz]

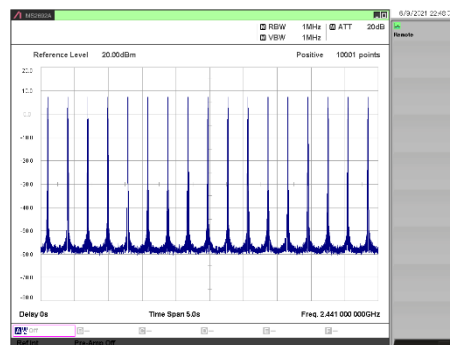
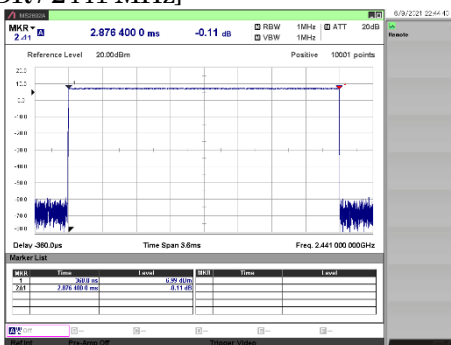


[BDR / 2480 MHz]

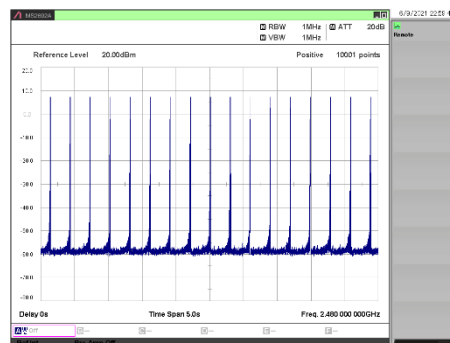
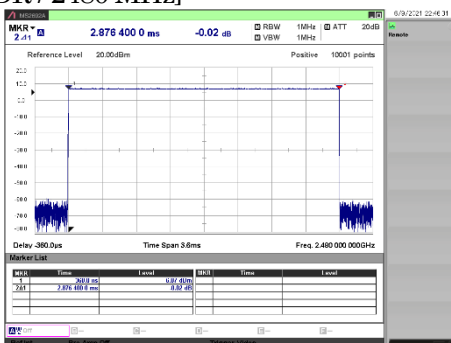






[EDR / 2402 MHz]

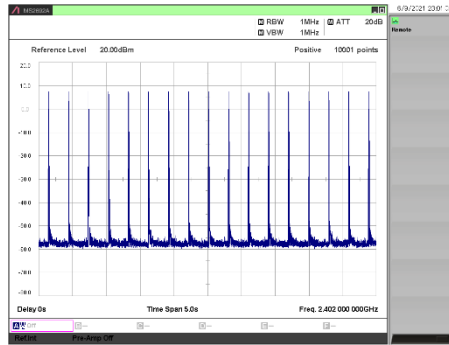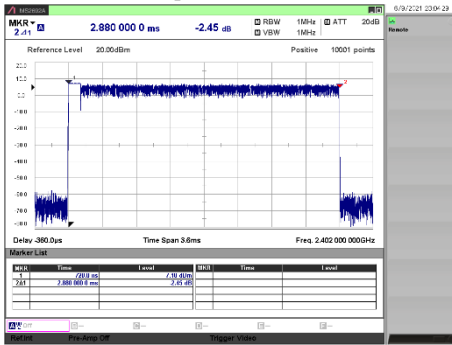

[EDR / 2441 MHz]

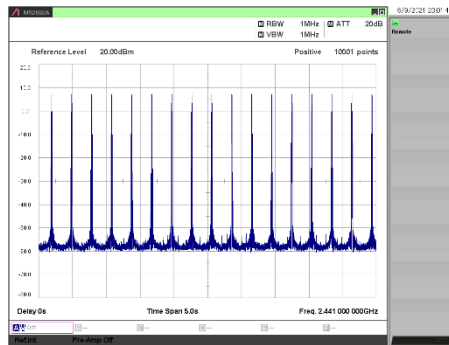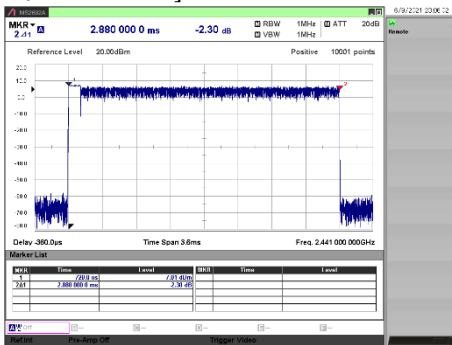

[EDR / 2480 MHz]

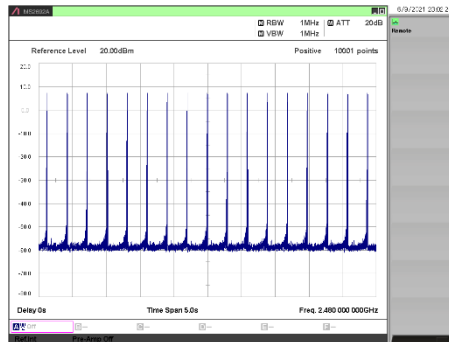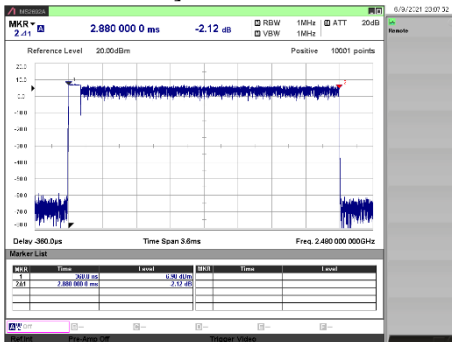

## 3.5. Maximum Peak Conducted Output Power

Left Unit

Date of measurement	Ambient temperature	Relative humidity	Measured by
June 2, 2021	24.2 deg.C	62.5 %	Mikiko Kouga
June 8, 2021	23.2 deg.C	66.5 %	Mikiko Kouga

## Maximum Peak Conducted Output Power

Mode	Channel [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result(PK) [dBm]	Result(PK) [W]	Limit [dBm]	Limit [W]	Margin [dB]	
BDR	DH5	2402	8.41	0.81	9.22	0.00836	≤ 20.97	≤ 0.125	11.75
		2441	8.37	0.81	9.18	0.00828	≤ 20.97	≤ 0.125	11.79
		2480	8.32	0.81	9.13	0.00818	≤ 20.97	≤ 0.125	11.84
EDR	2DH5	2402	8.40	0.81	9.21	0.00834	≤ 20.97	≤ 0.125	11.76
		2441	8.37	0.81	9.18	0.00828	≤ 20.97	≤ 0.125	11.79
		2480	8.36	0.81	9.17	0.00826	≤ 20.97	≤ 0.125	11.80
	3DH5	2402	8.59	0.81	9.40	0.00871	≤ 20.97	≤ 0.125	11.57
		2441	8.50	0.81	9.31	0.00853	≤ 20.97	≤ 0.125	11.66
		2480	8.49	0.81	9.30	0.00851	≤ 20.97	≤ 0.125	11.67

## Duty Cycle check

Mode	Channel [MHz]	T(on+off) [msec]	T(on) [msec]	Duty Cycle [%]	
BDR	DH1	2441	1.250	0.373	29.84
	DH3	2441	2.500	1.629	65.16
	DH5	2441	3.750	2.877	76.72
EDR	2DH1	2441	1.250	0.378	30.27
	2DH3	2441	2.500	1.631	65.22
	2DH5	2441	3.750	2.878	76.74
	3DH1	2441	1.250	0.379	30.29
	3DH3	2441	2.500	1.630	65.18
	3DH5	2441	3.750	2.880	76.81

**Right Unit**

Date of measurement	Ambient temperature	Relative humidity	Measured by
June 2, 2021	24.2 deg.C	62.5 %	Mikiko Kouga
June 8, 2021	23.2 deg.C	66.5 %	Mikiko Kouga

**Maximum Peak Conducted Output Power**

Mode		Channel [MHz]	Reading(PK) [dBm]	C.F. [dB]	Result(PK) [dBm]	Result(PK) [W]	Limit [dBm]	Limit [W]	Margin [dB]
BDR	DH5	2402	7.95	0.81	8.76	0.00752	≤ 20.97	≤ 0.125	12.21
		2441	7.93	0.81	8.74	0.00748	≤ 20.97	≤ 0.125	12.23
		2480	7.77	0.81	8.58	0.00721	≤ 20.97	≤ 0.125	12.39
EDR	2DH5	2402	7.94	0.81	8.75	0.00750	≤ 20.97	≤ 0.125	12.22
		2441	7.87	0.81	8.68	0.00738	≤ 20.97	≤ 0.125	12.29
		2480	7.78	0.81	8.59	0.00723	≤ 20.97	≤ 0.125	12.38
	3DH5	2402	8.10	0.81	8.91	0.00778	≤ 20.97	≤ 0.125	12.06
		2441	8.07	0.81	8.88	0.00773	≤ 20.97	≤ 0.125	12.09
		2480	7.96	0.81	8.77	0.00753	≤ 20.97	≤ 0.125	12.20

**Duty Cycle check**

Mode		Channel [MHz]	T(on+off) [msec]	T(on) [msec]	Duty Cycle [%]
BDR	DH1	2441	1.250	0.373	29.84
	DH3	2441	2.500	1.629	65.16
	DH5	2441	3.750	2.877	76.71
EDR	2DH1	2441	1.250	0.379	30.29
	2DH3	2441	2.500	1.631	65.22
	2DH5	2441	3.750	2.878	76.73
	3DH1	2441	1.250	0.378	30.27
	3DH3	2441	2.500	1.630	65.20
	3DH5	2441	3.750	2.880	76.79



### 3.6. Radiated Spurious Emissions

#### Left Unit

Measurement band	Date of measurement	Ambient temperature	Relative humidity	Measured by
9 kHz to 1000 MHz	June 17, 2021	24.0 deg.C	60.0 %	Yosuke Kamiko
1 GHz to 6 GHz	June 10, 2021	23.0 deg.C	65.0 %	Yosuke Kamiko
	June 11, 2021	21.0 deg.C	66.0 %	Taito Nakamura, Yosuke Kamiko
	June 12, 2021	22.0 deg.C	54.0 %	Yosuke Kamiko
	June 14, 2021	23.0 deg.C	68.0 %	Taito Nakamura
6 GHz to 18 GHz	June 14, 2021	23.0 deg.C	68.0 %	Yosuke Kamiko
	June 15, 2021	22.0 deg.C	67.0 %	Yosuke Kamiko
18 GHz to 26.5 GHz	June 15, 2021	22.0 deg.C	67.0 %	Yosuke Kamiko
	June 16, 2021	22.0 deg.C	58.0 %	Yosuke Kamiko

#### 9 kHz to 1000 MHz [BDR (DH5) / 2402 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position
31.312	QP	H	21.2	-7.3	13.9	$\leq 40.0$	26.1	131.0	214.7	Z
859.897	QP	H	21.2	-0.3	20.9	$\leq 46.0$	25.1	100.2	0.2	Z
949.665	QP	H	21.1	1.1	22.2	$\leq 46.0$	23.8	202.8	352.8	Z
0.619	QP	V	38.4	19.6	58.0	$\leq 71.8$	13.8	100.0	355.3	Z
0.840	QP	V	35.2	19.6	54.8	$\leq 69.1$	14.3	100.0	279.1	Z
32.685	QP	V	21.5	-7.8	13.7	$\leq 40.0$	26.3	320.0	254.1	Z
193.664	QP	V	20.9	-7.7	13.2	$\leq 43.5$	30.3	229.0	265.1	Z
954.883	QP	V	21.1	1.2	22.3	$\leq 46.0$	23.7	328.0	78.3	Z

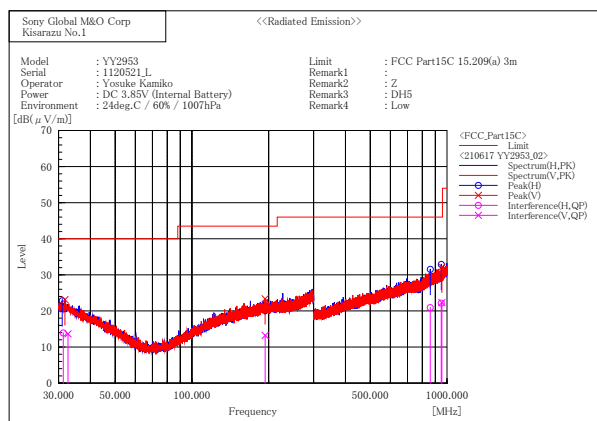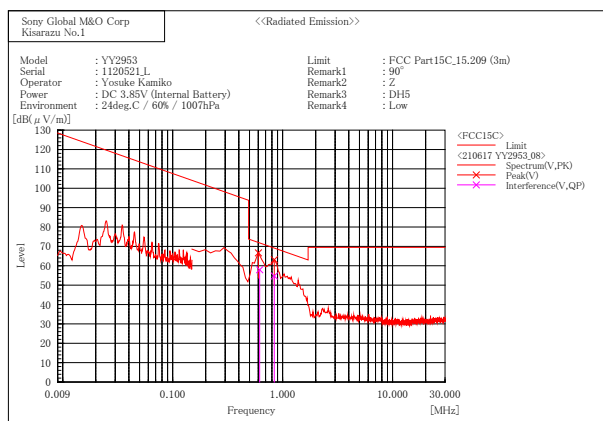

1 GHz to 26.5 GHz

\* Although "Height" in radiated emissions data, which shows the height of the boom of the antenna mast, might exceed 400.0 cm. because of the antenna tilt positioner attached to the edge of the boom for the bore-sighting measurement, the height of the reference point of the antenna does not exceed 400.0 cm.

[BDR (DH5) / 2402 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	DCCF [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
2390.000	AV	H	37.6	5.3	-	42.9	≤ 54.0	11.1	115.7	126.0	Z	10.0
2390.000	PK	H	47.9	5.3	-	53.2	≤ 74.0	20.8	119.7	127.4	Z	-
4804.000	AV	H	29.1	13.6	-	42.7	≤ 54.0	11.3	224.6	53.7	Z	10.0
4804.000	PK	H	39.8	13.6	-	53.4	≤ 74.0	20.6	219.4	54.6	Z	-
12010.000	AV	H	35.9	-2.6	-	33.3	≤ 54.0	20.7	213.0	341.9	Z	10.0
12010.000	PK	H	45.5	-2.6	-	42.9	≤ 74.0	31.1	213.0	344.9	Z	-
19216.000	AV	H	37.1	-0.8	-	36.3	≤ 54.0	17.7	409.2	210.4	Z	10.0
19216.000	PK	H	46.4	-0.8	-	45.6	≤ 74.0	28.4	409.2	208.3	Z	-
2390.000	AV	V	37.6	5.3	-	42.9	≤ 54.0	11.1	359.1	45.1	Z	10.0
2390.000	PK	V	47.2	5.3	-	52.5	≤ 74.0	21.5	356.1	46.0	Z	-
4804.000	AV	V	28.6	13.6	-	42.2	≤ 54.0	11.8	215.9	75.7	Z	10.0
4804.000	PK	V	39.1	13.6	-	52.7	≤ 74.0	21.3	215.0	76.4	Z	-
12010.000	AV	V	36.0	-2.6	-	33.4	≤ 54.0	20.6	338.0	348.9	Z	10.0
12010.000	PK	V	45.8	-2.6	-	43.2	≤ 74.0	30.8	344.1	6.7	Z	-
19216.000	AV	V	36.8	-0.8	-	36.0	≤ 54.0	18.0	409.5	105.7	Z	10.0
19216.000	PK	V	46.6	-0.8	-	45.8	≤ 74.0	28.2	408.5	108.3	Z	-

[BDR (DH5) / 2441 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	DCCF [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
4882.000	AV	H	29.4	13.5	-	42.9	≤ 54.0	11.1	218.4	250.8	Z	10.0
4882.000	PK	H	38.7	13.5	-	52.2	≤ 74.0	21.8	217.0	255.8	Z	-
12205.000	AV	H	36.2	-2.7	-	33.5	≤ 54.0	20.5	114.9	125.9	Z	10.0
12205.000	PK	H	45.5	-2.7	-	42.8	≤ 74.0	31.2	110.7	124.7	Z	-
19528.000	AV	H	37.2	-0.7	-	36.5	≤ 54.0	17.5	191.5	66.5	Z	10.0
19528.000	PK	H	46.8	-0.7	-	46.1	≤ 74.0	27.9	194.0	68.6	Z	-
4882.000	AV	V	29.1	13.5	-	42.6	≤ 54.0	11.4	100.0	7.2	Z	10.0
4882.000	PK	V	39.5	13.5	-	53.0	≤ 74.0	21.0	100.0	18.3	Z	-
12205.000	AV	V	36.0	-2.7	-	33.3	≤ 54.0	20.7	104.7	97.2	Z	10.0
12205.000	PK	V	46.7	-2.7	-	44.0	≤ 74.0	30.0	105.0	94.3	Z	-
19528.000	AV	V	37.0	-0.7	-	36.3	≤ 54.0	17.7	166.0	50.7	Z	10.0
19528.000	PK	V	46.5	-0.7	-	45.8	≤ 74.0	28.2	166.3	51.8	Z	-

[BDR (DH5) / 2480 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	DCCF [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
2483.500	AV	H	38.4	5.6	-	44.0	≤ 54.0	10.0	163.3	136.1	Z	10.0
2483.500	PK	H	48.4	5.6	-	54.0	≤ 74.0	20.0	161.0	136.9	Z	-
4960.000	AV	H	29.0	13.9	-	42.9	≤ 54.0	11.1	283.4	91.2	Z	10.0
4960.000	PK	H	39.0	13.9	-	52.9	≤ 74.0	21.1	282.0	92.2	Z	-
12400.000	AV	H	36.2	-3.0	-	33.2	≤ 54.0	20.8	365.8	339.1	Z	10.0
12400.000	PK	H	47.0	-3.0	-	44.0	≤ 74.0	29.9	369.5	344.8	Z	-
19840.000	AV	H	37.2	-0.7	-	36.5	≤ 54.0	17.5	377.3	326.0	Z	10.0
19840.000	PK	H	47.4	-0.7	-	46.7	≤ 74.0	27.3	377.9	324.9	Z	-
2483.500	AV	V	37.8	5.6	-	43.4	≤ 54.0	10.6	301.7	13.8	Z	10.0
2483.500	PK	V	47.3	5.6	-	52.9	≤ 74.0	21.1	301.0	14.4	Z	-
4960.000	AV	V	29.0	13.9	-	42.9	≤ 54.0	11.1	381.3	64.4	Z	10.0
4960.000	PK	V	38.8	13.9	-	52.7	≤ 74.0	21.3	380.0	65.9	Z	-
12400.000	AV	V	36.1	-3.0	-	33.1	≤ 54.0	20.9	297.8	348.7	Z	10.0
12400.000	PK	V	46.0	-3.0	-	43.0	≤ 74.0	31.0	299.6	351.0	Z	-
19840.000	AV	V	37.1	-0.7	-	36.4	≤ 54.0	17.6	304.0	87.1	Z	10.0
19840.000	PK	V	46.8	-0.7	-	46.1	≤ 74.0	27.9	303.7	86.1	Z	-

## [EDR (3DH5) / 2402 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	DCCF [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
2390.000	AV	H	37.2	5.3	-	42.5	≤ 54.0	11.5	109.1	39.9	Z	10.0
2390.000	PK	H	46.9	5.3	-	52.2	≤ 74.0	21.8	108.0	40.6	Z	-
4804.000	AV	H	28.9	13.6	-	42.5	≤ 54.0	11.5	181.0	72.5	Z	10.0
4804.000	PK	H	38.1	13.6	-	51.7	≤ 74.0	22.3	176.0	75.8	Z	-
12010.000	AV	H	36.1	-2.6	-	33.5	≤ 54.0	20.5	420.0	237.7	Z	10.0
12010.000	PK	H	45.7	-2.6	-	43.1	≤ 74.0	30.9	421.3	234.1	Z	-
19216.000	AV	H	37.0	-0.8	-	36.2	≤ 54.0	17.8	261.3	196.1	Z	10.0
19216.000	PK	H	46.8	-0.8	-	46.0	≤ 74.0	28.0	261.0	195.6	Z	-
2390.000	AV	V	37.7	5.3	-	43.0	≤ 54.0	11.0	431.0	95.4	Z	10.0
2390.000	PK	V	47.2	5.3	-	52.5	≤ 74.0	21.5	431.0	100.7	Z	-
4804.000	AV	V	28.7	13.6	-	42.3	≤ 54.0	11.7	298.1	150.2	Z	10.0
4804.000	PK	V	38.2	13.6	-	51.8	≤ 74.0	22.2	298.1	155.5	Z	-
12010.000	AV	V	36.1	-2.6	-	33.5	≤ 54.0	20.5	261.4	186.0	Z	10.0
12010.000	PK	V	45.7	-2.6	-	43.1	≤ 74.0	30.9	261.4	187.9	Z	-
19216.000	AV	V	37.7	-0.8	-	36.9	≤ 54.0	17.1	207.6	257.5	Z	10.0
19216.000	PK	V	46.7	-0.8	-	45.9	≤ 74.0	28.1	100.0	0.5	Z	-

## [EDR (3DH5) / 2441 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	DCCF [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
4882.000	AV	H	28.9	13.5	-	42.4	≤ 54.0	11.6	169.4	36.3	Z	10.0
4882.000	PK	H	38.6	13.5	-	52.1	≤ 74.0	21.9	164.0	37.8	Z	-
12205.000	AV	H	36.3	-2.7	-	33.6	≤ 54.0	20.4	102.5	4.7	Z	10.0
12205.000	PK	H	46.2	-2.7	-	43.5	≤ 74.0	30.5	102.5	8.2	Z	-
19528.000	AV	H	37.6	-0.7	-	36.9	≤ 54.0	17.1	424.3	134.7	Z	10.0
19528.000	PK	H	47.3	-0.7	-	46.6	≤ 74.0	27.4	425.7	134.2	Z	-
4882.000	AV	V	29.2	13.5	-	42.7	≤ 54.0	11.3	181.4	26.4	Z	10.0
4882.000	PK	V	38.8	13.5	-	52.3	≤ 74.0	21.7	179.8	29.1	Z	-
12205.000	AV	V	36.1	-2.7	-	33.4	≤ 54.0	20.6	100.0	254.4	Z	10.0
12205.000	PK	V	45.5	-2.7	-	42.8	≤ 74.0	31.2	100.0	284.0	Z	-
19528.000	AV	V	37.3	-0.7	-	36.6	≤ 54.0	17.4	330.2	311.3	Z	10.0
19528.000	PK	V	47.3	-0.7	-	46.6	≤ 74.0	27.4	332.0	311.2	Z	-

## [EDR (3DH5) / 2480 MHz]


Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	DCCF [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
2483.500	AV	H	37.9	5.6	-	43.5	≤ 54.0	10.5	205.0	171.6	Z	10.0
2483.500	PK	H	47.9	5.6	-	53.5	≤ 74.0	20.5	205.8	172.7	Z	-
4960.000	AV	H	29.5	13.9	-	43.4	≤ 54.0	10.6	128.6	74.7	Z	10.0
4960.000	PK	H	38.5	13.9	-	52.4	≤ 74.0	21.6	128.9	73.2	Z	-
12400.000	AV	H	36.2	-3.0	-	33.2	≤ 54.0	20.8	290.2	92.0	Z	10.0
12400.000	PK	H	46.0	-3.0	-	43.0	≤ 74.0	31.0	291.0	90.1	Z	-
22320.000	AV	H	38.8	-1.9	-	36.9	≤ 54.0	17.1	427.6	248.1	Z	10.0
22320.000	PK	H	47.8	-1.9	-	45.9	≤ 74.0	28.1	423.1	246.3	Z	-
2483.500	AV	V	37.5	5.6	-	43.1	≤ 54.0	10.9	218.0	122.3	Z	10.0
2483.500	PK	V	47.3	5.6	-	52.9	≤ 74.0	21.1	218.0	120.4	Z	-
4960.000	AV	V	29.3	13.9	-	43.2	≤ 54.0	10.9	338.5	124.9	Z	10.0
4960.000	PK	V	38.6	13.9	-	52.5	≤ 74.0	21.5	339.0	125.7	Z	-
12400.000	AV	V	36.3	-3.0	-	33.3	≤ 54.0	20.7	206.1	220.0	Z	10.0
12400.000	PK	V	46.2	-3.0	-	43.2	≤ 74.0	30.8	204.5	218.4	Z	-
22320.000	AV	V	38.5	-1.9	-	36.6	≤ 54.0	17.4	428.6	249.6	Z	10.0
22320.000	PK	V	47.6	-1.9	-	45.7	≤ 74.0	28.3	427.6	246.8	Z	-

Plot data for 2.4 GHz Restricted-Band Edge


These plot data show peak (trace blue) and average (trace black) spectrum for worst case emissions in the restricted-band edges. (Restricted band edges: below 2390 MHz and above 2483.5 MHz)

The result of the final radiated spurious emissions measurement refers in previous pages.


[BDR / 2402 MHz]

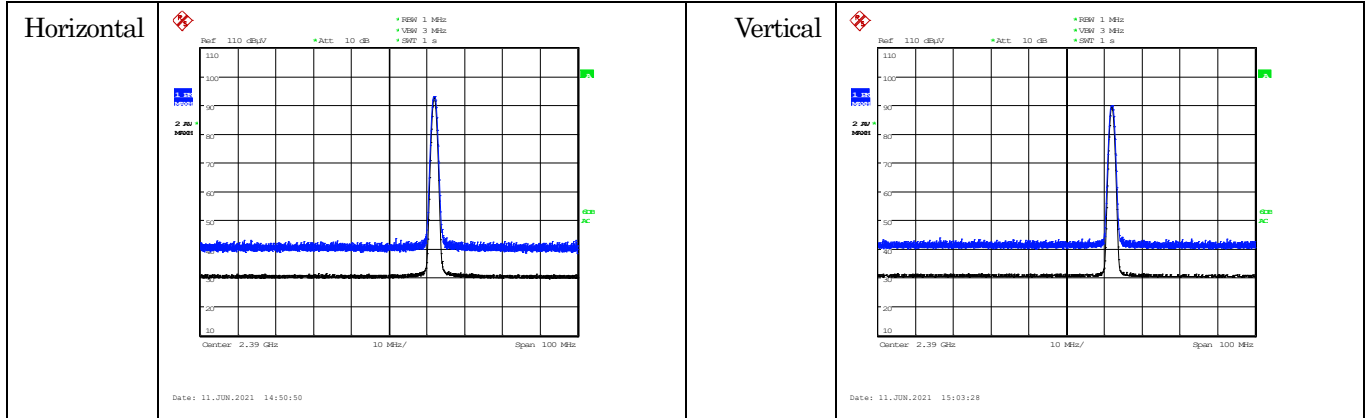


[BDR / 2480 MHz]

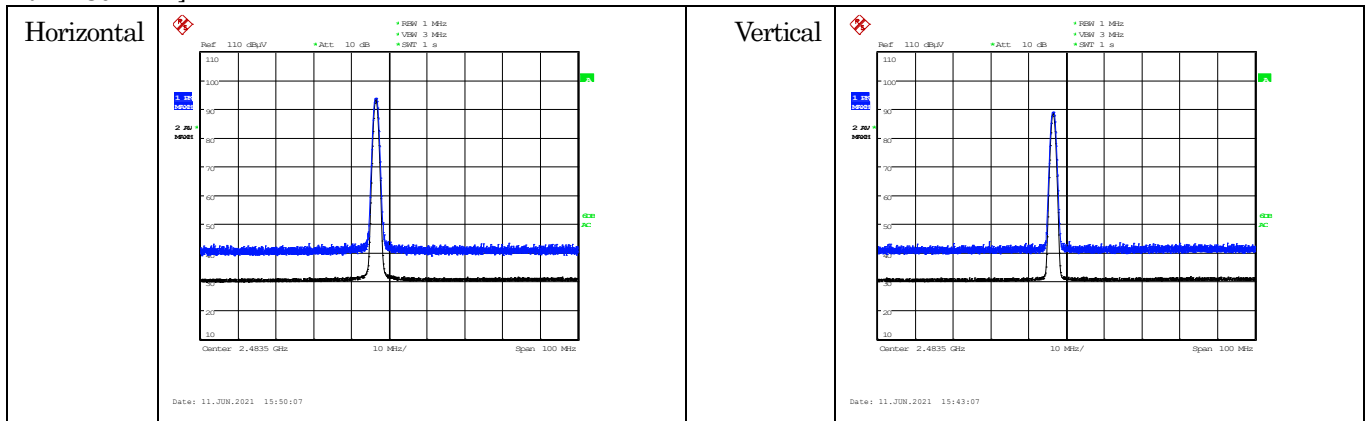

[EDR / 2402 MHz]






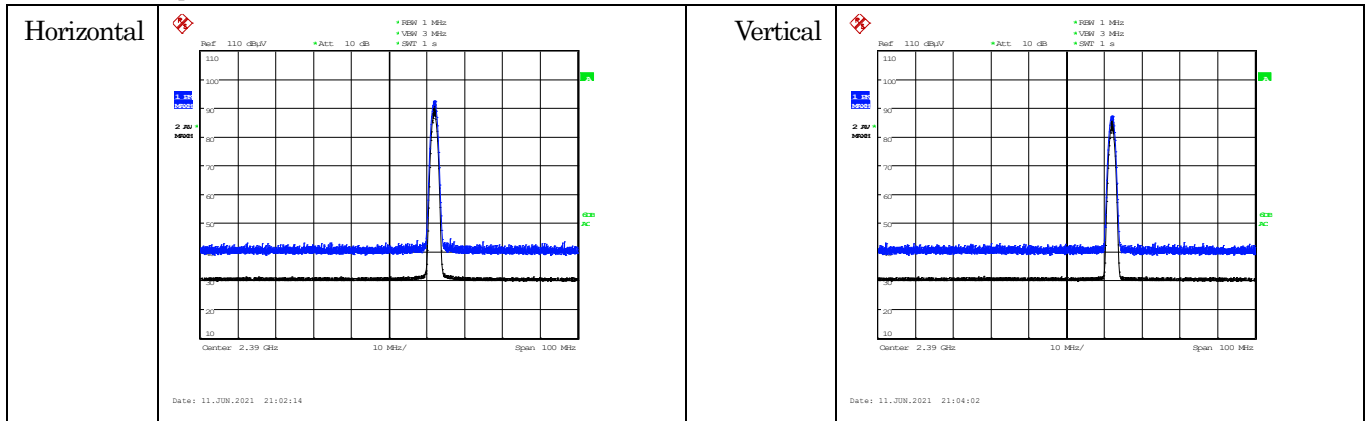


[EDR / 2480 MHz]

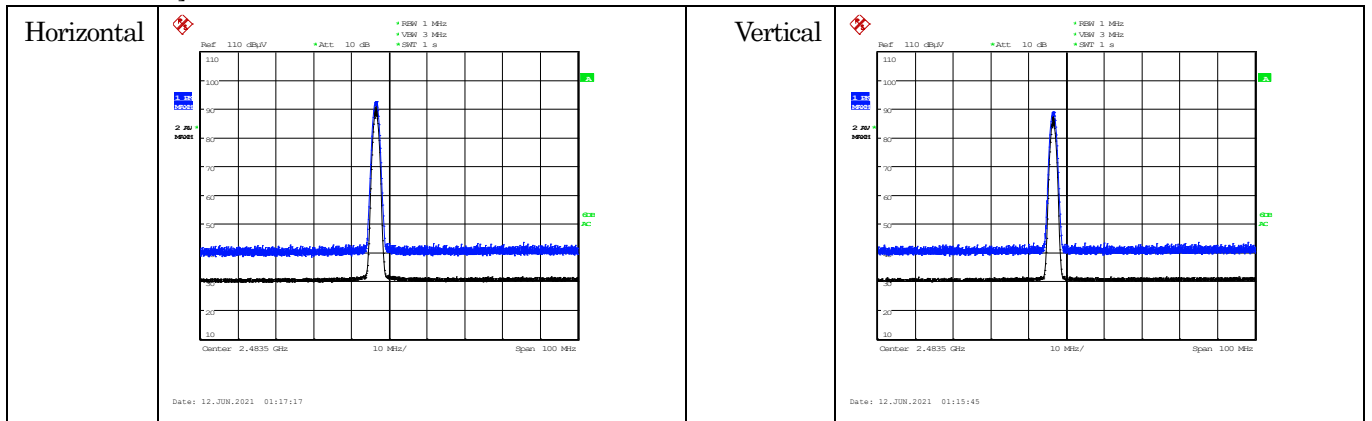



Plot data for above 1GHz in worst mode

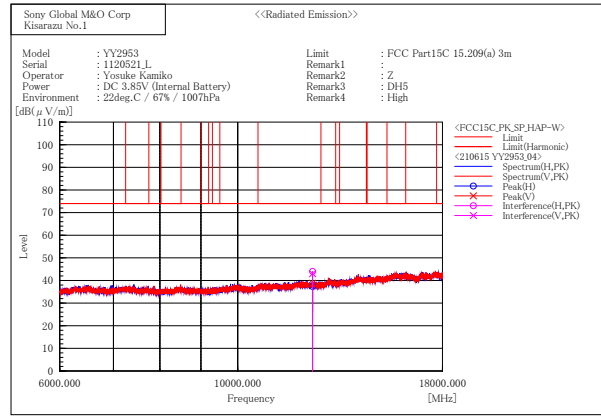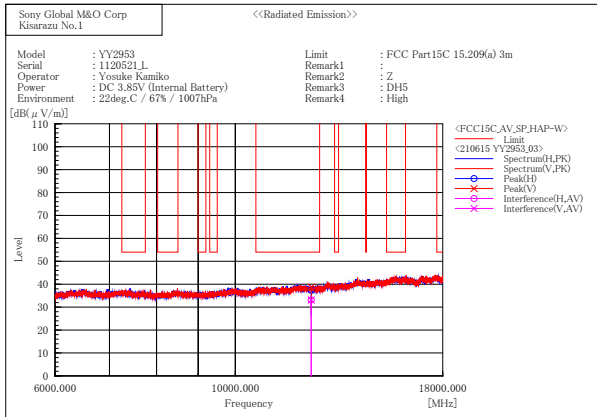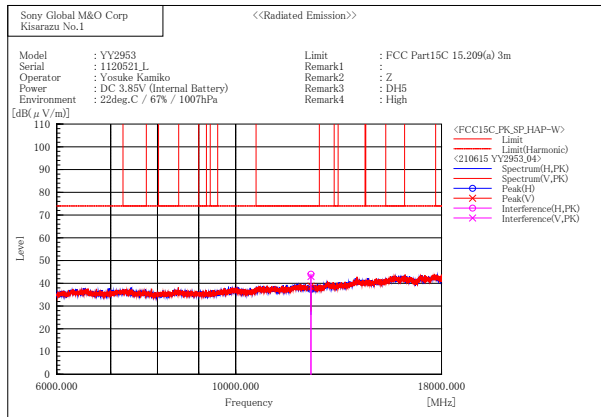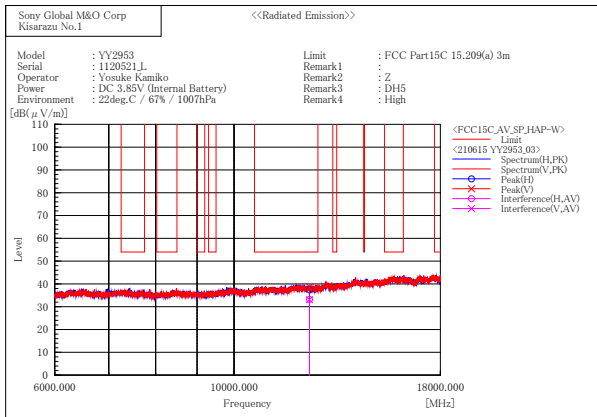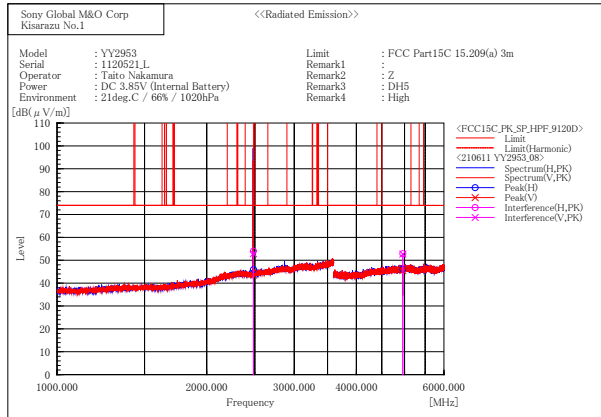
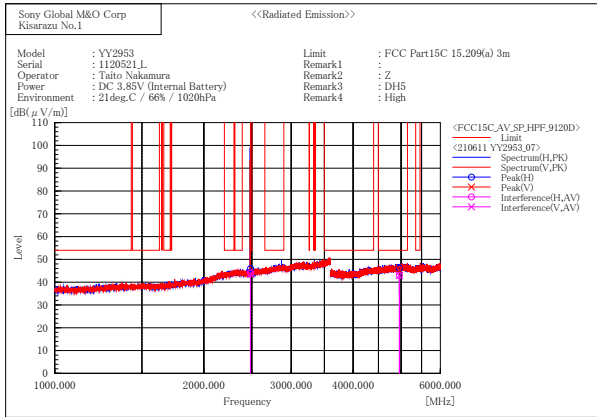


**Right Unit**

Measurement band	Date of measurement	Ambient temperature	Relative humidity	Measured by
9 kHz to 1000 MHz	June 17, 2021	24.0 deg.C	60.0 %	Yosuke Kamiko
1 GHz to 6 GHz	June 10, 2021	23.0 deg.C	65.0 %	Yosuke Kamiko
	June 11, 2021	21.0 deg.C	66.0 %	Taito Nakamura, Yosuke Kamiko
	June 12, 2021	22.0 deg.C	54.0 %	Yosuke Kamiko
	June 14, 2021	23.0 deg.C	68.0 %	Taito Nakamura
6 GHz to 18 GHz	June 14, 2021	23.0 deg.C	68.0 %	Yosuke Kamiko
	June 15, 2021	22.0 deg.C	67.0 %	Yosuke Kamiko
18 GHz to 26.5 GHz	June 15, 2021	22.0 deg.C	67.0 %	Yosuke Kamiko
	June 16, 2021	22.0 deg.C	58.0 %	Yosuke Kamiko

**9 kHz to 1000 MHz**  
**[BDR (DH5) / 2402 MHz]**

Frequency [MHz]	Detector	Polar.	Reading [dBμV]	C.F. [dB/m]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position
31.511	QP	H	21.3	-7.3	14.0	≤ 40.0	26.0	370.0	52.3	Z
713.603	QP	H	21.4	-2.3	19.1	≤ 46.0	26.9	141.2	266.1	Z
955.500	QP	H	21.1	1.2	22.3	≤ 46.0	23.7	206.0	185.2	Z
0.846	QP	V	34.5	19.6	54.1	≤ 69.1	15.0	100.0	286.7	Z
32.577	QP	V	21.4	-7.7	13.7	≤ 40.0	26.3	231.2	207.0	Z
743.358	QP	V	21.3	-2.3	19.0	≤ 46.0	27.0	260.0	198.7	Z
946.513	QP	V	21.1	1.0	22.1	≤ 46.0	23.9	103.3	26.2	Z

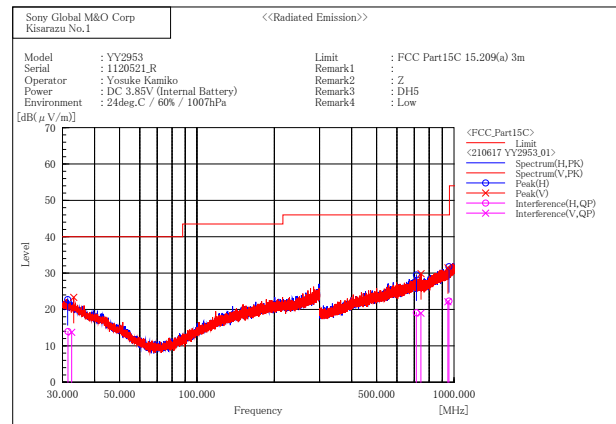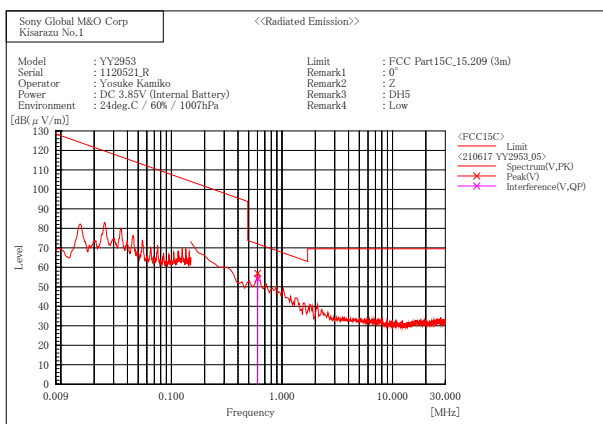

1 GHz to 26.5 GHz

\* Although "Height" in radiated emissions data, which shows the height of the boom of the antenna mast, might exceed 400.0 cm.

because of the antenna tilt positioner attached to the edge of the boom for the bore-sighting measurement, the height of the reference point of the antenna does not exceed 400.0 cm.

[BDR (DH5) / 2402 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	DCCF [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
2390.000	AV	H	37.8	5.3	-	43.1	≤ 54.0	10.9	163.5	210.1	Z	10.0
2390.000	PK	H	47.3	5.3	-	52.6	≤ 74.0	21.4	161.4	214.9	Z	-
4804.000	AV	H	29.1	13.6	-	42.7	≤ 54.0	11.3	236.8	293.3	Z	10.0
4804.000	PK	H	39.1	13.6	-	52.7	≤ 74.0	21.3	234.0	294.5	Z	-
12010.000	AV	H	36.3	-2.6	-	33.7	≤ 54.0	20.3	108.5	211.8	Z	10.0
12010.000	PK	H	45.6	-2.6	-	43.0	≤ 74.0	31.0	104.6	213.2	Z	-
19216.000	AV	H	36.7	-0.8	-	35.9	≤ 54.0	18.1	266.0	194.9	Z	10.0
19216.000	PK	H	46.2	-0.8	-	45.4	≤ 74.0	28.6	264.7	192.9	Z	-
2390.000	AV	V	37.5	5.3	-	42.8	≤ 54.0	11.2	316.5	87.9	Z	10.0
2390.000	PK	V	47.5	5.3	-	52.8	≤ 74.0	21.2	313.0	89.2	Z	-
4804.000	AV	V	28.9	13.6	-	42.5	≤ 54.0	11.5	295.6	214.8	Z	10.0
4804.000	PK	V	38.6	13.6	-	52.2	≤ 74.0	21.8	287.0	215.5	Z	-
12010.000	AV	V	36.3	-2.6	-	33.7	≤ 54.0	20.3	202.0	331.0	Z	10.0
12010.000	PK	V	45.8	-2.6	-	43.2	≤ 74.0	30.8	202.4	329.3	Z	-
19216.000	AV	V	37.2	-0.8	-	36.4	≤ 54.0	17.6	150.7	220.0	Z	10.0
19216.000	PK	V	46.7	-0.8	-	45.9	≤ 74.0	28.1	151.9	224.0	Z	-

[BDR (DH5) / 2441 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	DCCF [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
4882.000	AV	H	29.3	13.5	-	42.8	≤ 54.0	11.2	254.9	85.8	Z	10.0
4882.000	PK	H	38.8	13.5	-	52.3	≤ 74.0	21.7	250.8	90.1	Z	-
12205.000	AV	H	36.5	-2.7	-	33.8	≤ 54.0	20.2	322.5	85.0	Z	10.0
12205.000	PK	H	45.6	-2.7	-	42.9	≤ 74.0	31.1	325.1	82.2	Z	-
19528.000	AV	H	37.3	-0.7	-	36.6	≤ 54.0	17.4	112.0	126.7	Z	10.0
19528.000	PK	H	47.2	-0.7	-	46.5	≤ 74.0	27.5	110.4	122.9	Z	-
4882.000	AV	V	29.1	13.5	-	42.6	≤ 54.0	11.4	100.0	320.1	Z	10.0
4882.000	PK	V	39.0	13.5	-	52.5	≤ 74.0	21.5	100.0	325.8	Z	-
12205.000	AV	V	36.5	-2.7	-	33.8	≤ 54.0	20.2	254.1	279.6	Z	10.0
12205.000	PK	V	45.4	-2.7	-	42.7	≤ 74.0	31.3	257.3	280.3	Z	-
19528.000	AV	V	37.4	-0.7	-	36.7	≤ 54.0	17.3	107.5	164.7	Z	10.0
19528.000	PK	V	47.5	-0.7	-	46.8	≤ 74.0	27.2	106.6	155.7	Z	-

[BDR (DH5) / 2480 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	DCCF [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
2483.500	AV	H	37.9	5.6	-	43.5	≤ 54.0	10.5	105.0	187.9	Z	10.0
2483.500	PK	H	47.1	5.6	-	52.7	≤ 74.0	21.3	100.0	190.7	Z	-
4960.000	AV	H	29.3	13.9	-	43.2	≤ 54.0	10.8	147.6	247.9	Z	10.0
4960.000	PK	H	38.7	13.9	-	52.6	≤ 74.0	21.4	146.3	248.4	Z	-
12400.000	AV	H	35.8	-3.0	-	32.8	≤ 54.0	21.2	175.8	30.6	Z	10.0
12400.000	PK	H	46.6	-3.0	-	43.6	≤ 74.0	30.4	174.7	33.1	Z	-
19840.000	AV	H	37.2	-0.7	-	36.5	≤ 54.0	17.5	197.0	185.3	Z	10.0
19840.000	PK	H	46.7	-0.7	-	46.0	≤ 74.0	28.0	197.0	185.9	Z	-
2483.500	AV	V	37.9	5.6	-	43.5	≤ 54.0	10.5	135.4	176.6	Z	10.0
2483.500	PK	V	47.9	5.6	-	53.5	≤ 74.0	20.5	133.7	177.5	Z	-
4960.000	AV	V	29.4	13.9	-	43.3	≤ 54.0	10.7	100.0	156.8	Z	10.0
4960.000	PK	V	38.7	13.9	-	52.6	≤ 74.0	21.4	100.0	159.9	Z	-
12400.000	AV	V	36.3	-3.0	-	33.3	≤ 54.0	20.7	100.0	119.3	Z	10.0
12400.000	PK	V	46.2	-3.0	-	43.2	≤ 74.0	30.8	103.0	119.8	Z	-
19840.000	AV	V	37.1	-0.7	-	36.4	≤ 54.0	17.6	328.5	44.1	Z	10.0
19840.000	PK	V	46.4	-0.7	-	45.7	≤ 74.0	28.3	328.8	45.5	Z	-

## [EDR (3DH5) / 2402 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	DCCF [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
2390.000	AV	H	37.4	5.3	-	42.7	≤ 54.0	11.3	193.7	299.7	Z	10.0
2390.000	PK	H	47.1	5.3	-	52.4	≤ 74.0	21.6	194.0	300.6	Z	-
4804.000	AV	H	29.0	13.6	-	42.6	≤ 54.0	11.4	241.0	11.5	Z	10.0
4804.000	PK	H	38.9	13.6	-	52.5	≤ 74.0	21.5	241.0	12.1	Z	-
12010.000	AV	H	35.8	-2.6	-	33.2	≤ 54.0	20.8	428.0	251.8	Z	10.0
12010.000	PK	H	46.6	-2.6	-	44.0	≤ 74.0	30.0	428.0	254.4	Z	-
19216.000	AV	H	36.9	-0.8	-	36.1	≤ 54.0	17.9	121.1	66.4	Z	10.0
19216.000	PK	H	46.6	-0.8	-	45.8	≤ 74.0	28.2	120.6	67.5	Z	-
2390.000	AV	V	37.9	5.3	-	43.2	≤ 54.0	10.8	260.9	337.6	Z	10.0
2390.000	PK	V	47.3	5.3	-	52.6	≤ 74.0	21.4	261.0	336.5	Z	-
4804.000	AV	V	29.1	13.6	-	42.7	≤ 54.0	11.3	262.4	163.7	Z	10.0
4804.000	PK	V	38.4	13.6	-	52.0	≤ 74.0	22.0	266.0	168.0	Z	-
12010.000	AV	V	35.6	-2.6	-	33.0	≤ 54.0	21.0	257.1	224.3	Z	10.0
12010.000	PK	V	45.9	-2.6	-	43.3	≤ 74.0	30.7	257.0	223.3	Z	-
19216.000	AV	V	36.9	-0.8	-	36.1	≤ 54.0	17.9	100.0	290.1	Z	10.0
19216.000	PK	V	46.7	-0.8	-	45.9	≤ 74.0	28.1	101.0	290.0	Z	-

## [EDR (3DH5) / 2441 MHz]

Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	DCCF [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
4882.000	AV	H	29.2	13.5	-	42.7	≤ 54.0	11.3	195.5	125.3	Z	10.0
4882.000	PK	H	38.7	13.5	-	52.2	≤ 74.0	21.8	190.7	131.8	Z	-
12205.000	AV	H	35.9	-2.7	-	33.2	≤ 54.0	20.8	172.9	120.9	Z	10.0
12205.000	PK	H	45.6	-2.7	-	42.9	≤ 74.0	31.1	174.0	115.3	Z	-
19528.000	AV	H	37.2	-0.7	-	36.5	≤ 54.0	17.5	401.1	123.3	Z	10.0
19528.000	PK	H	46.7	-0.7	-	46.0	≤ 74.0	28.0	401.1	122.6	Z	-
4882.000	AV	V	28.8	13.5	-	42.3	≤ 54.0	11.7	329.5	67.2	Z	10.0
4882.000	PK	V	38.7	13.5	-	52.2	≤ 74.0	21.8	322.5	72.9	Z	-
12205.000	AV	V	36.2	-2.7	-	33.5	≤ 54.0	20.5	200.0	221.9	Z	10.0
12205.000	PK	V	45.7	-2.7	-	43.0	≤ 74.0	31.0	198.4	223.1	Z	-
19528.000	AV	V	37.2	-0.7	-	36.5	≤ 54.0	17.5	153.5	292.8	Z	10.0
19528.000	PK	V	46.2	-0.7	-	45.5	≤ 74.0	28.5	153.5	292.6	Z	-

## [EDR (3DH5) / 2480 MHz]


Frequency [MHz]	Detector	Polar.	Reading [dB $\mu$ V]	C.F. [dB/m]	DCCF [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [degree]	EUT Position	VBW [kHz]
2483.500	AV	H	37.6	5.6	-	43.2	≤ 54.0	10.8	382.4	198.9	Z	10.0
2483.500	PK	H	47.9	5.6	-	53.5	≤ 74.0	20.5	382.0	199.6	Z	-
4960.000	AV	H	28.8	13.9	-	42.7	≤ 54.0	11.3	224.8	5.4	Z	10.0
4960.000	PK	H	38.1	13.9	-	52.0	≤ 74.0	22.0	225.3	10.8	Z	-
12400.000	AV	H	36.3	-3.0	-	33.3	≤ 54.0	20.7	143.5	93.9	Z	10.0
12400.000	PK	H	46.0	-3.0	-	43.0	≤ 74.0	31.0	144.0	92.3	Z	-
19840.000	AV	H	37.2	-0.7	-	36.5	≤ 54.0	17.5	254.8	152.6	Z	10.0
19840.000	PK	H	46.9	-0.7	-	46.2	≤ 74.0	27.8	254.8	151.3	Z	-
2483.500	AV	V	37.8	5.6	-	43.4	≤ 54.0	10.6	221.1	227.3	Z	10.0
2483.500	PK	V	47.3	5.6	-	52.9	≤ 74.0	21.1	217.3	231.3	Z	-
4960.000	AV	V	28.6	13.9	-	42.5	≤ 54.0	11.5	382.0	2.8	Z	10.0
4960.000	PK	V	38.2	13.9	-	52.1	≤ 74.0	21.9	383.0	7.5	Z	-
12400.000	AV	V	36.1	-3.0	-	33.1	≤ 54.0	20.8	360.6	149.8	Z	10.0
12400.000	PK	V	45.6	-3.0	-	42.6	≤ 74.0	31.4	363.6	150.5	Z	-
19840.000	AV	V	37.1	-0.7	-	36.4	≤ 54.0	17.6	125.2	97.2	Z	10.0
19840.000	PK	V	47.1	-0.7	-	46.4	≤ 74.0	27.6	124.4	97.7	Z	-

Plot data for 2.4 GHz Restricted-Band Edge


These plot data show peak (trace blue) and average (trace black) spectrum for worst case emissions in the restricted-band edges. (Restricted band edges: below 2390 MHz and above 2483.5 MHz)

The result of the final radiated spurious emissions measurement refers in previous pages.


[BDR / 2402 MHz]

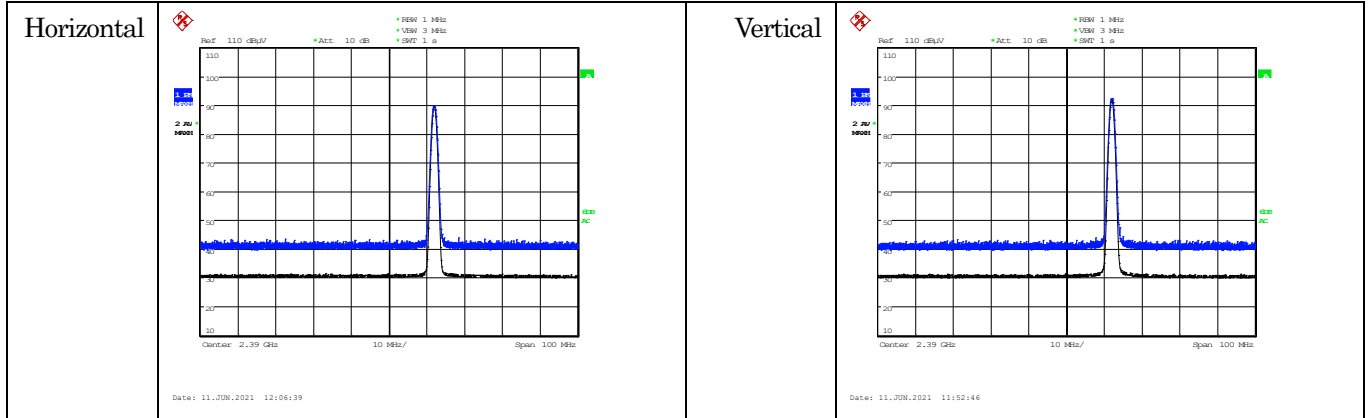


[BDR / 2480 MHz]

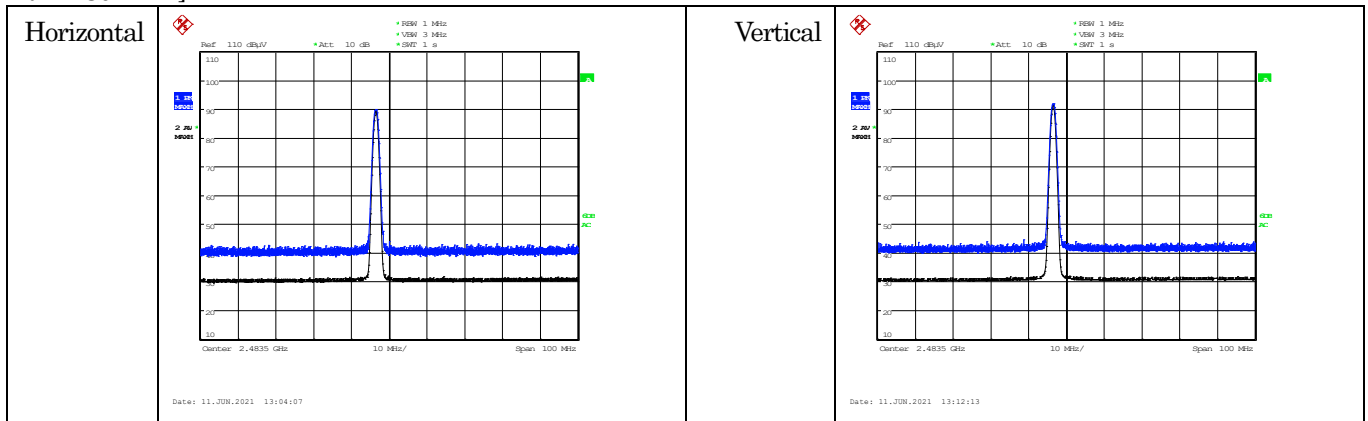







[EDR / 2402 MHz]

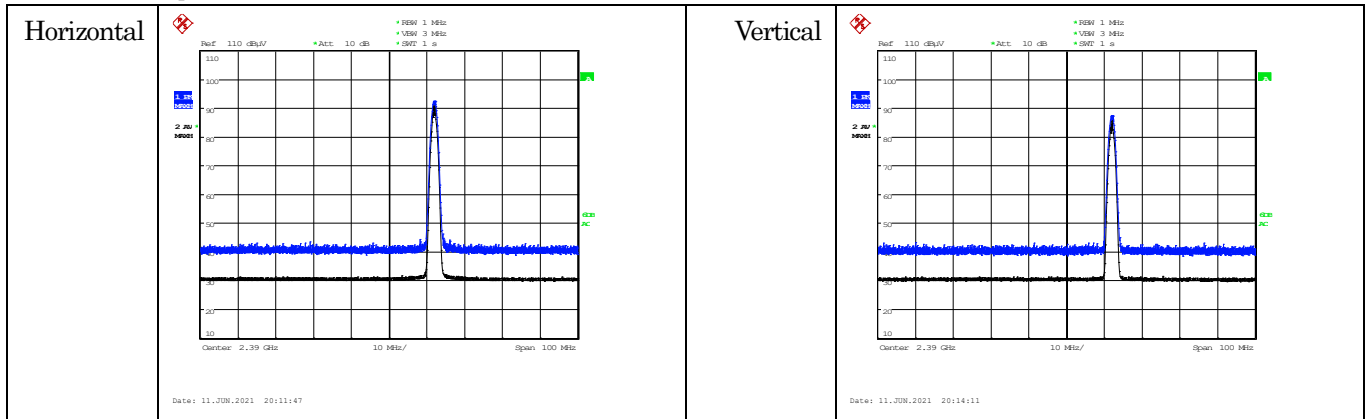

[EDR / 2480 MHz]

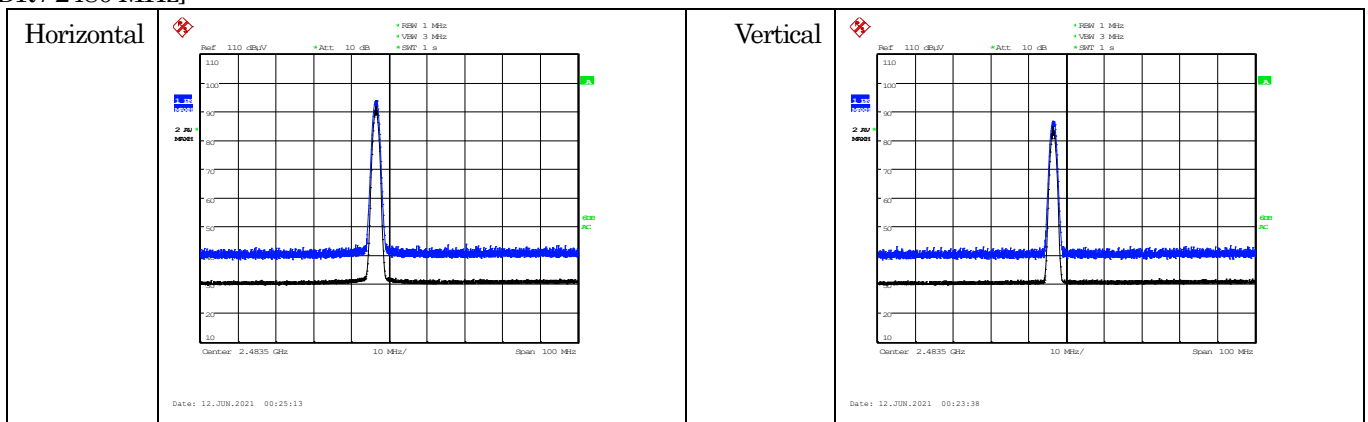

Plot data for above 1GHz in worst mode

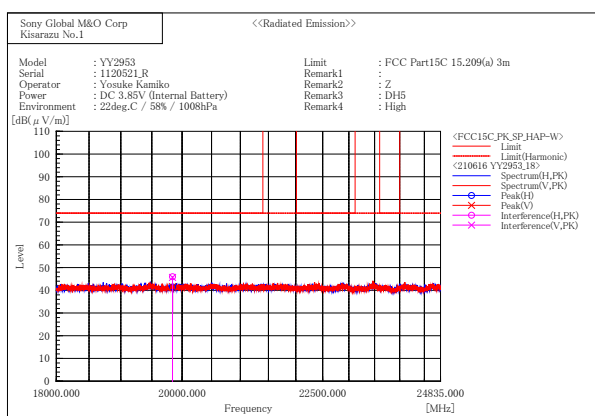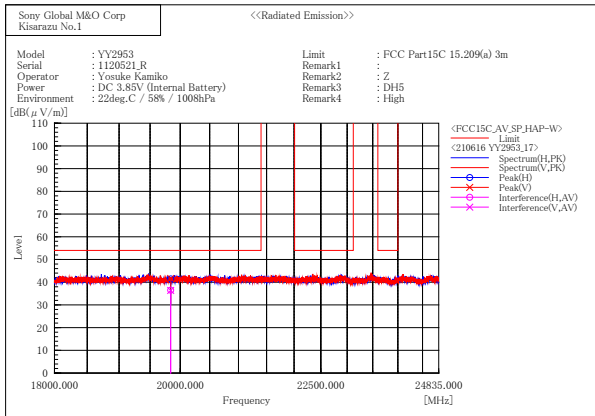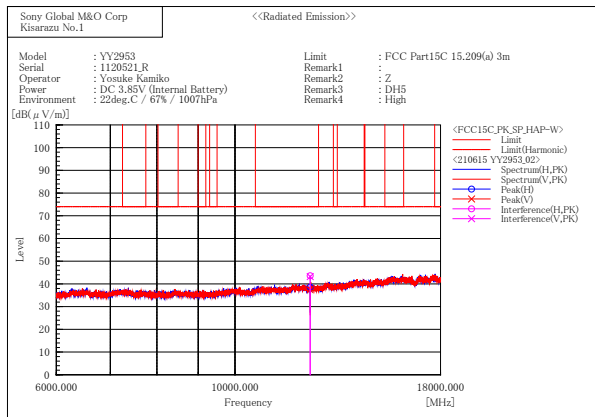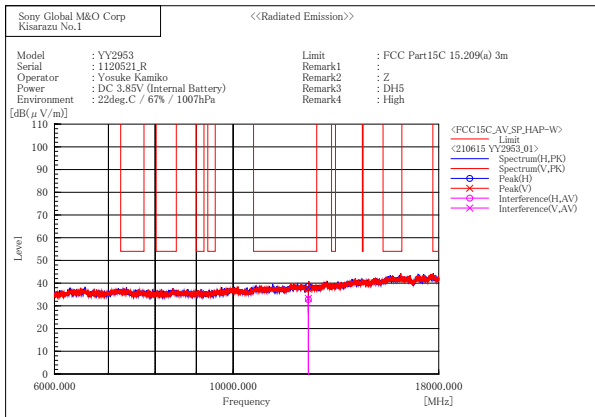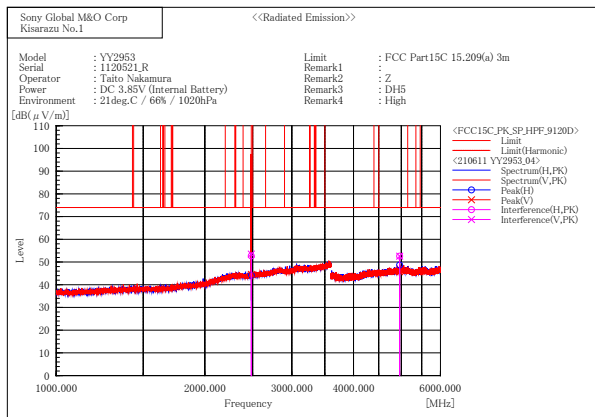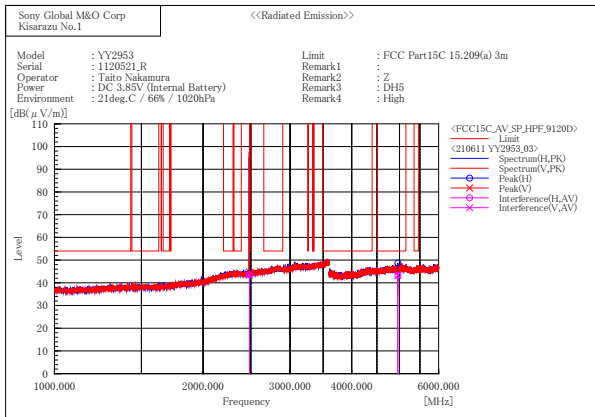


### 3.7. Conducted Spurious Emissions for Band Edge

#### Left Unit


Date of measurement	Ambient temperature	Relative humidity	Measured by
June 9, 2021	23.2 deg.C	66.0 %	Mikiko Kouga

Mode	Channel [MHz]	Frequency [MHz]	Reading [dBm]	C.F. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
BDR	DH5	2401.83	8.03	1.16	9.19	-	-
		2399.97	-52.32	1.16	-51.16	≤ -10.81	40.35
EDR	3DH5	2401.83	8.03	1.16	9.19	-	-
		2399.73	-52.78	1.16	-51.62	≤ -10.81	40.81

[BDR]

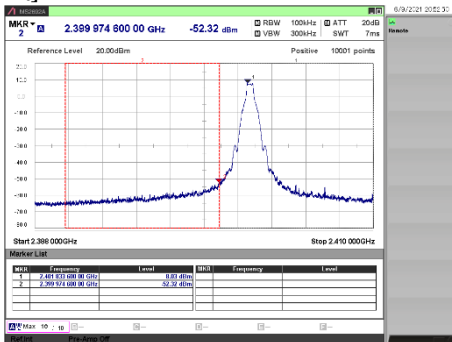

[EDR]

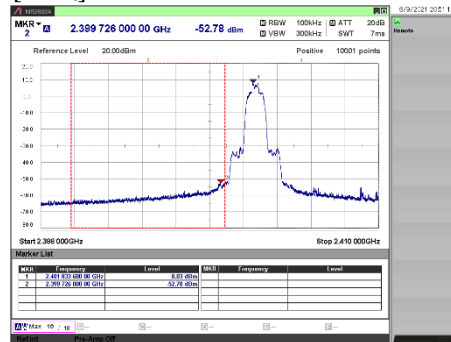


#### Right Unit


Date of measurement	Ambient temperature	Relative humidity	Measured by
June 9, 2021	23.2 deg.C	66.0 %	Mikiko Kouga

Mode	Channel [MHz]	Frequency [MHz]	Reading [dBm]	C.F. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
BDR	DH5	2401.83	7.47	1.16	8.63	-	-
		2400.00	-52.37	1.16	-51.21	≤ -11.37	39.84
EDR	3DH5	2401.83	7.50	1.16	8.66	-	-
		2399.94	-53.54	1.16	-52.38	≤ -11.34	41.04

[BDR]

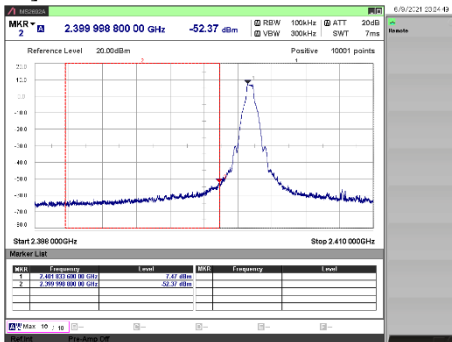

[EDR]

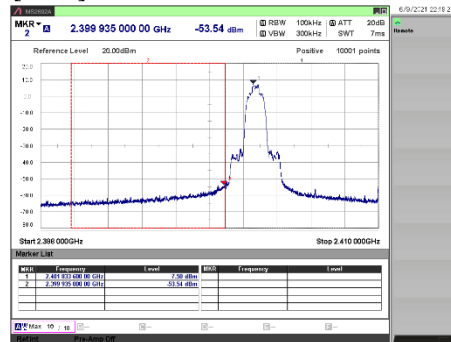



## 4. Method of Calculation

### 4.1. Time of Occupancy (Dwell Time)

Method of calculation : Software  
 Software Name : SW-0308  
 Software Version : Ver.5

$$\text{Test Result [ msec ]} = \text{Dwell Time [ msec ]} * \text{Cycle [ time ]} * 31.6 [ \text{sec} ] / \text{Sweep Time [ sec ]}$$

Note (a) Dwell Time : Transmission duration of 1 hopping.  
 (b) Cycle : Number of hopping appearances on the spectrum analyzer.  
 (c) 31.6 :  $0.4 [ \text{sec} ] * \text{Number of Hopping Frequencies ( 79 )}$   
 (d) Sweep Time : Sweep time settings on the spectrum analyzer.

### 4.2. Maximum Peak Conducted Output Power

Method of calculation : Software  
 Software Name : SW-0308  
 Software Version : Ver.5

$$\text{Test Result (PK) [ dBm ]} = \text{Meter Reading [ dBm ]} + \text{C.F. [ dB ]}$$

$$\text{Test Result (AV) [ dBm ]} = \text{Meter Reading [ dBm ]} + \text{C.F. [ dB ]} + \text{Duty Factor [ dB ]}$$

$$\text{Duty Cycle [ \% ]} = T ( \text{Tx ON Time} ) / T_{(\text{on+off})} ( \text{Tx ON Time} + \text{Tx OFF Time} ) * 100$$

Note (a) Meter Reading : Reading of the power meter  
 (b) C.F. : System Cable Loss + EUT Cable Loss  
 (c) Duty Factor :  $10\log \{ (\text{Tx ON Time} + \text{Tx OFF Time}) / (\text{Tx ON Time}) \}$

### 4.3. Radiated Spurious Emissions

Method of calculation : Software  
 Software Name : V-Scan  
 Software Version : Ver.4.0.30

Test Result [ dBuV/ m ] = Meter Reading [ dBuV ] + C.F. [ dB/ m ]

DCCF Result [ dBuV/ m ] = Meter Reading (for peak detector) [ dBuV ] + C.F. [ dB/ m ] + DCCF [dB]

Note (a) Meter Reading : Reading of the EMI test receiver or the spectrum analyzer.  
 (b) C.F. :  Antenna Factor (including Balun Loss) + System GainLoss  
 :  Antenna Factor (including Balun Loss) + System GainLoss + 20 log (3 m/ 10 m)  
 (c) DCCF : 20log (Maximum dwell time in any 100ms [ms] / 100 [ms])

### 4.4. Conducted Spurious Emissions for Band Edge

Method of calculation : Software  
 Software Name : SW-0308  
 Software Version : Ver.5

Test Result [ dBm ] = Meter Reading [ dBm ] + C.F. [ dB ]

Note (a) Meter Reading : Reading of the spectrum analyzer.  
 (b) C.F. : System Cable Loss + EUT Cable Loss

## 5. List of Test Equipment

All test results are traceable to the national and/or international standards.

### 5.1. Antenna-port Conducted Measurements

Used	Ctrl#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Interval	Last Cal.
-	W0140	Spectrum Analyzer	FSU26	200717	Rohde & Schwarz	12 months	20.10.02
-	W0100	Spectrum Analyzer	MS2692A	6201338954	Anritsu	12 months	20.11.13
x	W0101	Signal Analyzer	MS2692A	6201338955	Anritsu	12 months	20.10.03
x	W0006	Power Meter	N1911A	MY50000295	Keysight Technologies	12 months	20.10.03
x	W0007	Power Sensor	N1922A	MY50180022	Keysight Technologies	12 months	20.10.03
-	W0029	10dB Attenuator	8493C	76549	Keysight Technologies	12 months	20.10.02
-	WC0002	RF Cable	SUCOFLEX 102	34124/2	HUBER + SUHNER	12 months	20.10.02
-	WC0003	RF Cable	SUCOFLEX 102	34127/2	HUBER + SUHNER	12 months	20.10.02
-	WC0004	RF Cable	SUCOFLEX 102	34288/2	HUBER + SUHNER	12 months	20.10.02
x	WC0005	RF Cable	SUCOFLEX 102	34287/2	HUBER + SUHNER	12 months	20.10.02
-	WC0006	RF Cable	SUCOFLEX 102	34289/2	HUBER + SUHNER	12 months	20.10.02
-	WC0007	RF Cable	SUCOFLEX 102	34286/2	HUBER + SUHNER	12 months	20.10.02
-	M0720	Thermometer	TH-321	140036	AS ONE	12 months	20.07.10
x	M0719	Thermometer	TH-321	140053	AS ONE	12 months	21.04.02

### 5.2. Radiated Spurious Emissions

Used	Ctrl#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Interval	Last Cal.
-	M0686	EMI Receiver	N9038A	MY52260113	Agilent Technologies	12 months	20.12.04
-	M0486	EMI Receiver	ESU40	100050	Rohde & Schwarz	12 months	20.10.02
x	M0959	EMI Receiver	ESU40	100041	Rohde & Schwarz	12 months	21.02.10
x	A0073	Loop Antenna	HFH2-Z2	100171	Rohde & Schwarz	12 months	20.12.01
x	A0089	Biconical Antenna	BBA9106	VHA91032835	Schwarzbeck	12 months	20.12.07
x	A0088	Log periodic Antenna	UHALP9108A1	0649	Schwarzbeck	12 months	20.12.07
x	A0064	Horn Antenna	BBHA9120D	746	Schwarzbeck	12 months	20.11.01
x	A0078	Horn Antenna	HAP06-18W	00000070	Toyo Corporation	12 months	20.11.01
x	A0058	Horn Antenna	HAP18-26W	00000016	Toyo Corporation	12 months	20.10.02
x	CS0017	N-RE Cable System 1	-	-	-	12 months	20.11.01
x	CS0018	N-RE Cable System 2	-	-	-	12 months	20.11.01
x	CS0045	N-3m EMF Cable System	-	-	-	12 months	20.11.01
x	CS0074/0075	N-RE Cable SYSTEM 4	-	-	-	12 months	21.05.06
x	M0126	Step Attenuator	8494H	3837M01144	Agilent Technologies	12 months	20.11.01
x	M0752	Pre Amplifier	310N	320621	SONOMA INSTRUMENT	12 months	20.11.01
x	M0128	3dB Attenuator	8491A	53541	Agilent Technologies	12 months	20.11.01
x	M0609	3dB Attenuator	8491B	MY39265960	Agilent Technologies	12 months	20.11.01
x	M0737	GHz Filter Box	FB-G1	001	Sony EMCS	12 months	20.11.01
x	M5079	Temperature Meter	608-H2	41475953	testo	24 months	19.10.28
x	M5062	Scientific Ambient Monitor	0560 6220	39515563/802	testo	12 months	20.08.11

About calibration interval

Valid until the end of the month listed in "Cal. Int." column.