



RADIO TEST REPORT

Test Report No. : 14173547S-A

Applicant : Sony Group Corporation
Type of EUT : Wireless Noise Canceling Stereo Headset
Model Number of EUT : YY2954
FCC ID : AK8YY2954
Test regulation : FCC Part 15 Subpart C: 2021
*Bluetooth (BR / EDR) part
Test result : Complied (Refer to SECTION 3)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in SECTION 1.

Date of test: January 9 to 18, 2022

Representative test engineer: *Y. Murakami*
Yosuke Murakami
Engineer

Approved by: *T. Imamura*
Toyokazu Imamura
Leader



CERTIFICATE 1266.03

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".

UL Japan, Inc.
Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

REVISION HISTORY

Original Test Report No.: 14173547S-A

Revision	Test report No.	Date	Page revised	Contents
- (Original)	14173547S-A	February 3, 2022	-	-

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	LIMS	Laboratory Information Management System
AC	Alternating Current	MCS	Modulation and Coding Scheme
AFH	Adaptive Frequency Hopping	MRA	Mutual Recognition Arrangement
AM	Amplitude Modulation	N/A	Not Applicable
Amp, AMP	Amplifier	NIST	National Institute of Standards and Technology
ANSI	American National Standards Institute	NS	No signal detect.
Ant, ANT	Antenna	NSA	Normalized Site Attenuation
AP	Access Point	OBW	Occupied BandWidth
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadrature Phase Shift Keying
CW	Continuous Wave	RBW	Resolution BandWidth
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RNSS	Radio Navigation Satellite Service
DSSS	Direct Sequence Spread Spectrum	RSS	Radio Standards Specifications
DUT	Device Under Test	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR, T/R	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
ETSI	European Telecommunications Standards Institute	Vert.	Vertical
EU	European Union	WLAN	Wireless LAN
EUT	Equipment Under Test		
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

CONTENTS	PAGE
SECTION 1: Customer information.....	5
SECTION 2: Equipment under test (EUT).....	5
SECTION 3: Test specification, procedures & results.....	6
SECTION 4: Operation of EUT during testing.....	9
SECTION 5: Radiated Spurious Emission	11
SECTION 6: Antenna Terminal Conducted Tests.....	13
APPENDIX 1: Test data	14
20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation	14
Number of Hopping Frequency	18
Dwell time.....	20
Maximum Peak Output Power.....	23
Average Output Power.....	24
Radiated Spurious Emission	26
Conducted Spurious Emission	37
Conducted Emission Band Edge compliance	43
APPENDIX 2: Test instruments	45
APPENDIX 3: Photographs of test setup	47
Radiated Spurious Emission	47
Pre-check of Worst Case Position.....	48
Antenna Terminal Conducted Tests.....	49

SECTION 1: Customer information

Company Name : Sony Group Corporation
Address : 1-7-1 Konan Minato-ku, Tokyo, 108-0075 Japan
Contact Person : Kazuhiko Nagano

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
 - Operating/Test Mode(s) (Mode(s)) on all the relevant pages
 - SECTION 1: Customer information
 - SECTION 2: Equipment under test (EUT) other than the Receipt Date
 - SECTION 4: Operation of EUT during testing
- * The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment under test (EUT)

2.1 Identification of EUT

Type : Wireless Noise Canceling Stereo Headset
Model Number : YY2954
Serial Number : Refer to SECTION 4.2
Receipt Date : January 6, 2022
Condition : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification : No Modification by the test lab.

2.2 Product Description

Model: YY2954 (referred to as the EUT in this report) is a Wireless Noise Canceling Stereo Headset.

General Specification

Rating : DC 3.8 V (Battery)
DC 5 V / 9 V (USB)

Radio Specification

Bluetooth

Radio Type : Transceiver
Frequency of Operation : 2402 MHz - 2480 MHz
Modulation : FHSS (GFSK, $\pi/4$ -DQPSK, 8DPSK)
Antenna type : Chip antenna
Antenna Gain : 1.6 dBi
Clock frequency (Maximum) : 26 MHz

Bluetooth Low Energy

Radio Type : Transceiver
Frequency of Operation : 2402 MHz - 2480 MHz
Modulation : GFSK
Antenna type : Chip antenna
Antenna Gain : 1.6 dBi
Clock frequency (Maximum) : 26 MHz

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on May 3, 2021 and effective July 2, 2021

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz,
and 5725-5850 MHz

*The customer has declared that the EUT has complies with FCC Part 15 Subpart B as SDoC.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods	FCC: Section 15.207	N/A	N/A	*1)
	----- ISED: RSS-Gen 8.8	ISED: RSS-Gen 8.8			
Carrier Frequency Separation	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section15.247(a)(1)	See data.	Complied a)	Conducted
	ISED: -	ISED: RSS-247 5.1 (b)			
20dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section15.247(a)(1)			
	ISED: -	ISED: RSS-247 5.1 (a)			
Number of Hopping Frequency	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section15.247(a)(1)(iii)			
	ISED: -	ISED: RSS-247 5.1 (d)			
Dwell time	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section15.247(a)(1)(iii)			
	ISED: -	ISED: RSS-247 5.1 (d)			
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section15.247(a)(b)(1)			
	ISED: RSS-Gen 6.12	ISED: RSS-247 5.4 (b)			
Spurious Emission & Band Edge Compliance	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02	FCC: Section15.247(d)	8.4 dB 9608.000 MHz, AV, Horizontal and Vertical Mode: Tx, 3DH5 2402 MHz	Complied e) / f)	Conducted/ Radiated (above 30 MHz) *2)
	ISED: RSS-Gen 6.13	ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10			
Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.					
*1) The test was not applicable since the Bluetooth does not operate during charging.					
*2) Radiated test was selected over 30 MHz based on section 15.247(d).					
a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)					
b) Refer to APPENDIX 1 (data of Number of Hopping Frequency)					
c) Refer to APPENDIX 1 (data of Dwell time)					
d) Refer to APPENDIX 1 (data of Maximum Peak Output Power)					
e) Refer to APPENDIX 1 (data of Conducted Spurious Emission)					
f) Refer to APPENDIX 1 (data of Radiated Spurious Emission)					
Symbols:					
Complied The data of this test item has enough margin, more than the measurement uncertainty.					
Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.					

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

This EUT provides stable voltage constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN
Telephone : +81 463 50 6400
Facsimile : +81 463 50 6401

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	Complied a)	Conducted

a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Shonan EMC Lab.

Item	Frequency range	Uncertainty (+/-)			
		No. 1 SAC / SR	No. 2 SAC / SR	No. 3 SAC / SR	No. 4,5,6,8 SR
Conducted emission (AC Mains) LISN	150 kHz-30 MHz	2.6 dB	2.6 dB	2.7 dB	2.7 dB
Radiated emission (Measurement distance: 3 m)	9 kHz-30 MHz	2.9 dB	2.9 dB	2.9 dB	-
	30 MHz-200 MHz	4.6 dB	4.6 dB	4.6 dB	-
	200 MHz-1 GHz	6.0 dB	6.0 dB	6.0 dB	-
	1 GHz-6 GHz	4.8 dB	4.8 dB	4.8 dB	-
	6 GHz-18 GHz	5.4 dB	5.4 dB	5.4 dB	-
Radiated emission (Measurement distance: 1 m)	18 GHz-40 GHz	5.6 dB	5.6 dB	5.7 dB	-
	1 GHz-18 GHz	5.7 dB	5.7 dB	5.7 dB	-
	18 GHz-40 GHz	5.9 dB	5.9 dB	5.9 dB	-

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)_SPM-06	1.2 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-06	2.0 dB
Power Measurement above 1 GHz (Average Detector)_SPM-07	1.2 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-07	1.3 dB
Power Measurement above 1 GHz (Average Detector)_SPM-13	1.3 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-13	1.3 dB
Spurious emission (Conducted) below 1GHz	0.93 dB
Spurious emission (Conducted) 1 GHz-3 GHz	0.92 dB
Spurious emission (Conducted) 3 GHz-18 GHz	2.3 dB
Spurious emission (Conducted) 18 GHz-26.5 GHz	2.3 dB
Spurious emission (Conducted) 26.5 GHz-40 GHz	2.3 dB
Bandwidth Measurement	0.012 %
Duty cycle and Time Measurement	0.27 %
Temperature_SCH-01	0.93 deg.C.
Humidity_SCH-01	4.1 %
Temperature_SCH-02	2.0 deg.C.
Humidity_SCH-02	6.6 %
Voltage	0.97 %

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone: +81 463 50 6400, Facsimile: +81 463 50 6401

A2LA Certificate Number: 1266.03

(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room	-	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	-	2.55 x 4.1 x 2.5	-	-

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)

Bluetooth (BT): Transmitting (Tx), Payload: PRBS9

Details of Operating Mode(s)

Test Item	Mode	Tested frequency
Radiated Spurious Emission (Below 1 GHz)	Tx (Hopping Off) DH5	2480 MHz *1)
Radiated Spurious Emission (Above 1 GHz)	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx (Hopping On) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
20dB Bandwidth	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx (Hopping On) DH5, 3DH5	-
Dwell time	Tx (Hopping On), -DH1, DH3, DH5 -3DH1, 3DH3, 3DH5	-
Maximum Peak Output Power	Tx (Hopping Off) DH5, 2DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2480 MHz
99% Occupied Bandwidth	Tx DH5, 3DH5 -Hopping On -Hopping Off	2402 MHz 2441 MHz 2480 MHz
<p>*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test)</p> <p>*2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative.</p> <p>* It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification.</p> <p>*EUT has the power settings by the software as follows; Power settings: BR/EDR: 50 Software: Firmware Version 1 (Date: 2021.1.6, Storage location: EUT memory) Tera Term Ver.4.106 / Headset_BT_Test Ver.0.12 (Date: 2022.1.10, Storage location: Driven by connected PC)</p> <p>*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p> <p>*1) Spurious emissions for frequencies below 1 GHz was limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.</p>		

UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400


Facsimile : +81 463 50 6401

4.2 Configuration and peripherals

(Antenna Terminal conducted test)

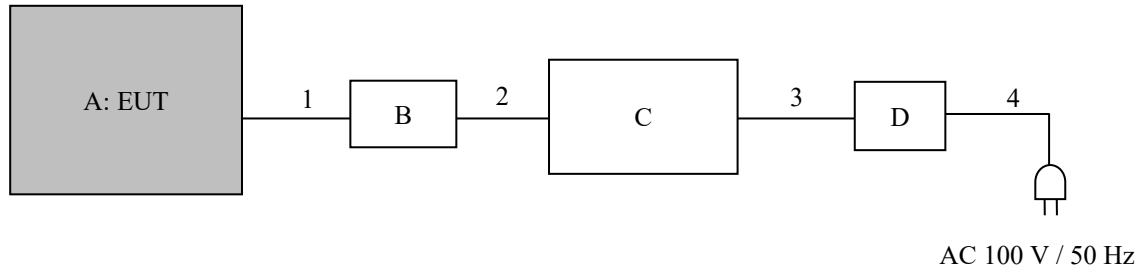

(Radiated Emission test)



* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Wireless Noise Canceling Stereo Headset	YY2954	1110397 *1) 1110398 *2)	Sony	EUT
B	Jig Board	-	-	-	-
C	Laptop Computer	ThinkPad E14 Gen2	PF397TQG	LENOVO	-
D	AC Adapter	ADLX65YCC2D	8SSA10R16922C2TJ1 9M1368	LENOVO	-

*1) Used for Antenna Terminal conducted test

*2) Used for Radiated Emission test

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB	1.0	Shielded	Shielded	-
2	USB	0.5	Shielded	Shielded	-
3	DC	1.8	Unshielded	Unshielded	-
4	AC	0.9	Unshielded	Unshielded	-

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 5: Radiated Spurious Emission

Test Procedure

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 2.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

Frequency	Below 1 GHz	Above 1GHz	
Instrument used	Test Receiver	Spectrum Analyzer	
Detector	QP	PK	AV *1)
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 1/T (T: burst length, refer to Burst rate confirmation sheet) Detector: Peak

*1) Average Power Measurement was performed based on KDB 558074 D01 15.247 Meas Guidance v05r02.

UL Japan, Inc.

Shonan EMC Lab.


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Figure 2: Test Setup


Below 1 GHz

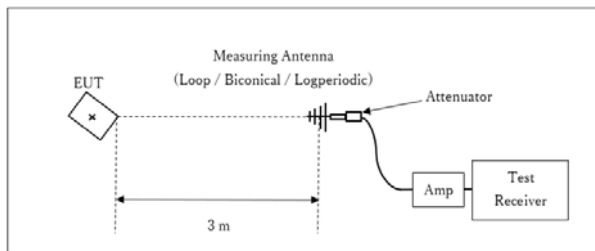

* : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

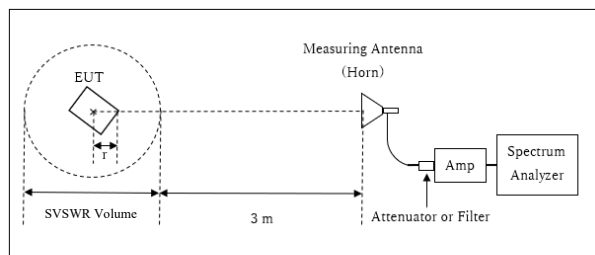


r : Radius of an outer periphery of EUT

* : Center of turn table

Distance Factor: $20 \times \log(3.90 \text{ m} / 3.0 \text{ m}) = 2.28 \text{ dB}$
 * Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.90 \text{ m}$

SVSWR Volume : 2.0 m
 (SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.1 \text{ m}$

10 GHz - 26.5 GHz

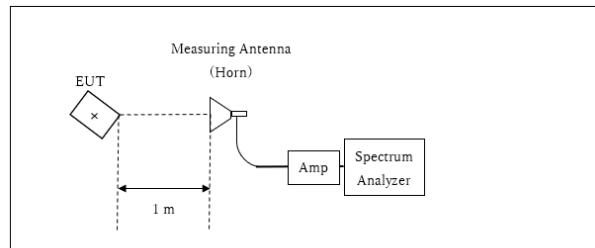

* : Center of turn table

Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$
 *Test Distance: 1 m

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Frequency	Below 1 GHz	1 GHz - 2.8 GHz	2.8 GHz - 10 GHz	10 GHz - 18 GHz	18 GHz - 26.5 GHz
Test Antenna					
Horizontal	Y	X	Y	X	X
Vertical	Z	Y	Z	X	X

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz
Test data : APPENDIX
Test result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak Average *2)	-	Power Meter (Sensor: 50MHz BW)
Carrier Frequency Separation	3 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3) *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

*1) Peak hold was applied as Worst-case measurement.
*2) Reference data
*3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.
Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.
(9 kHz -150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz)
*4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to 45.5 – 51.5 = -6.0 dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data

20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation


Report No.	14173547S-A	
Test place	Shonan EMC Lab. No.5 Shielded Room	
Date	January 11, 2022	January 12, 2022
Temperature / Humidity	25 deg. C / 27 % RH	25 deg. C / 30 % RH
Engineer	Yosuke Murakami	Yohsuke Matsuzawa
Mode	Tx, Hopping Off, Tx, Hopping On	

Mode	Freq. [MHz]	20 dB Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.946	877.230	1.000	≥ 0.631
DH5	2441.0	0.947	876.723	1.000	≥ 0.631
DH5	2480.0	0.948	876.984	1.000	≥ 0.632
DH5	Hopping On	-	78658.2	-	-
3DH5	2402.0	1.252	1161.4	1.000	≥ 0.835
3DH5	2441.0	1.255	1163.9	1.000	≥ 0.836
3DH5	2480.0	1.256	1164.6	1.000	≥ 0.837
3DH5	Hopping On	-	78704.5	-	-


Limit: Two-thirds of 20 dB Bandwidth or 25 kHz (whichever is greater).

No limit applies to 20 dB Bandwidth.

20dB Bandwidth and 99% Occupied Bandwidth

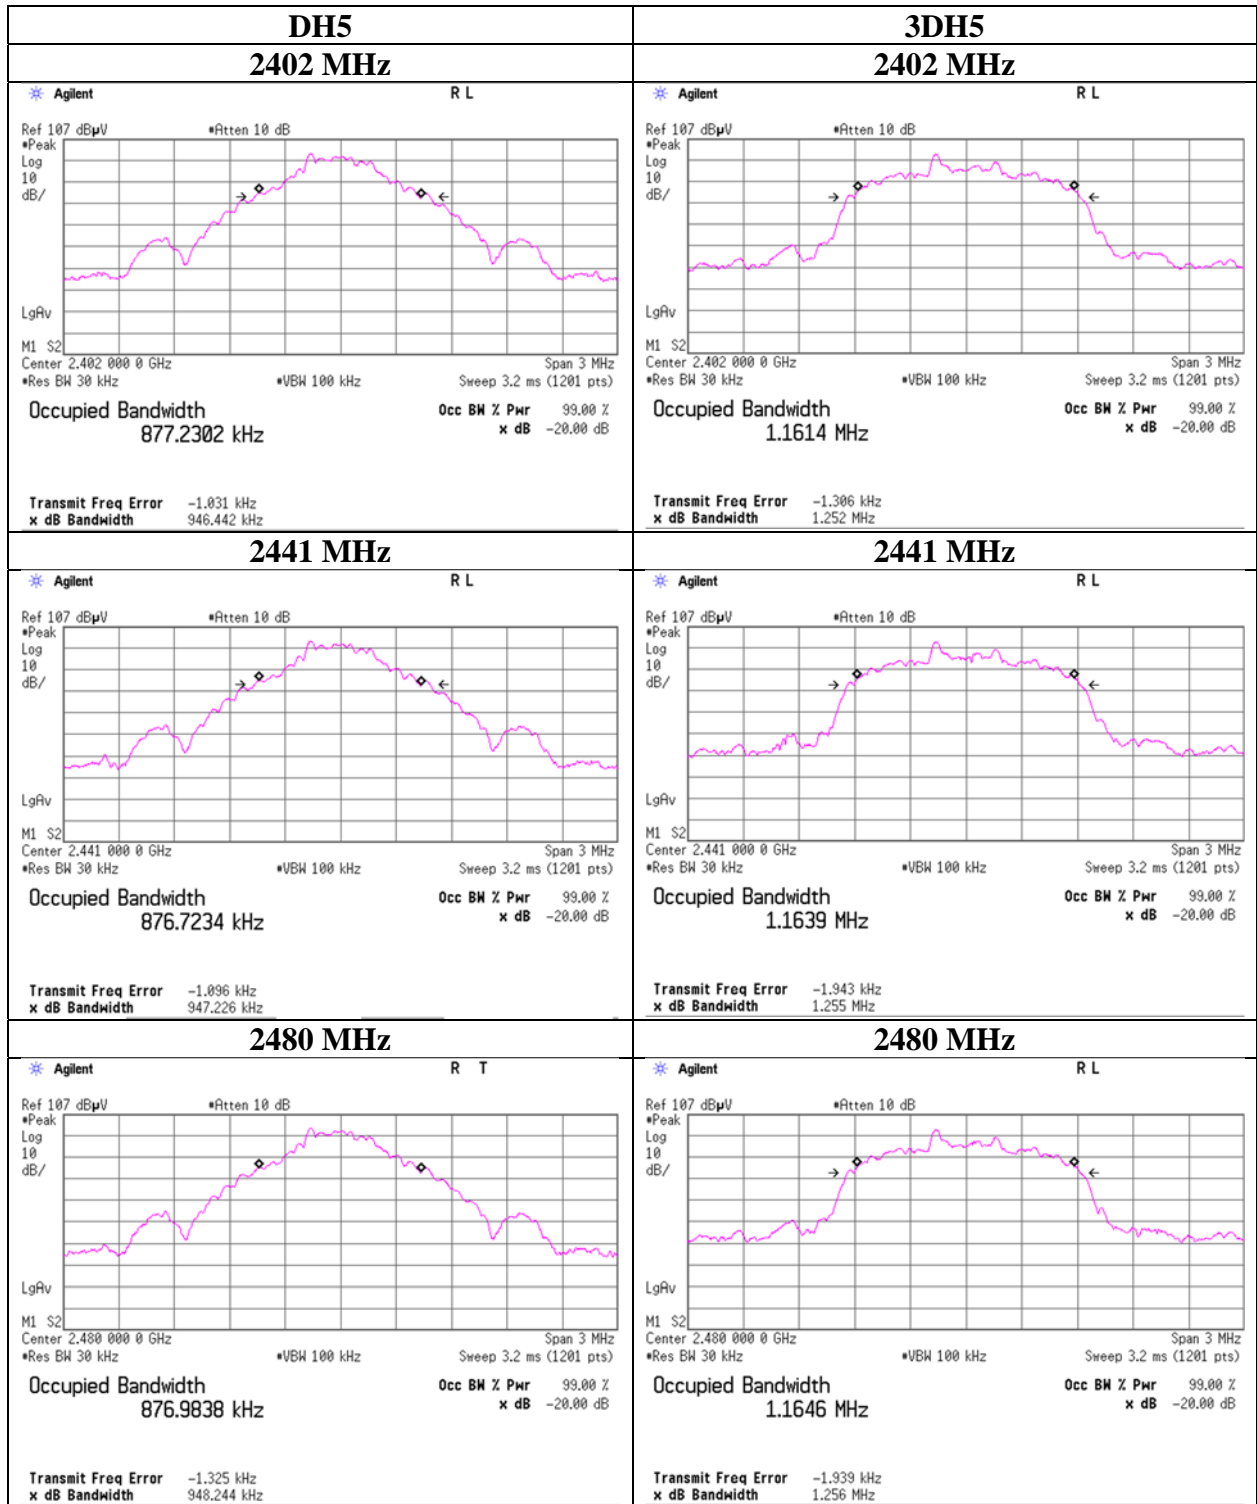

20dB Bandwidth and 99% Occupied Bandwidth

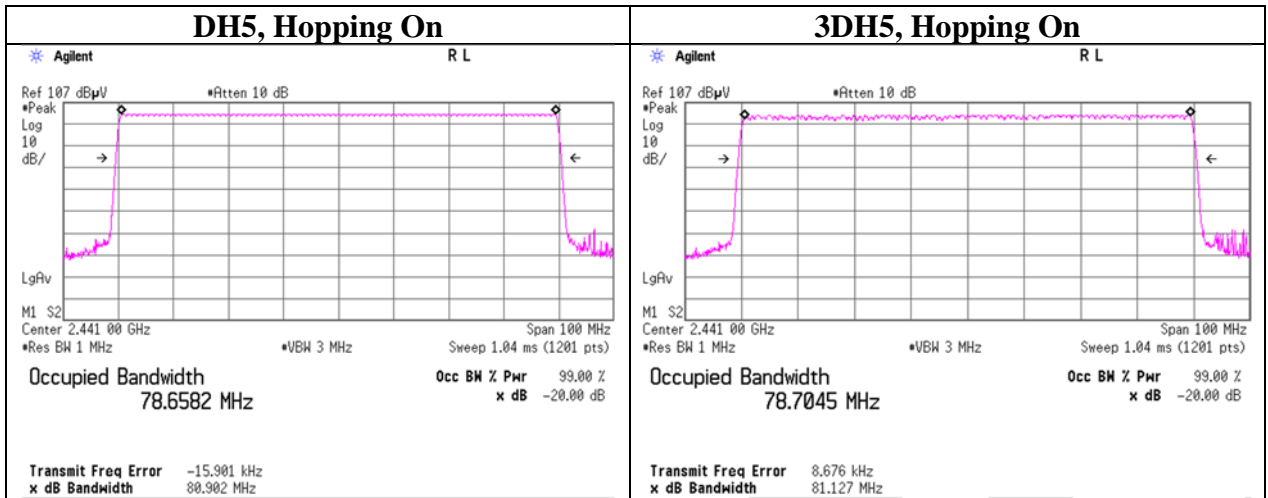

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


Number of Hopping Frequency

Report No. 14173547S-A
Test place Shonan EMC Lab. No.5 Shielded Room
Date January 11, 2022 January 12, 2022
Temperature / Humidity 25 deg. C / 27 % RH 25 deg. C / 30 % RH
Engineer Yosuke Murakami Yohsuke Matsuzawa
Mode Tx, Hopping On

Mode	Number of channel [channels]	Limit [channels]
DH5	79	≥ 15
3DH5	79	≥ 15

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

Number of Hopping Frequency

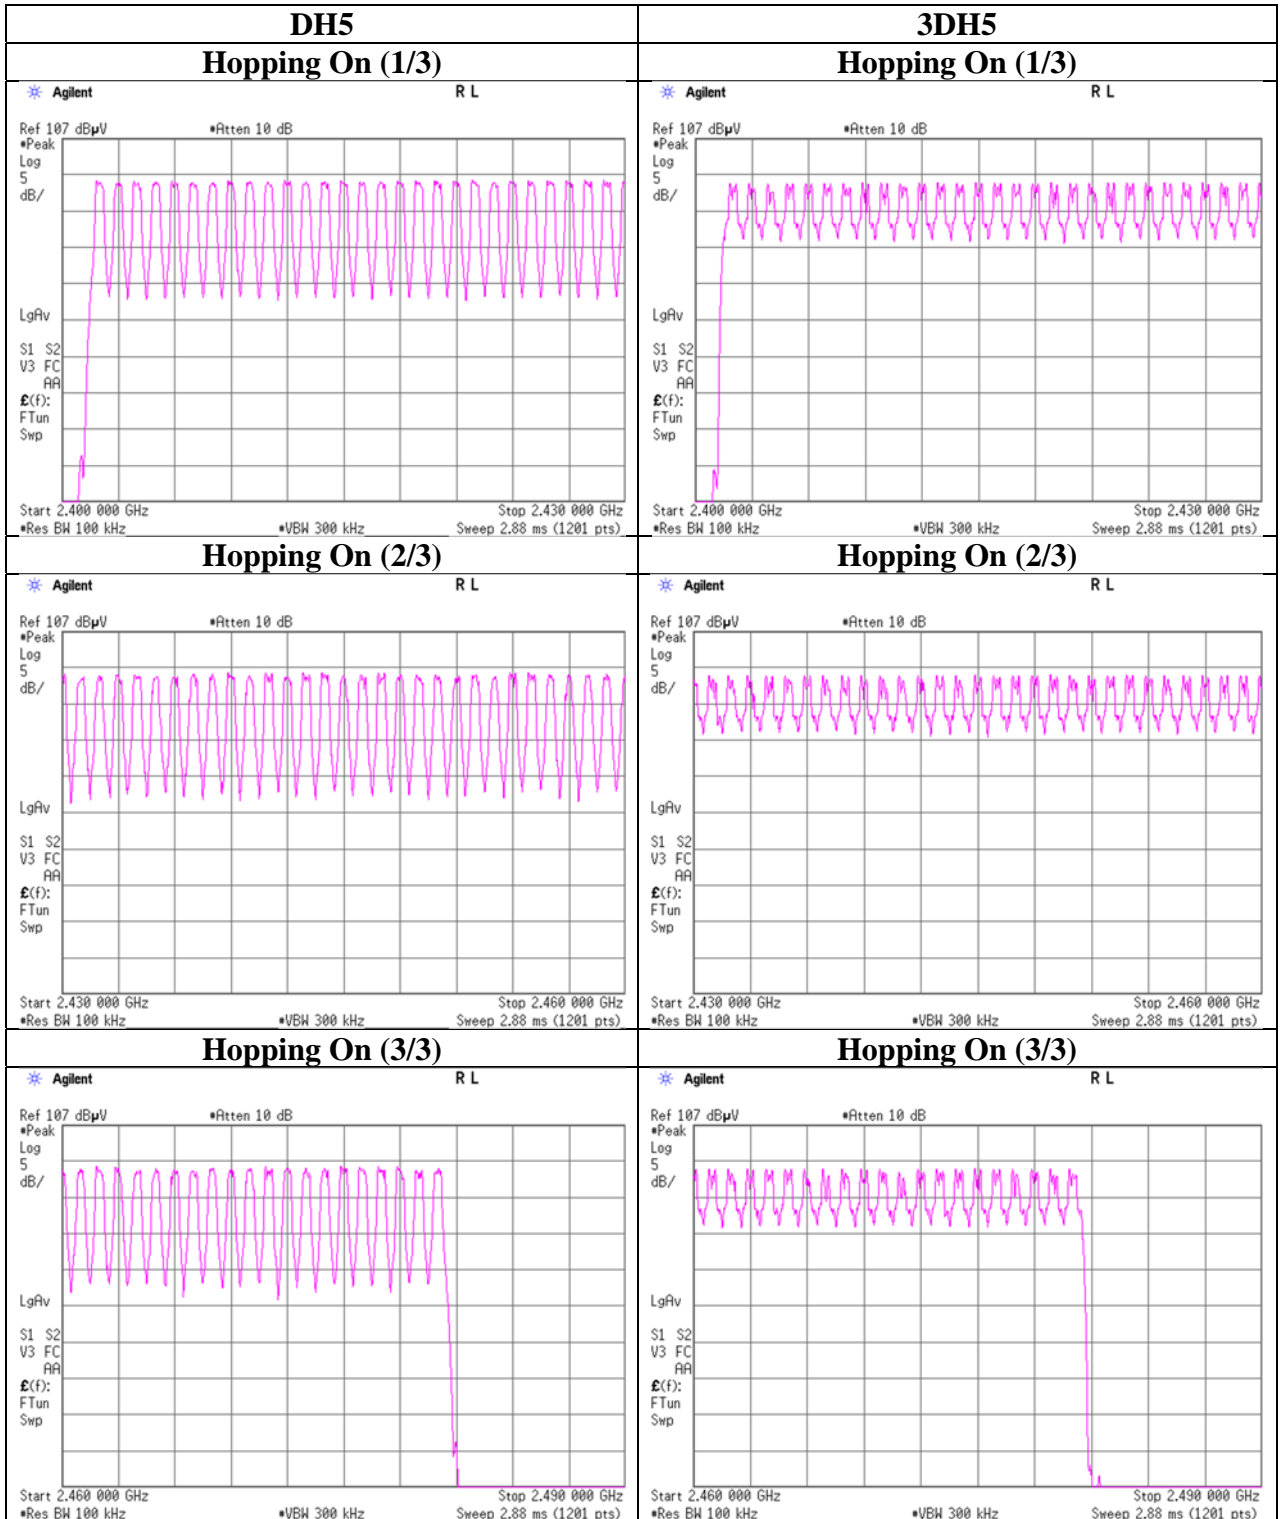

Dwell time

Report No.	14173547S-A	
Test place	Shonan EMC Lab. No.5 Shielded Room	
Date	January 11, 2022	January 12, 2022
Temperature / Humidity	25 deg. C / 27 % RH	25 deg. C / 30 % RH
Engineer	Yosuke Murakami	Yohsuke Matsuzawa
Mode	Tx, Hopping On	

Mode	Number of transmission in a 31.6(79 Hopping x 0.4) / 12.8 (32 Hopping x 0.4) second period	Length of transmission [msec]	Result [msec]	Limit [msec]
DH1	50.0 times / 5 sec. x 31.6 sec. = 316 times	0.391	124	400
DH3	26.0 times / 5 sec. x 31.6 sec. = 165 times	1.648	272	400
DH5	17.0 times / 5 sec. x 31.6 sec. = 108 times	2.897	313	400
3DH1	50.0 times / 5 sec. x 31.6 sec. = 316 times	0.399	126	400
3DH3	26.0 times / 5 sec. x 31.6 sec. = 165 times	1.650	272	400
3DH5	17.0 times / 5 sec. x 31.6 sec. = 108 times	2.905	314	400

Sample Calculation

Result = Number of transmission x Length of transmission

*Average data of 5 tests.(except Inquiry)


Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	50	50	50	50	50	50
DH3	26	26	26	26	26	26
DH5	17	17	17	17	17	17
3DH1	50	50	50	50	50	50
3DH3	26	26	26	26	26	26
3DH5	17	17	17	17	17	17

Sample Calculation


Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in $N \times 0.4s$, where N is the number of channels being used in the hopping sequence ($20 \leq N \leq 79$), is always less than $0.4s$ regardless of packet size. This is confirmed in the test report for $N = 79$.

Dwell time

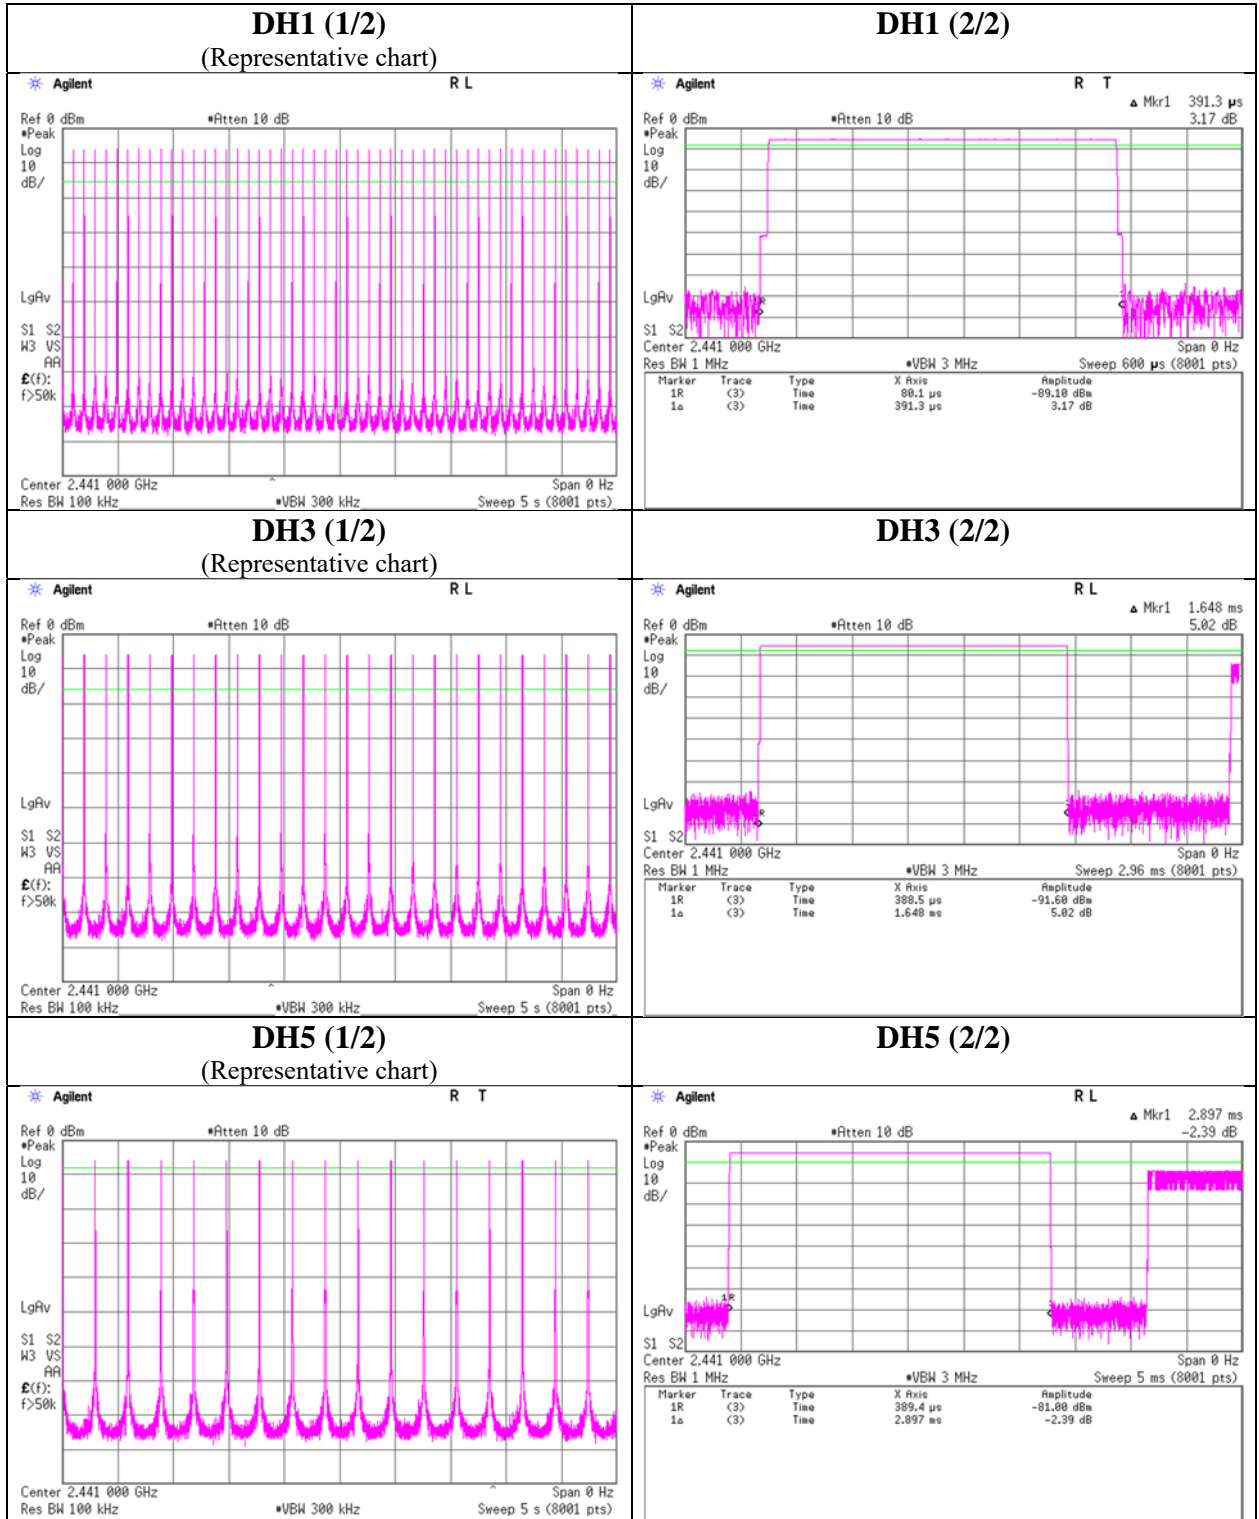

Dwell time

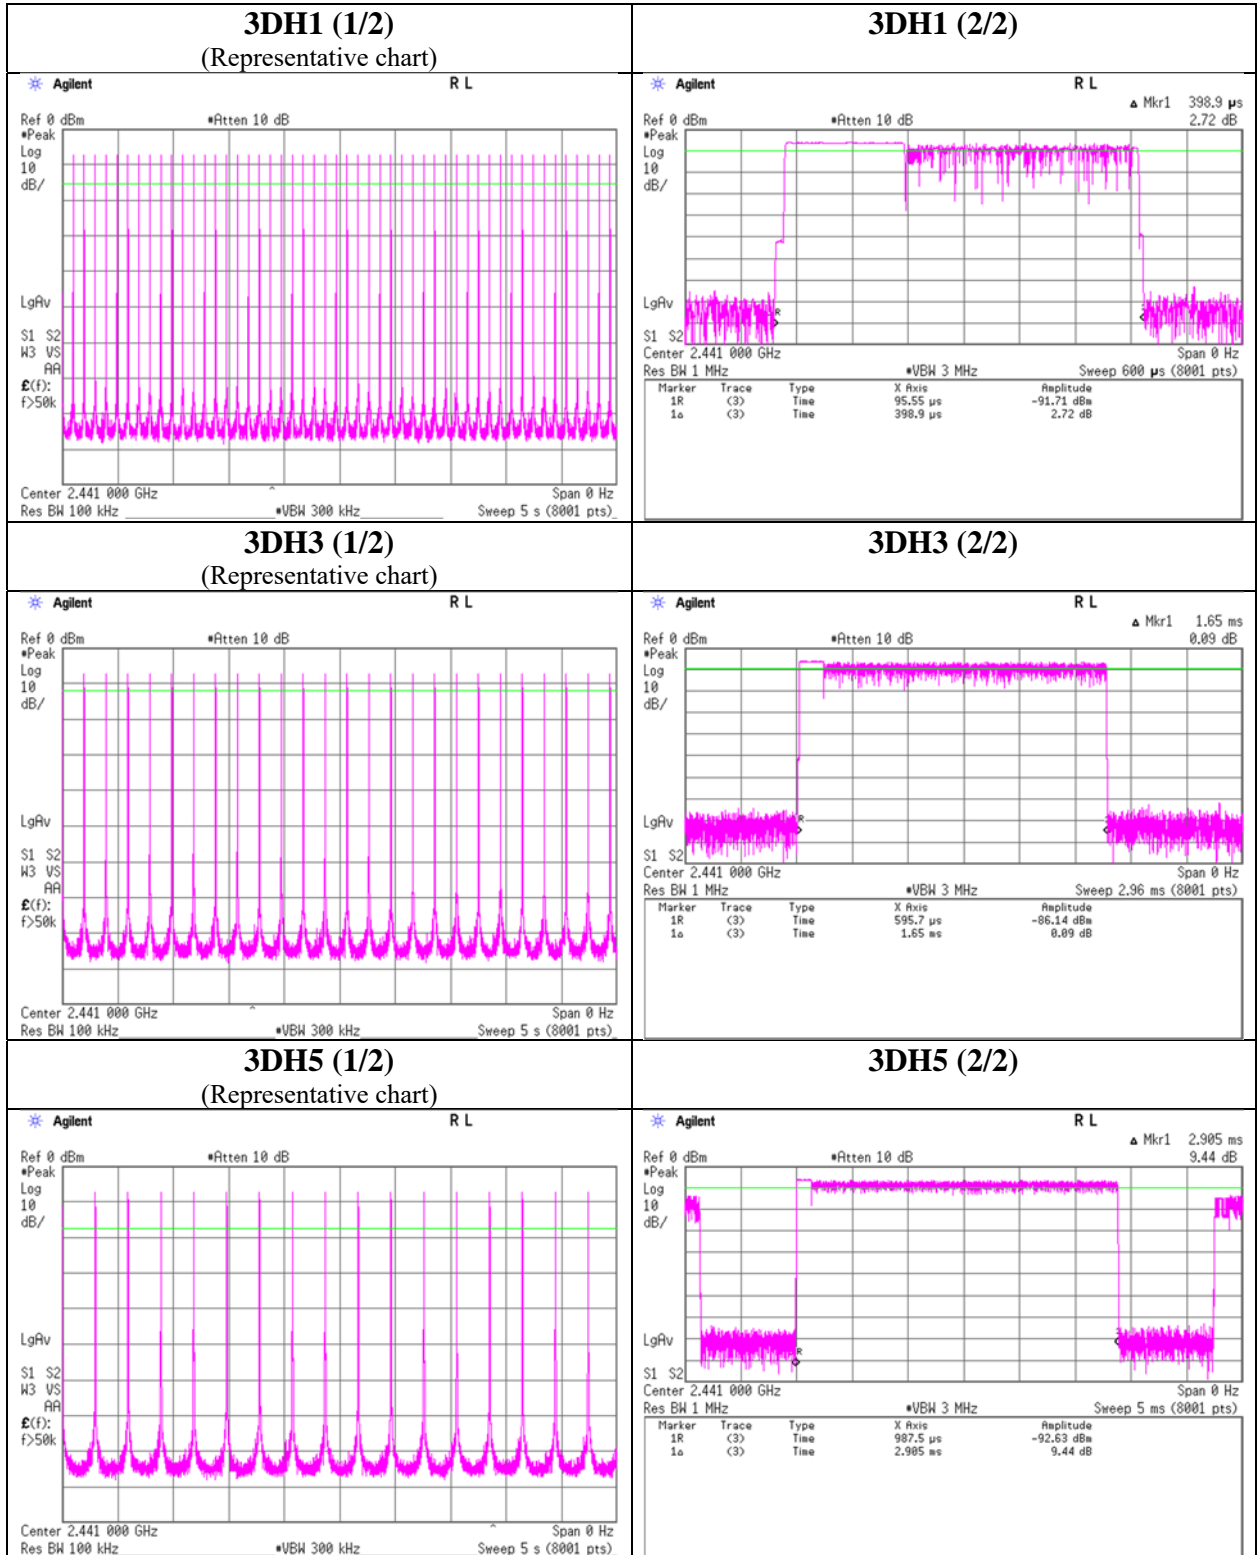

Maximum Peak Output Power

Report No. 14173547S-A
Test place Shonan EMC Lab. No.1 Measurement Room
Date January 18, 2022
Temperature / Humidity 21 deg. C / 24 % RH
Engineer Takahiro Kawakami
Mode Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
					Result		Limit		Margin	Antenna Gain [dBi]	Result		Limit		Margin
					[dBm]	[mW]	[dBm]	[mW]	[dB]		[dBm]	[mW]	[dBm]	[mW]	
DH5	2402.0	-5.13	0.89	10.17	5.93	3.92	20.96	125	15.03	1.60	7.53	5.66	36.02	4000	28.49
DH5	2441.0	-5.09	0.89	10.18	5.98	3.96	20.96	125	14.98	1.60	7.58	5.73	36.02	4000	28.44
DH5	2480.0	-5.07	0.90	10.18	6.01	3.99	20.96	125	14.95	1.60	7.61	5.77	36.02	4000	28.41
2DH5	2402.0	-5.14	0.89	10.17	5.92	3.91	20.96	125	15.04	1.60	7.52	5.65	36.02	4000	28.50
2DH5	2441.0	-5.11	0.89	10.18	5.96	3.94	20.96	125	15.00	1.60	7.56	5.70	36.02	4000	28.46
2DH5	2480.0	-5.06	0.90	10.18	6.02	4.00	20.96	125	14.94	1.60	7.62	5.78	36.02	4000	28.40
3DH5	2402.0	-4.94	0.89	10.17	6.12	4.09	20.96	125	14.84	1.60	7.72	5.92	36.02	4000	28.30
3DH5	2441.0	-4.88	0.89	10.18	6.19	4.16	20.96	125	14.77	1.60	7.79	6.01	36.02	4000	28.23
3DH5	2480.0	-4.85	0.90	10.18	6.23	4.20	20.96	125	14.73	1.60	7.83	6.07	36.02	4000	28.19

Sample Calculation:
Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss
e.i.r.p. Result = Conducted Power Result + Antenna Gain

Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

As this device had AFH mode and frequency separation could not meet the requirement of over 20dB BW without 2/3 relaxation, 125mW power limit was applied to it.

Average Output Power
(Reference data for RF Exposure)

Report No. 14173547S-A
Test place Shonan EMC Lab. No.1 Measurement Room
Date January 18, 2022
Temperature / Humidity 21 deg. C / 24 % RH
Engineer Takahiro Kawakami
Mode Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
					[dBm]	[mW]		[dBm]	[mW]
DH5	2402.0	-6.48	0.89	10.17	4.58	2.87	1.12	5.70	3.72
DH5	2441.0	-6.40	0.89	10.18	4.67	2.93	1.12	5.79	3.79
DH5	2480.0	-6.39	0.90	10.18	4.69	2.94	1.12	5.81	3.81
2DH5	2402.0	-9.00	0.89	10.17	2.06	1.61	1.12	3.18	2.08
2DH5	2441.0	-8.91	0.89	10.18	2.16	1.64	1.12	3.28	2.13
2DH5	2480.0	-8.88	0.90	10.18	2.20	1.66	1.12	3.32	2.15
3DH5	2402.0	-9.00	0.89	10.17	2.06	1.61	1.12	3.18	2.08
3DH5	2441.0	-8.92	0.89	10.18	2.15	1.64	1.12	3.27	2.12
3DH5	2480.0	-8.88	0.90	10.18	2.20	1.66	1.12	3.32	2.15

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Result (Burst power average) = Time average + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.


Burst Rate Confirmation

Report No. 14173547S-A
Test place Shonan EMC Lab. No.5 Shielded Room
Date January 11, 2022
Temperature / Humidity 25 deg. C / 27 % RH
Engineer Yosuke Murakami
Mode Tx, Hopping Off


DH5

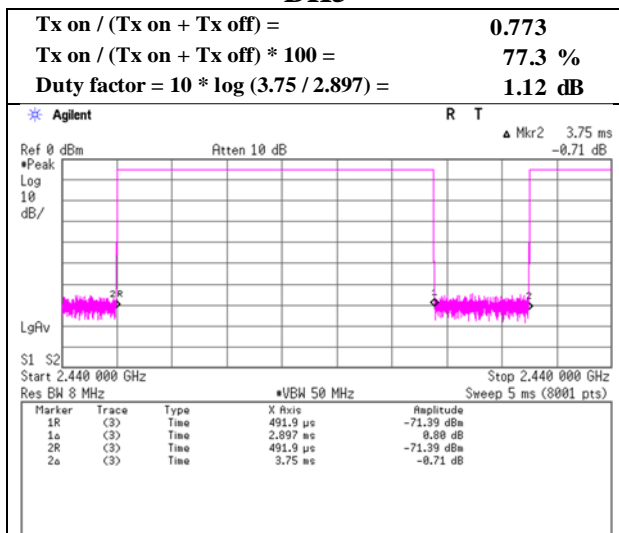

2DH5

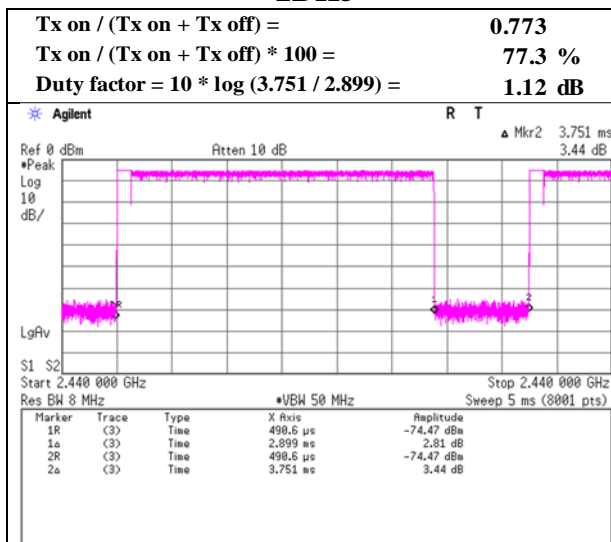

3DH5

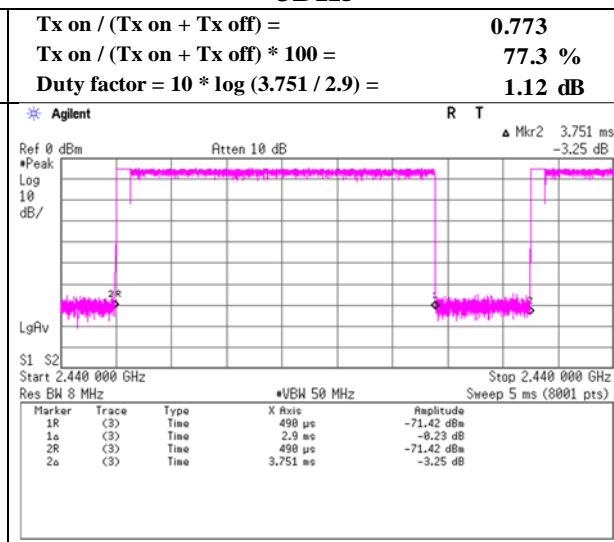

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission

Report No. 14173547S-A
Test place Shonan EMC Lab.
Semi Anechoic Chamber No.3 No.3
Date January 9, 2022 January 10, 2022
Temperature / Humidity 21 deg. C / 27 % RH 20 deg. C / 25 % RH
Engineer Yosuke Murakami Takahiro Kawakami
(1 GHz – 10 GHz) (10 GHz – 26.5 GHz)
Mode Tx, Hopping Off, DH5 2402 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	47.45	28.33	14.42	41.62	2.28	50.86	73.9	23.0	400	88	-
Hori.	4804.000	PK	49.57	31.77	6.88	42.89	2.28	47.61	73.9	26.2	112	230	-
Hori.	7206.000	PK	49.56	37.37	8.25	43.39	2.28	54.07	73.9	19.8	150	0	-
Hori.	9608.000	PK	49.61	39.12	9.45	43.18	2.28	57.28	73.9	16.6	150	0	-
Hori.	2390.000	AV	35.56	28.33	14.42	41.62	2.28	38.97	53.9	14.9	400	88	VBW: 360 Hz
Hori.	4804.000	AV	40.26	31.77	6.88	42.89	2.28	38.30	53.9	15.6	112	230	VBW: 360 Hz
Hori.	7206.000	AV	37.14	37.37	8.25	43.39	2.28	41.65	53.9	12.2	150	0	VBW: 360 Hz, Floor Noise
Hori.	9608.000	AV	37.58	39.12	9.45	43.18	2.28	45.25	53.9	8.6	150	0	VBW: 360 Hz, Floor Noise
Vert.	2390.000	PK	47.96	28.33	14.42	41.62	2.28	51.37	73.9	22.5	152	83	-
Vert.	4804.000	PK	49.57	31.77	6.88	42.89	2.28	47.61	73.9	26.2	100	319	-
Vert.	7206.000	PK	49.75	37.37	8.25	43.39	2.28	54.26	73.9	19.6	150	0	-
Vert.	9608.000	PK	49.46	39.12	9.45	43.18	2.28	57.13	73.9	16.7	150	0	-
Vert.	2390.000	AV	35.62	28.33	14.42	41.62	2.28	39.03	53.9	14.8	152	83	VBW: 360 Hz
Vert.	4804.000	AV	40.37	31.77	6.88	42.89	2.28	38.41	53.9	15.4	100	319	VBW: 360 Hz
Vert.	7206.000	AV	37.28	37.37	8.25	43.39	2.28	41.79	53.9	12.1	150	0	VBW: 360 Hz, Floor Noise
Vert.	9608.000	AV	37.67	39.12	9.45	43.18	2.28	45.34	53.9	8.5	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

*These results have sufficient margin without taking account Duty cycle correction factor.

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	101.32	28.31	14.44	41.63	2.28	104.72	-	-	Carrier
Hori.	2400.000	PK	45.17	28.31	14.44	41.63	2.28	48.57	84.7	36.1	-
Vert.	2402.000	PK	99.92	28.31	14.44	41.63	2.28	103.32	-	-	Carrier
Vert.	2400.000	PK	44.31	28.31	14.44	41.63	2.28	47.71	83.3	35.5	-



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission
(Reference Plot for band-edge)

Report No.	14173547S-A
Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 9, 2022
Temperature / Humidity	21 deg. C / 27 % RH
Engineer	Yosuke Murakami
Mode	Tx, Hopping Off, DH5 2402 MHz

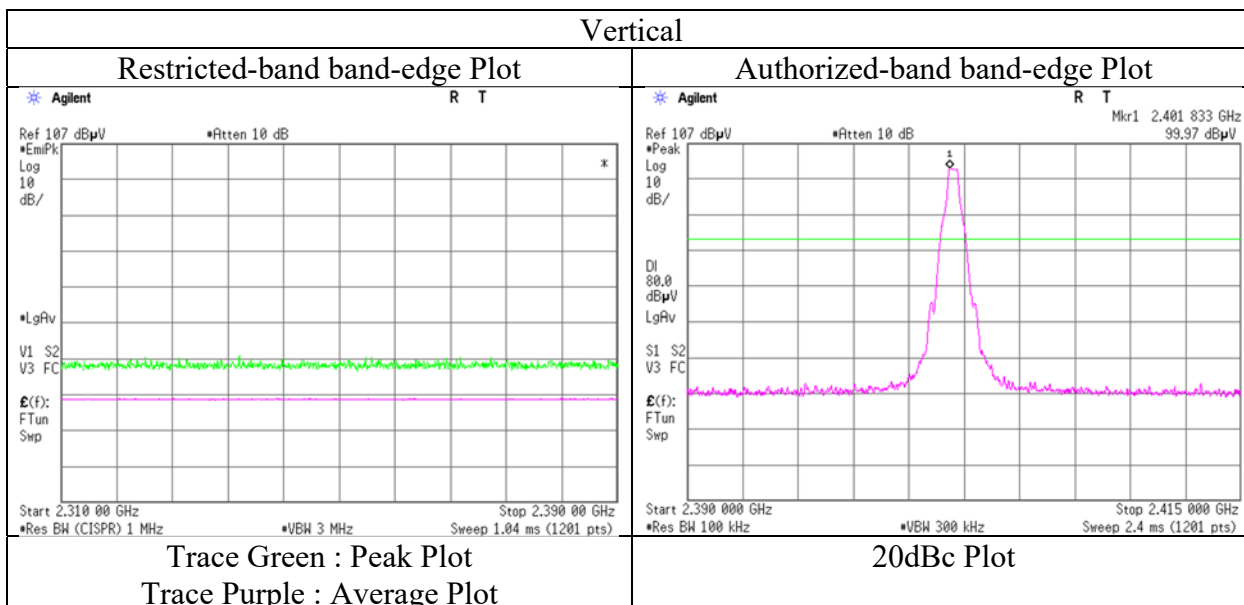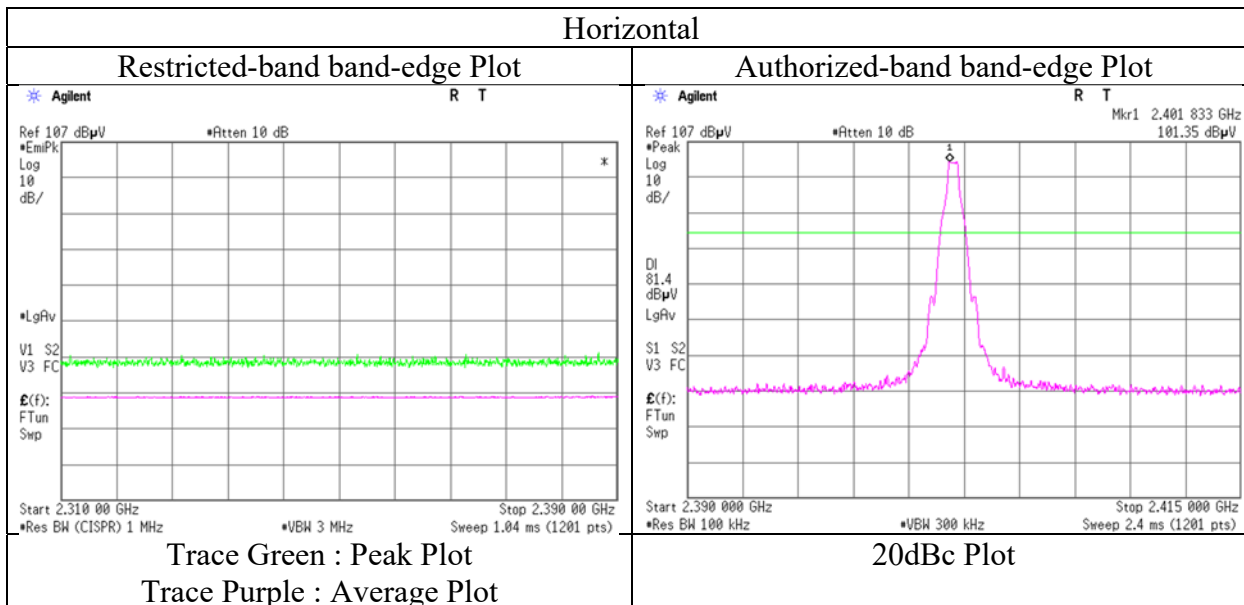

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Radiated Spurious Emission

Report No. 14173547S-A
Test place Shonan EMC Lab.
Semi Anechoic Chamber No.3 No.3
Date January 9, 2022 January 10, 2022
Temperature / Humidity 21 deg. C / 27 % RH 20 deg. C / 25 % RH
Engineer Yosuke Murakami Takahiro Kawakami
(1 GHz – 10 GHz) (10 GHz – 26.5 GHz)
Mode Tx, Hopping Off, DH5 2441 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4882.000	PK	50.04	31.87	6.93	42.89	2.28	48.23	73.9	25.6	100	206	-
Hori.	7323.000	PK	48.13	37.54	8.32	43.52	2.28	52.75	73.9	21.1	150	0	-
Hori.	9764.000	PK	48.98	39.41	9.52	42.97	2.28	57.22	73.9	16.6	150	0	-
Hori.	4882.000	AV	40.27	31.87	6.93	42.89	2.28	38.46	53.9	15.4	100	206	VBW: 360 Hz
Hori.	7323.000	AV	36.65	37.54	8.32	43.52	2.28	41.27	53.9	12.6	150	0	VBW: 360 Hz, Floor Noise
Hori.	9764.000	AV	37.02	39.41	9.52	42.97	2.28	45.26	53.9	8.6	150	0	VBW: 360 Hz, Floor Noise
Vert.	4882.000	PK	49.81	31.87	6.93	42.89	2.28	48.00	73.9	25.9	145	316	-
Vert.	7323.000	PK	48.26	37.54	8.32	43.52	2.28	52.88	73.9	21.0	150	0	-
Vert.	9764.000	PK	49.05	39.41	9.52	42.97	2.28	57.29	73.9	16.6	150	0	-
Vert.	4882.000	AV	39.76	31.87	6.93	42.89	2.28	37.95	53.9	15.9	145	316	VBW: 360 Hz
Vert.	7323.000	AV	36.54	37.54	8.32	43.52	2.28	41.16	53.9	12.7	150	0	VBW: 360 Hz, Floor Noise
Vert.	9764.000	AV	36.94	39.41	9.52	42.97	2.28	45.18	53.9	8.7	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission

Report No. 14173547S-A
Test place Shonan EMC Lab.
Semi Anechoic Chamber No.3 No.3
Date January 9, 2022 January 10, 2022
Temperature / Humidity 21 deg. C / 27 % RH 20 deg. C / 25 % RH
Engineer Yosuke Murakami Takahiro Kawakami
(1 GHz – 10 GHz) (10 GHz – 26.5 GHz)
Mode Tx, Hopping Off, DH5 2480 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	50.91	28.24	14.52	41.65	2.28	54.30	73.9	19.6	376	90	-
Hori.	4960.000	PK	49.46	32.14	6.99	42.89	2.28	47.98	73.9	25.9	113	222	-
Hori.	7440.000	PK	48.44	37.62	8.37	43.65	2.28	53.06	73.9	20.8	150	0	-
Hori.	9920.000	PK	47.10	39.30	9.59	42.77	2.28	55.50	73.9	18.4	150	0	-
Hori.	2483.500	AV	36.90	28.24	14.52	41.65	2.28	40.29	53.9	13.6	376	90	VBW: 360 Hz
Hori.	4960.000	AV	39.89	32.14	6.99	42.89	2.28	38.41	53.9	15.4	113	222	VBW: 360 Hz
Hori.	7440.000	AV	36.74	37.62	8.37	43.65	2.28	41.36	53.9	12.5	150	0	VBW: 360 Hz, Floor Noise
Hori.	9920.000	AV	35.80	39.30	9.59	42.77	2.28	44.20	53.9	9.7	150	0	VBW: 360 Hz, Floor Noise
Vert.	2483.500	PK	52.38	28.24	14.52	41.65	2.28	55.77	73.9	18.1	110	324	-
Vert.	4960.000	PK	49.60	32.14	6.99	42.89	2.28	48.12	73.9	25.7	171	149	-
Vert.	7440.000	PK	48.16	37.62	8.37	43.65	2.28	52.78	73.9	21.1	150	0	-
Vert.	9920.000	PK	46.93	39.30	9.59	42.77	2.28	55.33	73.9	18.5	150	0	-
Vert.	2483.500	AV	37.20	28.24	14.52	41.65	2.28	40.59	53.9	13.3	110	324	VBW: 360 Hz
Vert.	4960.000	AV	40.03	32.14	6.99	42.89	2.28	38.55	53.9	15.3	171	149	VBW: 360 Hz
Vert.	7440.000	AV	36.72	37.62	8.37	43.65	2.28	41.34	53.9	12.5	150	0	VBW: 360 Hz, Floor Noise
Vert.	9920.000	AV	35.74	39.30	9.59	42.77	2.28	44.14	53.9	9.7	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



Distance factor : 1 GHz - 10 GHz : 20log (3.90 m / 3.0 m) = 2.28 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission
(Reference Plot for band-edge)

Report No. 14173547S-A
Test place Shonan EMC Lab.
Semi Anechoic Chamber No.3
Date January 9, 2022
Temperature / Humidity 21 deg. C / 27 % RH
Engineer Yosuke Murakami
Mode Tx, Hopping Off, DH5 2480 MHz

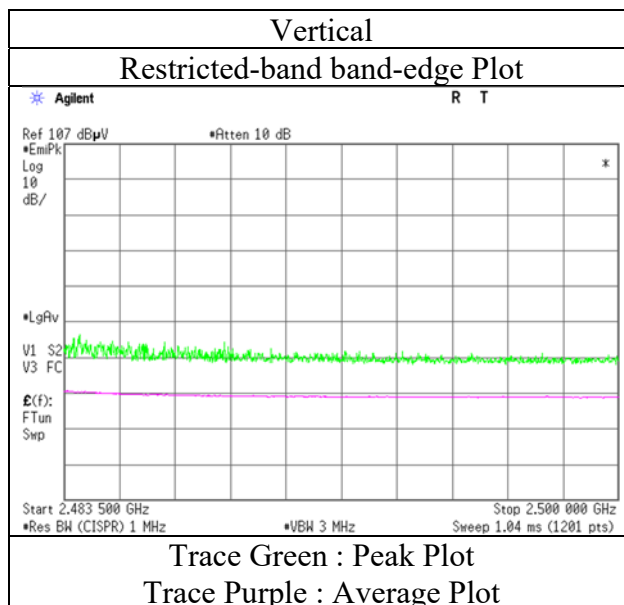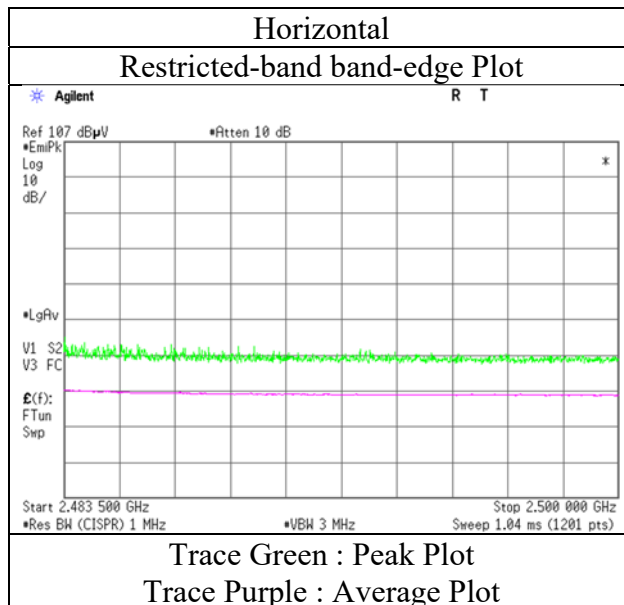

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Report No. 14173547S-A
Test place Shonan EMC Lab.
Semi Anechoic Chamber No.3 No.3
Date January 9, 2022 January 10, 2022
Temperature / Humidity 21 deg. C / 27 % RH 20 deg. C / 25 % RH
Engineer Yosuke Murakami Takahiro Kawakami
(1 GHz – 10 GHz) (10 GHz – 26.5 GHz)
Mode Tx, Hopping Off, 3DH5 2402 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	46.77	28.33	14.42	41.62	2.28	50.18	73.9	23.7	398	84	-
Hori.	4804.000	PK	50.12	31.77	6.88	42.89	2.28	48.16	73.9	25.7	104	230	-
Hori.	7206.000	PK	49.38	37.37	8.25	43.39	2.28	53.89	73.9	20.0	150	0	-
Hori.	9608.000	PK	49.72	39.12	9.45	43.18	2.28	57.39	73.9	16.5	150	0	-
Hori.	2390.000	AV	35.53	28.33	14.42	41.62	2.28	38.94	53.9	14.9	398	84	VBW: 360 Hz
Hori.	4804.000	AV	40.27	31.77	6.88	42.89	2.28	38.31	53.9	15.5	104	230	VBW: 360 Hz
Hori.	7206.000	AV	37.23	37.37	8.25	43.39	2.28	41.74	53.9	12.1	150	0	VBW: 360 Hz, Floor Noise
Hori.	9608.000	AV	37.79	39.12	9.45	43.18	2.28	45.46	53.9	8.4	150	0	VBW: 360 Hz, Floor Noise
Vert.	2390.000	PK	47.62	28.33	14.42	41.62	2.28	51.03	73.9	22.8	154	19	-
Vert.	4804.000	PK	50.64	31.77	6.88	42.89	2.28	48.68	73.9	25.2	131	322	-
Vert.	7206.000	PK	49.56	37.37	8.25	43.39	2.28	54.07	73.9	19.8	150	0	-
Vert.	9608.000	PK	50.24	39.12	9.45	43.18	2.28	57.91	73.9	15.9	150	0	-
Vert.	2390.000	AV	35.60	28.33	14.42	41.62	2.28	39.01	53.9	14.8	154	19	VBW: 360 Hz
Vert.	4804.000	AV	39.98	31.77	6.88	42.89	2.28	38.02	53.9	15.8	131	322	VBW: 360 Hz
Vert.	7206.000	AV	37.37	37.37	8.25	43.39	2.28	41.88	53.9	12.0	150	0	VBW: 360 Hz, Floor Noise
Vert.	9608.000	AV	37.75	39.12	9.45	43.18	2.28	45.42	53.9	8.4	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant. Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

*These results have sufficient margin without taking account Duty cycle correction factor.

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	101.17	28.31	14.44	41.63	2.28	104.57	-	-	Carrier
Hori.	2400.000	PK	43.16	28.31	14.44	41.63	2.28	46.56	84.5	37.9	-
Vert.	2402.000	PK	100.77	28.31	14.44	41.63	2.28	104.17	-	-	Carrier
Vert.	2400.000	PK	42.73	28.31	14.44	41.63	2.28	46.13	84.1	37.9	-



Result = Reading + Ant. Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log(3.90 m / 3.0 m) = 2.28 dB

10 GHz - 40 GHz : 20log(1.0 m / 3.0 m) = -9.54 dB

Radiated Spurious Emission
(Reference Plot for band-edge)

Report No. 14173547S-A
 Test place Shonan EMC Lab.
 Semi Anechoic Chamber No.3
 Date January 9, 2022
 Temperature / Humidity 21 deg. C / 27 % RH
 Engineer Yosuke Murakami
 Mode Tx, Hopping Off, 3DH5 2402 MHz

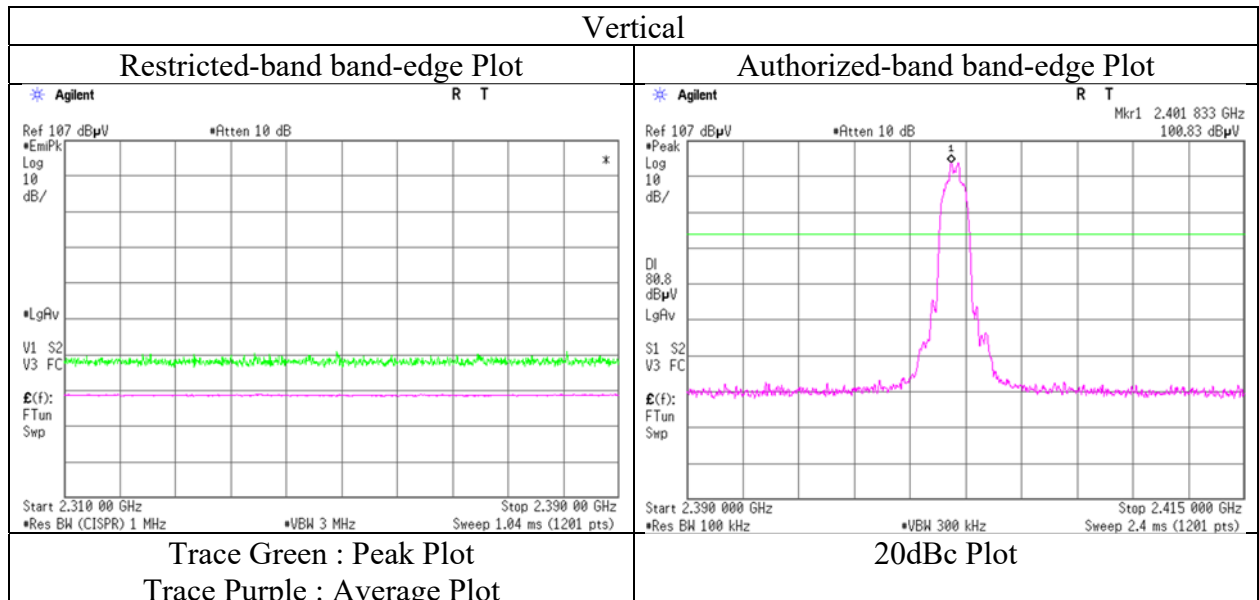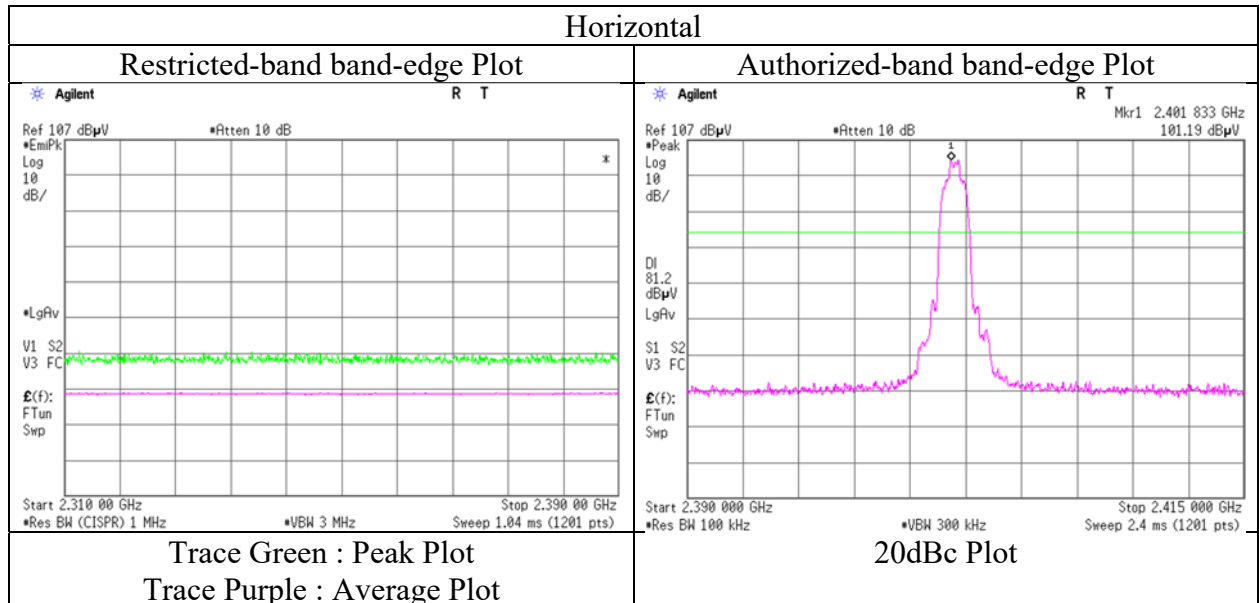

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Report No. 14173547S-A
Test place Shonan EMC Lab.
Semi Anechoic Chamber No.3 No.3
Date January 9, 2022 January 10, 2022
Temperature / Humidity 21 deg. C / 27 % RH 20 deg. C / 25 % RH
Engineer Yosuke Murakami Takahiro Kawakami
(1 GHz – 10 GHz) (10 GHz – 26.5 GHz)
Mode Tx, Hopping Off, 3DH5 2441 MHz

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4882.000	PK	50.09	31.87	6.93	42.89	2.28	48.28	73.9	25.6	102	203	-
Hori.	7323.000	PK	48.44	37.54	8.32	43.52	2.28	53.06	73.9	20.8	150	0	-
Hori.	9764.000	PK	48.10	39.41	9.52	42.97	2.28	56.34	73.9	17.5	150	0	-
Hori.	4882.000	AV	40.43	31.87	6.93	42.89	2.28	38.62	53.9	15.2	102	203	VBW: 360 Hz
Hori.	7323.000	AV	36.79	37.54	8.32	43.52	2.28	41.41	53.9	12.4	150	0	VBW: 360 Hz, Floor Noise
Hori.	9764.000	AV	37.14	39.41	9.52	42.97	2.28	45.38	53.9	8.5	150	0	VBW: 360 Hz, Floor Noise
Vert.	4882.000	PK	49.58	31.87	6.93	42.89	2.28	47.77	73.9	26.1	144	318	-
Vert.	7323.000	PK	48.00	37.54	8.32	43.52	2.28	52.62	73.9	21.2	150	0	-
Vert.	9764.000	PK	48.04	39.41	9.52	42.97	2.28	56.28	73.9	17.6	150	0	-
Vert.	4882.000	AV	40.06	31.87	6.93	42.89	2.28	38.25	53.9	15.6	144	318	VBW: 360 Hz
Vert.	7323.000	AV	36.79	37.54	8.32	43.52	2.28	41.41	53.9	12.4	150	0	VBW: 360 Hz, Floor Noise
Vert.	9764.000	AV	37.03	39.41	9.52	42.97	2.28	45.27	53.9	8.6	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant. Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission

Report No.	14173547S-A		
Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.2	No.3	No.3
Date	January 11, 2022	January 9, 2022	January 10, 2022
Temperature / Humidity	24 deg. C / 27 % RH	21 deg. C / 27 % RH	20 deg. C / 25 % RH
Engineer	Shiro Kobayashi	Yosuke Murakami	Takahiro Kawakami
Mode	(30 MHz - 1 GHz)	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
	Tx, Hopping Off, 3DH5 2480 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant. Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	135.166	QP	38.50	14.13	8.28	31.83	0.00	29.08	43.5	14.4	228	311	-
Hori.	147.456	QP	36.00	14.67	8.56	31.82	0.00	27.41	43.5	16.0	213	321	-
Hori.	159.743	QP	35.40	15.16	8.73	31.81	0.00	27.48	43.5	16.0	194	326	-
Hori.	245.761	QP	33.80	11.82	6.06	31.72	0.00	19.96	46.0	26.0	117	96	-
Hori.	294.912	QP	35.40	13.67	6.40	31.69	0.00	23.78	46.0	22.2	100	18	-
Hori.	356.353	QP	32.30	15.29	6.84	31.63	0.00	22.80	46.0	23.2	100	337	-
Hori.	393.217	QP	30.60	15.77	7.06	31.64	0.00	21.79	46.0	24.2	100	309	-
Hori.	528.384	QP	32.50	17.75	7.86	31.63	0.00	26.48	46.0	19.5	164	241	-
Hori.	589.829	QP	28.90	19.16	8.19	31.61	0.00	24.64	46.0	21.3	152	145	-
Hori.	2483.500	PK	51.55	28.24	14.52	41.65	2.28	54.94	73.9	18.9	380	89	-
Hori.	4960.000	PK	49.78	32.14	6.99	42.89	2.28	48.30	73.9	25.6	114	227	-
Hori.	7440.000	PK	47.86	37.62	8.37	43.65	2.28	52.48	73.9	21.4	150	0	-
Hori.	9920.000	PK	47.24	39.30	9.59	42.77	2.28	55.64	73.9	18.2	150	0	-
Hori.	2483.500	AV	36.65	28.24	14.52	41.65	2.28	40.04	53.9	13.8	380	89	VBW: 360 Hz
Hori.	4960.000	AV	40.12	32.14	6.99	42.89	2.28	38.64	53.9	15.2	114	227	VBW: 360 Hz
Hori.	7440.000	AV	36.66	37.62	8.37	43.65	2.28	41.28	53.9	12.6	150	0	VBW: 360 Hz, Floor Noise
Hori.	9920.000	AV	35.84	39.30	9.59	42.77	2.28	44.24	53.9	9.6	150	0	VBW: 360 Hz, Floor Noise
Vert.	135.166	QP	37.10	14.13	8.28	31.83	0.00	27.68	43.5	15.8	100	326	-
Vert.	147.453	QP	33.40	14.67	8.56	31.82	0.00	24.81	43.5	18.6	100	75	-
Vert.	159.743	QP	33.20	15.16	8.73	31.81	0.00	25.28	43.5	18.2	100	111	-
Vert.	528.388	QP	31.20	17.75	7.86	31.63	0.00	25.18	46.0	20.8	100	104	-
Vert.	2483.500	PK	52.53	28.24	14.52	41.65	2.28	55.92	73.9	17.9	111	325	-
Vert.	4960.000	PK	49.53	32.14	6.99	42.89	2.28	48.05	73.9	25.8	173	137	-
Vert.	7440.000	PK	47.86	37.62	8.37	43.65	2.28	52.48	73.9	21.4	150	0	-
Vert.	9920.000	PK	47.42	39.30	9.59	42.77	2.28	55.82	73.9	18.0	150	0	-
Vert.	2483.500	AV	37.03	28.24	14.52	41.65	2.28	40.42	53.9	13.4	111	325	VBW: 360 Hz
Vert.	4960.000	AV	39.44	32.14	6.99	42.89	2.28	37.96	53.9	15.9	173	137	VBW: 360 Hz
Vert.	7440.000	AV	36.74	37.62	8.37	43.65	2.28	41.36	53.9	12.5	150	0	VBW: 360 Hz, Floor Noise
Vert.	9920.000	AV	35.76	39.30	9.59	42.77	2.28	44.16	53.9	9.7	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



Distance factor : 1 GHz - 10 GHz : $20\log(3.90\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission
(Reference Plot for band-edge)


Report No. 14173547S-A
Test place Shonan EMC Lab.
Semi Anechoic Chamber No.3
Date January 9, 2022
Temperature / Humidity 21 deg. C / 27 % RH
Engineer Yosuke Murakami
Mode Tx, Hopping Off, 3DH5 2480 MHz

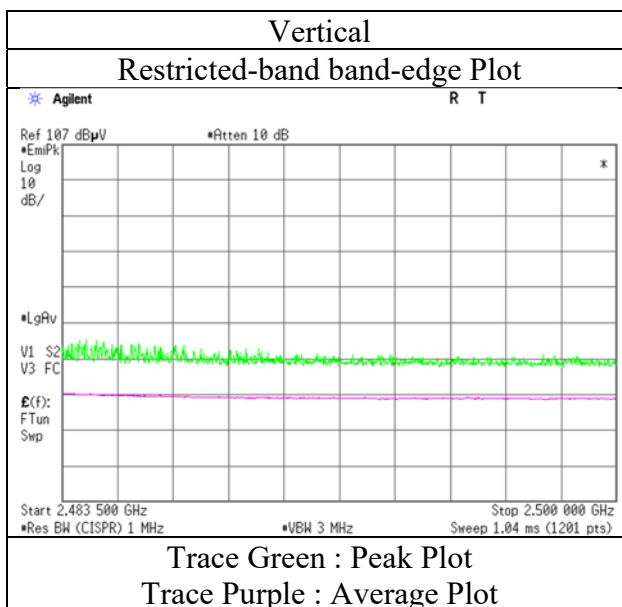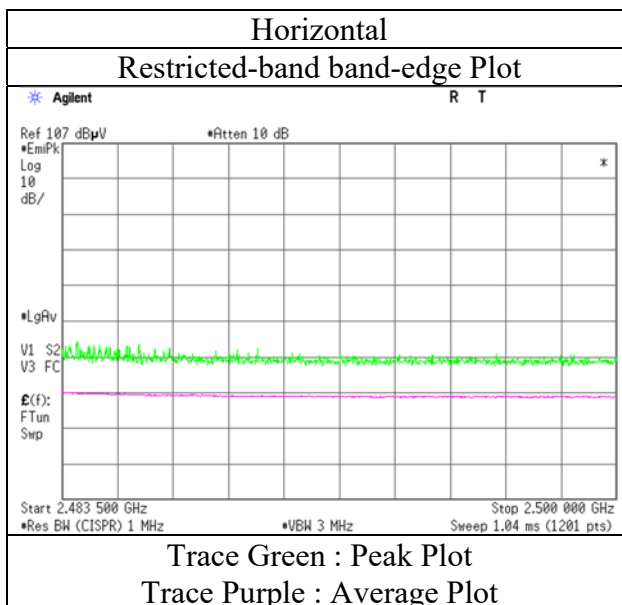

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Peak Output Power)

Report No.	14173547S-A		
Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.2	No.3	No.3
Date	January 11, 2022	January 9, 2022	January 10, 2022
Temperature / Humidity	24 deg. C / 27 % RH	21 deg. C / 27 % RH	20 deg. C / 25 % RH
Engineer	Shiro Kobayashi	Yosuke Murakami	Takahiro Kawakami
	(30 MHz - 1 GHz)	(1 GHz - 10 GHz)	(10 GHz - 26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz		


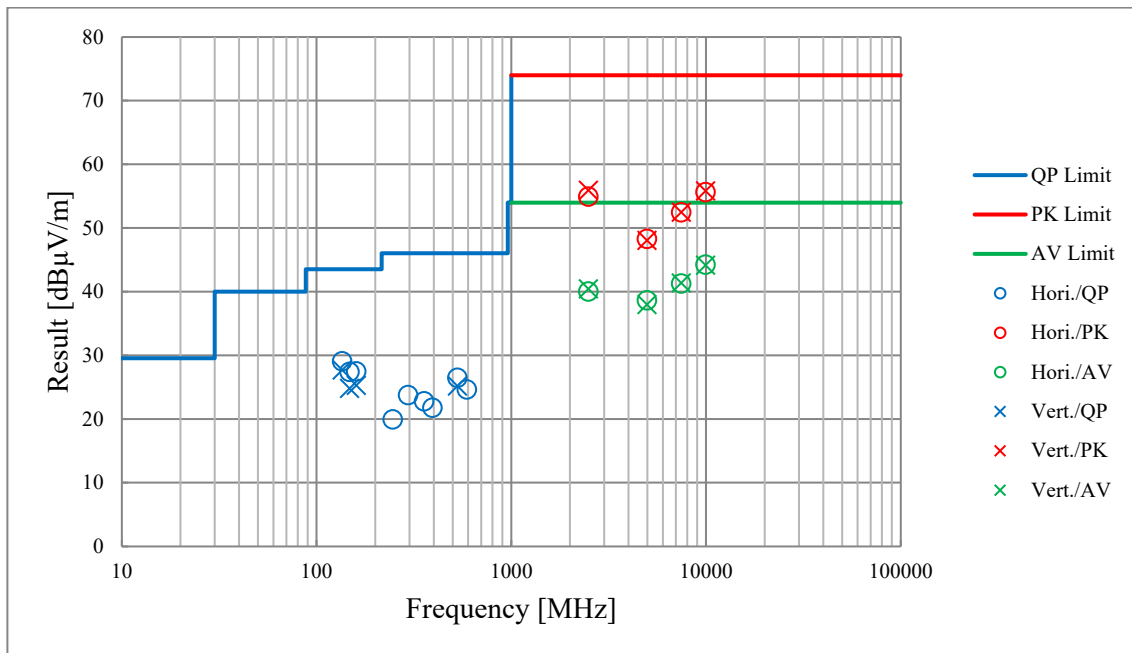


*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Report No.	14173547S-A
Test place	Shonan EMC Lab. No.5 Shielded Room
Date	January 11, 2022
Temperature / Humidity	25 deg. C / 27 % RH
Engineer	Yosuke Murakami
Mode	Tx, Hopping Off, DH5



2402 MHz

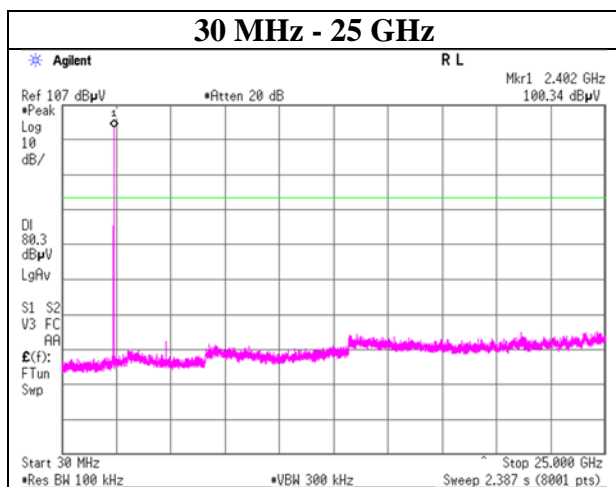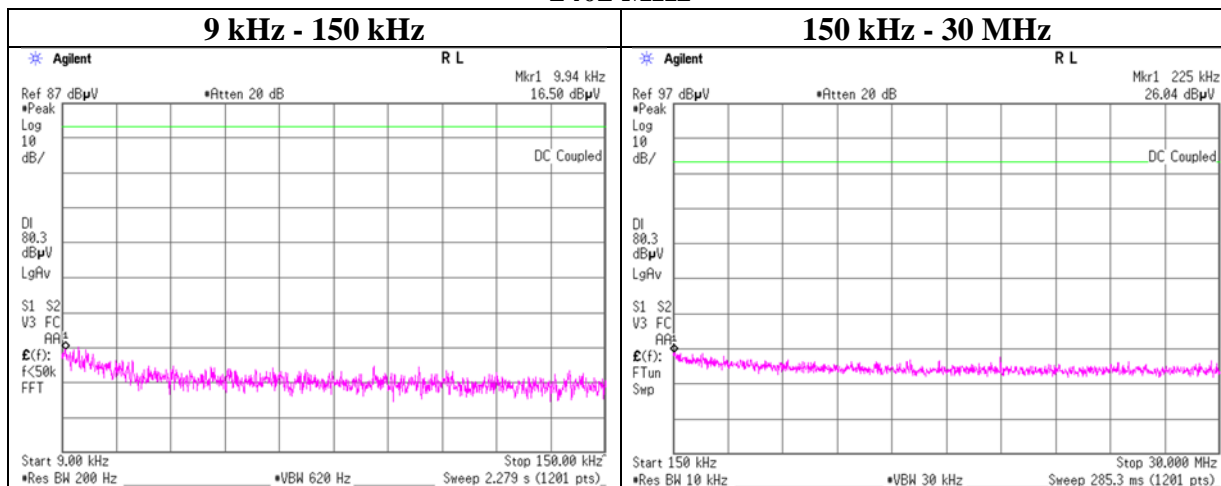

Conducted Spurious Emission

Report No.	14173547S-A
Test place	Shonan EMC Lab. No.5 Shielded Room
Date	January 11, 2022
Temperature / Humidity	25 deg. C / 27 % RH
Engineer	Yosuke Murakami
Mode	Tx, Hopping Off, DH5



2441 MHz

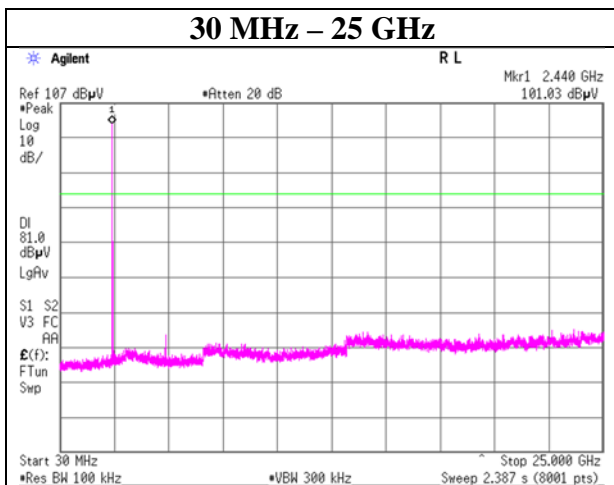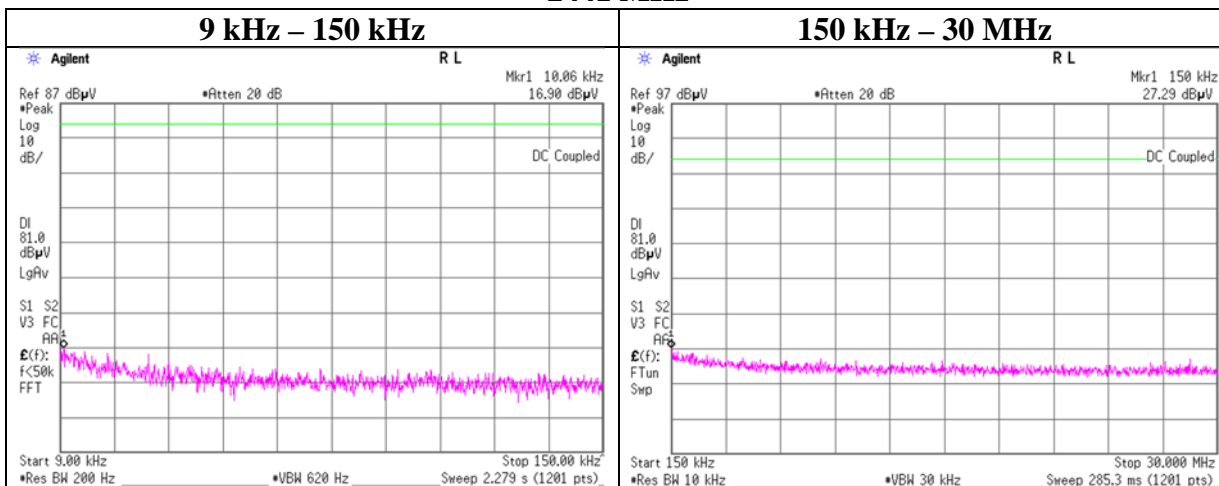

Conducted Spurious Emission

Report No.	14173547S-A
Test place	Shonan EMC Lab. No.5 Shielded Room
Date	January 11, 2022
Temperature / Humidity	25 deg. C / 27 % RH
Engineer	Yosuke Murakami
Mode	Tx, Hopping Off, DH5



2480 MHz

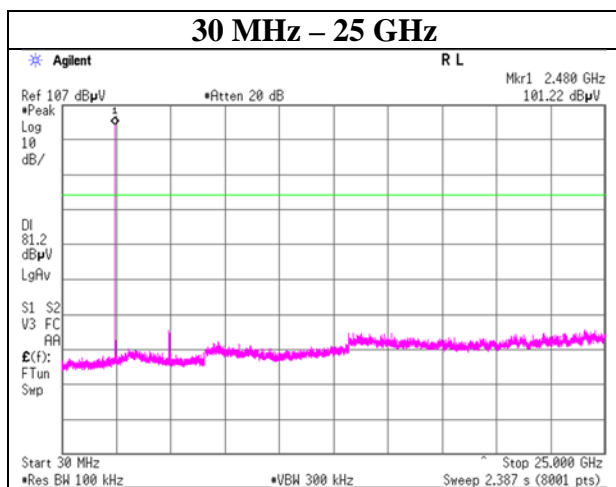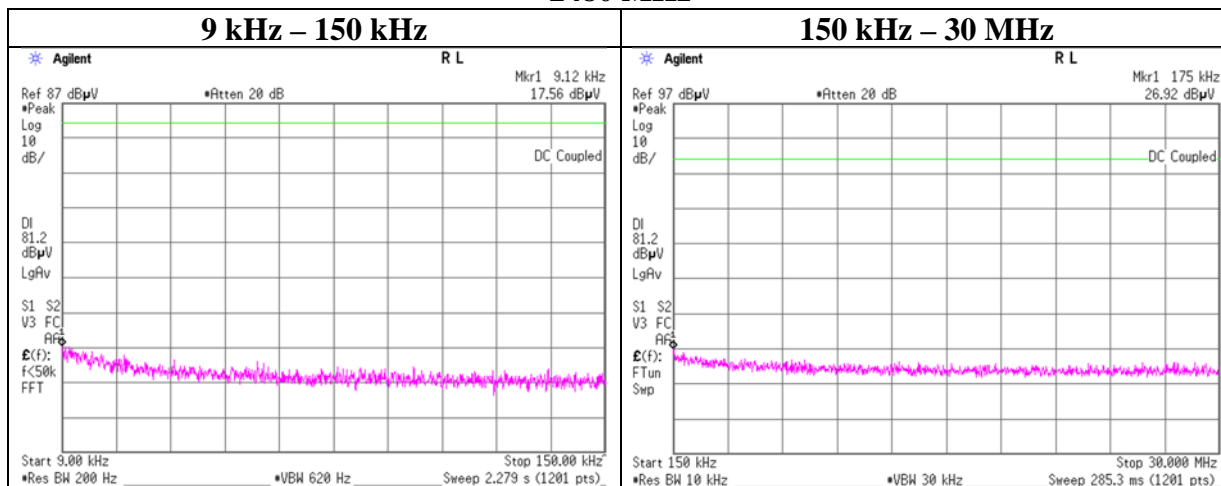

Conducted Spurious Emission

Report No.	14173547S-A
Test place	Shonan EMC Lab. No.5 Shielded Room
Date	January 12, 2022
Temperature / Humidity	25 deg. C / 30 % RH
Engineer	Yohsuke Matsuzawa
Mode	Tx, Hopping Off, 3DH5



2402 MHz

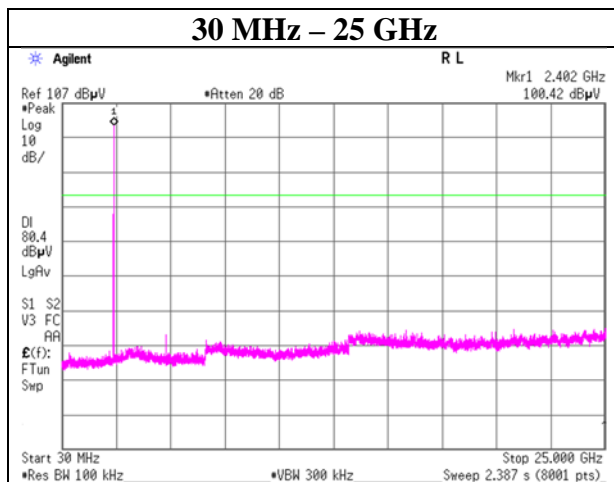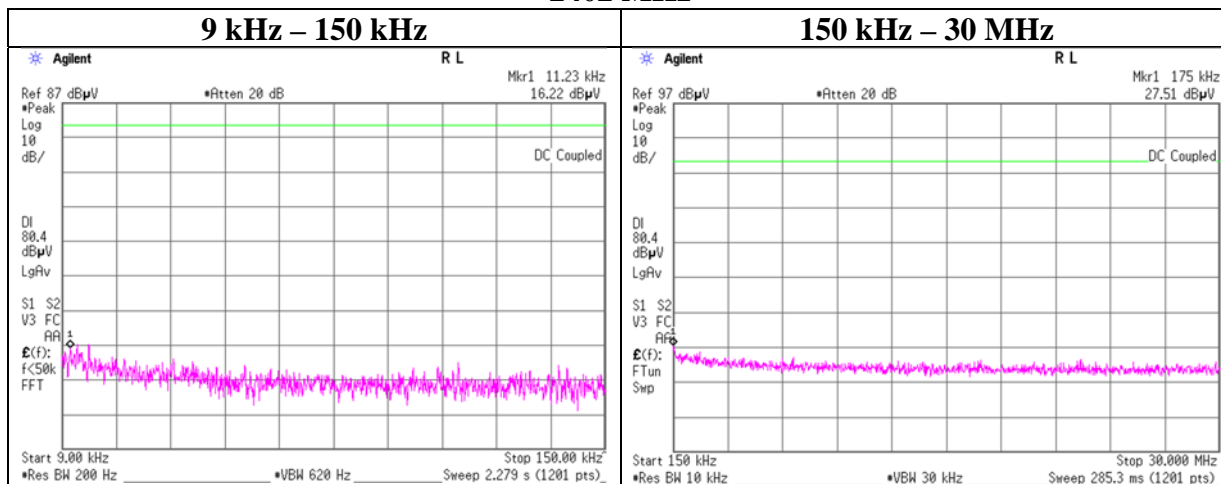

Conducted Spurious Emission

Report No.	14173547S-A
Test place	Shonan EMC Lab. No.5 Shielded Room
Date	January 12, 2022
Temperature / Humidity	25 deg. C / 30 % RH
Engineer	Yohsuke Matsuzawa
Mode	Tx, Hopping Off, 3DH5



2441 MHz

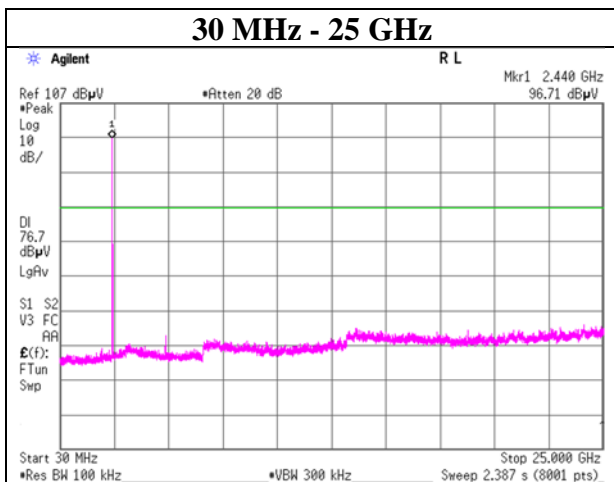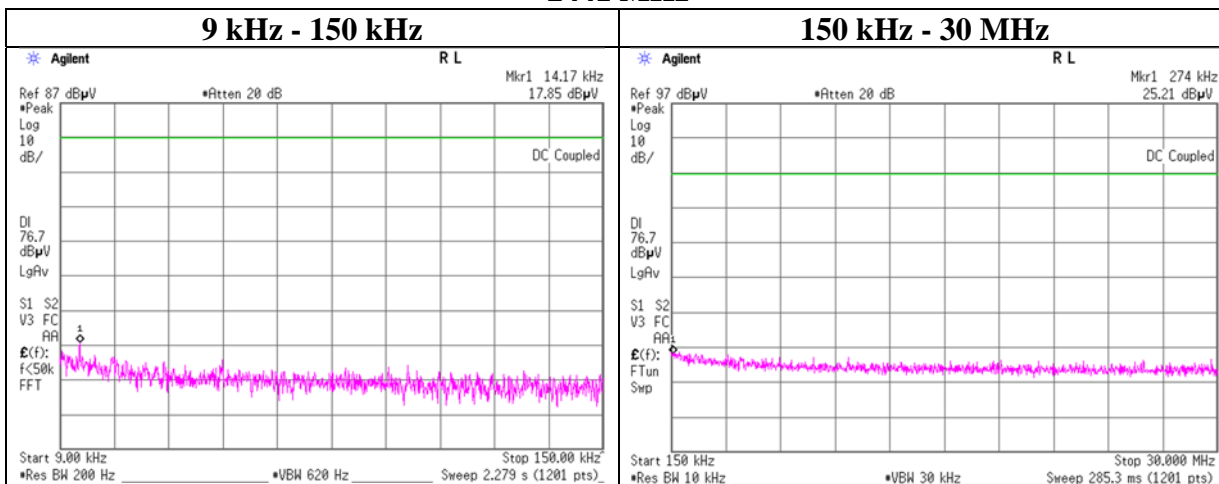

Conducted Spurious Emission

Report No.	14173547S-A
Test place	Shonan EMC Lab. No.5 Shielded Room
Date	January 12, 2022
Temperature / Humidity	25 deg. C / 30 % RH
Engineer	Yohsuke Matsuzawa
Mode	Tx, Hopping Off, 3DH5


2480 MHz

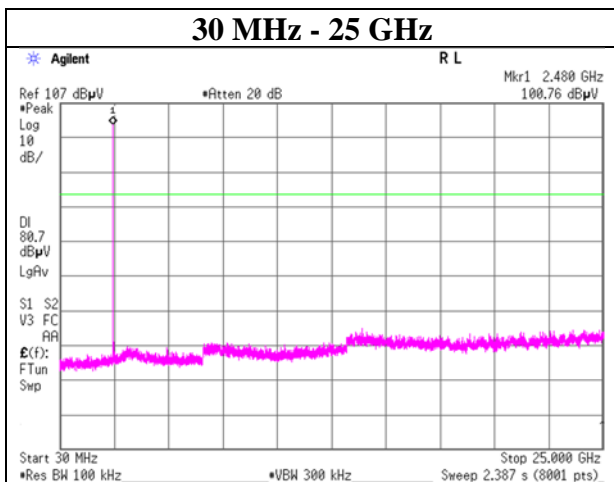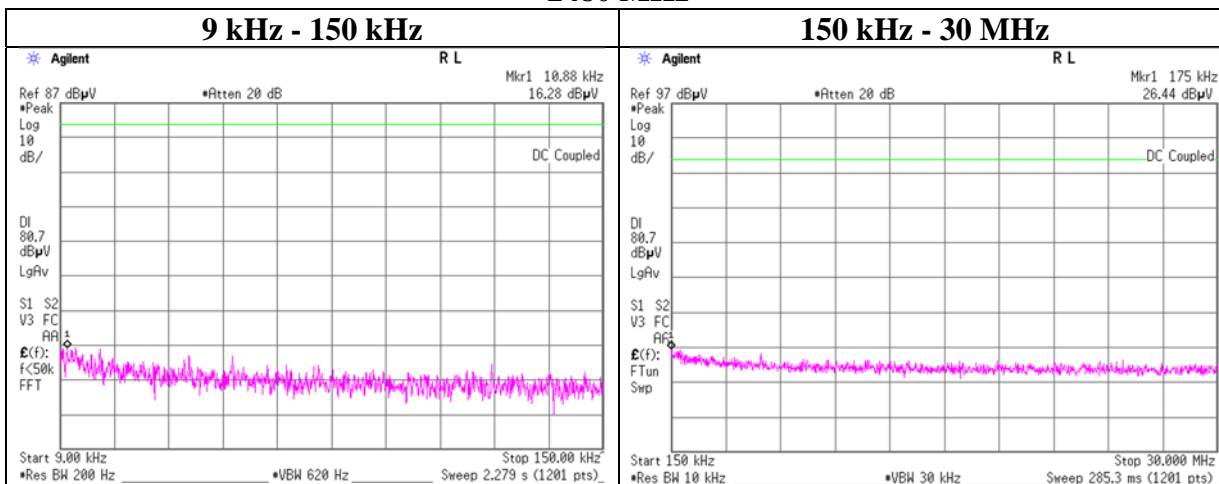


Conducted Emission Band Edge compliance

Report No. 14173547S-A
Test place Shonan EMC Lab. No.5 Shielded Room
Date January 11, 2022
Temperature / Humidity 25 deg. C / 27 % RH
Engineer Yosuke Murakami
Mode Tx DH5

Hopping On

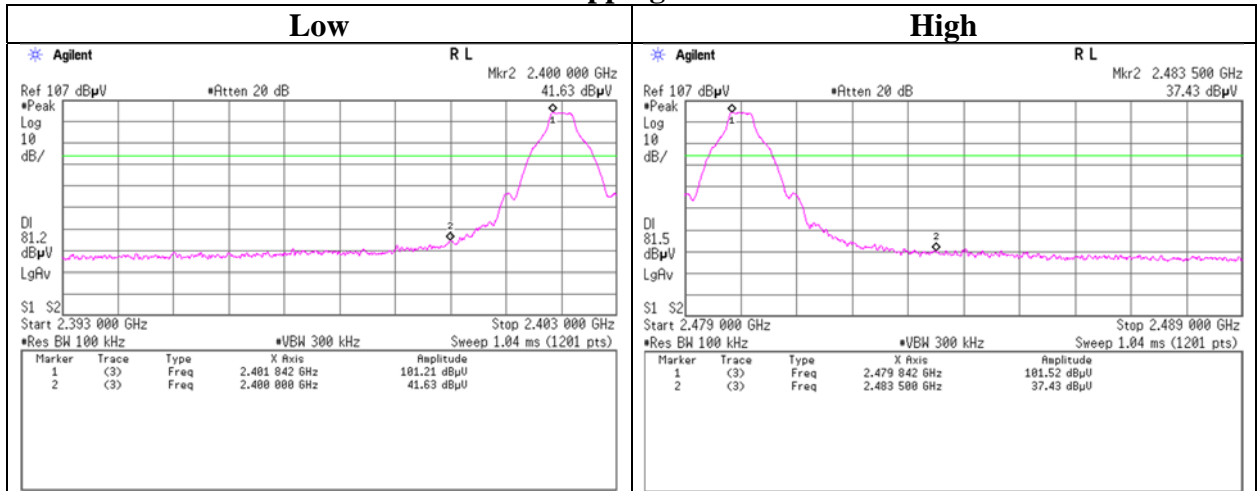


Hopping Off

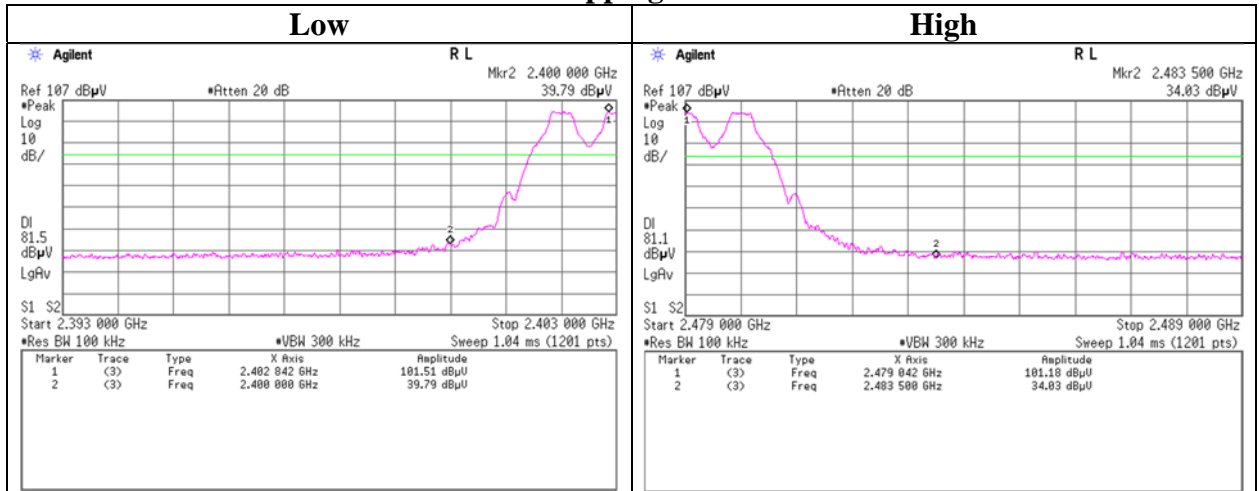


Conducted Emission Band Edge compliance

Report No. 14173547S-A
Test place Shonan EMC Lab. No.5 Shielded Room
Date January 12, 2022
Temperature / Humidity 25 deg. C / 30 % RH
Engineer Yohsuke Matsuzawa
Mode Tx 3DH5

Hopping On

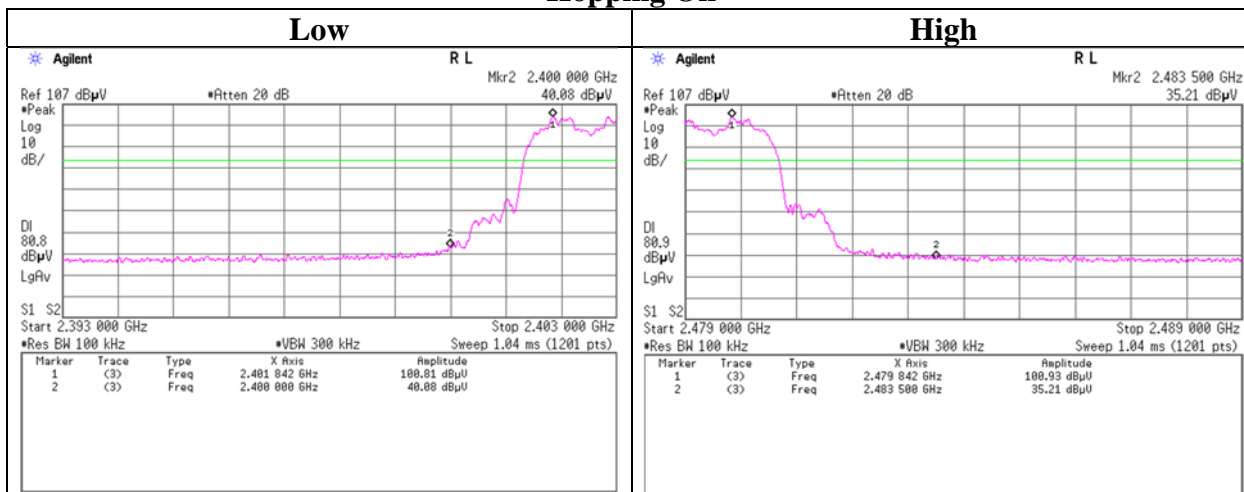

Hopping Off

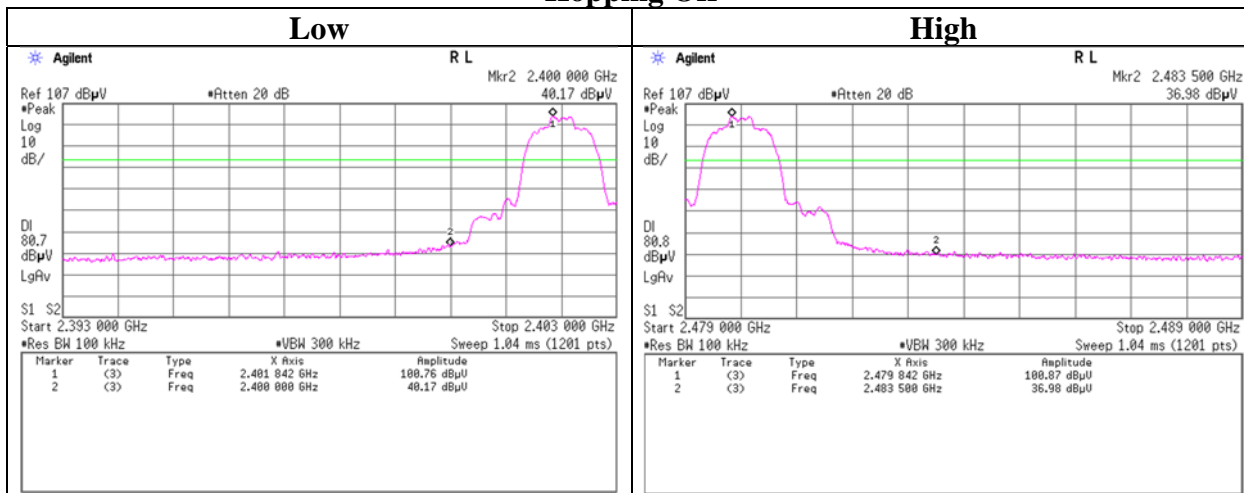

APPENDIX 2: Test instruments

Test equipment (1/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	SAT10-15	160493	Attenuator	Weinschel Corp.	54A-10	83406	2021/12/07	12
AT	SCC-G11	145174	Coaxial Cable	Suhner	SUCOFLEX 102	31595/2	2021/03/01	12
AT	SOS-27	191845	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2021/08/02	12
AT	SPM-13	169910	Power Meter	Keysight Technologies Inc	8990B	MY51000448	2021/01/25	12
AT	SPSS-06	169911	Power sensor	Keysight Technologies Inc	N1923A	MY57270004	2021/01/25	12
AT	SRENT-22	202830	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250036	2021/12/01	12
RE	COTS-SEMI-5	170932	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3 (RE,CE,ME,PE)	-	-	-
RE	KJM-02	146432	Measure	TAJIMA	GL19-55	-	-	-
RE	SAEC-02 (NSA)	145563	Semi-Anechoic Chamber	TDK	SAEC-02(NSA)	2	2021/03/16	12
RE	SAEC-03 (SVSWR)	145566	Semi-Anechoic Chamber	TDK	SAEC-03(SVSWR)	3	2021/05/21	12
RE	SAF-02	145004	Pre Amplifier	SONOMA	310N	290212	2021/02/10	12
RE	SAF-06	145005	Pre Amplifier	Toyo Corporation	TPA0118-36	1440491	2021/02/08	12
RE	SAF-08	145007	Pre Amplifier	Toyo Corporation	HAP18-26W	19	2021/03/01	12
RE	SAT10-06	145137	Attenuator	Keysight Technologies Inc	8493C-010	74865	2021/10/05	12
RE	SAT3-11	150921	Attenuator	JFW	50HF-003N	-	2021/01/26	12
RE	SAT6-14	167095	Attenuator	JFW	50HF-006N	-	2021/02/10	12
RE	SBA-02	145022	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	BBA9106	91032665	2021/04/10	12
RE	SCC-B1/B3/B5/B7/B8/B13/SRSE-02	144975	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-270 (RF Selector)	2021/04/12	12
RE	SCC-B2/B4/B6/B7/B8/B13/SRSE-02	144976	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-270 (RF Selector)	2021/04/12	12
RE	SCC-G15	145176	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	2021/03/01	12
RE	SCC-G40	166491	Coaxial Cable	Junkosha	MWX221-01000NFSNMS/B	1612S005	2021/01/19	12
RE	SCC-G43	156380	Coaxial Cable	Huber+Suhner	SUCOFLEX_104_E	SN MY 13406/4E	2021/05/17	12
RE	SCC-G57	179540	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	802815/2	2021/05/18	12
RE	SCC-G58	183047	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	800287/4A	2021/05/17	12
RE	SCC-G70	200010	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	575618/4	2021/07/06	12
RE	SFL-18	145305	Highpass Filter	MICRO-TRONICS	HPM50111	119	2021/04/08	12
RE	SHA-03	145501	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	9120D-739	2021/06/14	12
RE	SHA-04	145512	Horn Antenna	ETS-Lindgren	3160-09	00094868	2021/06/14	12
RE	SHA-10	194685	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	711	2021/03/03	12
RE	SJM-20	207277	Measuring	ASKUL	-	-	-	-

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Test equipment (2/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	SLA-06	145528	Logperiodic Antenna	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	195	2021/04/10	12
RE	SOS-21	191838	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2021/08/02	12
RE	SOS-23	191840	Humidity Indicator	CUSTOM. Inc	CTH-201	-	2021/08/02	12
RE	SSA-02	145800	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY48250106	2021/04/13	12
RE	STR-07	146209	Test Receiver	Rohde & Schwarz	ESU26	100484	2021/09/17	12
RE	STS-02	145793	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997819	2021/04/28	12
RE	STS-03	146210	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997823	2021/09/14	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: **RE: Radiated Emission**
 AT: Antenna Terminal Conducted