





# RADIO TEST REPORT

## Test Report No. 15263779M-B

Customer	Sony Group Corporation
Description of EUT	Wireless Noise Canceling Stereo Headset
Model Number of EUT	YY2975
FCC ID	AK8YY2975
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied
Issue Date	May 29, 2024
Remarks	Bluetooth (BR / EDR) parts

<b>Representative Test Engineer</b>	<b>Approved By</b>
	
Hiromitsu Tanabe Engineer	Kazuhiro Ando Engineer
 	
CERTIFICATE 1266.01	
<input type="checkbox"/> The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.	
<input checked="" type="checkbox"/> There is no testing item of "Non-accreditation".	

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

---

## **ANNOUNCEMENT**

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.  
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Kashima EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

## **REVISION HISTORY**

**Original Test Report No.: 15263779M-B**

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	15263779M-B	May 29, 2024	-

**Reference: Abbreviations (Including words undescribed in this report)**

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

---

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer Information .....</b>	<b>5</b>
<b>SECTION 2: Equipment Under Test (EUT).....</b>	<b>5</b>
<b>SECTION 3: Test Specification, Procedures &amp; Results .....</b>	<b>6</b>
<b>SECTION 4: Operation of EUT during testing .....</b>	<b>9</b>
<b>SECTION 5: Radiated Spurious Emission.....</b>	<b>11</b>
<b>SECTION 6: Antenna Terminal Conducted Tests .....</b>	<b>13</b>
<b>APPENDIX 1: Test data .....</b>	<b>14</b>
20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation .....	14
Number of Hopping Frequency.....	18
Dwell time .....	20
Maximum Peak Output Power .....	23
Average Output Power.....	24
Radiated Spurious Emission.....	26
Conducted Spurious Emission.....	48
Conducted Emission Band Edge compliance .....	54
<b>APPENDIX 2: Test Instruments .....</b>	<b>56</b>
<b>APPENDIX 3: Photographs of test setup.....</b>	<b>57</b>
Radiated Spurious Emission.....	57
Worst Case Position .....	59
Antenna Terminal Conducted Tests .....	60

## **SECTION 1: Customer Information**

Company Name	Sony Group Corporation
Address	1-7-1 Konan Minato-ku Tokyo 108-0075 Japan
Contact Person	Kouhei Nagamine

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

## **SECTION 2: Equipment Under Test (EUT)**

### **2.1 Identification of EUT**

Description	Wireless Noise Canceling Stereo Headset
Model Number	YY2975
Serial Number	Refer to SECTION 4.2
Condition	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	April 17, 2024
Test Date	April 18, 2024 to May 8, 2024

### **2.2 Product Description**

#### **General Specification**

Rating	DC 3.85 V (Battery)
Operating temperature	0 deg. C to 40 deg. C

#### **Radio Specification**

This report contains data provided by the customer which can impact the validity of results. UL Japan, Inc. is only responsible for the validity of results after the integration of the data provided by the customer. The data provided by the customer is marked "a)" in the table below.

#### **Bluetooth (BR / EDR / Low Energy)**

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	BT: FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK) BT LE: GFSK
Antenna Gain <sup>a)</sup>	-4.4 dBi

## SECTION 3: Test Specification, Procedures & Results

### 3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

\*The customer has declared that the EUT has complies with FCC Part 15 Subpart B as SDoC.

### 3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	<b>FCC:</b> ANSI C63.10-2013 6. Standard test methods <b>ISED:</b> RSS-Gen 8.8	<b>FCC:</b> Section 15.207 <b>ISED:</b> RSS-Gen 8.8	-	N/A	*1)
Carrier Frequency Separation	<b>FCC:</b> KDB 558074 D01 15.247 Meas Guidance v05r02 <b>ISED:</b> -	<b>FCC:</b> Section15.247(a)(1) <b>ISED:</b> RSS-247 5.1 (b)	See data.	Complied	Conducted
20dB Bandwidth	<b>FCC:</b> KDB 558074 D01 15.247 Meas Guidance v05r02 <b>ISED:</b> -	<b>FCC:</b> Section15.247(a)(1) <b>ISED:</b> RSS-247 5.1 (a)		Complied	Conducted
Number of Hopping Frequency	<b>FCC:</b> KDB 558074 D01 15.247 Meas Guidance v05r02 <b>ISED:</b> -	<b>FCC:</b> Section15.247(a)(1)(iii) <b>ISED:</b> RSS-247 5.1 (d)		Complied	Conducted
Dwell time	<b>FCC:</b> KDB 558074 D01 15.247 Meas Guidance v05r02 <b>ISED:</b> -	<b>FCC:</b> Section15.247(a)(1)(iii) <b>ISED:</b> RSS-247 5.1 (d)		Complied	Conducted
Maximum Peak Output Power	<b>FCC:</b> KDB 558074 D01 15.247 Meas Guidance v05r02 <b>ISED:</b> RSS-Gen 6.12	<b>FCC:</b> Section15.247(b)(1) <b>ISED:</b> RSS-247 5.4 (b)		Complied	Conducted
Spurious Emission & Band Edge Compliance	<b>FCC:</b> KDB 558074 D01 15.247 Meas Guidance v05r02 <b>ISED:</b> RSS-Gen 6.13	<b>FCC:</b> Section15.247(d) <b>ISED:</b> RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	15.3 dB 2483.500 MHz, Tx DH5, 2480 MHz, Left, AV, Horizontal	Complied	Conducted/ Radiated (above 30 MHz) *2)
Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.					
*1) The test was not applicable since the Bluetooth does not operate during charging. *2) Radiated test was selected over 30 MHz based on section 15.247(d).					

#### **FCC Part 15.31 (e)**

This EUT provides the stable voltage constantly to RF Module regardless of input voltage.  
Therefore, this EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT.  
Therefore, the equipment complies with the antenna requirement of Section 15.203.

### 3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement. Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k = 2$ .

#### Conducted emission

Frequency range	Uncertainty (+/-)
0.15 MHz to 30 MHz	3.3 dB

#### Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.2 dB
	30 MHz to 200 MHz	6.2 dB
	200 MHz to 1000 MHz	6.3 dB
	1 GHz to 6 GHz	4.7 dB
	6 GHz to 18 GHz	5.1 dB
	18 GHz to 40 GHz	5.5 dB
1 m	1 GHz to 18 GHz	5.2 dB
	18 GHz to 40 GHz	5.6 dB
0.5 m	26.5 GHz to 40 GHz	5.8 dB

#### Antenna Terminal test

Test Item	Uncertainty (+/-)
20 dB Bandwidth / 99 % Occupied Bandwidth	1.2 %
Maximum Output Power	0.58 dB
Carrier Frequency Separation	$2.1 \times 10^{-7}$
Dwell time / Burst Rate	0.20 %
Conducted Spurious Emission (below 6 GHz)	2.2 dB
Conducted Spurious Emission (6 GHz to 18 GHz)	2.0 dB
Conducted Spurious Emission (18 GHz to 26.5 GHz)	2.2 dB
Conducted Spurious Emission (26.5 GHz to 40 GHz)	2.1 dB

### 3.5 Test Location

UL Japan, Inc. Kashima EMC Lab.

1614 Mushihata, Katori-shi, Chiba-ken, 289-0341 Japan

Telephone: +81-478-88-6500

A2LA Certificate Number: 1266.01 / FCC Test Firm Registration Number: 910230

ISED Lab Company Number: 4659A / CAB identifier: JP0006

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Open site	6.0 x 5.5 x 2.5	20 x 40	10 m
No.5 Open site	8.6 x 7.1 x 2.4	18 x 23	10 m
No.1 Shielded room	5.4 x 4.5 x 2.3	-	-
No.5 Shielded Room	4.2 x 3.1 x 2.5	-	-
No.9 Shielded Room	6.1 x 3.6 x 2.8	-	-
No.6 Semi-anechoic Chamber	8.5 x 5.5 x 5.2	-	3 m
No.10 Semi-anechoic Chamber	18.4 x 9.9 x 7.7	-	10 m
No.11 Semi-anechoic Chamber	9.0 x 6.5 x 5.2	-	3 m
No.1 Measurement room	5.0 x 3.7 x 2.6	-	-
No.2 Measurement room	4.3 x 4.4 x 2.7	-	-

### 3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.



## SECTION 4: Operation of EUT during testing

### 4.1 Operating Mode(s)


Mode	Remarks*
Bluetooth (BT)	BR / EDR, Payload: PRBS9
<p>*EUT has the power settings by the software as follows;            Power Setting: BR 2402 MHz - 2480 MHz: 55            EDR 2402 MHz: 55, 2403 MHz - 2480 MHz: 57            Software: Earbuds RF Test Version: 1.05            (Date: 2024.04.17, Storage location: Driven by connected PC)</p> <p>*This setting of software is the worst case.            Any conditions under the normal use do not exceed the condition of setting.            In addition, end users cannot change the settings of the output power of the product.</p>	

#### Details of Operating Mode(s)


Test Item	Mode	Hopping	Tested Frequency
Radiated Spurious Emission (Below 1 GHz)	Tx DH5 *1)	Off	2441 MHz
Radiated Spurious Emission (Above 1 GHz), Conducted Spurious Emission	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx DH5 Tx 3DH5	On	2402 MHz 2441 MHz 2480 MHz
20dB Bandwidth	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx DH5 Tx 3DH5	On	-
Dwell time	Tx DH1, DH3, DH5 Tx 3DH1, 3DH3, 3DH5	On	-
Maximum Peak Output Power	Tx DH5 Tx 2DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2480 MHz
99% Occupied Bandwidth	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2441 MHz 2480 MHz
<p>*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test)            *2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative.            *It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification.</p>			
<p>*1) Spurious emissions for frequencies below 1 GHz were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.</p>			

## 4.2 Configuration and Peripherals

[Antenna Terminal Conducted tests]

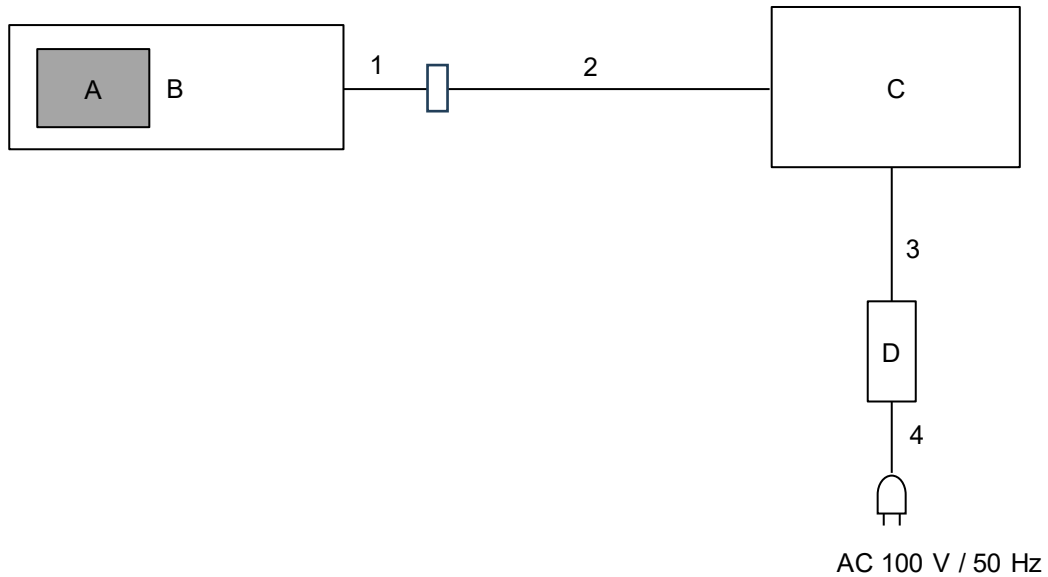

[Radiated Emission test]



\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

### Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Wireless Noise Canceling Stereo Headset	YY2975	1201080 *1)	Sony	EUT (Left)
A'	Wireless Noise Canceling Stereo Headset	YY2975	1201110 *2)	Sony	EUT (Left/Right)
B	Case	YY2975	1201080	Sony	-
C	Laptop PC	HP ProBook 430 G3	JPA616H5RW	hp	-
D	AC Adapter	HSTNN-CA41	WDVTN0CGC9XKS0 0C	hp	-

\*1) Used for Antenna Terminal conducted test

\*2) Used for Radiated Emission test

### List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB Cable	0.2	Shielded	Shielded	-
2	USB Cable	3.0	Shielded	Shielded	-
3	DC Cable	1.7	Unshielded	Unshielded	-
4	AC Cable	1.0	Unshielded	Unshielded	-

## **SECTION 5: Radiated Spurious Emission**

### **Test Procedure**

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

### **Test Antennas are used as below;**

Frequency	30 MHz to 1 GHz	Above 1 GHz
Antenna Type	Hybrid	Horn


In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

### **20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).**

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 1/T (T: burst length, refer to Burst rate confirmation sheet) Detector: Peak	RBW: 100 kHz VBW: 300 kHz

Figure 2: Test Setup


Below 1 GHz

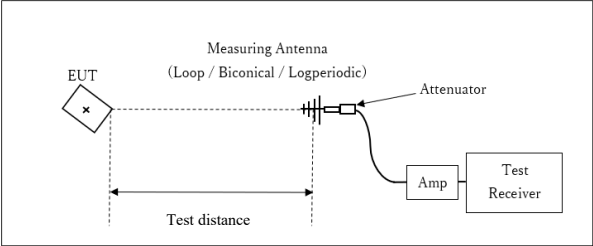

x : Center of turn table

Test Distance: 3 m

1 GHz to 10 GHz

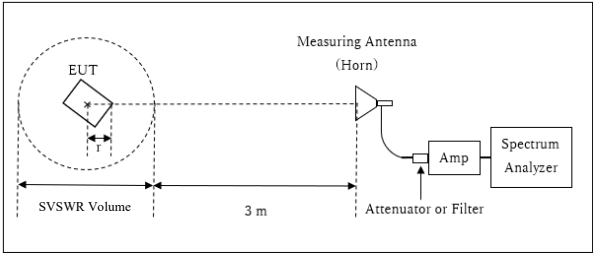


r : Radius of an outer periphery of EUT  
x : Center of turn table

Distance Factor:  $20 \times \log(4.49 \text{ m} / 3.0 \text{ m}) = 3.50 \text{ dB}$   
\* Test Distance:  $(3 + \text{SVSWR Volume} / 2) - r = 4.49 \text{ m}$

SVSWR Volume : 3.0 m  
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)  
 $r = 0.01 \text{ m}$

10 GHz to 26.5 GHz

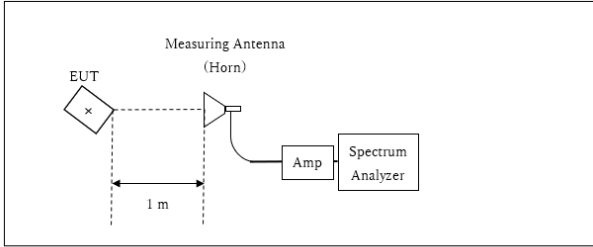

x : Center of turn table

Distance Factor:  $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$   
\*Test Distance: 1 m

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

		Below 30 MHz	1 to 2.8 GHz	2.8 to 10 GHz	10 to 18 GHz	18 to 26.5 GHz
EUT (Left)	Horizontal	Y	Y	Y	Y	Y
	Vertical	Z	Z	Z	Z	Z
EUT(Right)	Horizontal	Y	Y	Y	Y	Y
	Vertical	Z	Z	Z	Z	Z

Test results are rounded off and limit are rounded down, so some differences might be observed.

Measurement Range : 30 MHz to 26.5 GHz  
Test Data : APPENDIX  
Test Result : Pass

## SECTION 6: Antenna Terminal Conducted Tests

### Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 160MHz BW)
Carrier Frequency Separation	3 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	200 kHz	620 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3) *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

\*1) Peak hold was applied as Worst-case measurement.

\*2) Reference data

\*3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.

\*4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to  $45.5 - 51.5 = -6.0$  dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

Test results are rounded off and limit are rounded down, so some differences might be observed.  
The equipment and cables were not used for factor 0 dB of the data sheets.

**Test Data** : APPENDIX  
**Test Result** : Pass

**APPENDIX 1: Test data**


**20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation**

Test place                      Kashima EMC Lab. No.2 Measurement Room  
Date                                April 19, 2024  
Temperature / Humidity        21 deg. C / 49 % RH  
Engineer                         Hiromitsu Tanabe  
Mode                                Tx, Hopping Off, Tx, Hopping On


Mode	Freq. [MHz]	20 dB Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.950	879.310	1.000	>= 0.633
DH5	2441.0	0.947	876.003	1.000	>= 0.631
DH5	2480.0	0.947	<b>880.282</b>	1.000	>= 0.632
DH5	Hopping On	-	78658.4	-	-
3DH5	2402.0	1.254	1162.393	1.000	>= 0.836
3DH5	2441.0	1.256	1165.651	1.000	>= 0.837
3DH5	2480.0	1.255	<b>1165.940</b>	1.000	>= 0.837
3DH5	Hopping On	-	78763.5	-	-

Limit: Two-thirds of 20 dB Bandwidth or 25 kHz (whichever is greater).  
No limit applies to 20 dB Bandwidth.

**20dB Bandwidth and 99% Occupied Bandwidth**

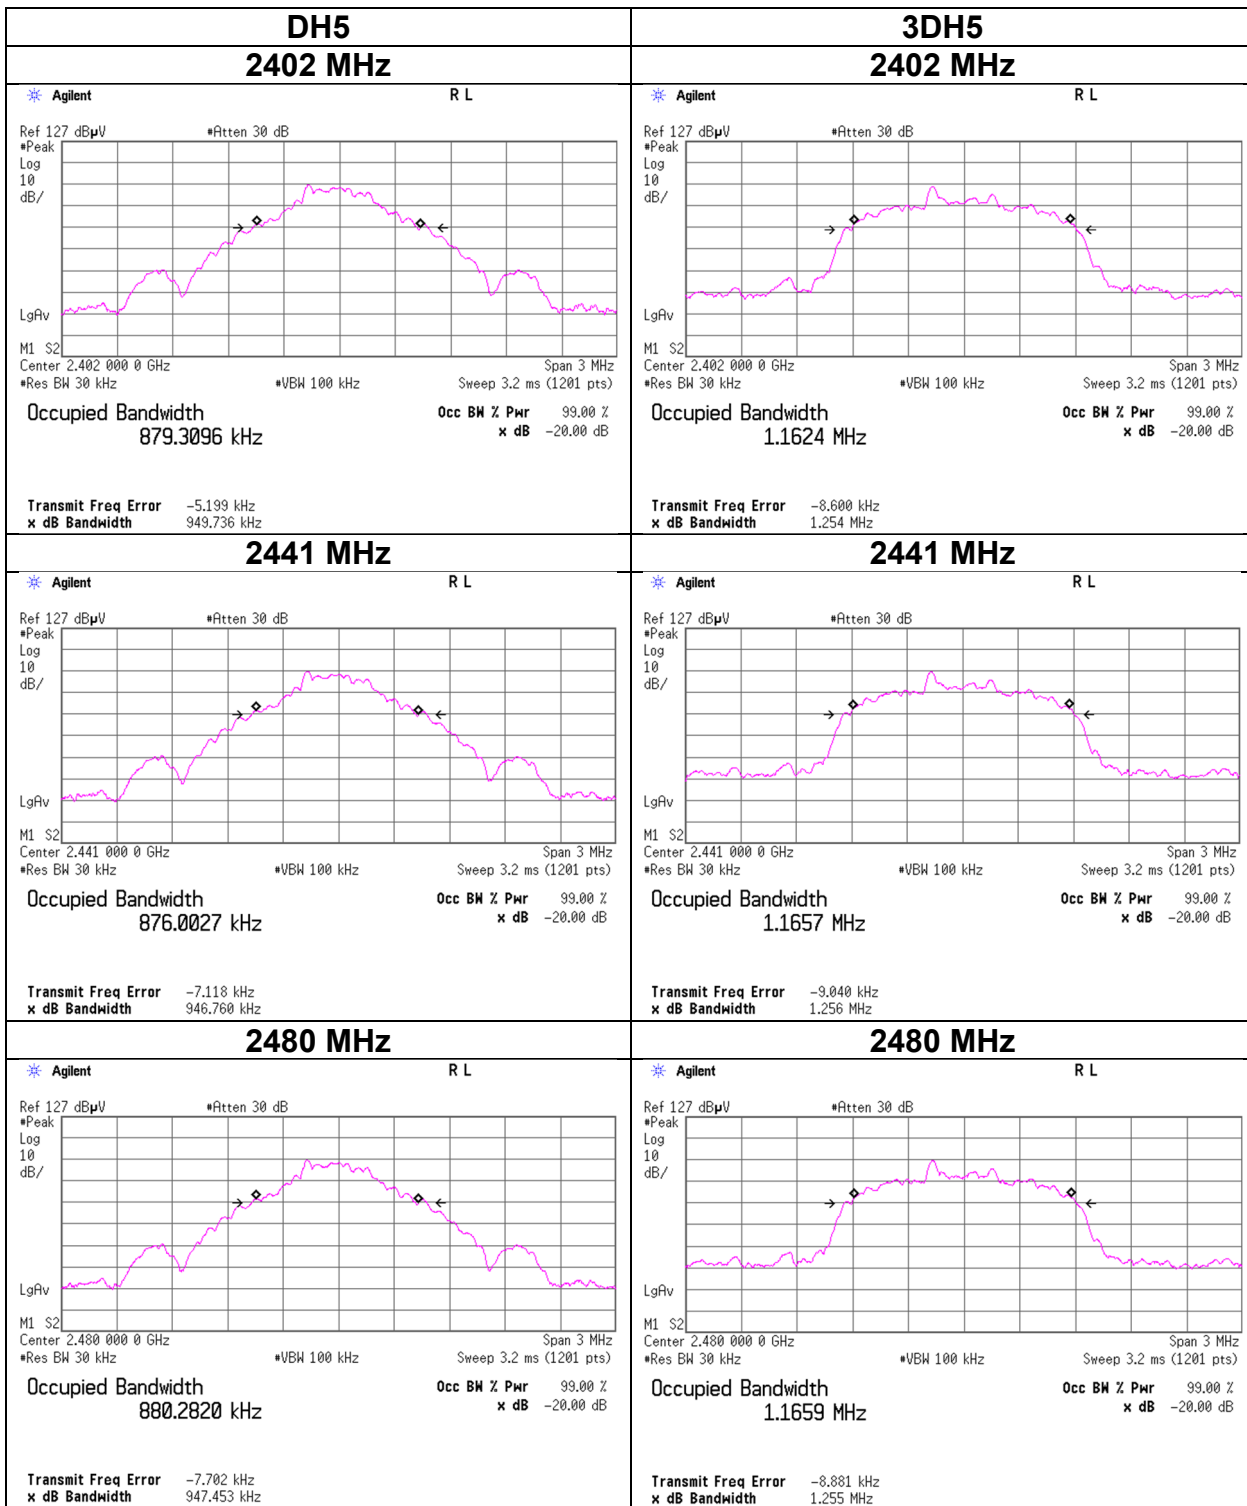


**20dB Bandwidth and 99% Occupied Bandwidth**

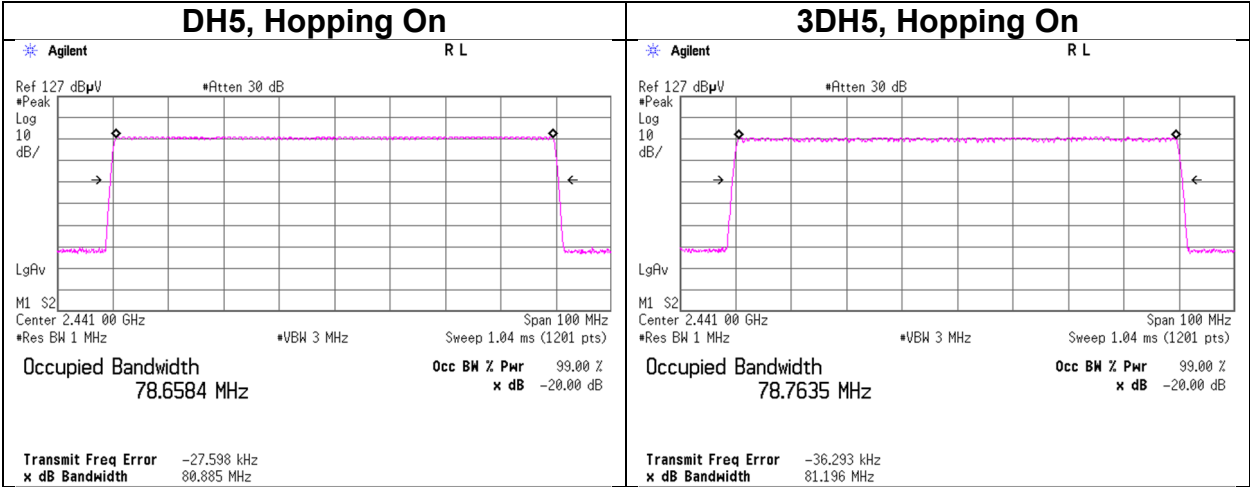



### Carrier Frequency Separation

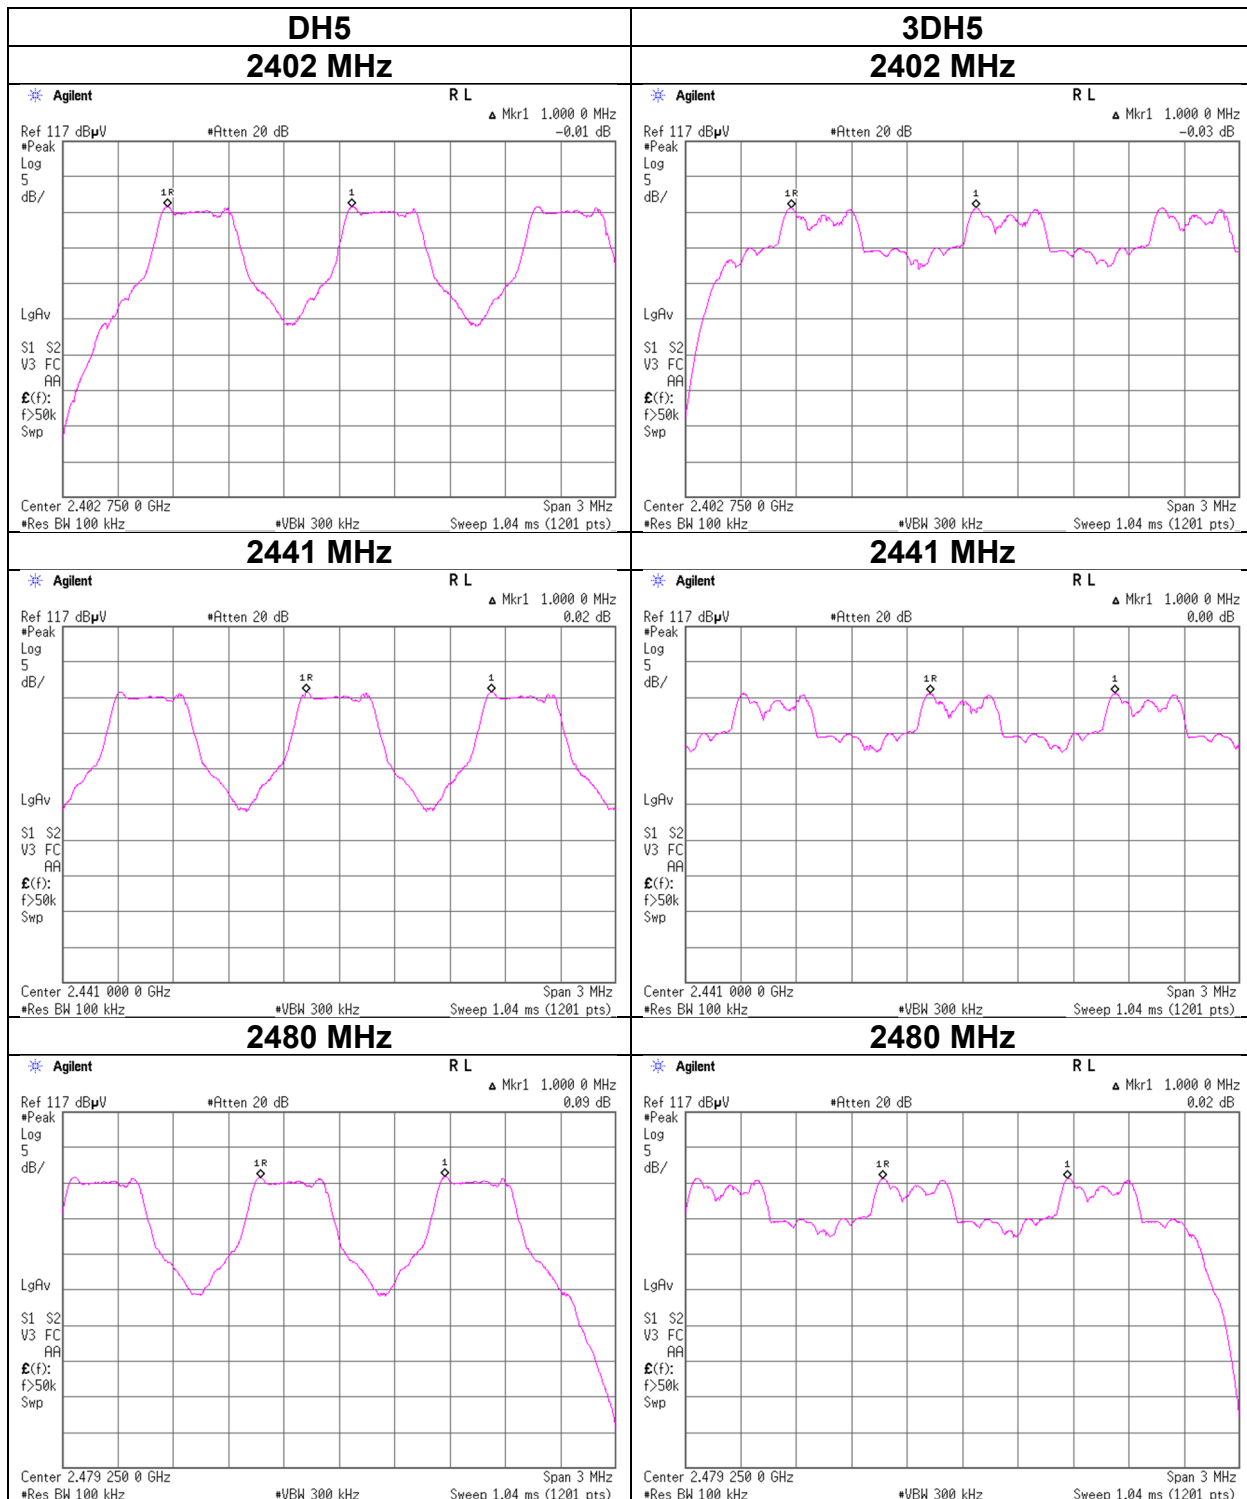


### Number of Hopping Frequency

Test place                      Kashima EMC Lab. No.2 Measurement Room  
Date                                April 19, 2024  
Temperature / Humidity        21 deg. C / 49% RH  
Engineer                         Hiromitsu Tanabe  
Mode                                Tx, Hopping On

Mode	Number of channel [channels]	Limit [channels]
DH5	79	>= 15
3DH5	79	>= 15

Test was not performed at AFH mode whose number of hopping channel is 20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

**Number of Hopping Frequency**

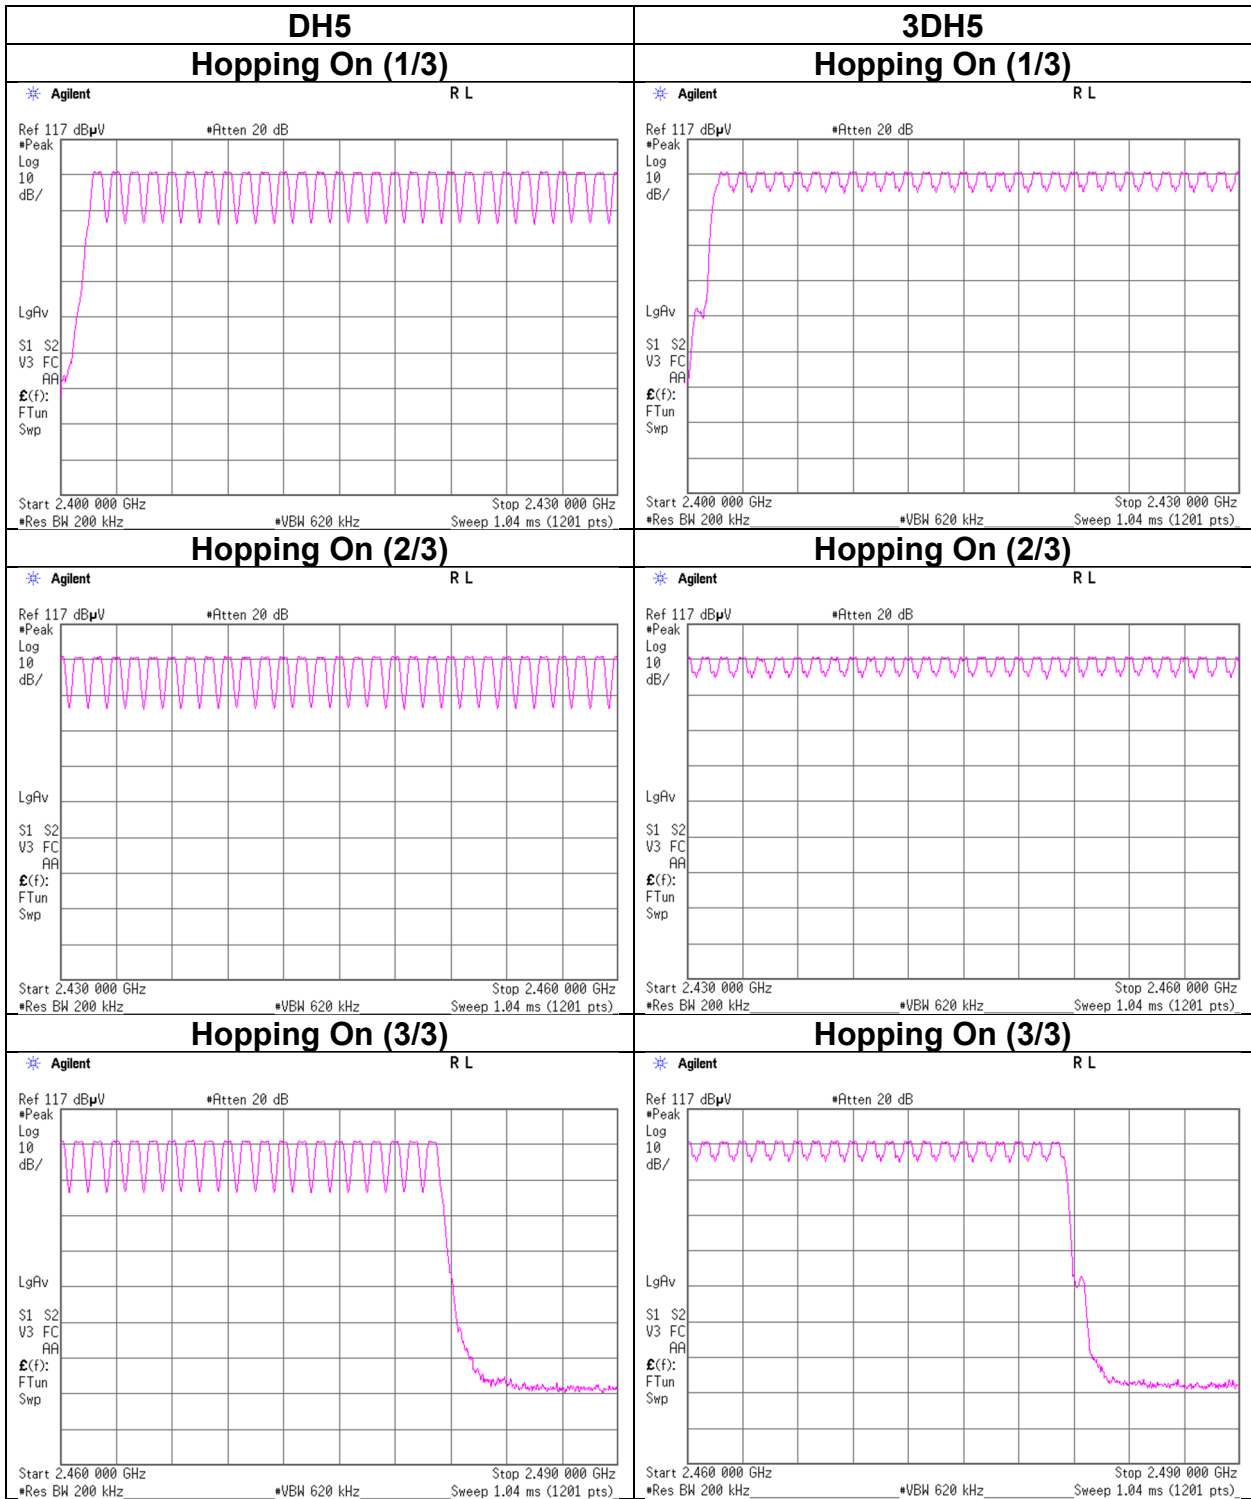

## Dwell time

Test place	Kashima EMC Lab. No.2 Measurement Room
Date	April 19, 2024
Temperature / Humidity	21 deg. C / 49 % RH
Engineer	Hiromitsu Tanabe
Mode	Tx, Hopping On

Mode	Number of transmission in a 31.6 (79 Hopping x 0.4)	Length of transmission [ms]	Result [ms]	Limit [ms]
DH1	50.0 times / 5 s x 31.6 s = 316 times	0.390	123	400
DH3	26.0 times / 5 s x 31.6 s = 165 times	1.648	272	400
DH5	17.0 times / 5 s x 31.6 s = 108 times	2.896	313	400
3DH1	50.0 times / 5 s x 31.6 s = 316 times	0.395	125	400
3DH3	26.0 times / 5 s x 31.6 s = 165 times	1.647	272	400
3DH5	17.0 times / 5 s x 31.6 s = 108 times	2.898	313	400

Sample Calculation

Result = Number of transmission x Length of transmission

\*Average data of 5 tests.(except Inquiry)


Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	50	50	50	50	50	50
DH3	26	26	26	26	26	26
DH5	17	17	17	17	17	17
3DH1	50	50	50	50	50	50
3DH3	26	26	26	26	26	26
3DH5	17	17	17	17	17	17

Sample Calculation


Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in  $N \times 0.4$  s, where  $N$  is the number of channels being used in the hopping sequence ( $20 \leq N \leq 79$ ), is always less than 0.4 s regardless of packet size. This is confirmed in the test report for  $N = 79$ .

**Dwell time**

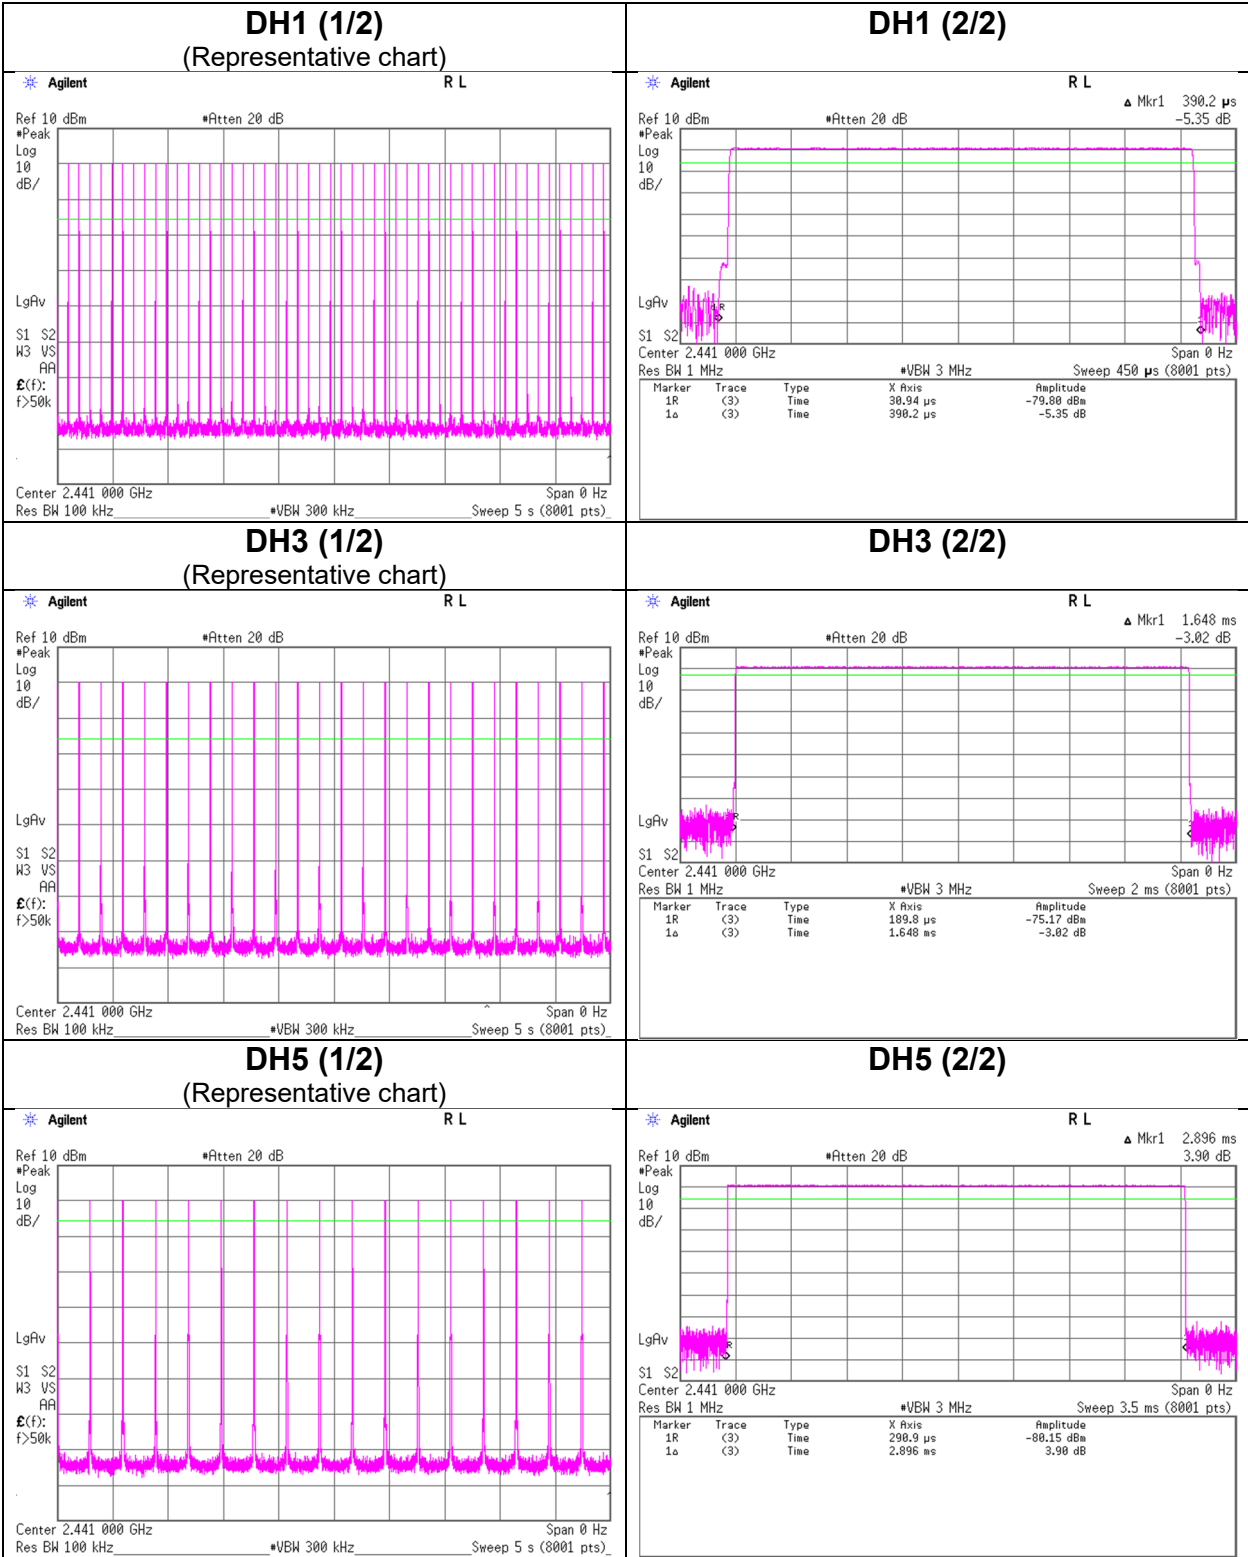

**Dwell time**

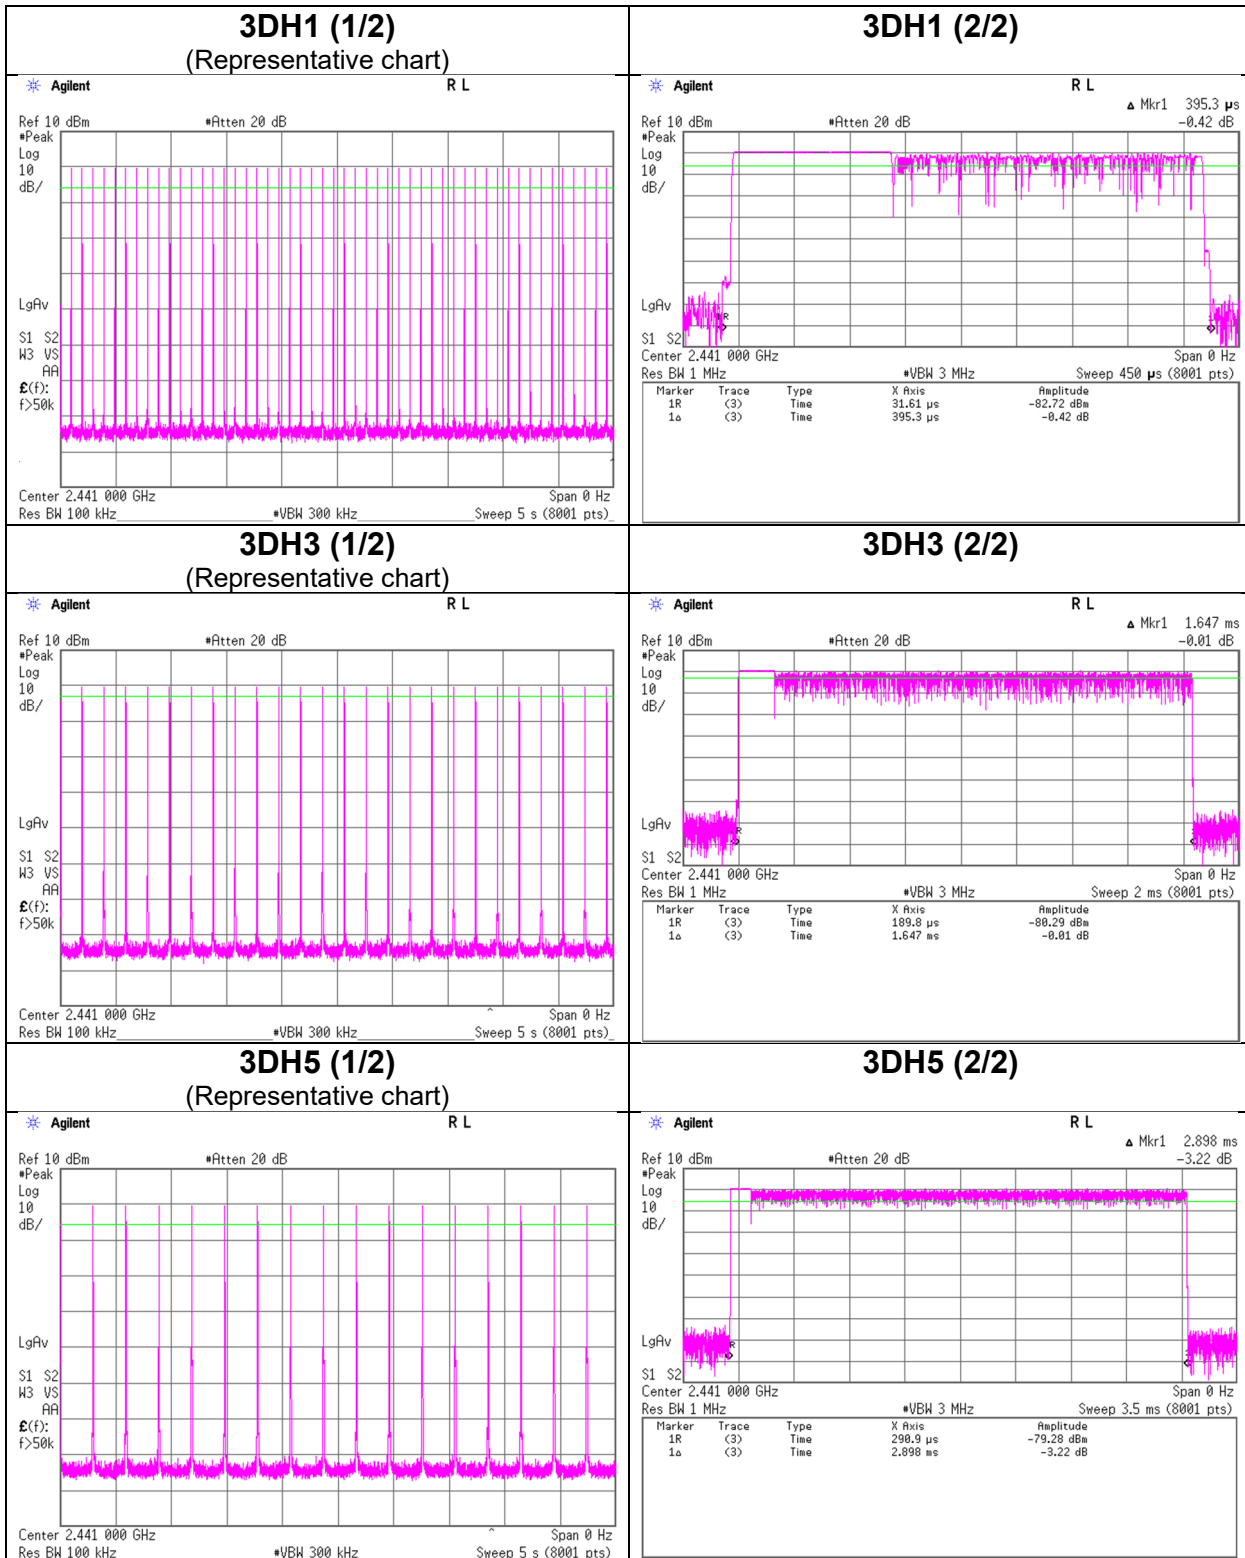

### Maximum Peak Output Power

Test place                      Kashima EMC Lab. No.2 Measurement Room  
Date                                April 18, 2024  
Temperature / Humidity        22 deg. C / 52 % RH  
Engineer                         Hiromitsu Tanabe  
Mode                                Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
					Result		Limit		Margin	Antenna Gain [dBi]	Result		Limit		Margin
					[dBm]	[mW]	[dBm]	[mW]	[dB]		[dBm]	[mW]	[dBm]	[mW]	[dB]
DH5	2402.0	0.96	3.12	10.05	14.13	25.88	20.96	125	6.83	-4.40	9.73	9.40	36.02	4000	26.29
DH5	2441.0	1.04	3.13	10.05	<b>14.22</b>	<b>26.42</b>	20.96	125	6.74	-4.40	<b>9.82</b>	<b>9.59</b>	36.02	4000	26.20
DH5	2480.0	0.97	3.14	10.05	14.16	26.06	20.96	125	6.80	-4.40	9.76	9.46	36.02	4000	26.26
2DH5	2402.0	-0.20	3.12	10.05	12.97	19.82	20.96	125	7.99	-4.40	8.57	7.19	36.02	4000	27.45
2DH5	2441.0	0.83	3.13	10.05	<b>14.01</b>	<b>25.18</b>	20.96	125	6.95	-4.40	<b>9.61</b>	<b>9.14</b>	36.02	4000	26.41
2DH5	2480.0	0.71	3.14	10.05	13.90	24.55	20.96	125	7.06	-4.40	9.50	8.91	36.02	4000	26.52
3DH5	2402.0	0.01	3.12	10.05	13.18	20.80	20.96	125	7.78	-4.40	8.78	7.55	36.02	4000	27.24
3DH5	2441.0	0.88	3.13	10.05	<b>14.06</b>	<b>25.47</b>	20.96	125	6.90	-4.40	<b>9.66</b>	<b>9.25</b>	36.02	4000	26.36
3DH5	2480.0	0.83	3.14	10.05	14.02	25.23	20.96	125	6.94	-4.40	9.62	9.16	36.02	4000	26.40

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss  
e.i.r.p. Result = Conducted Power Result + Antenna Gain

Test was not performed at AFH mode, because the decrease of number of channel (min: 20 ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place                      Kashima EMC Lab. No.2 Measurement Room  
Date                              April 18, 2024  
Temperature / Humidity      22 deg. C / 52 % RH  
Engineer                        Hiromitsu Tanabe  
Mode                              Tx, Hopping Off

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
					[dBm]	[mW]		[dBm]	[mW]
DH5	2402.0	-0.58	3.12	10.05	12.59	18.16	1.12	13.71	23.51
DH5	2441.0	-0.49	3.13	10.05	<b>12.69</b>	<b>18.58</b>	1.12	<b>13.81</b>	<b>24.06</b>
DH5	2480.0	-0.55	3.14	10.05	12.64	18.37	1.12	13.76	23.78
2DH5	2402.0	-4.01	3.12	10.05	9.16	8.24	1.12	10.28	10.67
2DH5	2441.0	-3.02	3.13	10.05	<b>10.16</b>	<b>10.38</b>	1.12	<b>11.28</b>	<b>13.43</b>
2DH5	2480.0	-3.10	3.14	10.05	10.09	10.21	1.12	11.21	13.22
3DH5	2402.0	-3.99	3.12	10.05	9.18	8.28	1.12	10.30	10.71
3DH5	2441.0	-3.00	3.13	10.05	<b>10.18</b>	<b>10.42</b>	1.12	<b>11.30</b>	<b>13.48</b>
3DH5	2480.0	-3.09	3.14	10.05	10.10	10.23	1.12	11.22	13.23

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Result (Burst power average) = Time average + Duty factor




### Burst Rate Confirmation

Test place Kashima EMC Lab. No.2 Measurement Room  
Date April 18, 2024  
Temperature / Humidity 22 deg. C / 52 % RH  
Engineer Hiromitsu Tanabe  
Mode Tx, Hopping Off


#### DH5

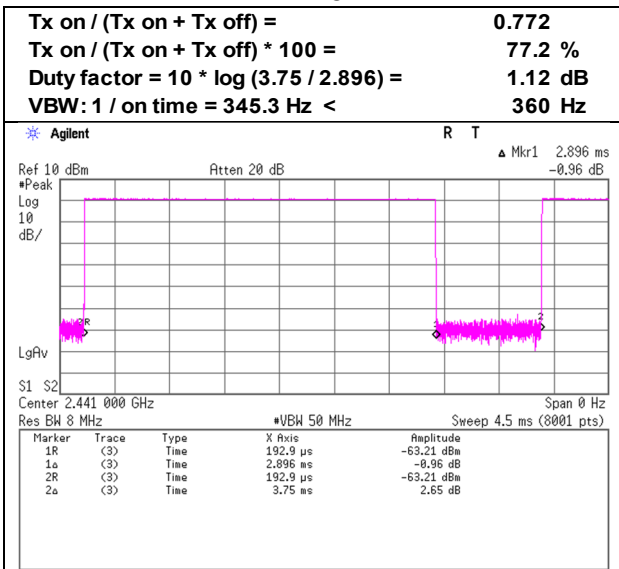

#### 2DH5

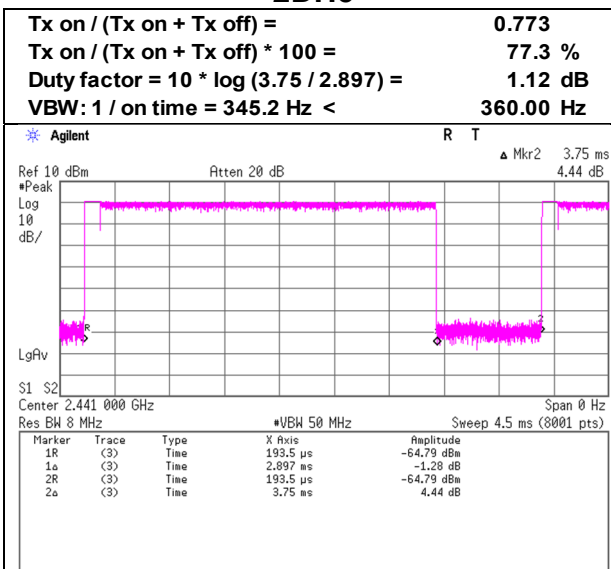

#### 3DH5

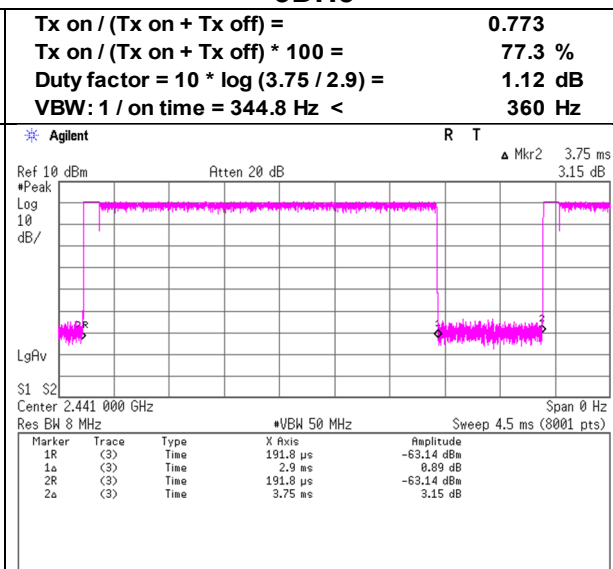

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx, Hopping Off, DH5 2402 MHz, Left			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	49.59	27.60	13.01	43.66	3.50	50.04	73.9	23.8	289	170	
Hori.	4804.000	PK	50.81	32.53	5.41	45.10	3.50	47.15	73.9	26.7	150	0	Floor noise
Hori.	7206.000	PK	48.71	37.14	6.66	43.99	3.50	52.02	73.9	21.8	150	0	Floor noise
Hori.	9608.000	PK	46.90	38.01	7.46	41.93	3.50	53.94	73.9	19.9	150	0	Floor noise
Hori.	2390.000	AV	37.54	27.60	13.01	43.66	3.50	37.99	53.9	15.9	289	170	VBW:360Hz
Hori.	4804.000	AV	38.64	32.53	5.41	45.10	3.50	34.98	53.9	18.9	150	0	Floor noise
Hori.	7206.000	AV	37.45	37.14	6.66	43.99	3.50	40.76	53.9	13.1	150	0	Floor noise
Hori.	9608.000	AV	35.14	38.01	7.46	41.93	3.50	42.18	53.9	11.7	150	0	Floor noise
Vert.	2390.000	PK	49.69	27.60	13.01	43.66	3.50	50.14	73.9	23.7	380	0	
Vert.	4804.000	PK	50.41	32.53	5.41	45.10	3.50	46.75	73.9	27.1	150	0	Floor noise
Vert.	7206.000	PK	48.50	37.14	6.66	43.99	3.50	51.81	73.9	22.0	150	0	Floor noise
Vert.	9608.000	PK	47.53	38.01	7.46	41.93	3.50	54.57	73.9	19.3	150	0	Floor noise
Vert.	2390.000	AV	37.33	27.60	13.01	43.66	3.50	37.78	53.9	16.1	380	0	VBW:360Hz
Vert.	4804.000	AV	38.65	32.53	5.41	45.10	3.50	34.99	53.9	18.9	150	0	Floor noise
Vert.	7206.000	AV	37.34	37.14	6.66	43.99	3.50	40.65	53.9	13.2	150	0	Floor noise
Vert.	9608.000	AV	35.21	38.01	7.46	41.93	3.50	42.25	53.9	11.6	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

\*These results have sufficient margin without taking account Duty cycle correction factor.

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	96.89	27.60	13.02	43.65	3.50	97.36	-	-	Carrier
Hori.	2400.000	PK	42.32	27.60	13.02	43.65	3.50	42.79	77.4	34.5	
Vert.	2402.000	PK	95.57	27.60	13.02	43.65	3.50	96.04	-	-	Carrier
Vert.	2400.000	PK	41.78	27.60	13.02	43.65	3.50	42.25	76.0	33.7	



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Kashima EMC Lab.
Semi Anechoic Chamber	No.10
Date	April 23, 2024
Temperature / Humidity	20 deg. C / 59 % RH
Engineer	Hiromitsu Tanabe
	(1 GHz to 2.8 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz, Left

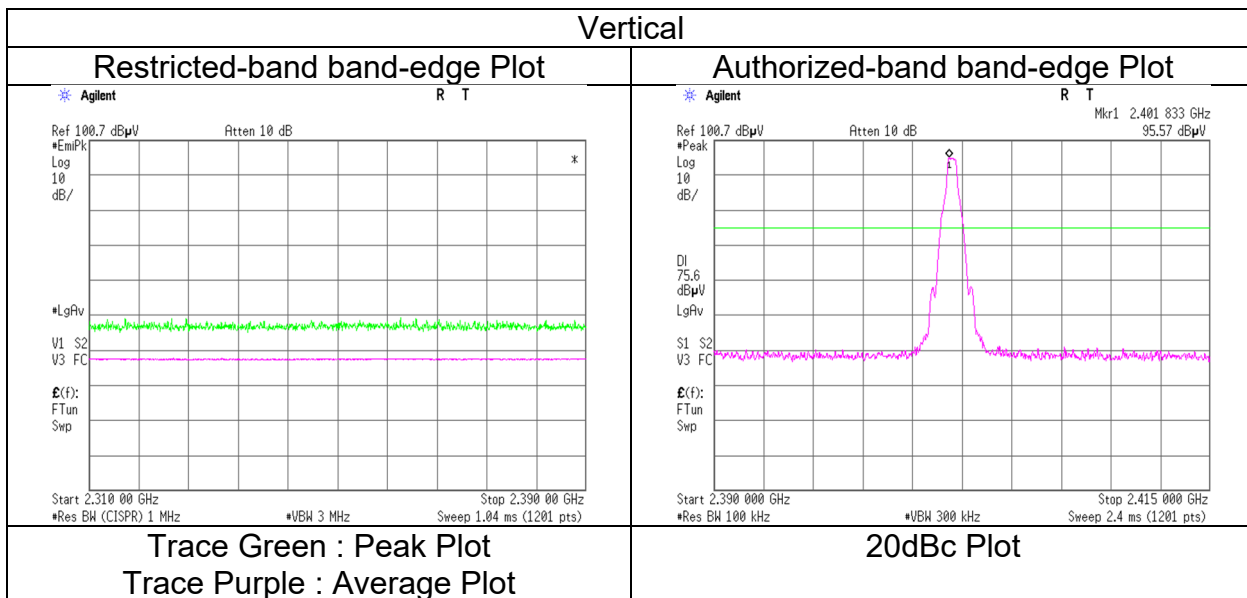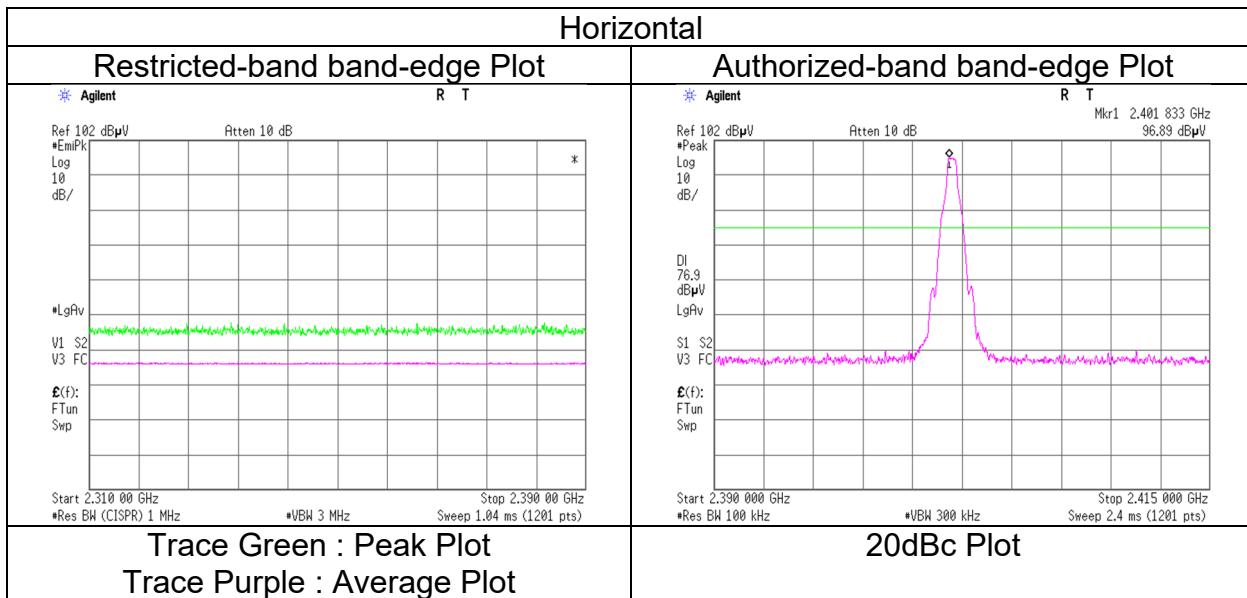

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge and authorized band edge were shown in tabular data.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.				
Semi Anechoic Chamber	No.10	No.10	No.10	No.10	No.10
Date	May 7, 2024	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	25 deg. C / 55 % RH	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe (30 MHz to 1 GHz)	Hiromitsu Tanabe (1 GHz to 2.8 GHz)	Hiromitsu Tanabe (2.8 GHz to 10 GHz)	Hiromitsu Tanabe (10 GHz to 18 GHz)	Hiromitsu Tanabe (18 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz, Left				

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	64.000	QP	30.06	12.60	6.23	31.21	0.00	17.68	40.0	22.3	100	0	
Hori.	103.760	QP	28.24	9.53	6.66	31.12	0.00	13.31	43.5	30.1	100	0	
Hori.	155.630	QP	27.03	13.41	7.13	31.04	0.00	16.53	43.5	26.9	100	0	
Hori.	4882.000	PK	49.96	32.55	5.46	45.15	3.50	46.32	73.9	27.5	150	0	Floor noise
Hori.	7323.000	PK	48.08	37.38	6.69	43.71	3.50	51.94	73.9	21.9	150	0	Floor noise
Hori.	9764.000	PK	46.88	37.92	7.52	41.76	3.50	54.06	73.9	19.8	150	0	Floor noise
Hori.	4882.000	AV	38.66	32.55	5.46	45.15	3.50	35.02	53.9	18.8	150	0	Floor noise
Hori.	7323.000	AV	36.58	37.38	6.69	43.71	3.50	40.44	53.9	13.4	150	0	Floor noise
Hori.	9764.000	AV	35.00	37.92	7.52	41.76	3.50	42.18	53.9	11.7	150	0	Floor noise
Vert.	64.000	QP	30.02	12.60	6.23	31.21	0.00	17.64	40.0	22.3	100	0	
Vert.	103.760	QP	28.23	9.53	6.66	31.12	0.00	13.30	43.5	30.2	100	0	
Vert.	155.630	QP	27.00	13.41	7.13	31.04	0.00	16.50	43.5	27.0	100	0	
Vert.	4882.000	PK	50.41	32.55	5.46	45.15	3.50	46.77	73.9	27.1	150	0	Floor noise
Vert.	7323.000	PK	48.44	37.38	6.69	43.71	3.50	52.30	73.9	21.6	150	0	Floor noise
Vert.	9764.000	PK	46.51	37.92	7.52	41.76	3.50	53.69	73.9	20.2	150	0	Floor noise
Vert.	4882.000	AV	38.59	32.55	5.46	45.15	3.50	34.95	53.9	18.9	150	0	Floor noise
Vert.	7323.000	AV	36.64	37.38	6.69	43.71	3.50	40.50	53.9	13.4	150	0	Floor noise
Vert.	9764.000	AV	34.95	37.92	7.52	41.76	3.50	42.13	53.9	11.7	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

\*These results have sufficient margin without taking account Duty cycle correction factor.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx, Hopping Off, DH5 2480 MHz, Left			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	49.72	27.86	13.07	43.62	3.50	50.53	73.9	23.3	387	153	
Hori.	4960.000	PK	50.54	32.64	5.51	45.20	3.50	46.99	73.9	26.9	150	0	Floor noise
Hori.	7440.000	PK	48.19	37.41	6.73	43.45	3.50	52.38	73.9	21.5	150	0	Floor noise
Hori.	9920.000	PK	47.25	38.11	7.61	41.76	3.50	54.71	73.9	19.1	150	0	Floor noise
Hori.	2483.500	AV	37.71	27.86	13.07	43.62	3.50	38.52	53.9	15.3	387	153	VBW:360Hz
Hori.	4960.000	AV	38.52	32.64	5.51	45.20	3.50	34.97	53.9	18.9	150	0	Floor noise
Hori.	7440.000	AV	36.79	37.41	6.73	43.45	3.50	40.98	53.9	12.9	150	0	Floor noise
Hori.	9920.000	AV	35.63	38.11	7.61	41.76	3.50	43.09	53.9	10.8	150	0	Floor noise
Vert.	2483.500	PK	50.13	27.86	13.07	43.62	3.50	50.94	73.9	22.9	126	135	
Vert.	4960.000	PK	50.09	32.64	5.51	45.20	3.50	46.54	73.9	27.3	150	0	Floor noise
Vert.	7440.000	PK	48.53	37.41	6.73	43.45	3.50	52.72	73.9	21.1	150	0	Floor noise
Vert.	9920.000	PK	47.14	38.11	7.61	41.76	3.50	54.60	73.9	19.3	150	0	Floor noise
Vert.	2483.500	AV	37.60	27.86	13.07	43.62	3.50	38.41	53.9	15.4	126	135	VBW:360Hz
Vert.	4960.000	AV	38.49	32.64	5.51	45.20	3.50	34.94	53.9	18.9	150	0	Floor noise
Vert.	7440.000	AV	36.91	37.41	6.73	43.45	3.50	41.10	53.9	12.8	150	0	Floor noise
Vert.	9920.000	AV	35.58	38.11	7.61	41.76	3.50	43.04	53.9	10.8	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB



10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

\*These results have sufficient margin without taking account Duty cycle correction factor.

**Radiated Spurious Emission  
(Reference Plot for band-edge)**

Test place  
Semi Anechoic Chamber  
Date  
Temperature / Humidity  
Engineer  
Mode

Kashima EMC Lab.  
No.10  
April 23, 2024  
20 deg. C / 59 % RH  
Hiromitsu Tanabe  
(1 GHz to 2.8 GHz)  
Tx, Hopping Off, DH5 2480 MHz, Left

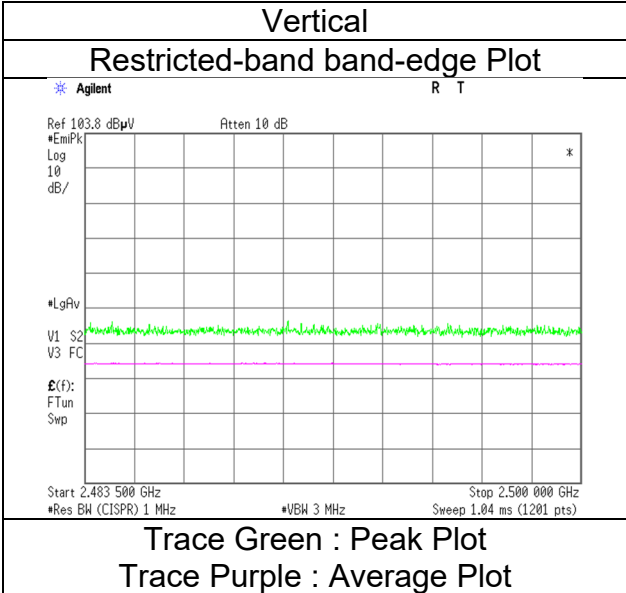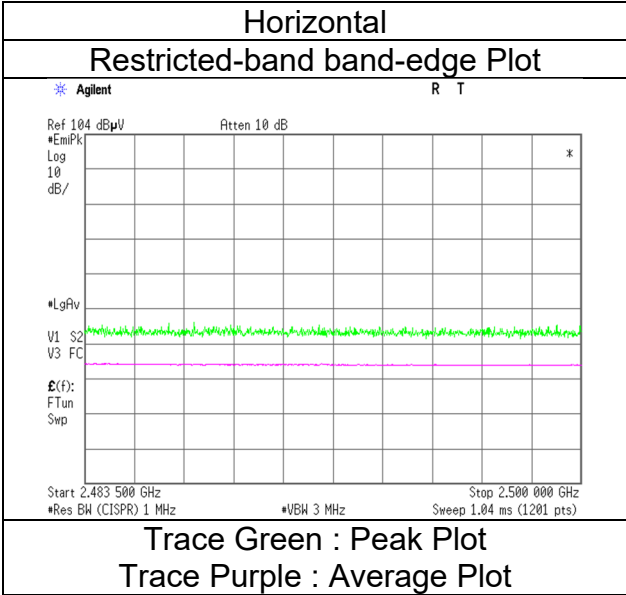

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx, Hopping Off, 3DH5 2402 MHz, Left			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	49.59	27.60	13.01	43.66	3.50	50.04	73.9	23.8	253	158	
Hori.	4804.000	PK	50.31	32.53	5.41	45.10	3.50	46.65	73.9	27.2	150	0	Floor noise
Hori.	7206.000	PK	49.26	37.14	6.66	43.99	3.50	52.57	73.9	21.3	150	0	Floor noise
Hori.	9608.000	PK	46.70	38.01	7.46	41.93	3.50	53.74	73.9	20.1	150	0	Floor noise
Hori.	2390.000	AV	37.39	27.60	13.01	43.66	3.50	37.84	53.9	16.0	253	158	VBW:360Hz
Hori.	4804.000	AV	38.43	32.53	5.41	45.10	3.50	34.77	53.9	19.1	150	0	Floor noise
Hori.	7206.000	AV	37.10	37.14	6.66	43.99	3.50	40.41	53.9	13.4	150	0	Floor noise
Hori.	9608.000	AV	35.06	38.01	7.46	41.93	3.50	42.10	53.9	11.8	150	0	Floor noise
Vert.	2390.000	PK	49.85	27.60	13.01	43.66	3.50	50.30	73.9	23.6	100	179	
Vert.	4804.000	PK	50.81	32.53	5.41	45.10	3.50	47.15	73.9	26.7	150	0	Floor noise
Vert.	7206.000	PK	49.16	37.14	6.66	43.99	3.50	52.47	73.9	21.4	150	0	Floor noise
Vert.	9608.000	PK	47.20	38.01	7.46	41.93	3.50	54.24	73.9	19.6	150	0	Floor noise
Vert.	2390.000	AV	37.39	27.60	13.01	43.66	3.50	37.84	53.9	16.0	100	179	VBW:360Hz
Vert.	4804.000	AV	38.50	32.53	5.41	45.10	3.50	34.84	53.9	19.0	150	0	Floor noise
Vert.	7206.000	AV	37.09	37.14	6.66	43.99	3.50	40.40	53.9	13.5	150	0	Floor noise
Vert.	9608.000	AV	35.08	38.01	7.46	41.93	3.50	42.12	53.9	11.7	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

\*These results have sufficient margin without taking account Duty cycle correction factor.

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	95.15	27.60	13.02	43.65	3.50	95.62	-	-	Carrier
Hori.	2400.000	PK	44.52	27.60	13.02	43.65	3.50	44.99	75.6	30.6	
Vert.	2402.000	PK	95.69	27.60	13.02	43.65	3.50	96.16	-	-	Carrier
Vert.	2400.000	PK	44.25	27.60	13.02	43.65	3.50	44.72	76.2	31.4	



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Kashima EMC Lab.
Semi Anechoic Chamber	No.10
Date	April 23, 2024
Temperature / Humidity	20 deg. C / 59 % RH
Engineer	Hiromitsu Tanabe
	(1 GHz to 2.8 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz, Left

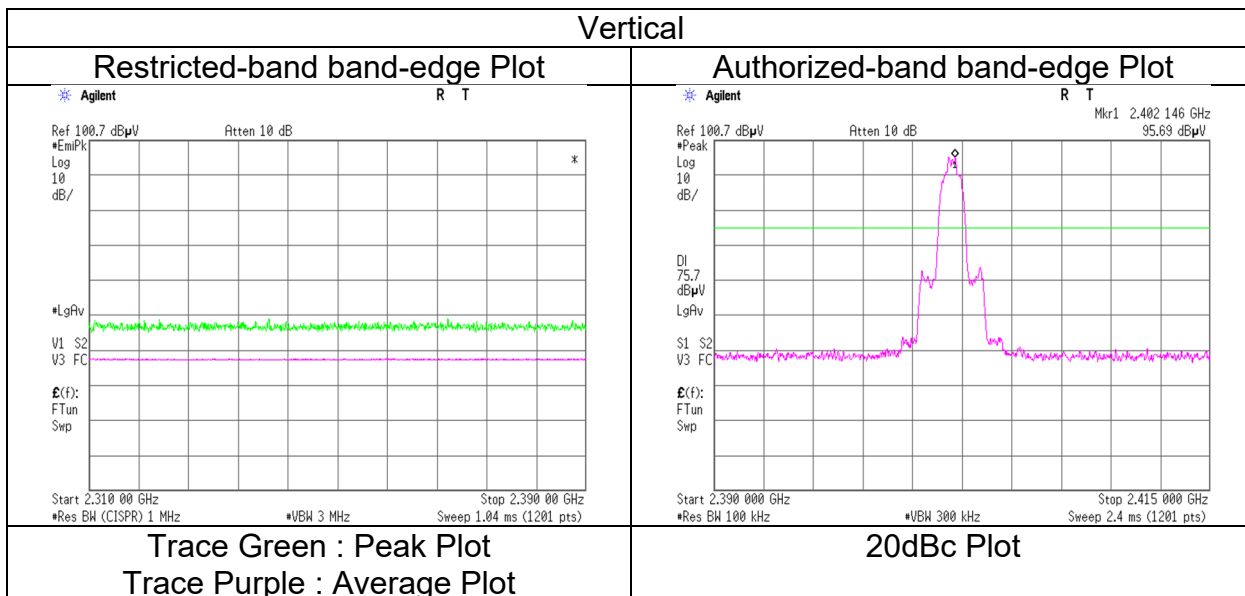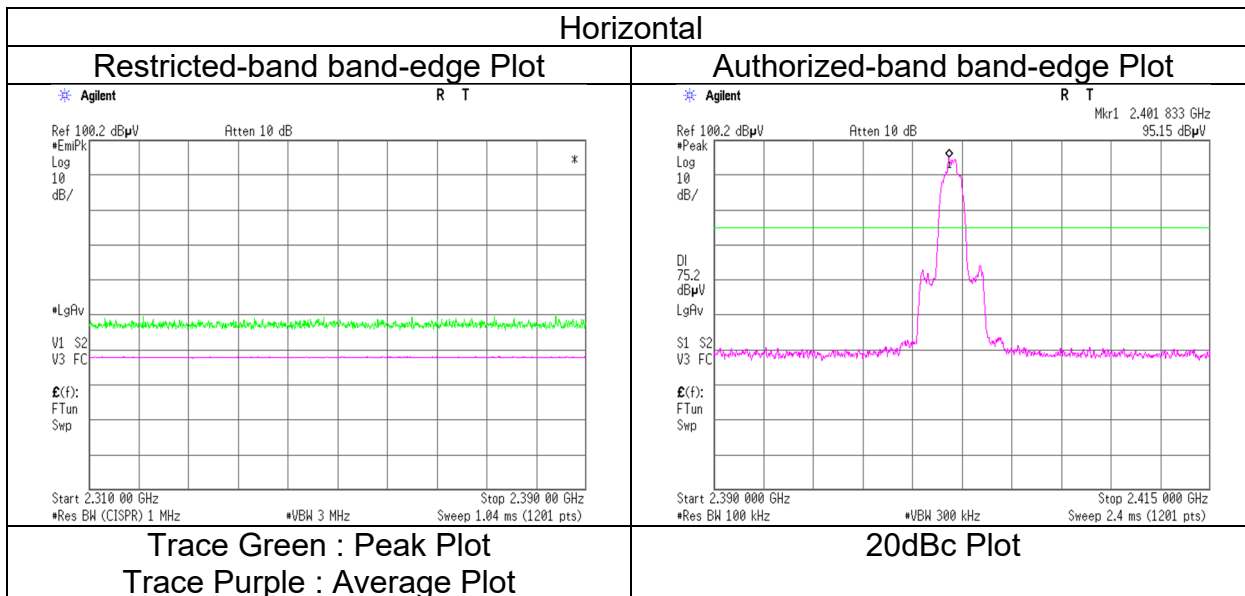

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge and authorized band edge were shown in tabular data.



## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx, Hopping Off, 3DH5 2441 MHz, Left			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4882.000	PK	50.30	32.55	5.46	45.15	3.50	46.66	73.9	27.2	150	0	Floor noise
Hori.	7323.000	PK	48.32	37.38	6.69	43.71	3.50	52.18	73.9	21.7	150	0	Floor noise
Hori.	9764.000	PK	46.92	37.92	7.52	41.76	3.50	54.10	73.9	19.8	150	0	Floor noise
Hori.	4882.000	AV	38.50	32.55	5.46	45.15	3.50	34.86	53.9	19.0	150	0	Floor noise
Hori.	7323.000	AV	36.51	37.38	6.69	43.71	3.50	40.37	53.9	13.5	150	0	Floor noise
Hori.	9764.000	AV	34.97	37.92	7.52	41.76	3.50	42.15	53.9	<b>11.7</b>	150	0	Floor noise
Vert.	4882.000	PK	50.39	32.55	5.46	45.15	3.50	46.75	73.9	27.1	150	0	Floor noise
Vert.	7323.000	PK	48.21	37.38	6.69	43.71	3.50	52.07	73.9	21.8	150	0	Floor noise
Vert.	9764.000	PK	46.62	37.92	7.52	41.76	3.50	53.80	73.9	20.1	150	0	Floor noise
Vert.	4882.000	AV	38.50	32.55	5.46	45.15	3.50	34.86	53.9	19.0	150	0	Floor noise
Vert.	7323.000	AV	36.58	37.38	6.69	43.71	3.50	40.44	53.9	13.4	150	0	Floor noise
Vert.	9764.000	AV	34.97	37.92	7.52	41.76	3.50	42.15	53.9	<b>11.7</b>	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

\*These results have sufficient margin without taking account Duty cycle correction factor.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hirimitsu Tanabe	Hirimitsu Tanabe	Hirimitsu Tanabe	Hirimitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx, Hopping Off, 3DH5 2480 MHz, Left			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	49.82	27.86	13.07	43.62	3.50	50.63	73.9	23.2	391	172	
Hori.	4960.000	PK	50.18	32.64	5.51	45.20	3.50	46.63	73.9	27.2	150	0	Floor noise
Hori.	7440.000	PK	48.31	37.41	6.73	43.45	3.50	52.50	73.9	21.4	150	0	Floor noise
Hori.	9920.000	PK	46.94	38.11	7.61	41.76	3.50	54.40	73.9	19.5	150	0	Floor noise
Hori.	2483.500	AV	37.52	27.86	13.07	43.62	3.50	38.33	53.9	15.5	391	172	VBW:360Hz
Hori.	4960.000	AV	38.50	32.64	5.51	45.20	3.50	34.95	53.9	18.9	150	0	Floor noise
Hori.	7440.000	AV	36.83	37.41	6.73	43.45	3.50	41.02	53.9	12.8	150	0	Floor noise
Hori.	9920.000	AV	35.57	38.11	7.61	41.76	3.50	43.03	53.9	10.8	150	0	Floor noise
Vert.	2483.500	PK	50.17	27.86	13.07	43.62	3.50	50.98	73.9	22.9	100	225	
Vert.	4960.000	PK	51.23	32.64	5.51	45.20	3.50	47.68	73.9	26.2	150	0	Floor noise
Vert.	7440.000	PK	48.76	37.41	6.73	43.45	3.50	52.95	73.9	20.9	150	0	Floor noise
Vert.	9920.000	PK	47.02	38.11	7.61	41.76	3.50	54.48	73.9	19.4	150	0	Floor noise
Vert.	2483.500	AV	37.68	27.86	13.07	43.62	3.50	38.49	53.9	15.4	100	225	VBW:360Hz
Vert.	4960.000	AV	38.47	32.64	5.51	45.20	3.50	34.92	53.9	18.9	150	0	Floor noise
Vert.	7440.000	AV	36.88	37.41	6.73	43.45	3.50	41.07	53.9	12.8	150	0	Floor noise
Vert.	9920.000	AV	35.44	38.11	7.61	41.76	3.50	42.90	53.9	11.0	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB



10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

\*These results have sufficient margin without taking account Duty cycle correction factor.

**Radiated Spurious Emission  
(Reference Plot for band-edge)**

Test place  
Semi Anechoic Chamber  
Date  
Temperature / Humidity  
Engineer  
  
Mode

Kashima EMC Lab.  
No.10  
April 23, 2024  
20 deg. C / 59 % RH  
Hiromitsu Tanabe  
(1 GHz to 2.8 GHz)  
Tx, Hopping Off, 3DH5 2480 MHz, Left

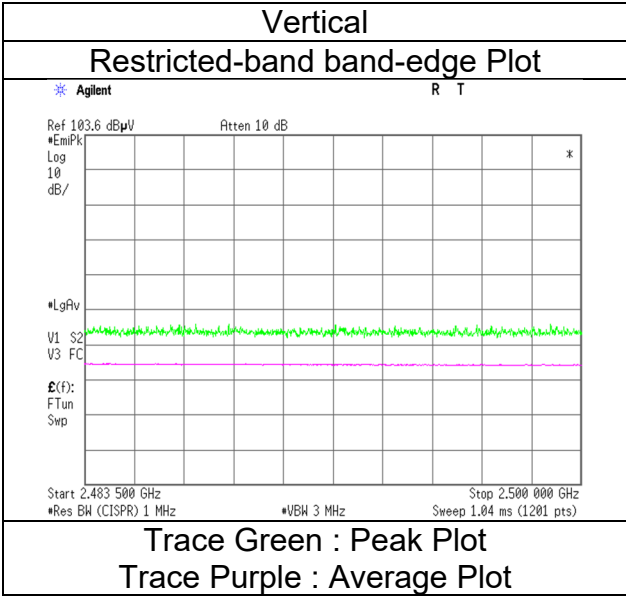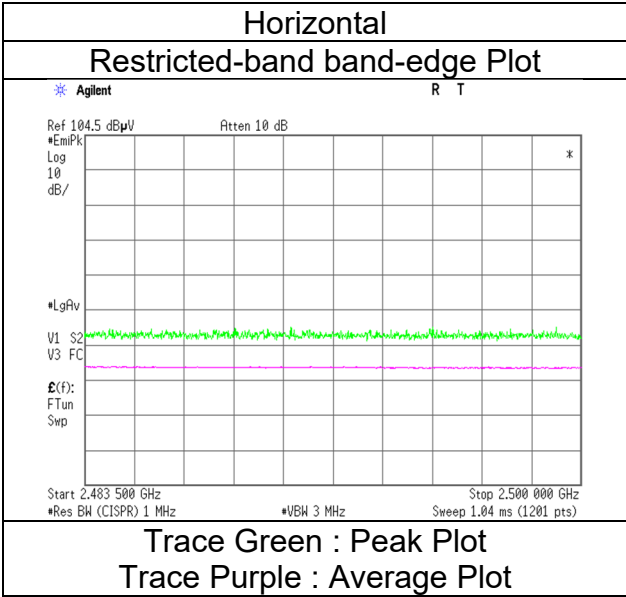

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 24, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	20 deg. C / 53 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx, Hopping Off, DH5 2402 MHz, Right			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	49.90	27.60	13.01	43.66	3.50	50.35	73.9	23.5	187	204	
Hori.	4804.000	PK	50.36	32.53	5.41	45.10	3.50	46.70	73.9	27.2	150	0	Floor noise
Hori.	7206.000	PK	49.44	37.14	6.66	43.99	3.50	52.75	73.9	21.1	150	0	Floor noise
Hori.	9608.000	PK	46.95	38.01	7.46	41.93	3.50	53.99	73.9	19.9	150	0	Floor noise
Hori.	2390.000	AV	38.03	27.60	13.01	43.66	3.50	38.48	53.9	15.4	187	204	VBW:360Hz
Hori.	4804.000	AV	38.89	32.53	5.41	45.10	3.50	35.23	53.9	18.6	150	0	Floor noise
Hori.	7206.000	AV	37.58	37.14	6.66	43.99	3.50	40.89	53.9	13.0	150	0	Floor noise
Hori.	9608.000	AV	35.74	38.01	7.46	41.93	3.50	42.78	53.9	11.1	150	0	Floor noise
Vert.	2390.000	PK	49.79	27.60	13.01	43.66	3.50	50.24	73.9	23.6	102	224	
Vert.	4804.000	PK	50.84	32.53	5.41	45.10	3.50	47.18	73.9	26.7	150	0	Floor noise
Vert.	7206.000	PK	49.13	37.14	6.66	43.99	3.50	52.44	73.9	21.4	150	0	Floor noise
Vert.	9608.000	PK	46.86	38.01	7.46	41.93	3.50	53.90	73.9	20.0	150	0	Floor noise
Vert.	2390.000	AV	37.87	27.60	13.01	43.66	3.50	38.32	53.9	15.5	102	224	VBW:360Hz
Vert.	4804.000	AV	38.92	32.53	5.41	45.10	3.50	35.26	53.9	18.6	150	0	Floor noise
Vert.	7206.000	AV	37.60	37.14	6.66	43.99	3.50	40.91	53.9	12.9	150	0	Floor noise
Vert.	9608.000	AV	35.73	38.01	7.46	41.93	3.50	42.77	53.9	11.1	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

\*These results have sufficient margin without taking account Duty cycle correction factor.

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	98.42	27.60	13.02	43.65	3.50	98.89	-	-	Carrier
Hori.	2400.000	PK	41.98	27.60	13.02	43.65	3.50	42.45	78.9	36.4	
Vert.	2402.000	PK	98.07	27.60	13.02	43.65	3.50	98.54	-	-	Carrier
Vert.	2400.000	PK	41.91	27.60	13.02	43.65	3.50	42.38	78.5	36.1	



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Kashima EMC Lab.
Semi Anechoic Chamber	No.10
Date	April 23, 2024
Temperature / Humidity	20 deg. C / 59 % RH
Engineer	Hiromitsu Tanabe
	(1 GHz to 2.8 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz, Right

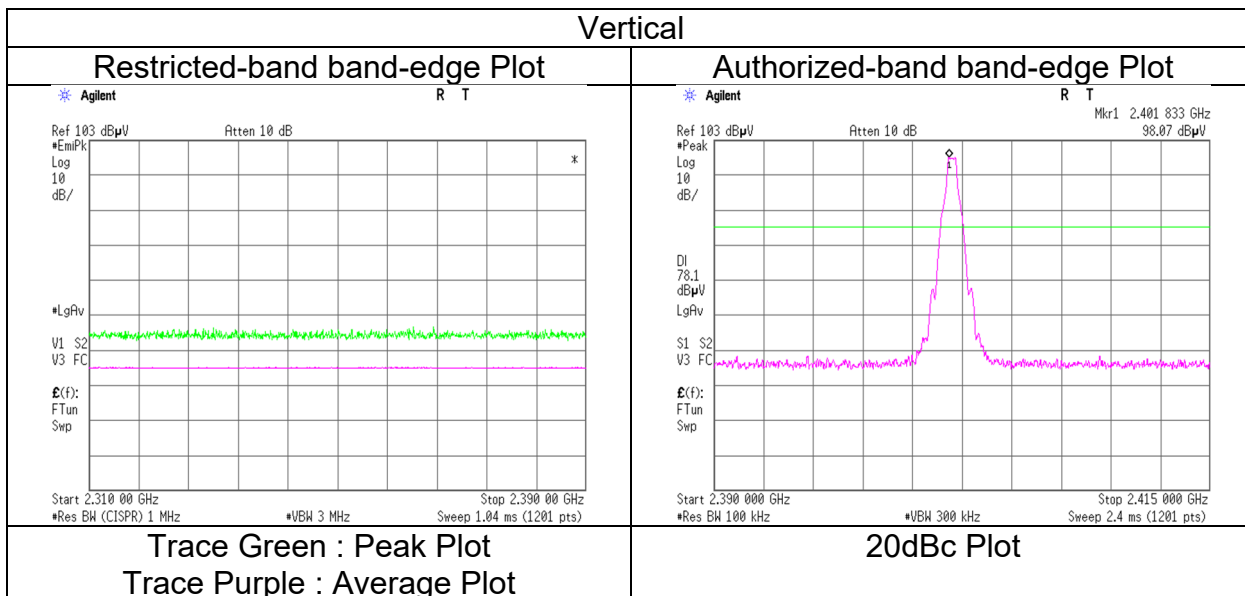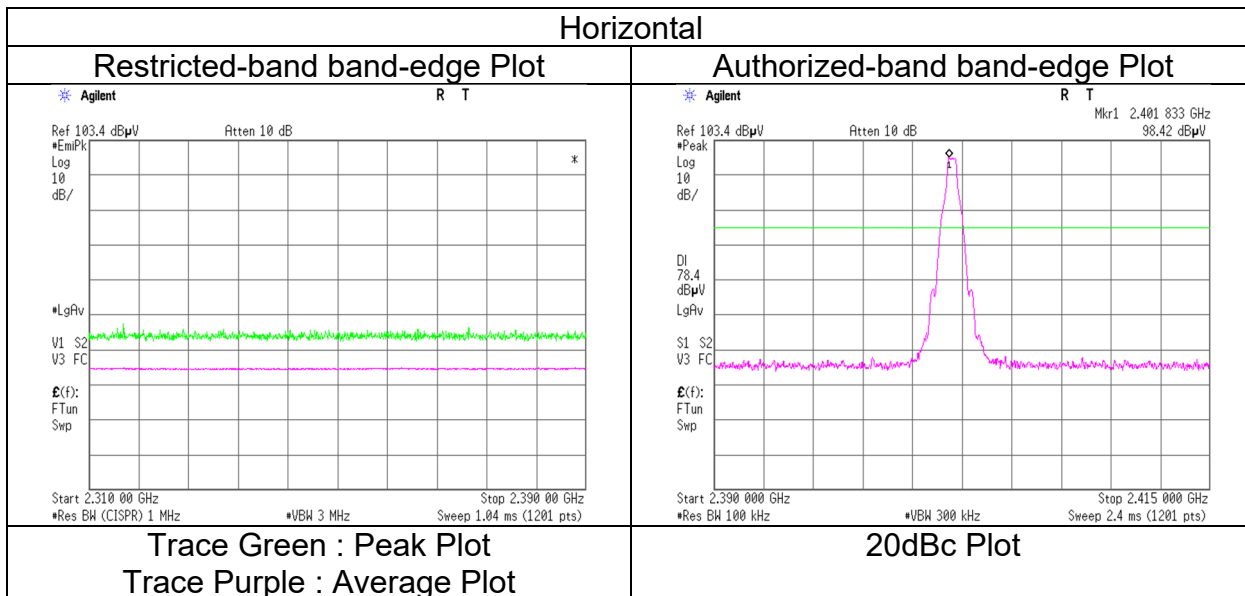

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge and authorized band edge were shown in tabular data.

### Radiated Spurious Emission

Test place	Kashima EMC Lab.				
Semi Anechoic Chamber	No.10	No.10	No.10	No.10	No.10
Date	May 7, 2024	April 23, 2024	April 24, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	25 deg. C / 55 % RH	20 deg. C / 59 % RH	20 deg. C / 53 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hirimitsu Tanabe (30 MHz to 1 GHz)	Hirimitsu Tanabe (1 GHz to 2.8 GHz)	Hirimitsu Tanabe (2.8 GHz to 10 GHz)	Hirimitsu Tanabe (10 GHz to 18 GHz)	Hirimitsu Tanabe (18 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz, Right				

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	64.000	QP	30.07	12.60	6.23	31.21	0.00	17.69	40.0	22.3	100	0	
Hori.	103.760	QP	28.27	9.53	6.66	31.12	0.00	13.34	43.5	30.1	100	0	
Hori.	155.630	QP	26.99	13.41	7.13	31.04	0.00	16.49	43.5	27.0	100	0	
Hori.	4882.000	PK	50.82	32.55	5.46	45.15	3.50	47.18	73.9	26.7	150	0	Floor noise
Hori.	7323.000	PK	48.67	37.38	6.69	43.71	3.50	52.53	73.9	21.3	150	0	Floor noise
Hori.	9764.000	PK	48.05	37.92	7.52	41.76	3.50	55.23	73.9	18.6	150	0	Floor noise
Hori.	4882.000	AV	39.05	32.55	5.46	45.15	3.50	35.41	53.9	18.4	150	0	Floor noise
Hori.	7323.000	AV	36.97	37.38	6.69	43.71	3.50	40.83	53.9	13.0	150	0	Floor noise
Hori.	9764.000	AV	35.82	37.92	7.52	41.76	3.50	43.00	53.9	10.9	150	0	Floor noise
Vert.	64.000	QP	30.01	12.60	6.23	31.21	0.00	17.63	40.0	22.3	100	0	
Vert.	103.760	QP	28.24	9.53	6.66	31.12	0.00	13.31	43.5	30.1	100	0	
Vert.	155.630	QP	27.04	13.41	7.13	31.04	0.00	16.54	43.5	26.9	100	0	
Vert.	4882.000	PK	50.38	32.55	5.46	45.15	3.50	46.74	73.9	27.1	150	0	Floor noise
Vert.	7323.000	PK	48.55	37.38	6.69	43.71	3.50	52.41	73.9	21.5	150	0	Floor noise
Vert.	9764.000	PK	48.05	37.92	7.52	41.76	3.50	55.23	73.9	18.6	150	0	Floor noise
Vert.	4882.000	AV	39.07	32.55	5.46	45.15	3.50	35.43	53.9	18.4	150	0	Floor noise
Vert.	7323.000	AV	36.98	37.38	6.69	43.71	3.50	40.84	53.9	13.0	150	0	Floor noise
Vert.	9764.000	AV	35.86	37.92	7.52	41.76	3.50	43.04	53.9	<b>10.8</b>	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

\*These results have sufficient margin without taking account Duty cycle correction factor.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 24, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	20 deg. C / 53 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz, Right			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	50.25	27.86	13.07	43.62	3.50	51.06	73.9	22.8	390	186	
Hori.	4960.000	PK	50.71	32.64	5.51	45.20	3.50	47.16	73.9	26.7	150	0	Floor noise
Hori.	7440.000	PK	49.14	37.41	6.73	43.45	3.50	53.33	73.9	20.5	150	0	Floor noise
Hori.	9920.000	PK	47.42	38.11	7.61	41.76	3.50	54.88	73.9	19.0	150	0	Floor noise
Hori.	2483.500	AV	37.50	27.86	13.07	43.62	3.50	38.31	53.9	15.5	390	186	VBW:360Hz
Hori.	4960.000	AV	38.93	32.64	5.51	45.20	3.50	35.38	53.9	18.5	150	0	Floor noise
Hori.	7440.000	AV	37.22	37.41	6.73	43.45	3.50	41.41	53.9	12.4	150	0	Floor noise
Hori.	9920.000	AV	35.51	38.11	7.61	41.76	3.50	42.97	53.9	<b>10.9</b>	150	0	Floor noise
Vert.	2483.500	PK	50.01	27.86	13.07	43.62	3.50	50.82	73.9	23.0	100	219	
Vert.	4960.000	PK	50.77	32.64	5.51	45.20	3.50	47.22	73.9	26.6	150	0	Floor noise
Vert.	7440.000	PK	49.18	37.41	6.73	43.45	3.50	53.37	73.9	20.5	150	0	Floor noise
Vert.	9920.000	PK	47.86	38.11	7.61	41.76	3.50	55.32	73.9	18.5	150	0	Floor noise
Vert.	2483.500	AV	37.50	27.86	13.07	43.62	3.50	38.31	53.9	15.6	100	219	VBW:360Hz
Vert.	4960.000	AV	38.89	32.64	5.51	45.20	3.50	35.34	53.9	18.5	150	0	Floor noise
Vert.	7440.000	AV	37.15	37.41	6.73	43.45	3.50	41.34	53.9	12.5	150	0	Floor noise
Vert.	9920.000	AV	35.50	38.11	7.61	41.76	3.50	42.96	53.9	<b>10.9</b>	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB



10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

\*These results have sufficient margin without taking account Duty cycle correction factor.

**Radiated Spurious Emission  
(Reference Plot for band-edge)**

Test place  
Semi Anechoic Chamber  
Date  
Temperature / Humidity  
Engineer  
Mode

Kashima EMC Lab.  
No.10  
April 23, 2024  
20 deg. C / 59 % RH  
Hiromitsu Tanabe  
(1 GHz to 2.8 GHz)  
Tx, Hopping Off, DH5 2480 MHz, Right

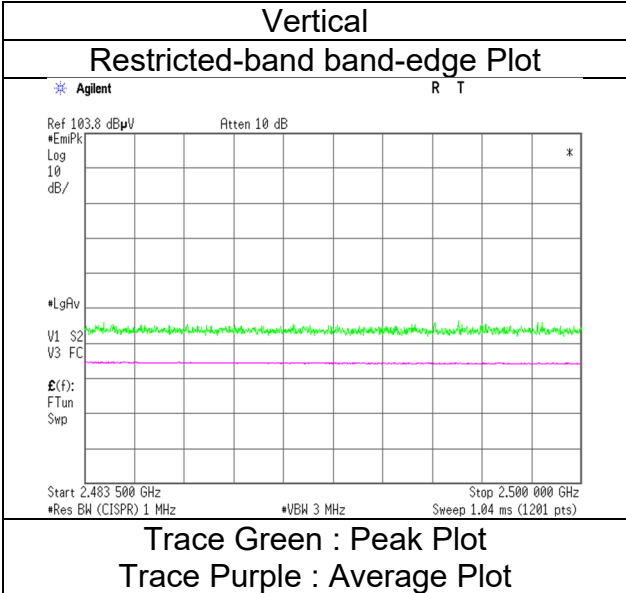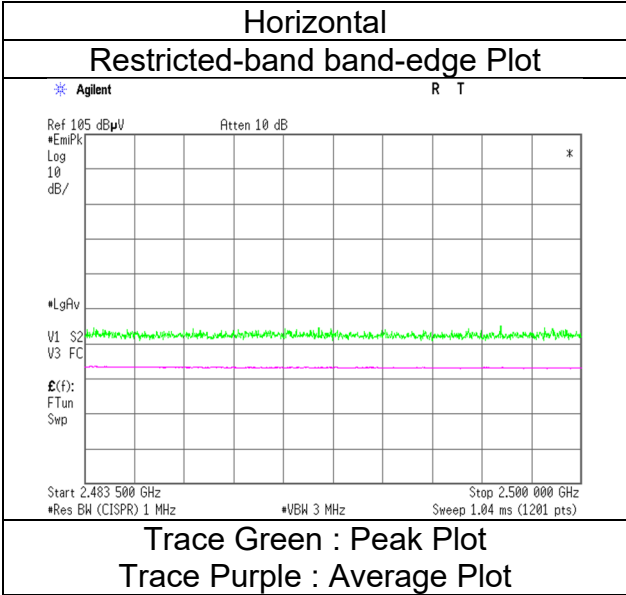

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.



## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx, Hopping Off, 3DH5 2402 MHz, Right			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	50.78	27.60	13.01	43.66	3.50	51.23	73.9	22.6	367	192	
Hori.	4804.000	PK	51.03	32.53	5.41	45.10	3.50	47.37	73.9	26.5	150	0	Floor noise
Hori.	7206.000	PK	50.28	37.14	6.66	43.99	3.50	53.59	73.9	20.3	150	0	Floor noise
Hori.	9608.000	PK	46.57	38.01	7.46	41.93	3.50	53.61	73.9	20.2	150	0	Floor noise
Hori.	2390.000	AV	37.32	27.60	13.01	43.66	3.50	37.77	53.9	16.1	367	192	VBW:360Hz
Hori.	4804.000	AV	38.39	32.53	5.41	45.10	3.50	34.73	53.9	19.1	150	0	Floor noise
Hori.	7206.000	AV	37.14	37.14	6.66	43.99	3.50	40.45	53.9	13.4	150	0	Floor noise
Hori.	9608.000	AV	34.98	38.01	7.46	41.93	3.50	42.02	53.9	11.8	150	0	Floor noise
Vert.	2390.000	PK	49.39	27.60	13.01	43.66	3.50	49.84	73.9	24.0	269	273	
Vert.	4804.000	PK	51.26	32.53	5.41	45.10	3.50	47.60	73.9	26.3	150	0	Floor noise
Vert.	7206.000	PK	49.28	37.14	6.66	43.99	3.50	52.59	73.9	21.3	150	0	Floor noise
Vert.	9608.000	PK	47.50	38.01	7.46	41.93	3.50	54.54	73.9	19.3	150	0	Floor noise
Vert.	2390.000	AV	37.25	27.60	13.01	43.66	3.50	37.70	53.9	16.2	269	273	VBW:360Hz
Vert.	4804.000	AV	38.47	32.53	5.41	45.10	3.50	34.81	53.9	19.0	150	0	Floor noise
Vert.	7206.000	AV	37.06	37.14	6.66	43.99	3.50	40.37	53.9	13.5	150	0	Floor noise
Vert.	9608.000	AV	35.02	38.01	7.46	41.93	3.50	42.06	53.9	11.8	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

\*These results have sufficient margin without taking account Duty cycle correction factor.

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	97.97	27.60	13.02	43.65	3.50	98.44	-	-	Carrier
Hori.	2400.000	PK	42.97	27.60	13.02	43.65	3.50	43.44	78.4	35.0	
Vert.	2402.000	PK	97.18	27.60	13.02	43.65	3.50	97.65	-	-	Carrier
Vert.	2400.000	PK	42.88	27.60	13.02	43.65	3.50	43.35	77.7	34.3	



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Kashima EMC Lab.
Semi Anechoic Chamber	No.10
Date	April 23, 2024
Temperature / Humidity	20 deg. C / 59 % RH
Engineer	Hiromitsu Tanabe
	(1 GHz to 2.8 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz, Right

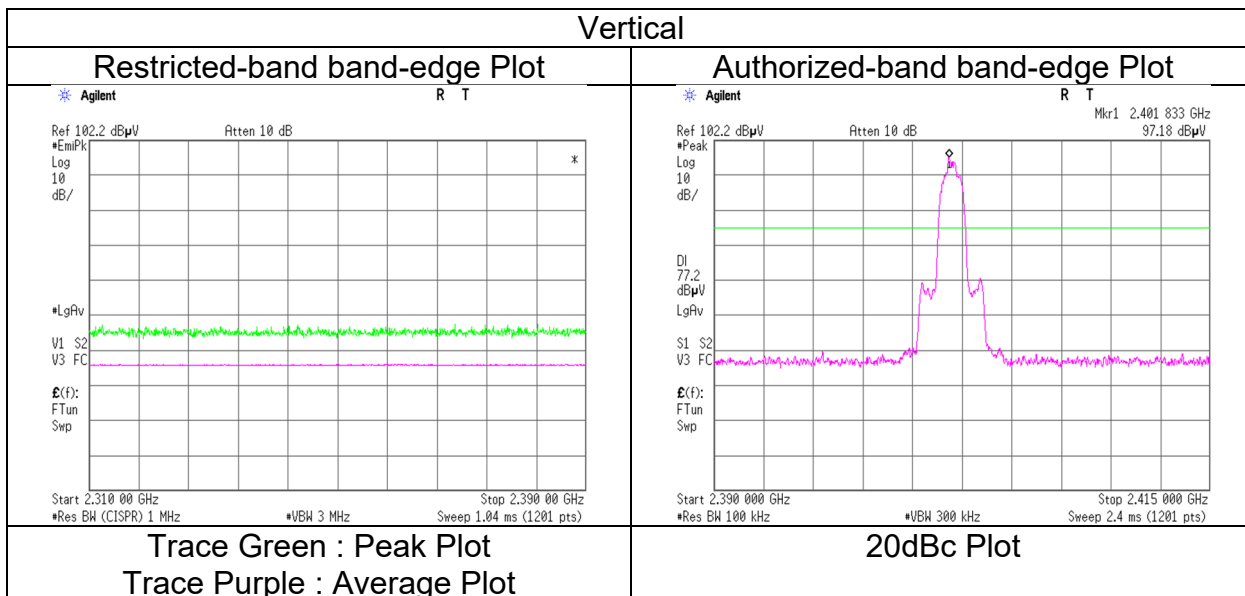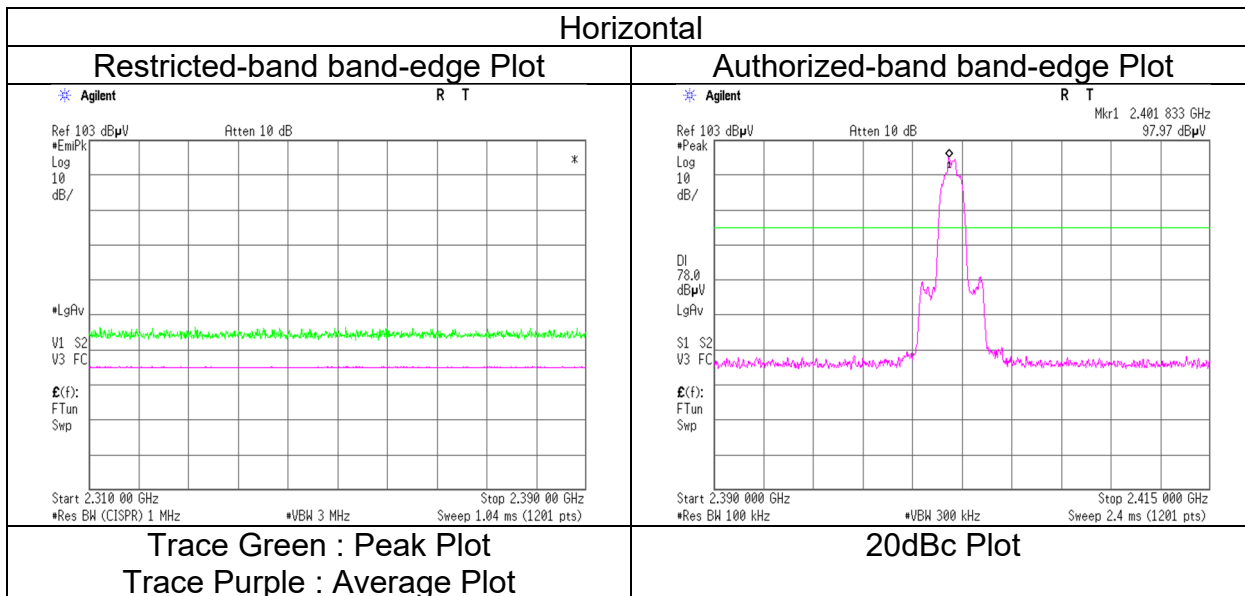

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge and authorized band edge were shown in tabular data.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz) Tx, Hopping Off, 3DH5 2441 MHz, Right	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4882.000	PK	50.87	32.55	5.46	45.15	3.50	47.23	73.9	26.6	150	0	Floor noise
Hori.	7323.000	PK	48.24	37.38	6.69	43.71	3.50	52.10	73.9	21.8	150	0	Floor noise
Hori.	9764.000	PK	47.20	37.92	7.52	41.76	3.50	54.38	73.9	19.5	150	0	Floor noise
Hori.	4882.000	AV	38.47	32.55	5.46	45.15	3.50	34.83	53.9	19.0	150	0	Floor noise
Hori.	7323.000	AV	36.46	37.38	6.69	43.71	3.50	40.32	53.9	13.5	150	0	Floor noise
Hori.	9764.000	AV	34.93	37.92	7.52	41.76	3.50	42.11	53.9	<b>11.7</b>	150	0	Floor noise
Vert.	4882.000	PK	49.93	32.55	5.46	45.15	3.50	46.29	73.9	27.6	150	0	Floor noise
Vert.	7323.000	PK	47.92	37.38	6.69	43.71	3.50	51.78	73.9	22.1	150	0	Floor noise
Vert.	9764.000	PK	46.84	37.92	7.52	41.76	3.50	54.02	73.9	19.8	150	0	Floor noise
Vert.	4882.000	AV	38.46	32.55	5.46	45.15	3.50	34.82	53.9	19.0	150	0	Floor noise
Vert.	7323.000	AV	36.57	37.38	6.69	43.71	3.50	40.43	53.9	13.4	150	0	Floor noise
Vert.	9764.000	AV	34.98	37.92	7.52	41.76	3.50	42.16	53.9	<b>11.7</b>	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

\*These results have sufficient margin without taking account Duty cycle correction factor.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz) Tx, Hopping Off, 3DH5 2480 MHz, Right	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	51.21	27.86	13.07	43.62	3.50	52.02	73.9	21.8	389	189	
Hori.	4960.000	PK	51.59	32.64	5.51	45.20	3.50	48.04	73.9	25.8	150	0	Floor noise
Hori.	7440.000	PK	49.46	37.41	6.73	43.45	3.50	53.65	73.9	20.2	150	0	Floor noise
Hori.	9920.000	PK	47.21	38.11	7.61	41.76	3.50	54.67	73.9	19.2	150	0	Floor noise
Hori.	2483.500	AV	37.64	27.86	13.07	43.62	3.50	38.45	53.9	15.4	389	189	VBW:360Hz
Hori.	4960.000	AV	38.51	32.64	5.51	45.20	3.50	34.96	53.9	18.9	150	0	Floor noise
Hori.	7440.000	AV	36.85	37.41	6.73	43.45	3.50	41.04	53.9	12.8	150	0	Floor noise
Hori.	9920.000	AV	35.69	38.11	7.61	41.76	3.50	43.15	53.9	10.7	150	0	Floor noise
Vert.	2483.500	PK	49.60	27.86	13.07	43.62	3.50	50.41	73.9	23.4	100	228	
Vert.	4960.000	PK	50.18	32.64	5.51	45.20	3.50	46.63	73.9	27.2	150	0	Floor noise
Vert.	7440.000	PK	48.43	37.41	6.73	43.45	3.50	52.62	73.9	21.2	150	0	Floor noise
Vert.	9920.000	PK	47.57	38.11	7.61	41.76	3.50	55.03	73.9	18.8	150	0	Floor noise
Vert.	2483.500	AV	37.44	27.86	13.07	43.62	3.50	38.25	53.9	15.6	100	228	VBW:360Hz
Vert.	4960.000	AV	38.45	32.64	5.51	45.20	3.50	34.90	53.9	19.0	150	0	Floor noise
Vert.	7440.000	AV	36.85	37.41	6.73	43.45	3.50	41.04	53.9	12.8	150	0	Floor noise
Vert.	9920.000	AV	35.50	38.11	7.61	41.76	3.50	42.96	53.9	10.9	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB



10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

\*These results have sufficient margin without taking account Duty cycle correction factor.

**Radiated Spurious Emission  
 (Reference Plot for band-edge)**

Test place  
 Semi Anechoic Chamber  
 Date  
 Temperature / Humidity  
 Engineer  
 Mode


Kashima EMC Lab.  
 No.10  
 April 23, 2024  
 20 deg. C / 59 % RH  
 Hiromitsu Tanabe  
 (1 GHz to 2.8 GHz)  
 Tx, Hopping Off, 3DH5 2480 MHz, Right

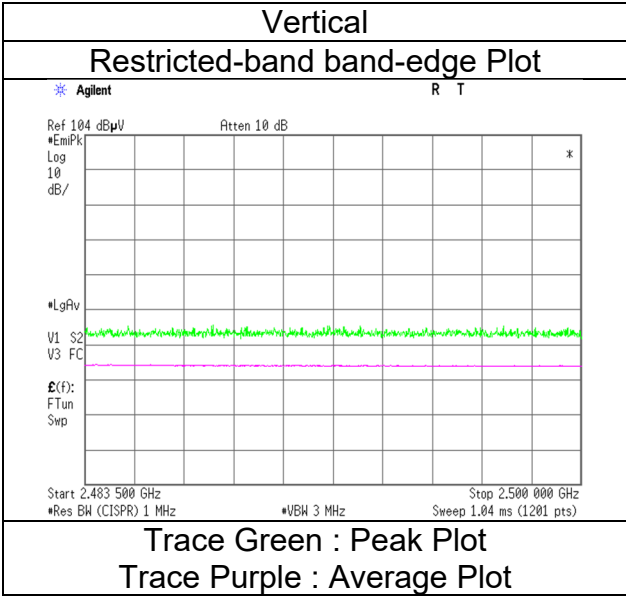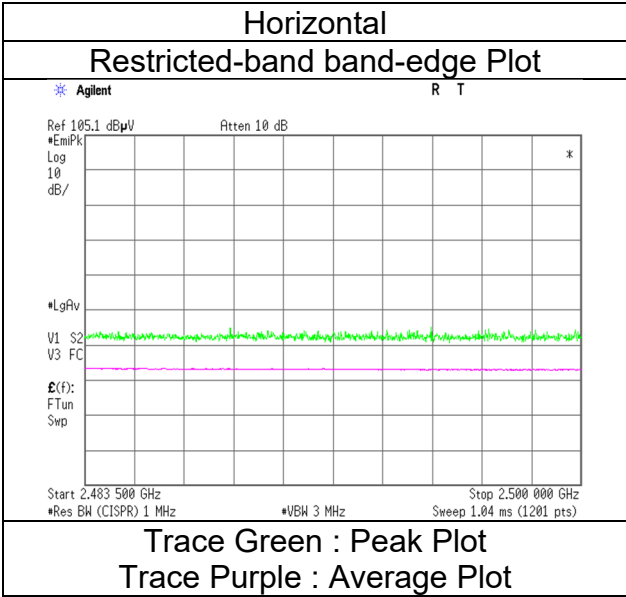

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
 Final result of restricted band edge was shown in tabular data.

**Radiated Spurious Emission**  
**(Plot data, Worst case mode for Maximum Peak Output Power)**


Test place	Kashima EMC Lab.				
Semi Anechoic Chamber	No.10	No.10	No.10	No.10	No.10
Date	May 7, 2024	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	25 deg. C / 55 % RH	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hirimitsu Tanabe (30 MHz to 1 GHz)	Hirimitsu Tanabe (1 GHz to 2.8 GHz)	Hirimitsu Tanabe (2.8 GHz to 10 GHz)	Hirimitsu Tanabe (10 GHz to 18 GHz)	Hirimitsu Tanabe (18 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz, Left				

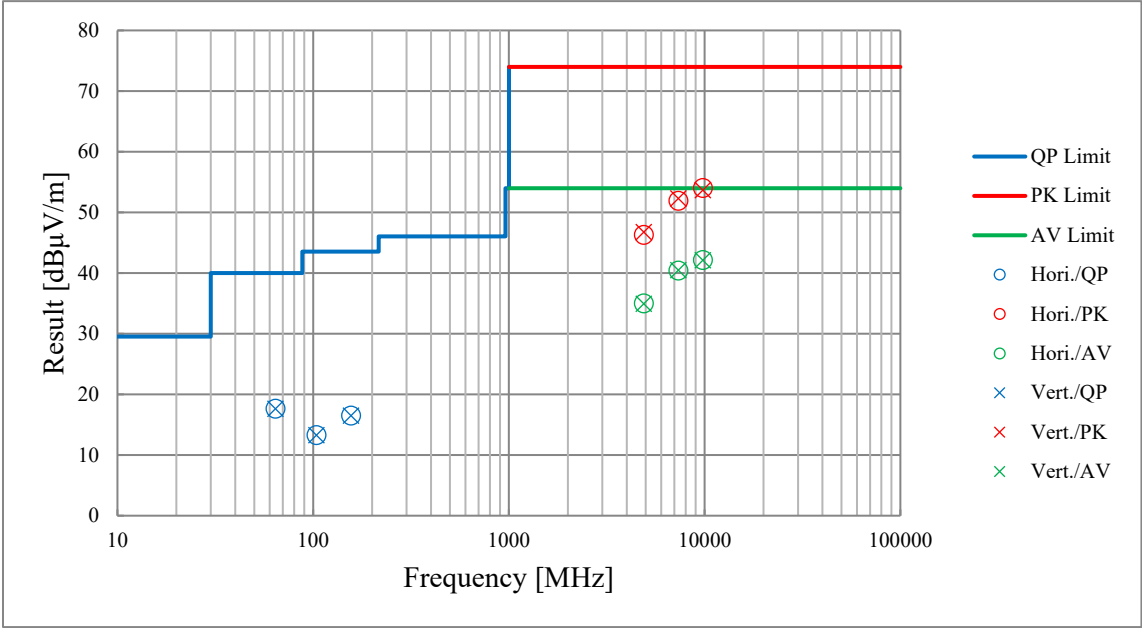

\*These plots data contain sufficient number to show the trend of characteristic features for EUT.

**Radiated Spurious Emission**  
**(Plot data, Worst case mode for Maximum Peak Output Power)**

Test place	Kashima EMC Lab.				
Semi Anechoic Chamber	No.10	No.10	No.10	No.10	No.10
Date	May 7, 2024	April 23, 2024	April 24, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	25 deg. C / 55 % RH	20 deg. C / 59 % RH	20 deg. C / 53 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hirimitsu Tanabe (30 MHz to 1 GHz)	Hirimitsu Tanabe (1 GHz to 2.8 GHz)	Hirimitsu Tanabe (2.8 GHz to 10 GHz)	Hirimitsu Tanabe (10 GHz to 18 GHz)	Hirimitsu Tanabe (18 GHz to 26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz, Right				


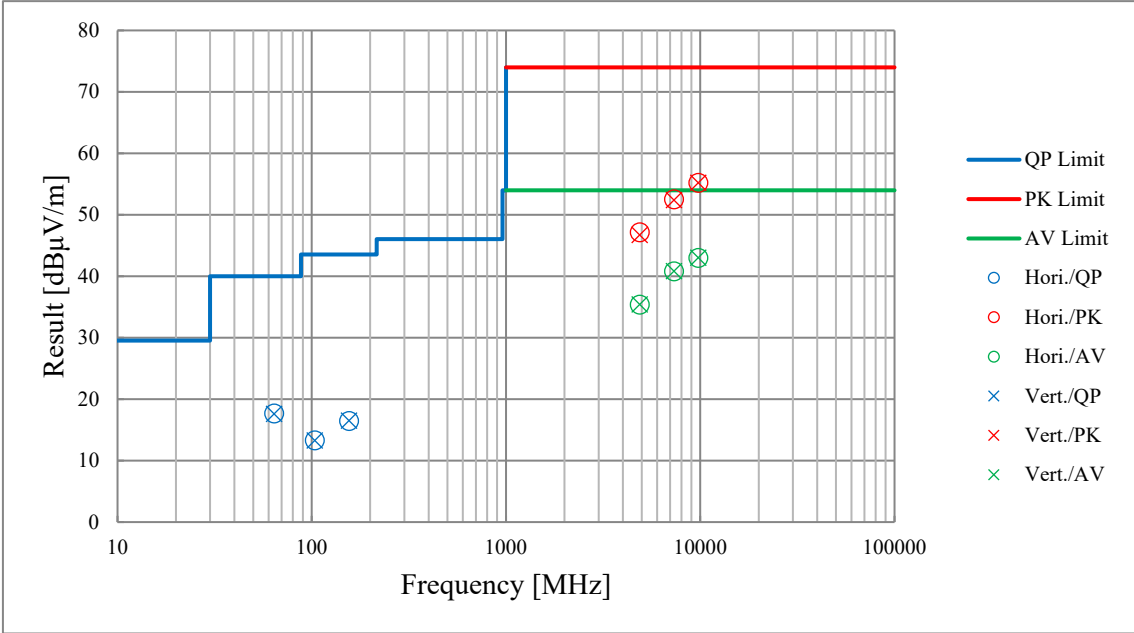


\*These plots data contain sufficient number to show the trend of characteristic features for EUT.

### Conducted Spurious Emission

Test place	Kashima EMC Lab. No.2 Measurement Room
Date	April 19, 2024
Temperature / Humidity	21 deg. C / 49 % RH
Engineer	Hiromitsu Tanabe
Mode	Tx, Hopping Off, DH5

#### 2402 MHz

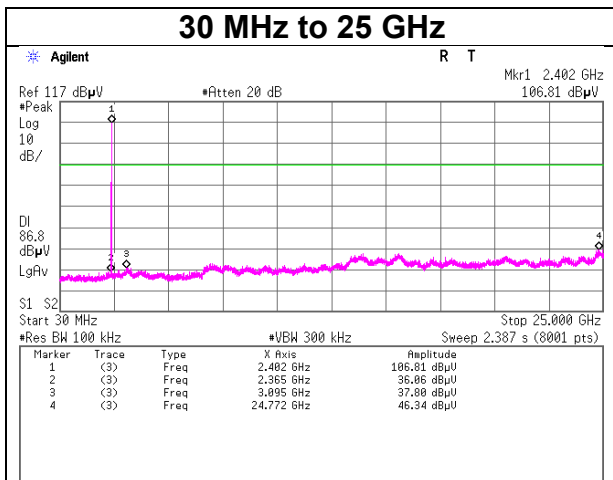
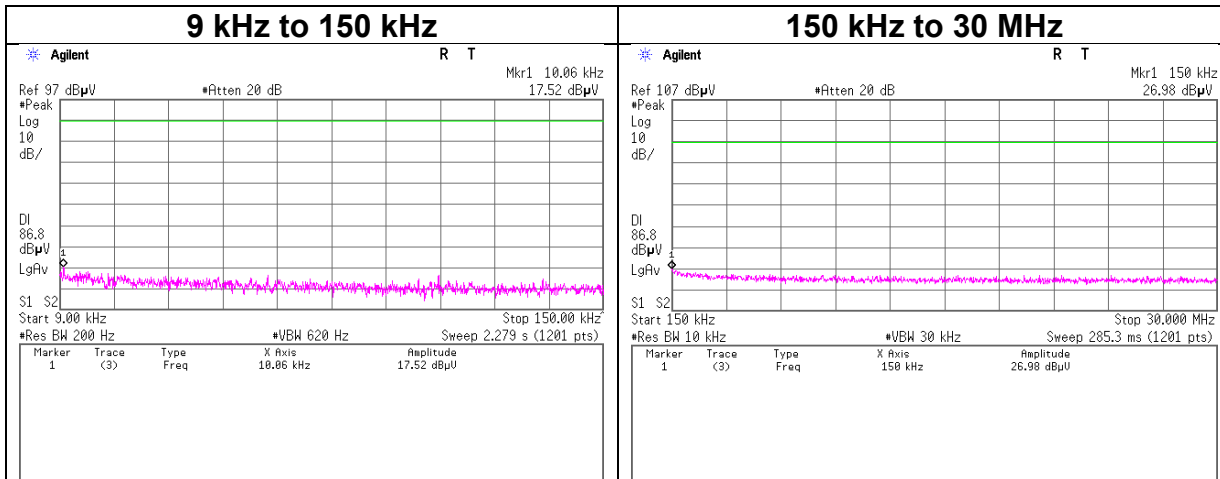




**Conducted Spurious Emission**

Test place                      Kashima EMC Lab. No.2 Measurement Room  
 Date                              April 19, 2024  
 Temperature / Humidity      21 deg. C / 49 % RH  
 Engineer                        Hiromitsu Tanabe  
 Mode                              Tx, Hopping Off, DH5



**2441 MHz**

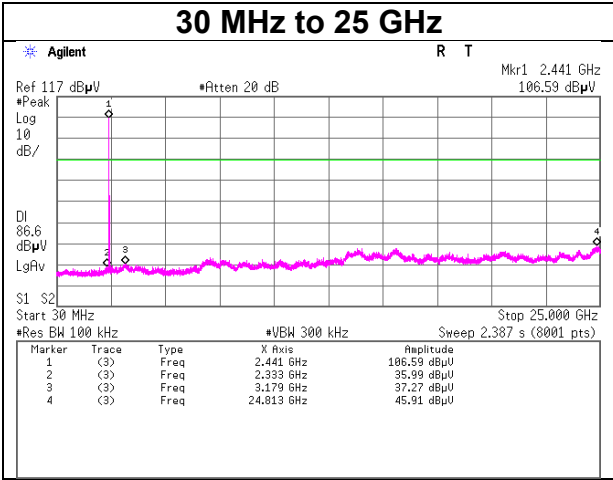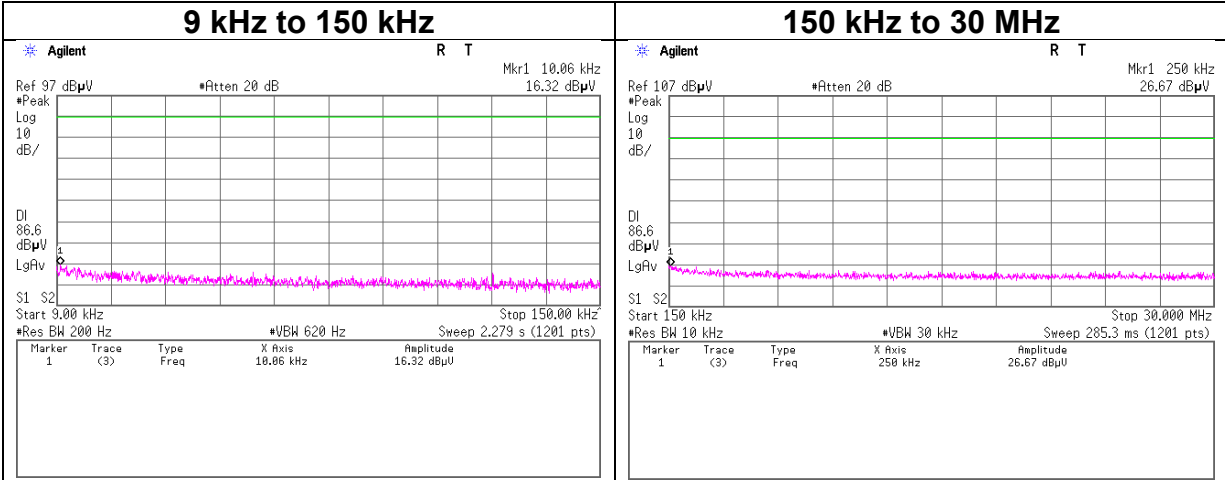

**Conducted Spurious Emission**

Test place                      Kashima EMC Lab. No.2 Measurement Room  
 Date                              April 19, 2024  
 Temperature / Humidity      21 deg. C / 49 % RH  
 Engineer                        Hiromitsu Tanabe  
 Mode                              Tx, Hopping Off, DH5



**2480 MHz**

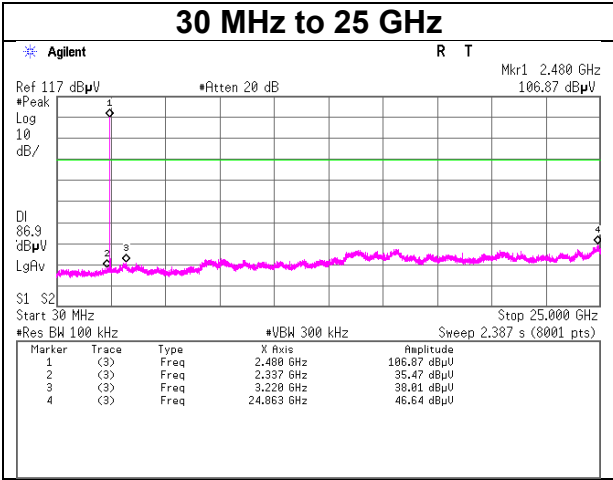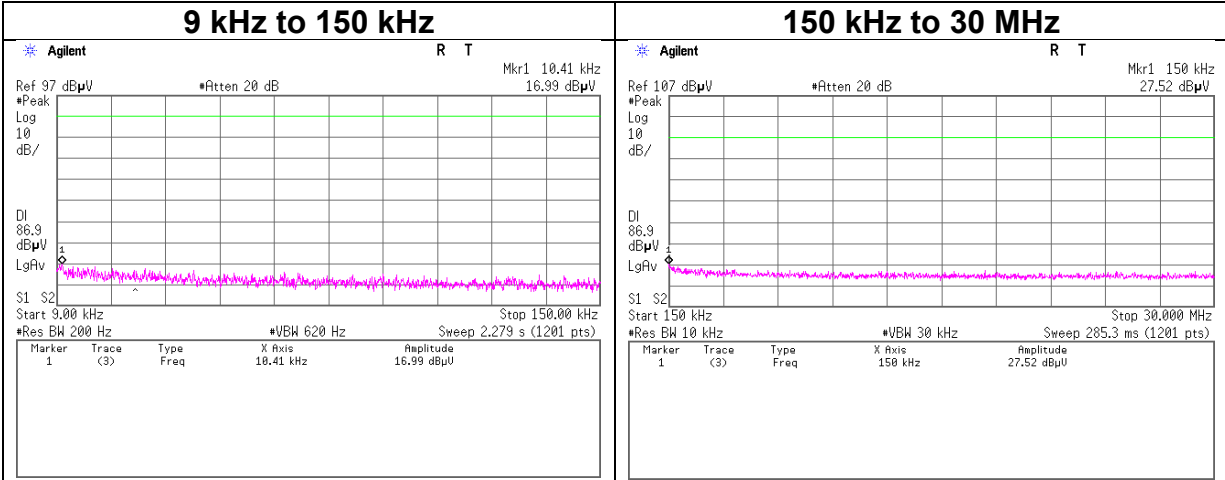

### Conducted Spurious Emission

Test place                   Kashima EMC Lab. No.2 Measurement Room  
Date                            April 19, 2024  
Temperature / Humidity    21 deg. C / 49 % RH  
Engineer                    Hiromitsu Tanabe  
Mode                          Tx, Hopping Off, 3DH5



#### 2402 MHz

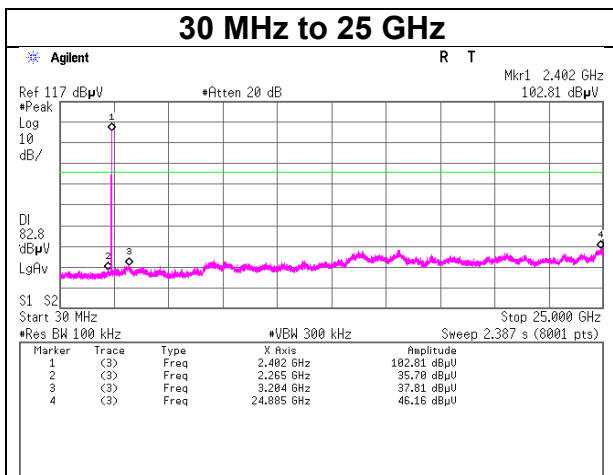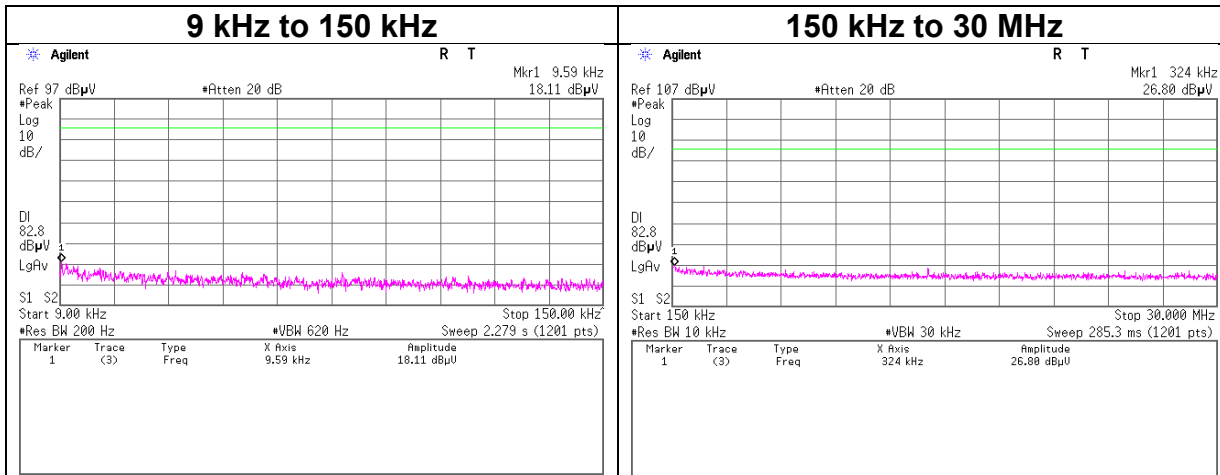

### Conducted Spurious Emission

Test place                      Kashima EMC Lab. No.2 Measurement Room  
Date                                April 19, 2024  
Temperature / Humidity        21 deg. C / 49 % RH  
Engineer                         Hiromitsu Tanabe  
Mode                                Tx, Hopping Off, 3DH5



#### 2441 MHz

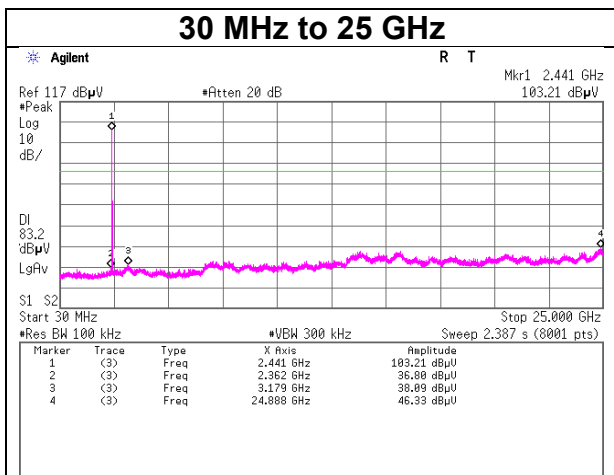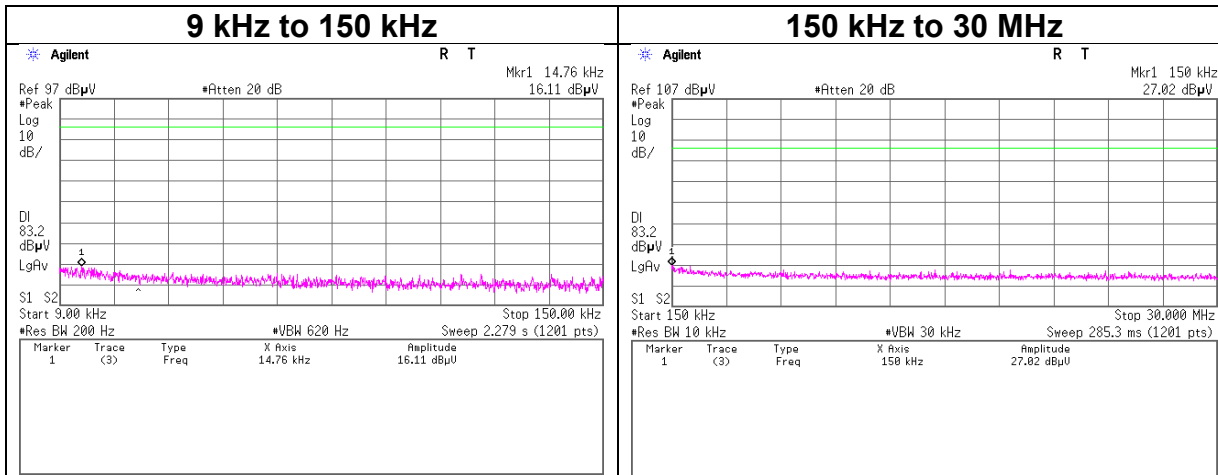

**Conducted Spurious Emission**

Test place                      Kashima EMC Lab. No.2 Measurement Room  
 Date                              April 19, 2024  
 Temperature / Humidity      21 deg. C / 49 % RH  
 Engineer                        Hiromitsu Tanabe  
 Mode                              Tx, Hopping Off, 3DH5


**2480 MHz**

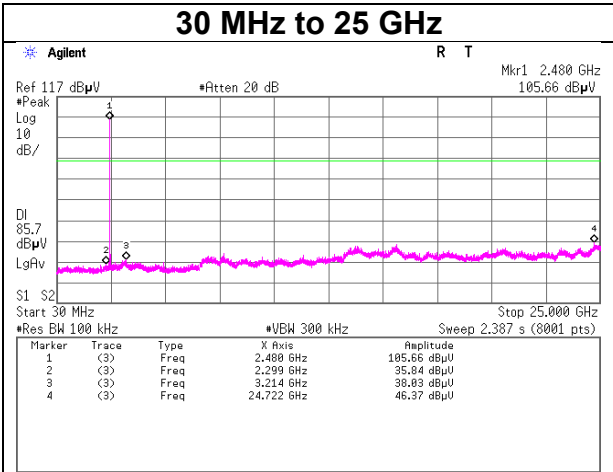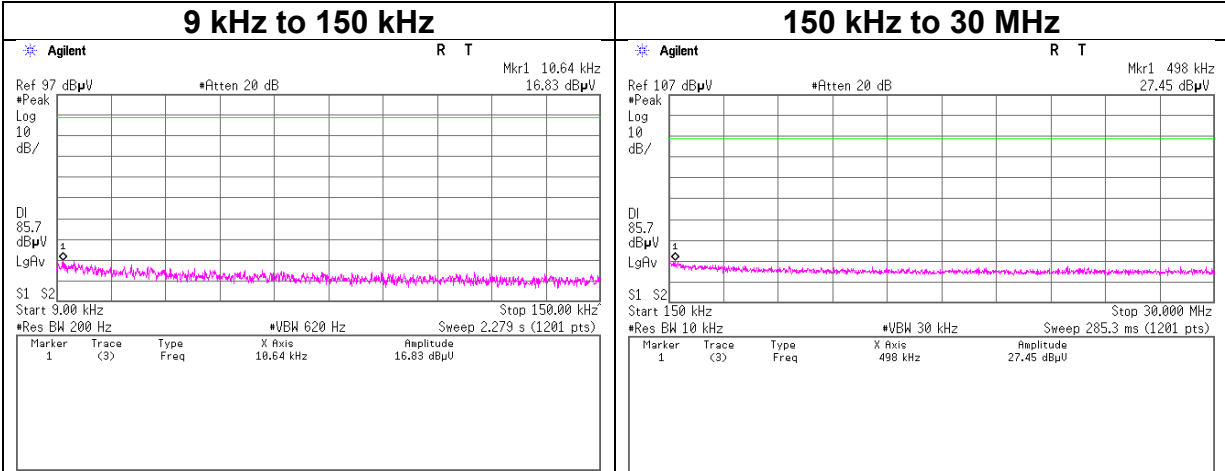


### Conducted Emission Band Edge compliance

Test place                   Kashima EMC Lab. No.2 Measurement Room  
Date                         April 19, 2024  
Temperature / Humidity    21 deg. C / 49 % RH  
Engineer                  Hiromitsu Tanabe  
Mode                        Tx DH5

#### Hopping On

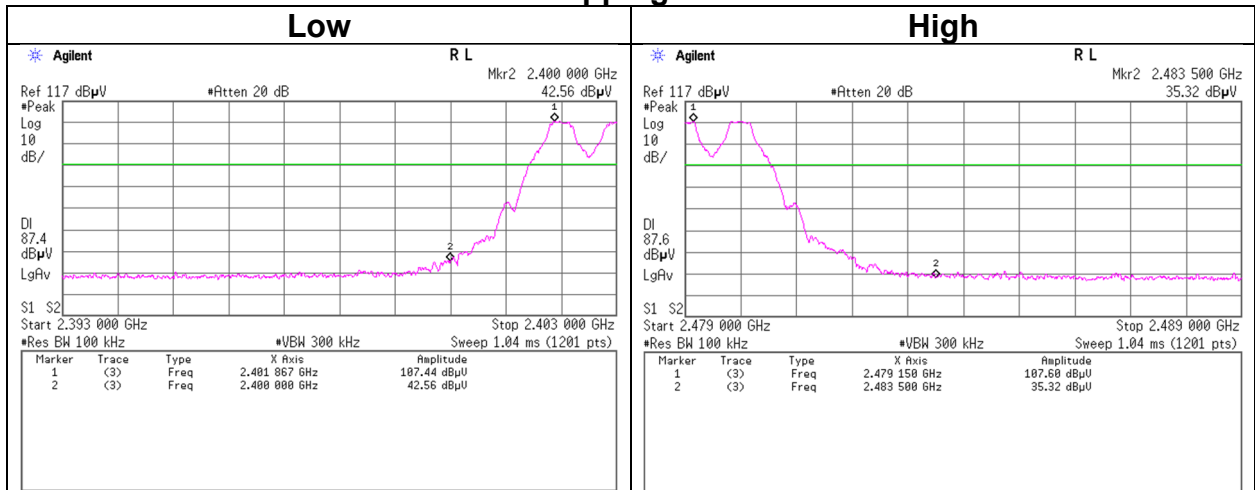


#### Hopping Off

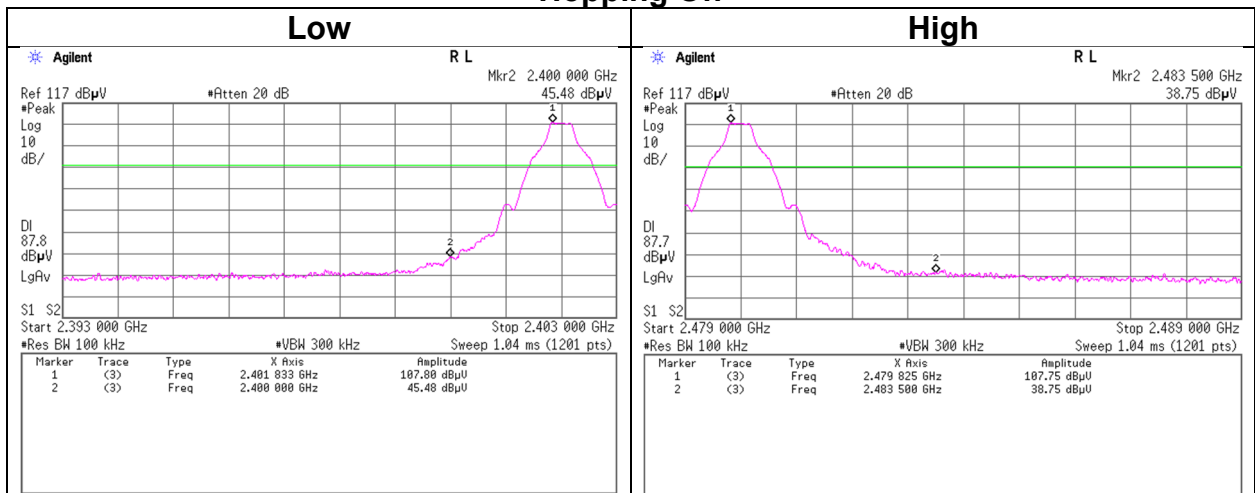


### Conducted Emission Band Edge compliance

Test place                    Kashima EMC Lab. No.2 Measurement Room  
Date                            April 19, 2024  
Temperature / Humidity    21 deg. C / 49 % RH  
Engineer                     Hiromitsu Tanabe  
Mode                         Tx 3DH5

#### Hopping On

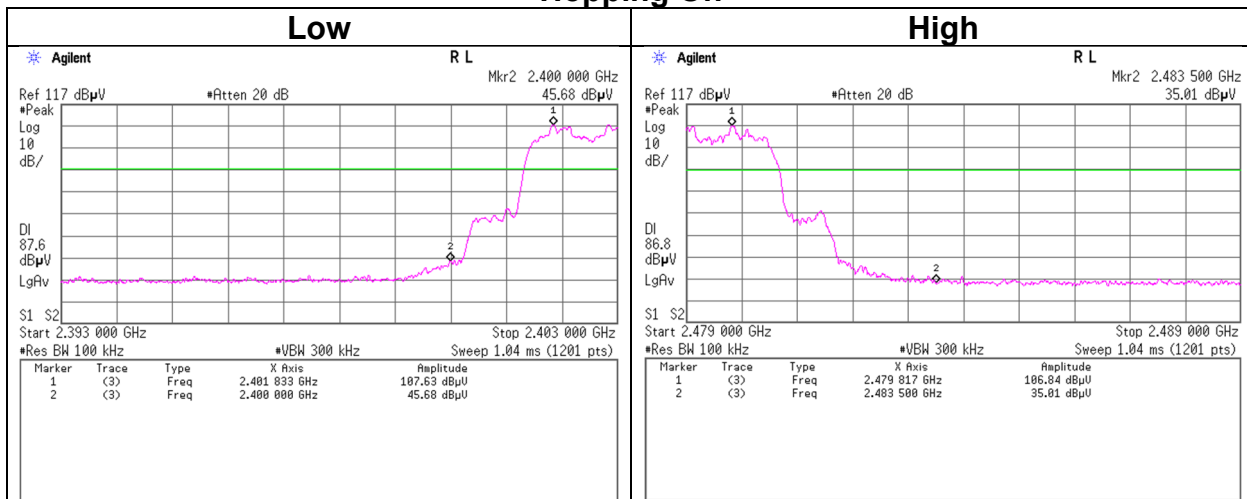

#### Hopping Off

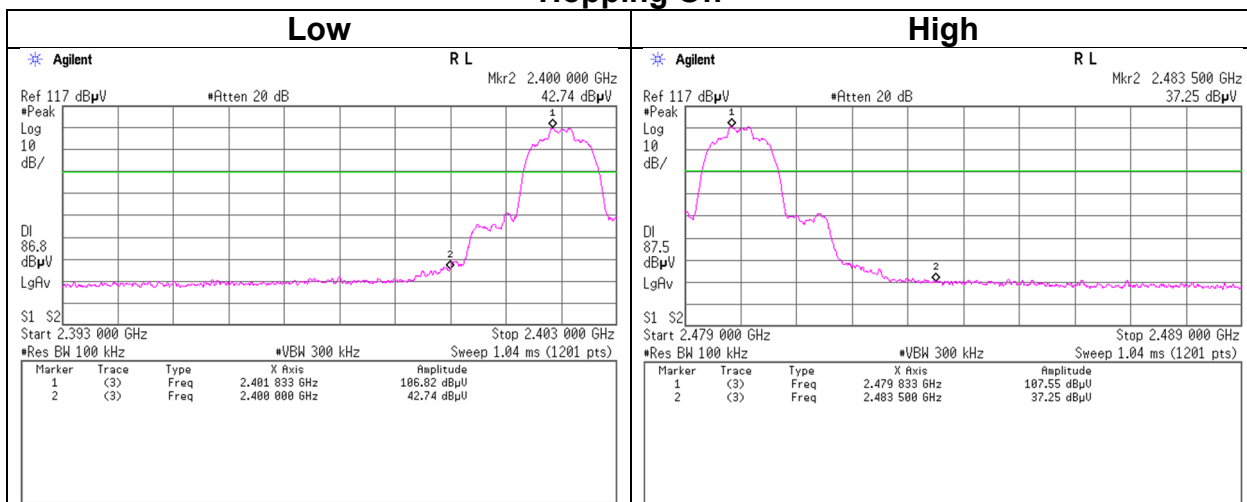

## APPENDIX 2: Test Instruments

### Test Equipment

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	143643	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY52490024	2023/06/21	12
AT	143023	10dB Fixed Atten.	Weinschel - API Technologies Corp	54A-10	56251	2023/05/25	12
AT	143110	Micro Wave Cable	Suhner	SUCOFLEX102	MY3773/2	2023/05/25	12
AT	143588	Peak Power Analyzer	Keysight Technologies Inc	8990B	MY51000276	2023/06/20	12
AT	143606	Power Sensor	Keysight Technologies Inc	N1923A	MY54070024	2023/06/20	12
AT	143733	Terminator	Weinschel - API Technologies Corp	M1459A	54704	2023/05/25	12
AT	222747	Measure	SHINWA RULES CO., LTD.	80862	none	-	-
AT	144210	Digital Multimeter	Fluke Corporation	112	89790193	2023/10/24	12
AT	200034	Temperature & Humidity Logger	HIOKI E.E. CORPORATION	LR5001/LR9504	200636456/200699552	2023/07/18	12
AT	143133	Barometer	Sanoh Co., Ltd	SBR-151	001439	2023/03/10	36
RE	143121	LOGBICON	Schwarzbeck Mess-Elektronik OHG	VULB 9168	343	2024/04/22	12
RE	178806	5dB Fixed Atten.	Pasternack Enterprises	PE7047-5	none	2024/04/17	12
RE	143165	10 Site RE 3m System	UL Japan	none	none	2023/08/01	12
RE	183880	Pre-Amplifier	UL Japan	ZKL-2	001	2024/04/22	12
RE	144199	Test Receiver	Keysight Technologies Inc	N9038A	MY53290016	2023/07/05	12
RE	144632	Semi Anechoic Chamber	TDK	NSA (No.10)	10	2023/05/08	12
RE	143455	Double Ridged Wave Guide	ETS-Lindgren (Cedar Park, Texas)	3115	00204569	2024/02/09	12
RE	142940	Pre-Amplifier	Micro Wave Factory	MPR-1G26.5-35	161399	2023/06/08	12
RE	143140	Micro Wave Cable	Junkosha	MWX221	1407S222	2023/11/17	12
RE	192243	Microwave Cable	Huber+Suhner	SF104/11N/11PC35/8000MM	808995/4	2024/01/19	12
RE	235556	10dB Fixed Attenuator	Weinschel Associates	WA54-10-1314	0H3E9	2023/06/13	12
RE	143442	HPF	Micro-Tronics	HPM50111-02	009	2023/05/24	12
RE	144633	Semi Anechoic Chamber	TDK	SVSWR (No.10)	10	2023/05/08	12
RE	143438	Double Ridged Horn	ETS-Lindgren (Cedar Park, Texas)	3160-09	00166043	2023/06/19	12
RE	142937	Pre-Amplifier	TOYO	HAP18-26W	00000035	2023/06/19	12
RE	142992	Micro Wave Cable	Suhner	SUCOFLEX102	MY010/2A	2023/06/04	12
RE	143642	Spectrum Analyzer	Keysight Technologies Inc	N9030A	MY53310670 Version A.13.12	2023/05/23	12
RE	222745	Measure	SHINWA RULES CO., LTD.	80862	none	-	-
RE	143542	Temperature & Humidity Indicator	HIOKI E.E. CORPORATION	3641/9680-50	090999895/090905406	2023/06/27	12
RE	143133	Barometer	Sanoh Co., Ltd	SBR-151	001439	2023/03/10	36
RE	144216	Digital Multimeter	Fluke Corporation	115	994460954	2023/10/24	12
RE	178804	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,ME,PE)	Ver 3.1.0546	-	-

\*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

AT: Antenna Terminal Conducted test

RE: Radiated Emission