





# RADIO TEST REPORT

## Test Report No. 15263779M-A

Customer	Sony Group Corporation
Description of EUT	Wireless Noise Canceling Stereo Headset
Model Number of EUT	YY2975
FCC ID	AK8YY2975
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied
Issue Date	May 29, 2024
Remarks	Bluetooth Low Energy part(s)

<b>Representative Test Engineer</b>	<b>Approved By</b>
	
Hiromitsu Tanabe Engineer	Kazuhiro Ando Engineer
	 
CERTIFICATE 1266.01	
<input type="checkbox"/> The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.	
<input checked="" type="checkbox"/> There is no testing item of "Non-accreditation".	

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

---

## **ANNOUNCEMENT**

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.  
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Kashima EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

## **REVISION HISTORY**

**Original Test Report No.: 15263779M-A**

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	15263779M-A	May 29, 2024	-

**Reference: Abbreviations (Including words undescribed in this report)**

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

---

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer Information .....</b>	<b>5</b>
<b>SECTION 2: Equipment Under Test (EUT).....</b>	<b>5</b>
<b>SECTION 3: Test Specification, Procedures &amp; Results .....</b>	<b>6</b>
<b>SECTION 4: Operation of EUT during testing .....</b>	<b>9</b>
<b>SECTION 5: Radiated Spurious Emission.....</b>	<b>11</b>
<b>SECTION 6: Antenna Terminal Conducted Tests .....</b>	<b>13</b>
<b>APPENDIX 1: Test Data .....</b>	<b>14</b>
99 % Occupied Bandwidth and 6 dB Bandwidth.....	14
Maximum Peak Output Power .....	17
Average Output Power.....	18
Radiated Spurious Emission.....	20
Conducted Spurious Emission.....	42
Power Density .....	48
<b>APPENDIX 2: Test Instruments .....</b>	<b>50</b>
<b>APPENDIX 3: Photographs of Test Setup .....</b>	<b>51</b>
Radiated Spurious Emission.....	51
Worst Case Position .....	53
Antenna Terminal Conducted Tests .....	54

## **SECTION 1: Customer Information**

Company Name	Sony Group Corporation
Address	1-7-1 Konan Minato-ku Tokyo 108-0075 Japan
Contact Person	Kouhei Nagamine

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

## **SECTION 2: Equipment Under Test (EUT)**

### **2.1 Identification of EUT**

Description	Wireless Noise Canceling Stereo Headset
Model Number	YY2975
Serial Number	Refer to SECTION 4.2
Condition	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	April 17, 2024
Test Date	April 18, 2024 to May 8, 2024

### **2.2 Product Description**

#### **General Specification**

Rating	DC 3.85 V (Battery)
Operating temperature	0 deg. C to 40 deg. C

#### **Radio Specification**

This report contains data provided by the customer which can impact the validity of results. UL Japan, Inc. is only responsible for the validity of results after the integration of the data provided by the customer. The data provided by the customer is marked "a)" in the table below.

#### **Bluetooth (BR / EDR / Low Energy)**

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	BT: FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK) BT LE: GFSK
Antenna Gain <sup>a)</sup>	-4.4 dBi

## SECTION 3: Test Specification, Procedures & Results

### 3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

\*The customer has declared that the EUT has complies with FCC Part 15 Subpart B as SDoC.

### 3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ISED: RSS-Gen 8.8	-	N/A	*1)
6dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(a)(2) ISED: RSS-247 5.2(a)	See data.	Complied	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section 15.247(b)(3) ISED: RSS-247 5.4(d)		Complied	Conducted
Power Density	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section 15.247(e) ISED: RSS-247 5.2(b)		Complied	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section 15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	9.4 dB 2483.5 MHz, Tx BT LE 2M-PHY, 2478 MHz, Right, AV, Horizontal	Complied	Conducted (below 30 MHz)/ Radiated (above 30 MHz) *2)
<p>Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.</p> <p>*1) The test was not applicable since the BT LE does not operate during charging. *2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6.</p>					

#### **FCC Part 15.31 (e)**

This EUT provides the stable voltage constantly to RF Module regardless of input voltage.  
Therefore, this EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT.  
Therefore, the equipment complies with the antenna requirement of Section 15.203.

### 3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement. Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k = 2$ .

#### Conducted emission

Frequency range	Uncertainty (+/-)
0.15 MHz to 30 MHz	3.3 dB

#### Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.2 dB
	30 MHz to 200 MHz	6.2 dB
	200 MHz to 1000 MHz	6.3 dB
	1 GHz to 6 GHz	4.7 dB
	6 GHz to 18 GHz	5.1 dB
	18 GHz to 40 GHz	5.5 dB
1 m	1 GHz to 18 GHz	5.2 dB
	18 GHz to 40 GHz	5.6 dB
0.5 m	26.5 GHz to 40 GHz	5.8 dB

#### Antenna Terminal test

Test Item	Uncertainty (+/-)
6 dB Bandwidth / 99 % Occupied Bandwidth	1.2 %
Maximum Output Power	0.58 dB
Burst Rate	0.20 %
Power Density	2.0 dB
Conducted Spurious Emission (9 kHz to 30 MHz)	2.2 dB

### 3.5 Test Location

UL Japan, Inc. Kashima EMC Lab.

1614 Mushihata, Katori-shi, Chiba-ken, 289-0341 Japan

Telephone: +81-478-88-6500

A2LA Certificate Number: 1266.01 / FCC Test Firm Registration Number: 910230

ISED Lab Company Number: 4659A / CAB identifier: JP0006

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Open site	6.0 x 5.5 x 2.5	20 x 40	10 m
No.5 Open site	8.6 x 7.1 x 2.4	18 x 23	10 m
No.1 Shielded room	5.4 x 4.5 x 2.3	-	-
No.5 Shielded Room	4.2 x 3.1 x 2.5	-	-
No.9 Shielded Room	6.1 x 3.6 x 2.8	-	-
No.6 Semi-anechoic Chamber	8.5 x 5.5 x 5.2	-	3 m
No.10 Semi-anechoic Chamber	18.4 x 9.9 x 7.7	-	10 m
No.11 Semi-anechoic Chamber	9.0 x 6.5 x 5.2	-	3 m
No.1 Measurement room	5.0 x 3.7 x 2.6	-	-
No.2 Measurement room	4.3 x 4.4 x 2.7	-	-

### 3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.



## SECTION 4: Operation of EUT during testing

### 4.1 Operating Mode(s)


Mode	Remarks*
Bluetooth Low Energy (BT LE)	1M-PHY Uncoded PHY (1M-PHY), Maximum Packet Size, PRBS9
Bluetooth Low Energy (BT LE)	2M-PHY Uncoded PHY (2M-PHY), Maximum Packet Size, PRBS9
<p>*Power of the EUT was set by the software as follows;            Power Setting: 49            Software: Earbuds RF Test Version: 1.05            (Date: 2024.04 17, Storage location: Driven by connected PC)</p> <p>*This setting of software is the worst case.            Any conditions under the normal use do not exceed the condition of setting.            In addition, end users cannot change the settings of the output power of the product.</p>	

\*The Details of Operating Mode(s)


Test Item	Operating Mode	Tested Frequency
Radiated Spurious Emission (Below 1 GHz)	Tx BT LE, 1M-PHY *1)	2440 MHz
Radiated Spurious Emission (Above 1 GHz), Maximum Peak Output Power, Power Density, 6dB Bandwidth, 99% Occupied Bandwidth, Conducted Spurious Emission	Tx BT LE, 1M-PHY	2402 MHz 2440 MHz 2480 MHz
	Tx BT LE, 2M-PHY	2404 MHz 2440 MHz 2478 MHz
<p>*1) Spurious emissions for frequencies below 1 GHz were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.</p>		

## 4.2 Configuration and Peripherals

[Antenna Terminal Conducted tests]

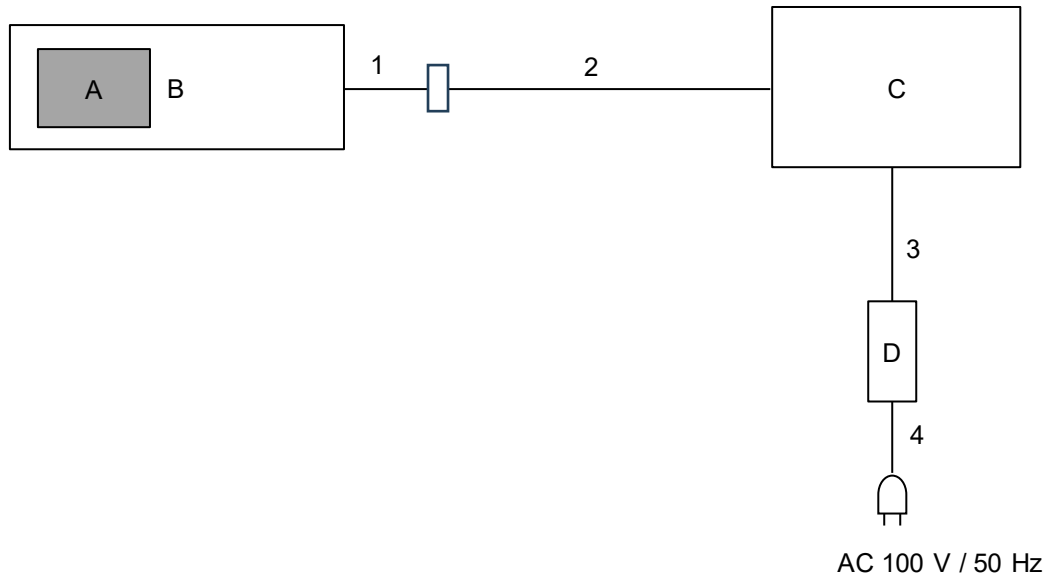

[Radiated Emission test]



\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

### Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Wireless Noise Canceling Stereo Headset	YY2975	1201080 *1)	Sony	EUT (Left)
A'	Wireless Noise Canceling Stereo Headset	YY2975	1201110 *2)	Sony	EUT (Left/Right)
B	Case	YY2975	1201080	Sony	-
C	Laptop PC	HP ProBook 430 G3	JPA616H5RW	hp	-
D	AC Adapter	HSTNN-CA41	WDVTN0CGC9XKS0 0C	hp	-

\*1) Used for Antenna Terminal conducted test

\*2) Used for Radiated Emission test

### List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB Cable	0.2	Shielded	Shielded	-
2	USB Cable	3.0	Shielded	Shielded	-
3	DC Cable	1.7	Unshielded	Unshielded	-
4	AC Cable	1.0	Unshielded	Unshielded	-

## **SECTION 5: Radiated Spurious Emission**

### **Test Procedure**

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

### **Test Antennas are used as below;**

Frequency	30 MHz to 1 GHz	Above 1 GHz
Antenna Type	Hybrid	Horn


In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

### **20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).**

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument Used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	11.12.2.5.1 RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces 11.12.2.5.2 The duty cycle was less than 98% for detected noise, a duty factor was added to the 11.12.2.5.1 results.	RBW: 100 kHz VBW: 300 kHz

**Figure 2: Test Setup**


Below 1 GHz

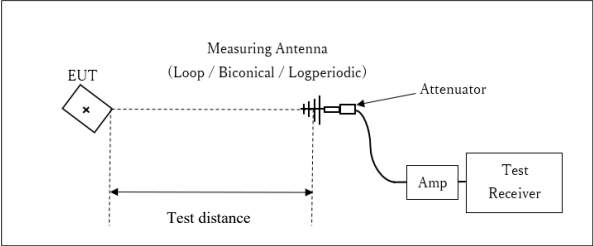

x : Center of turn table

Test Distance: 3 m

1 GHz to 10 GHz

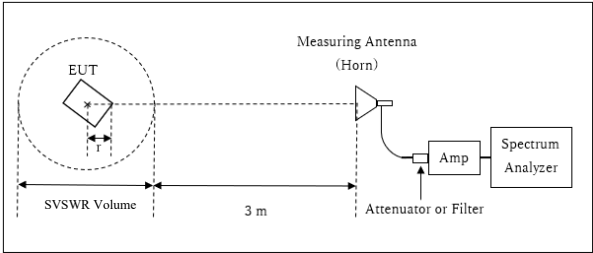


r : Radius of an outer periphery of EUT  
 x : Center of turn table

Distance Factor:  $20 \times \log(4.49 \text{ m} / 3.0 \text{ m}) = 3.50 \text{ dB}$   
 \* Test Distance:  $(3 + \text{SVSWR Volume} / 2) - r = 4.49 \text{ m}$

SVSWR Volume : 3.0 m  
 (SVSWR Volume has been calibrated based on CISPR 16-1-4.)  
 $r = 0.01 \text{ m}$

10 GHz to 26.5 GHz

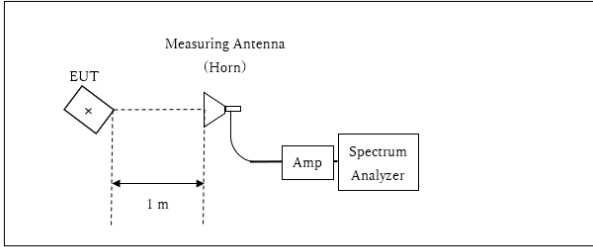

x : Center of turn table

Distance Factor:  $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$   
 \*Test Distance: 1 m

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

		Below 30 MHz	1 to 2.8 GHz	2.8 to 10 GHz	10 to 18 GHz	18 to 26.5 GHz
EUT (Left)	Horizontal	Y	Y	Y	Y	Y
	Vertical	Z	Z	Z	Z	Z
EUT(Right)	Horizontal	Y	Y	Y	Y	Y
	Vertical	Z	Z	Z	Z	Z

Test results are rounded off and limit are rounded down, so some differences might be observed.

**Measurement Range** : 30 MHz to 26.5 GHz  
**Test Data** : APPENDIX  
**Test Result** : Pass

## SECTION 6: Antenna Terminal Conducted Tests

### Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
6dB Bandwidth	Enough width to display emission skirts	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 160 MHz BW)
Peak Power Density	1.5 times the 6dB Bandwidth	3 kHz	9.1 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4) *5)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				

\*1) Peak hold was applied as Worst-case measurement.

\*2) Reference data

\*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".

\*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.  
(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz)

\*5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to  $45.5 - 51.5 = -6.0$  dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

Test results are rounded off and limit are rounded down, so some differences might be observed.  
The equipment and cables were not used for factor 0 dB of the data sheets.

**Test Data** : APPENDIX  
**Test Result** : Pass

**APPENDIX 1: Test Data**


**99 % Occupied Bandwidth and 6 dB Bandwidth**

Test place                      Kashima EMC Lab. No.2 Measurement Room  
Date                              April 19, 2024                      April 24, 2024  
Temperature / Humidity      21 deg. C / 49 % RH              22 deg. C / 50 % RH  
Engineer                        Hiromitsu Tanabe                  Hiromitsu Tanabe  
Mode                              Tx BT LE

Mode	Frequency [MHz]	99% Occupied Bandwidth [kHz]	6dB Bandwidth [MHz]	Limit for 6dB Bandwidth [MHz]
1M-PHY	2402	<b>1037.7</b>	0.672	> 0.5000
	2440	1037.1	0.668	> 0.5000
	2480	1037.0	0.671	> 0.5000
2M-PHY	2404	2072.7	1.254	> 0.5000
	2440	2075.0	1.252	> 0.5000
	2478	<b>2077.5</b>	1.251	> 0.5000


**99 % Occupied Bandwidth and 6 dB Bandwidth**

**1M-PHY**

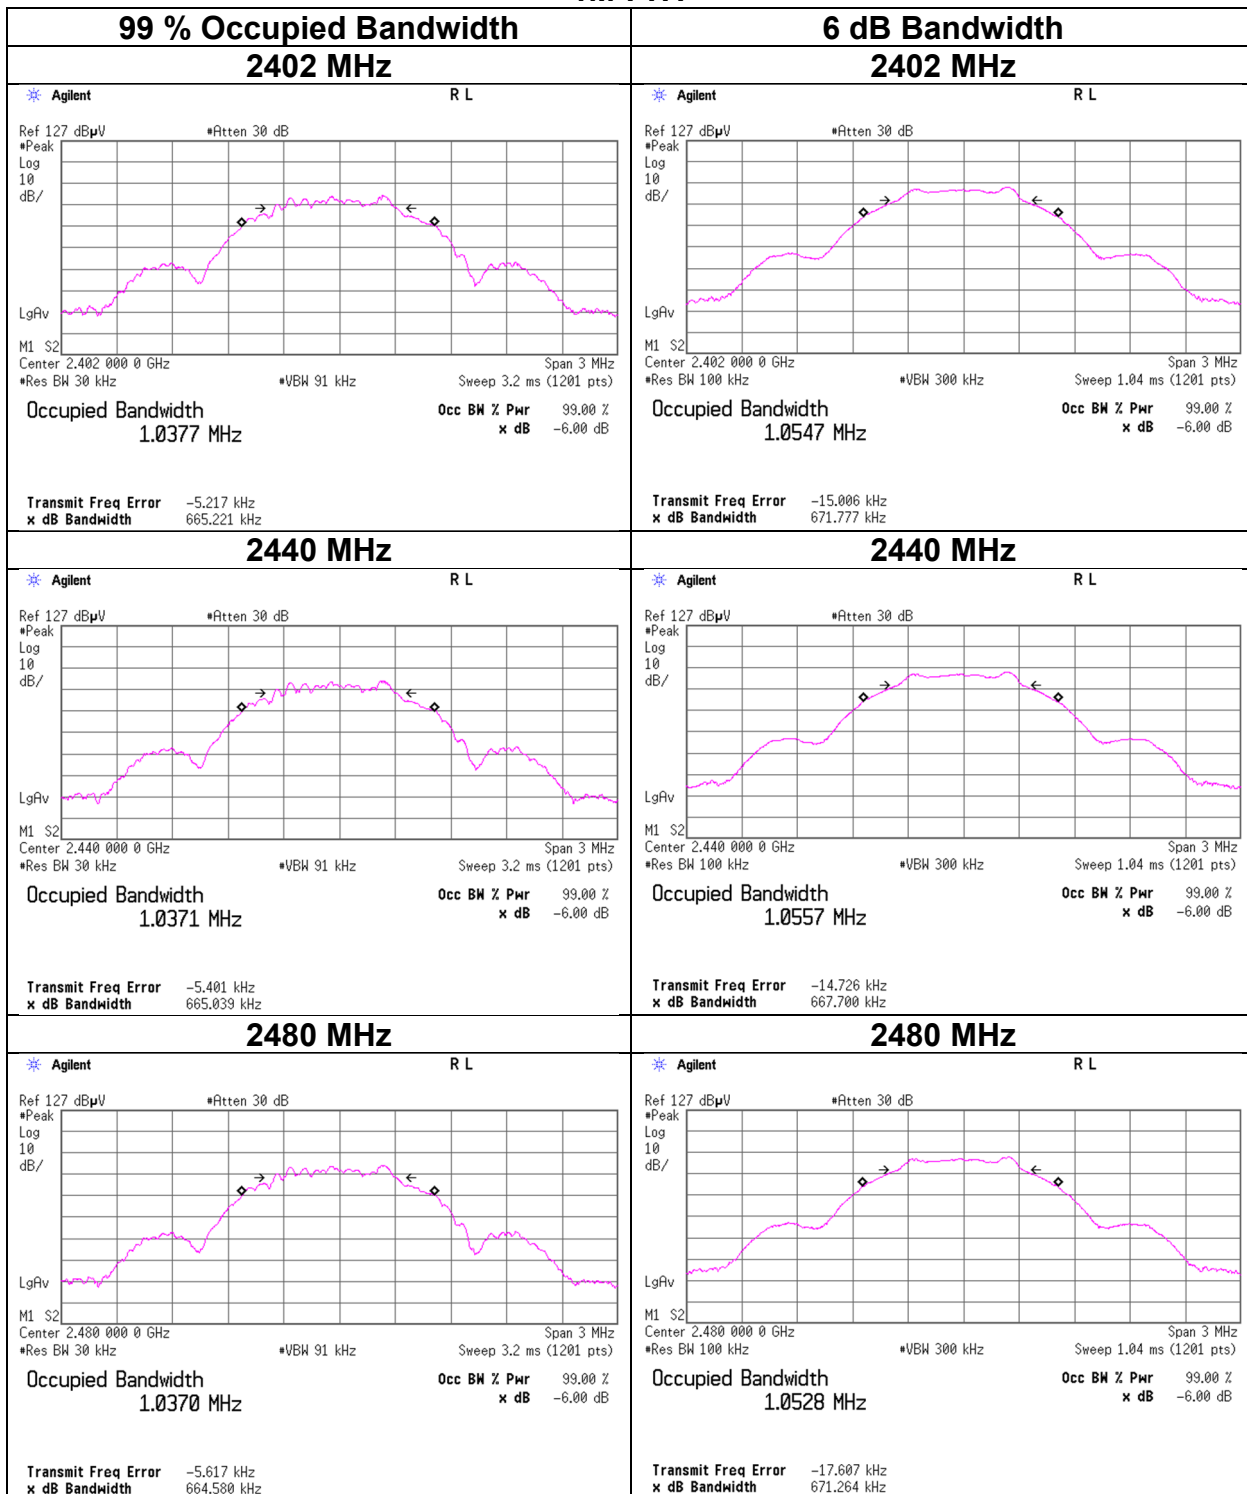

**99 % Occupied Bandwidth and 6 dB Bandwidth**

**2M-PHY**

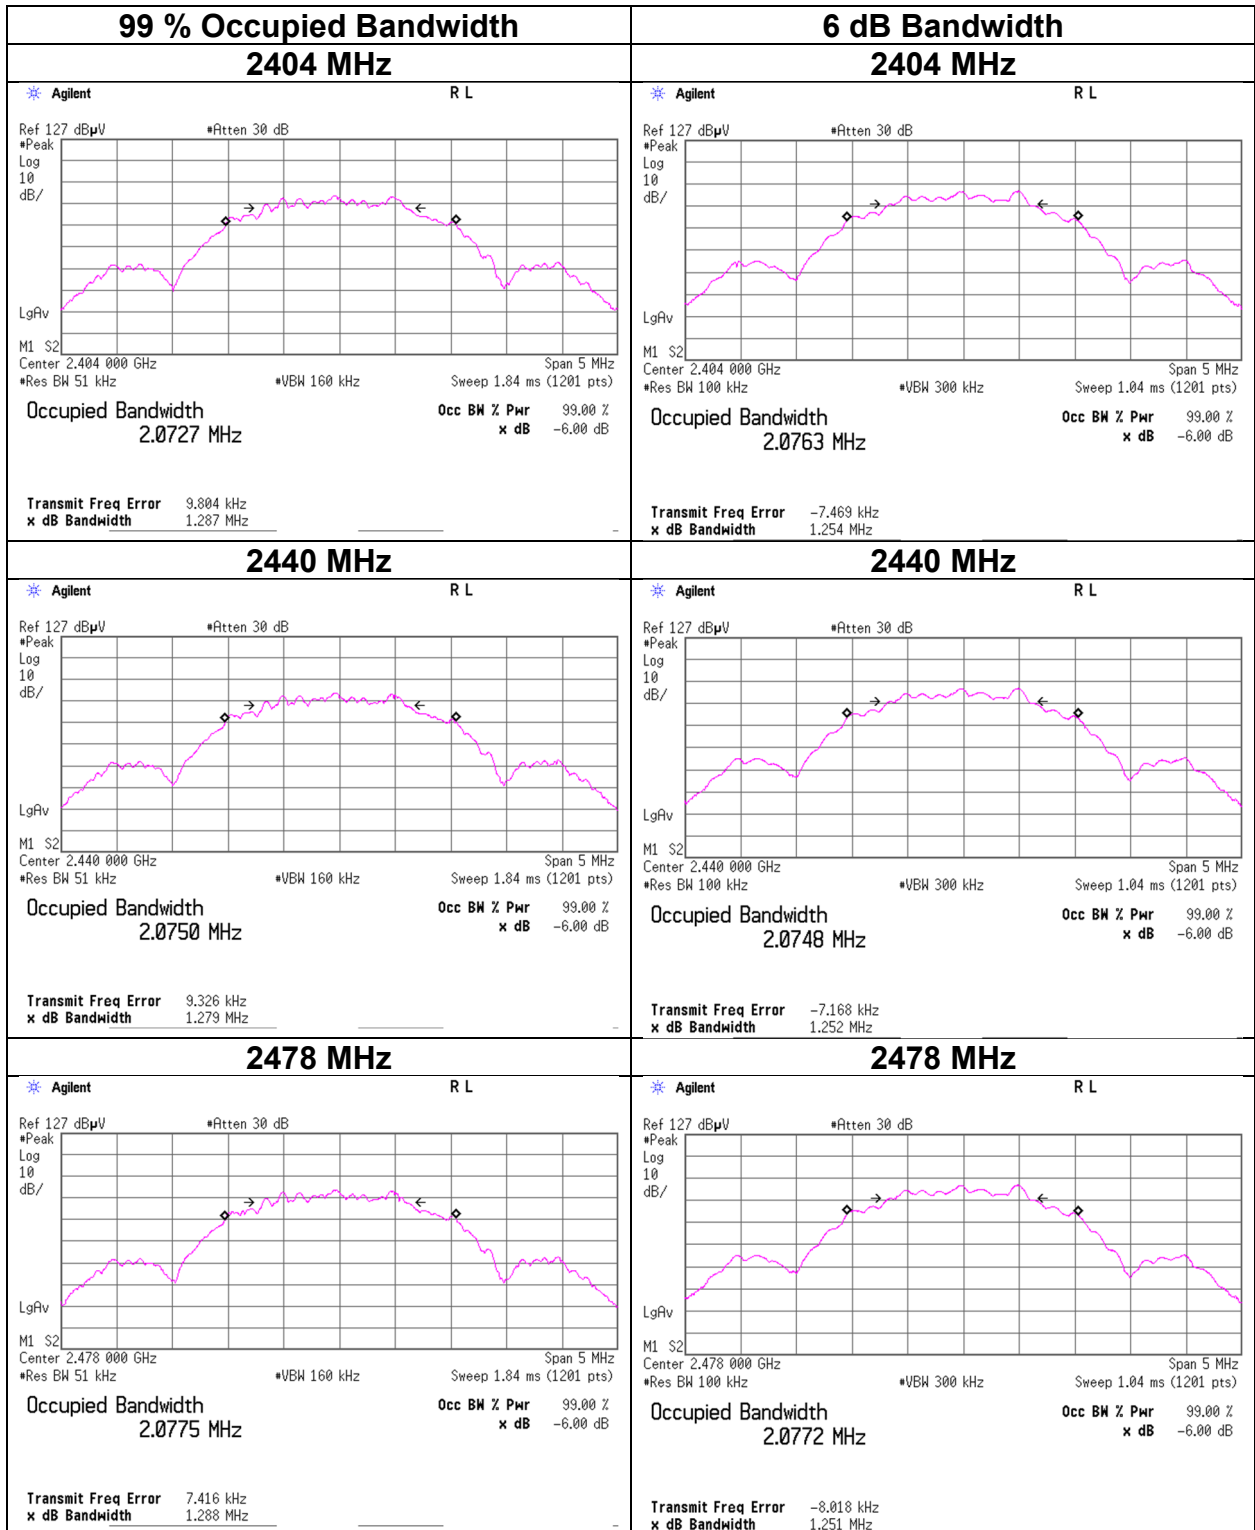



## Maximum Peak Output Power

Test place	Kashima EMC Lab. No.2 Measurement Room	
Date	April 18, 2024	April 24, 2024
Temperature / Humidity	22 deg. C / 52 % RH	22 deg. C / 50 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	Tx BT LE	

1M-PHY				Conducted Power					e.i.r.p. for RSS-247					
Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2402	-1.96	3.12	10.05	11.21	13.21	30.00	1000	18.79	-4.40	6.81	4.80	36.02	4000	29.21
2440	-1.93	3.13	10.05	<b>11.25</b>	<b>13.34</b>	30.00	1000	18.75	-4.40	<b>6.85</b>	<b>4.84</b>	36.02	4000	29.17
2480	-1.96	3.14	10.05	11.23	13.27	30.00	1000	18.77	-4.40	6.83	4.82	36.02	4000	29.19

2M-PHY				Conducted Power					e.i.r.p. for RSS-247					
Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
2404	-2.13	3.12	10.05	11.04	12.71	30.00	1000	18.96	-4.40	6.64	4.61	36.02	4000	29.38
2440	-2.13	3.13	10.05	11.05	12.74	30.00	1000	18.95	-4.40	6.65	4.62	36.02	4000	29.37
2478	-2.08	3.14	10.05	<b>11.11</b>	12.91	30.00	1000	18.89	-4.40	<b>6.71</b>	<b>4.69</b>	36.02	4000	29.31

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss  
e.i.r.p. Result = Conducted Power Result + Antenna Gain

**Average Output Power**  
**(Reference data for RF Exposure)**

Test place	Kashima EMC Lab. No.2 Measurement Room	
Date	April 18, 2024	April 24, 2024
Temperature / Humidity	22 deg. C / 52 % RH	22 deg. C / 50 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	Tx BT LE	

1M-PHY

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2402	-2.90	3.12	10.05	10.27	10.64	0.70	10.97	12.50
2440	-2.86	3.13	10.05	<b>10.32</b>	<b>10.76</b>	0.70	<b>11.02</b>	<b>12.65</b>
2480	-2.92	3.14	10.05	10.27	10.64	0.70	10.97	12.50

2M-PHY

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2404	-4.85	3.12	10.05	8.32	6.79	2.43	10.75	11.89
2440	-4.80	3.13	10.05	8.38	6.89	2.43	10.81	12.05
2478	-4.79	3.14	10.05	<b>8.40</b>	<b>6.92</b>	2.43	<b>10.83</b>	<b>12.11</b>

Sample Calculation:


Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss  
 Result (Burst power average) = Time average + Duty factor

**Burst rate confirmation**

Test place                      Kashima EMC Lab. No.2 Measurement Room  
 Date                              April 18, 2024  
 Temperature / Humidity      22 deg. C / 52 % RH  
 Engineer                        Hiromitsu Tanabe  
 Mode                              Tx BT LE

**1M-PHY**

**2M-PHY**

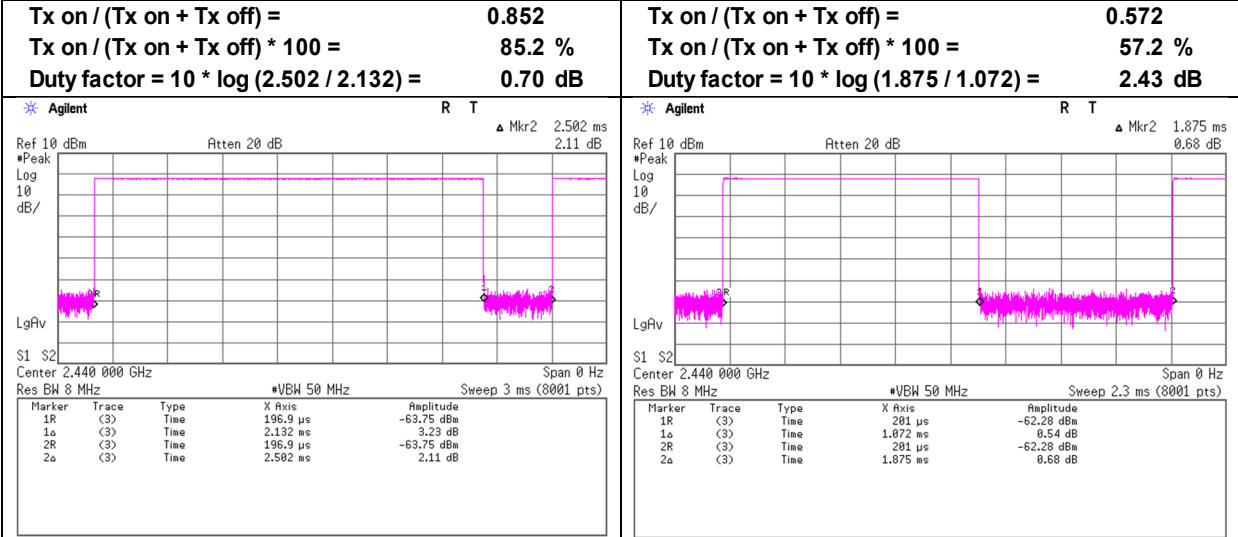

\* Since the burst rate is not different between the channels, the data has been obtained on the representative channel.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx BT LE 1M-PHY 2402 MHz, Left			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	49.41	27.60	13.01	43.66	3.50	49.86	73.9	24.0	256	179	
Hori.	4804.000	PK	50.54	32.53	5.41	45.10	3.50	46.88	73.9	27.0	150	0	Floor noise
Hori.	7206.000	PK	49.00	37.14	6.66	43.99	3.50	52.31	73.9	21.5	150	0	Floor noise
Hori.	9608.000	PK	47.70	38.01	7.46	41.93	3.50	54.74	73.9	19.1	150	0	Floor noise
Hori.	4804.000	AV	41.21	32.53	5.41	45.10	3.50	37.55	53.9	16.3	150	0	Floor noise
Hori.	7206.000	AV	39.74	37.14	6.66	43.99	3.50	43.05	53.9	10.8	150	0	Floor noise
Hori.	9608.000	AV	37.79	38.01	7.46	41.93	3.50	44.83	53.9	9.0	150	0	Floor noise
Vert.	2390.000	PK	49.51	27.60	13.01	43.66	3.50	49.96	73.9	23.9	102	175	
Vert.	4804.000	PK	50.70	32.53	5.41	45.10	3.50	47.04	73.9	26.8	150	0	Floor noise
Vert.	7206.000	PK	49.64	37.14	6.66	43.99	3.50	52.95	73.9	20.9	150	0	Floor noise
Vert.	9608.000	PK	47.09	38.01	7.46	41.93	3.50	54.13	73.9	19.7	150	0	Floor noise
Vert.	4804.000	AV	41.33	32.53	5.41	45.10	3.50	37.67	53.9	16.2	150	0	Floor noise
Vert.	7206.000	AV	39.91	37.14	6.66	43.99	3.50	43.22	53.9	10.6	150	0	Floor noise
Vert.	9608.000	AV	37.70	38.01	7.46	41.93	3.50	44.74	53.9	9.1	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	AV	40.46	27.60	13.01	43.66	0.70	3.50	41.61	53.9	12.2	*1)
Vert.	2390.000	AV	40.50	27.60	13.01	43.66	0.70	3.50	41.65	53.9	12.2	*1)

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Burst rate confirmation" sheet.

\*1) Not out of band emission (Leakage Power)

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)



Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	94.78	27.60	13.02	43.65	3.50	95.25	-	-	Carrier
Hori.	2400.000	PK	41.52	27.60	13.02	43.65	3.50	41.99	75.3	33.2	Carrier
Vert.	2402.000	PK	94.41	27.60	13.02	43.65	3.50	94.88	-	-	Carrier
Vert.	2400.000	PK	41.16	27.60	13.02	43.65	3.50	41.63	74.9	33.2	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

**Radiated Spurious Emission  
 (Reference Plot for band-edge)**

Test place	Kashima EMC Lab.
Semi Anechoic Chamber	No.10
Date	April 23, 2024
Temperature / Humidity	20 deg. C / 59 % RH
Engineer	Hiromitsu Tanabe
	(1 GHz to 2.8 GHz)
Mode	Tx BT LE 1M-PHY 2402 MHz, Left

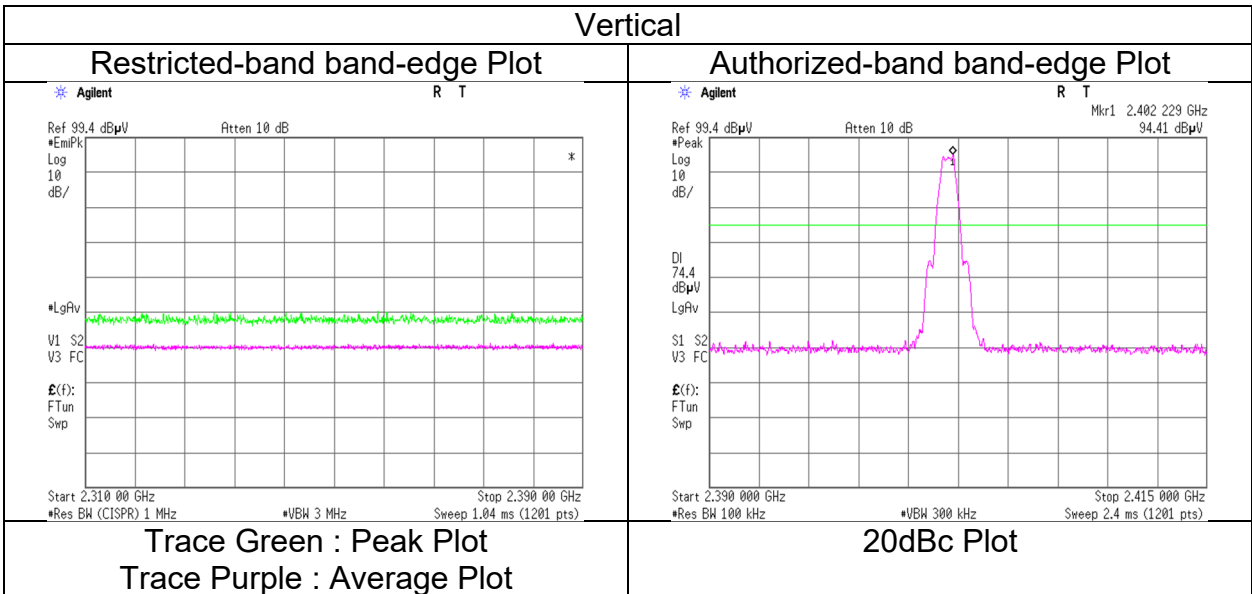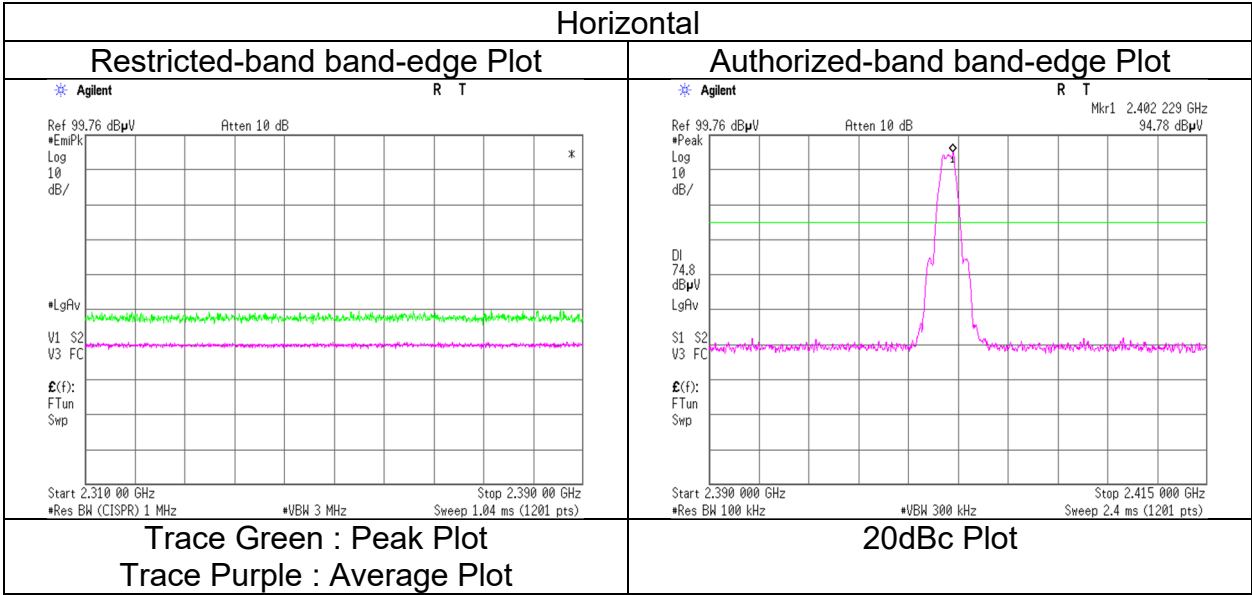

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
 Final result of restricted band edge and authorized band edge were shown in tabular data.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.				
Semi Anechoic Chamber	No.10	No.10	No.10	No.10	No.10
Date	May 7, 2024	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	25 deg. C / 55 % RH	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(30 MHz to 1 GHz) Tx BT LE 1M-PHY 2440 MHz, Left	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	64.000	QP	30.17	12.60	6.23	31.21	0.00	17.79	40.0	22.2	100	0	
Hori.	103.760	QP	28.34	9.53	6.66	31.12	0.00	13.41	43.5	30.0	100	0	
Hori.	155.630	QP	27.14	13.41	7.13	31.04	0.00	16.64	43.5	26.8	100	0	
Hori.	4880.000	PK	50.74	32.55	5.46	45.15	3.50	47.10	73.9	26.8	150	0	Floor noise
Hori.	7320.000	PK	48.27	37.38	6.69	43.72	3.50	52.12	73.9	21.7	150	0	Floor noise
Hori.	9760.000	PK	47.70	37.91	7.51	41.76	3.50	54.86	73.9	19.0	150	0	Floor noise
Hori.	4880.000	AV	41.25	32.55	5.46	45.15	3.50	37.61	53.9	16.2	150	0	Floor noise
Hori.	7320.000	AV	39.82	37.38	6.69	43.72	3.50	43.67	53.9	10.2	150	0	Floor noise
Hori.	9760.000	AV	38.05	37.91	7.51	41.76	3.50	45.21	53.9	8.6	150	0	Floor noise
Vert.	64.000	QP	30.05	12.60	6.23	31.21	0.00	17.67	40.0	22.3	100	0	
Vert.	103.760	QP	28.31	9.53	6.66	31.12	0.00	13.38	43.5	30.1	100	0	
Vert.	155.630	QP	27.08	13.41	7.13	31.04	0.00	16.58	43.5	26.9	100	0	
Vert.	4880.000	PK	50.34	32.55	5.46	45.15	3.50	46.70	73.9	27.2	150	0	Floor noise
Vert.	7320.000	PK	48.46	37.38	6.69	43.72	3.50	52.31	73.9	21.5	150	0	Floor noise
Vert.	9760.000	PK	48.02	37.91	7.51	41.76	3.50	55.18	73.9	18.7	150	0	Floor noise
Vert.	4880.000	AV	41.34	32.55	5.46	45.15	3.50	37.70	53.9	16.2	150	0	Floor noise
Vert.	7320.000	AV	39.50	37.38	6.69	43.72	3.50	43.35	53.9	10.5	150	0	Floor noise
Vert.	9760.000	AV	37.91	37.91	7.51	41.76	3.50	45.07	53.9	8.8	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz :  $20\log(4.49\text{ m} / 3.0\text{ m}) = 3.50\text{ dB}$

10 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz) Tx BT LE 1M-PHY 2480 MHz, Left	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	50.29	27.86	13.07	43.62	3.50	51.10	73.9	22.8	390	167	
Hori.	4960.000	PK	50.13	32.64	5.51	45.20	3.50	46.58	73.9	27.3	150	0	Floor noise
Hori.	7440.000	PK	48.90	37.41	6.73	43.45	3.50	53.09	73.9	20.8	150	0	Floor noise
Hori.	9920.000	PK	46.79	38.11	7.61	41.76	3.50	54.25	73.9	19.6	150	0	Floor noise
Hori.	4960.000	AV	41.31	32.64	5.51	45.20	3.50	37.76	53.9	16.1	150	0	Floor noise
Hori.	7440.000	AV	39.74	37.41	6.73	43.45	3.50	43.93	53.9	9.9	150	0	Floor noise
Hori.	9920.000	AV	38.18	38.11	7.61	41.76	3.50	45.64	53.9	8.2	150	0	Floor noise
Vert.	2483.500	PK	51.20	27.86	13.07	43.62	3.50	52.01	73.9	21.8	100	131	
Vert.	4960.000	PK	50.60	32.64	5.51	45.20	3.50	47.05	73.9	26.8	150	0	Floor noise
Vert.	7440.000	PK	48.25	37.41	6.73	43.45	3.50	52.44	73.9	21.4	150	0	Floor noise
Vert.	9920.000	PK	47.33	38.11	7.61	41.76	3.50	54.79	73.9	19.1	150	0	Floor noise
Vert.	4960.000	AV	41.20	32.64	5.51	45.20	3.50	37.65	53.9	16.2	150	0	Floor noise
Vert.	7440.000	AV	39.52	37.41	6.73	43.45	3.50	43.71	53.9	10.1	150	0	Floor noise
Vert.	9920.000	AV	38.08	38.11	7.61	41.76	3.50	45.54	53.9	8.3	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	40.59	27.86	13.07	43.62	0.70	3.50	42.10	53.9	11.8	*1)
Vert.	2483.500	AV	40.80	27.86	13.07	43.62	0.70	3.50	42.31	53.9	11.5	*1)

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB



Duty factor refer to "Burst rate confirmation" sheet.

\*1) Not out of band emission (Leakage Power)

**Radiated Spurious Emission  
 (Reference Plot for band-edge)**

Test place  
 Semi Anechoic Chamber  
 Date  
 Temperature / Humidity  
 Engineer  
 Mode

Kashima EMC Lab.  
 No.10  
 April 23, 2024  
 20 deg. C / 59 % RH  
 Hiromitsu Tanabe  
 (1 GHz to 2.8 GHz)  
 Tx BT LE 1M-PHY 2480 MHz, Left

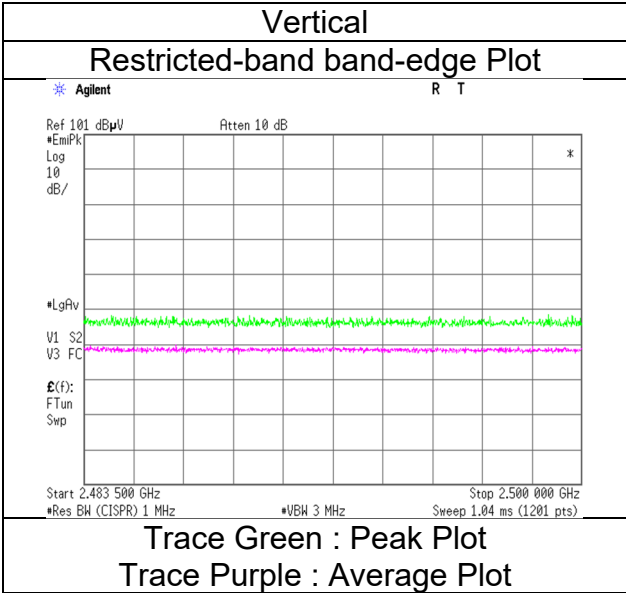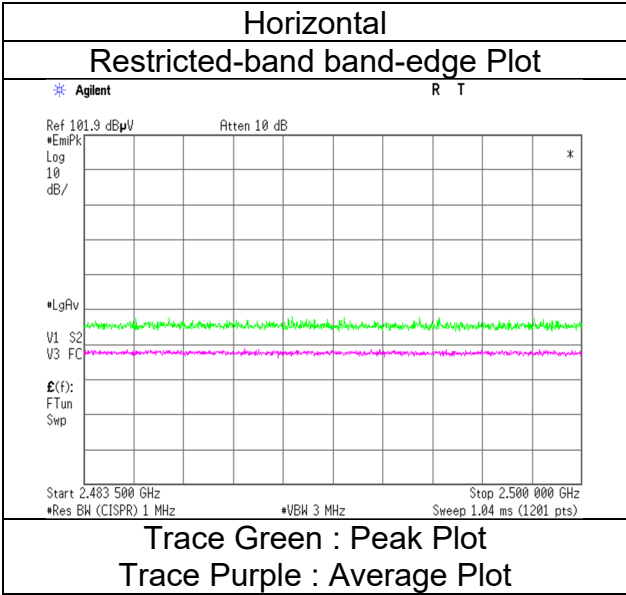

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
 Final result of restricted band edge was shown in tabular data.



## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 24, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 53 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx BT LE 2M-PHY 2404 MHz, Left			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	50.72	27.60	13.01	43.66	3.50	51.17	73.9	22.7	190	188	
Hori.	4808.000	PK	50.75	32.53	5.41	45.11	3.50	47.08	73.9	26.8	150	0	Floor noise
Hori.	7212.000	PK	48.36	37.15	6.66	43.97	3.50	51.70	73.9	22.2	150	0	Floor noise
Hori.	9616.000	PK	47.26	37.99	7.46	41.92	3.50	54.29	73.9	19.6	150	0	Floor noise
Hori.	4808.000	AV	41.70	32.53	5.41	45.11	3.50	38.03	53.9	15.8	150	0	Floor noise
Hori.	7212.000	AV	39.75	37.15	6.66	43.97	3.50	43.09	53.9	10.8	150	0	Floor noise
Hori.	9616.000	AV	37.87	37.99	7.46	41.92	3.50	44.90	53.9	9.0	150	0	Floor noise
Vert.	2390.000	PK	50.09	27.60	13.01	43.66	3.50	50.54	73.9	23.3	102	134	
Vert.	4808.000	PK	50.48	32.53	5.41	45.11	3.50	46.81	73.9	27.0	150	0	Floor noise
Vert.	7212.000	PK	49.19	37.15	6.66	43.97	3.50	52.53	73.9	21.3	150	0	Floor noise
Vert.	9616.000	PK	47.21	37.99	7.46	41.92	3.50	54.24	73.9	19.6	150	0	Floor noise
Vert.	4808.000	AV	41.54	32.53	5.41	45.11	3.50	37.87	53.9	16.0	150	0	Floor noise
Vert.	7212.000	AV	39.58	37.15	6.66	43.97	3.50	42.92	53.9	10.9	150	0	Floor noise
Vert.	9616.000	AV	37.81	37.99	7.46	41.92	3.50	44.84	53.9	9.0	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	AV	40.91	27.60	13.01	43.66	2.43	3.50	43.79	53.9	10.1	*1)
Vert.	2390.000	AV	41.30	27.60	13.01	43.66	2.43	3.50	44.18	53.9	9.7	*1)

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Burst rate confirmation" sheet.

\*1) Not out of band emission (Leakage Power)

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)



Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2404.000	PK	94.71	27.61	13.02	43.65	3.50	95.19	-	-	Carrier
Hori.	2400.000	PK	41.12	27.60	13.02	43.65	3.50	41.59	75.2	33.6	Carrier
Vert.	2404.000	PK	94.42	27.61	13.02	43.65	3.50	94.90	-	-	Carrier
Vert.	2400.000	PK	41.54	27.60	13.02	43.65	3.50	42.01	74.9	32.8	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Kashima EMC Lab.
Semi Anechoic Chamber	No.10
Date	April 24, 2024
Temperature / Humidity	20 deg. C / 53 % RH
Engineer	Hiromitsu Tanabe
	(1 GHz to 2.8 GHz)
Mode	Tx BT LE 2M-PHY 2404 MHz, Left

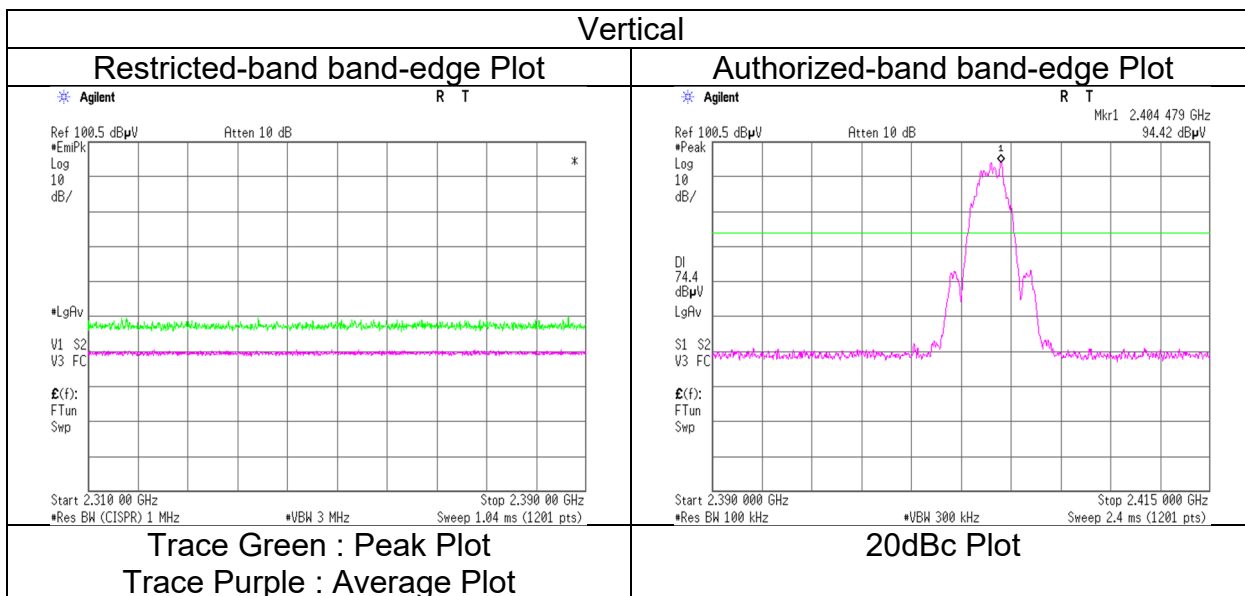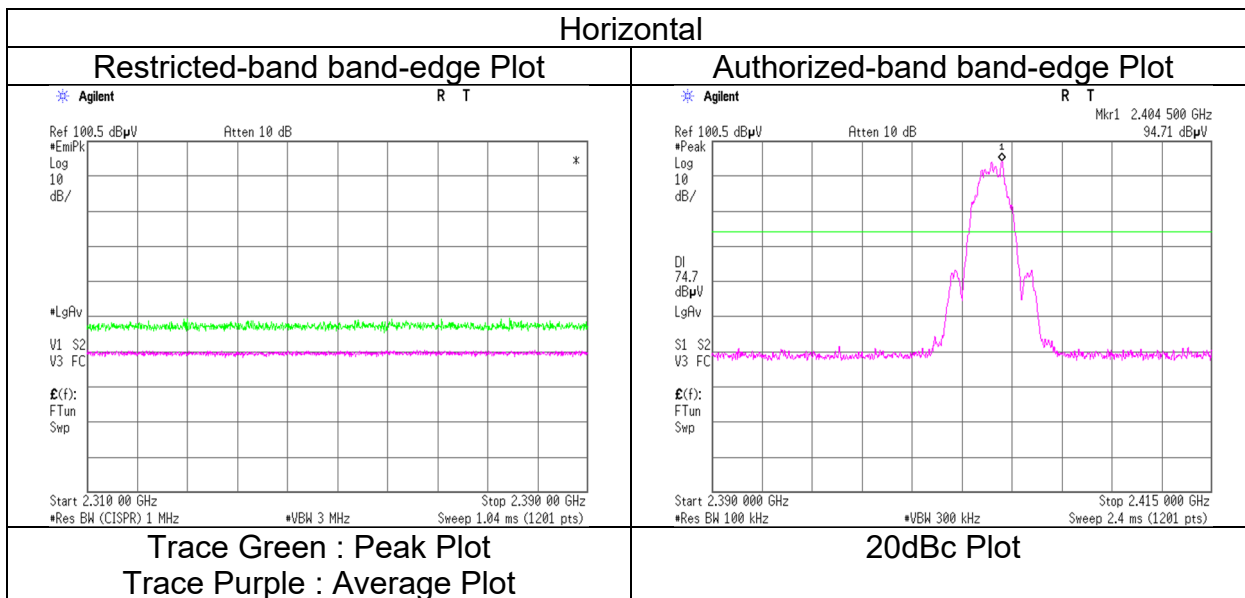

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge and authorized band edge were shown in tabular data.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx BT LE 2M-PHY 2440 MHz, Left			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4880.000	PK	51.42	32.55	5.46	45.15	3.50	47.78	73.9	26.1	150	0	Floor noise
Hori.	7320.000	PK	49.07	37.38	6.69	43.72	3.50	52.92	73.9	20.9	150	0	Floor noise
Hori.	9760.000	PK	47.68	37.91	7.51	41.76	3.50	54.84	73.9	19.0	150	0	Floor noise
Hori.	4880.000	AV	41.38	32.55	5.46	45.15	3.50	37.74	53.9	16.1	150	0	Floor noise
Hori.	7320.000	AV	39.79	37.38	6.69	43.72	3.50	43.64	53.9	10.2	150	0	Floor noise
Hori.	9760.000	AV	38.43	37.91	7.51	41.76	3.50	45.59	53.9	<b>8.3</b>	150	0	Floor noise
Vert.	4880.000	PK	50.35	32.55	5.46	45.15	3.50	46.71	73.9	27.1	150	0	Floor noise
Vert.	7320.000	PK	48.82	37.38	6.69	43.72	3.50	52.67	73.9	21.2	150	0	Floor noise
Vert.	9760.000	PK	47.12	37.91	7.51	41.76	3.50	54.28	73.9	19.6	150	0	Floor noise
Vert.	4880.000	AV	41.46	32.55	5.46	45.15	3.50	37.82	53.9	16.0	150	0	Floor noise
Vert.	7320.000	AV	39.44	37.38	6.69	43.72	3.50	43.29	53.9	10.6	150	0	Floor noise
Vert.	9760.000	AV	38.29	37.91	7.51	41.76	3.50	45.45	53.9	8.4	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 24, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 53 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz) Tx BT LE 2M-PHY 2478 MHz, Left	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	50.18	27.86	13.07	43.62	3.50	50.99	73.9	22.9	391	167	
Hori.	4956.000	PK	50.62	32.64	5.50	45.20	3.50	47.06	73.9	26.8	150	0	Floor noise
Hori.	7434.000	PK	49.30	37.42	6.72	43.46	3.50	53.48	73.9	20.4	150	0	Floor noise
Hori.	9912.000	PK	46.96	38.10	7.60	41.75	3.50	54.41	73.9	19.4	150	0	Floor noise
Hori.	4956.000	AV	41.42	32.64	5.50	45.20	3.50	37.86	53.9	16.0	150	0	Floor noise
Hori.	7434.000	AV	39.94	37.42	6.72	43.46	3.50	44.12	53.9	9.7	150	0	Floor noise
Hori.	9912.000	AV	38.04	38.10	7.60	41.75	3.50	45.49	53.9	<b>8.4</b>	150	0	Floor noise
Vert.	2483.500	PK	50.10	27.86	13.07	43.62	3.50	50.91	73.9	22.9	100	204	
Vert.	4956.000	PK	50.70	32.64	5.50	45.20	3.50	47.14	73.9	26.7	150	0	Floor noise
Vert.	7434.000	PK	48.78	37.42	6.72	43.46	3.50	52.96	73.9	20.9	150	0	Floor noise
Vert.	9912.000	PK	46.58	38.10	7.60	41.75	3.50	54.03	73.9	19.8	150	0	Floor noise
Vert.	4956.000	AV	41.36	32.64	5.50	45.20	3.50	37.80	53.9	16.1	150	0	Floor noise
Vert.	7434.000	AV	39.94	37.42	6.72	43.46	3.50	44.12	53.9	9.7	150	0	Floor noise
Vert.	9912.000	AV	37.93	38.10	7.60	41.75	3.50	45.38	53.9	8.5	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	41.07	27.86	13.07	43.62	2.43	3.50	44.31	53.9	9.5	*1)
Vert.	2483.500	AV	41.11	27.86	13.07	43.62	2.43	3.50	44.35	53.9	9.5	*1)

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB



Duty factor refer to "Burst rate confirmation" sheet.

\*1) Not out of band emission (Leakage Power)

## Radiated Spurious Emission (Reference Plot for band-edge)

Test place  
Semi Anechoic Chamber  
Date  
Temperature / Humidity  
Engineer  
  
Mode

Kashima EMC Lab.  
No.10  
April 24, 2024  
20 deg. C / 53 % RH  
Hiromitsu Tanabe  
(1 GHz to 2.8 GHz)  
Tx BT LE 2M-PHY 2478 MHz, Left

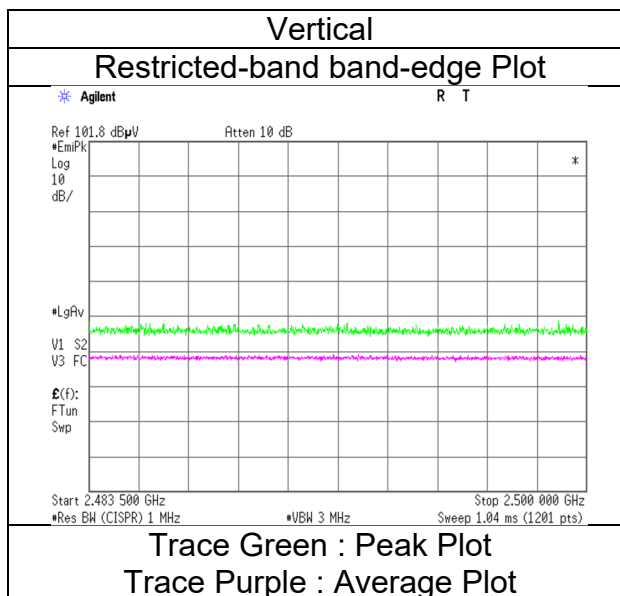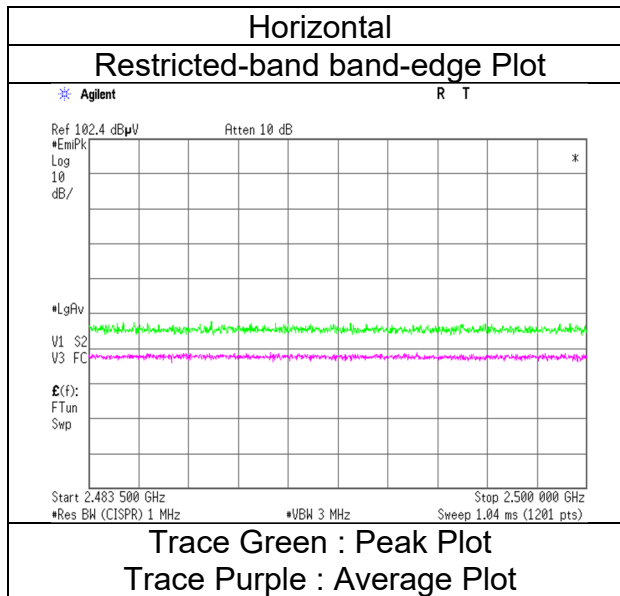

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 24, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 53 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx BT LE 1M-PHY 2402 MHz, Right			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	50.99	27.60	13.01	43.66	3.50	51.44	73.9	22.4	188	189	
Hori.	4804.000	PK	50.49	32.53	5.41	45.10	3.50	46.83	73.9	27.0	150	0	Floor noise
Hori.	7206.000	PK	49.10	37.14	6.66	43.99	3.50	52.41	73.9	21.4	150	0	Floor noise
Hori.	9608.000	PK	47.38	38.01	7.46	41.93	3.50	54.42	73.9	19.4	150	0	Floor noise
Hori.	4804.000	AV	41.02	32.53	5.41	45.10	3.50	37.36	53.9	16.5	150	0	Floor noise
Hori.	7206.000	AV	39.73	37.14	6.66	43.99	3.50	43.04	53.9	10.8	150	0	Floor noise
Hori.	9608.000	AV	37.68	38.01	7.46	41.93	3.50	44.72	53.9	9.1	150	0	Floor noise
Vert.	2390.000	PK	50.47	27.60	13.01	43.66	3.50	50.92	73.9	22.9	102	224	
Vert.	4804.000	PK	50.67	32.53	5.41	45.10	3.50	47.01	73.9	26.8	150	0	Floor noise
Vert.	7206.000	PK	48.22	37.14	6.66	43.99	3.50	51.53	73.9	22.3	150	0	Floor noise
Vert.	9608.000	PK	46.27	38.01	7.46	41.93	3.50	53.31	73.9	20.5	150	0	Floor noise
Vert.	4804.000	AV	41.09	32.53	5.41	45.10	3.50	37.43	53.9	16.4	150	0	Floor noise
Vert.	7206.000	AV	39.69	37.14	6.66	43.99	3.50	43.00	53.9	10.9	150	0	Floor noise
Vert.	9608.000	AV	37.77	38.01	7.46	41.93	3.50	44.81	53.9	9.0	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	AV	41.20	27.60	13.01	43.66	0.70	3.50	42.35	53.9	11.5	*1)
Vert.	2390.000	AV	41.16	27.60	13.01	43.66	0.70	3.50	42.31	53.9	11.5	*1)

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Burst rate confirmation" sheet.

\*1) Not out of band emission (Leakage Power)

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)



Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	97.52	27.60	13.02	43.65	3.50	97.99	-	-	Carrier
Hori.	2400.000	PK	43.18	27.60	13.02	43.65	3.50	43.65	78.0	34.3	Carrier
Vert.	2402.000	PK	96.82	27.60	13.02	43.65	3.50	97.29	-	-	Carrier
Vert.	2400.000	PK	41.66	27.60	13.02	43.65	3.50	42.13	77.3	35.1	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Kashima EMC Lab.
Semi Anechoic Chamber	No.10
Date	April 24, 2024
Temperature / Humidity	20 deg. C / 53 % RH
Engineer	Hiromitsu Tanabe
	(1 GHz to 2.8 GHz)
Mode	Tx BT LE 1M-PHY 2402 MHz, Right

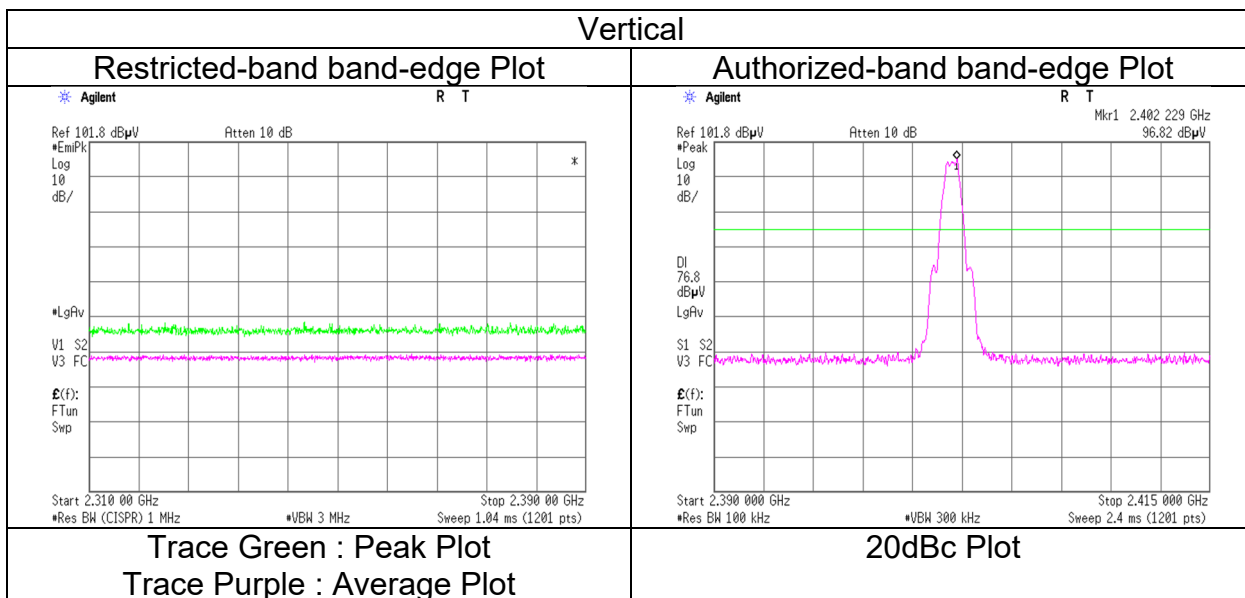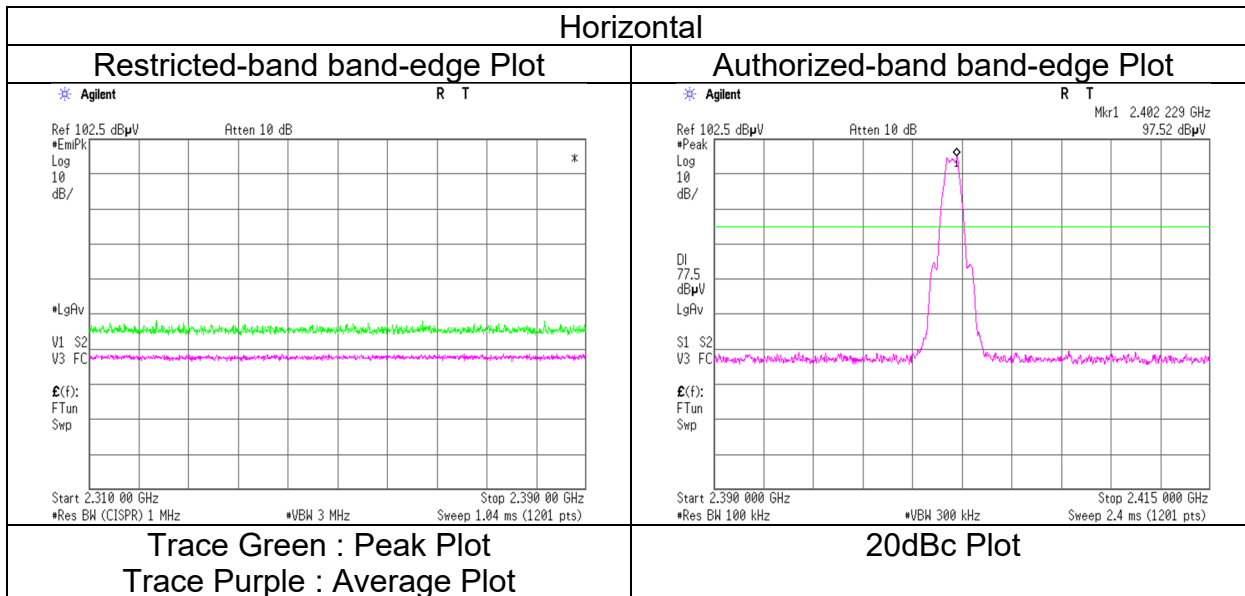

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge and authorized band edge were shown in tabular data.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.				
Semi Anechoic Chamber	No.10	No.10	No.10	No.10	No.10
Date	May 7, 2024	April 24, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	25 deg. C / 55 % RH	20 deg. C / 53 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(30 MHz to 1 GHz) Tx BT LE 1M-PHY 2440 MHz, Right	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	64.000	QP	30.13	12.60	6.23	31.21	0.00	17.75	40.0	22.2	100	0	
Hori.	103.760	QP	28.29	9.53	6.66	31.12	0.00	13.36	43.5	30.1	100	0	
Hori.	155.630	QP	27.08	13.41	7.13	31.04	0.00	16.58	43.5	26.9	100	0	
Hori.	4880.000	PK	51.33	32.55	5.46	45.15	3.50	47.69	73.9	26.2	150	0	Floor noise
Hori.	7320.000	PK	48.97	37.38	6.69	43.72	3.50	52.82	73.9	21.0	150	0	Floor noise
Hori.	9760.000	PK	47.89	37.91	7.51	41.76	3.50	55.05	73.9	18.8	150	0	Floor noise
Hori.	4880.000	AV	41.47	32.55	5.46	45.15	3.50	37.83	53.9	16.0	150	0	Floor noise
Hori.	7320.000	AV	39.44	37.38	6.69	43.72	3.50	43.29	53.9	10.6	150	0	Floor noise
Hori.	9760.000	AV	37.69	37.91	7.51	41.76	3.50	44.85	53.9	<b>9.0</b>	150	0	Floor noise
Vert.	64.000	QP	30.11	12.60	6.23	31.21	0.00	17.73	40.0	22.2	100	0	
Vert.	103.760	QP	28.32	9.53	6.66	31.12	0.00	13.39	43.5	30.1	100	0	
Vert.	155.630	QP	27.06	13.41	7.13	31.04	0.00	16.56	43.5	26.9	100	0	
Vert.	4880.000	PK	50.56	32.55	5.46	45.15	3.50	46.92	73.9	26.9	150	0	Floor noise
Vert.	7320.000	PK	49.16	37.38	6.69	43.72	3.50	53.01	73.9	20.8	150	0	Floor noise
Vert.	9760.000	PK	46.91	37.91	7.51	41.76	3.50	54.07	73.9	19.8	150	0	Floor noise
Vert.	4880.000	AV	41.27	32.55	5.46	45.15	3.50	37.63	53.9	16.2	150	0	Floor noise
Vert.	7320.000	AV	39.60	37.38	6.69	43.72	3.50	43.45	53.9	10.4	150	0	Floor noise
Vert.	9760.000	AV	37.75	37.91	7.51	41.76	3.50	44.91	53.9	<b>9.0</b>	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz :  $20\log(4.49\text{ m} / 3.0\text{ m}) = 3.50\text{ dB}$

10 GHz - 40 GHz :  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$



## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 24, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 53 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx BT LE 1M-PHY 2480 MHz, Right			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	50.22	27.86	13.07	43.62	3.50	51.03	73.9	22.8	393	15	
Hori.	4960.000	PK	48.79	32.64	5.51	45.20	3.50	45.24	73.9	28.6	150	0	Floor noise
Hori.	7440.000	PK	48.53	37.41	6.73	43.45	3.50	52.72	73.9	21.1	150	0	Floor noise
Hori.	9920.000	PK	47.62	38.11	7.61	41.76	3.50	55.08	73.9	18.8	150	0	Floor noise
Hori.	4960.000	AV	41.27	32.64	5.51	45.20	3.50	37.72	53.9	16.1	150	0	Floor noise
Hori.	7440.000	AV	39.51	37.41	6.73	43.45	3.50	43.70	53.9	10.2	150	0	Floor noise
Hori.	9920.000	AV	38.10	38.11	7.61	41.76	3.50	45.56	53.9	<b>8.3</b>	150	0	Floor noise
Vert.	2483.500	PK	50.33	27.86	13.07	43.62	3.50	51.14	73.9	22.7	100	181	
Vert.	4960.000	PK	50.32	32.64	5.51	45.20	3.50	46.77	73.9	27.1	150	0	Floor noise
Vert.	7440.000	PK	48.18	37.41	6.73	43.45	3.50	52.37	73.9	21.5	150	0	Floor noise
Vert.	9920.000	PK	47.60	38.11	7.61	41.76	3.50	55.06	73.9	18.8	150	0	Floor noise
Vert.	4960.000	AV	41.30	32.64	5.51	45.20	3.50	37.75	53.9	16.1	150	0	Floor noise
Vert.	7440.000	AV	39.49	37.41	6.73	43.45	3.50	43.68	53.9	10.2	150	0	Floor noise
Vert.	9920.000	AV	38.10	38.11	7.61	41.76	3.50	45.56	53.9	<b>8.3</b>	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	41.15	27.86	13.07	43.62	0.70	3.50	42.66	53.9	11.2	*1)
Vert.	2483.500	AV	41.18	27.86	13.07	43.62	0.70	3.50	42.69	53.9	11.2	*1)

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB



Duty factor refer to "Burst rate confirmation" sheet.

\*1) Not out of band emission (Leakage Power)

**Radiated Spurious Emission  
 (Reference Plot for band-edge)**

Test place  
 Semi Anechoic Chamber  
 Date  
 Temperature / Humidity  
 Engineer  
 Mode

Kashima EMC Lab.  
 No.10  
 April 24, 2024  
 20 deg. C / 53 % RH  
 Hiromitsu Tanabe  
 (1 GHz to 2.8 GHz)  
 Tx BT LE 1M-PHY 2480 MHz, Right

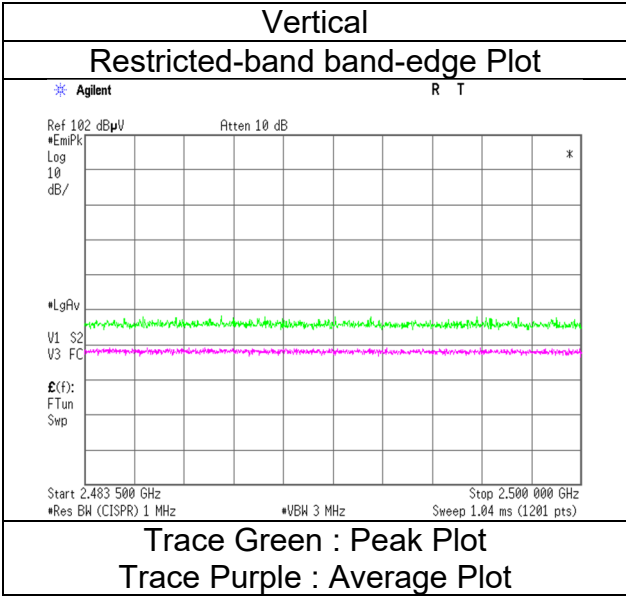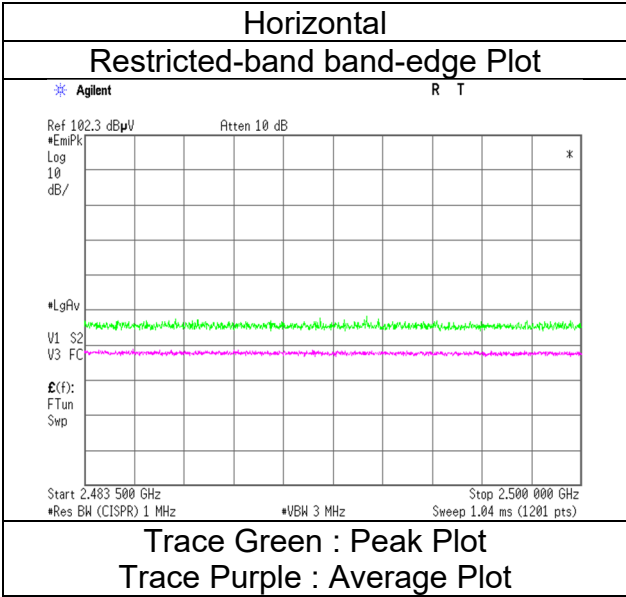

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
 Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 24, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 53 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx BT LE 2M-PHY 2404 MHz, Right			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	50.41	27.60	13.01	43.66	3.50	50.86	73.9	23.0	189	213	
Hori.	4808.000	PK	50.48	32.53	5.41	45.11	3.50	46.81	73.9	27.0	150	0	Floor noise
Hori.	7212.000	PK	48.38	37.15	6.66	43.97	3.50	51.72	73.9	22.1	150	0	Floor noise
Hori.	9616.000	PK	46.91	37.99	7.46	41.92	3.50	53.94	73.9	19.9	150	0	Floor noise
Hori.	4808.000	AV	41.47	32.53	5.41	45.11	3.50	37.80	53.9	16.1	150	0	Floor noise
Hori.	7212.000	AV	39.65	37.15	6.66	43.97	3.50	42.99	53.9	10.9	150	0	Floor noise
Hori.	9616.000	AV	38.06	37.99	7.46	41.92	3.50	45.09	53.9	8.8	150	0	Floor noise
Vert.	2390.000	PK	50.52	27.60	13.01	43.66	3.50	50.97	73.9	22.9	102	180	
Vert.	4808.000	PK	50.66	32.53	5.41	45.11	3.50	46.99	73.9	26.9	150	0	Floor noise
Vert.	7212.000	PK	49.44	37.15	6.66	43.97	3.50	52.78	73.9	21.1	150	0	Floor noise
Vert.	9616.000	PK	47.17	37.99	7.46	41.92	3.50	54.20	73.9	19.7	150	0	Floor noise
Vert.	4808.000	AV	41.42	32.53	5.41	45.11	3.50	37.75	53.9	16.1	150	0	Floor noise
Vert.	7212.000	AV	39.63	37.15	6.66	43.97	3.50	42.97	53.9	10.9	150	0	Floor noise
Vert.	9616.000	AV	37.97	37.99	7.46	41.92	3.50	45.00	53.9	8.9	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	AV	41.02	27.60	13.01	43.66	2.43	3.50	43.90	53.9	10.0	*1)
Vert.	2390.000	AV	41.15	27.60	13.01	43.66	2.43	3.50	44.03	53.9	9.8	*1)

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

Duty factor refer to "Burst rate confirmation" sheet.

\*1) Not out of band emission (Leakage Power)

### 20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)



Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2404.000	PK	95.97	27.61	13.02	43.65	3.50	96.45	-	-	Carrier
Hori.	2400.000	PK	42.23	27.60	13.02	43.65	3.50	42.70	76.5	33.7	Carrier
Vert.	2404.000	PK	95.50	27.61	13.02	43.65	3.50	95.98	-	-	Carrier
Vert.	2400.000	PK	40.87	27.60	13.02	43.65	3.50	41.34	76.0	34.6	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Kashima EMC Lab.
Semi Anechoic Chamber	No.10
Date	April 24, 2024
Temperature / Humidity	20 deg. C / 53 % RH
Engineer	Hiromitsu Tanabe
	(1 GHz to 2.8 GHz)
Mode	Tx BT LE 2M-PHY 2404 MHz, Right

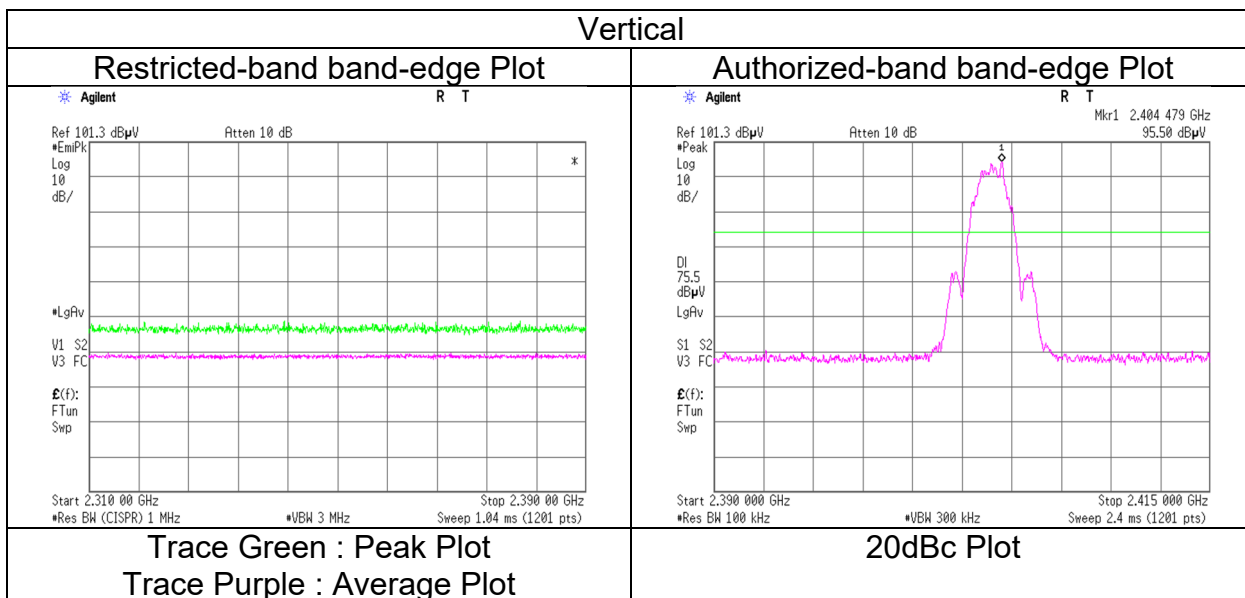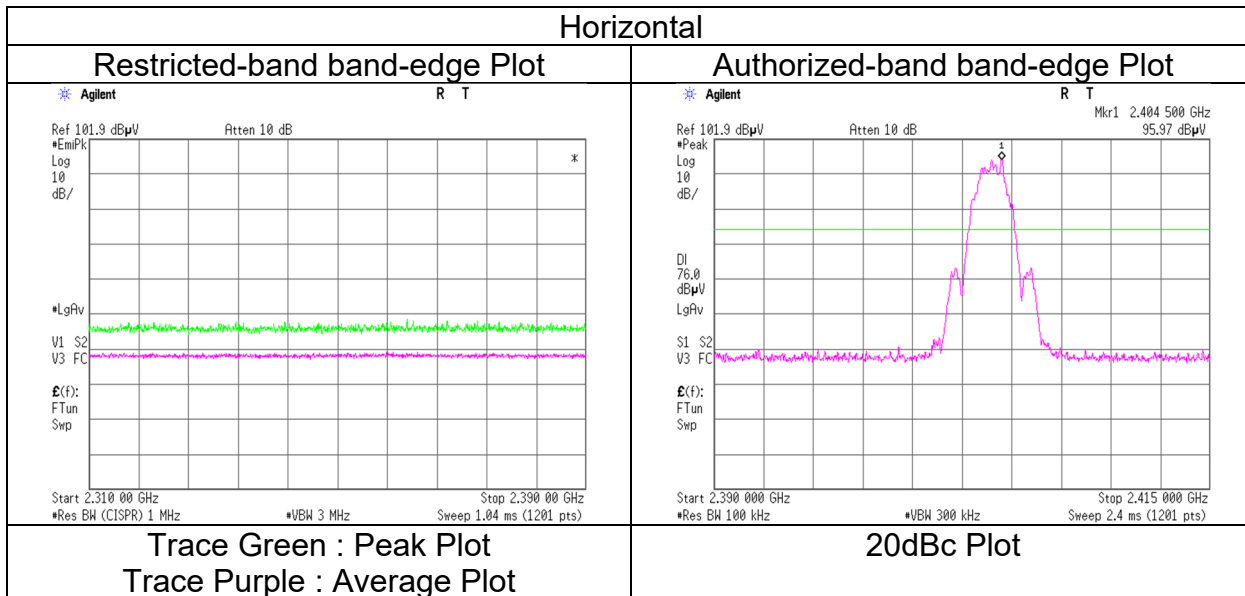

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge and authorized band edge were shown in tabular data.

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 24, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 53 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx BT LE 2M-PHY 2440 MHz, Right			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4880.000	PK	50.96	32.55	5.46	45.15	3.50	47.32	73.9	26.5	150	0	Floor noise
Hori.	7320.000	PK	48.45	37.38	6.69	43.72	3.50	52.30	73.9	21.6	150	0	Floor noise
Hori.	9760.000	PK	47.55	37.91	7.51	41.76	3.50	54.71	73.9	19.1	150	0	Floor noise
Hori.	4880.000	AV	41.43	32.55	5.46	45.15	3.50	37.79	53.9	16.1	150	0	Floor noise
Hori.	7320.000	AV	39.58	37.38	6.69	43.72	3.50	43.43	53.9	10.4	150	0	Floor noise
Hori.	9760.000	AV	38.11	37.91	7.51	41.76	3.50	45.27	53.9	<b>8.6</b>	150	0	Floor noise
Vert.	4880.000	PK	50.43	32.55	5.46	45.15	3.50	46.79	73.9	27.1	150	0	Floor noise
Vert.	7320.000	PK	48.18	37.38	6.69	43.72	3.50	52.03	73.9	21.8	150	0	Floor noise
Vert.	9760.000	PK	47.61	37.91	7.51	41.76	3.50	54.77	73.9	19.1	150	0	Floor noise
Vert.	4880.000	AV	41.60	32.55	5.46	45.15	3.50	37.96	53.9	15.9	150	0	Floor noise
Vert.	7320.000	AV	39.54	37.38	6.69	43.72	3.50	43.39	53.9	10.5	150	0	Floor noise
Vert.	9760.000	AV	37.91	37.91	7.51	41.76	3.50	45.07	53.9	8.8	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB

10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

## Radiated Spurious Emission

Test place	Kashima EMC Lab.			
Semi Anechoic Chamber	No.10	No.10	No.10	No.10
Date	April 24, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	20 deg. C / 53 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe	Hiromitsu Tanabe
Mode	(1 GHz to 2.8 GHz)	(2.8 GHz to 10 GHz)	(10 GHz to 18 GHz)	(18 GHz to 26.5 GHz)
	Tx BT LE 2M-PHY 2478 MHz, Right			

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	50.75	27.86	13.07	43.62	3.50	51.56	73.9	22.3	391	192	
Hori.	4956.000	PK	50.41	32.64	5.50	45.20	3.50	46.85	73.9	27.0	150	0	Floor noise
Hori.	7434.000	PK	48.34	37.42	6.72	43.46	3.50	52.52	73.9	21.3	150	0	Floor noise
Hori.	9912.000	PK	46.96	38.10	7.60	41.75	3.50	54.41	73.9	19.4	150	0	Floor noise
Hori.	4956.000	AV	41.42	32.64	5.50	45.20	3.50	37.86	53.9	16.0	150	0	Floor noise
Hori.	7434.000	AV	39.99	37.42	6.72	43.46	3.50	44.17	53.9	9.7	150	0	Floor noise
Hori.	9912.000	AV	37.97	38.10	7.60	41.75	3.50	45.42	53.9	8.4	150	0	Floor noise
Vert.	2483.500	PK	50.63	27.86	13.07	43.62	3.50	51.44	73.9	22.4	100	182	
Vert.	4956.000	PK	50.65	32.64	5.50	45.20	3.50	47.09	73.9	26.8	150	0	Floor noise
Vert.	7434.000	PK	48.95	37.42	6.72	43.46	3.50	53.13	73.9	20.7	150	0	Floor noise
Vert.	9912.000	PK	46.75	38.10	7.60	41.75	3.50	54.20	73.9	19.7	150	0	Floor noise
Vert.	4956.000	AV	41.30	32.64	5.50	45.20	3.50	37.74	53.9	16.1	150	0	Floor noise
Vert.	7434.000	AV	39.79	37.42	6.72	43.46	3.50	43.97	53.9	9.9	150	0	Floor noise
Vert.	9912.000	AV	37.96	38.10	7.60	41.75	3.50	45.41	53.9	8.4	150	0	Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB

### Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	AV	41.18	27.86	13.07	43.62	2.43	3.50	44.42	53.9	9.4	*1)
Vert.	2483.500	AV	41.06	27.86	13.07	43.62	2.43	3.50	44.30	53.9	9.6	*1)

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Duty factor + Distance factor

Distance factor : 1 GHz - 10 GHz : 20log (4.49 m / 3.0 m) = 3.50 dB  
10 GHz - 40 GHz : 20log (1.0 m / 3.0 m) = -9.54 dB



Duty factor refer to "Burst rate confirmation" sheet.

\*1) Not out of band emission (Leakage Power)

**Radiated Spurious Emission  
(Reference Plot for band-edge)**

Test place  
Semi Anechoic Chamber  
Date  
Temperature / Humidity  
Engineer  
Mode


Kashima EMC Lab.  
No.10  
April 24, 2024  
20 deg. C / 53 % RH  
Hiromitsu Tanabe  
(1 GHz to 2.8 GHz)  
Tx BT LE 2M-PHY 2478 MHz, Right

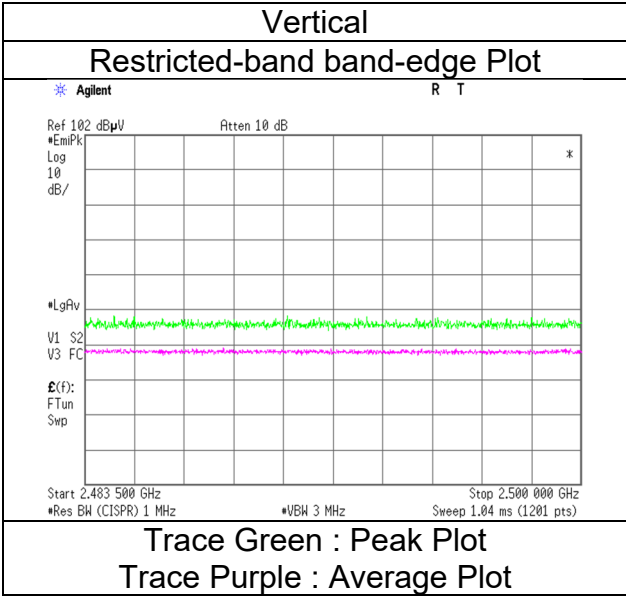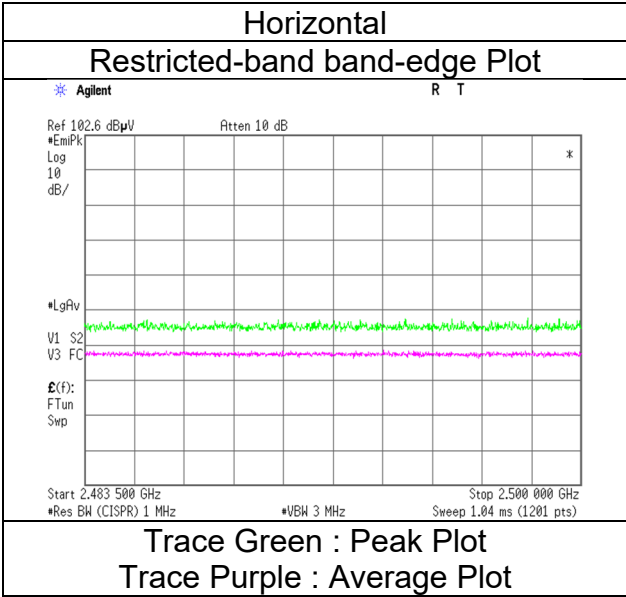

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

**Radiated Spurious Emission**  
**(Plot data, Worst case mode for Maximum Peak Output Power)**

Test place	Kashima EMC Lab.				
Semi Anechoic Chamber	No.10	No.10	No.10	No.10	No.10
Date	May 7, 2024	April 23, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	25 deg. C / 55 % RH	20 deg. C / 59 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hirimitsu Tanabe (30 MHz to 1 GHz)	Hirimitsu Tanabe (1 GHz to 2.8 GHz)	Hirimitsu Tanabe (2.8 GHz to 10 GHz)	Hirimitsu Tanabe (10 GHz to 18 GHz)	Hirimitsu Tanabe (18 GHz to 26.5 GHz)
Mode	Tx BT LE 1M-PHY 2440 MHz, Left				

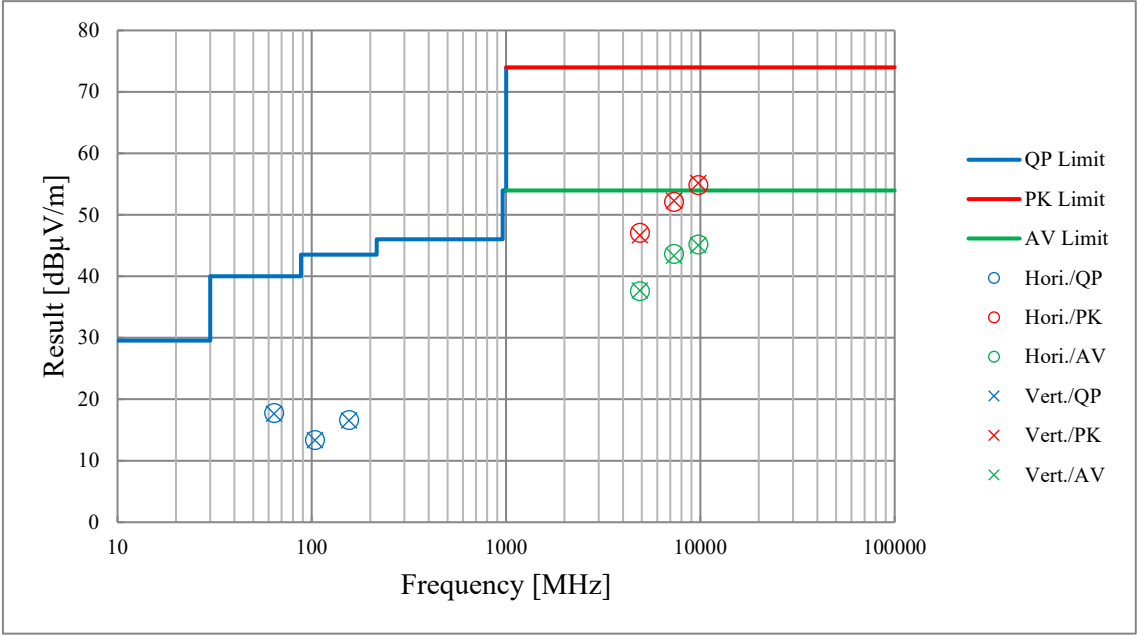


\*These plots data contain sufficient number to show the trend of characteristic features for EUT.



**Radiated Spurious Emission**  
**(Plot data, Worst case mode for Maximum Peak Output Power)**


Test place	Kashima EMC Lab.				
Semi Anechoic Chamber	No.10	No.10	No.10	No.10	No.10
Date	May 7, 2024	April 24, 2024	April 25, 2024	April 26, 2024	May 8, 2024
Temperature / Humidity	25 deg. C / 55 % RH	20 deg. C / 53 % RH	24 deg. C / 56 % RH	20 deg. C / 56 % RH	21 deg. C / 54 % RH
Engineer	Hirimitsu Tanabe (30 MHz to 1 GHz)	Hirimitsu Tanabe (1 GHz to 2.8 GHz)	Hirimitsu Tanabe (2.8 GHz to 10 GHz)	Hirimitsu Tanabe (10 GHz to 18 GHz)	Hirimitsu Tanabe (18 GHz to 26.5 GHz)
Mode	Tx BT LE 1M-PHY 2440 MHz, Right				

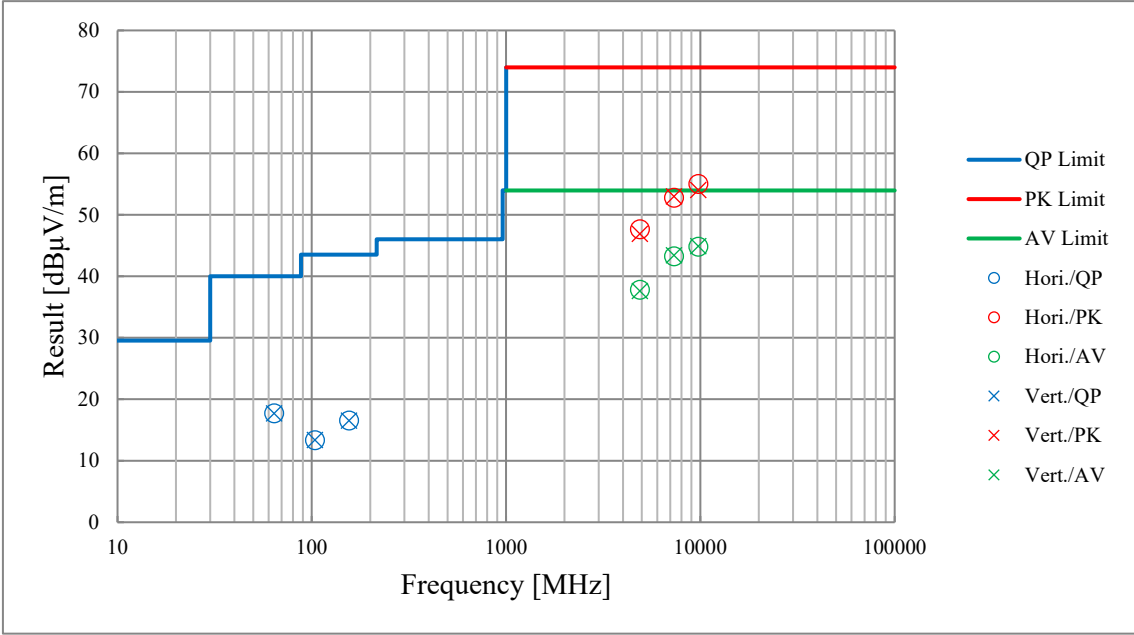

\*These plots data contain sufficient number to show the trend of characteristic features for EUT.

### Conducted Spurious Emission

Test place: Kashima EMC Lab. No.2 Measurement Room  
 Date: April 19, 2024  
 Temperature / Humidity: 21 deg. C / 49 % RH  
 Engineer: Hiromitsu Tanabe  
 Mode: Tx BT LE ,1M-PHY 2402 MHz

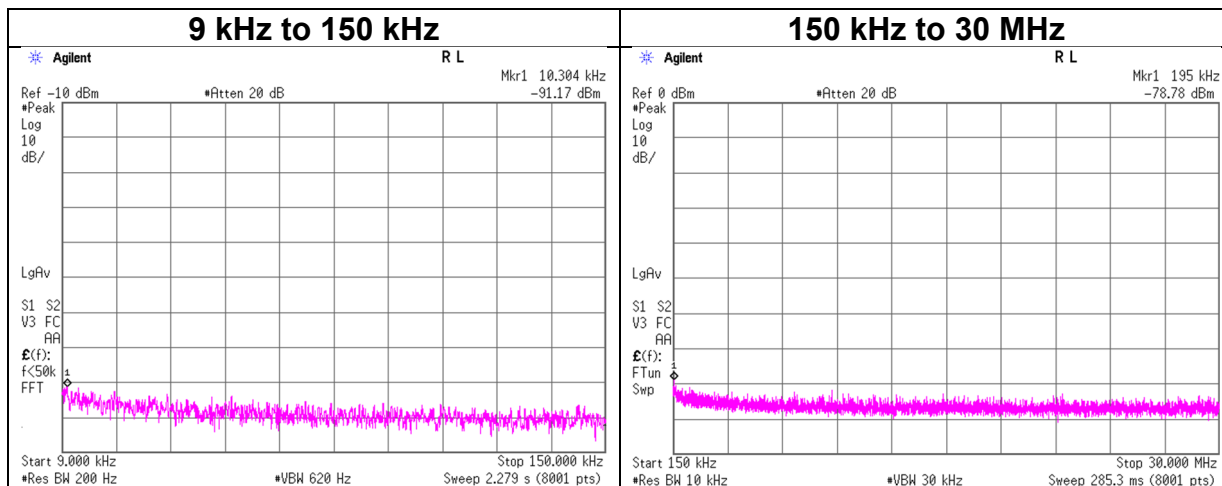

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
10.30	-91.2	0.01	9.9	2.0	1	-79.2	300	6.0	-18.0	47.3	65.3	
195.00	-78.8	0.01	9.9	2.0	1	-66.8	300	6.0	-5.6	21.8	27.4	

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$


$EIRP[dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

\*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

### Conducted Spurious Emission

Test place: Kashima EMC Lab. No.2 Measurement Room  
 Date: April 19, 2024  
 Temperature / Humidity: 21 deg. C / 49 % RH  
 Engineer: Hiromitsu Tanabe  
 Mode: Tx BT LE ,1M-PHY 2440 MHz

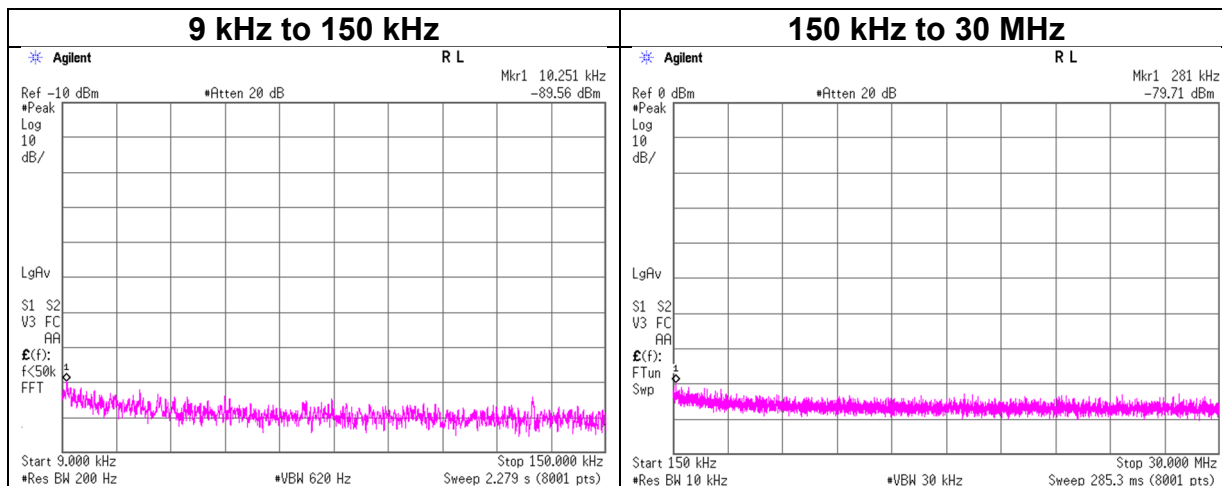

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
10.25	-89.6	0.01	9.9	2.0	1	-77.6	300	6.0	-16.3	47.3	63.6	
281.00	-79.7	0.02	9.9	2.0	1	-67.7	300	6.0	-6.5	18.6	25.1	

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$


$EIRP [dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

\*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

### Conducted Spurious Emission

Test place: Kashima EMC Lab. No.2 Measurement Room  
 Date: April 19, 2024  
 Temperature / Humidity: 21 deg. C / 49 % RH  
 Engineer: Hiromitsu Tanabe  
 Mode: Tx BT LE ,1M-PHY 2480 MHz

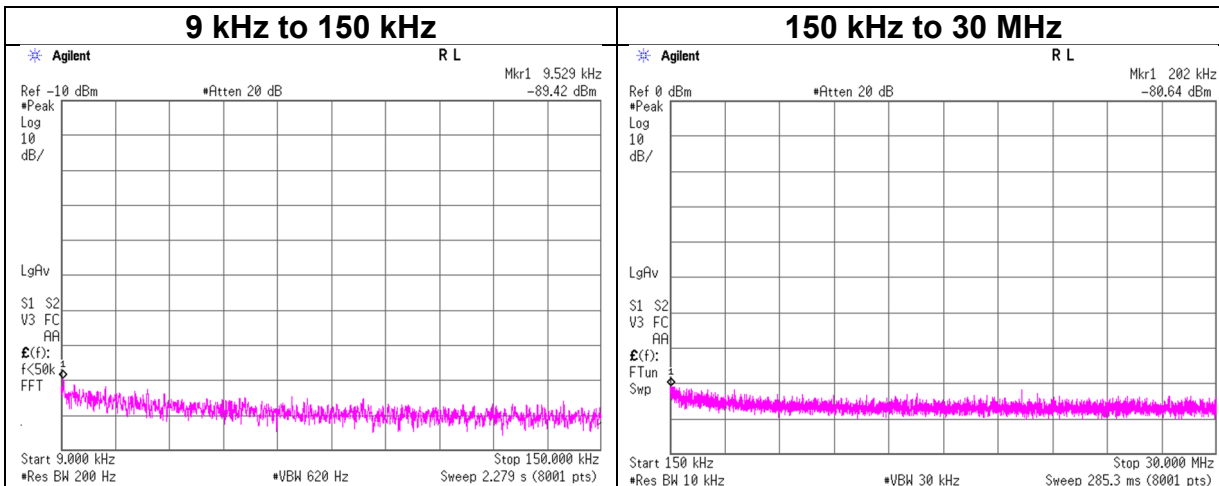

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
9.53	-89.4	0.01	9.9	2.0	1	-77.5	300	6.0	-16.2	48.0	64.2	
202.00	-80.6	0.01	9.9	2.0	1	-68.7	300	6.0	-7.4	21.4	28.8	

$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$


$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$

N: Number of output

\*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

### Conducted Spurious Emission

Test place: Kashima EMC Lab. No.2 Measurement Room  
 Date: April 24, 2024  
 Temperature / Humidity: 22 deg. C / 50 % RH  
 Engineer: Hiromitsu Tanabe  
 Mode: Tx BT LE ,2M-PHY, 2404 MHz

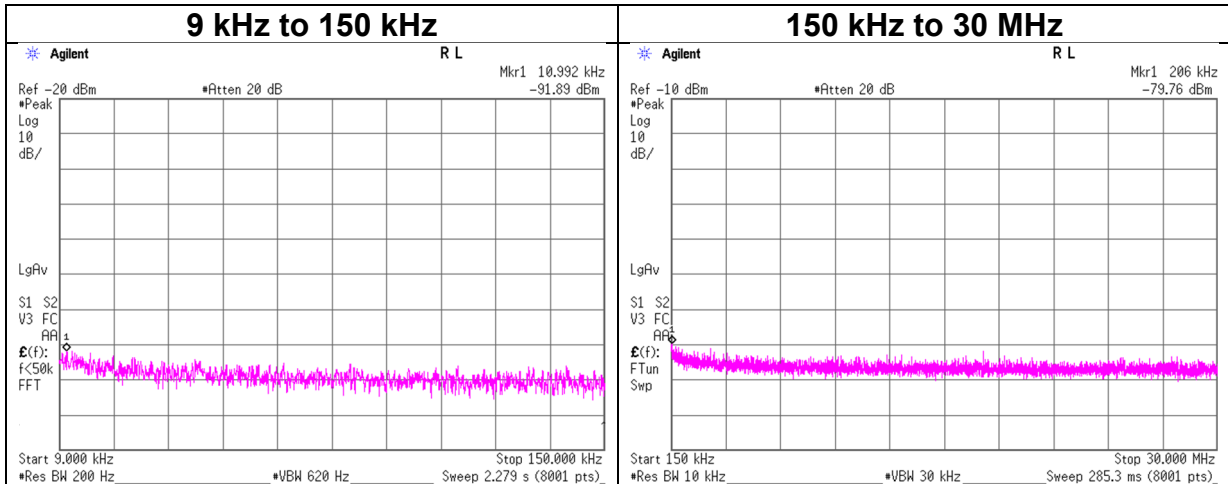


Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
10.99	-91.9	0.01	9.9	2.0	1	-79.9	300	6.0	-18.7	46.7	65.4	
206.00	-79.8	0.01	9.9	2.0	1	-67.8	300	6.0	-6.5	21.3	27.8	

$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$   
 $\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$   
 N: Number of output  
 \*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

### Conducted Spurious Emission

Test place: Kashima EMC Lab. No.2 Measurement Room  
 Date: April 24, 2024  
 Temperature / Humidity: 22 deg. C / 50 % RH  
 Engineer: Hiromitsu Tanabe  
 Mode: Tx BT LE ,2M-PHY, 2440 MHz

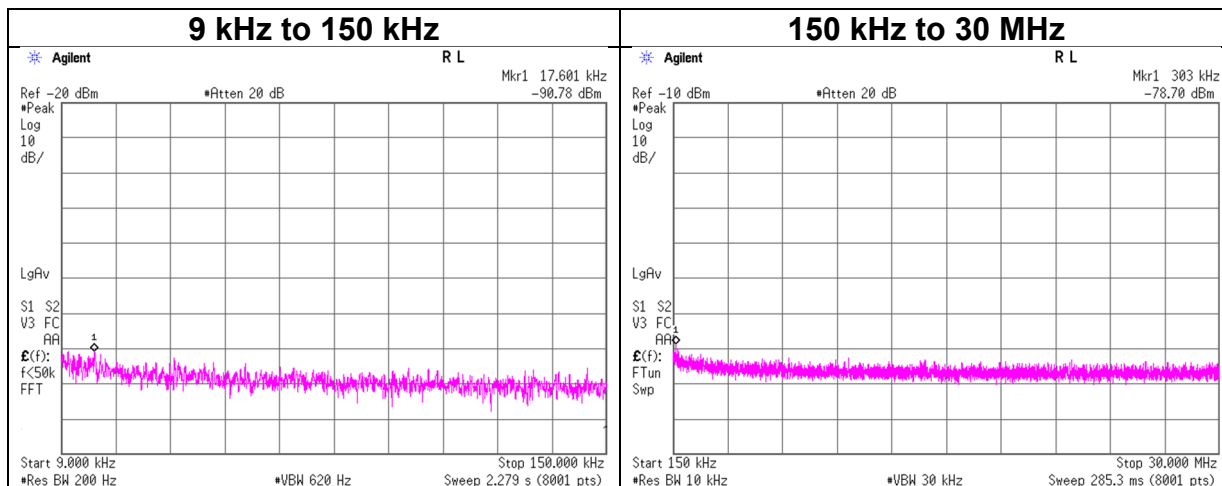

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
17.60	-90.8	0.01	9.9	2.0	1	-78.8	300	6.0	-17.6	42.6	60.2	
303.00	-78.7	0.02	9.9	2.0	1	-66.7	300	6.0	-5.5	17.9	23.4	

$E [dBuV/m] = EIRP [dBm] - 20 \log (Distance [m]) + Ground\ bounce [dB] + 104.8 [dBuV/m]$


$EIRP[dBm] = Reading [dBm] + Cable\ loss [dB] + Attenuator\ Loss [dB] + Antenna\ gain [dBi] + 10 * \log (N)$

N: Number of output

\*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

### Conducted Spurious Emission

Test place: Kashima EMC Lab. No.2 Measurement Room  
 Date: April 24, 2024  
 Temperature / Humidity: 22 deg. C / 50 % RH  
 Engineer: Hiromitsu Tanabe  
 Mode: Tx BT LE ,2M-PHY, 2478 MHz

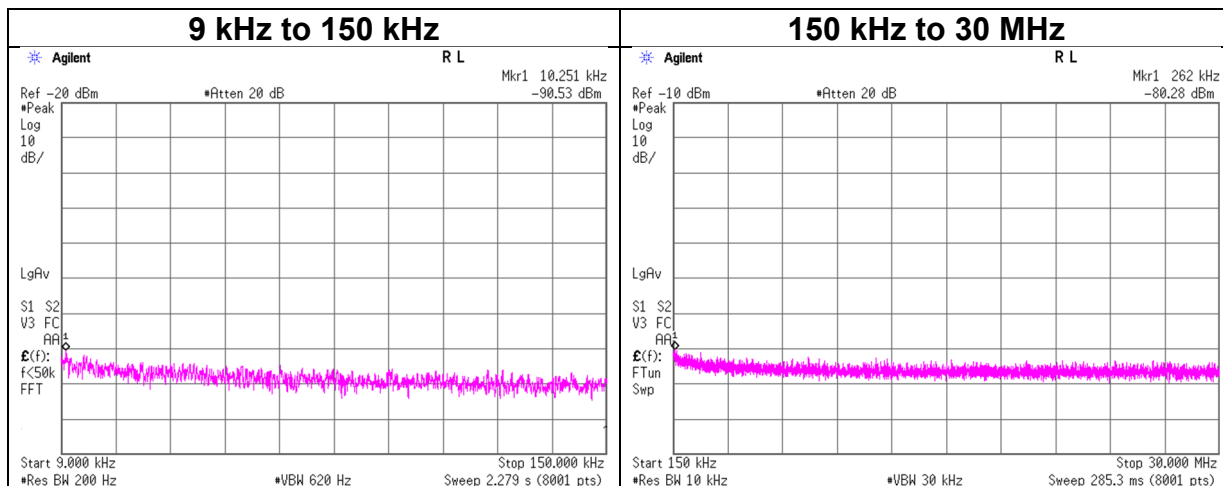

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain* [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
10.25	-90.5	0.01	9.9	2.0	1	-78.6	300	6.0	-17.3	47.3	64.6	
262.00	-80.3	0.02	9.9	2.0	1	-68.3	300	6.0	-7.1	19.2	26.3	

$E \text{ [dBuV/m]} = \text{EIRP [dBm]} - 20 \log (\text{Distance [m]}) + \text{Ground bounce [dB]} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP [dBm]} = \text{Reading [dBm]} + \text{Cable loss [dB]} + \text{Attenuator Loss [dB]} + \text{Antenna gain [dBi]} + 10 * \log (N)$

N: Number of output

\*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

## Power Density

Test place	Kashima EMC Lab. No.2 Measurement Room	
Date	April 19, 2024	April 24, 2024
Temperature / Humidity	21 deg. C / 49 % RH	22 deg. C / 50 % RH
Engineer	Hirimitsu Tanabe	Hirimitsu Tanabe
Mode	Tx BT LE	

### 1M-PHY

Freq. [MHz]	Reading [dBm / 3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm / 3 kHz]	Limit [dBm / 3 kHz]	Margin [dB]
2402	-18.05	3.12	10.05	-4.88	8.00	12.88
2440	-18.12	3.13	10.05	-4.94	8.00	12.94
2480	-18.00	3.14	10.05	<b>-4.81</b>	8.00	12.81

### 2M-PHY

Freq. [MHz]	Reading [dBm / 3 kHz]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm / 3 kHz]	Limit [dBm / 3 kHz]	Margin [dB]
2404	-21.19	3.12	10.05	<b>-8.02</b>	8.00	16.02
2440	-21.28	3.13	10.05	-8.10	8.00	16.10
2478	-21.21	3.14	10.05	-8.02	8.00	16.02


Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

\*The equipment and cables were not used for factor 0 dB of the data sheets.



## Power Density

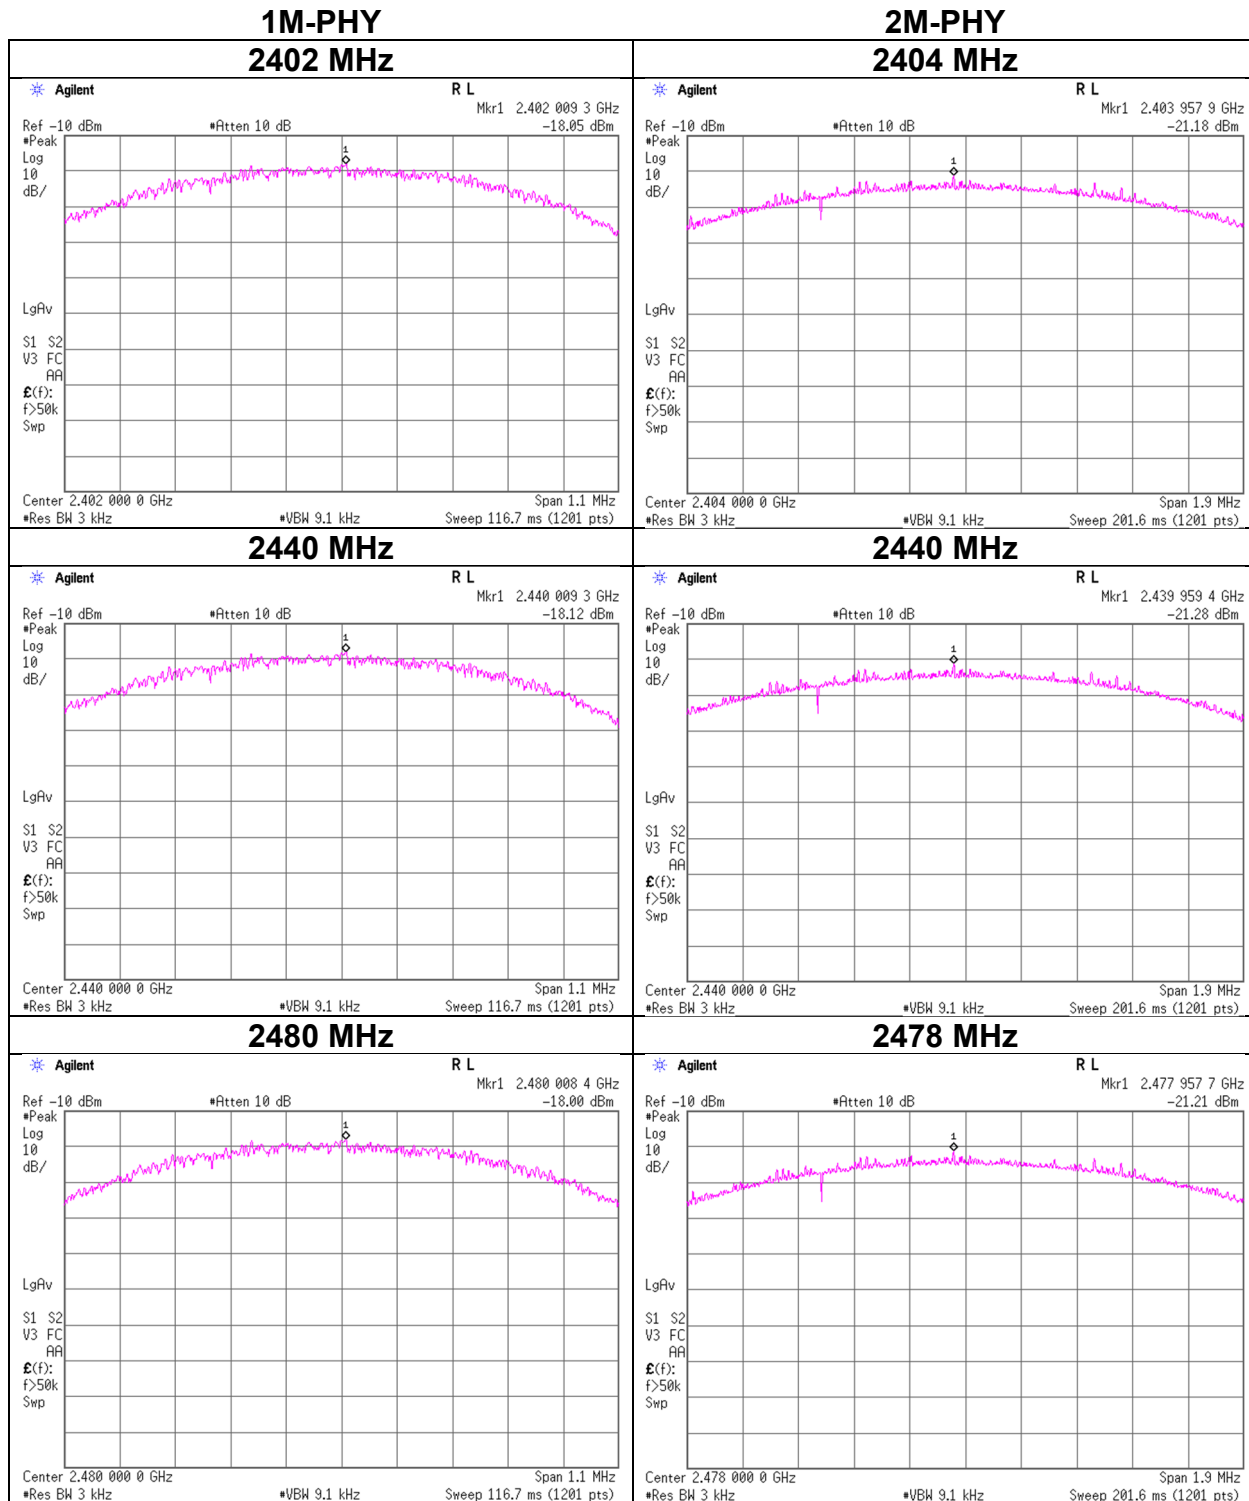

## APPENDIX 2: Test Instruments

### Test Equipment

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	143643	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY52490024	2023/06/21	12
AT	143023	10dB Fixed Atten.	Weinschel - API Technologies Corp	54A-10	56251	2023/05/25	12
AT	143110	Micro Wave Cable	Suhner	SUCOFLEX102	MY3773/2	2023/05/25	12
AT	143588	Peak Power Analyzer	Keysight Technologies Inc	8990B	MY51000276	2023/06/20	12
AT	143606	Power Sensor	Keysight Technologies Inc	N1923A	MY54070024	2023/06/20	12
AT	143733	Terminator	Weinschel - API Technologies Corp	M1459A	54704	2023/05/25	12
AT	222747	Measure	SHINWA RULES CO., LTD.	80862	none	-	-
AT	144210	Digital Multimeter	Fluke Corporation	112	89790193	2023/10/24	12
AT	200034	Temperature & Humidity Logger	HIOKI E.E. CORPORATION	LR5001/LR9504	200636456/200699552	2023/07/18	12
AT	143133	Barometer	Sanoh Co., Ltd	SBR-151	001439	2023/03/10	36
RE	143121	LOGBICON	Schwarzbeck Mess-Elektronik OHG	VULB 9168	343	2024/04/22	12
RE	178806	5dB Fixed Atten.	Pasternack Enterprises	PE7047-5	none	2024/04/17	12
RE	143165	10 Site RE 3m System	UL Japan	none	none	2023/08/01	12
RE	183880	Pre-Amplifier	UL Japan	ZKL-2	001	2024/04/22	12
RE	144199	Test Receiver	Keysight Technologies Inc	N9038A	MY53290016	2023/07/05	12
RE	144632	Semi Anechoic Chamber	TDK	NSA (No.10)	10	2023/05/08	12
RE	143455	Double Ridged Wave Guide	ETS-Lindgren (Cedar Park, Texas)	3115	00204569	2024/02/09	12
RE	142940	Pre-Amplifier	Micro Wave Factory	MPR-1G26.5-35	161399	2023/06/08	12
RE	143140	Micro Wave Cable	Junkosha	MWX221	1407S222	2023/11/17	12
RE	192243	Microwave Cable	Huber+Suhner	SF104/11N/11PC35/8000MM	808995/4	2024/01/19	12
RE	235556	10dB Fixed Attenuator	Weinschel Associates	WA54-10-1314	0H3E9	2023/06/13	12
RE	143442	HPF	Micro-Tronics	HPM50111-02	009	2023/05/24	12
RE	144633	Semi Anechoic Chamber	TDK	SVSWR (No.10)	10	2023/05/08	12
RE	143438	Double Ridged Horn	ETS-Lindgren (Cedar Park, Texas)	3160-09	00166043	2023/06/19	12
RE	142937	Pre-Amplifier	TOYO	HAP18-26W	00000035	2023/06/19	12
RE	142992	Micro Wave Cable	Suhner	SUCOFLEX102	MY010/2A	2023/06/04	12
RE	143642	Spectrum Analyzer	Keysight Technologies Inc	N9030A	MY53310670 Version A.13.12	2023/05/23	12
RE	222745	Measure	SHINWA RULES CO., LTD.	80862	none	-	-
RE	143542	Temperature & Humidity Indicator	HIOKI E.E. CORPORATION	3641/9680-50	090999895/090905406	2023/06/27	12
RE	143133	Barometer	Sanoh Co., Ltd	SBR-151	001439	2023/03/10	36
RE	144216	Digital Multimeter	Fluke Corporation	115	994460954	2023/10/24	12
RE	178804	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,ME,PE)	Ver 3.1.0546	-	-

\*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

AT: Antenna Terminal Conducted test

RE: Radiated Emission