



**GFSK**

**2402MHz**

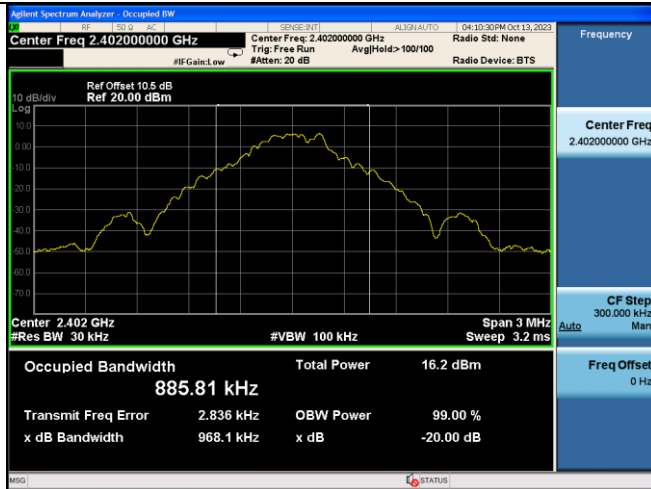


**8-DPSK**


**2402MHz**

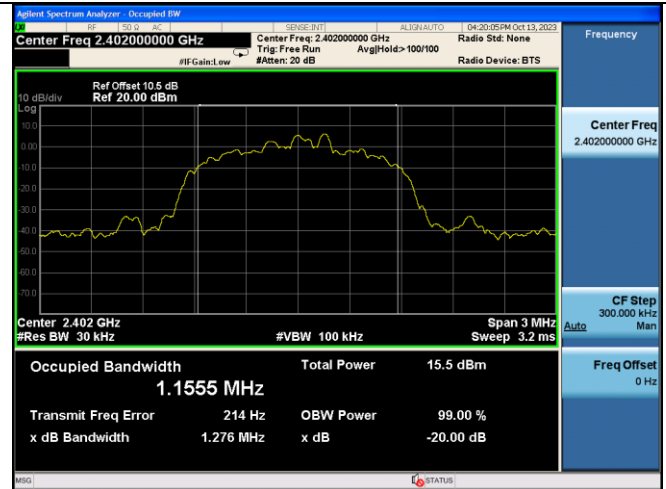


**2441MHz**

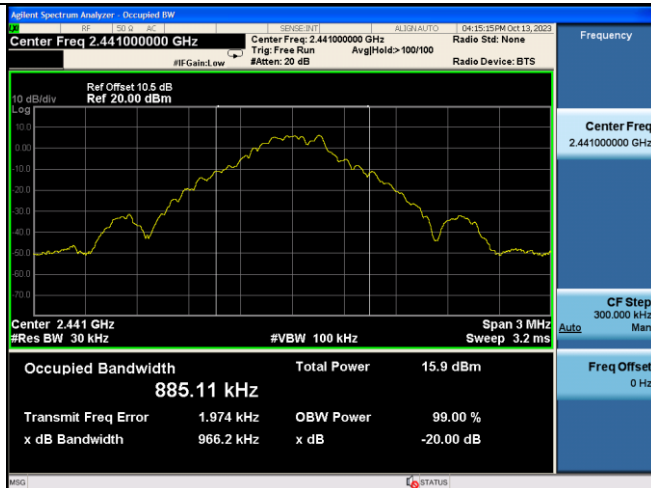


**2441MHz**

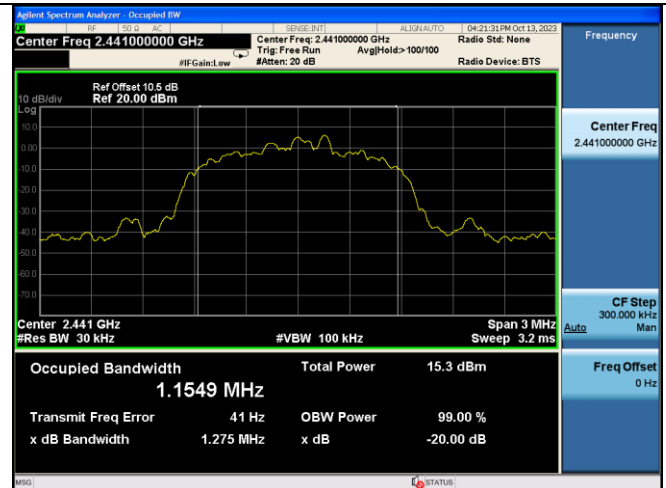

**2480MHz**

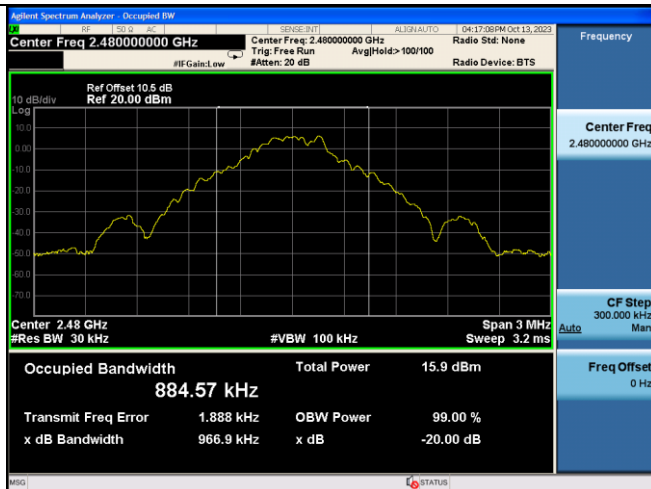

**2480MHz**

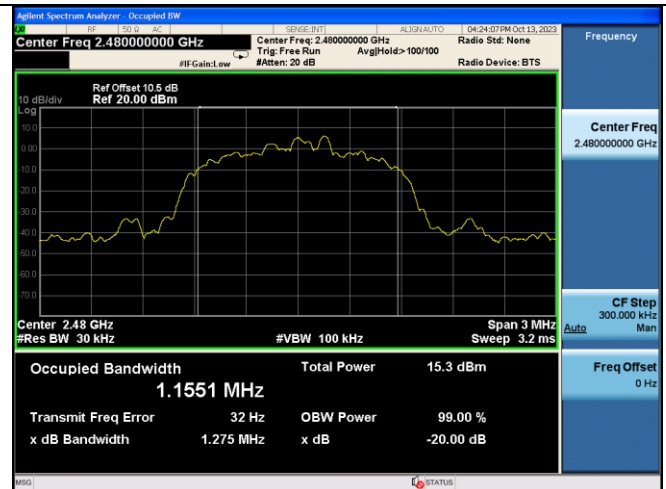

## 7. CARRIER FREQUENCY SEPARATION TEST

### 7.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.01,23	1 Year
2.	RF Cable	HUBER+SUHNER	SUCOFLEX-106	505238/6	Apr.02,23	1 Year

### 7.2. Limit

Frequency hopping systems shall have hopping channel carrier frequency separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 7.3. Test Procedure


Use the test method described in ANSI C63.10 clause 7.8.2:

1. Connect the antenna port of the EUT to the Spectrum analyzer.
2. Let the EUT transmit at Low/ Mid/ High channel.
3. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz.Span: 5MHz
4. Use the mark Delta function of the SA measure out the channel separation.

### 7.4. Test Results.

EUT: Wireless Speaker			
M/N: YY7862E			
Test date: 2023-10-13		Pressure: 101.3±1.0 kpa	Humidity: 52.4±3.0%
Tested by: Carl		Test site: RF site	Temperature: 23.1±0.6°C
Test Mode	Channel separation	Limit(KHz)	Conclusion
GFSK	1.0MHz	645.4	PASS
8-DPSK	1.0MHz	850.667	PASS

GFSK	8-DPSK
------	--------

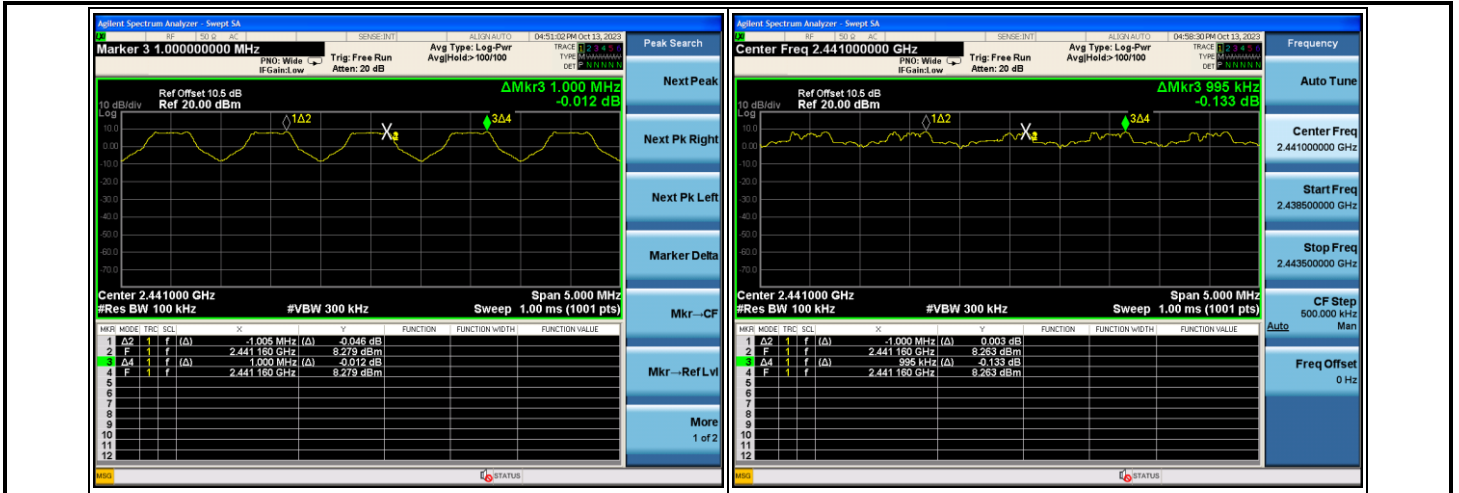

## 8. NUMBER OF HOPPING FREQUENCY TEST

### 8.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.01,23	1 Year
2.	RF Cable	HUBER+SUHNER	SUCOFLEX-106	505238/6	Apr.02,23	1 Year

### 8.2. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

### 8.3. Test Procedure


Use the test method described in ANSI C63.10 clause 7.8.3:

1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz,  
Start frequency: 2390MHz  
Stop frequency: 2483.5MHz  
And waiting for the hopping trace until stability, count out the number of the hopping.

### 8.4. Test Results

EUT: Wireless Speaker		
M/N: YY7862E		
Test date: 2023-10-13	Pressure: 101.3±1.0 kpa	Humidity: 52.4±3.0%
Tested by: Carl	Test site: RF site	Temperature: 23.1±0.6°C

Test Mode	Number of channel	Limit	Conclusion
GFSK	79	≥15	PASS
8-DPSK	79	≥15	PASS

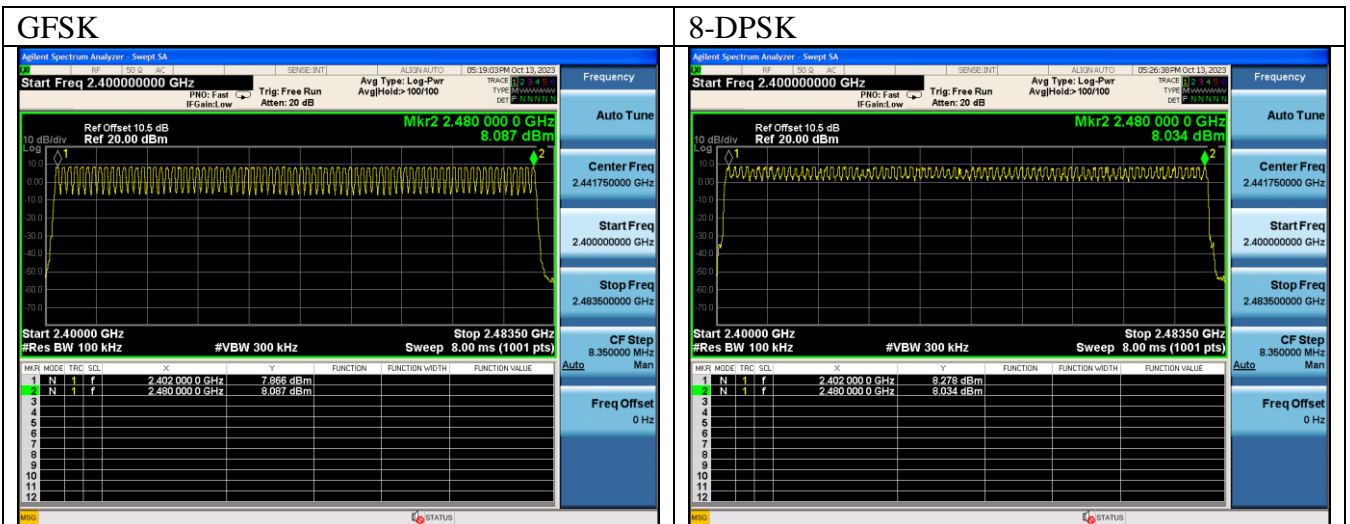

## 9. DWELL TIME

### 9.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.01,23	1 Year
2.	RF Cable	HUBER+SUHNER	SUCOFLEX-106	505238/6	Apr.02,23	1 Year

### 9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 9.3. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.4:

1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as:  
 RBW: 100kHz / VBW: 300kHz  
 Sweep Mode: Single  
 Detect mode: Positive peak  
 Trace mode: Auto  
 Span: 0Hz  
 Sweep time: 5s and big enough to measure one hopping signal
3. Use below formula calculate the Dwell time  

$$\text{Dwell time} = \text{Hopping number per second} * 0.4 * \text{channel number} * \text{Pulse bandwidth per hopping.}$$

### 9.4. Test Results



EUT: Wireless Speaker		
M/N: YY7862E		
Test date: 2023-10-13	Pressure: 101.3±1.0 kpa	Humidity: 52.4±3.0%
Tested by: Carl	Test site: RF site	Temperature: 23.1±0.6°C

Mode		dwell time	Limit	Conclusion
GFSK	DH1	50 hops/5s*0.4s*79channels* 0.414 ms =130.824ms	≅ 400ms	PASS
	DH3	25 hops/5s*0.4s*79channels* 1.674 ms =264.492ms	≅ 400ms	PASS
	DH5	17 hops/5s*0.4s*79channels* 2.925 ms =314.262ms	≅ 400ms	PASS
8-DPSK	3-DH1	51 hops/5s*0.4s*79channels* 0.408 ms =131.507ms	≅ 400ms	PASS
	3-DH3	25 hops/5s*0.4s*79channels* 1.665 ms =263.070ms	≅ 400ms	PASS
	3-DH5	16 hops/5s*0.4s*79channels* 2.930 ms =296.282ms	≅ 400ms	PASS



Note: All the lower levels were signaled from receiver and should not be considered in here.

**GFSK**



**DH 1**

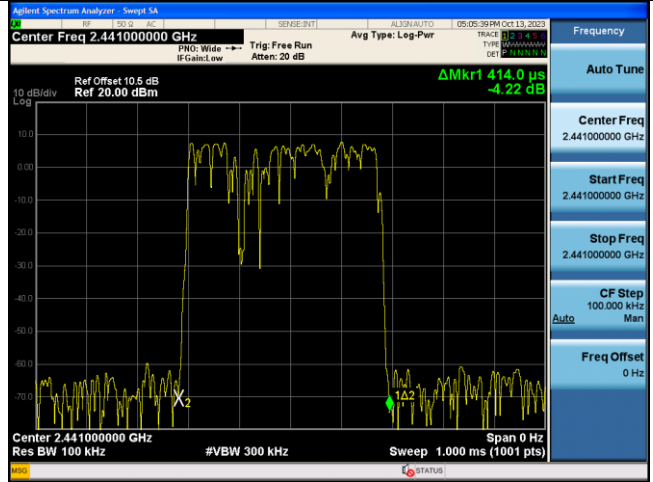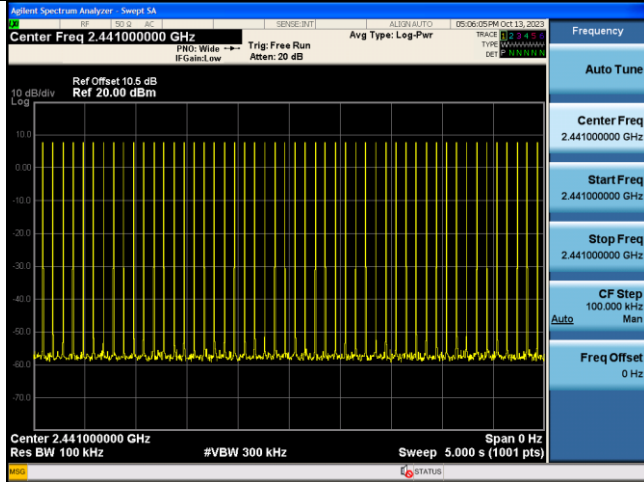

**DH 3**

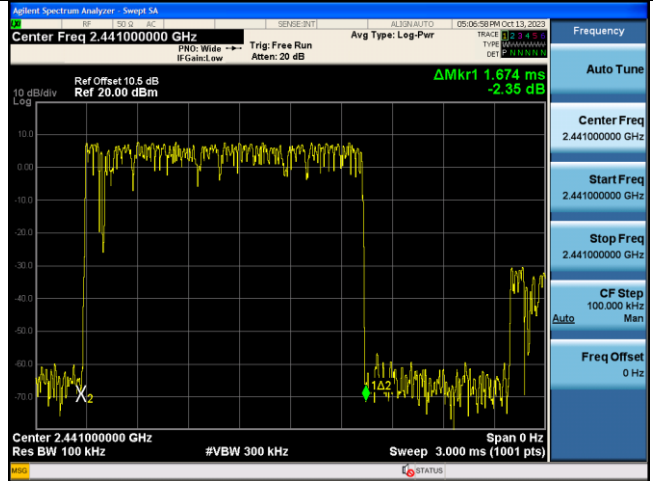
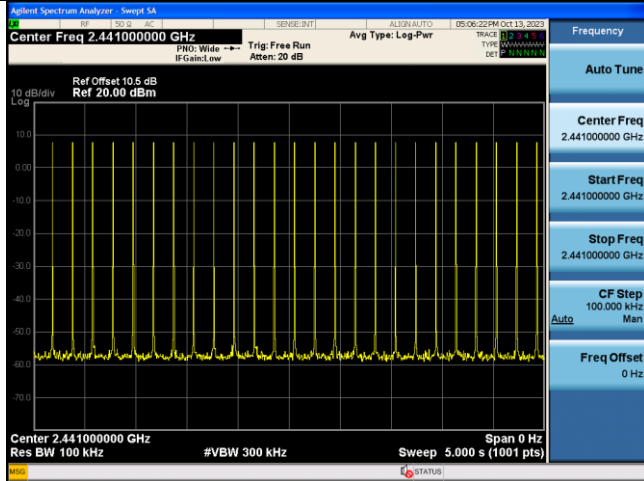


**DH 5**

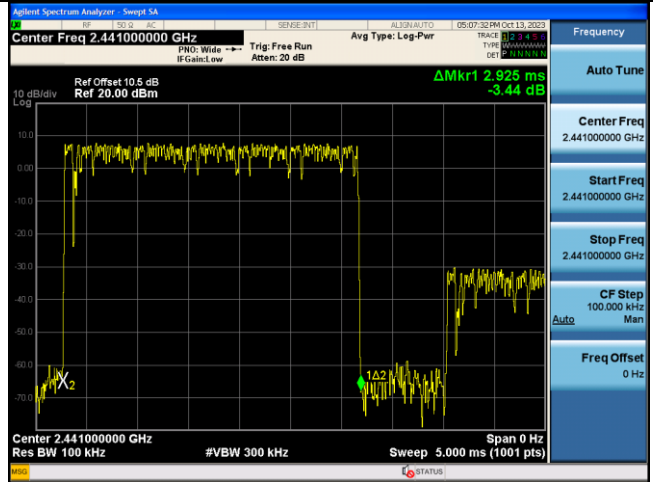
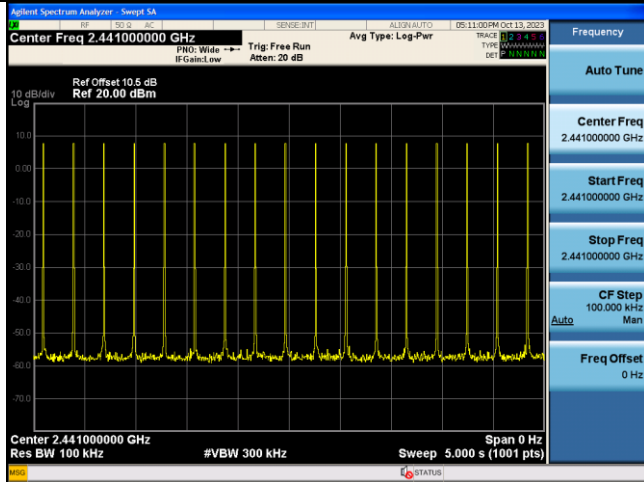


### 8-DPSK



#### 3DH 1

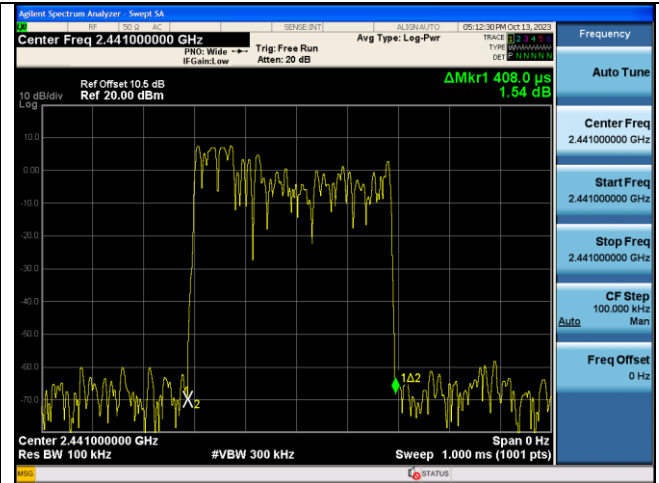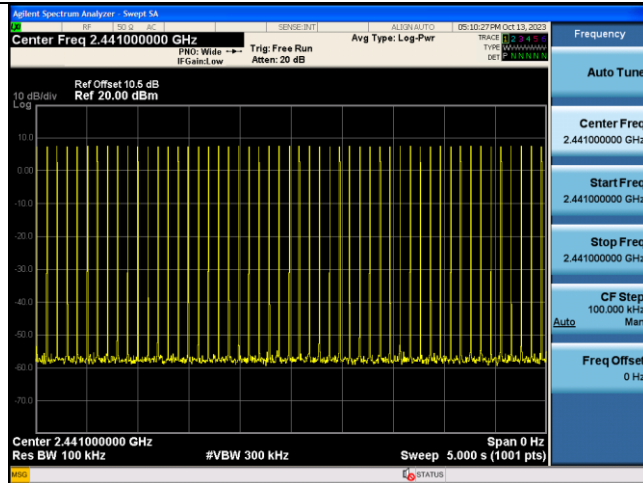

#### 3DH 3

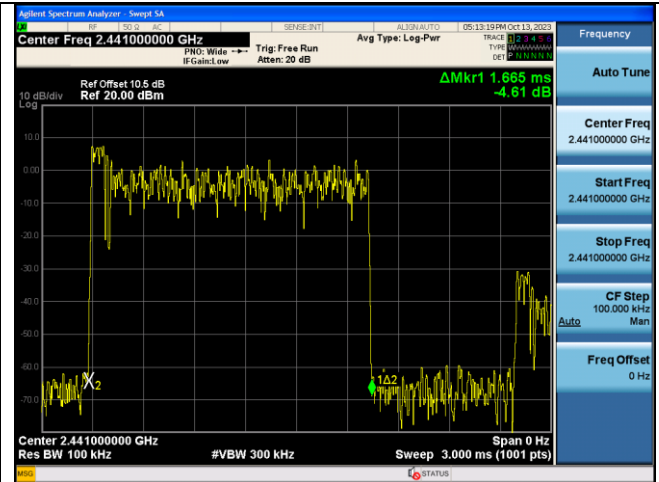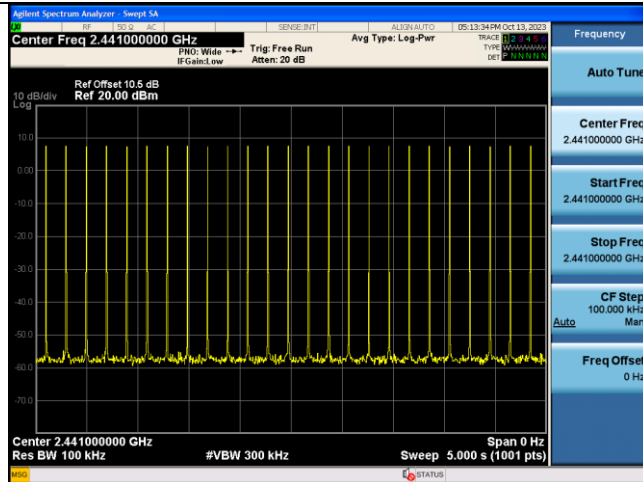

#### 3DH 5

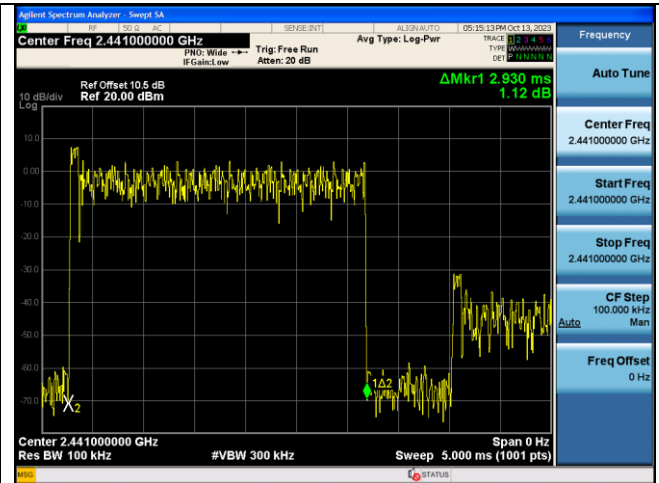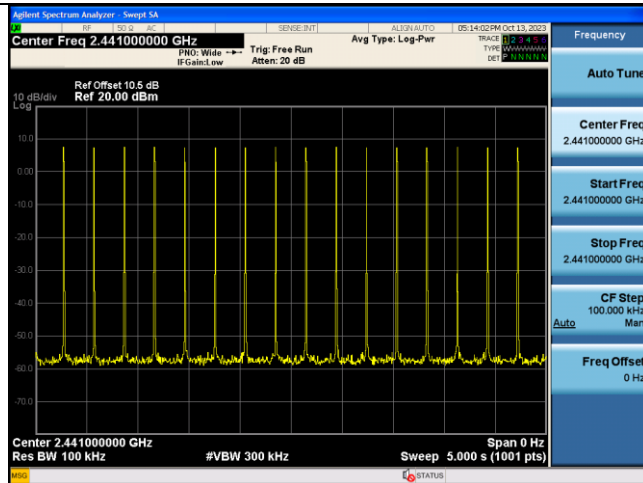

## 10. MAXIMUM PEAK OUTPUT POWER TEST

### 10.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.01,23	1 Year
2.	Power meter	Anritsu	ML2487A	6K00003262	Jun.26,23	1 Year
3.	Power sensor	Anritsu	MA2491A	032516	Jun.26,23	1 Year
4.	RF Cable	HUBER+SUHNER	SUCOFLE X-106	505238/6	Apr.02,23	1 Year

### 10.2. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

### 10.3. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.5:

For Peak output power: Connected the EUT's Antenna port to PXA signal analyzer;

For Average power: Connected the EUT's Antenna port to Power sensor and power meter;

### 10.4. Test Results


EUT: Wireless Speaker		
M/N: YY7862E		
Test date: 2023-09-25	Pressure: 102.4±1.0 kpa	Humidity: 54.7±3.0%
Tested by: Carl	Test site: RF site	Temperature: 23.6±0.6 °C

Test Mode	Frequency	Power Setting	Peak output Power ( dBm )	Average Power (dBm)	Limit (dBm)
GFSK	2402	56	8.743	8.730	21
	2441	56	8.562	8.490	
	2480	56	8.595	8.460	
8-DPSK	2402	56	8.836	5.850	21
	2441	56	8.686	5.880	
	2480	56	8.725	6.140	
Conclusion: PASS					




**GFSK**

**2402MHz**

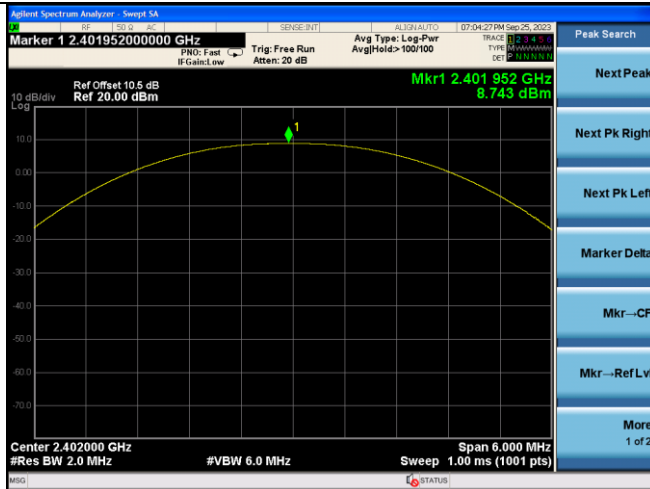


**8-DPSK**


**2402MHz**

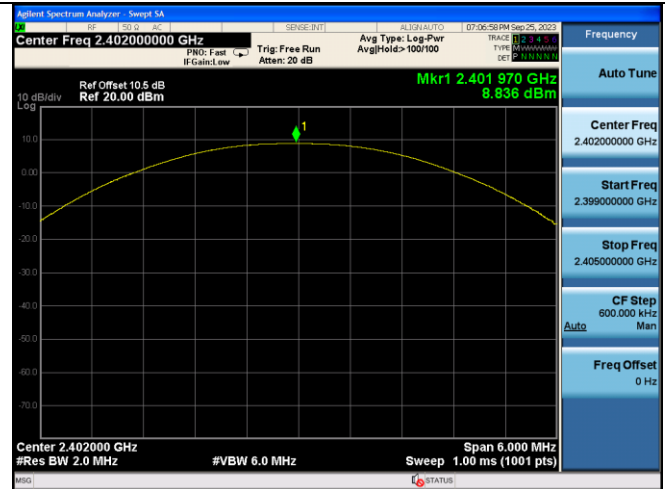


**2441MHz**

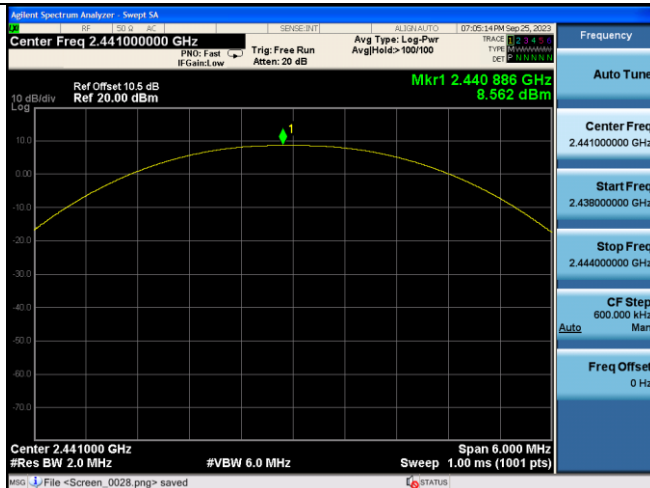


**2441MHz**

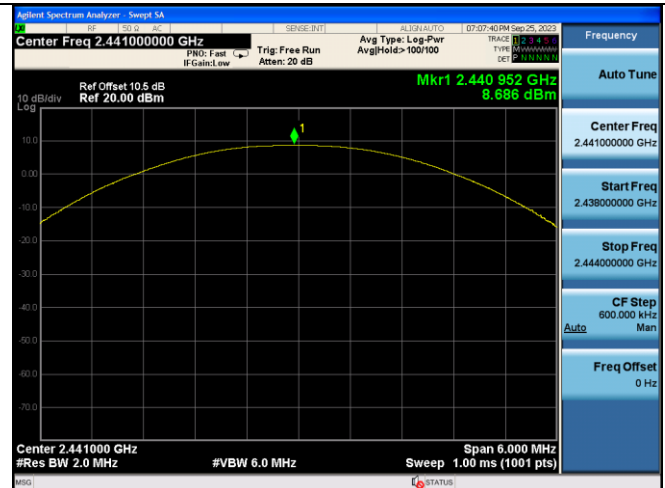

**2480MHz**

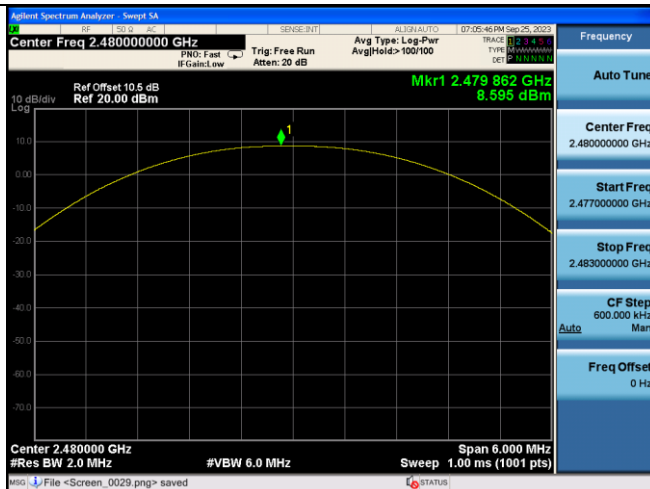

**2480MHz**

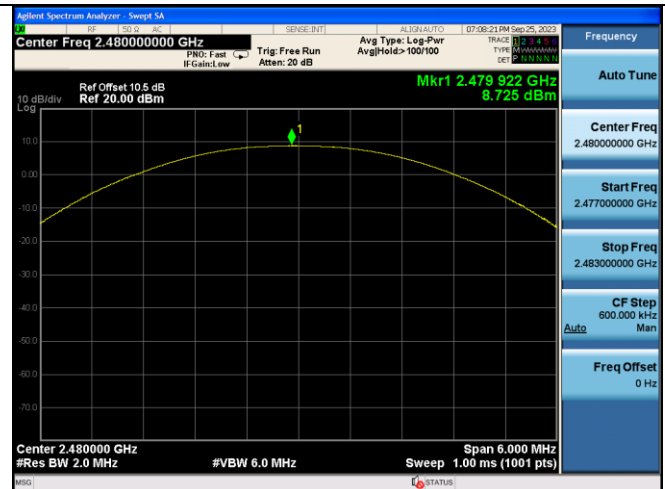

## 11. BAND EDGE COMPLIANCE TEST

### 11.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3mChamber(Svswr)	AUDIX	N/A	N/A	Aug.09,22	3Year
2.	3mChamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.01,23	1 Year
4.	Amplifier	EMCI	EMC0518A45SE	980965	Aug.25,23	1 Year
5.	RF Cable	Shanghaichaoyu	SFT205-NMSM-10.00M	689241	Aug.25,23	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Aug.23,23	1 Year

Note: N/A means Not applicable.

### 11.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 11.3. Test Produce

Use the test method described in ANSI C63.10 clause 7.8.6:

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relevant band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4. The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205

For emissions above two bandwidths away from the band-edge use below produce:


1. The EUT is placed on a insulating material (up to 12mm thick) worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
  - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
  - (b) This is pulse Modulation device a duty cycle factor was used to calculate average level based measured peak level.

#### 11.4. Test Results

Pass (The testing data was attached in the next pages.)

Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

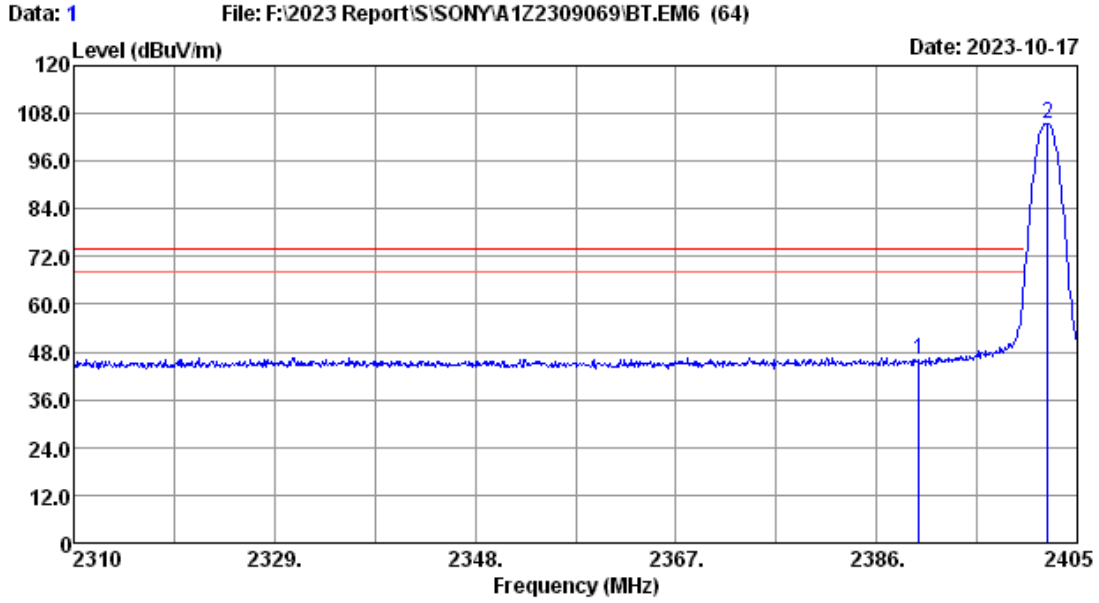


```

Site no.      : 3m Chamber                Data no.   : 1
Dis. / Ant.  : 3m 2023 MCTD1209-3006     Ant. pol.  : HORIZONTAL
Limit        : FCC PART 15C PEAK
Env. / Ins.  : 23.2*C/52.5%              Engineer   : nier
Test Mode    : BT GFSK 2402 MHz TX
:
:

```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.62	4.85	34.36	47.77	45.88	74.00	28.12	Peak
2	2402.25	27.61	4.86	34.36	107.19	105.30	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

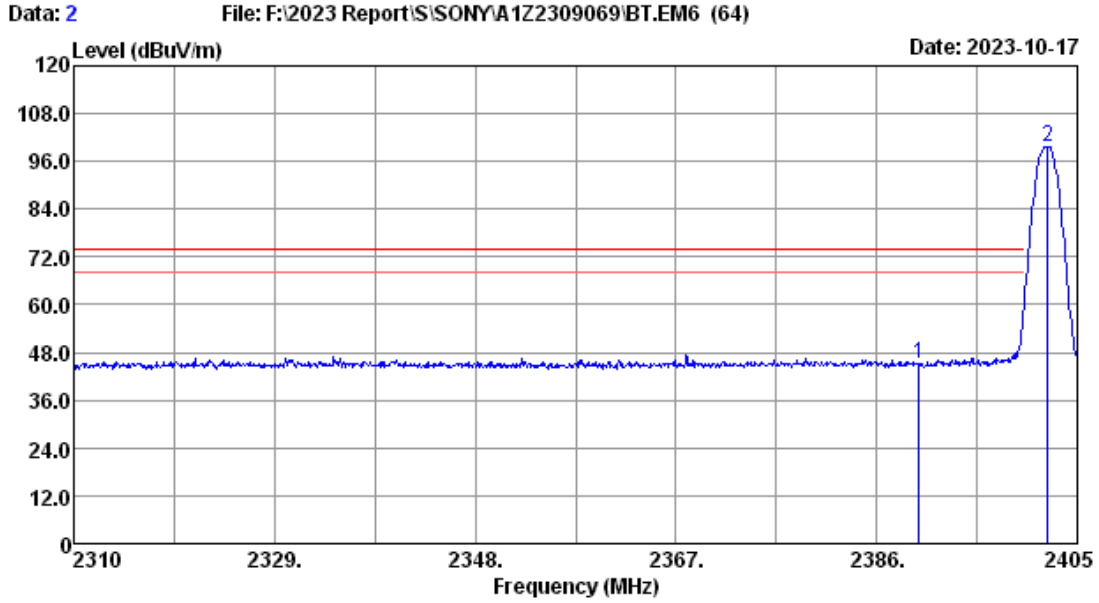

Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.2\*C/52.5% Engineer : nier  
 Test Mode : BT GFSK 2402 MHz TX  
 :  
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.62	4.85	34.36	47.17	45.28	74.00	28.72	Peak
2	2402.25	27.61	4.86	34.36	101.50	99.61	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

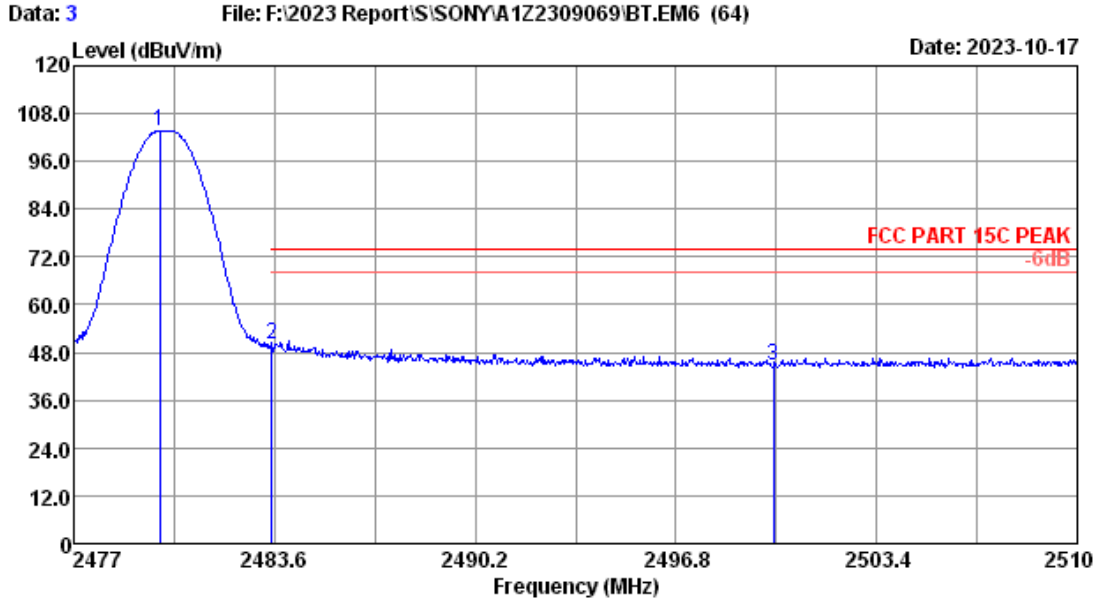

Site no. : 3m Chamber Data no. : 3  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.2\*C/52.5% Engineer : nier  
 Test Mode : BT GFSK 2480 MHz TX  
 :  
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.84	27.80	4.93	34.35	105.37	103.75	-----	-----	Peak
2	2483.50	27.80	4.94	34.35	51.54	49.93	74.00	24.07	Peak
3	2500.00	27.80	4.95	34.35	46.11	44.51	74.00	29.49	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

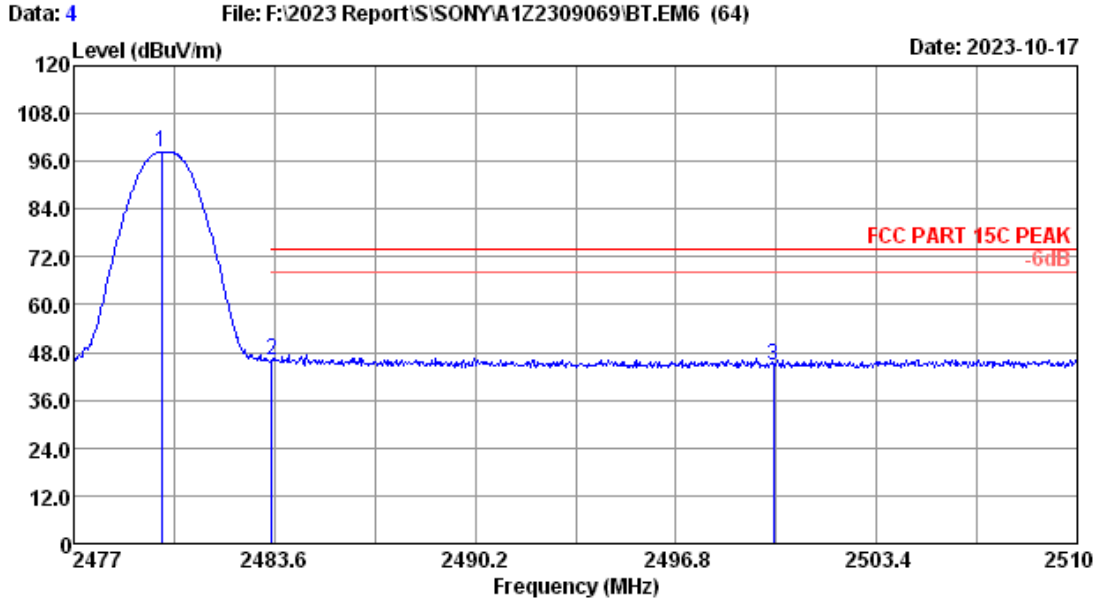

Site no. : 3m Chamber Data no. : 4  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.2\*C/52.5% Engineer : nier  
 Test Mode : BT GFSK 2480 MHz TX  
 :  
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.87	27.80	4.93	34.35	99.93	98.31	-----	-----	Peak
2	2483.50	27.80	4.94	34.35	47.65	46.04	74.00	27.96	Peak
3	2500.00	27.80	4.95	34.35	46.28	44.68	74.00	29.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

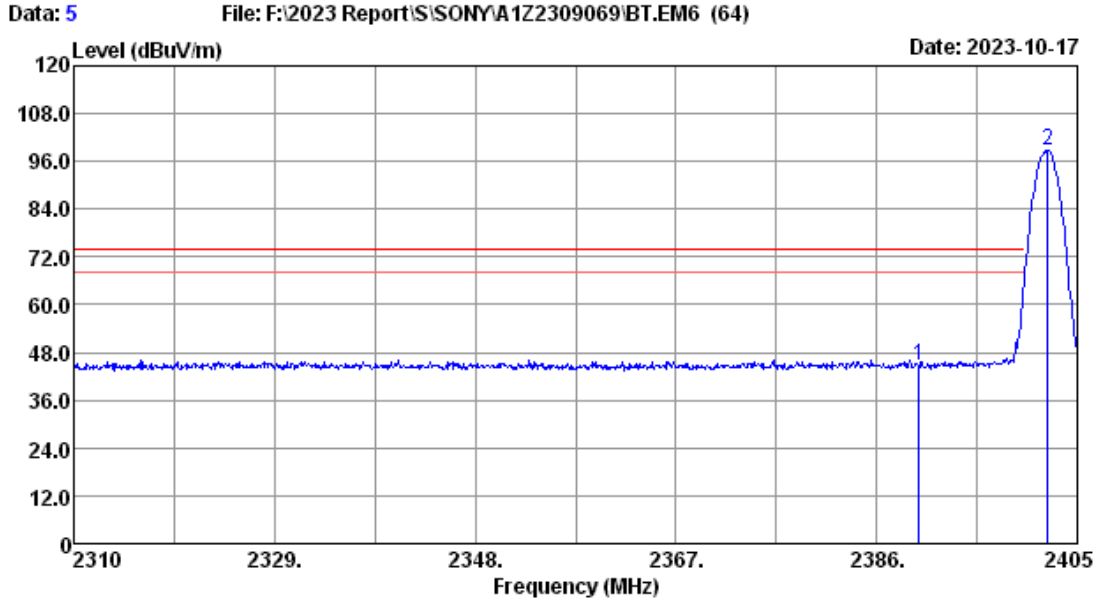

```


Site no.      : 3m Chamber                Data no.   : 5
Dis. / Ant.   : 3m 2023 MCTD1209-3006    Ant. pol.  : VERTICAL
Limit        : FCC PART 15C PEAK
Env. / Ins.   : 23.2*C/52.5%             Engineer   : nier
Test Mode     : BT 8DPSK 2402 MHz TX
:
:

```

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.62	4.85	34.36	46.71	44.82	74.00	29.18	Peak
2	2402.25	27.61	4.86	34.36	100.48	98.59	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
2. The emission levels that are 20dB below the official limit are not reported.




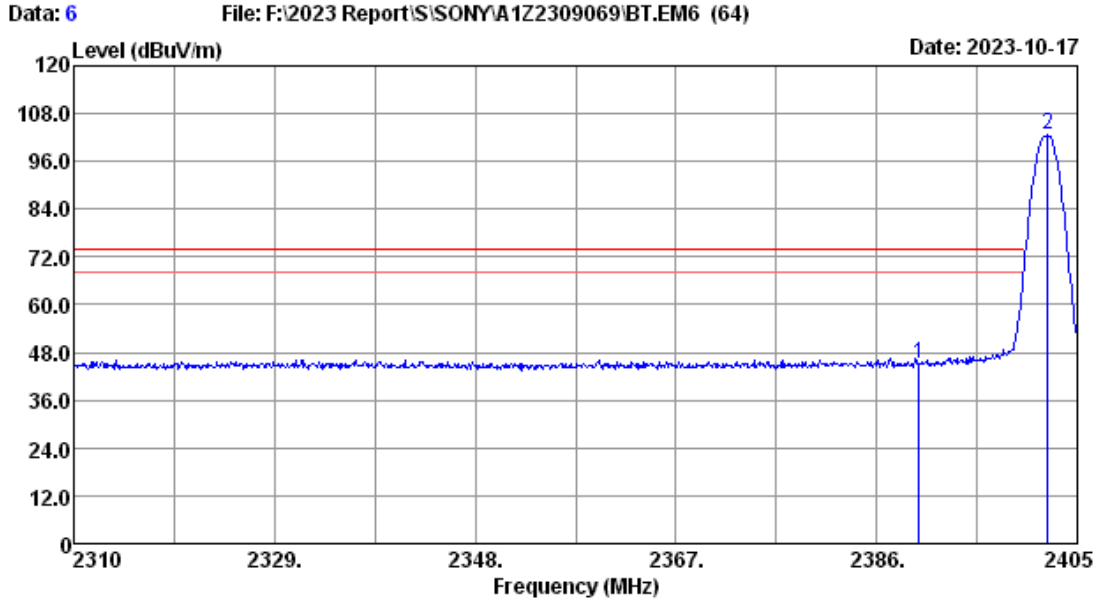

Site no. : 3m Chamber Data no. : 6  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.2\*C/52.5% Engineer : nier  
 Test Mode : BT 8DPSK 2402 MHz TX  
 :  
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.62	4.85	34.36	47.02	45.13	74.00	28.87	Peak
2	2402.25	27.61	4.86	34.36	104.41	102.52	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

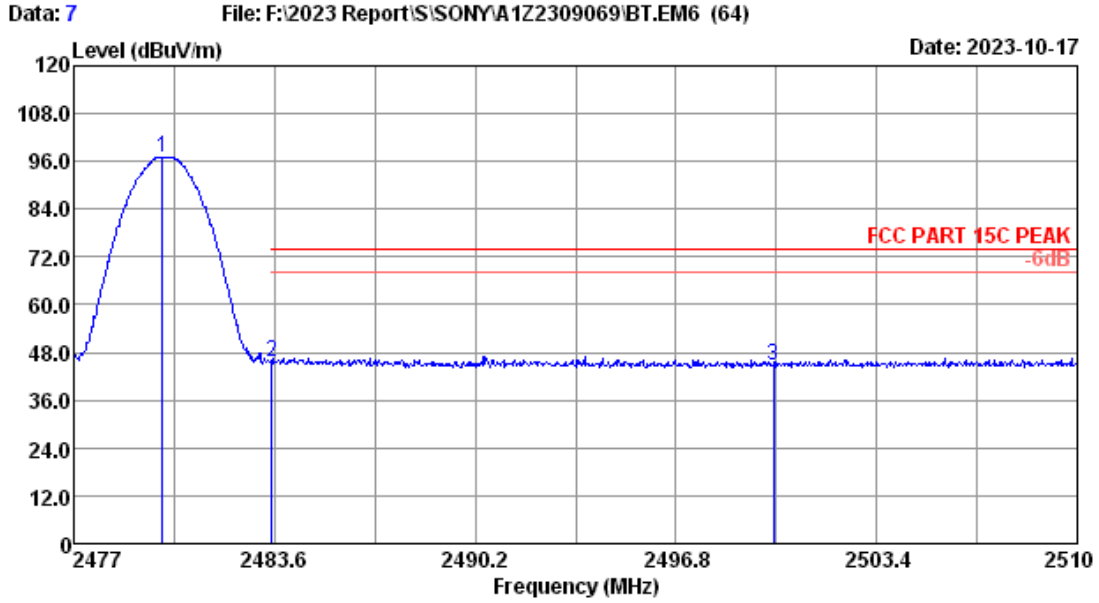

Site no. : 3m Chamber Data no. : 7  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.2\*C/52.5% Engineer : nier  
 Test Mode : BT 8DPSK 2480 MHz TX  
 :  
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.90	27.80	4.93	34.35	98.73	97.11	-----	-----	Peak
2	2483.50	27.80	4.94	34.35	47.10	45.49	74.00	28.51	Peak
3	2500.00	27.80	4.95	34.35	46.27	44.67	74.00	29.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp factor.  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

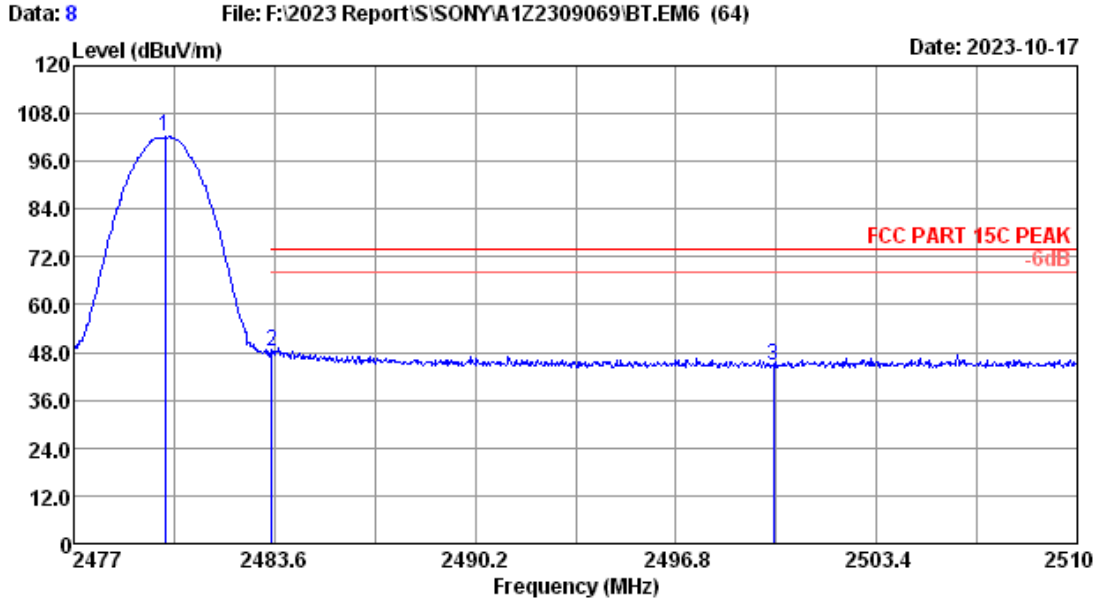

Site no. : 3m Chamber Data no. : 8  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.2\*C/52.5% Engineer : nier  
 Test Mode : BT 8DPSK 2480 MHz TX  
 :  
 :

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.80	4.93	34.35	103.70	102.08	-----	-----	Peak
2	2483.50	27.80	4.94	34.35	49.70	48.09	74.00	25.91	Peak
3	2500.00	27.80	4.95	34.35	46.36	44.76	74.00	29.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 12. ANTENNA REQUIREMENT

### 12.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 12.2. Antenna Connected Construction

The antennas used for this product are Internal PCB Antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.77dBi.

**13.DEVIATION TO TEST SPECIFICATIONS**

[NONE]

..... **THE END** .....