

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Sony Group Corporation

Wireless Speaker

YY7866E

FCC ID: AK8YY7866E

SONY

Prepared for : Sony Group Corporation  
1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Kefeng Road, Science & Technology Park,  
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496



Report Number : ACS-F24141

Date of Test : Jul.26~Sep.09, 2024

Date of Report : Sep.14, 2024

**TABLE OF CONTENTS**

<u>Description</u>	<u>Page</u>
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>5</b>
1.1. Description of Standards and Results .....	5
<b>2. GENERAL INFORMATION.....</b>	<b>6</b>
2.1. Description of Equipment Under Test .....	6
2.2. Feature of Equipment Under Test.....	7
2.3. Tested Supporting System Details .....	8
2.4. Block Diagram of connection between EUT and simulators.....	8
2.5. Test information.....	8
2.6. Test Facility .....	10
2.7. Measurement Uncertainty (95% confidence levels, k=2).....	10
<b>3. POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>11</b>
3.1. Test Equipments.....	11
3.2. Block Diagram of Test Setup.....	11
3.3. Power Line Conducted Emission Test Limits.....	11
3.4. Configuration of EUT on Test .....	11
3.5. Operating Condition of EUT.....	12
3.6. Test Procedure .....	12
3.7. Power Line Conducted Emission Test Results .....	12
<b>4. RADIATED EMISSION TEST .....</b>	<b>15</b>
4.1. Test Equipments.....	15
4.2. Block Diagram of Test Setup.....	16
4.3. Radiated Emission Limits Standard:.....	17
4.4. EUT Configuration on Test .....	17
4.5. Operating Condition of EUT.....	17
4.6. Test Procedure .....	18
4.7. Radiated Emission Test Results.....	18
<b>5. CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>59</b>
5.1. Test Equipments.....	59
5.2. Block Diagram of Test Setup.....	59
5.3. Limit.....	59
5.4. Test Procedure .....	59
5.5. Test result.....	59
<b>6. 20 DB &amp; 99% BANDWIDTH TEST .....</b>	<b>66</b>
6.1. Test Equipments.....	66
6.2. Limit.....	66
6.3. Test Procedure .....	66
6.4. Test Results .....	67
<b>7. CARRIER FREQUENCY SEPARATION TEST.....</b>	<b>69</b>
7.1. Test Equipments.....	69
7.2. Limit.....	69
7.3. Test Procedure .....	69
7.4. Test Results.....	70
<b>8. NUMBER OF HOPPING FREQUENCY TEST.....</b>	<b>71</b>
8.1. Test Equipments.....	71

8.2.	Limit.....	71
8.3.	Test Procedure .....	71
8.4.	Test Results .....	72
<b>9.</b>	<b>DWELL TIME TEST .....</b>	<b>73</b>
9.1.	Test Equipments.....	73
9.2.	Limit.....	73
9.3.	Test Procedure .....	73
9.4.	Test Results .....	74
<b>10.</b>	<b>MAXIMUM PEAK OUTPUT POWER TEST.....</b>	<b>77</b>
10.1.	Test Equipments.....	77
10.2.	Limit.....	77
10.3.	Test Procedure .....	77
10.4.	Test Results .....	78
<b>11.</b>	<b>BAND EDGE COMPLIANCE TEST .....</b>	<b>81</b>
11.1.	Test Equipments.....	81
11.2.	Limit.....	81
11.3.	Test Produce .....	81
11.4.	Test Results .....	82
<b>12.</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>91</b>
12.1.	Standard Applicable.....	91
12.2.	Antenna Connected Construction .....	91
<b>13.</b>	<b>DEVIATION TO TEST SPECIFICATIONS.....</b>	<b>92</b>

- Appendix A. Setup Photographs
- Appendix B. General Appearance of the EUT
- Appendix C. Inside Configuration of the EUT

## TEST REPORT

Applicant : Sony Group Corporation  
Manufacturer : Sony Group Corporation  
Product : Wireless Speaker  
FCC ID : AK8YY7866E  
(A) Model No. : YY7866E  
(B) Brand : SONY  
(C) Test Voltage : DC 5V from adaptor input AC 120V/60Hz  
DC 9V from adaptor input AC 120V/60Hz  
DC 7.2V from battery

Tested for comply with:  
FCC CFR47 Part 15 Subpart C

Test procedure used:  
ANSI C63.10:2020+COR1:2023

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

This report applies to single evaluation of one sample of above mentioned product and shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd..

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Date of Test : Jul.26~Sep.09, 2024 Date of Report: Sep.14, 2024

Prepared by : Dora Yang Reviewed by : Thomas Chen  
Dora Yang / Assistant Thomas Chen / Assistant Manager



Approved & Authorized Signer : Signature: Sunny Lu  
Sunny Lu / Manager

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

<b>EMISSION</b>		
<b>Description of Test Item</b>	<b>Standard</b>	<b>Results</b>
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10:2020+COR1:2023	PASS
Radiated Emission Test	FCC Part 15 15.209 FCC Part 15 15.205 FCC Part 15 15.247(d) ANSI C63.10:2020+COR1:2023	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(d) ANSI C63.10 2020	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1) ANSI C63.10:2020+COR1:2023	PASS
20dB & 99% Bandwidth Test	FCC Part 15: 15.215(c) ANSI C63.10:2020+COR1:2023	PASS
Number Of Hopping Frequency Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2020+COR1:2023	PASS
Dwell Time Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2020+COR1:2023	PASS
Maximum Peak Output Power Test	FCC Part 15 15.247(b)(1) ANSI C63.10:2020+COR1:2023	PASS
Band Edge Compliance Test	FCC Part 15 15.247(d) ANSI C63.10:2020+COR1:2023	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

Note: Measurement uncertainty affection to the result is not considered, the EUT is technically compliant with standard requirements.

## 2. GENERAL INFORMATION

### 2.1. Description of Equipment Under Test

Applicant	Sony Group Corporation
Applicant Address	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Manufacturer	Sony Group Corporation
Manufacturer Address	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Product	Wireless Speaker
Model No.	YY7866E
FCC ID	AK8YY7866E
Brand	SONY
USB-C Cable	Shielded, Detachable, 0.5m
Sample Type	Prototype production
Date of Receipt	Jul.24, 2024
Date of Test	Jul.26~Sep.09, 2024
Remark: This report only for BDR+EDR.	


## 2.2. Feature of Equipment Under Test

<b>Product Feature &amp; Specification</b>		
Product	Wireless Speaker	
Model No.	YY7866E	
Radio	BDR +EDR; BLE	
Power Source	<input type="checkbox"/> Commercial Power	AC V
	<input checked="" type="checkbox"/> External Power Source	5Vdc / 9Vdc, 3A
	<input checked="" type="checkbox"/> Lithium battery	DC 7.2V
	<input type="checkbox"/> UM battery	DC V
<b>Bluetooth</b>		
Radio	BDR +EDR; BLE	
Frequency Range	2402-2480MHz	
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8-DPSK	
Data Rate	1Mbps, 2Mbps, 3Mbps	
Quantity of Channels	79/40(BLE-1Mbps)/37(BLE-2Mbps)	
Channel Separation	1MHz/2MHz	
<b>Antenna System</b>		
Type of Antenna	Pattern antenna	
Antenna Peak Gain	3.8dBi	

### 2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	ACER	ZOW	N/A
		Power Cord(3C): Unshielded, Detachable, 1.8m Power Adaptor: Manufacturer: Lite-On, M/N: PA-1900-32 Cable: Unshielded, Undetectable, 4.0m(Bond one ferrite core)			
2.	Adaptor	Manufacturer: Sony, M/N:AC-045AX7T INPUT: 100V-240V~50Hz/60Hz 1.4A OUTPUT:DC 5V 3A 15W; DC 9V 3A 27W; DC 12V 3A 36W; DC 15V 3A 45W; DC 20V 2.25A 45W			

### 2.4. Block Diagram of connection between EUT and simulators



**(EUT: Wireless Speaker)**

### 2.5. Test information

A special software (Airoha. Tool. Kit) was used to control EUT work in TX mode

Tested mode, Packet Type, peak output power information			
Mode	Packet Type	Output power(dBm) P max	Output Power(dBm) P low
GFSK	DH1	9.438	9.321
	DH3		
	DH5		
8-DPSK	3-DH1	9.512	9.354
	3-DH3		
	3-DH5		

Note:  $\pi/4$ DQPSK mode has been verified to have the lowest power, so the final test were performed with GFSK and 8-DPSK mode, the worse-case packet type were:

GFSK Mode: DH5

8-DPSK Mode: 3-DH5



Item		Modulation	Data Rate	Test Channel
Radiated Test Case	Radiated Band Edge	GFSK	1Mbps	00/78
		8-DPSK	3Mbps	00/78
	Radiated Emission Test	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
Conducted Test Case	20dB & 99% Bandwidth	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Carrier Frequency Separation	GFSK	1Mbps	Hopping Channel
		8-DPSK	3Mbps	Hopping Channel
	Dwell Time	GFSK	1Mbps	Hopping Channel
		8-DPSK	3Mbps	Hopping Channel
	Number Of Hopping Frequency	GFSK	1Mbps	Hopping Channel
		8-DPSK	3Mbps	Hopping Channel
	Maximum Peak Output Power	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78
	Band Edge Compliance	GFSK	1Mbps	00/78
		8-DPSK	3Mbps	00/78
	Conducted Spurious Emissions	GFSK	1Mbps	00/39/78
		8-DPSK	3Mbps	00/39/78

**2.6. Test Facility**

Site Description

Name of Firm

: Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Kefeng Road, Science & Technology Park,  
Nanshan District , Shenzhen, Guangdong, China

EMC Lab.

: Certificated by ISED, Canada  
Company Number: 5183A  
CAB identifier: CN0034  
Valid Date: Mar.31, 2025

Certificated by FCC, USA  
Designation No.: CN5022  
Valid Date: Mar.31, 2025

Accredited by NVLAP, USA  
NVLAP Code: 200372-0  
Valid Date: Mar.31, 2026

**2.7. Measurement Uncertainty (95% confidence levels, k=2)**

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	$\pm 2.6\text{dB}(150\text{KHz to } 30\text{MHz})$
Uncertainty for Radiation Emission test in 3m chamber	$\pm 3.8\text{dB}(30\sim 200\text{MHz, Polarization: H})$
	$\pm 3.8\text{dB}(30\sim 200\text{MHz, Polarization: V})$
	$\pm 4.0\text{dB}(200\text{M}\sim 1\text{GHz, Polarization: H})$
	$\pm 4.0\text{dB}(200\text{M}\sim 1\text{GHz, Polarization: V})$
Uncertainty for Radiation Emission test in 3m chamber(1GHz-18GHz)	$\pm 4.0\text{dB}(1\sim 6\text{GHz, Distance: } 3\text{m})$
	$\pm 4.0\text{dB}(6\sim 18\text{GHz, Distance: } 3\text{m})$
Uncertainty for $S_{\text{vswr}}$ in 3m Chamber	$\pm 2.8\text{dB}(1\sim 6\text{GHz})$
	$\pm 2.8\text{dB}(6\sim 18\text{GHz})$
Uncertainty for Radiated Spurious Emission test in RF chamber	$\pm 3.7\text{dB}(30\text{MHz}\sim 1000\text{MHz})$
	$\pm 3.3\text{dB}(1\sim 26.5\text{GHz})$
Uncertainty for Conduction Spurious emission test	$\pm 2.0\text{dB}$
Uncertainty for Output power test	$\pm 0.8\text{dB}$
Uncertainty for Bandwidth test	$\pm 4.6\%$
Uncertainty for DC power test	$\pm 0.1\%$
Uncertainty for test site temperature and humidity	$\pm 0.6^{\circ}\text{C}$
	$\pm 3\%$


### 3. POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Nov.09,22	3 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Mar.16,24	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jun.19,24	1 Year
4.	RF Cable	Eastsheep	RG223	190424	Sep.15,23	1Year
5.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

#### 3.2. Block Diagram of Test Setup

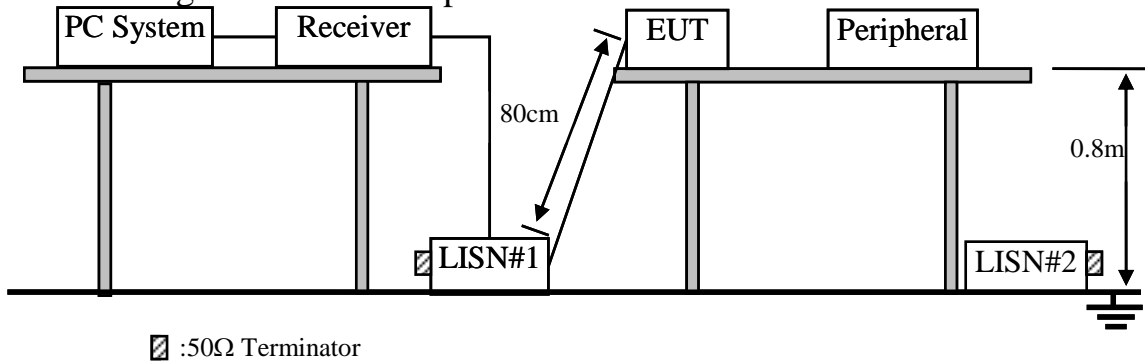

#### 3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limits shall apply at the transition frequencies.

3. Emission Level (dBμV) = Factor (L.I.S.N.) (dB) + Cable Loss (dB)+Reading (Receiver) (dBμV)

#### 3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

##### 3.4.1. Wireless Speaker (EUT)

Model No. : YY7866E

Serial No. : N/A

##### 3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.3.

### 3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT as shown as Section 3.2.
- 3.5.2. Turn on the power of EUT.
- 3.5.3. PC run test software to control EUT work in Tx mode.

### 3.6. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via Adapter connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 3.7. Power Line Conducted Emission Test Results

**PASS.** (All emissions not reported below are too low against the prescribed limits.)

Data: 1 File: E:\1#CE\2024 Report Data\SONYA1Z2407126-RF.EM6 (6) Date: 2024-08-09

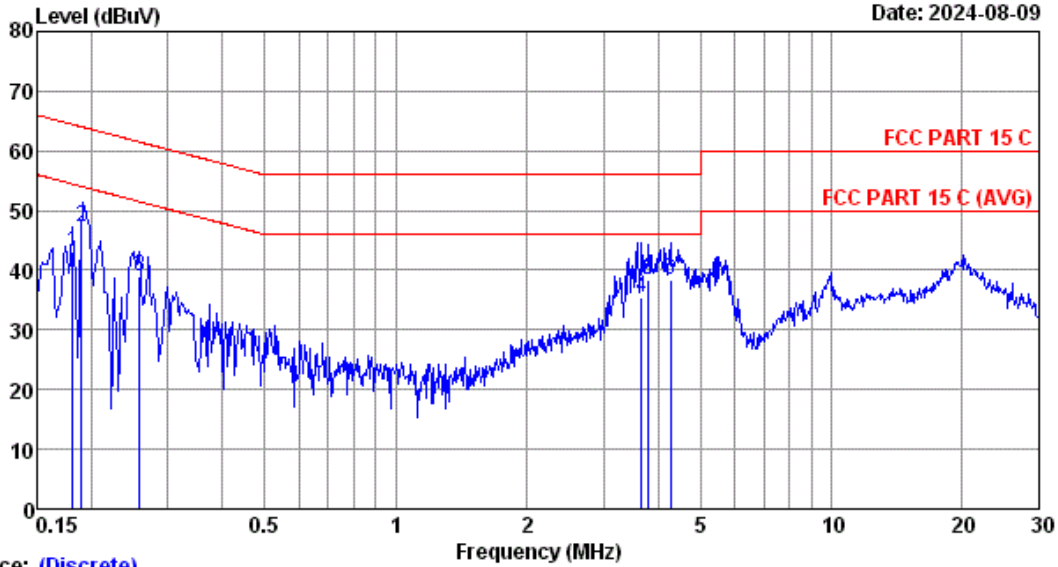


Trace: (Discrete)  
 Site no :1# CE Data No :1  
 Dis./Lisn :2024 ENV216-L  
 Limit :FCC PART 15 C  
 Env./Ins. :24.5+C/57% Engineer :Hongjie  
 Test Mode :BT3.0 TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.182	9.76	0.01	33.33	43.10	64.42	21.32	QP
2	0.190	9.76	0.01	37.50	47.27	64.04	16.77	QP
3	0.258	9.76	0.01	29.23	39.00	61.51	22.51	QP
4	3.662	9.80	0.05	25.51	35.36	56.00	20.64	QP
5	3.799	9.81	0.05	28.42	38.28	56.00	17.72	QP
6	4.269	9.81	0.06	28.59	38.46	56.00	17.54	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector.  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

Data: 2 File: E:\1#CE\2024 Report Data\SONYA1Z2407126-RF.EM6 (6) Date: 2024-08-09

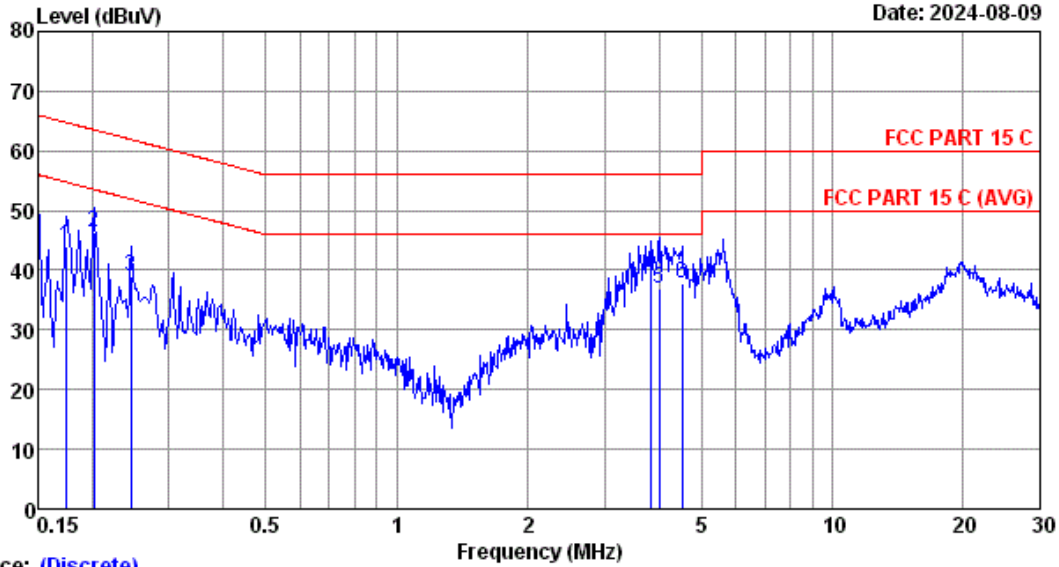

Trace: (Discrete)  
 Site no :1# CE Data No :2  
 Dis./Lisn :2024 ENV216-N  
 Limit :FCC PART 15 C  
 Env./Ins. :24.5+C/57% Engineer :Hongjie  
 Test Mode :BT3.0 TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.174	9.77	0.01	34.28	44.06	64.77	20.71	QP
2	0.202	9.78	0.01	36.50	46.29	63.53	17.24	QP
3	0.246	9.78	0.01	29.16	38.95	61.91	22.96	QP
4	3.820	9.82	0.05	29.12	38.99	56.00	17.01	QP
5	4.010	9.82	0.05	26.90	36.77	56.00	19.23	QP
6	4.525	9.83	0.06	27.96	37.85	56.00	18.15	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector. the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## 4. RADIATED EMISSION TEST

### 4.1. Test Equipments

Frequency range: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	3Year
2.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.07,23	1 Year
4.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	429	Oct.10,23	1 Year
5.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.20,23	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6201397223	Mar.17,24	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Mar.17,24	1 Year
8.	Amplifier	HP	8447D	2944A11159	Mar.17,24	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A


Note: N/A means Not applicable.

Frequency range: above 1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3mChamber(Svswr)	AUDIX	N/A	N/A	Aug.09,22	3Year
2.	3mChamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3Year
3.	Signal Analyzer	Rohde & Schwarz	FSV40	101608	Nov.07,23	1 Year
4.	Amplifier	EMCI	EMC0518A45S E	980965	Aug.25,23	1 Year
5.	RF Cable	TIMES MICROWAVE	SFT205-NMSM- 10.00M	689241	Aug.25,23	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Aug.23,23	1 Year

Note: N/A means Not applicable.

**4.2. Block Diagram of Test Setup**  
For frequency range 30MHz-1000MHz

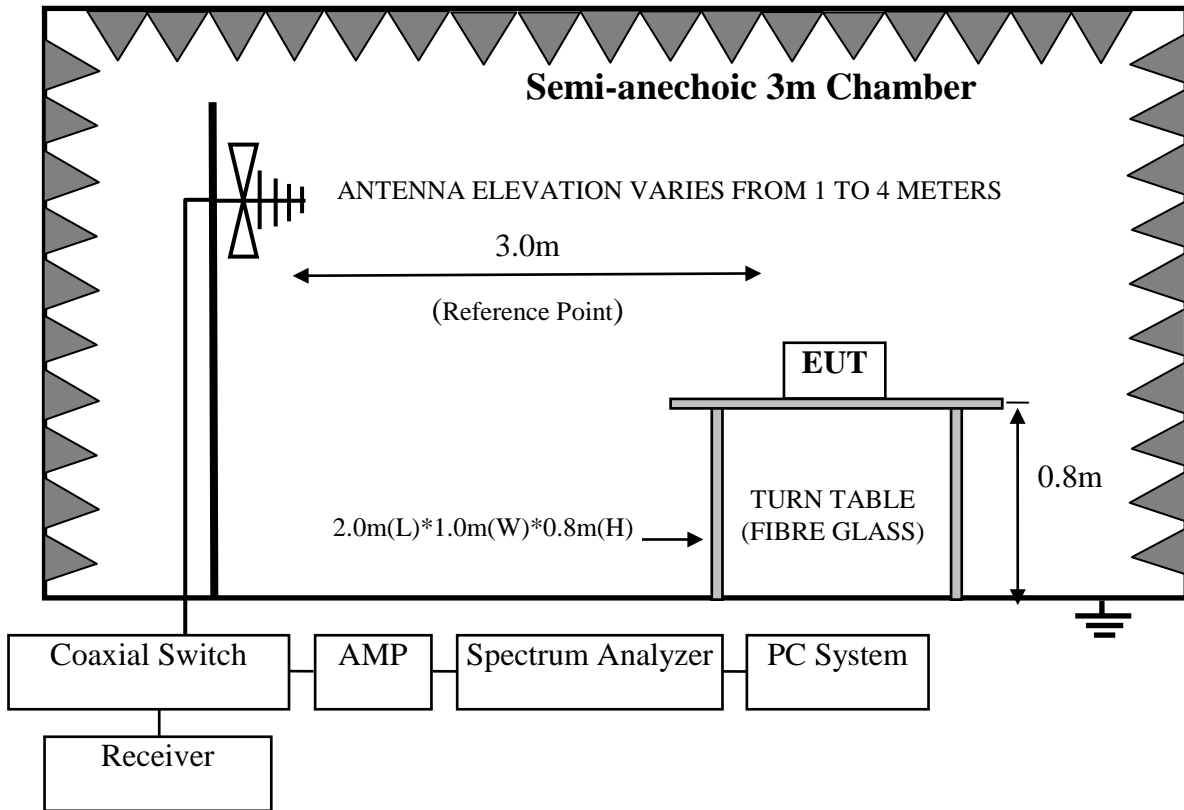

For frequency range above 1GHz

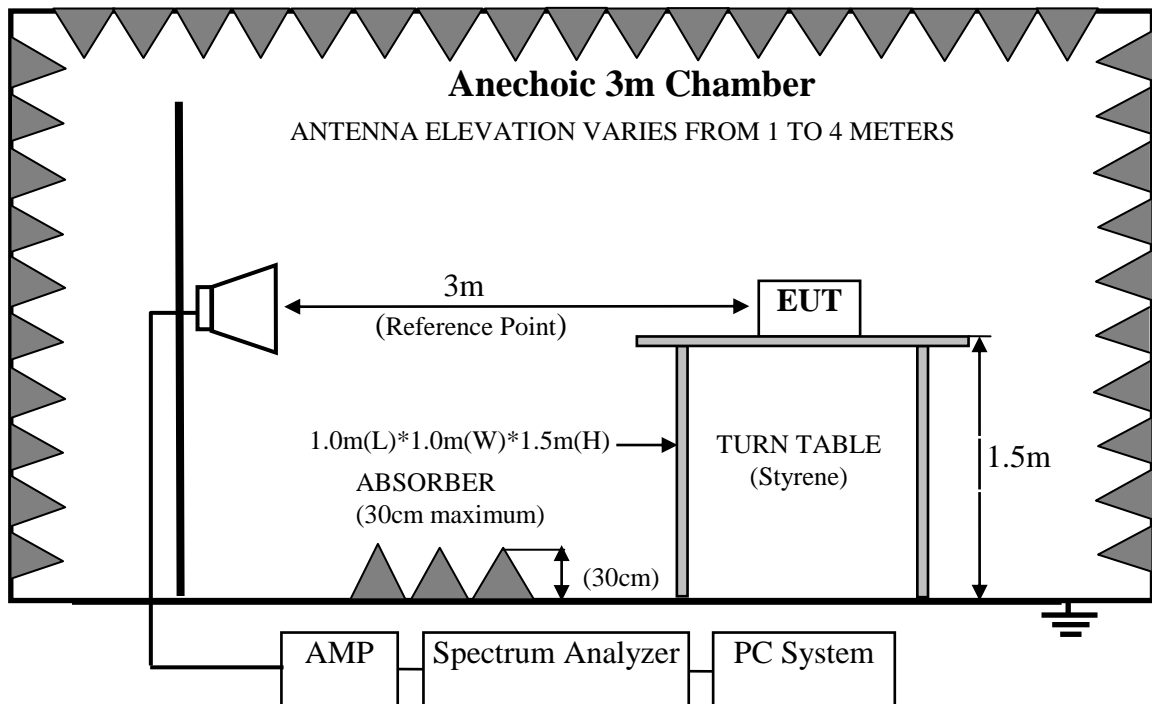



**4.3. Radiated Emission Limits Standard:**

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission Level ( $\text{dB}\mu\text{V}/\text{m}$ ) = Reading (Receiver) ( $\text{dB}\mu\text{V}$ ) + Antenna Factor ( $\text{dB}/\text{m}$ ) + Cable Loss ( $\text{dB}$ )  
Emission Level ( $\text{dB}\mu\text{V}/\text{m}$ ) = Reading (Spectrum) ( $\text{dB}\mu\text{V}$ ) + Antenna Factor ( $\text{dB}/\text{m}$ ) – Amp Factor ( $\text{dB}$ ) + Cable Loss ( $\text{dB}$ )(above 1000MHz)
  - (2) The smaller limits shall apply at the cross point between two frequency bands.
  - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
  - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

**4.4. EUT Configuration on Test**

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

**4.4.1. Wireless Speaker (EUT)**

Model Number : YY7866E  
Serial Number : N/A

**4.5. Operating Condition of EUT**

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in Tx mode.

#### 4.6. Test Procedure

##### **Frequency below 30MHz:**

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

##### **Frequency Above 30MHz:**

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)\*2.4m(W)\*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10 on radiated emission Test

The bandwidth of the EMI test receiver (R&S ESR3) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

#### 4.7. Radiated Emission Test Results

##### **PASS.**



All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note 1: The duty cycle factor for calculate average level is -30.737dB.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.


Duty cycle factor =  $20\log(\text{Dwell time}/100\text{ms}) = -30.737\text{dB}$

Dwell Time =  $2.905 * 1\text{ms}$

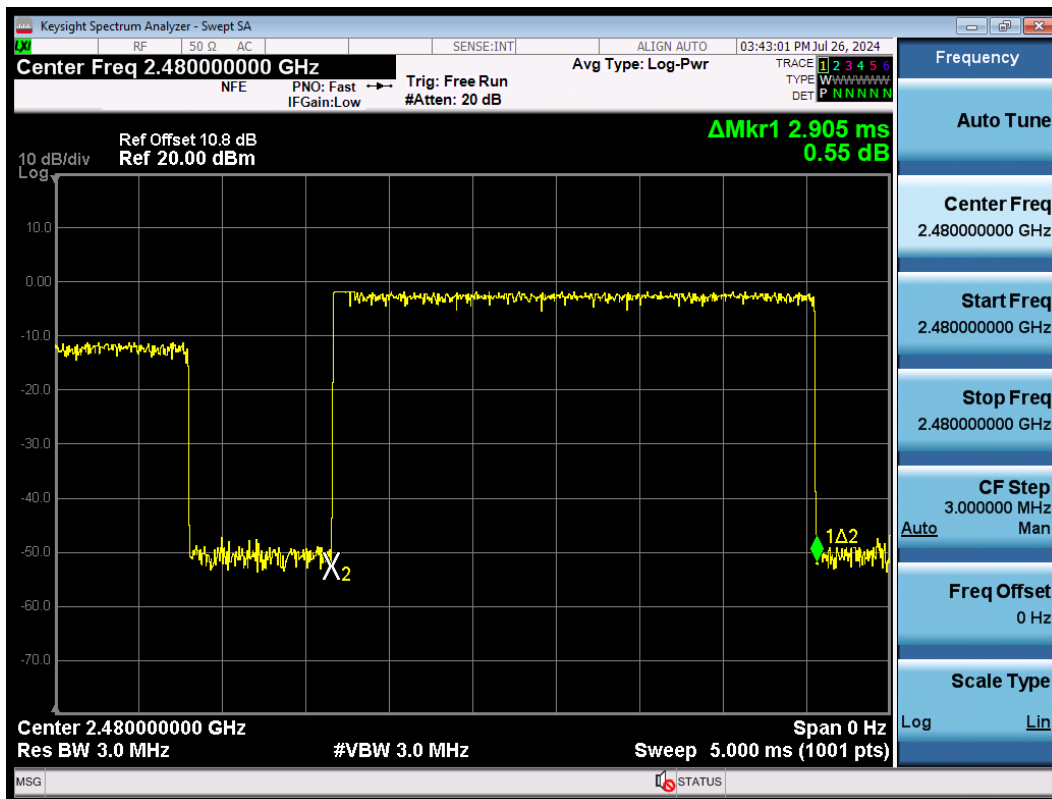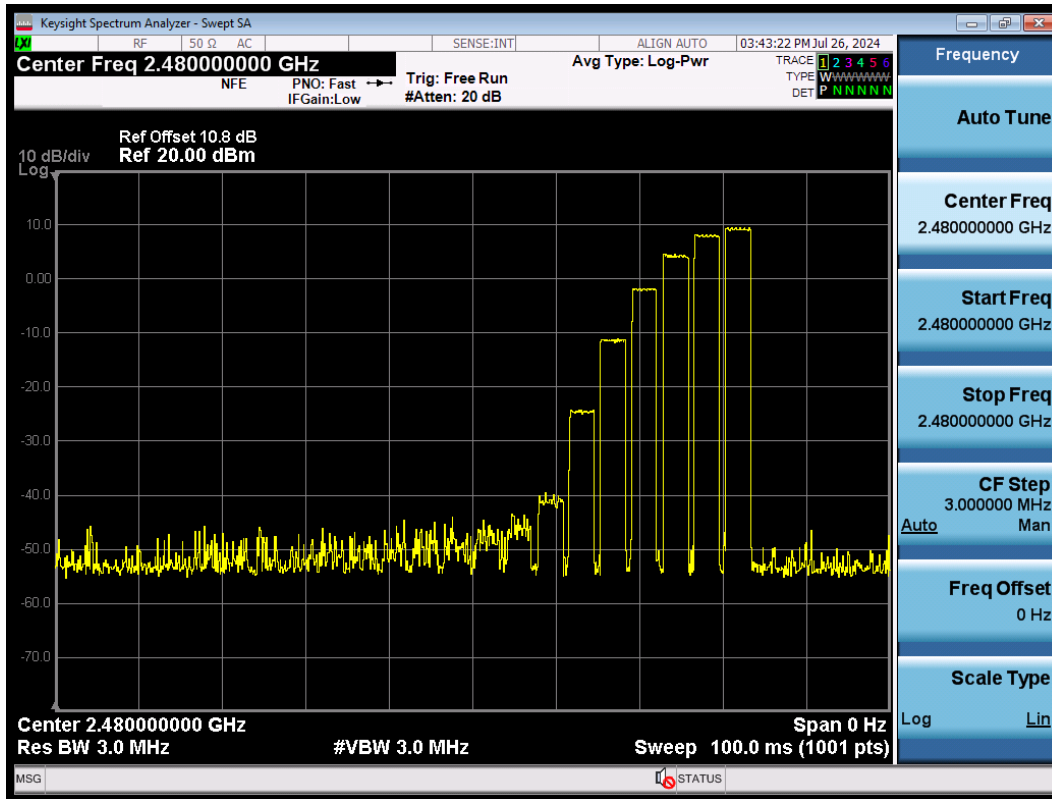

Frequency: 30MHz~1GHz


Data: 1 File: E:\2024 Report Data\S\sony\A1Z2407126-RF.EM6 (6) Date: 2024-08-06

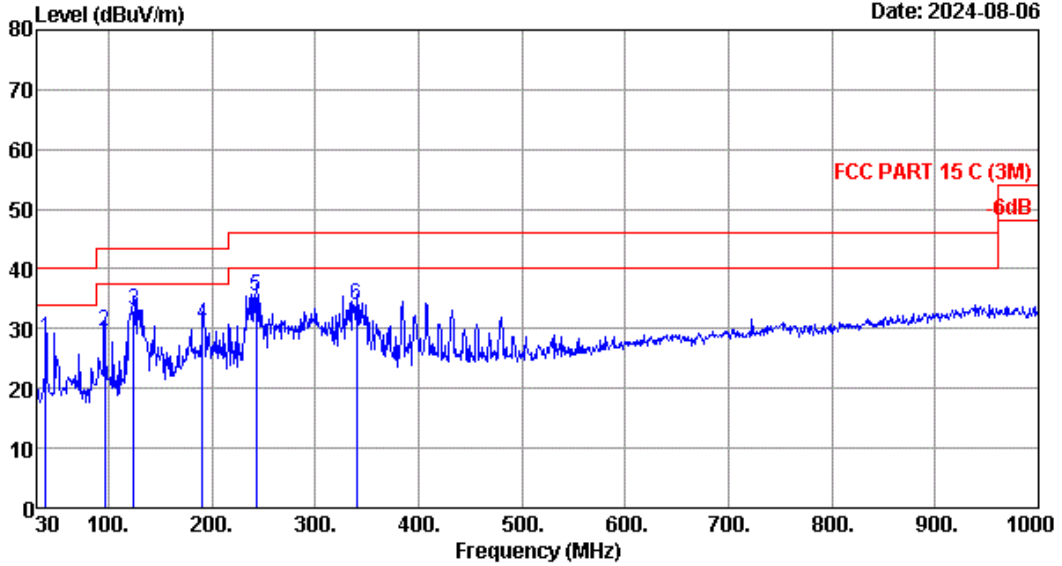

Site no. : 3m Chamber Data no. : 1  
 Dis. / Ant. : 3m 2023 VULB 9168-429 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 25.6\*C/57% Engineer : Abel  
 EUT : Wireless Speaker  
 Test Mode : BT3.0 TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	38.730	19.20	0.56	8.63	28.39	40.00	11.61	QP
2	95.960	14.60	0.85	14.14	29.59	43.50	13.91	QP
3	124.090	17.70	0.94	14.55	33.19	43.50	10.31	QP
4	191.020	16.90	1.13	12.66	30.69	43.50	12.81	QP
5	242.430	17.60	1.31	16.55	35.46	46.00	10.54	QP
6	339.430	20.30	1.50	12.01	33.81	46.00	12.19	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

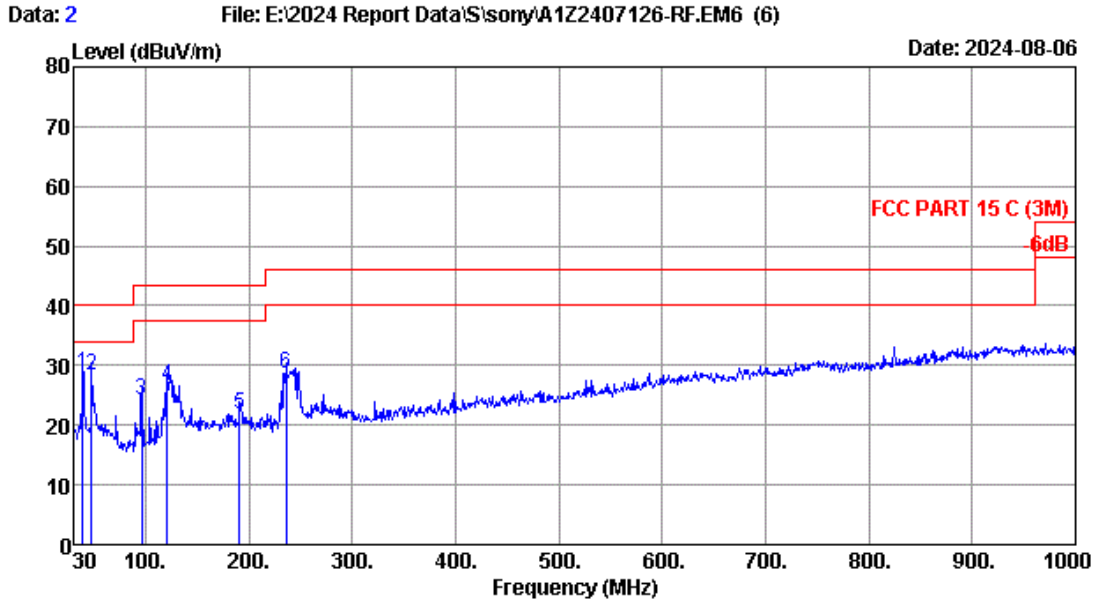

Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2023 VULB 9168-429 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 25.6°C/57% Engineer : Abel  
 EUT : Wireless Speaker  
 Test Mode : BT3.0 TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	38.730	19.20	0.56	8.83	28.59	40.00	11.41	QP
2	47.460	19.65	0.63	8.02	28.30	40.00	11.70	QP
3	95.960	14.60	0.85	8.83	24.28	43.50	19.22	QP
4	121.180	17.44	0.93	8.25	26.62	43.50	16.88	QP
5	191.020	16.90	1.13	3.80	21.83	43.50	21.67	QP
6	235.640	17.15	1.30	10.09	28.54	46.00	17.46	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

**Frequency: 1GHz~18GHz**

Test Mode	ANT. PLO.	Frequency (MHz)	Peak(dBuv/m)		Margin	Duty cycle factor (dB)	AV(dBuv/m)		Margin	Conclusion
			Emission Level	Limit			Emission Level	Limit		
GFSK	V	4804	47.20	74	26.80	-30.737	16.463	54	37.537	Pass
GFSK	H	4804	46.87	74	27.13	-30.737	16.133	54	37.867	Pass
GFSK	H	4882	47.59	74	26.41	-30.737	16.853	54	37.147	Pass
GFSK	V	4882	48.06	74	25.94	-30.737	17.323	54	36.677	Pass
GFSK	V	4960	47.81	74	26.19	-30.737	17.073	54	36.927	Pass
GFSK	H	4960	47.76	74	26.24	-30.737	17.023	54	36.977	Pass
8-DPSK	H	4804	47.34	74	26.66	-30.737	16.603	54	37.397	Pass
8-DPSK	V	4804	47.62	74	26.38	-30.737	16.883	54	37.117	Pass
8-DPSK	V	4882	47.11	74	26.89	-30.737	16.373	54	37.627	Pass
8-DPSK	H	4882	47.61	74	26.39	-30.737	16.873	54	37.127	Pass
8-DPSK	H	4960	48.95	74	25.05	-30.737	18.213	54	35.787	Pass
8-DPSK	V	4960	48.91	74	25.09	-30.737	18.173	54	35.827	Pass


Data: 17 File: F:\2024 Report\SONY\YY7866E#14.EM6 (88) Date: 2024-07-31

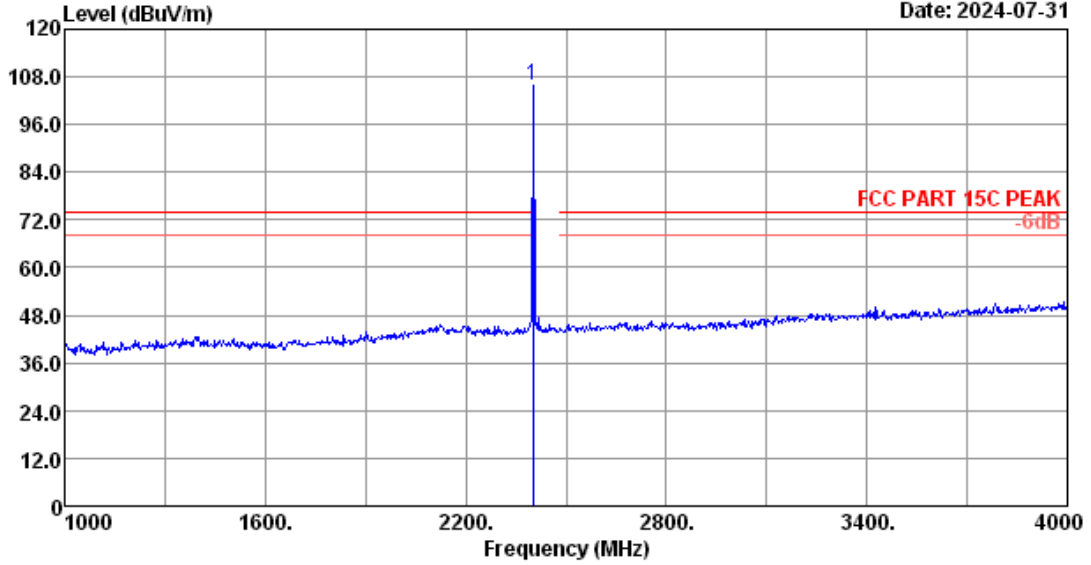

Site no. : 3m Chamber Data no. : 17  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/54.5% Engineer : Winter  
 Test Mode : BT3.0 GFSK 2402MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	5.32	104.56	31.70	105.79	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

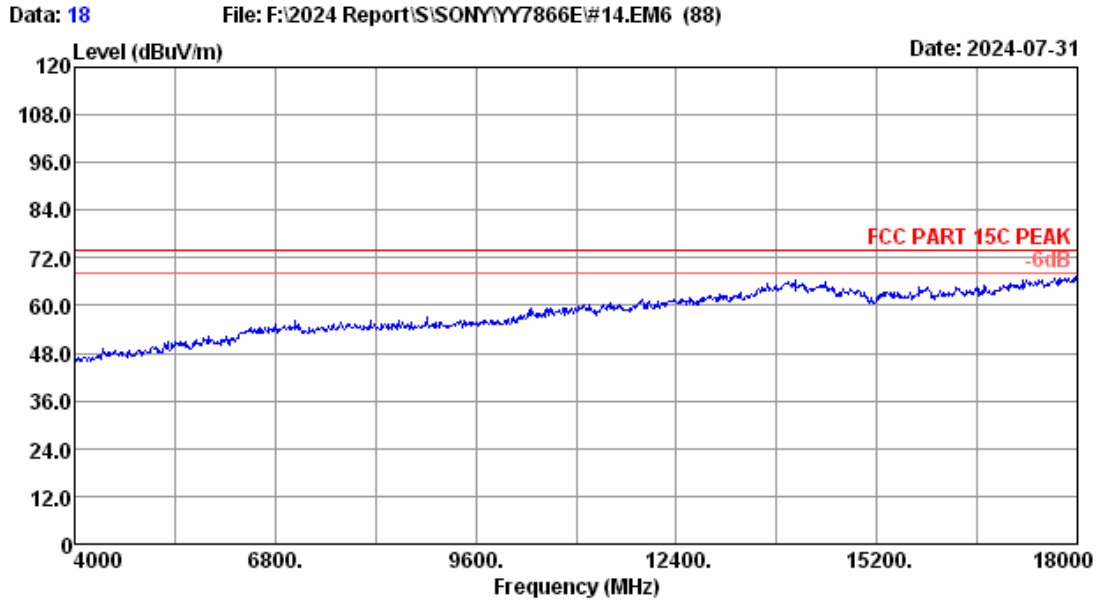

Site no.	: 3m Chamber	Data no.	: 18
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/54.5%	Engineer	: Winter
Test Mode	: BT3.0 GFSK 2402MHz TX Mode		




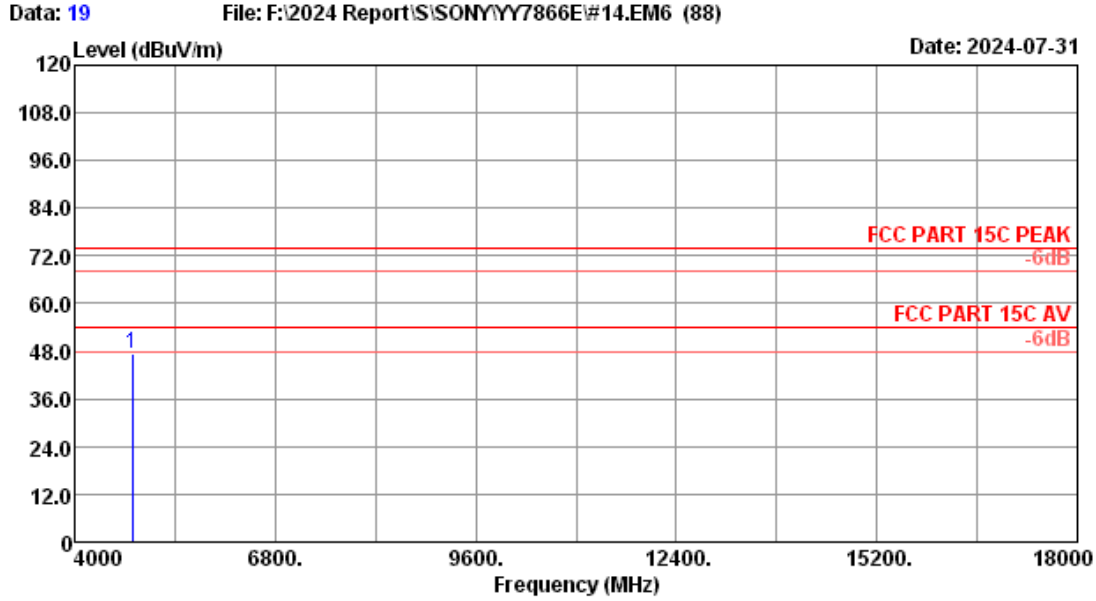

Site no. : 3m Chamber Data no. : 19  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 GFSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.00	31.20	3.95	42.47	30.42	47.20	74.00	26.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

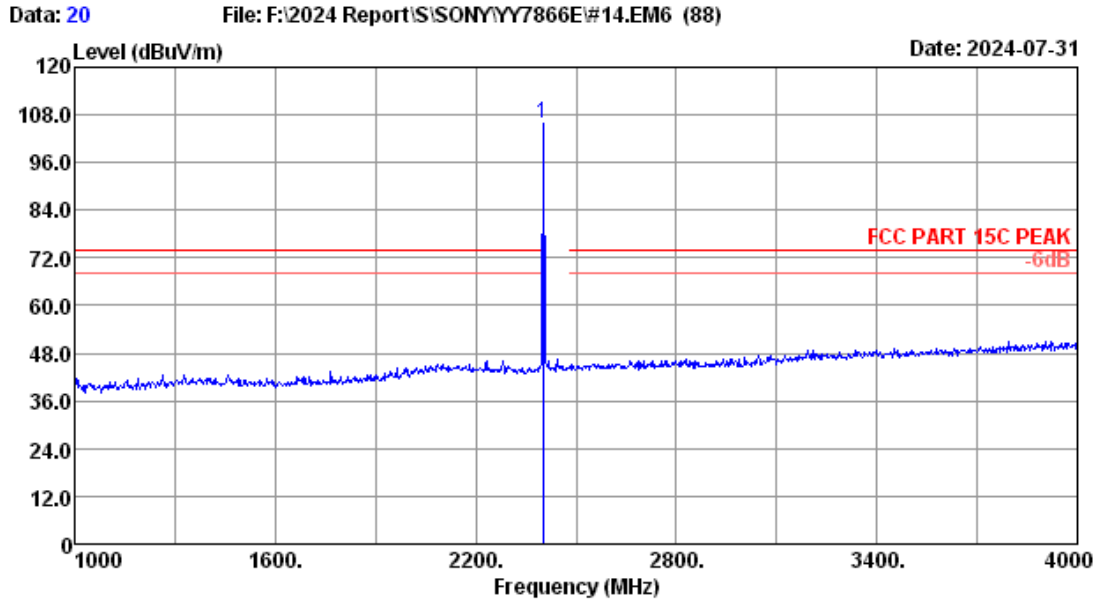


Site no. : 3m Chamber Data no. : 20  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 GFSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	5.32	104.50	31.70	105.73	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

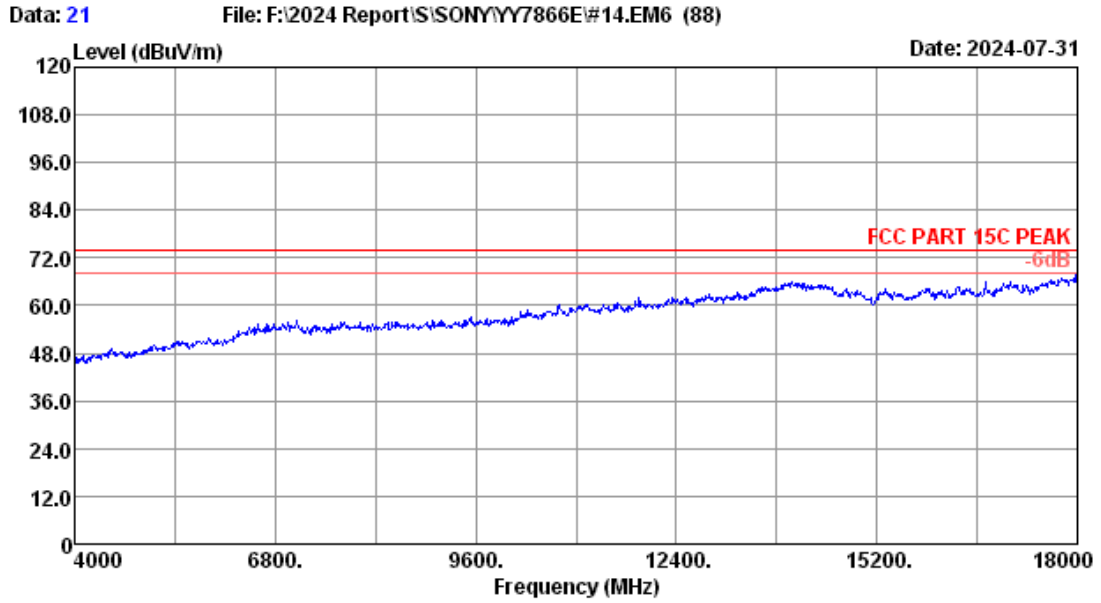


Site no.	: 3m Chamber	Data no.	: 21
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2*C/54.5%	Engineer	: Winter
Test Mode	: BT3.0 GFSK 2402MHz TX Mode		

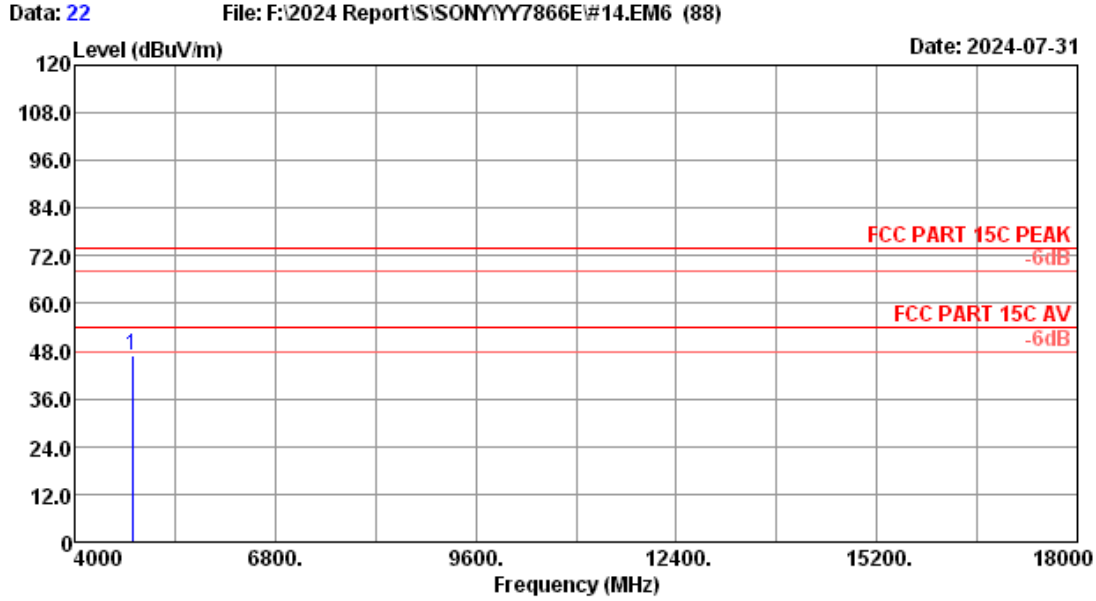

Site no. : 3m Chamber Data no. : 22  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 GFSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.00	31.20	3.95	42.14	30.42	46.87	74.00	27.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

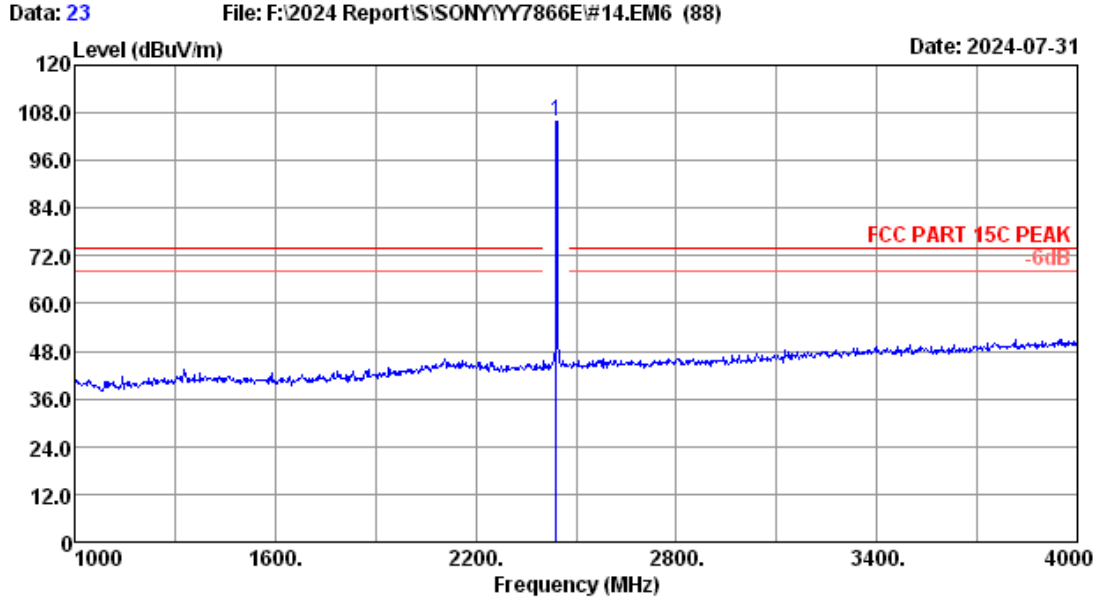


Site no. : 3m Chamber Data no. : 23  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 GFSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.76	5.37	104.32	31.68	105.77	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

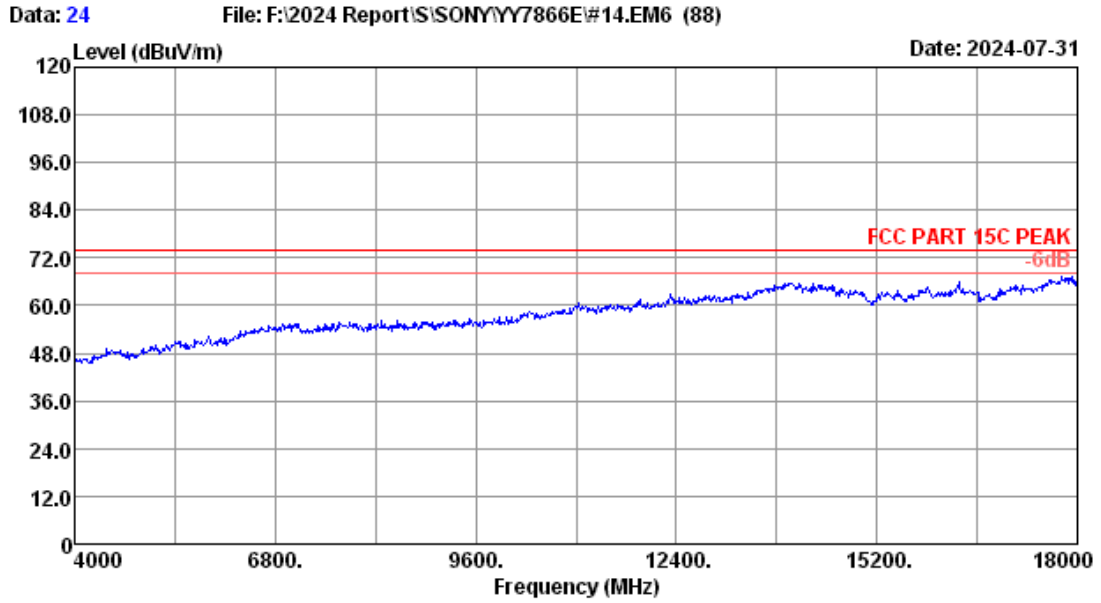


Site no.	: 3m Chamber	Data no.	: 24
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/54.5%	Engineer	: Winter
Test Mode	: BT3.0 GFSK 2441MHz TX Mode		

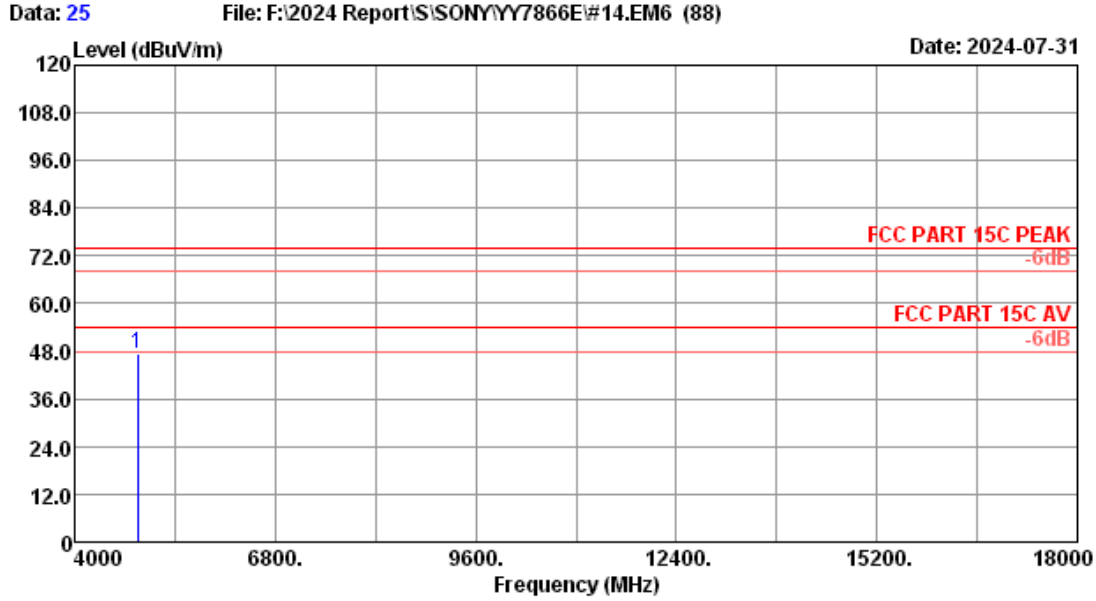

Site no. : 3m Chamber Data no. : 25  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 GFSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.00	31.46	3.98	42.56	30.41	47.59	74.00	26.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

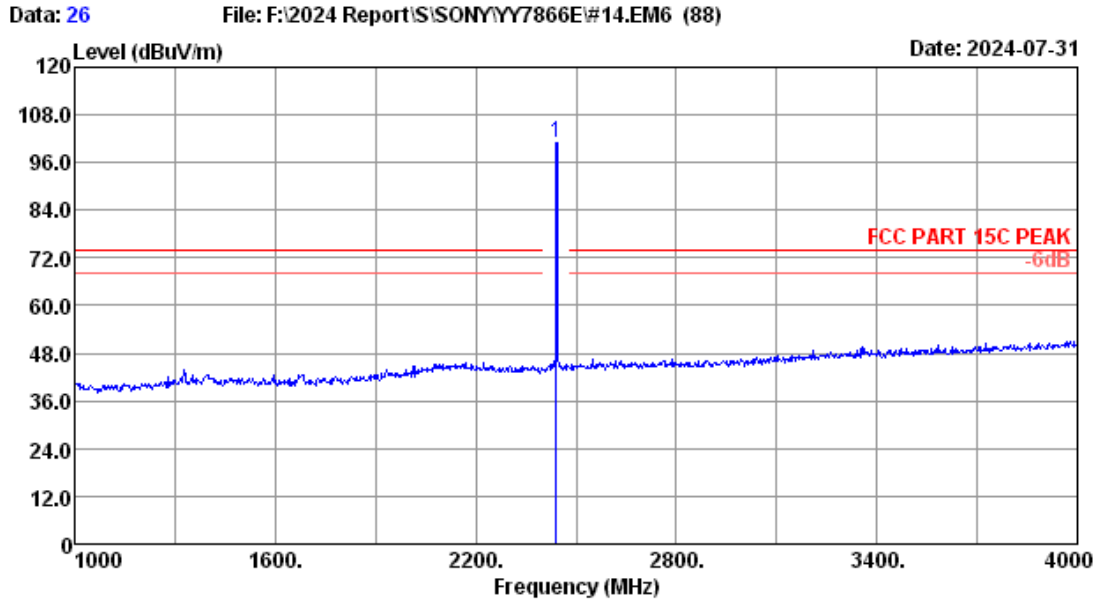


Site no. : 3m Chamber Data no. : 26  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 GFSK 2441MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.76	5.37	99.58	31.68	101.03	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



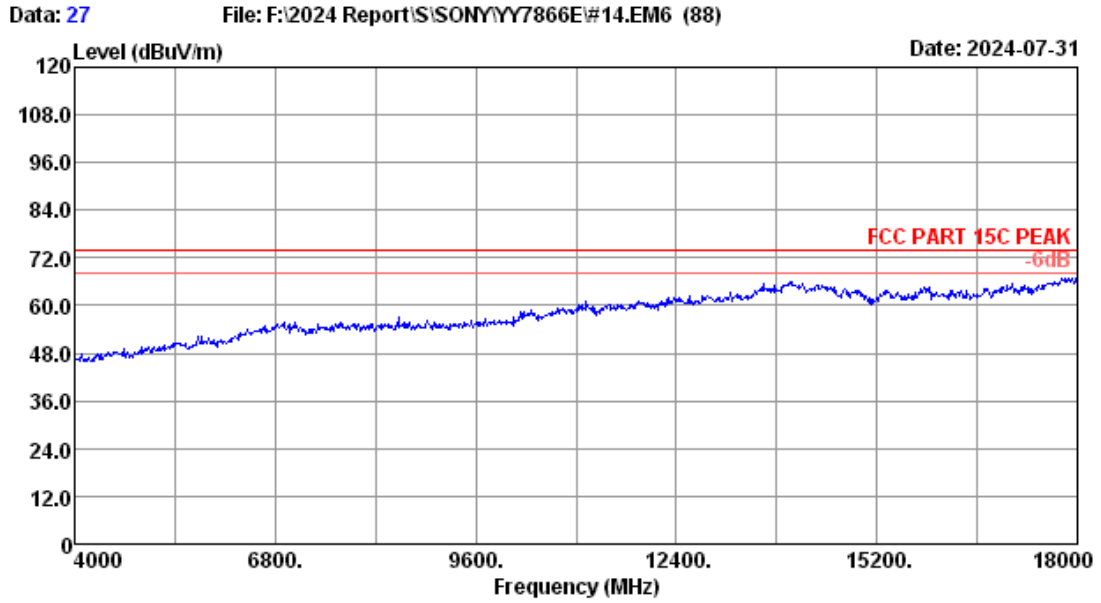


Site no.	: 3m Chamber	Data no.	: 27
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/54.5%	Engineer	: Winter
Test Mode	: BT3.0 GFSK 2441MHz TX Mode		

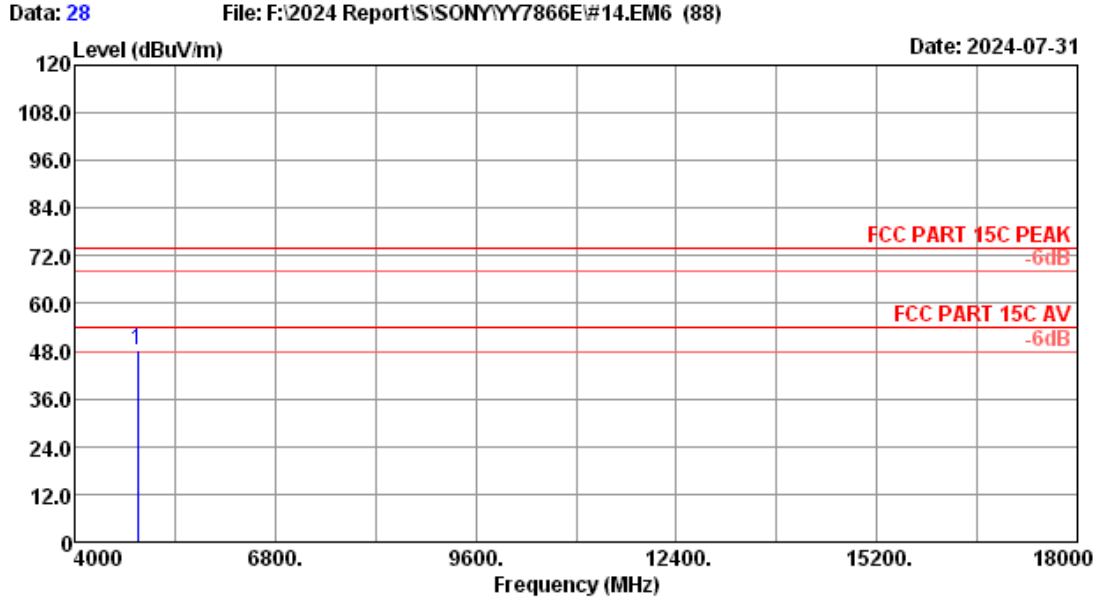

Site no. : 3m Chamber Data no. : 28  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 GFSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.00	31.46	3.98	43.03	30.41	48.06	74.00	25.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

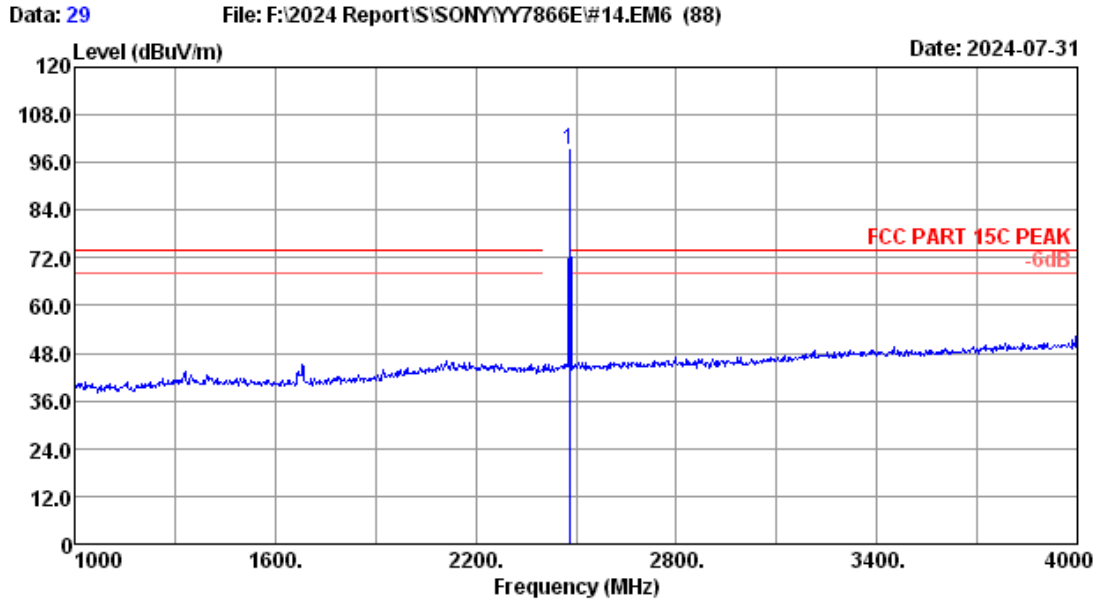


Site no. : 3m Chamber Data no. : 29  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 GFSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.80	5.41	97.75	31.66	99.30	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

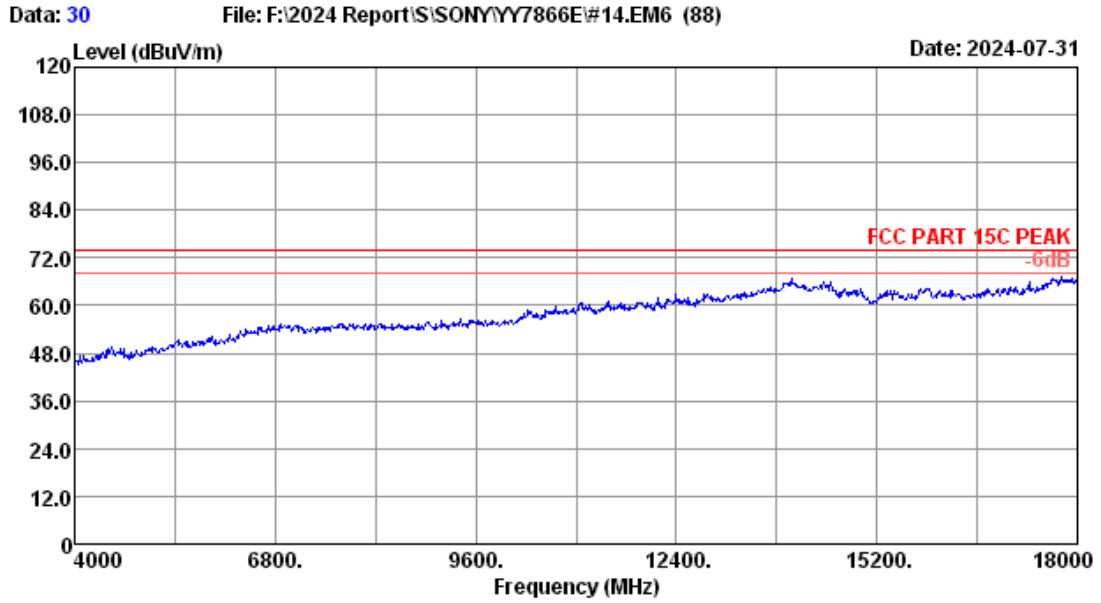


Site no.	: 3m Chamber	Data no.	: 30
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2*C/54.5%	Engineer	: Winter
Test Mode	: BT3.0 GFSK 2480MHz TX Mode		

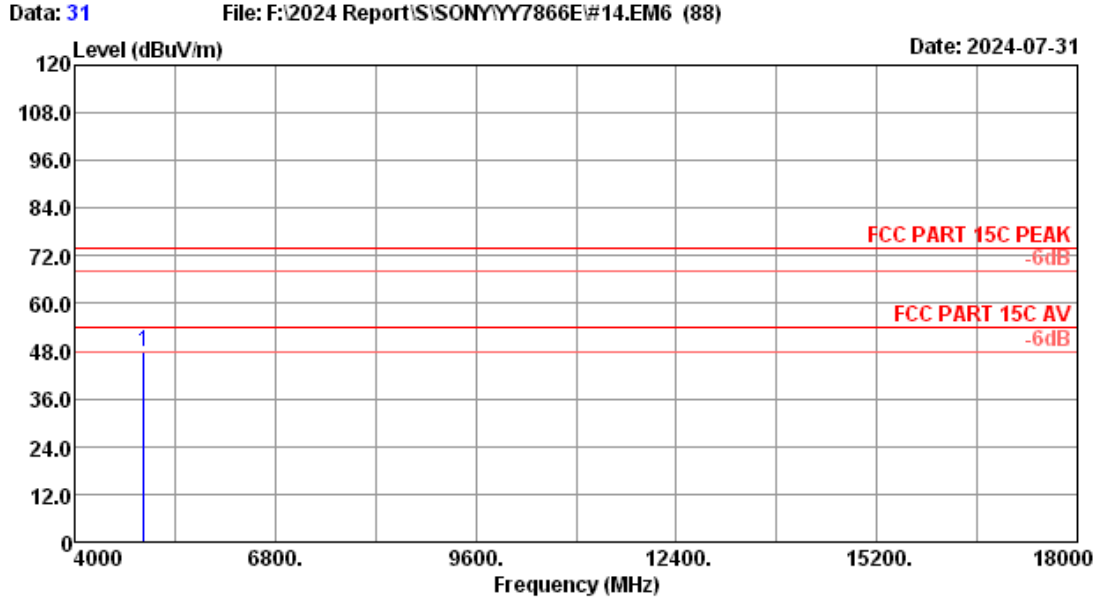

Site no. : 3m Chamber Data no. : 31  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 GFSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.00	31.98	4.01	42.22	30.40	47.81	74.00	26.19	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

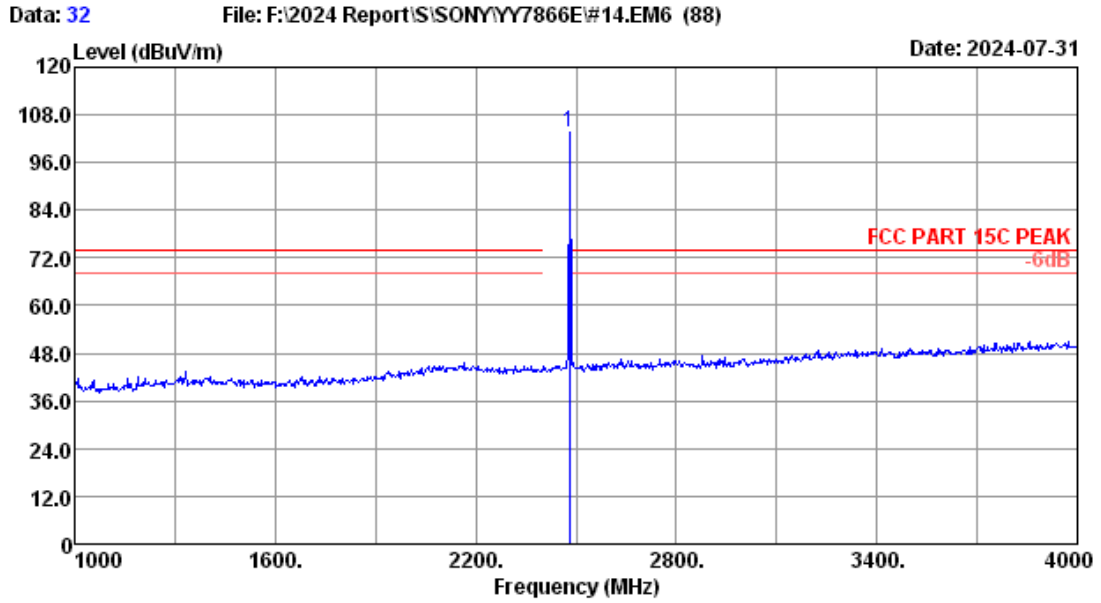


Site no. : 3m Chamber Data no. : 32  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/54.5% Engineer : Winter  
 Test Mode : BT3.0 GFSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.80	5.41	102.19	31.66	103.74	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

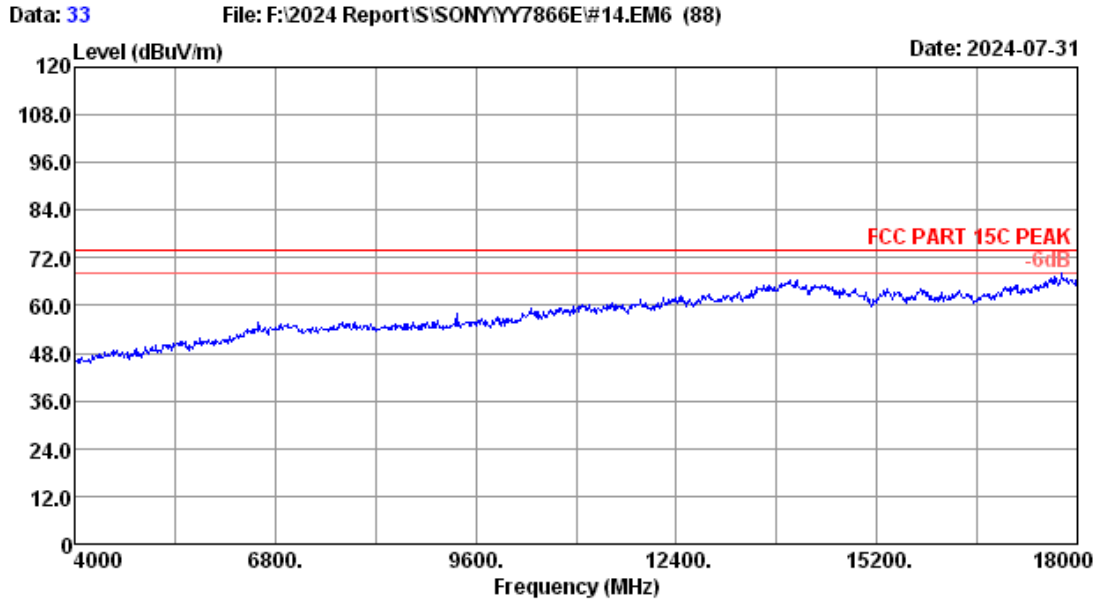

Site no. : 3m Chamber Data no. : 33  
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 20.2°C/54.5% Engineer : Winter  
Test Mode : BT3.0 GFSK 2480MHz TX Mode

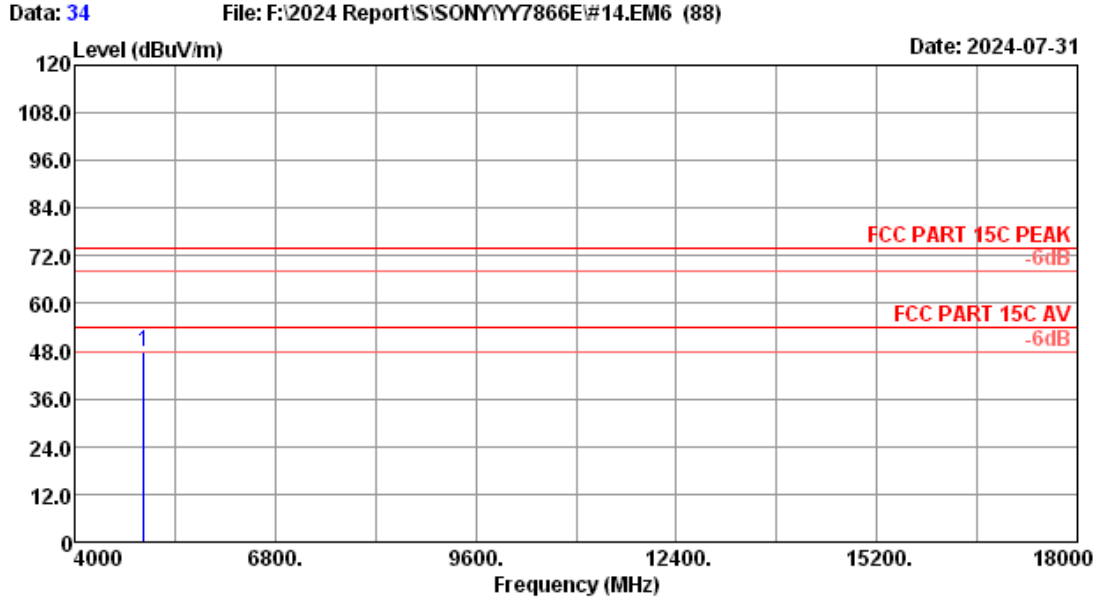


Site no. : 3m Chamber Data no. : 34  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 GFSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.00	31.98	4.01	42.17	30.40	47.76	74.00	26.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.




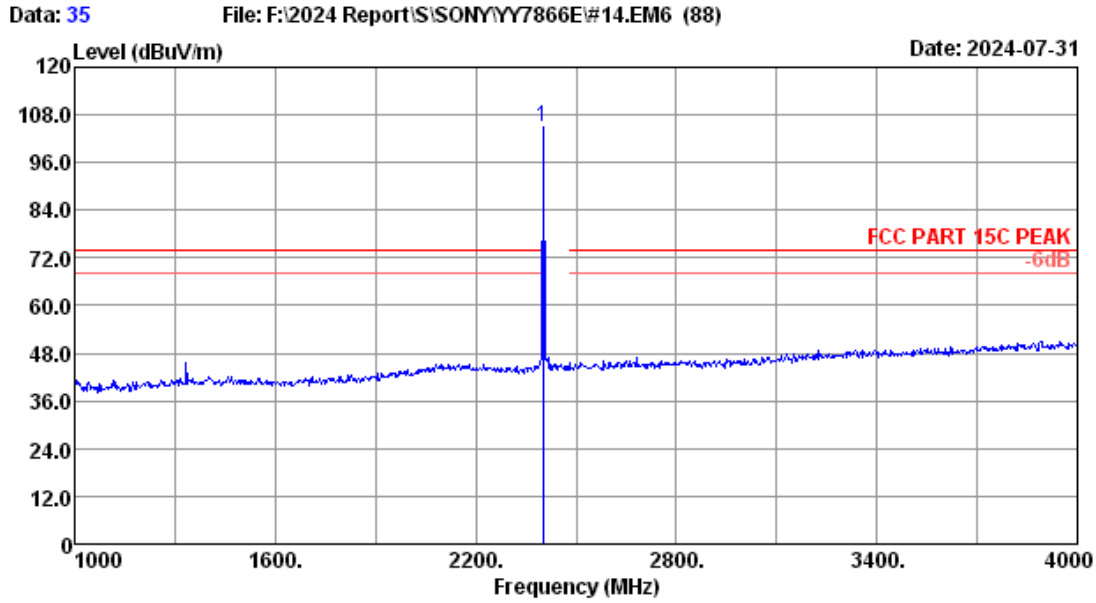


Site no. : 3m Chamber Data no. : 35  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 8-DPSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	5.32	103.67	31.70	104.90	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

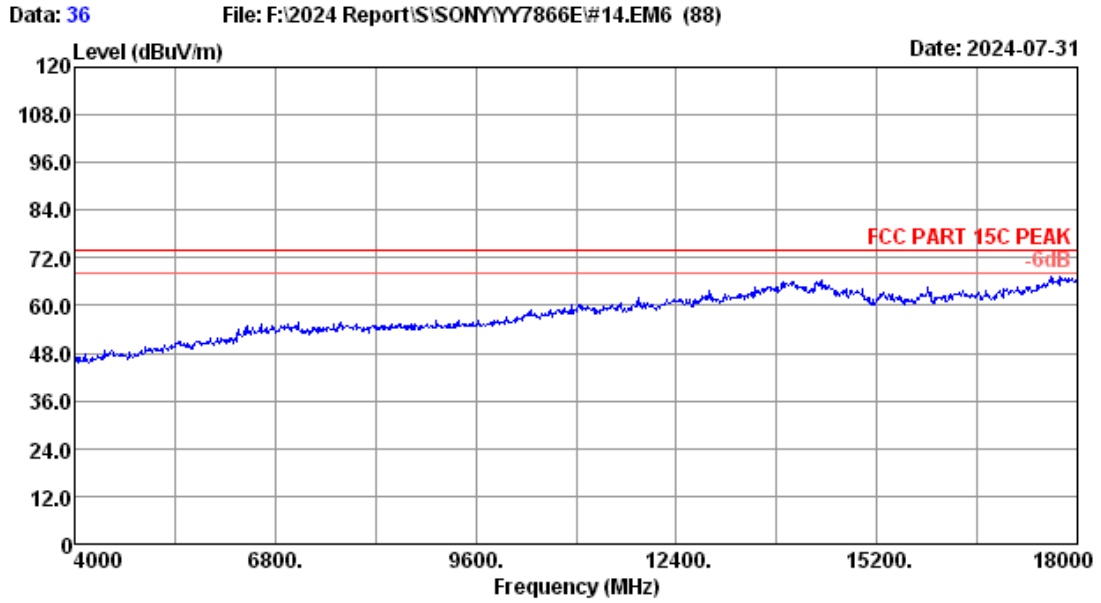


Site no. : 3m Chamber Data no. : 36  
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 20.2°C/54.5% Engineer : Winter  
Test Mode : BT3.0 8-DPSK 2402MHz TX Mode

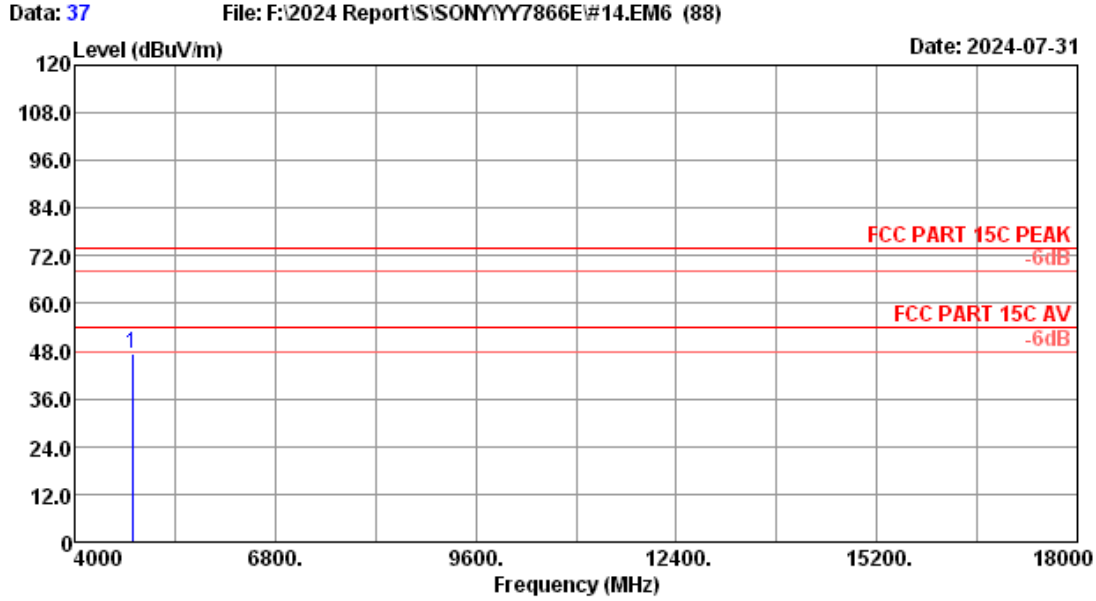

Site no. : 3m Chamber Data no. : 37  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 8-DPSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.00	31.20	3.95	42.61	30.42	47.34	74.00	26.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

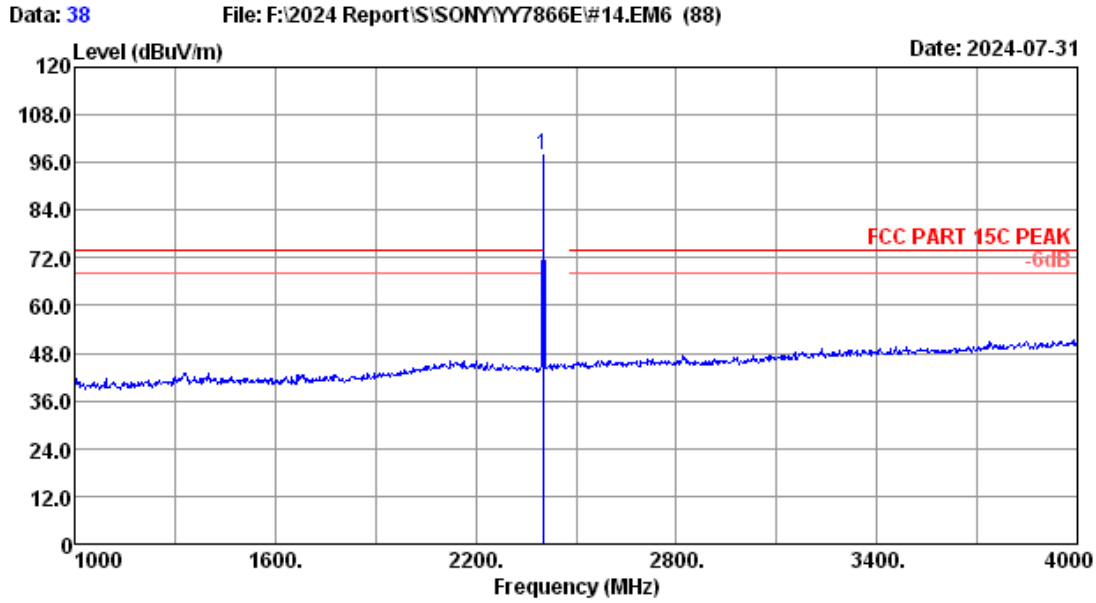


Site no. : 3m Chamber Data no. : 38  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 8-DPSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	5.32	96.72	31.70	97.95	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

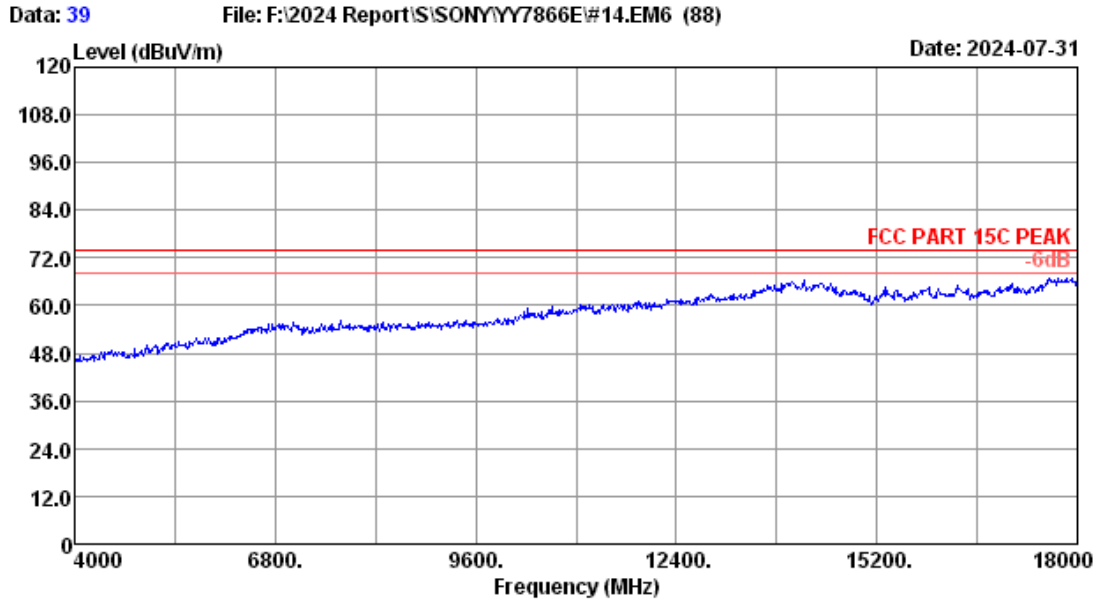


Site no. : 3m Chamber Data no. : 39  
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 20.2°C/54.5% Engineer : Winter  
Test Mode : BT3.0 8-DPSK 2402MHz TX Mode

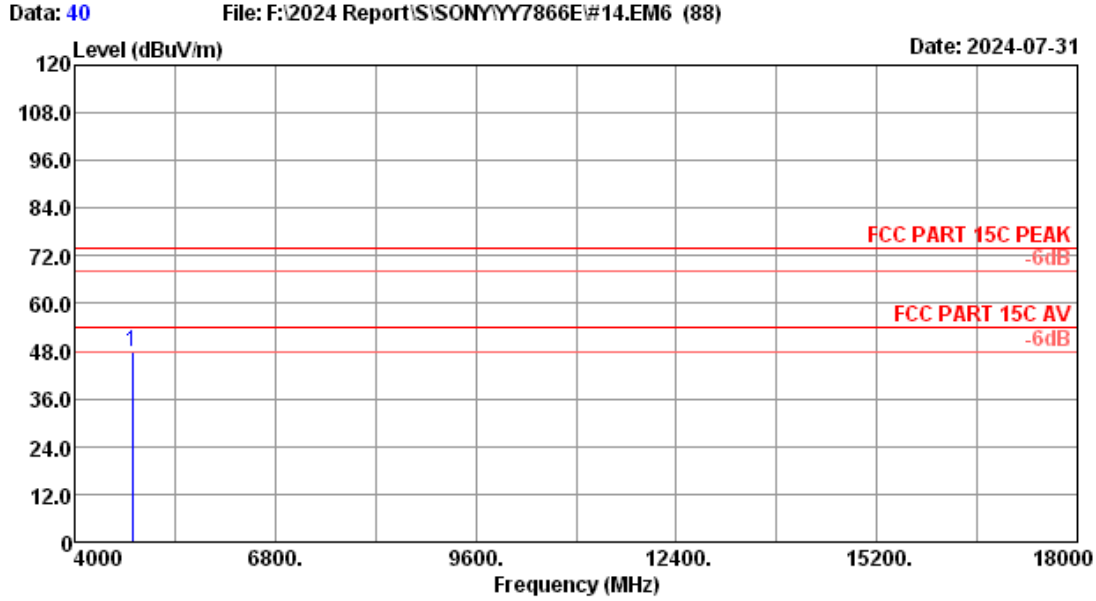

Site no. : 3m Chamber Data no. : 40  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 8-DPSK 2402MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.00	31.20	3.95	42.89	30.42	47.62	74.00	26.38	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

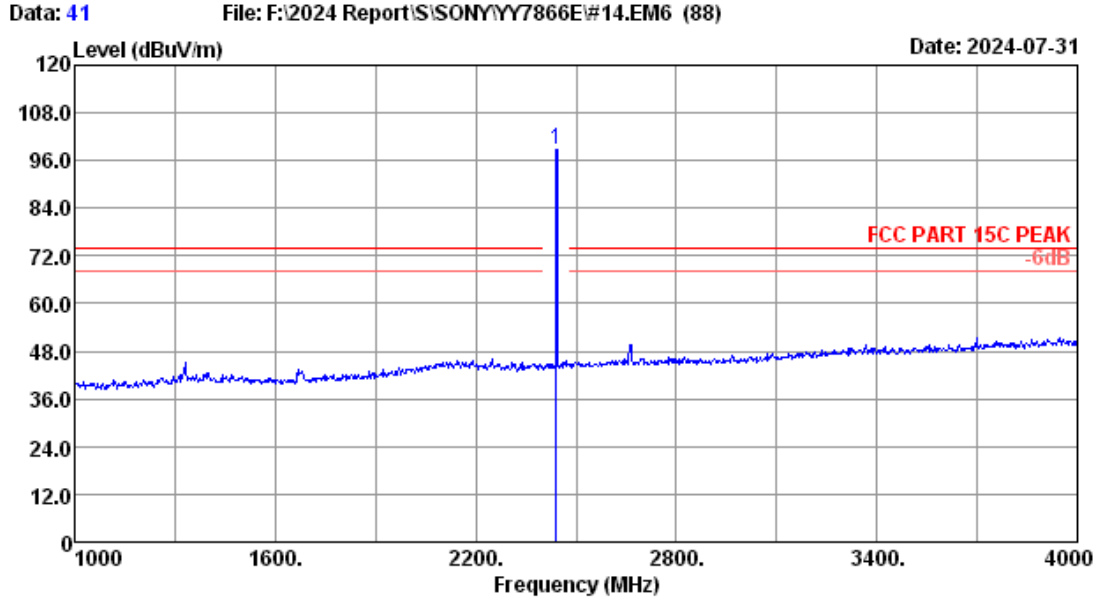

Site no. : 3m Chamber Data no. : 41  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 8-DPSK 2441MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.76	5.37	97.24	31.68	98.69	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

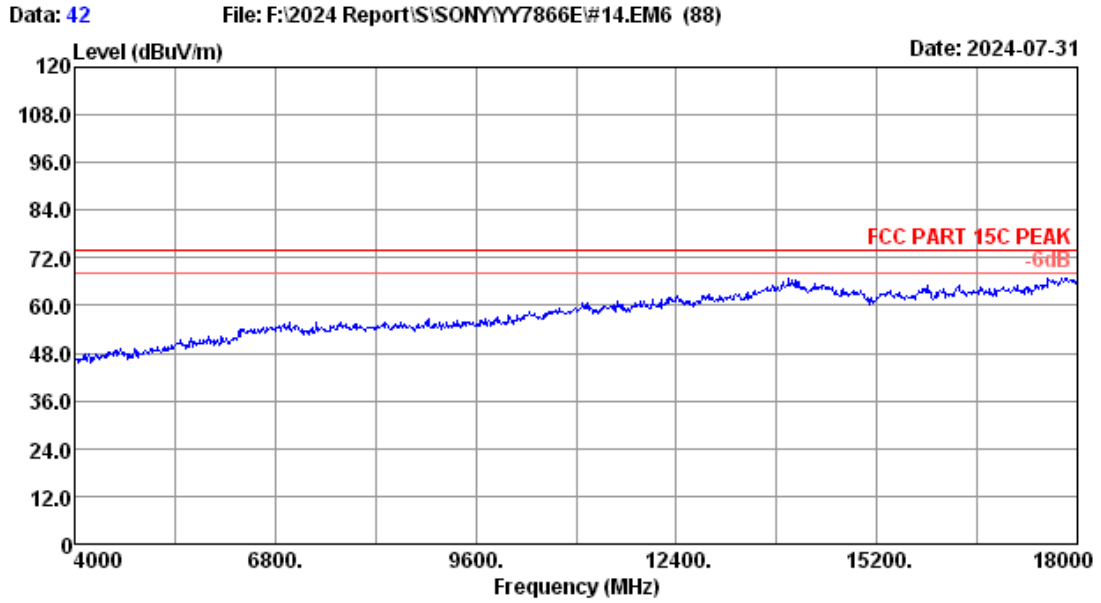

Site no.	: 3m Chamber	Data no.	: 42
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/54.5%	Engineer	: Winter
Test Mode	: BT3.0 8-DPSK 2441MHz TX Mode		




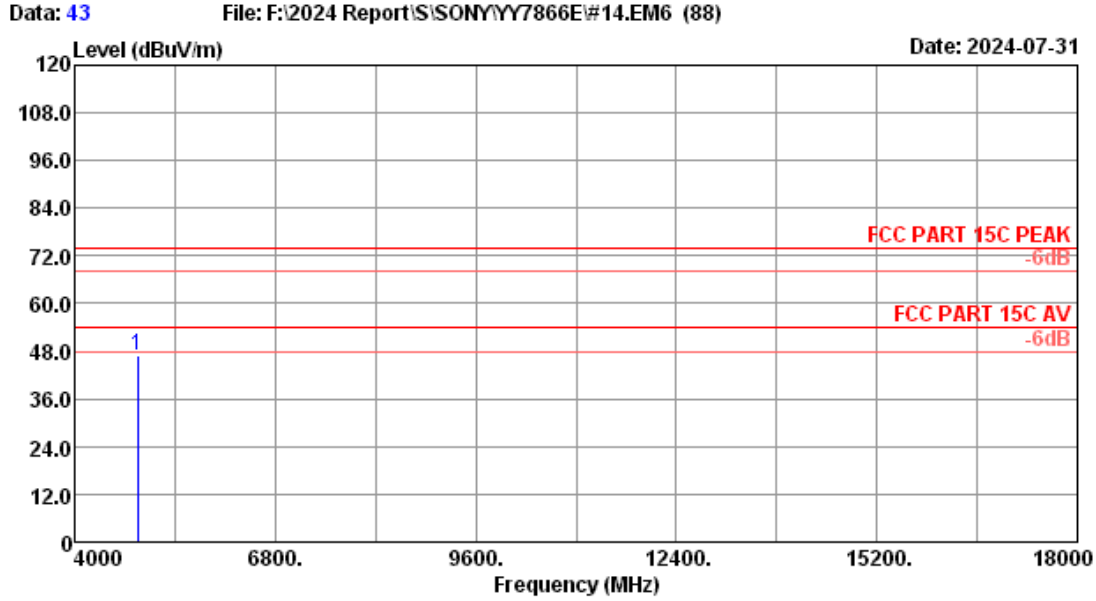

Site no. : 3m Chamber Data no. : 43  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 8-DPSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.00	31.46	3.98	42.08	30.41	47.11	74.00	26.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

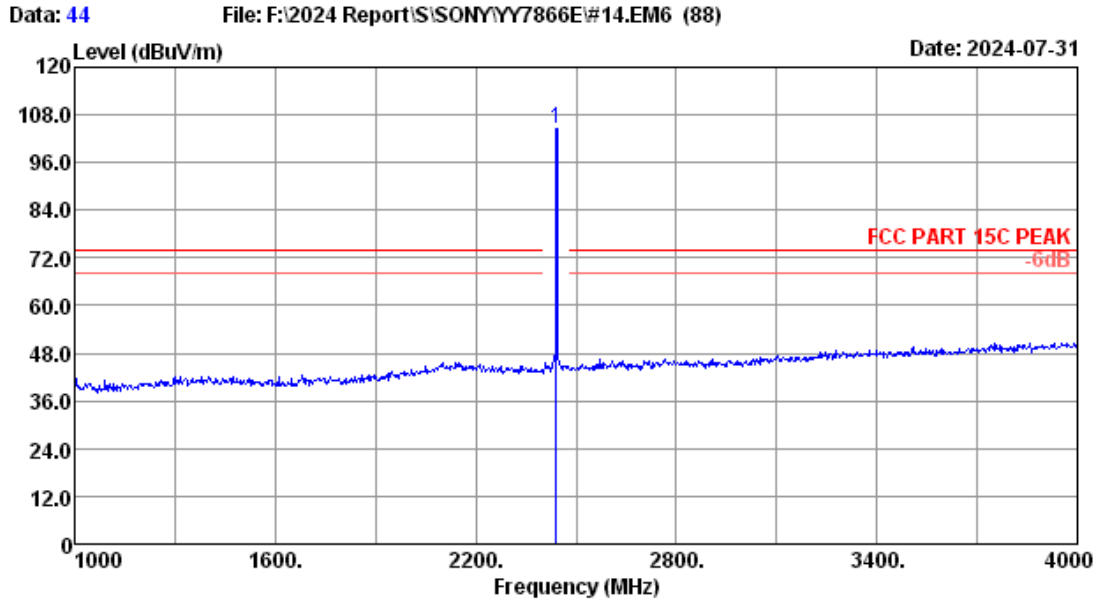


Site no. : 3m Chamber Data no. : 44  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 8-DPSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.76	5.37	102.97	31.68	104.42	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

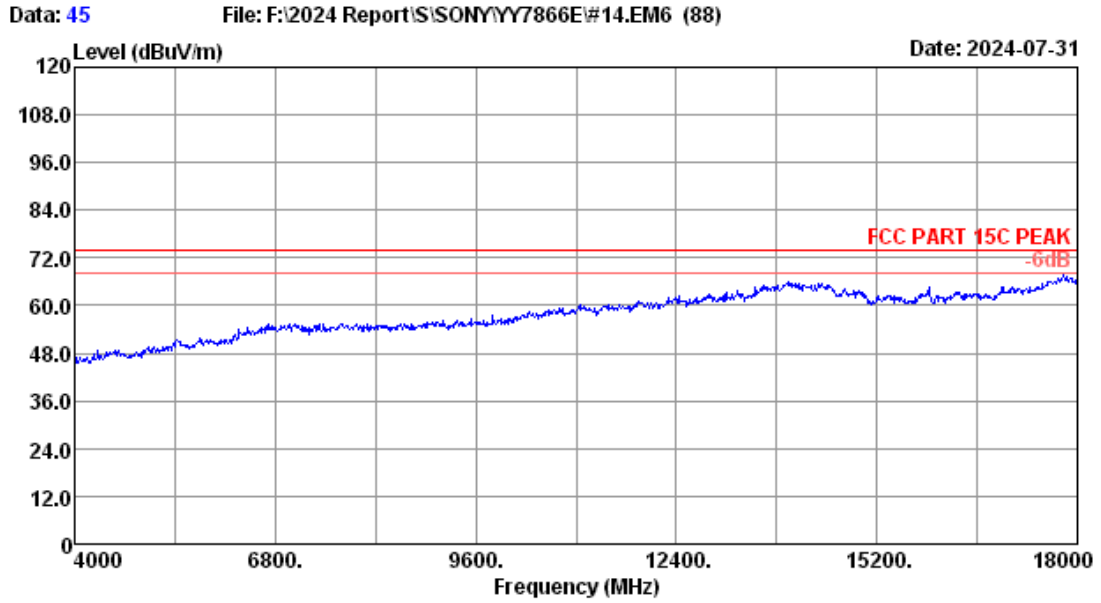


Site no. : 3m Chamber Data no. : 45  
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
Test Mode : BT3.0 8-DPSK 2441MHz TX Mode

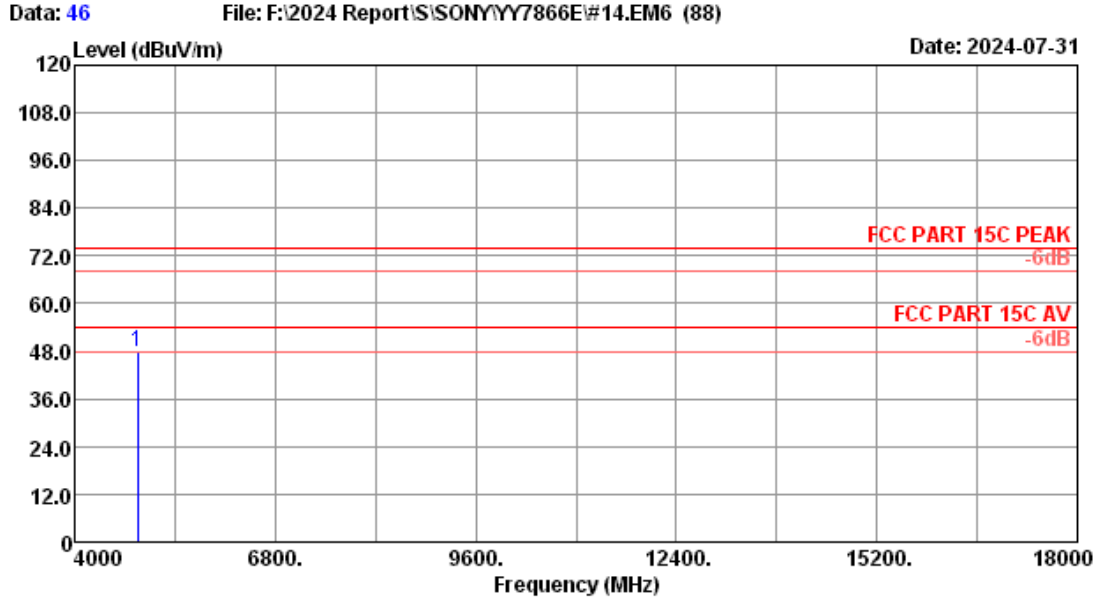

Site no. : 3m Chamber Data no. : 46  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 8-DPSK 2441MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4882.00	31.46	3.98	42.58	30.41	47.61	74.00	26.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

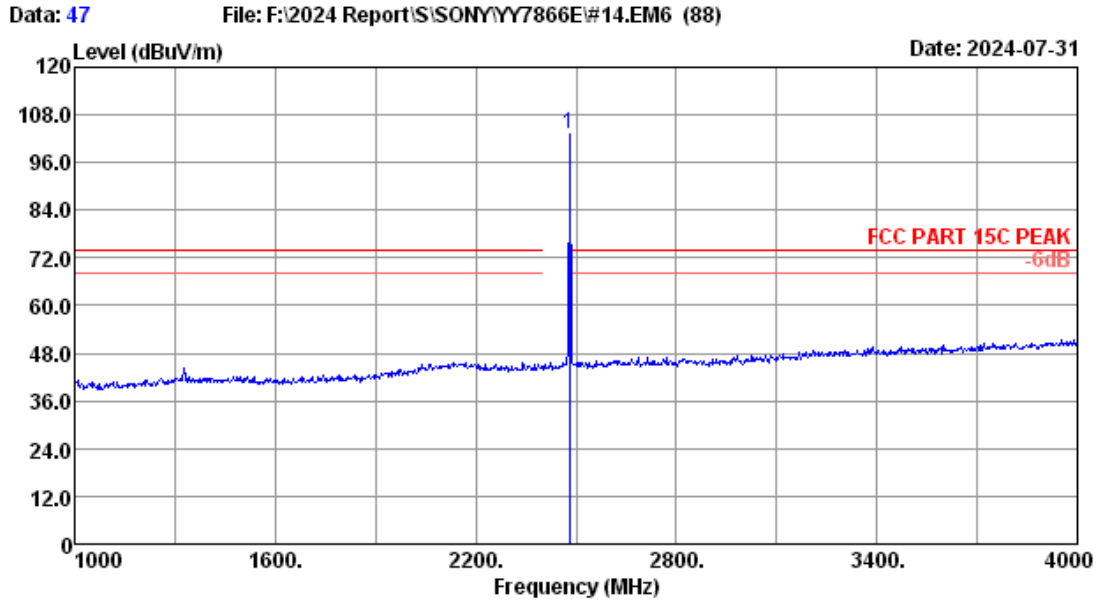


Site no. : 3m Chamber Data no. : 47  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 8-DPSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.80	5.41	101.79	31.66	103.34	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

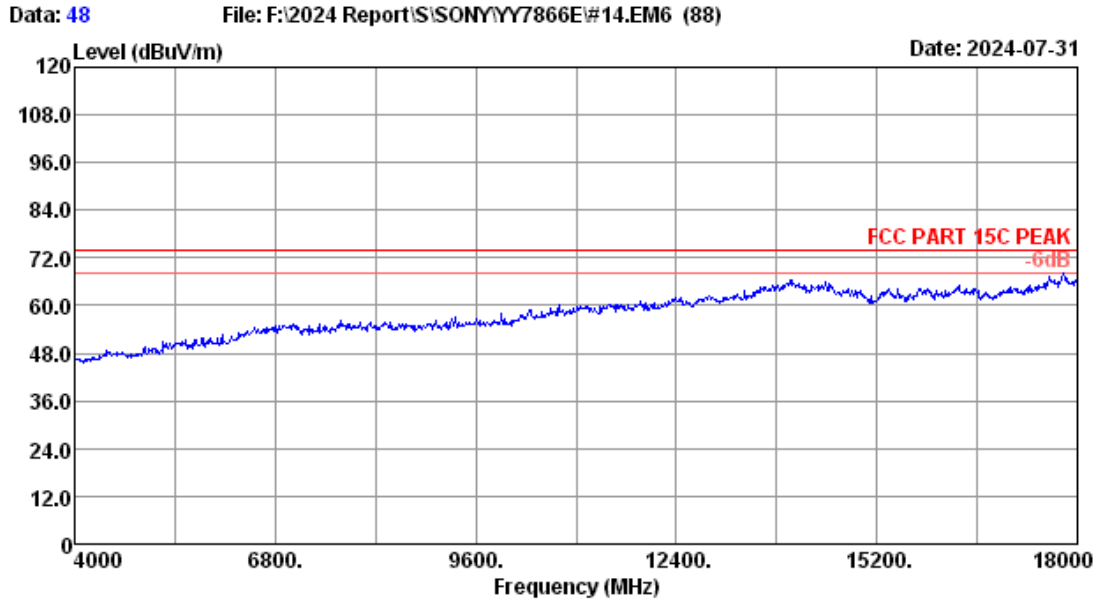


Site no. : 3m Chamber Data no. : 48  
Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
Test Mode : BT3.0 8-DPSK 2480MHz TX Mode

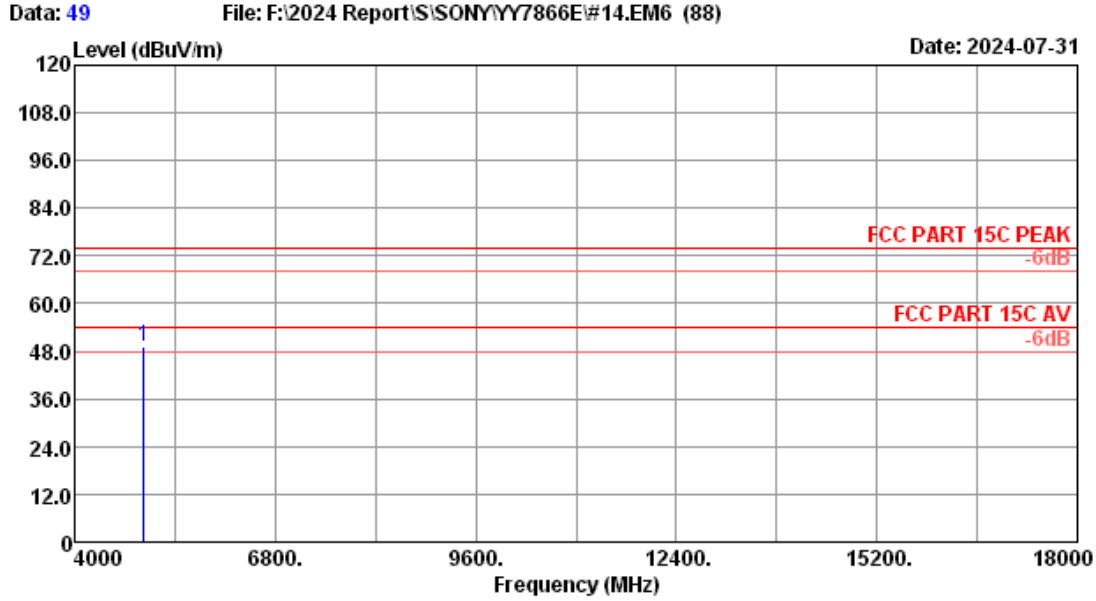

Site no. : 3m Chamber Data no. : 49  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 8-DPSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.00	31.98	4.01	43.36	30.40	48.95	74.00	25.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

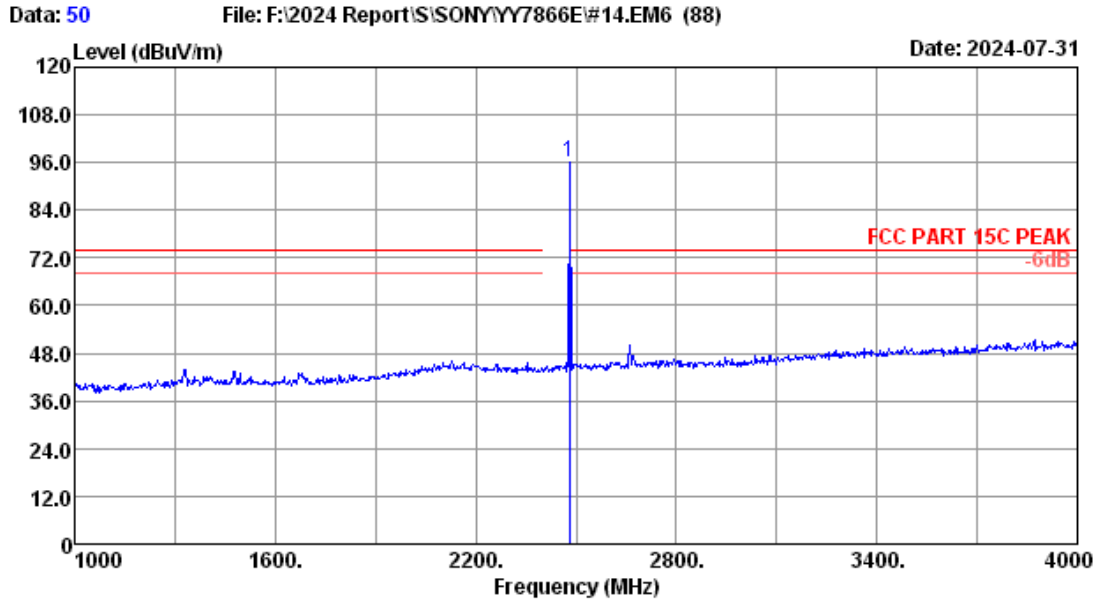


Site no. : 3m Chamber Data no. : 50  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 8-DPSK 2480MHz TX Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.80	5.41	94.47	31.66	96.02	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



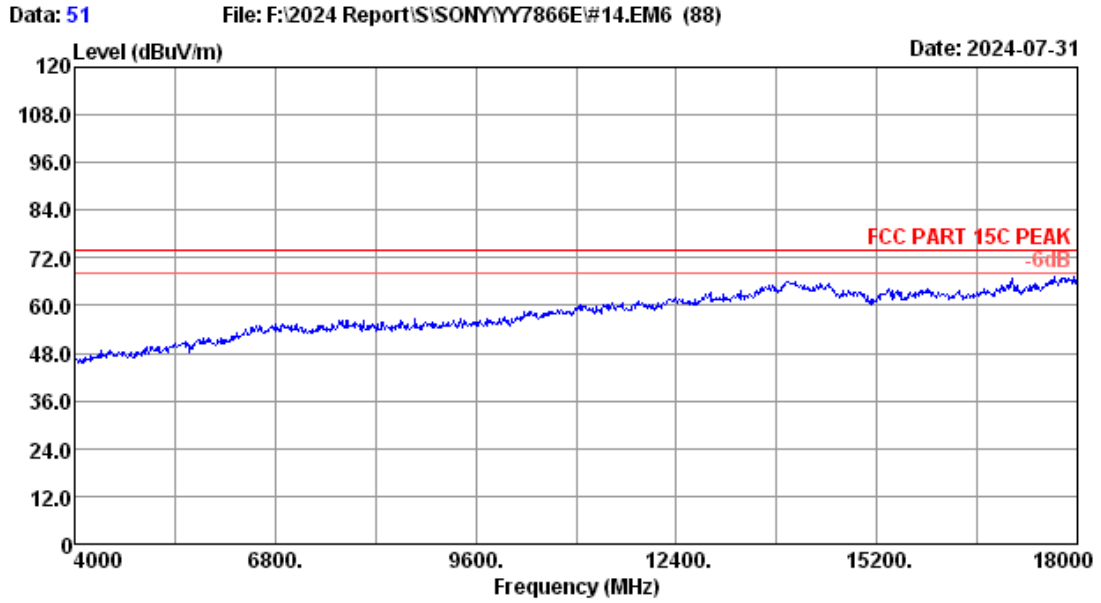

Site no.	: 3m Chamber	Data no.	: 51
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/54.5%	Engineer	: Winter
Test Mode	: BT3.0 8-DPSK 2480MHz TX Mode		

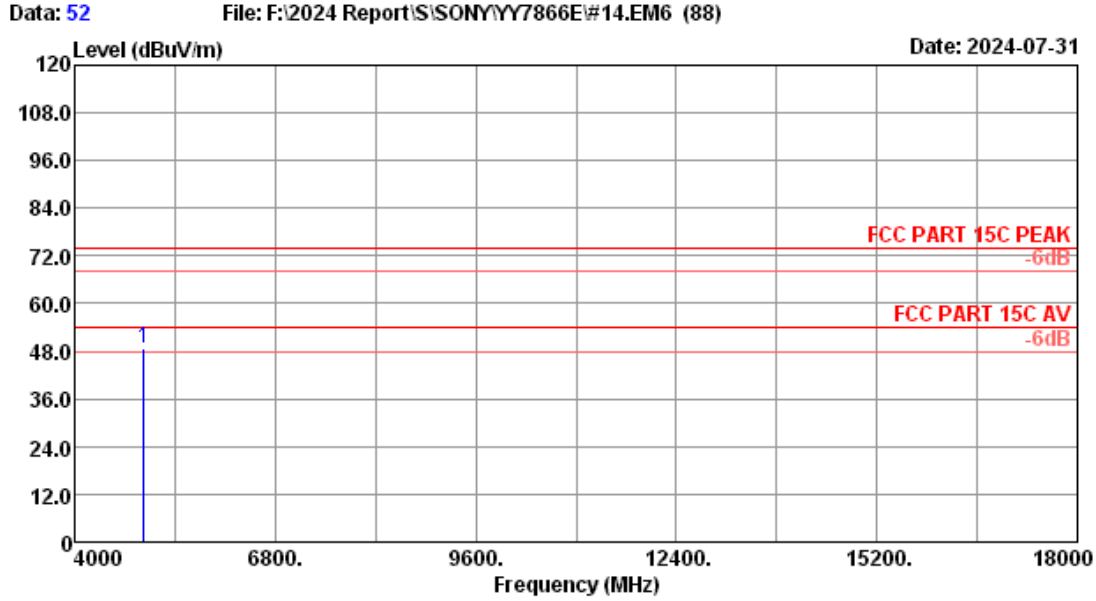

Site no. : 3m Chamber Data no. : 52  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/54.5% Engineer : Winter  
 Test Mode : BT3.0 8-DPSK 2480MHz TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.00	31.98	4.01	43.32	30.40	48.91	74.00	25.09	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 5. CONDUCTED SPURIOUS EMISSIONS

### 5.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
2.	RF Cable	Eastsheep	RM086-SMA/N-JJ -2000	NO.1	Jun.19,24	1 Year
3.	Attenuator(10dB)	Agilent	8491B	MY39269201	Mar.16,24	1 Year

### 5.2. Block Diagram of Test Setup



### 5.3. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30dB instead of 20dB.

### 5.4. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.8:

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.

Note: The cable loss and attenuator loss were offset into spectrum analyzer as an amplitude offset.

### 5.5. Test result


**PASS** (The testing data was attached in the next pages.)

EUT: Wireless Speaker		
M/N: YY7866E		
Test date: 2024-07-29~08-01	Pressure: 102.4±1.0 kpa	Humidity: 54.7±3.0%
Tested by: Lili	Test site: RF site	Temperature: 23.6±0.6 °C


### Hopping off

#### GFSK


#### 2402MHz

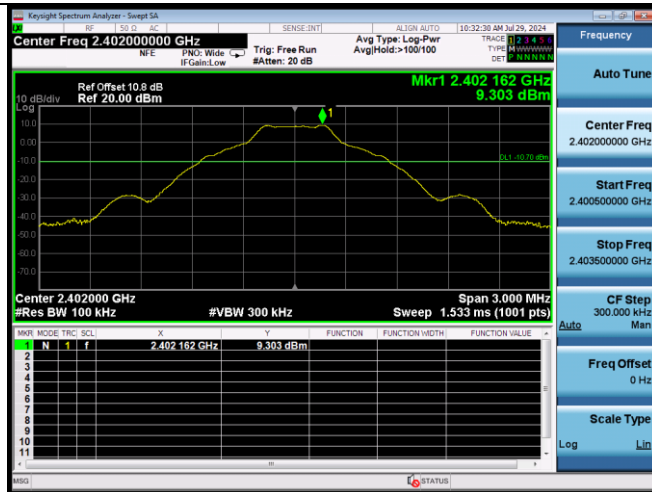


#### 2402MHz(2.3GHz – 2.4GHz)

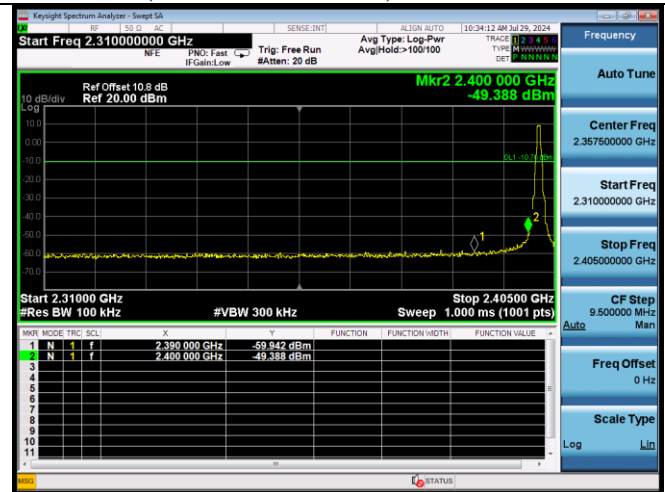


#### 2402MHz(30MHz – 1GHz)

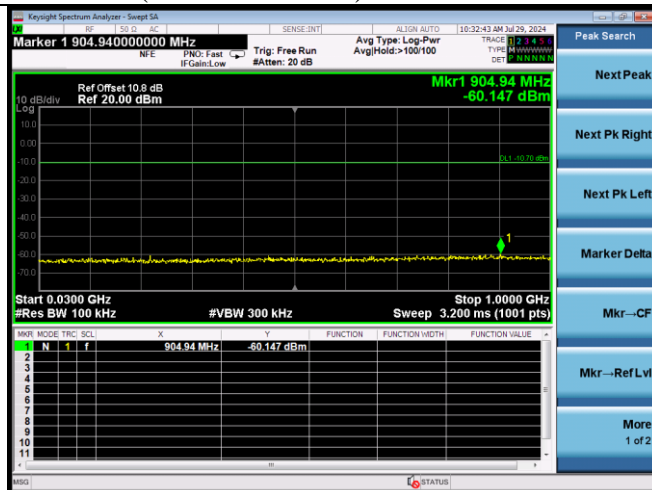


#### 2402MHz(10GHz – 26GHz)

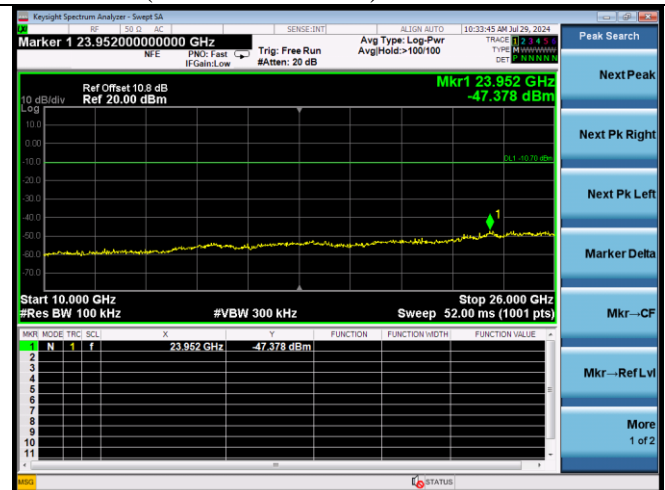


#### 2402MHz(1GHz – 10GHz)

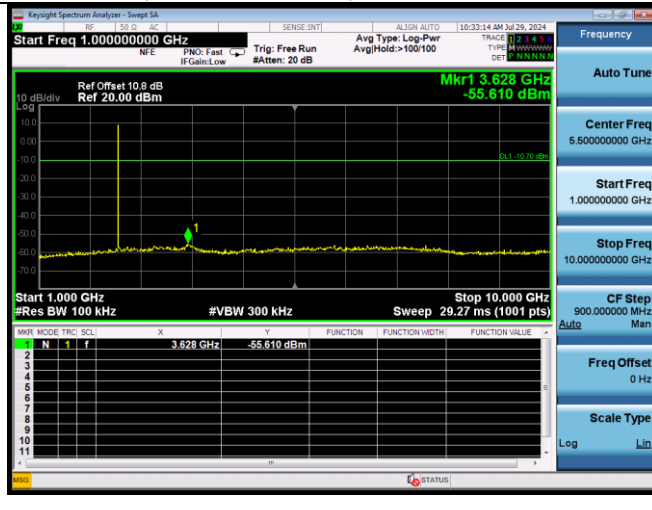

#### 2441MHz

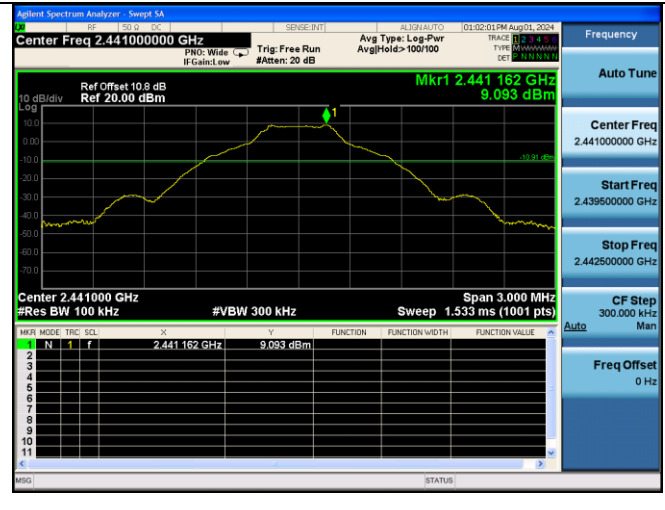


2441MHz(30MHz – 1GHz)

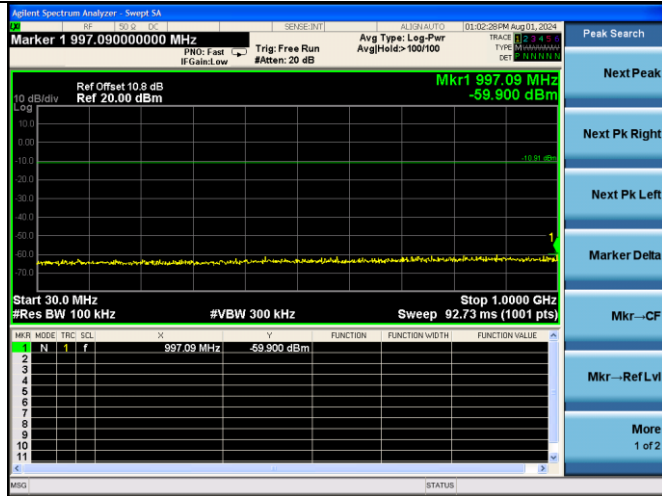


2480MHz




2441MHz(1GHz – 10GHz)

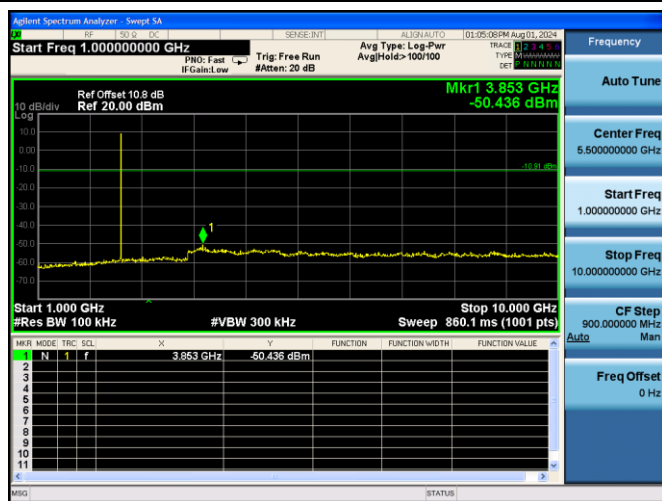


2480MHz(30MHz – 1GHz)

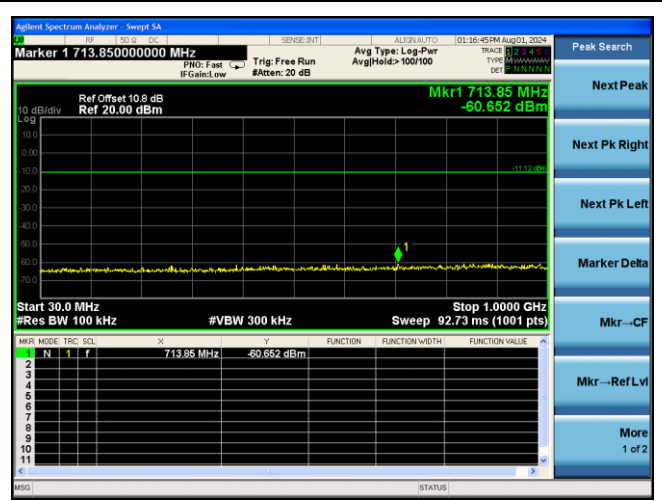


2441MHz(10GHz – 26GHz)

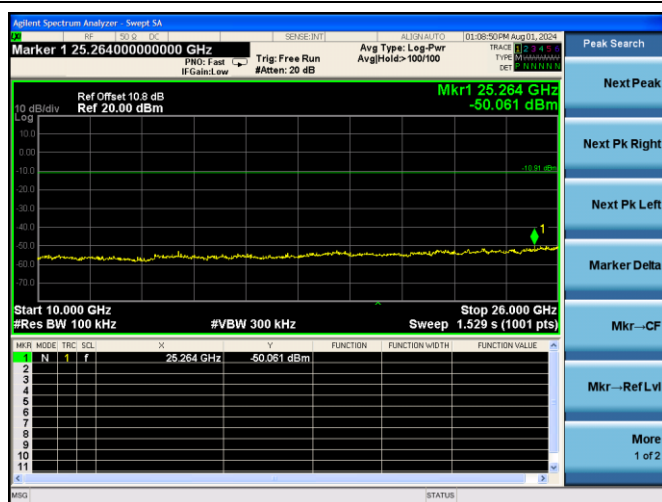


2480MHz(1GHz – 10GHz)

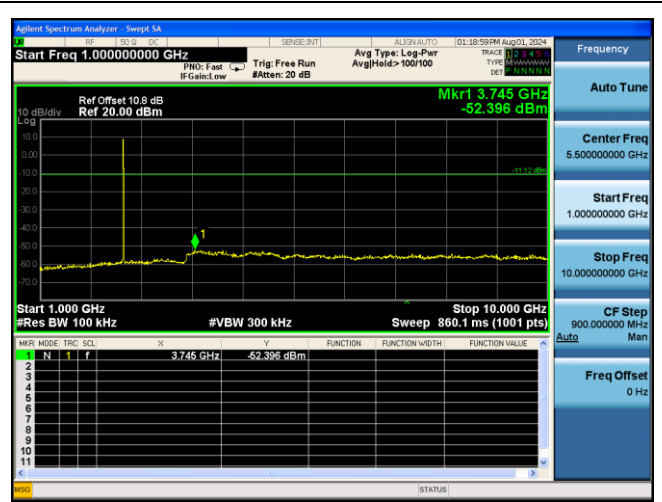


2480MHz(10GHz – 26GHz)

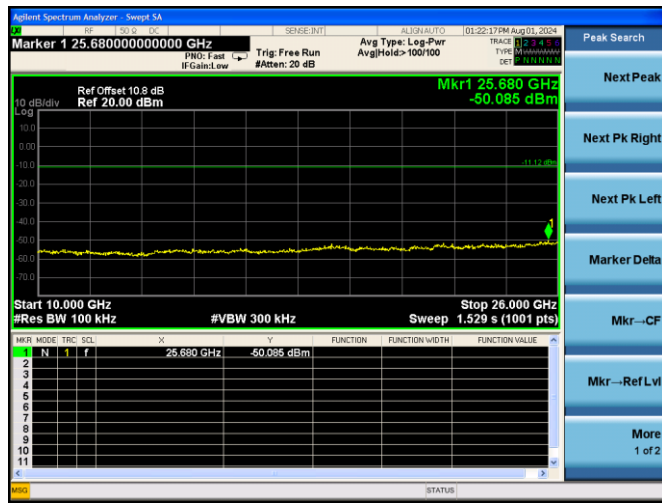


2402MHz(30MHz – 1GHz)

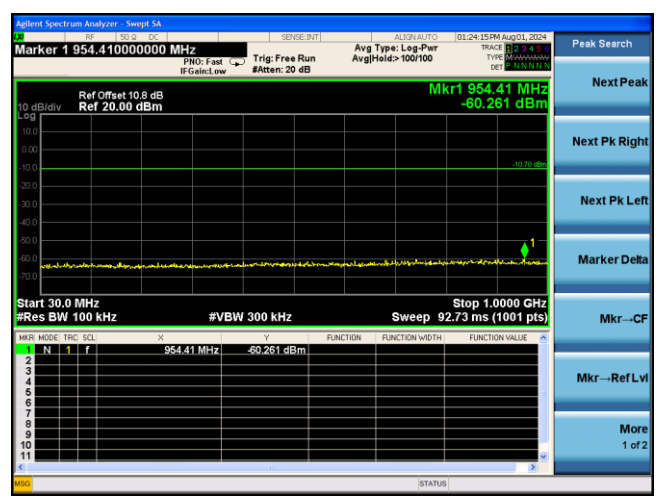

2480MHz(2.4GHz – 2.5GHz)

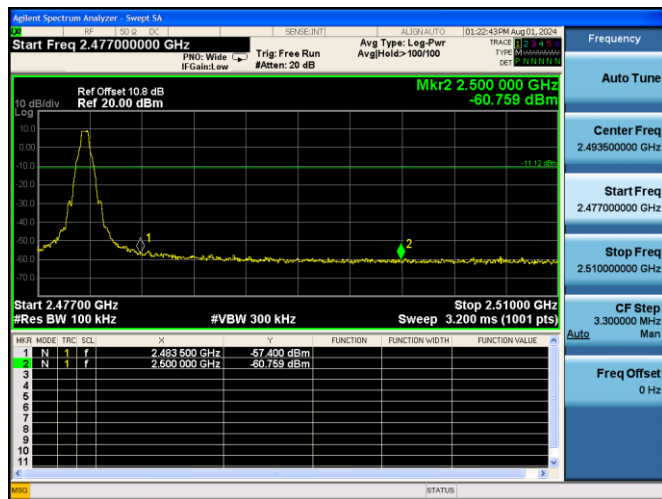


2402MHz(1GHz – 10GHz)

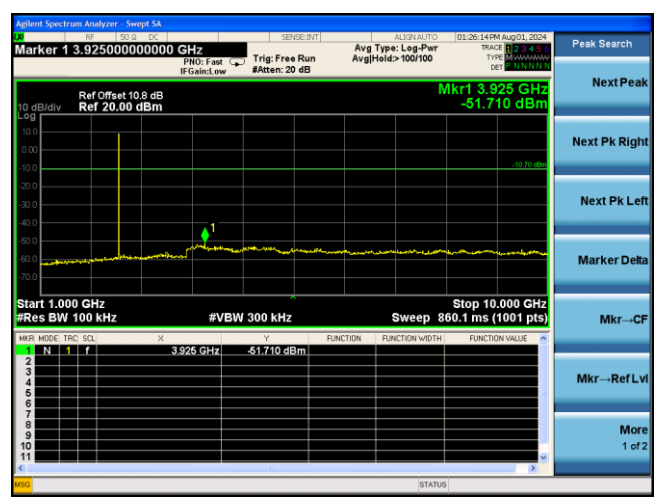


8-DPSK


2402MHz

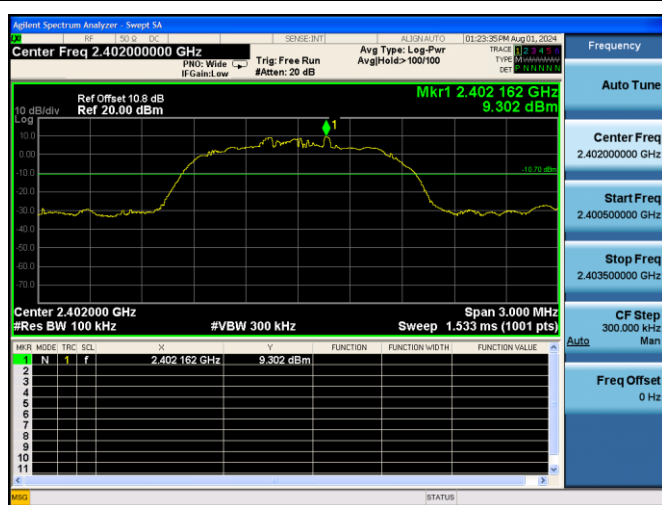


2402MHz(10GHz – 26GHz)

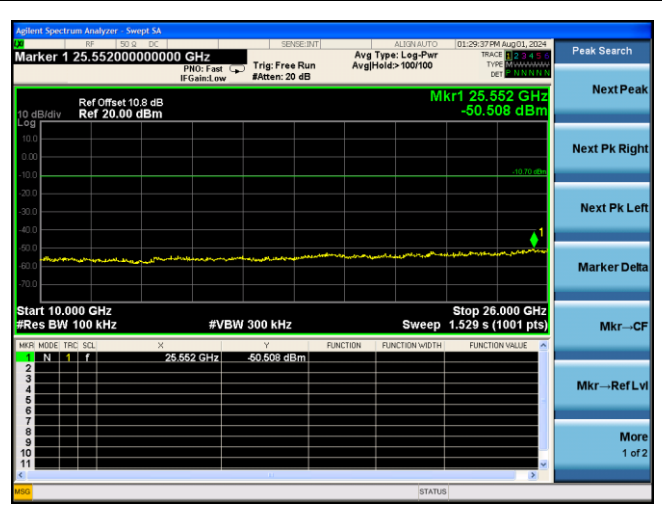


### 2402MHz(2.3GHz – 2.4GHz)

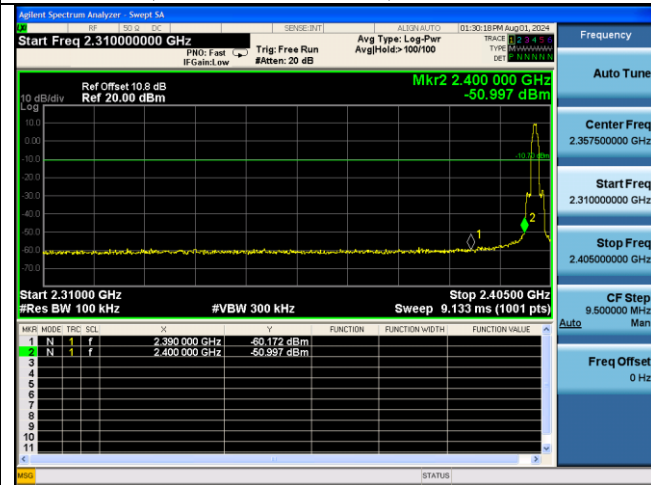


### 2441MHz(1GHz – 10GHz)

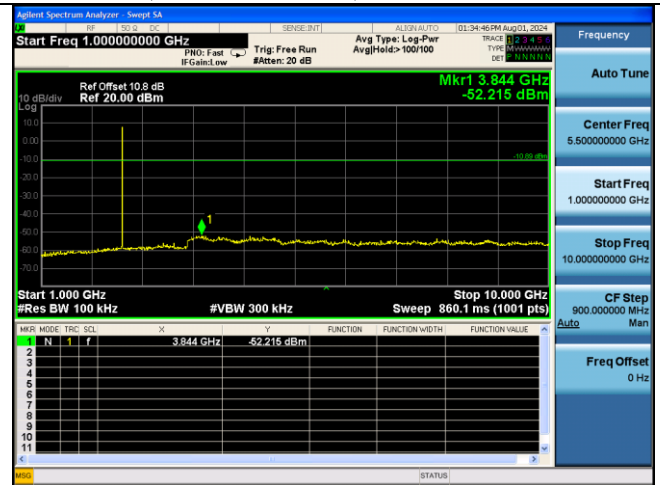


### 2441MHz

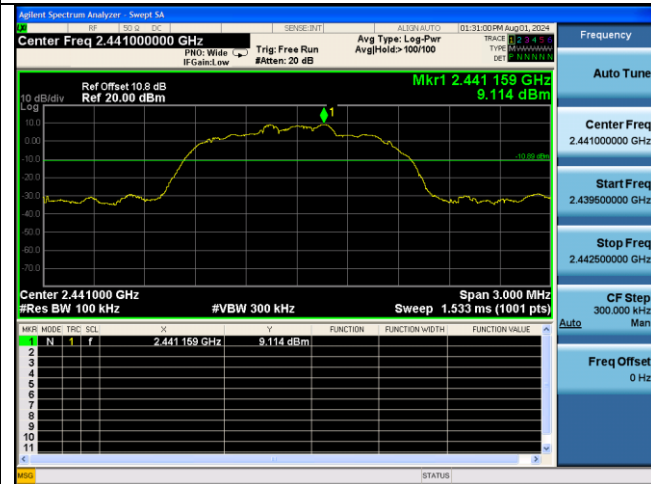


### 2441MHz(10GHz – 26GHz)

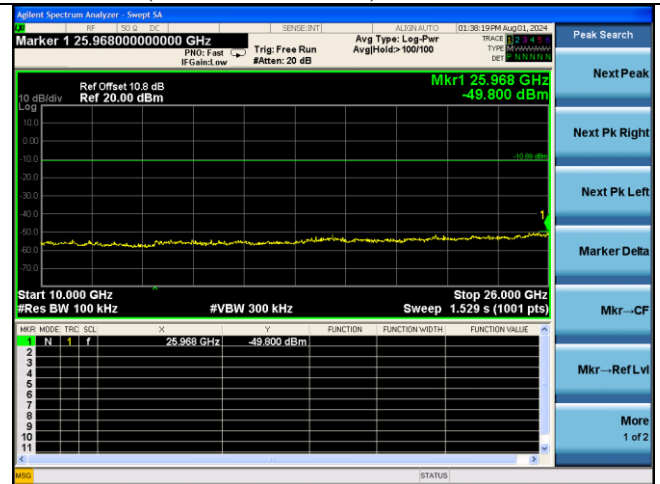


### 2441MHz (30MHz – 1GHz)

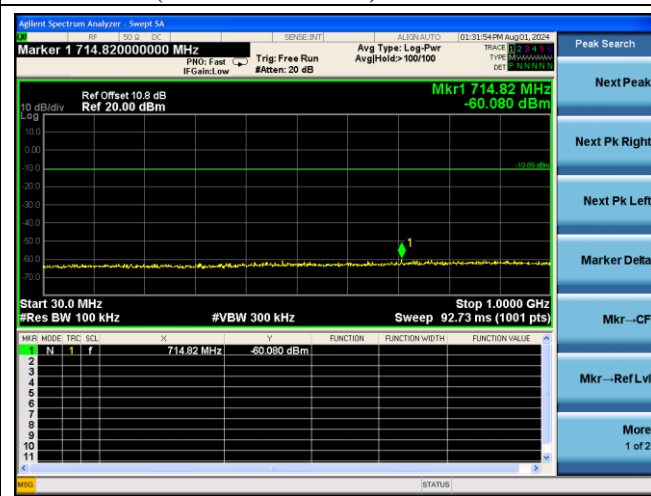


### 2480MHz

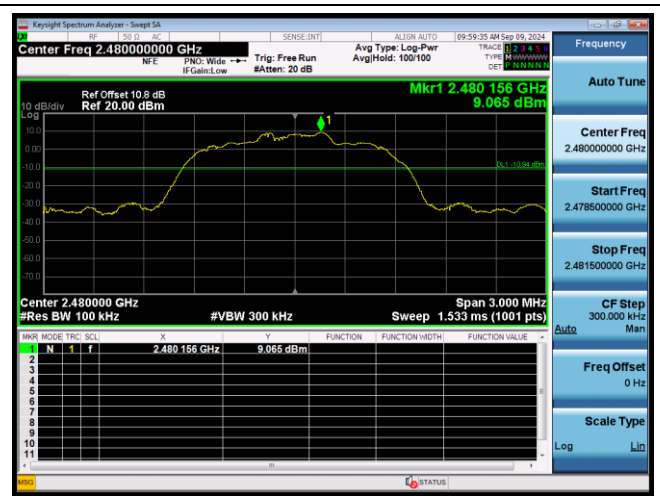


2480MHz(30MHz – 1GHz)

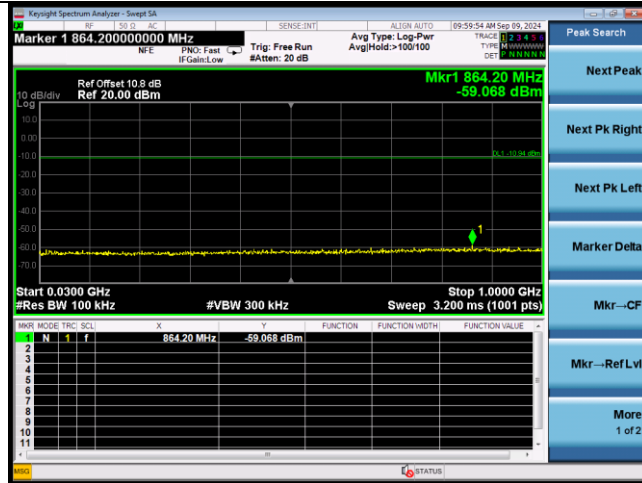

2480MHz(2.4GHz – 2.5GHz)

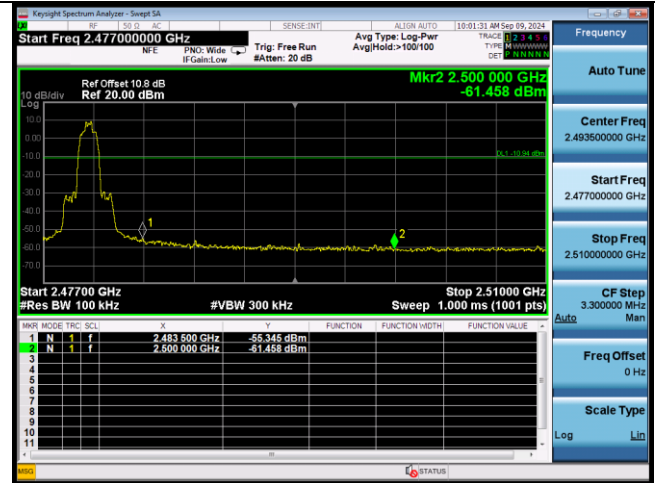


2480MHz(1GHz – 10GHz)

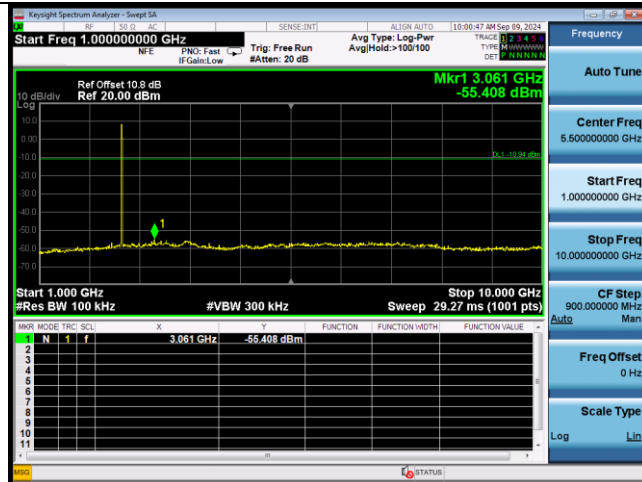

Hopping on

GFSK(2.3GHz – 2.4GHz)

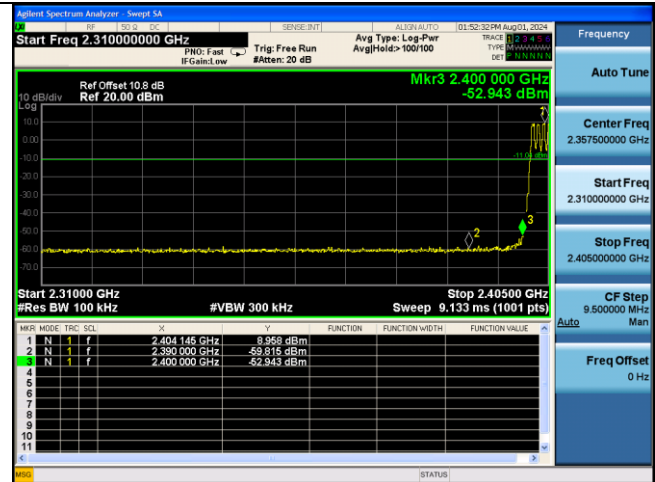

2480MHz(10GHz – 26GHz)




GFSK(2.4GHz – 2.5GHz)






### 8-DPSK(2.3GHz – 2.4GHz)

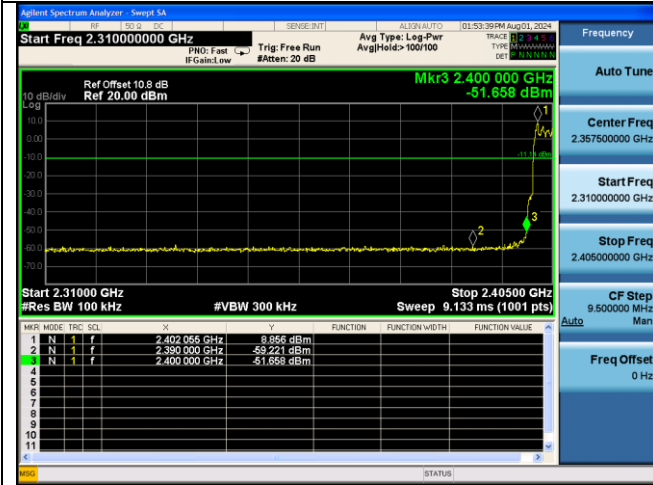

### 8-DPSK(2.4GHz – 2.5GHz)

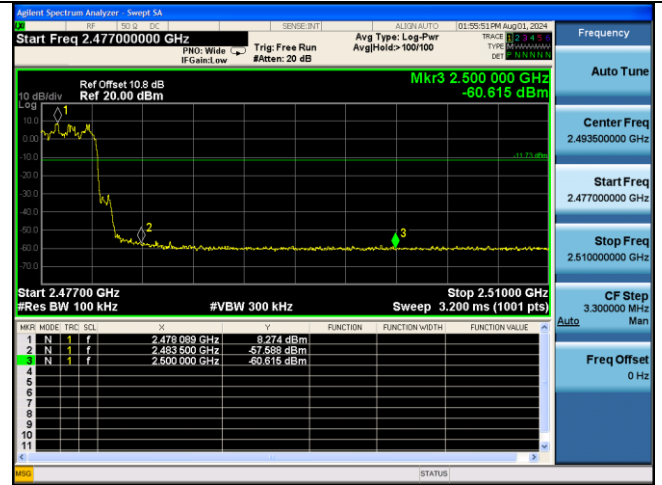

## 6. 20 DB & 99% BANDWIDTH TEST

### 6.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Mar.16,24	1 Year
2.	RF Cable	Eastsheep	RM086-SMA/N -JJ-2000	NO.1	Jun.19,24	1 Year
3.	Attenuator(10dB)	Agilent	8491B	MY39269201	Mar.16,24	1 Year

### 6.2. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 6.3. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.7:

1. Connect the antenna port of the EUT to the spectrum analyzer.
2. Let the EUT transmit at Low/ Mid/ High channel with test software.
3. Setting of SA is following as: RBW: 30kHz / VBW: 100kHz  
Sweep Mode: Continuous sweep  
Detect mode: Positive peak  
Trace mode: Max hold.
4. Use the occupied bandwidth function of the SA measure the 20dB bandwidth directly.

6.4. Test Results

EUT: Wireless Speaker		
M/N: YY7866E		
Date: 2024-07-29	Pressure: 101.3±1.0 kpa	Humidity: 52.4±3.0%
Tested by:Lili	Test Site: RF site	Temperature:23.1±0.6°C

Test Mode	Frequency (MHz)	20dB bandwidth (KHz)	Limit (KHz)
GFSK	2402	968.3	N/A
	2441	965.1	N/A
	2480	964.9	N/A
8-DPSK	2402	1280	N/A
	2441	1278	N/A
	2480	1277	N/A
Conclusion : PASS			

Test Mode	Frequency (MHz)	99% Bandwidth (KHz)	Limit (KHz)
GFSK	2402	884.59	N/A
	2441	885.08	N/A
	2480	883.91	N/A
8-DPSK	2402	1161.3	N/A
	2441	1160.1	N/A
	2480	1158.3	N/A
Conclusion : PASS			