

Test Report

FCC Part15 Subpart C

Product Name : Stereo Bluetooth/Corded headset
Model No. : BackBeat SENSE
FCC ID : AL8-BBS
IC : 457A-BBS

Applicant : Plantronics, Inc.

Address : 345 Encinal Street, Santa Cruz, CA95060 USA

Date of Receipt : Dec. 03, 2014

Test Date : Dec. 03, 2014~ Dec. 31, 2014

Issued Date : Jan. 08, 2015

Report No. : 14C0188R-RF-US-P06V02

Report Version : V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : Jan. 08, 2015

Report No. : 14C0188R-RF-US-P06V02



Product Name : Stereo Bluetooth/Corded headset
 Applicant : Plantronics, Inc.
 Address : 345 Encinal Street, Santa Cruz, CA95060 USA
 Manufacturer : Weifang GoerTek Electronics Co.,Ltd.
 Address : Weifang Free Trade Zone, Gaoxin 2 Road, High-Tech
 Industrial Development Zone, Weifang, Shandong
 Province, 261205, China
 Model No. : BackBeat SENSE
 FCC ID : AL8-BBS
 IC : 457A-BBS
 EUT Voltage : DC: 3.7V
 Brand Name : Plantronics
 Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2014
 ANSI C63.4: 2014; ANSI C63.10: 2013
 KDB 558074 D01 DTS Meas Guidance v03r02
 Industry Canada RSS-Gen Issue 4 / RSS-210 Issue 8
 Test Result : Complied
 Performed Location : Suzhou EMC Laboratory
 No.99 Hongye Rd., Suzhou Industrial Park Loufeng
 Hi-Tech Development Zone., Suzhou, China
 TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
 FCC Registration Number: 800392; IC Lab Code: 4075B

Documented By : Alice Ni
 Reviewed By : Dream Cao
 Approved By : Jeff Chen

Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

Taiwan R.O.C.	:	BSMI, NCC, TAF
Germany	:	TUV Rheinland
Norway	:	Nemko, DNV
USA	:	FCC
Japan	:	VCCI
China	:	CNAS

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site :<http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site :
<http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com

Linkou Testing Laboratory :

No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451, Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com

Suzhou Testing Laboratory :

No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., SuZhou, China
TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098 E-Mail : service@quietek.com

TABLE OF CONTENTS

Description	Page
1. General Information	7
1.1. EUT Description	7
1.2. Mode of Operation	10
1.3. Tested System Details	11
1.4. Configuration of Tested System	12
1.5. EUT Exercise Software	13
2. Technical Test	14
2.1. Summary of Test Result	14
2.2. Test Environment	16
3. Conducted Emission	17
3.1. Test Equipment	17
3.2. Test Setup	17
3.3. Limit	18
3.4. Test Procedure	18
3.5. Uncertainty	18
3.6. Test Result	19
4. Radiated Emission	21
4.1. Test Equipment	21
4.2. Test Setup	22
4.3. Limit	23
4.4. Test Procedure	23
4.5. Uncertainty	23
4.6. Test Result	24
5. RF Antenna Conducted Spurious	27
5.1. Test Equipment	27
5.2. Test Setup	27
5.3. Limit	27
5.4. Test Procedure	28
5.5. Uncertainty	28
5.6. Test Result	29
6. Radiated Emission Band Edge	32
6.1. Test Equipment	32
6.2. Test Setup	33
6.3. Limit	33
6.4. Test Procedure	33
6.5. Uncertainty	34
6.6. Test Result	35

7.	Operation Frequency Range of 20dB Bandwidth.....	43
7.1.	Test Equipment	43
7.2.	Test Setup	43
7.3.	Limit	43
7.4.	Test Procedure	43
7.5.	Uncertainty	43
7.6.	Test Result	44
8.	Occupied Bandwidth	45
8.1.	Test Equipment	45
8.2.	Test Setup	45
8.3.	Limit	45
8.4.	Test Procedure	45
8.5.	Uncertainty	46
8.6.	Test Result	47
9.	Power Output	49
9.1.	Test Equipment	49
9.2.	Test Setup	49
9.3.	Limit	49
9.4.	Test Procedure	49
9.5.	Uncertainty	50
9.6.	Test Result	51
10.	Power Spectral Density	52
10.1.	Test Equipment	52
10.2.	Test Setup	52
10.3.	Limit	52
10.4.	Test Procedure	52
10.5.	Uncertainty	53
10.6.	Test Result	54

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
14C0188R-RF-US-P06V02	V1.0	Initial Issued Report	Jan. 08, 2015

1. General Information

1.1. EUT Description

Product Name	Stereo Bluetooth/Corded headset
Brand Name	Plantronics
Model No.	BackBeat SENSE
Working Voltage	DC 3.7V
Bluetooth Specification	3.0HS + Version 4.0
Frequency Range	2402- 2480 MHz
Channel Number	V3.0+HS: 79 V4.0: 40
Channel Separation	V3.0+HS: 1MHz V4.0: 2MHz
Type of Modulation	V3.0+HS: GFSK, Pi/4 DQPSK, 8DPSK V4.0: GFSK
Data Rate	V3.0+HS: 1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps (8DPSK) V4.0: 1Mbps(GFSK)
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

Bluetooth Working Frequency of Each Channel: (For V3.0+HS)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz	03	2405 MHz
04	2406 MHz	05	2407 MHz	06	2408 MHz	07	2409 MHz
08	2410 MHz	09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz	15	2417 MHz
16	2418 MHz	17	2419 MHz	18	2420 MHz	19	2421 MHz
20	2422 MHz	21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz	27	2429 MHz
28	2430 MHz	29	2431 MHz	30	2432 MHz	31	2433 MHz
32	2434 MHz	33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz	39	2441 MHz
40	2442 MHz	41	2443 MHz	42	2444 MHz	43	2445 MHz
44	2446 MHz	45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz	51	2453 MHz
52	2454 MHz	53	2455 MHz	54	2456 MHz	55	2457 MHz
56	2458 MHz	57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz	63	2465 MHz
64	2466 MHz	65	2467 MHz	66	2468 MHz	67	2469 MHz
68	2470 MHz	69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz	75	2477 MHz
76	2478 MHz	77	2479 MHz	78	2480 MHz	N/A	N/A

Bluetooth Working Frequency of Each Channel: (For V4.0)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

Bluetooth Antenna List

Antenna	Manufacturer	Model No.	Peak Gain
Monopole Antenna	Goertek	ILA antenna	2.17dBi for 2.4GHz

1.2. Mode of Operation

QuieTek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit-1Mbps(GFSK_BLE)

Note:

1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case on this report.
3. This Bluetooth product can support Bluetooth 3.0 and 4.0, this report only indicate 4.0 test data. For Bluetooth 3.0 refer to report 14C0188R-RF-US-P06V01.

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	N/A	N/A	N/A	N/A	N/A

1.4. Configuration of Tested System

Connection Diagram		
EUT		
Signal Cable Type		Signal cable Description
N/A	N/A	N/A

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	Run the RF test software “Blue Test 3”, and set the test mode and channel, then press OK to start continue receive.

2. Technical Test

2.1. Summary of Test Result

- ☒ No deviations from the test standards
- ☐ Deviations from the test standards as below description:

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.207	Yes	No
Radiated Emission	FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.209	Yes	No
RF Antenna Conducted Spurious	FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.247(d)	Yes	No
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2014 15.247(d)	Yes	No
Operation Frequency Range of 20dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2014 15.215(c)	Yes	No
6dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.247(a)(2)	Yes	No
Power Output	FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.247(b)(3)	Yes	No
Power Spectral Density	FCC CFR Title 47 Part 15 Subpart C: 2014 Section 15.247(e)	Yes	No

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	RSS-Gen Issue 4 November 2014 Section 8.8	Yes	No
Radiated Emission	RSS-210 Issue 8 December 2010 Section 2.7 Table 2 and Table 3	Yes	No
RF Antenna Conducted Spurious	RSS-210 Issue 8 December 2010 Section A8.5	Yes	No
Radiated Emission Band Edge	RSS-210 Issue 8 December 2010 Section A8.5	Yes	No
Occupied Bandwidth	RSS-Gen Issue 4 November 2014 Section 6.6 RSS-210 Issue 8 December 2010 Section A8.2(1)	Yes	No
Power Output	RSS-210 Issue 8 December 2010 Section A8.4(4)	Yes	No
Power Spectral Density	RSS-210 Issue 8 December 2010 Section A8.2(2)	Yes	No

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

3. Conducted Emission


3.1. Test Equipment

Conducted Emission / TR-1

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100726	2015.03.30
Two-Line V-Network	R&S	ENV216	100043	2015.03.30
Two-Line V-Network	R&S	ENV216	100044	2015.09.16
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2015.03.01
50ohm Termination	SHX	TF2	07081401	2015.09.16
Temperature/Humidity Meter	zhicheng	ZC1-2	TR1-TH	2016.01.08

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

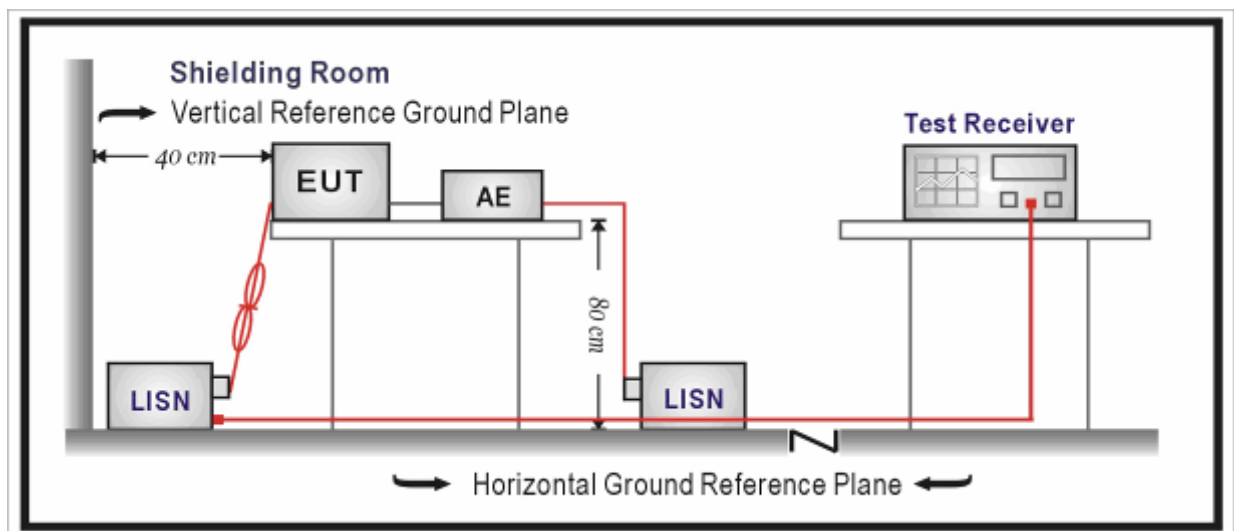

3.3. Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

3.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.


The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

3.5. Uncertainty

The measurement uncertainty is defined as ± 2.02 dB


3.6. Test Result

Site: TR1	Time: 2014/12/25 - 13:03
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Line
EUT: Stereo Bluetooth/Corded headset	Power: AC 120V/60Hz
Note: Mode4: Transmitter at ch2402 by BLE	

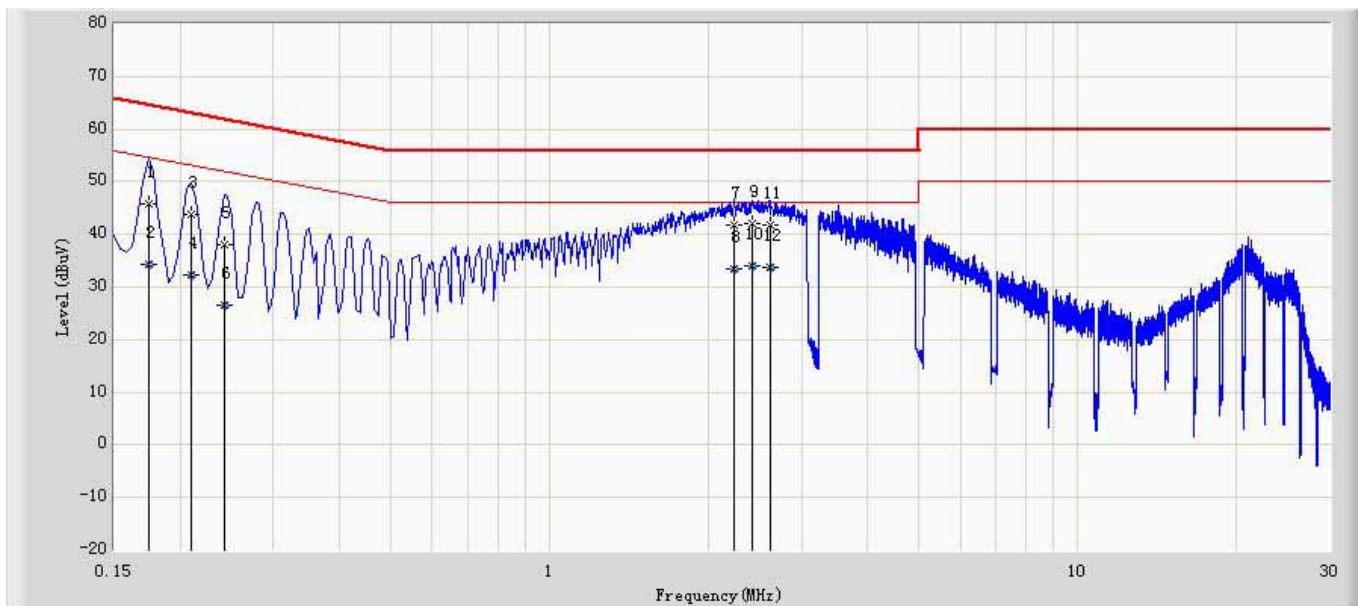

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.174	45.860	36.035	-18.907	64.767	9.825	QP
2		0.174	34.411	24.587	-20.356	54.767	9.825	AV
3		0.210	43.736	33.927	-19.469	63.205	9.810	QP
4		0.210	32.318	22.508	-20.888	53.205	9.810	AV
5		0.242	38.146	28.327	-23.881	62.027	9.819	QP
6		0.242	26.631	16.812	-25.396	52.027	9.819	AV
7		2.234	41.823	32.025	-14.177	56.000	9.797	QP
8		2.234	33.428	23.631	-12.572	46.000	9.797	AV
9		2.414	42.190	32.381	-13.810	56.000	9.808	QP
10	*	2.414	33.984	24.176	-12.016	46.000	9.808	AV
11		2.622	41.698	31.871	-14.302	56.000	9.827	QP
12		2.622	33.745	23.918	-12.255	46.000	9.827	AV

Site: TR1	Time: 2014/12/25 - 13:10
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Neutral
EUT: Stereo Bluetooth/Corded headset	Power: AC 120V/60Hz
Note: Mode4: Transmitter at ch2402 by BLE	

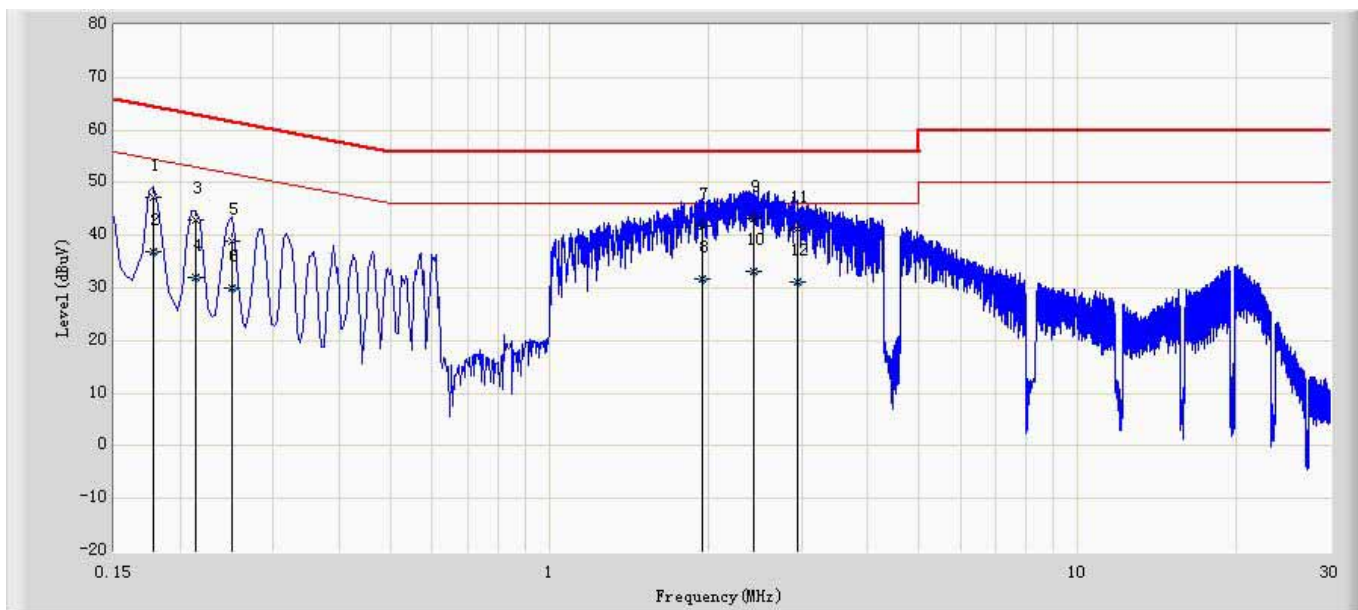

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.178	47.339	37.418	-17.240	64.578	9.921	QP
2		0.178	36.795	26.874	-17.784	54.578	9.921	AV
3		0.214	42.821	32.960	-20.228	63.049	9.860	QP
4		0.214	32.058	22.198	-20.990	53.049	9.860	AV
5		0.250	39.040	29.154	-22.717	61.757	9.887	QP
6		0.250	30.126	20.240	-21.631	51.757	9.887	AV
7		1.950	41.721	31.752	-14.279	56.000	9.969	QP
8		1.950	31.852	21.883	-14.148	46.000	9.969	AV
9		2.442	43.181	33.200	-12.819	56.000	9.981	QP
10	*	2.442	33.281	23.300	-12.719	46.000	9.981	AV
11		2.958	41.300	31.300	-14.700	56.000	10.000	QP
12		2.958	31.100	21.100	-14.900	46.000	10.000	AV

Note: All the low ,middle and high channels of all different modes are investigated, and only report the worst case.

4. Radiated Emission

4.1. Test Equipment



Radiated Emission / AC-2

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2015.03.28
Loop Antenna	R&S	HFH2-Z2	833799/003	2015.11.25
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2015.10.10
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2015.03.01
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC2-TH	2016.01.08

Radiated Emission / AC-5

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2015.05.12
Preamplifier	Miteq	NSP1800-25	1364185	2015.05.03
Preamplifier	Quietek	AP-040G	CHM-0906001	2015.05.03
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2015.10.15
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	499	2015.06.08
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2016.04.10
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2015.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2015.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2015.03.01
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC5-TH	2016.01.08

Below 1GHz Test Setup:

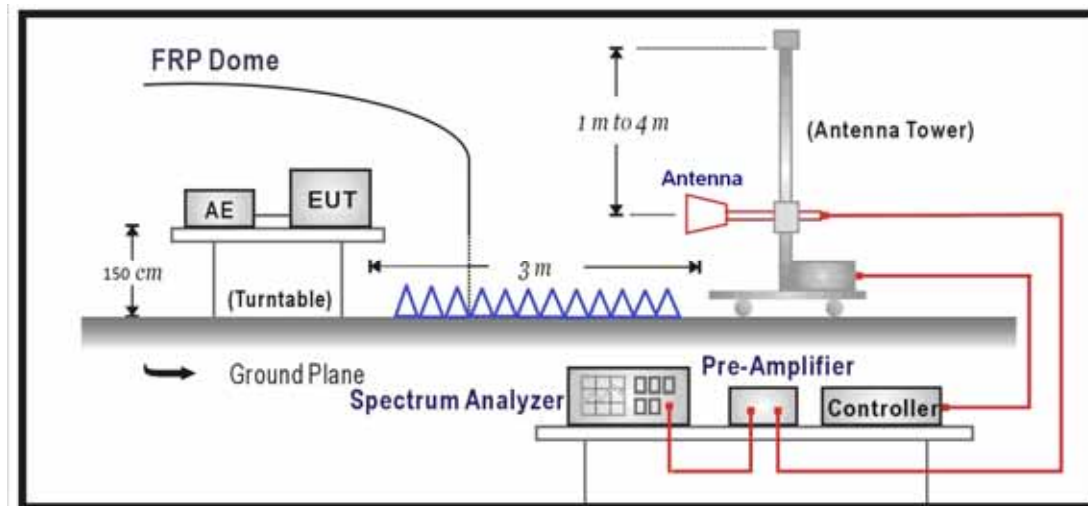

4.3. Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level (dBuV/m)
30 - 88	3	40
88 - 216	3	43.5
216 - 960	3	46
Above 960	3	54

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2009 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the "cone of radiation" of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

4.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
below 1G is defined as ± 3.8 dB

4.6. Test Result

All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;

Average detector: RBW = 1MHz, VBW = 10Hz, sweep time = auto.

Measure Level = Reading Level + Cable Loss + Antenna Factor - Preamplifier Gain

Mode 1: Transmitter-1Mbps(GFSK_BLE)


CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	H	4799.5	36.6	9.6	46.2	54(Note2)	-7.8	PK
	V	4804.0	33.9	9.7	43.6	54(Note2)	-10.4	PK
	H	7206.0	31.6	11.9	43.5	54(Note2)	-10.5	PK
	V	7206.0	32.5	11.9	44.4	54(Note2)	-9.6	PK
	H	9608.0	31.9	13.9	45.8	54(Note2)	-8.2	PK
	V	9608.0	32.8	13.9	46.7	54(Note2)	-7.3	PK
19	H	4799.5	37.5	9.6	47.1	54(Note2)	-6.9	PK
	V	4880.0	32.4	10.2	42.6	54(Note2)	-11.4	PK
	H	7320.0	32.0	12.0	44.0	54(Note2)	-10.0	PK
	V	7320.0	32.1	12.0	44.1	54(Note2)	-9.9	PK
	H	9760.0	31.2	14.1	45.3	54(Note2)	-8.7	PK
	V	9760.0	30.8	14.1	44.9	54(Note2)	-9.1	PK
39	H	4960.0	31.5	10.5	42.0	54(Note2)	-12.0	PK
	V	4944.0	36.3	10.5	46.8	54(Note2)	-7.2	PK
	H	7440.0	30.7	12.1	42.8	54(Note2)	-11.2	PK
	V	7440.0	32.3	12.1	44.4	54(Note2)	-9.6	PK
	H	9920.0	30.9	14.3	45.2	54(Note2)	-8.8	PK
	V	9920.0	30.6	14.3	44.9	54(Note2)	-9.1	PK

Note 1: The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

2: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.


The worst case of Radiated Emission below 1GHz:

Site: AC2	Time: 2014/12/25 - 17:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: CBL6112D_27611(30-2000MHz)	Polarity: Horizontal
EUT: Stereo Bluetooth/Corded headset	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2402MHz by BLE	

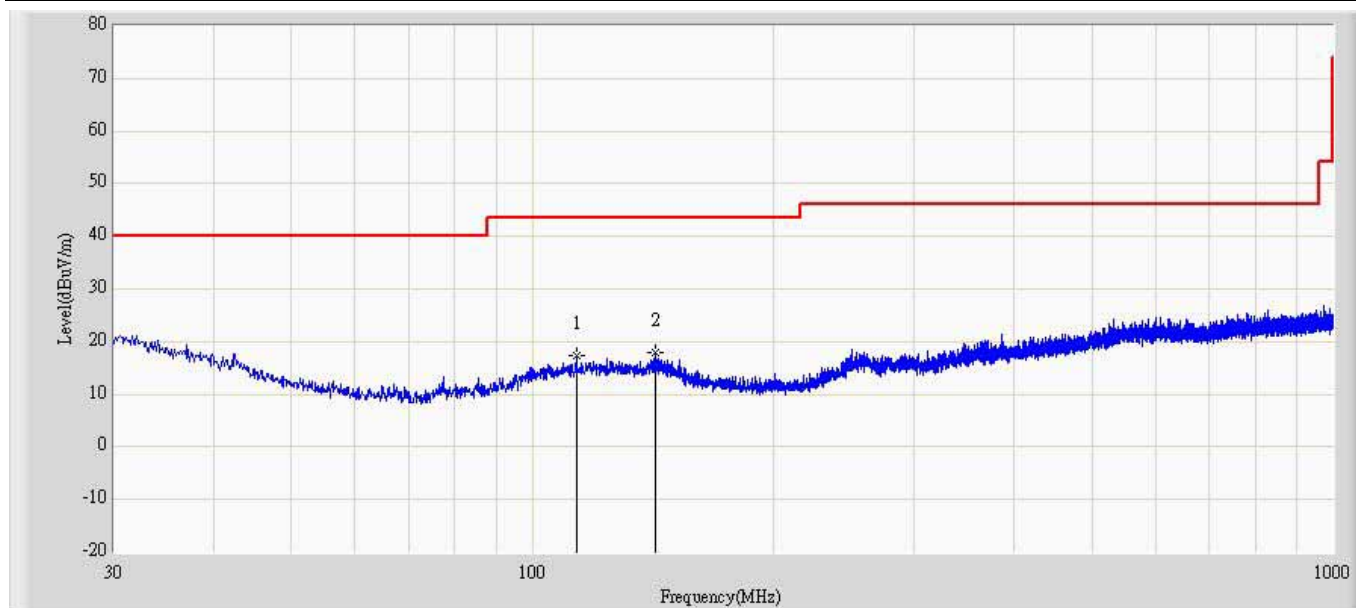

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		113.541	17.414	4.758	-26.086	43.500	12.656	QP
2	*	142.399	17.825	6.115	-25.675	43.500	11.710	QP

Site: AC2	Time: 2014/12/25 - 17:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: CBL6112D_27611(30-2000MHz)	Polarity: Vertical
EUT: Stereo Bluetooth/Corded headset	Power: AC 120V/60Hz
Note: Mode1: Transmit at channel 2402MHz by BLE	

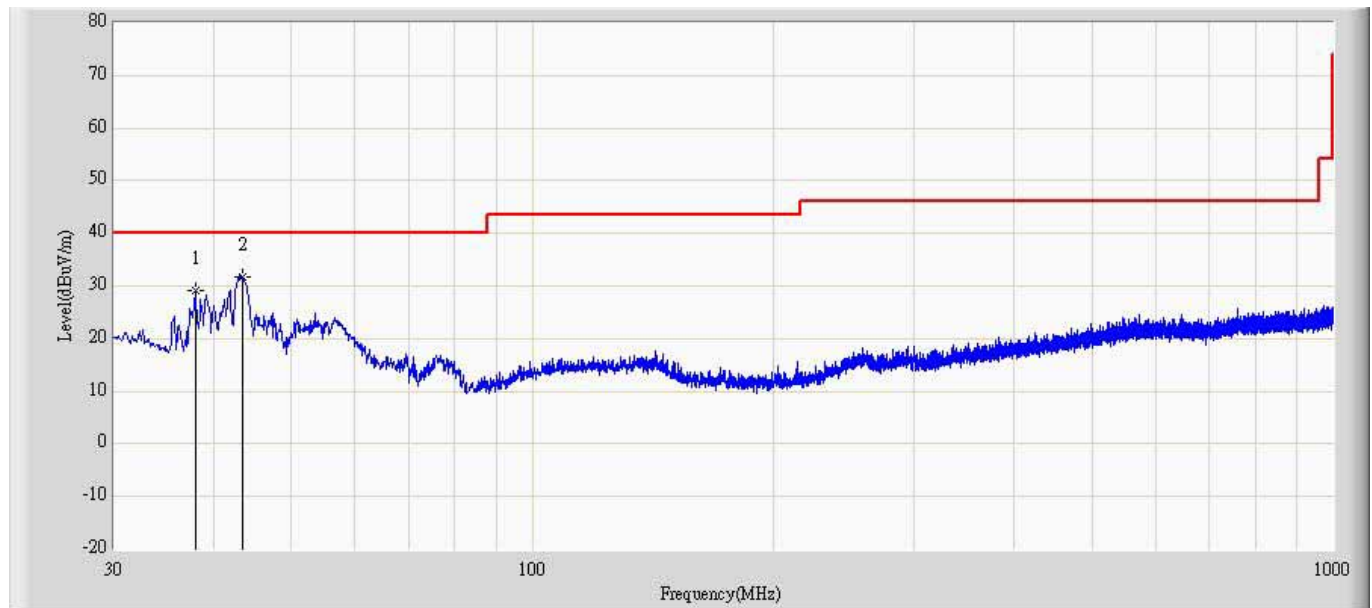

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		37.881	29.179	14.523	-10.821	40.000	14.656	QP
2	*	43.459	31.783	19.663	-8.217	40.000	12.120	QP

5. RF Antenna Conducted Spurious


5.1. Test Equipment

RF Antenna Conducted Spurious / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2015.05.12
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2015.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

5.2. Test Setup

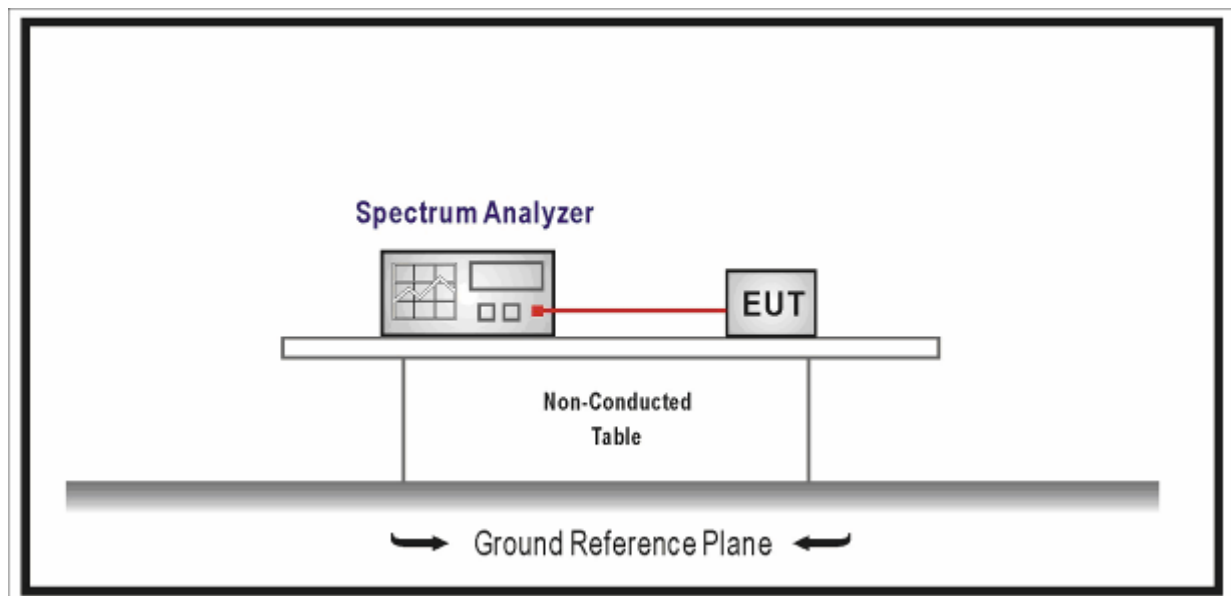

5.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4. Test Procedure

The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.


5.5. Uncertainty

The measurement uncertainty is defined as ± 1.27 dB

5.6. Test Result

Product	:	Stereo Bluetooth/Corded headset
Test Item	:	RF Antenna Conducted Spurious
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit-1Mbps(GFSK_BLE)


Channel 00 (2402MHz)

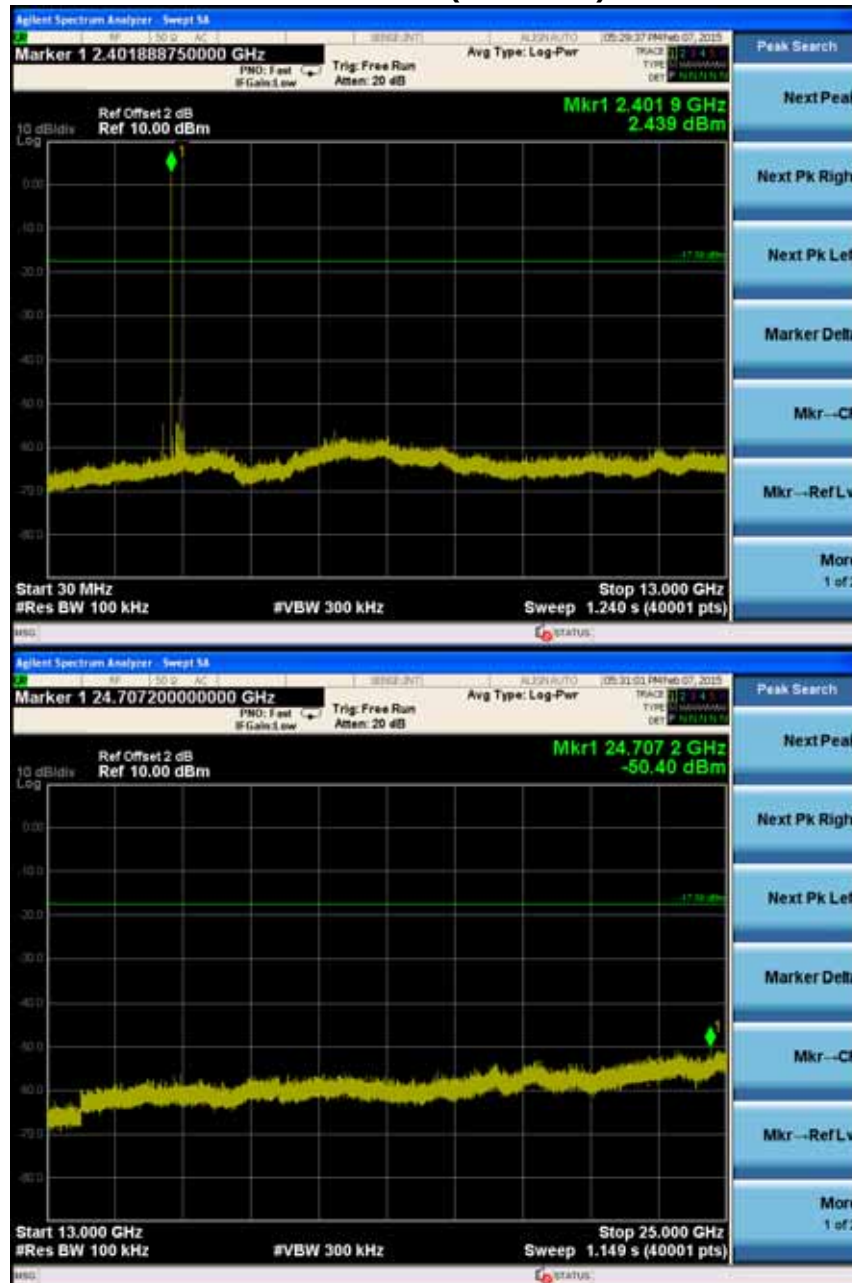

Channel 19 (2440MHz)



Channel 39 (2480MHz)

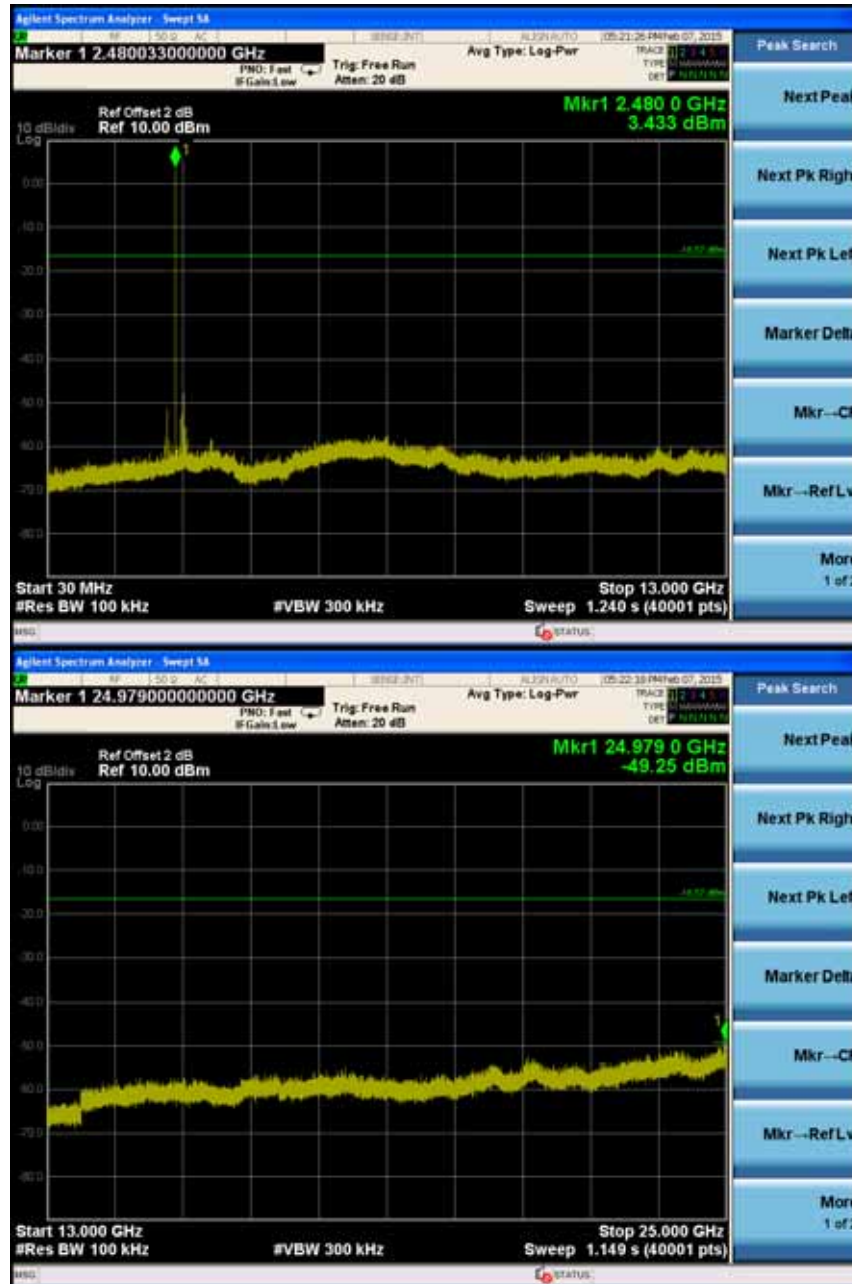

6. Radiated Emission Band Edge


6.1. Test Equipment

☒ Radiated Emission Band Edge / AC-5

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2015.03.30
Preamplifier	Miteq	NSP1800-25	1364185	2015.05.03
Preamplifier	QuieTek	AP-040G	CHM-0906001	2015.05.03
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2015.10.15
DRG Horn	ETS-Lindgren	3117	00123988	2016.01.05
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2015.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2015.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2015.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2015.08.07
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC5-TH	2016.01.08

Note 1: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

6.2. Test Setup

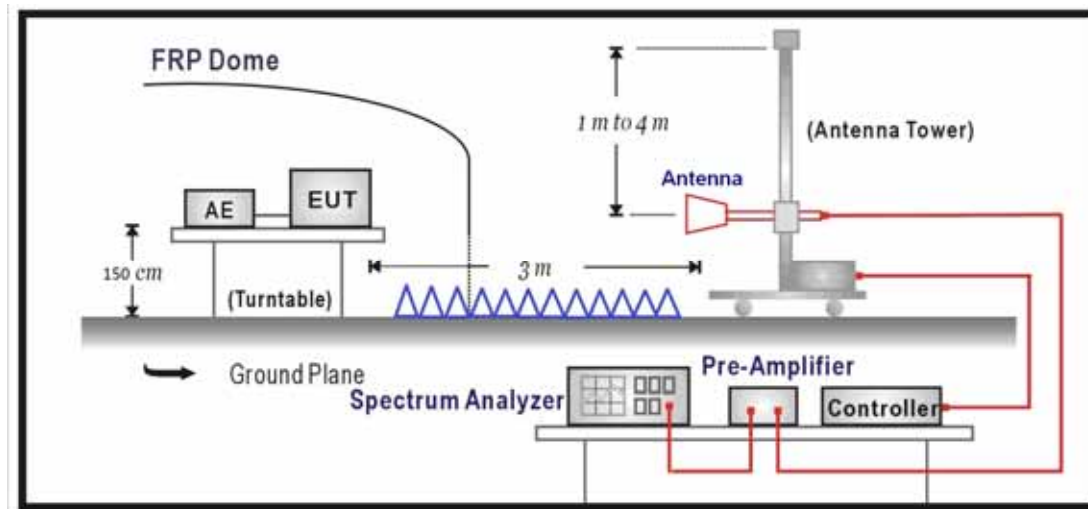

6.3. Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.4. Test Procedure

Since the EUT can be set to transmit continuously (Duty cycle >98%), use KDB 558074 Section 11.13.3.3 to perform band edge test for average value.

If the EUT can be configured or modified to transmit continuously ($D \geq 98\%$), then the average emission levels within 2 MHz of the authorized band edge may be measured using the following method (with EUT transmitting continuously):

- a) Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).
- b) Set span to 2 MHz.
- c) RBW = 100 kHz.
- d) $VBW \geq [3 \times RBW]$.
- e) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (RBW / 2)$.
- f) Averaging type = power (i.e., rms).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.


- h) Perform a trace average of at least 100 traces.
- i) Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz.

If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Since the EUT can be set to transmit continuously (Duty cycle <98%), use ANSI C63.10 Section 11.12.2.5 to perform band edge test for average value.

PK:RBW=1MHz,VBW=3MHz

AV: RBW=1MHz,VBW= 1/Ton(kHz)=1/0.3833=2.6kHz

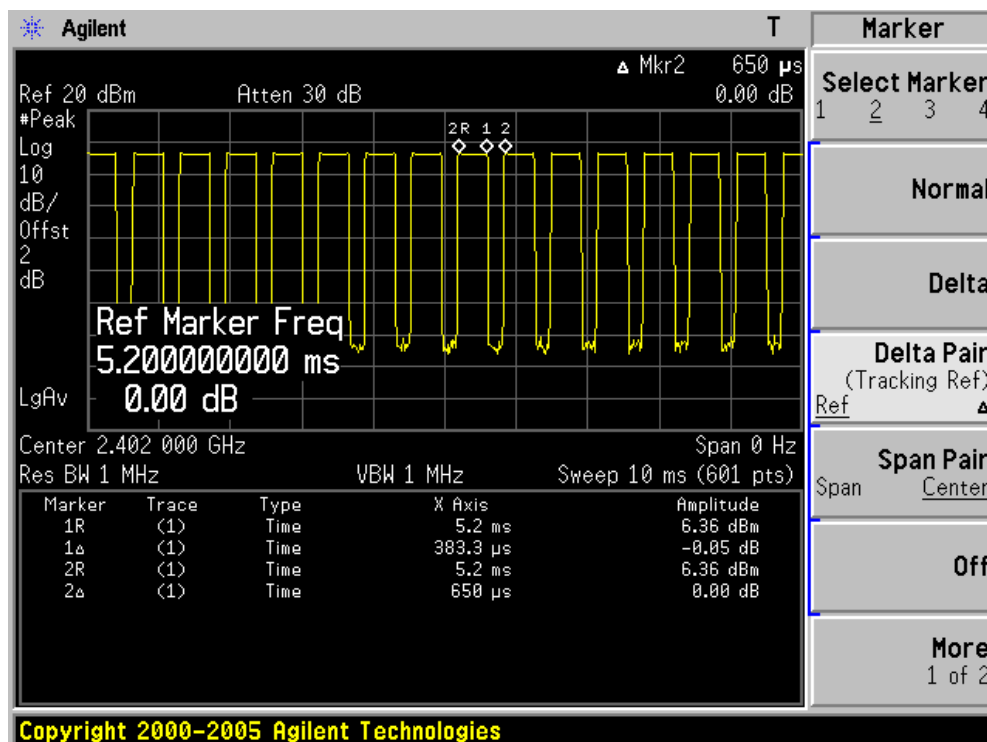


6.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB


6.6. Test Result

Site: AC5	Time: 2015/02/09 - 10:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: STEREO BLUETOOTH/CORDED HEADSET	Power: AC 120V/60Hz
Note: Mode1: Transmitter at ch2402 by BLE	

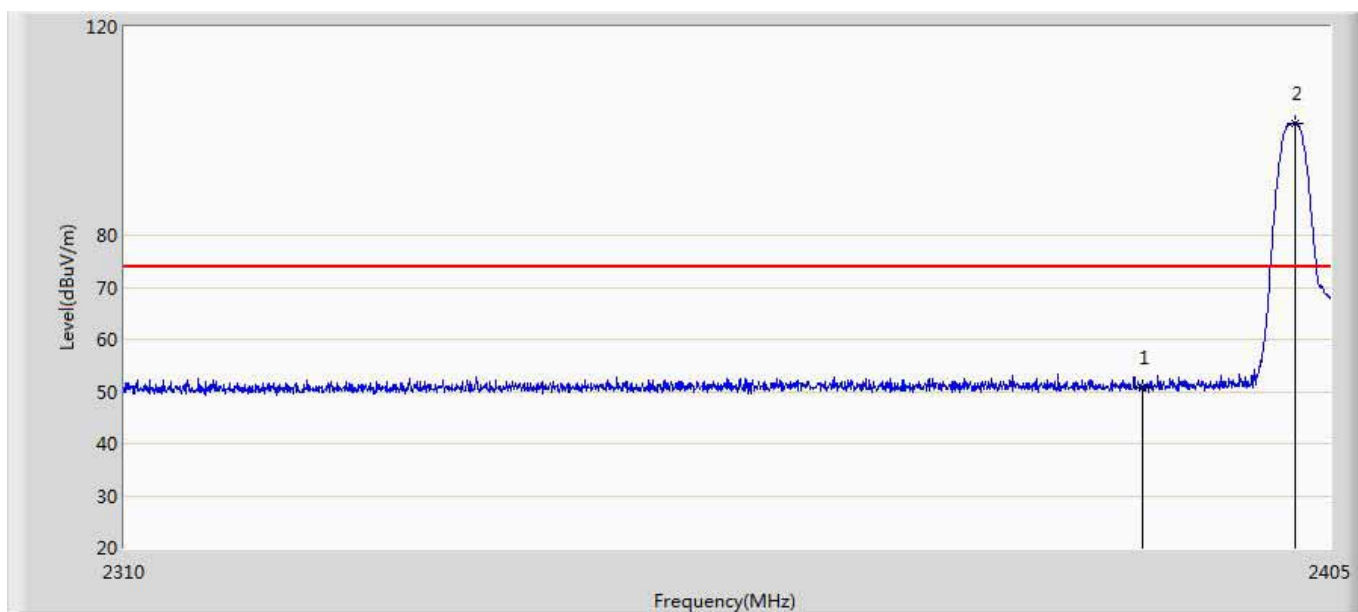


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.611	12.918	-23.389	74.000	37.693	PK
2	*	2402.150	101.552	63.799	N/A	N/A	37.753	PK

Site: AC5	Time: 2015/02/09 - 10:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: STEREO BLUETOOTH/CORDED HEADSET	Power: AC 120V/60Hz
Note: Mode1: Transmitter at ch2402 by BLE	

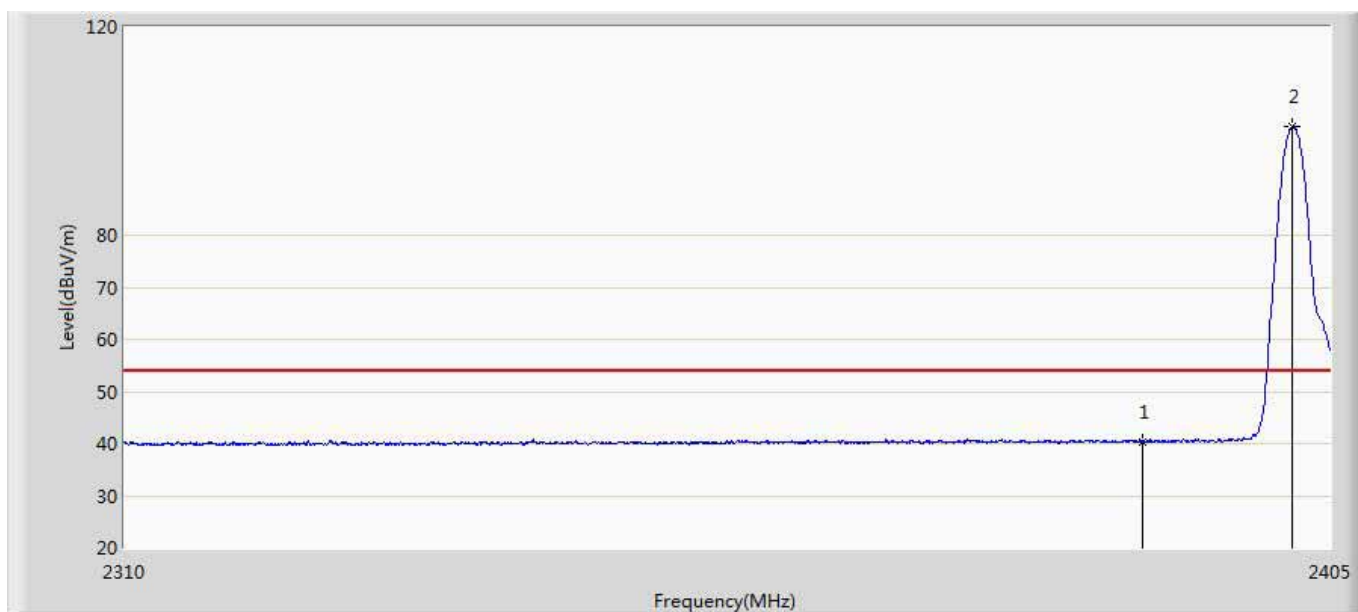


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	40.343	2.650	-13.657	54.000	37.693	AV
2	*	2402.008	100.904	63.152	N/A	N/A	37.752	AV

Site: AC5	Time: 2015/02/09 - 10:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: STEREO BLUETOOTH/CORDED HEADSET	Power: AC 120V/60Hz
Note: Mode1: Transmitter at ch2402 by BLE	

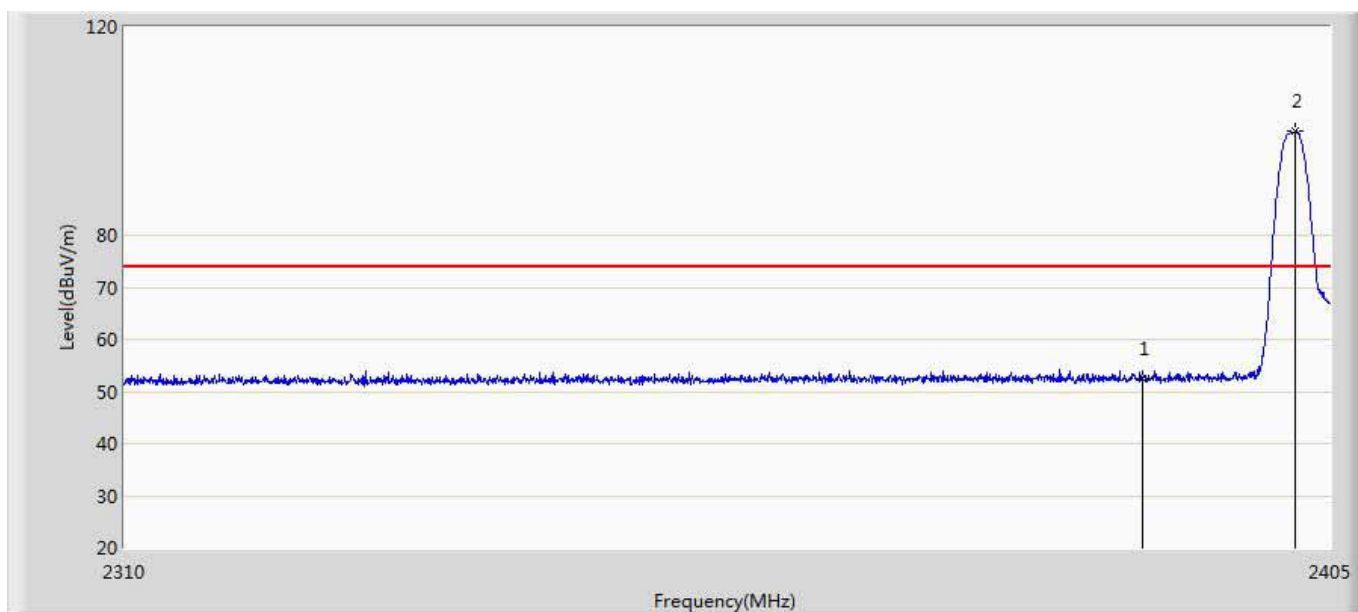


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	52.591	14.898	-21.409	74.000	37.693	PK
2	*	2402.245	99.986	62.233	N/A	N/A	37.753	PK

Site: AC5	Time: 2015/02/09 - 10:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: STEREO BLUETOOTH/CORDED HEADSET	Power: AC 120V/60Hz
Note: Mode1: Transmitter at ch2402 by BLE	

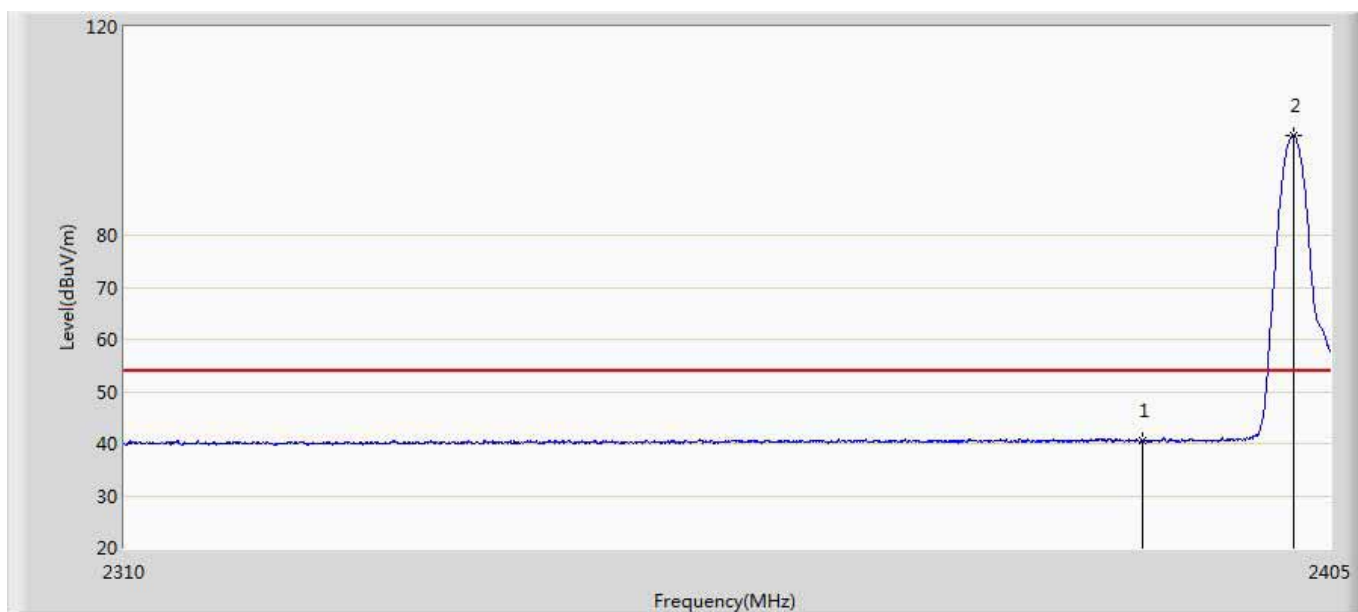


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	40.538	2.845	-13.462	54.000	37.693	AV
2	*	2402.055	99.165	61.413	N/A	N/A	37.752	AV

Site: AC5	Time: 2015/02/09 - 10:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: STEREO BLUETOOTH/CORDED HEADSET	Power: AC 120V/60Hz
Note: Mode1: Transmitter at ch2480 by BLE	

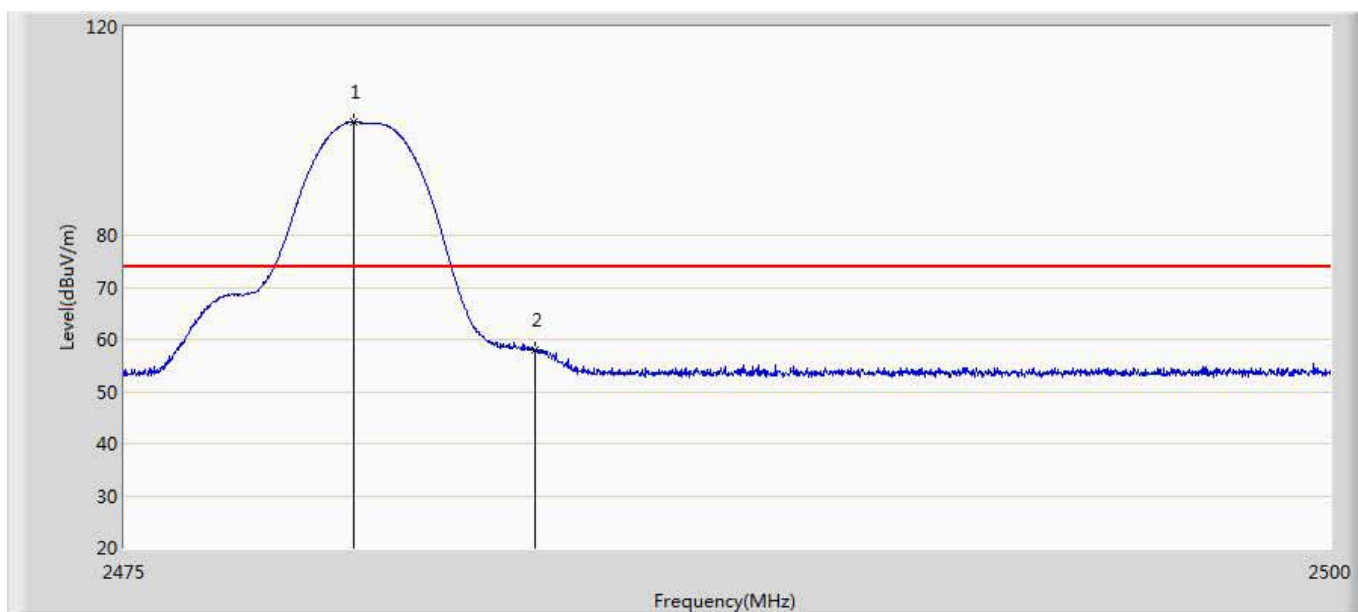


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.738	101.685	63.552	N/A	N/A	38.133	PK
2		2483.500	57.881	19.730	-16.119	74.000	38.150	PK

Site: AC5	Time: 2015/02/09 - 10:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: STEREO BLUETOOTH/CORDED HEADSET	Power: AC 120V/60Hz
Note: Mode1: Transmitter at ch2480 by BLE	

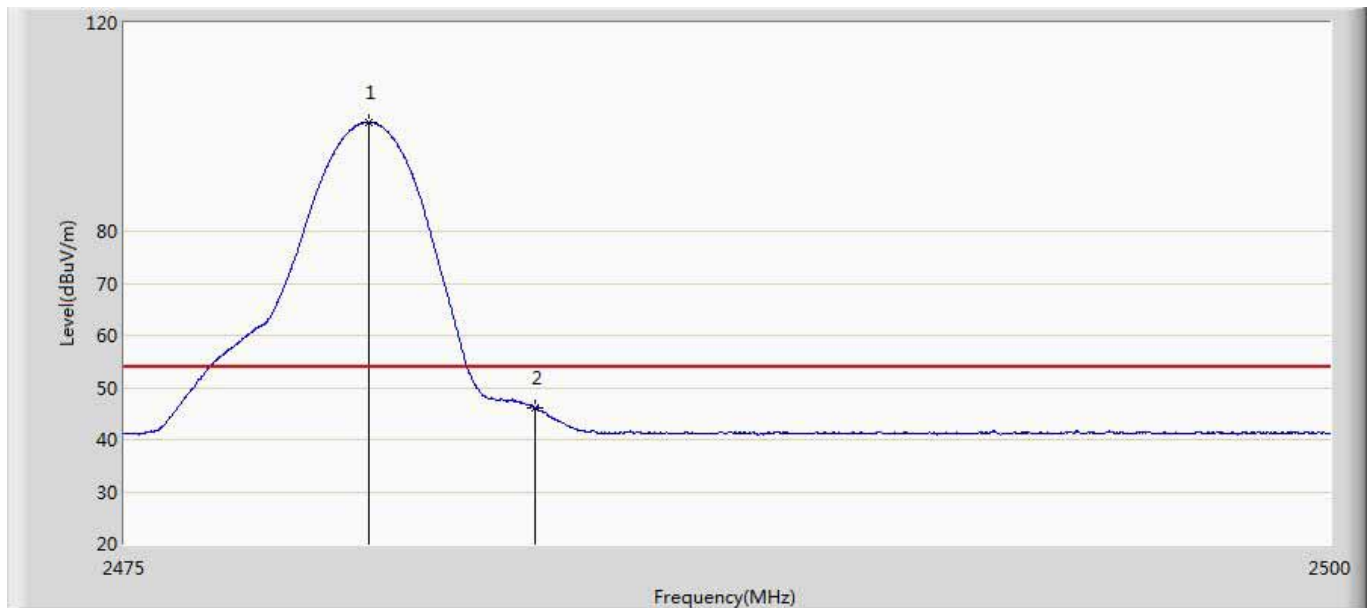


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.062	100.902	62.768	N/A	N/A	38.134	AV
2		2483.500	46.003	7.852	-7.997	54.000	38.150	AV

Site: AC5	Time: 2015/02/09 - 10:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: STEREO BLUETOOTH/CORDED HEADSET	Power: AC 120V/60Hz
Note: Mode1: Transmitter at ch2480 by BLE	

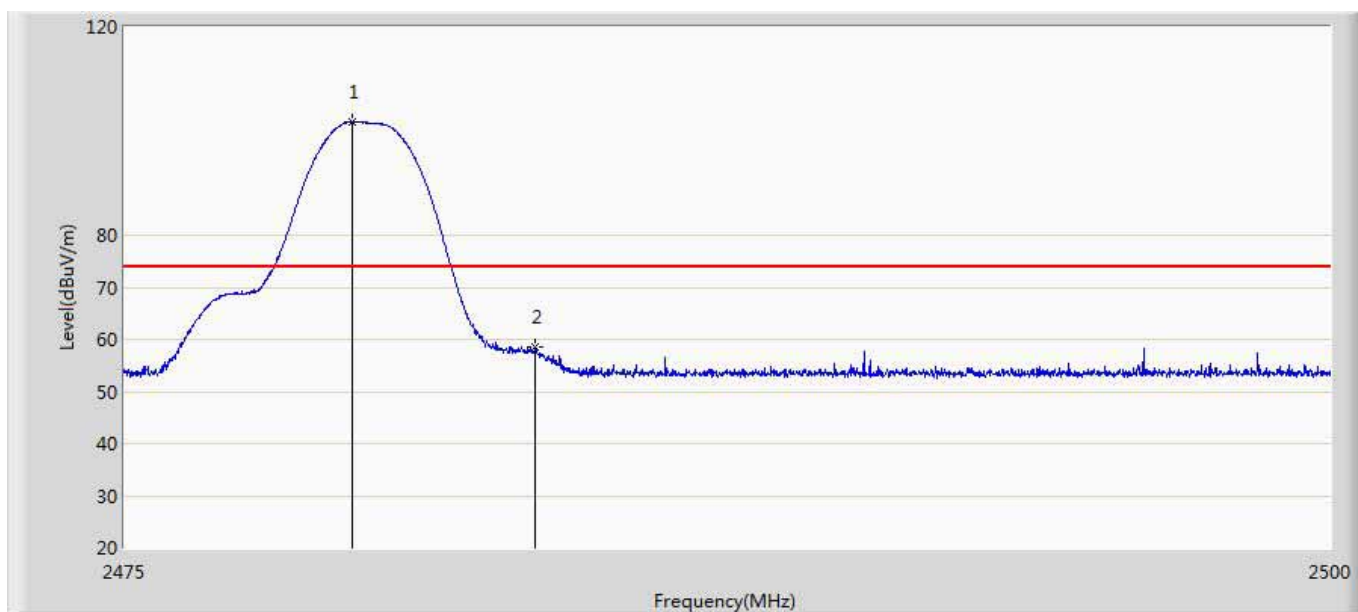

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.725	101.836	63.703	N/A	N/A	38.133	PK
2		2483.500	58.584	20.433	-15.416	74.000	38.150	PK

Site: AC5	Time: 2015/02/09 - 10:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: STEREO BLUETOOTH/CORDED HEADSET	Power: AC 120V/60Hz
Note: Mode1: Transmitter at ch2480 by BLE	

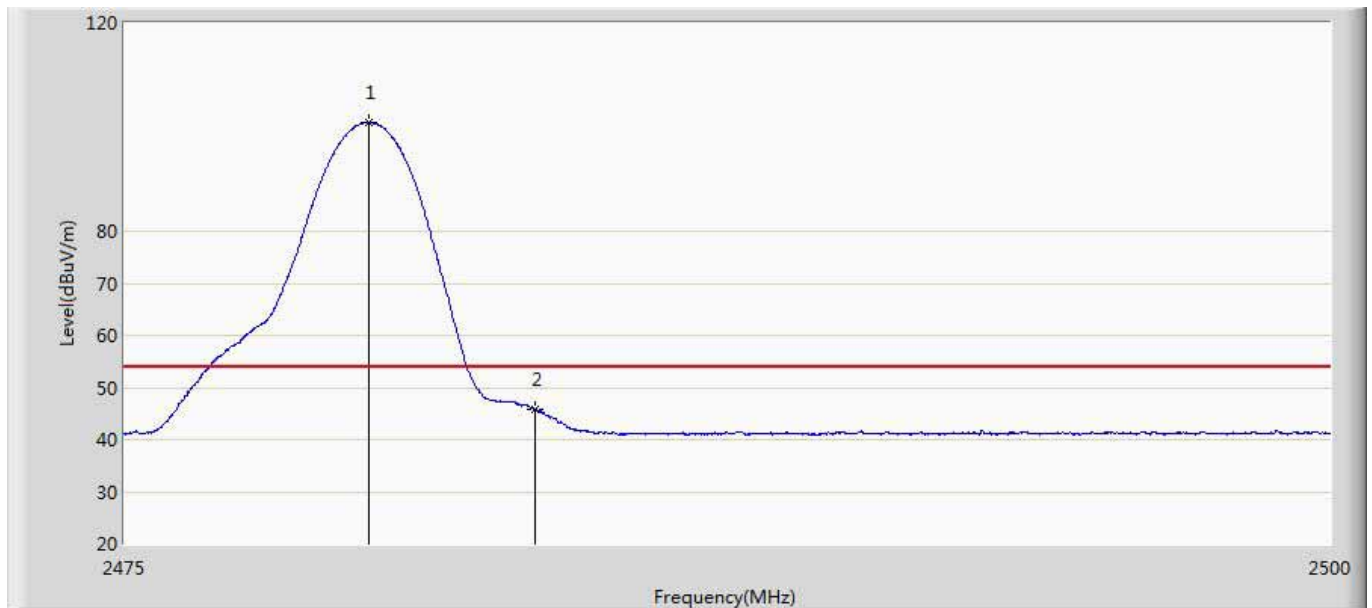

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.050	100.886	62.752	N/A	N/A	38.134	AV
2		2483.500	45.912	7.761	-8.088	54.000	38.150	AV

7. Operation Frequency Range of 20dB Bandwidth


7.1. Test Equipment

Operation Frequency Range of 20dB Bandwidth / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2016.01.05
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2015.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

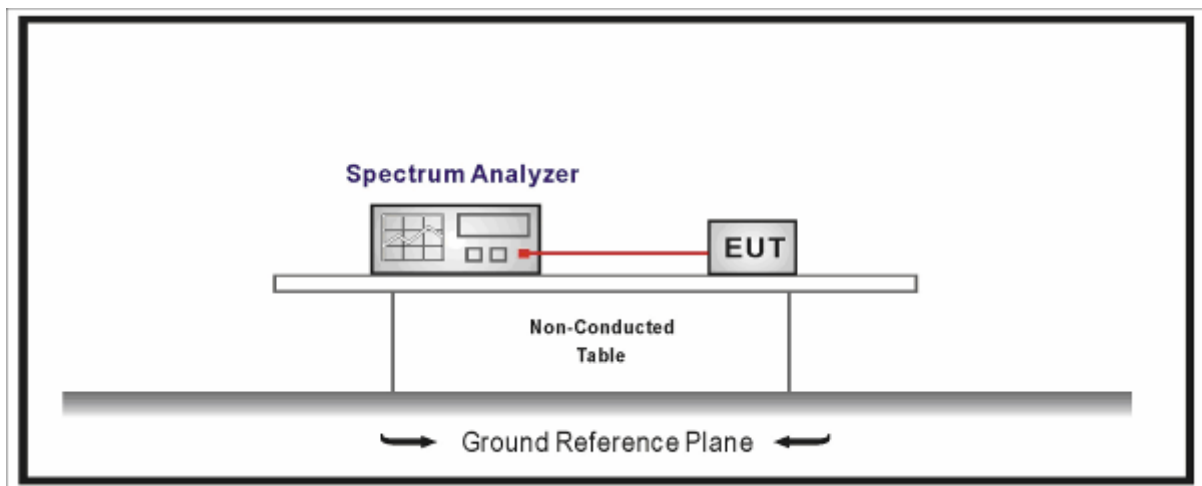

7.3. Limit

20 dB bandwidth of the emission is contained within the operation frequency band.

7.4. Test Procedure

The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.



Set RBW = 100 kHz, Span greater than RBW.

7.5. Uncertainty

The measurement uncertainty is defined as ± 1 kHz

7.6. Test Result

Product	:	Stereo Bluetooth/Corded headset
Test Item	:	Operation Frequency Range of 20dB Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit-1Mbps(GFSK_BLE)

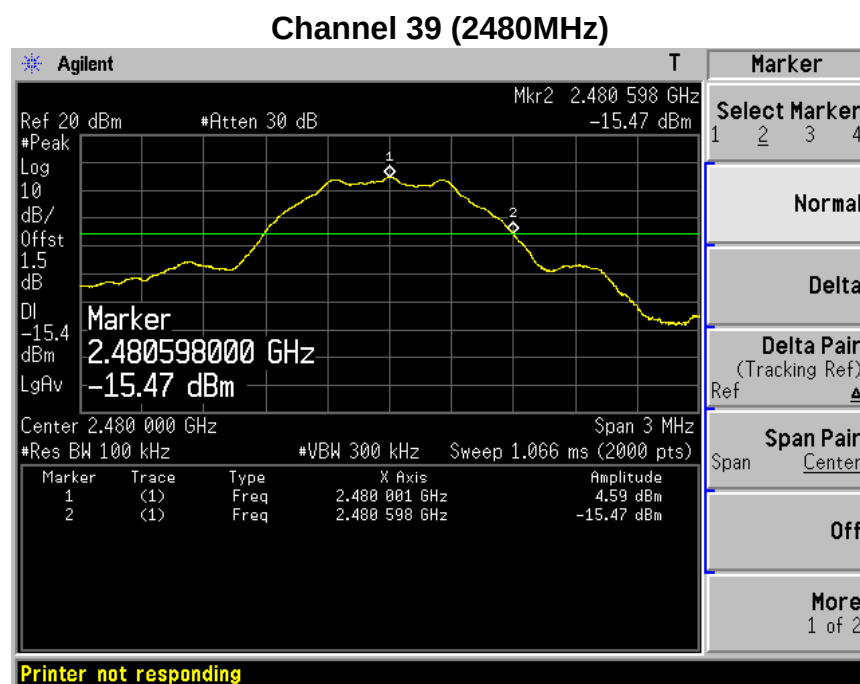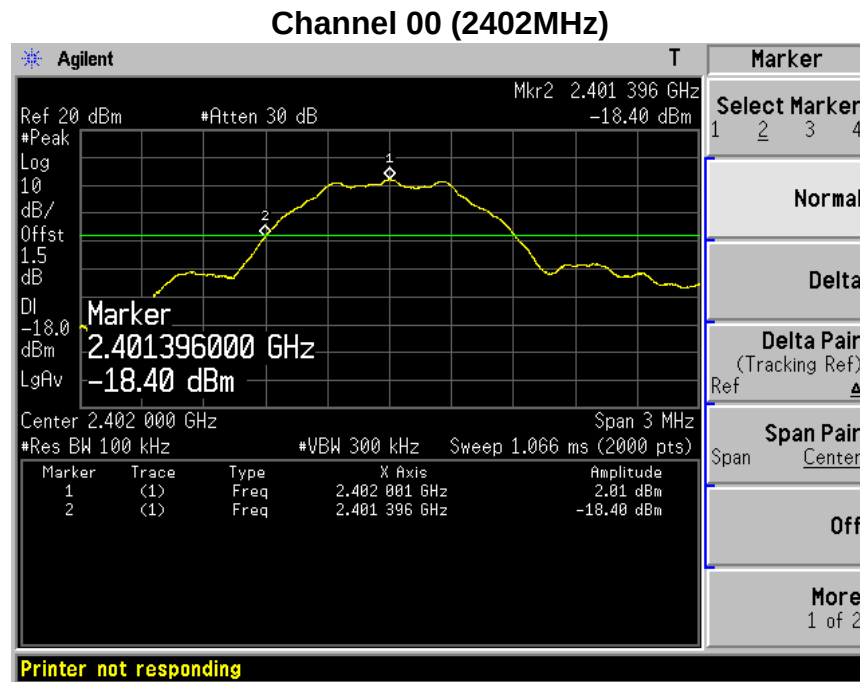

8. 6dB Bandwidth and Occupied Bandwidth


8.1. Test Equipment

Occupied Bandwidth / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2016.01.05
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2015.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

8.2. Test Setup

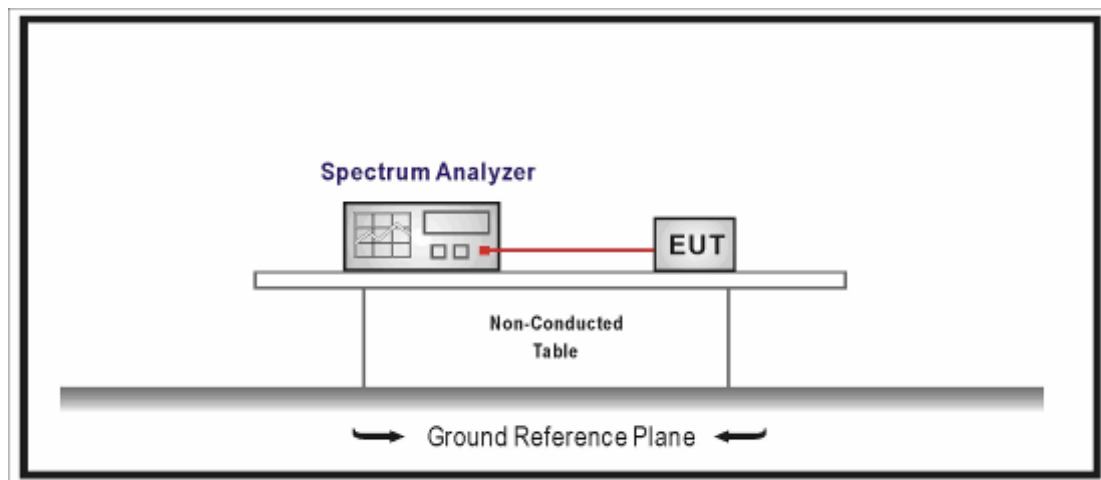

8.3. Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

8.4. Test Procedure

The EUT was setup according to ANSI C63.4: 2014; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The 6dB bandwidth test is using KDB 558074 Section 8.1 option 1 method.

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies

associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


8.5. Uncertainty

The measurement uncertainty is defined as ± 1 kHz


8.6. Test Result

Product	:	Stereo Bluetooth/Corded headset
Test Item	:	6dB Bandwidth & 99% Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit-1Mbps(GFSK_BLE)


Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)	Occupied Bandwidth (kHz)	Limit (kHz)	Result
00	2402	699.336	1052.1	>500	Pass
19	2440	691.314	1052.3	>500	Pass
39	2480	697.185	1049.3	>500	Pass

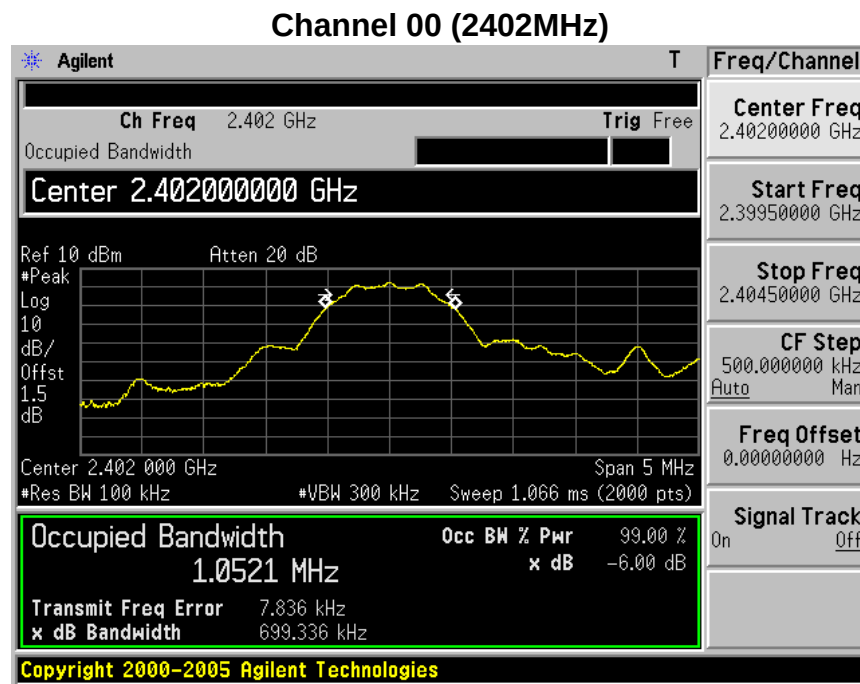

Channel 19 (2440MHz)

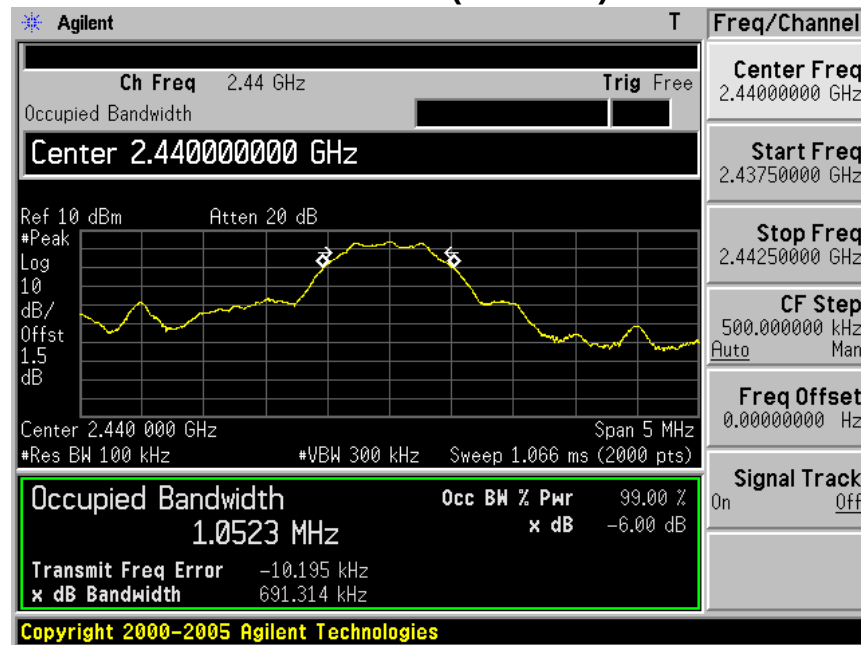

Channel 39 (2480MHz)

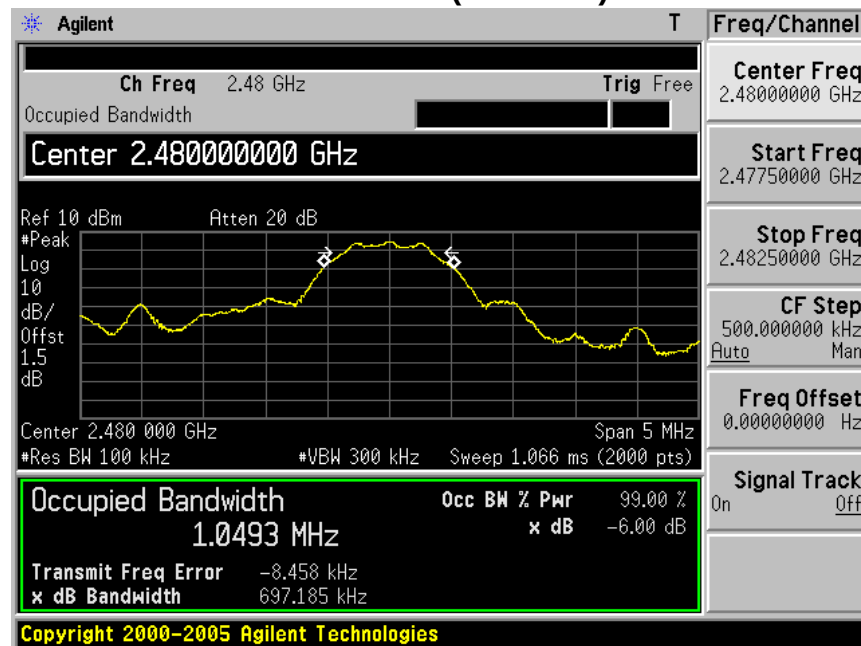

9. Power Output


9.1. Test Equipment

Power Output / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2015.10.29
Power Sensor	Anritsu	MA2411B	0846014	2015.10.29
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2015.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

9.2. Test Setup

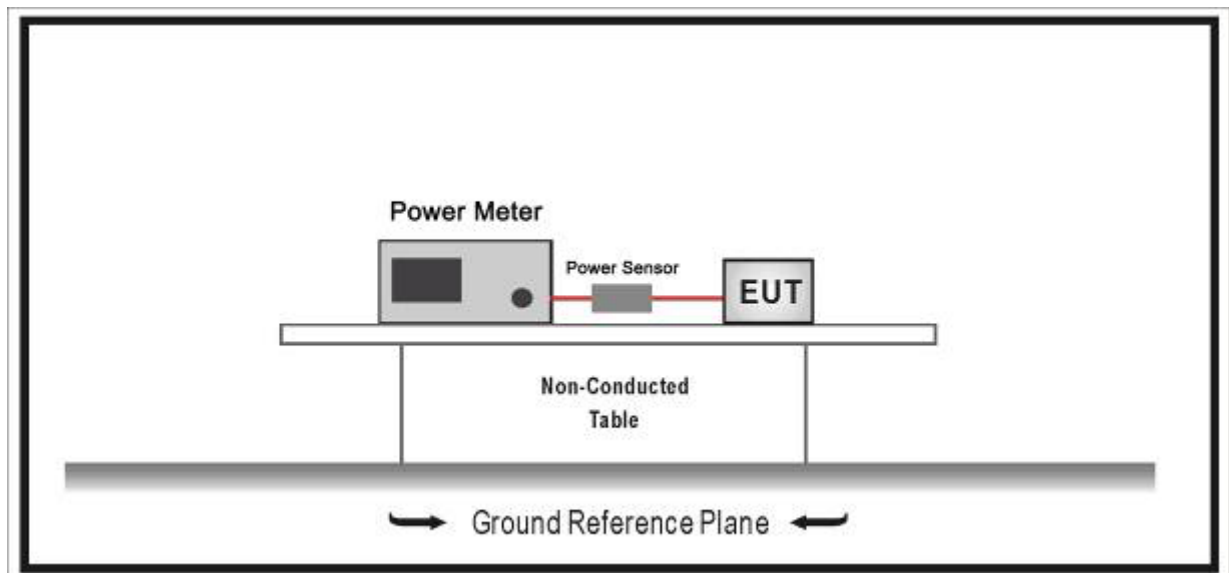

9.3. Limit

The maximum peak power shall be less 1 Watt (30dBm).

Note: the conducted output power limit specified above is based on the use the antennas with directional gains that do not exceed 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values above, as appropriate, by the amount in dB that the directional gain of antenna exceeds 6 dBi.

9.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 D01 DTS Meas Guidance v03r02 section 9.1.2 PKPM1 Peak power meter method.

1. Power meter and sensor's minimum video bandwidth is 50MHz, larger than EUT's bandwidth;
Fast responding diode sensors respond immediately to changes in power level to reduce total test time.
2. Use peak detector to test.

9.5. Uncertainty

The measurement uncertainty is defined as ± 1.27 dB

9.6. Test Result

Product	:	Stereo Bluetooth/Corded headset
Test Item	:	Power Output
Test Site	:	TR8
Test Mode	:	Mode 1: Transmit-1Mbps(GFSK_BLE)

Channel No.	Frequency (MHz)	Power Output (dBm)	Limit (dBm)	Result
00	2402	2.44	30.00	Pass
19	2440	4.32	30.00	Pass
39	2480	5.04	30.00	Pass

10. Power Spectral Density


10.1. Test Equipment

Power Spectral Density / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2016.01.05
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2015.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

10.2. Test Setup

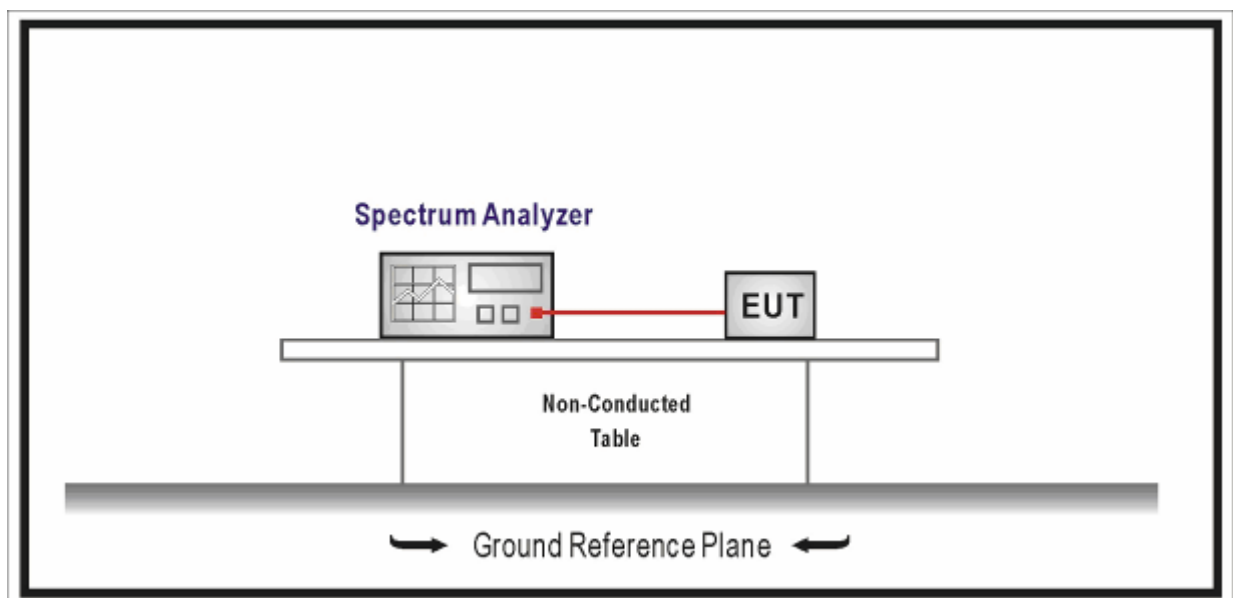

10.3. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiated to the Antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

10.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2009; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. (Actually we use 3kHz RBW)

- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the band.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.5. Uncertainty


The measurement uncertainty is defined as ± 1.27 dB

10.6. Test Result


Product	:	Stereo Bluetooth/Corded headset
Test Item	:	Power Spectral Density
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmit-1Mbps(GFSK_BLE)

Channel No.	Frequency (MHz)	Measurement PPSD (dBm)	Limit (dBm)	Result
00	2402	-13.43	8	Pass
19	2440	-11.57	8	Pass
39	2480	-10.72	8	Pass


Channel 00 (2402MHz)

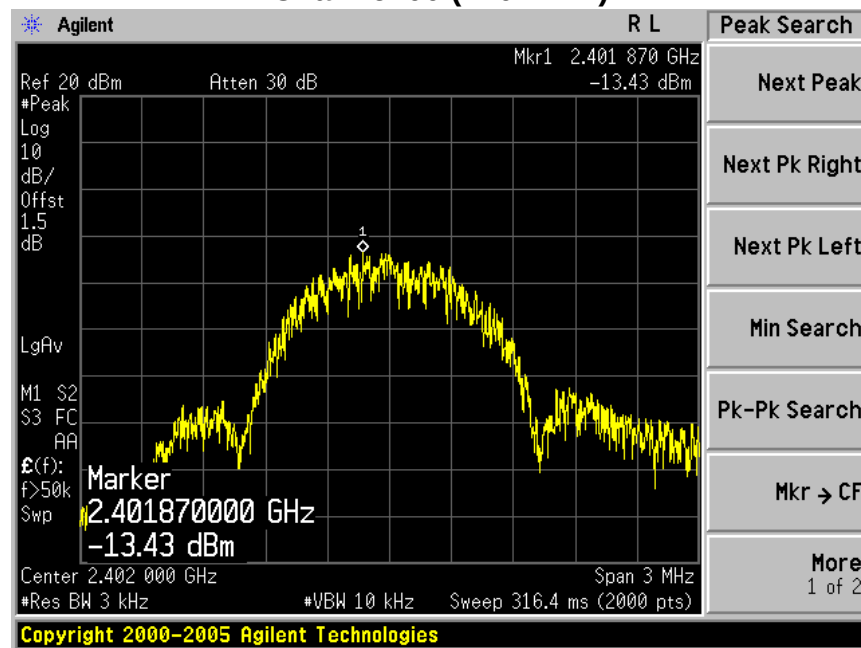

Channel 19 (2440MHz)

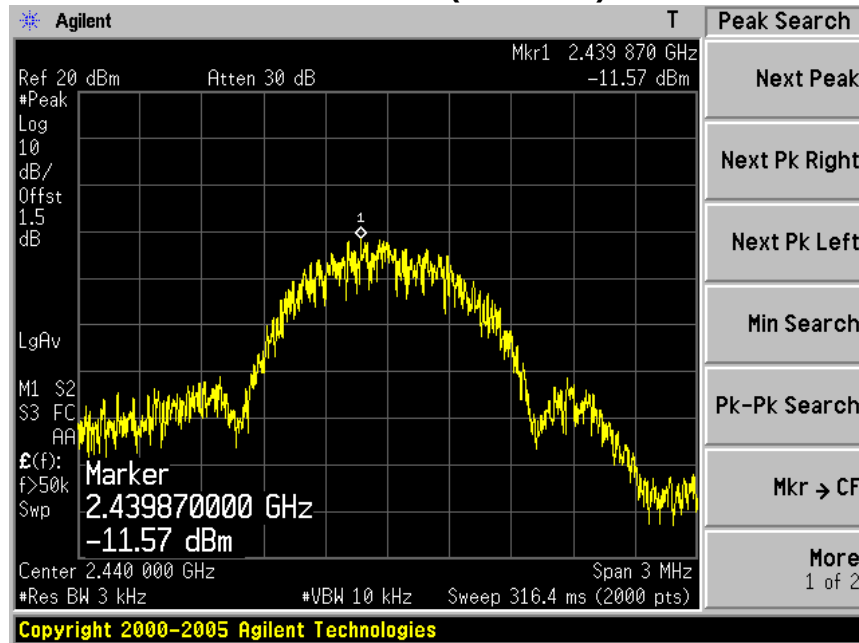

Channel 39 (2480MHz)

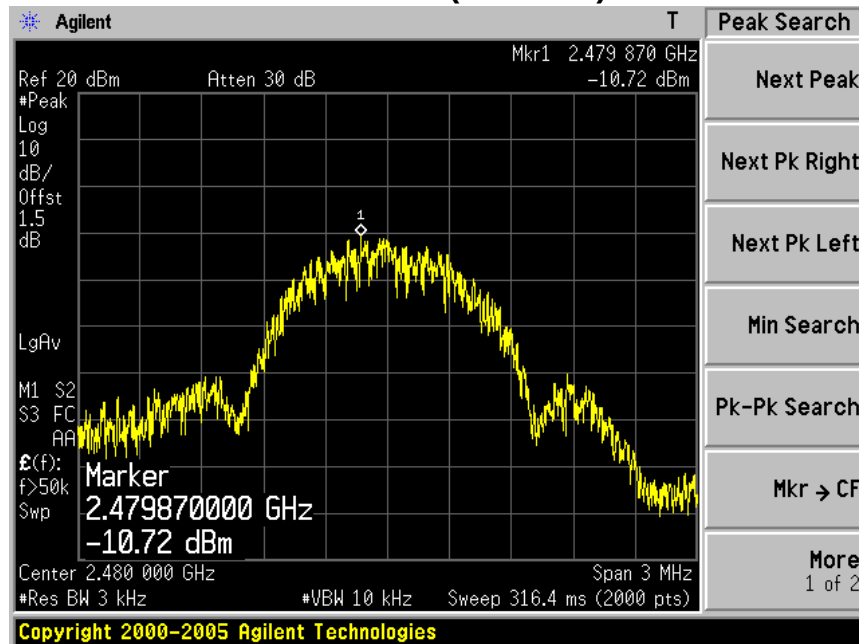

The End