

# **FCC Test Report**

Report No.: AGC03061180302FE08

**FCC ID** : AL8-BF3100S

**APPLICATION PURPOSE**: Original Equipment

PRODUCT DESIGNATION : Stereo Bluetooth Headset

**BRAND NAME** : Plantronics

MODEL NAME : BF3100S

**CLIENT** : Plantronics, Inc.

**DATE OF ISSUE** : Apr. 16, 2018

**STANDARD(S)** : FCC Part 15 Subpart C Section 15.247

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

#### **CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 48

#### **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	© Mariestatio	Apr. 16, 2018	Valid	Initial release	

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Report No.: AGC03061180302FE08 Page 3 of 48

#### **TABLE OF CONTENTS**

1. VERIFICATION OF COMPLIANCE	6
2.2TEST METHOD	
2.3 EQUIPMENT MODIFICATIONS	9 <b>6 6</b>
2.4 MEASUREMENT UNCERTAINTY	
3. SYSTEM TEST CONFIGURATION	7
3.2 EQUIPMENT USED IN TESTED SYSTEM	
3.3. SUMMARY OF TEST RESULTS	A CONTRACTOR OF THE CONTRACTOR
4. DESCRIPTION OF TEST MODES 5. TEST FACILITY	
7.2. TEST RESULT	
8. RADIATED EMISSION	
8.2 MEASUREMENT PROCEDURE	14
8.3 TEST SETUP	15
8.4 TEST RESULT (WORST MODULATION: GFSK)	17
9. BAND EDGE EMISSION	
9.2. TEST SET-UP	
9.3. TEST RESULT	30
10. 6DB BANDWIDTH	<b>34</b>
10.2. SUMMARY OF TEST RESULTS/PLOTS	34
11. CONDUCTED OUTPUT POWER	
11.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	36
11.3. LIMITS AND MEASUREMENT RESULT	
12. CONDUCTED SPURIOUS EMISSION	39
12.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	39
12.3 LIMITS AND MEASUREMENT RESULT	30

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.



Page 4 of 48

13. CONDUCTED OUTPUT POWER SPECTRAL DENSITY	
13.1 MEASUREMENT PROCEDURE	43
13.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	43
13.3 LIMITS AND MEASUREMENT RESULT	43
14. LINE CONDUCTED EMISSION TEST	46
14.1 LIMITS	46
14.2 TEST SETUP	46
14.3 PRELIMINARY PROCEDURE	47
14.4 FINAL TEST PROCEDURE	47
14.5 TEST RESULT OF POWER LINE	47
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	48
APPENDIX B: PHOTOGRAPHS OF EUT	48

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document to confirmed at attp://www.agc.gett.com.



Page 5 of 48

#### 1. VERIFICATION OF COMPLIANCE

Applicant	Plantronics, Inc.
Address	345 Encinal Street, Santa Cruz, California 95060 United States
Manufacturer	Plantronics, Inc.
Address	345 Encinal Street, Santa Cruz, California 95060 United States
Product Designation	Stereo Bluetooth Headset
Brand Name	Plantronics
Test Model	BF3100S
Date of test	Apr. 02, 2018 to Apr. 10, 2018
Deviation	None C
Condition of Test Sample	Normal
Report Template	AGCRT-US-BLE/RF (2013-03-01)

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.247. The test results of this report relate only to the tested sample identified in this report.

	Bong Lu	S.G.C.
Tested By	V	lite.
	Berg Lu(Lu Bing)	Apr. 10, 2018
	-owest ce	
Reviewed By		A THE
	Forrest Lei(Lei Yonggang)	Apr. 16, 2018

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 6 of 48

## 2.GENERAL INFORMATION 2.1PRODUCT DESCRIPTION

The EUT is designed as a "Stereo Bluetooth Headset". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	3.63dBm(Max)
Bluetooth Version	V5.0
Modulation	GFSK for BLE
Number of channels	40 Channel(37 Hopping Channel,3 advertising Channel)
Antenna Designation	Fixed Antenna
Antenna Gain	-2.67dBi
Hardware Version	VB2
Software Version	V12
Power Supply	DC 3.7V by Battery

Note: 1. The EUT comprises left and right channel earphone, both are the same and have been tested and only the test data of left earphone recorded in this report.

2. The BT function of EUT didn't work when charging.

#### 2.2TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013.

#### 2.3 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 7 of 48

#### 3. SYSTEM TEST CONFIGURATION

#### 3.1 CONFIGURATION OF TESTED SYSTEM

Configure 1: (Normal hopping)

EUT

Configuration: Continuous TX

EUT	ion of Global Com	Control box	CC	PC
			700	

#### 3.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Stereo Bluetooth Headset	Plantronics	BF3100S	EUT
2	Battery	VDL	1644C	Accessory
3	© PC	APPLE	A1465	A.E
4	Control box	AIROHA	N/A	A.E
5	Temporary Antenna Connector	T10	N/A	A.E
6	USB Cable	N/A	1m Unshielded	A.E

The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.



Page 8 of 48

#### 3.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT Compliant	
§15.203	Antenna Requirement		
§15.209 §15.247(d)	Radiated Emission	Compliant	
§15.247(d)	Band Edges	Compliant	
§15.247(a) (2)	6 dB Bandwidth	Compliant	
§15.247(b)	Conducted Output Power	Compliant	
§15.247(d)	Conducted Spurious Emission	Compliant	
§15.247(e)	Conducted Power Spectral Density	Compliant	
§15.207 Line Conduction Emission		N/A	

Note: N/A means it's not applicable to this item.

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 9 of 48

#### 4. DESCRIPTION OF TEST MODES

The EUT has been operated in one modulation: GFSK.

NO.	TEST MODE DESCRIPTION			
(8) 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Low channel GFSK			
G 2	Middle channel GFSK			
3	High channel GFSK			
4	BT Link			


#### Note:

- 1. Only the result of the worst case was recorded in the report if no any records.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. Transmitting duty cycle >98%, The average correction factor is about -0.18
- 4. The EUT used fully-charged battery when tested.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 10 of 48

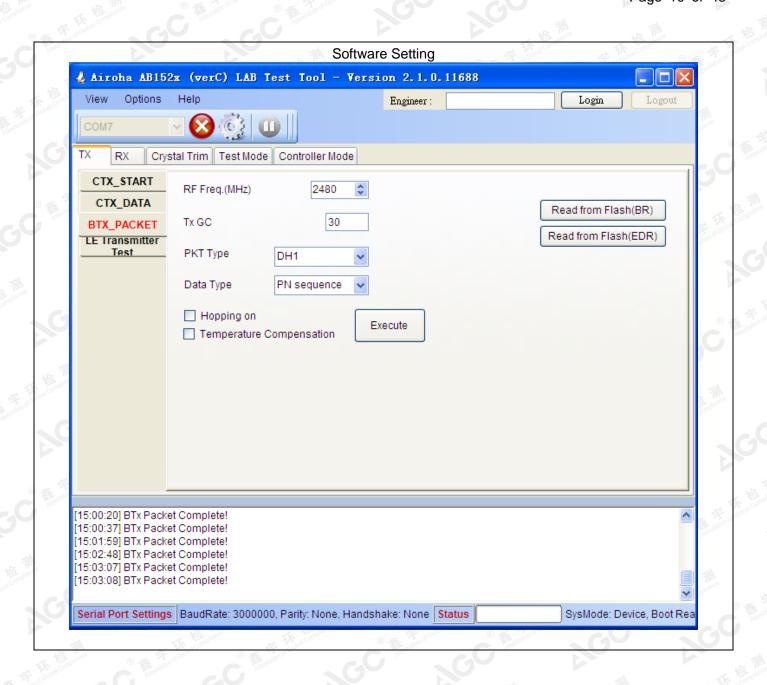

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



Page 11 of 48

#### 5. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP Lab Code	600153-0
Designation Number	CN5028
Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.



Page 12 of 48

## 6. TEST EQUIPMENT LIST TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 18, 2017	May 17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
Loop Antenna	A.H.Systems,Inc	SAS-562B		Mar. 01, 2018	Feb. 28, 2020
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018

Note: The test frequency range for Radiation Cable 1& Radiation Cable 2 is 9KHz to 25GHz.

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a trip://www.agc-gett.com.



Page 13 of 48

#### 7. ANTENNA REQUIREMENT

#### 7.1. STANDARD APPLICABLE

According to FCC 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### 7.2. TEST RESULT

This product has a fixed antenna, fulfill the requirement of this section

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 14 of 48

### 8. RADIATED EMISSION 8.1 LIMITS

	17 1.0		- 12K (C)
Frequency	Distance	Field Streng	ıths Limit
(MHz)	Meters	μ V/m	dΒ(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	all The Manufactor
0.490 ~ 1.705	30	24000/F(kHz)	910° @ # 1000 Globb
1.705 ~ 30	30	30	GC GC
30 ~ 88		100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3 2	200	46.0
960 ~ 1000	5 Th a Complaines 3 F Thomas Complain	500	54.0
Above 1000	3 Automation	Other:74.0 dB(µV)/m (Peak)	54.0 dB(µV)/m (Average)

Remark:

- (1) Emission level dB $\mu$  V = 20 log Emission level  $\mu$  V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

#### **8.2 MEASUREMENT PROCEDURE**

- 1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak&AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The results show this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gott.com.


GC




Page 15 of 48

#### 8.3 TEST SETUP

#### RADIATED EMISSION TEST SETUP BELOW 30MHz

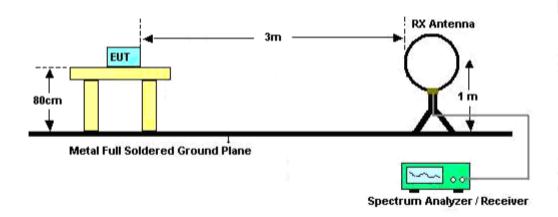

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

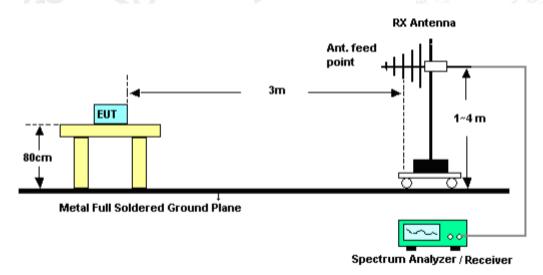


The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc.gett.com.



Page 16 of 48

#### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

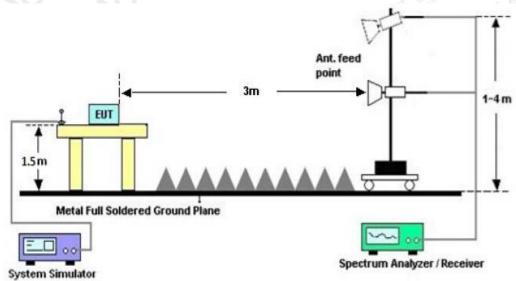

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gett.com.



Page 17 of 48


#### 8.4 TEST RESULT (Worst Modulation: GFSK)

#### **RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

#### **RADIATED EMISSION BELOW 1GHz**

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

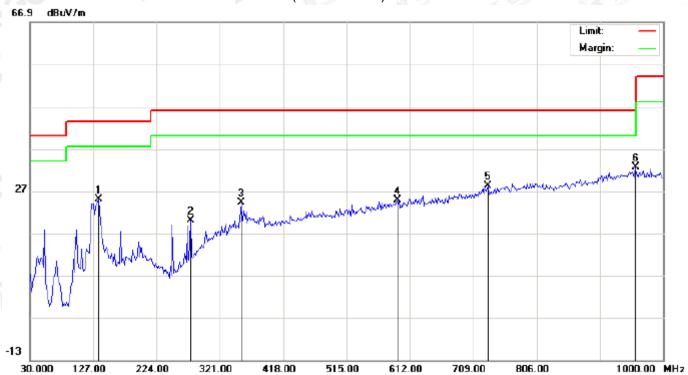

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		135.0833	12.07	12.90	24.97	43.50	-18.53	peak			
2		275.7333	8.77	11.28	20.05	46.00	-25.95	peak			
3		353.3333	5.46	18.76	24.22	46.00	-21.78	peak			
4		592.6000	1.34	23.55	24.89	46.00	-21.11	peak			
5		731.6333	2.04	26.11	28.15	46.00	-17.85	peak			
6	*	957.9667	2.76	29.92	32.68	46.00	-13.32	peak			

**RESULT: PASS** 

The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a state of the confirmed at a



Page 18 of 48

#### RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		38.0833	14.11	6.39	20.50	40.00	-19.50	peak			
2	*	131.8500	19.18	11.80	30.98	43.50	-12.52	peak			
3		277.3500	5.78	14.73	20.51	46.00	-25.49	peak			
4		332.3167	6.89	17.56	24.45	46.00	-21.55	peak			
5		780.1333	0.50	27.05	27.55	46.00	-18.45	peak			
6		935.3333	0.50	29.59	30.09	46.00	-15.91	peak			

#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 19 of 48

#### RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

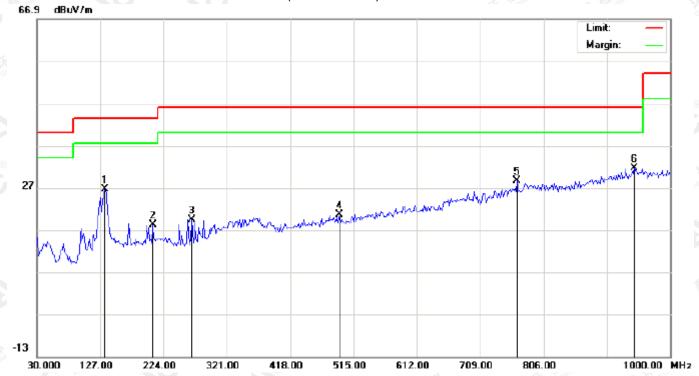

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		133.4667	14.54	12.15	26.69	43.50	-16.81	peak			
2		207.8333	7.01	11.20	18.21	43.50	-25.29	peak			
3		267.6500	9.48	9.90	19.38	46.00	-26.62	peak			
4		493.9833	-0.45	21.07	20.62	46.00	-25.38	peak			
5		765.5833	1.69	26.85	28.54	46.00	-17.46	peak		·	
6	*	945.0333	1.65	29.86	31.51	46.00	-14.49	peak			


RESULT: PASS

The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.



Page 20 of 48

#### RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

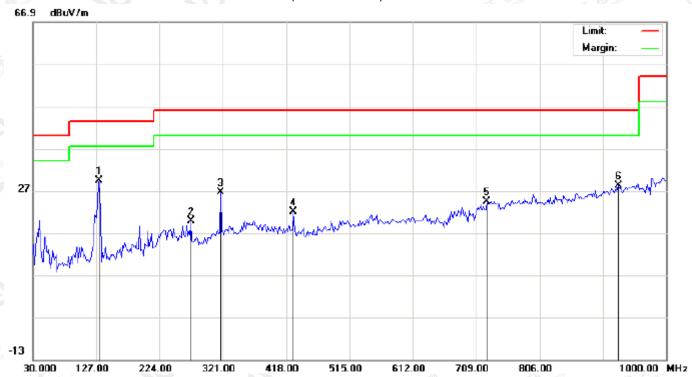

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	131.8500	17.56	11.80	29.36	43.50	-14.14	peak			
2		272.5000	5.20	14.58	19.78	46.00	-26.22	peak			
3		317.7667	9.97	16.59	26.56	46.00	-19.44	peak			
4		429.3167	1.95	19.96	21.91	46.00	-24.09	peak			
5		725.1667	-1.41	25.91	24.50	46.00	-21.50	peak			
6		927.2500	-1.21	29.37	28.16	46.00	-17.84	peak	·	·	

#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 21 of 48

#### RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

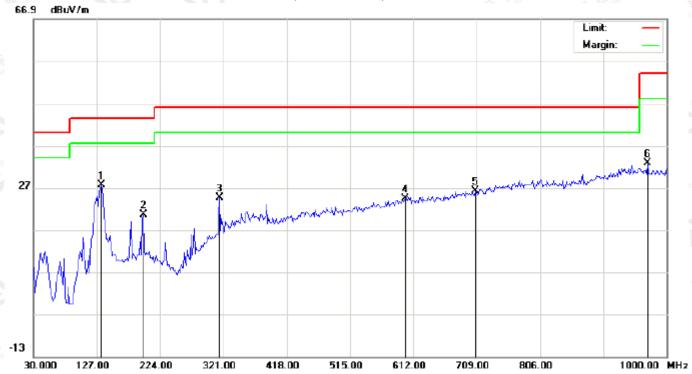

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	133.4667	15.41	12.15	27.56	43.50	-15.94	peak			
2		198.1333	8.60	11.91	20.51	43.50	-22.99	peak			
3		314.5333	8.23	16.38	24.61	46.00	-21.39	peak			
4		599.0667	0.71	23.71	24.42	46.00	-21.58	peak			
5		707.3833	0.68	25.43	26.11	46.00	-19.89	peak			
6		970.9000	2.92	29.80	32.72	54.00	-21.28	peak			


**RESULT: PASS** 

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 22 of 48

#### RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

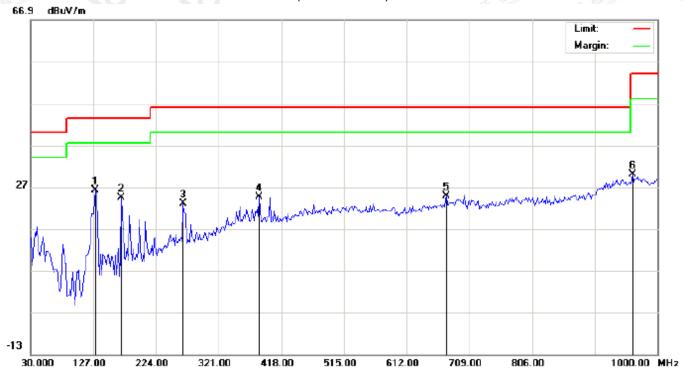

ı	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
	1	*	130.2333	15.00	11.13	26.13	43.50	-17.37	peak			
	2		170.6500	9.75	14.66	24.41	43.50	-19.09	peak			
	3		266.0333	8.55	14.38	22.93	46.00	-23.07	peak			
	4		384.0500	5.59	18.96	24.55	46.00	-21.45	peak			
	5		673.4333	0.36	24.48	24.84	46.00	-21.16	peak			
	6		961.2000	0.15	29.89	30.04	54.00	-23.96	peak			

#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 23 of 48

#### **RADIATED EMISSION ABOVE 1GHz**

#### RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

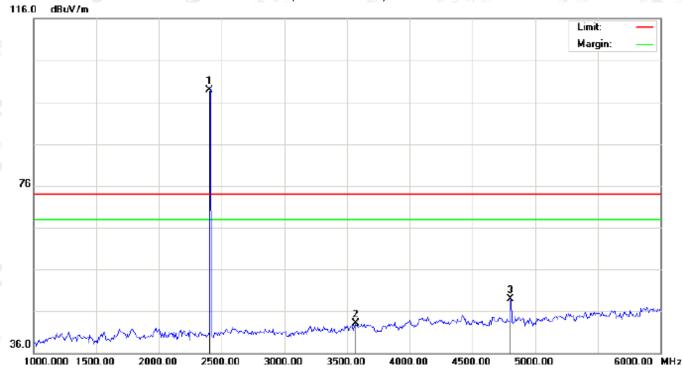

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2402.000	88.51	10.32	98.83	74.00	24.83	peak			
2		3566.667	30.50	12.52	43.02	74.00	-30.98	peak			
3		4804.000	41.21	7.69	48.90	74.00	-25.10	peak			


**RESULT: PASS** 

The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 24 of 48

#### RADIATED EMISSION TEST-(ABOVE 1GHz)-LOW CHANNEL-VERTICAL

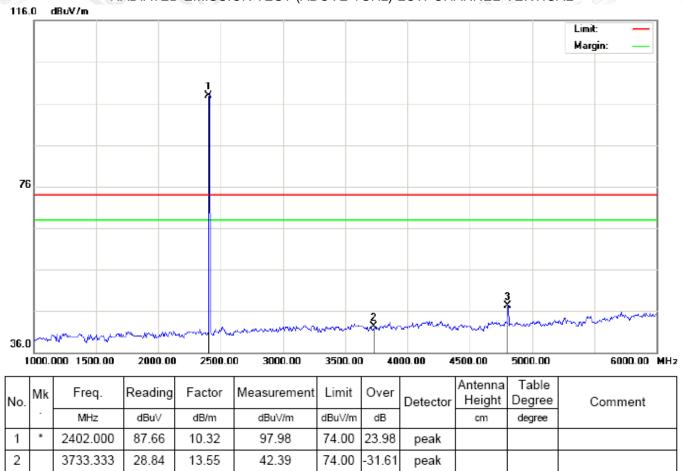

#### **RESULT: PASS**

4804.000

39.55

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

47.24

7.69

2. The "Factor" value can be calculated automatically by software of measurement system.

74.00

-26.76


peak

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 25 of 48

#### RADIATED EMISSION TEST-(ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

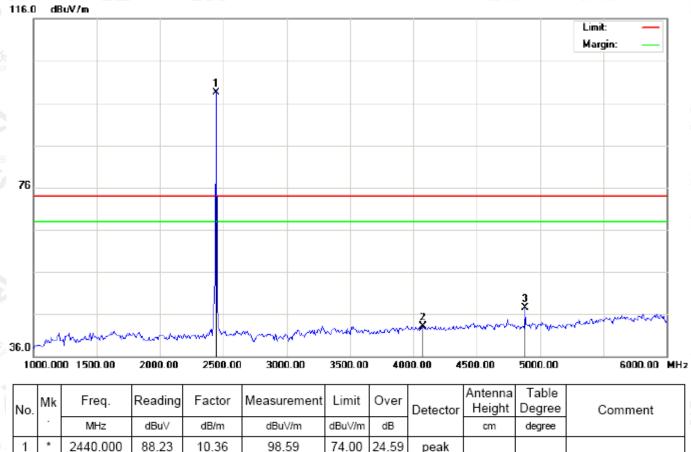

74.00

74.00

-30.87

-26.45

43.13

47.55

**RESULT: PASS** 

3

4075.000

4882.000

29.19

39.66

13.94

7.89

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 💢 €, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-cert.com.

\GC ? Attestation of Global Compliance peak


peak

peak



Page 26 of 48

#### RADIATED EMISSION TEST-(ABOVE 1GHz)-MIDDLE CHANNEL-VERTICAL

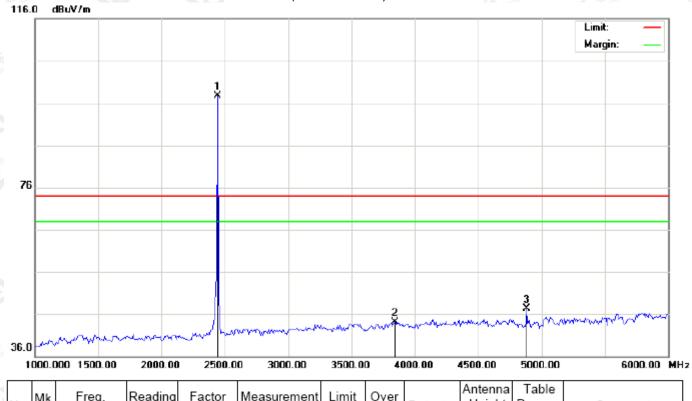

No	. Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
. 1	*	2440.000	87.38	10.36	97.74	74.00	23.74	peak			
2		3841.667	29.86	14.21	44.07	74.00	-29.93	peak			
3		4882.000	39.39	7.89	47.28	74.00	-26.72	peak			

#### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 27 of 48

#### RADIATED EMISSION TEST-(ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

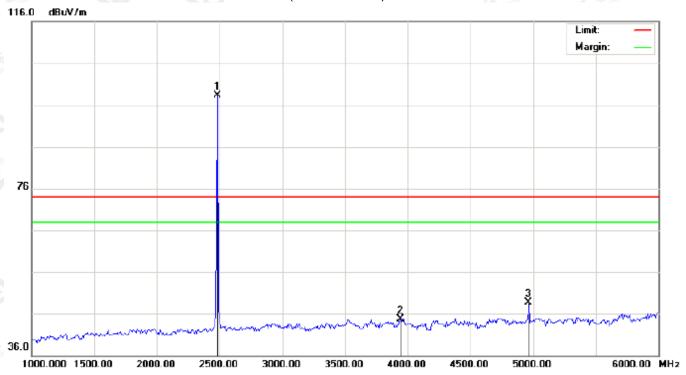

N N	lo.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
	1	*	2480.000	87.80	10.41	98.21	74.00	24.21	peak			
	2		3941.667	29.94	14.83	44.77	74.00	-29.23	peak			
	3		4960.000	40.60	8.09	48.69	74.00	-25.31	peak			


**RESULT: PASS** 

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at all the confirmed at a confirmed



Page 28 of 48

#### RADIATED EMISSION TEST-(ABOVE 1GHz)-HIGH CHANNEL-VERTICAL

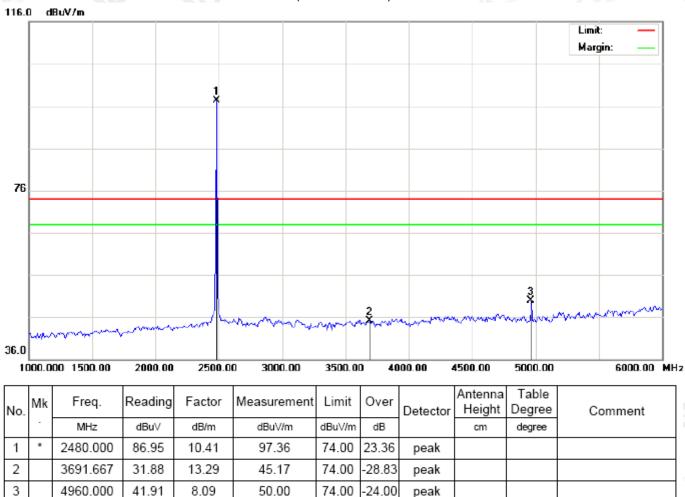

#### **RESULT: PASS**

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain,

Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 29 of 48

#### 9. BAND EDGE EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency=Operation Frequency,


For unrestricted band: RBW=100kHz, VBW=300kHz

For restricted band: RBW=1MHz, VBW=3\*RBW

Center frequency = Operation frequency

3. The band edges was measured and recorded.

#### 9.2. TEST SET-UP

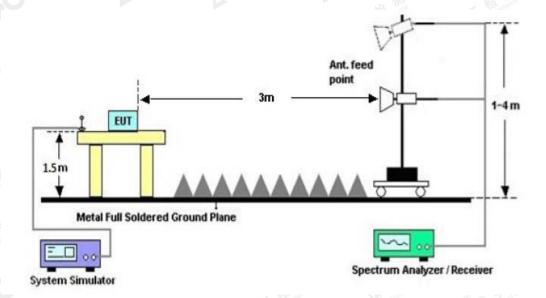


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 30 of 48

#### 9.3. TEST RESULT

#### TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Horizontal

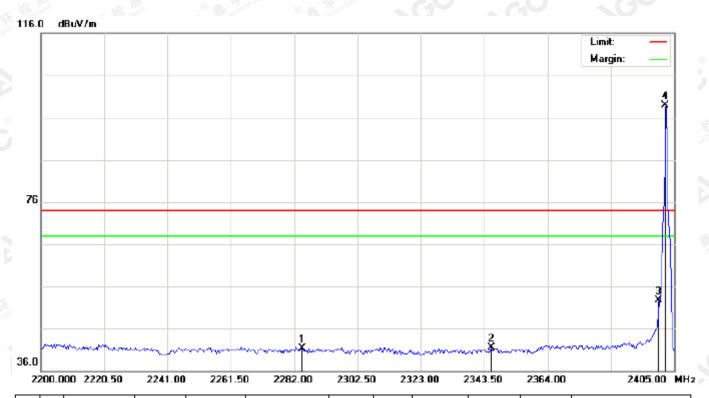


	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
			MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
	1		2284.733	31.11	10.19	41.30	74.00	-32.70	peak			
, [	2		2345.892	31.18	10.26	41.44	74.00	-32.56	peak			
	3		2400.000	42.47	10.32	52.79	74.00	-21.21	peak			
	4	*	2402.000	88.56	10.32	98.88	74.00	24.88	peak			

The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.



Page 31 of 48

#### TEST PLOT OF BAND EDGE FOR LOW CHANNEL - Vertical

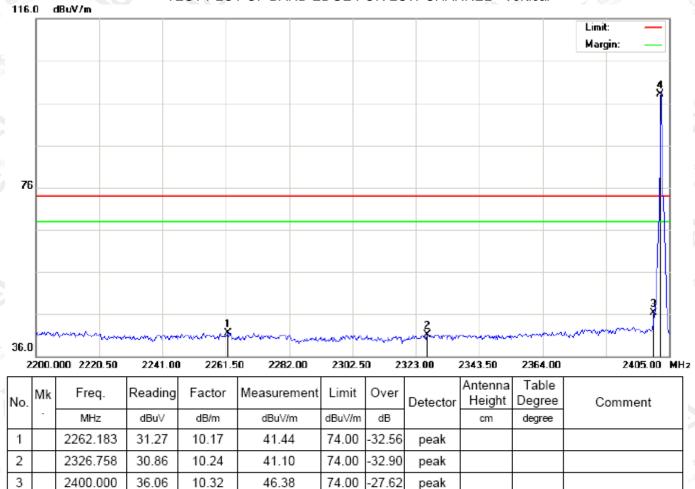

74.00

24.03

peak

98.03

**RESULT: PASS** 

2402.000

10.32


87.71

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 32 of 48

#### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

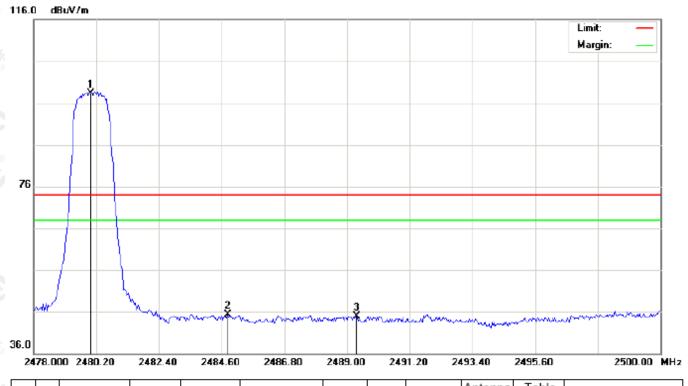


	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
,	1	*	2480.000	87.84	10.41	98.25	74.00	24.25	peak			
	2		2484.820	34.86	10.41	45.27	74.00	-28.73	peak			
	3		2489.330	34.46	10.42	44.88	74.00	-29.12	peak			

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 33 of 48

#### TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Vertical

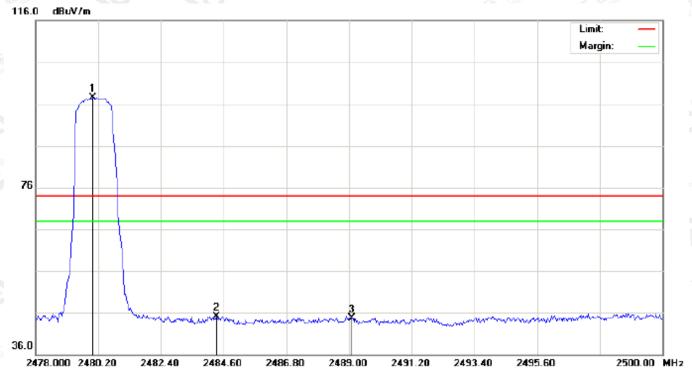

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	87.01	10.41	97.42	74.00	23.42	peak			
2		2484.343	34.68	10.41	45.09	74.00	-28.91	peak			
3		2489.110	34.27	10.42	44.69	74.00	-29.31	peak			

RESULT. PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 34 of 48

#### 10. 6DB BANDWIDTH


#### 10.1. TEST PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW ≥ 3\*RBW.
- 4. Set SPA Trace 1 Max hold, then View.

#### 10.2. SUMMARY OF TEST RESULTS/PLOTS

Channel	6dB Bandwidth (KHz)	Minimum Limit (KHz)	Pass/Fail
Low	676	The Manual Company of the State	Pass
Middle	668	500KHz	Pass
High	664		Pass

#### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

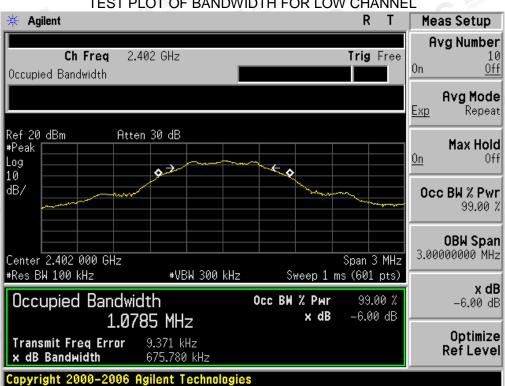


The results spown this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 💢 €, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-cett.com.




Page 35 of 48

#### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

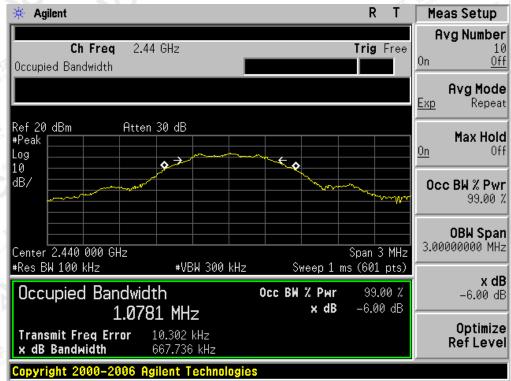

#### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

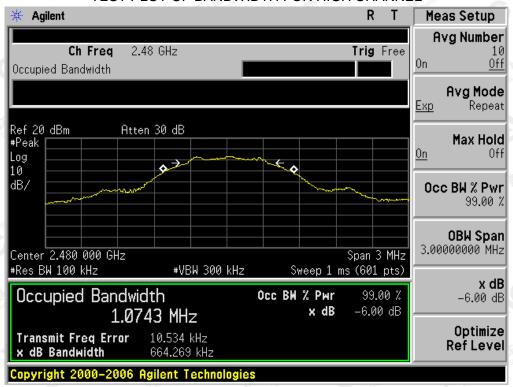

The results spowfil this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Page 36 of 48

#### 11. CONDUCTED OUTPUT POWER

#### 11.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 3. Use the following spectrum analyzer settings:
- a) Set the RBW ≥ DTS bandwidth.
- b) Set VBW ≥ 3 RBW.
- c) Set span ≥ 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.
- 4. Allow the trace to stabilize.
- 5. Record the result form the Spectrum Analyzer.

#### 11.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

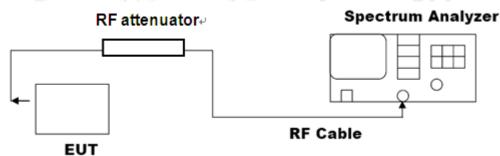

The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.gott.com.



Page 37 of 48

#### 11.3. LIMITS AND MEASUREMENT RESULT

Channel	Peak Power (dBm)	Applicable Limits (dBm)	Pass/Fail
Low Channel	3.63	30	Pass
Middle Channel	3.39	30	Pass
High Channel	3.01	30	Pass







The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.





The Middle Channel Result

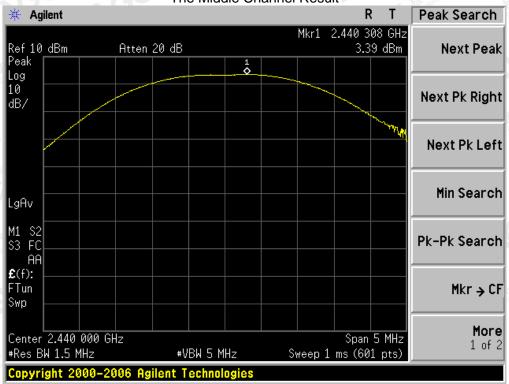

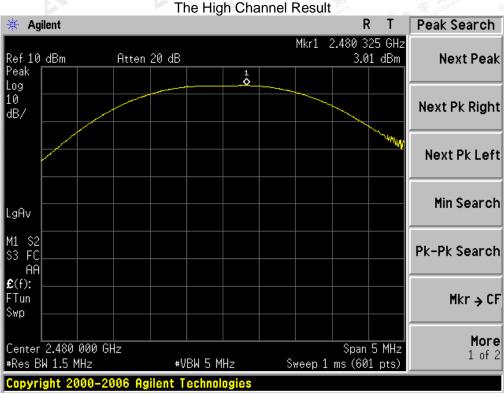

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.




Page 39 of 48

#### 12. CONDUCTED SPURIOUS EMISSION

#### 12.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
  - RBW = 100kHz; VBW ≥3 RBW; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

#### 12.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

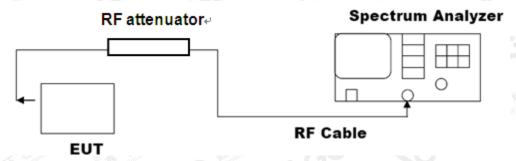

#### 12.3. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Annii alda Limita	Measurement Result			
Applicable Limits	Test Data	Result		
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit	The topplance		
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS		
intentional radiator is operating, the radio frequency	Channel	100 m		
power that is produce by the intentional radiator shall	200	litir:		
be at least 20 dB below that in 100KHz bandwidth		TK Compliance		
within the band that contains the highest level of the		® Among of Global C		
desired power.	At least -20dBc than the limit	C DACC C		
In addition, radiation emissions which fall in the	Specified on the TOP Channel	PASS		
restricted bands, as defined in §15.205(a), must also				
comply with the radiated emission limits specified		拉那		
in§15.209(a))		lobal Comp."		


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Attestation of Global Compliance



Page 40 of 48

### TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL

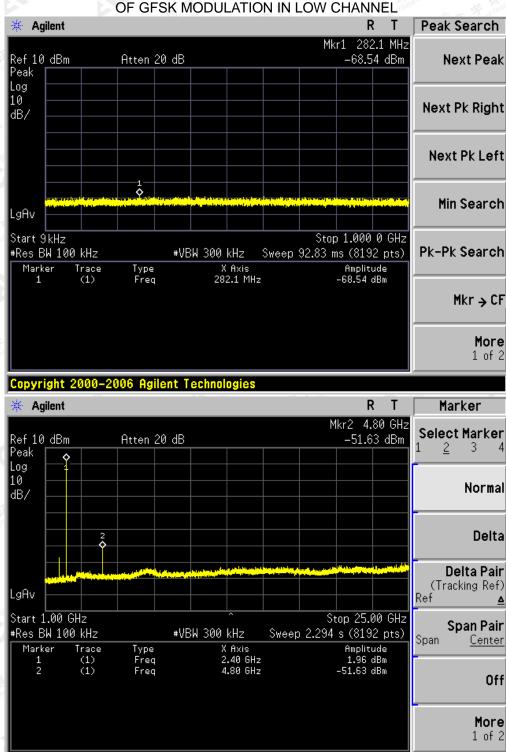


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance



Page 41 of 48

# TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

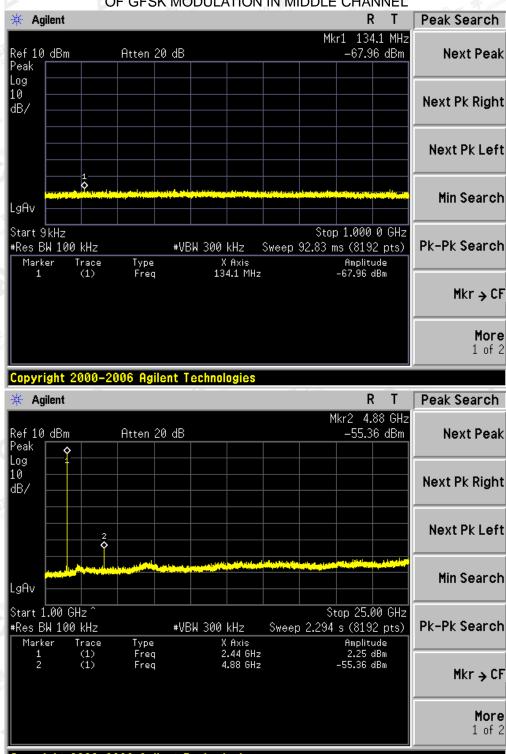


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 42 of 48

# TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

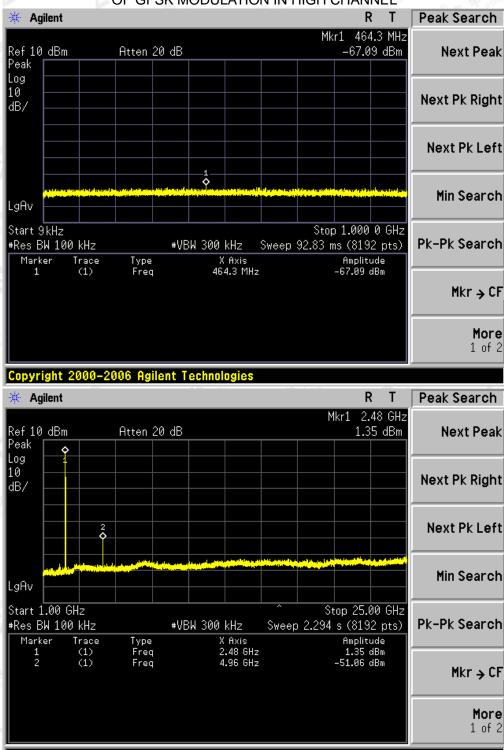

The results spought this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gatt.com.

Attestation of Global Compliance




Page 43 of 48

### 13. CONDUCTED OUTPUT POWER SPECTRAL DENSITY 13.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the span to 1.5times the DTS bandwidth, RBW: 3kHz<=RBW<=100KHz, VBW>=3\*RBW
- (4). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

#### 13.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

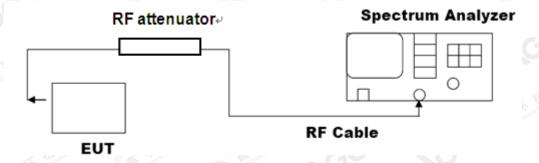

#### 13.3 LIMITS AND MEASUREMENT RESULT


Channel No.	PSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
Low Channel	-10.33	8	Pass
Middle Channel	-10.71	8	Pass
High Channel	-11.96	8	Pass

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Page 44 of 48

#### TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

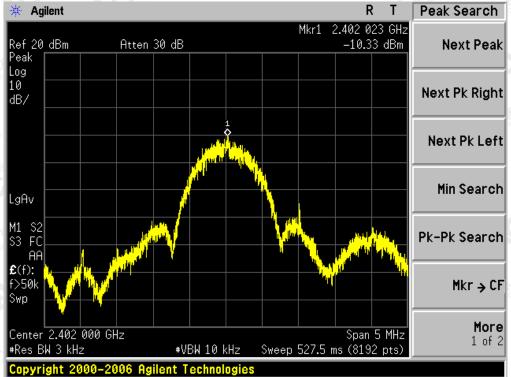

#### TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

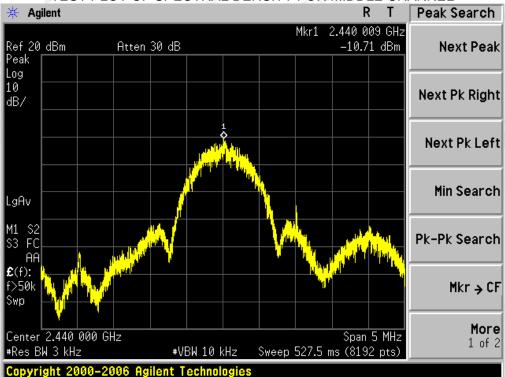


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 45 of 48

#### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

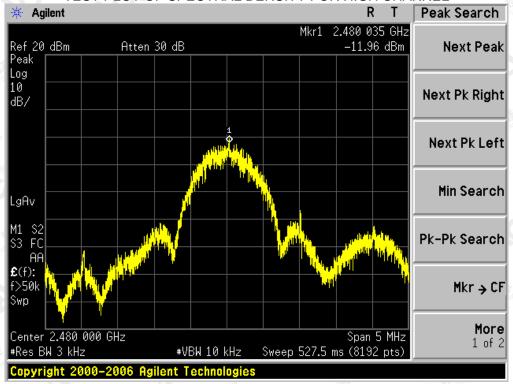

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 46 of 48

#### 14. LINE CONDUCTED EMISSION TEST


#### 14.1 LIMITS

	Maximum RF Line Voltage			
Frequency	Q.P.( dBuV)	Average( dBuV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

#### 14.2 TEST SETUP

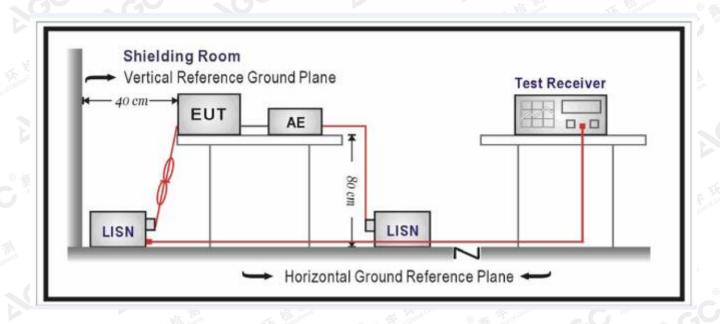

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 47 of 48

#### 14.3 PRELIMINARY PROCEDURE

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.10.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received DC charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test. Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### 14.4 FINAL TEST PROCEDURE

- 1) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

#### 14.5 TEST RESULT OF POWER LINE

N/A

Note: The BT function of EUT didn't work when charging.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



Page 48 of 48

### **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

Refer to Attached file(appendix I)

#### APPENDIX B: PHOTOGRAPHS OF EUT

Refer to Attached file(appendix I)

----END OF REPORT----

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China