


Label and Location: FCC ID: AL8-CA12CDSX; IC: 457A-CA12CDSX

COMPLIES WITH PART 15 OF FCC RULES
Operation is subject to the following two conditions:
1) this device may not cause harmful interference,
and 2) this device must accept any interference
received, including interference that may cause
undesired operation of the device.
FCC ID: AL8-CA12CDSX

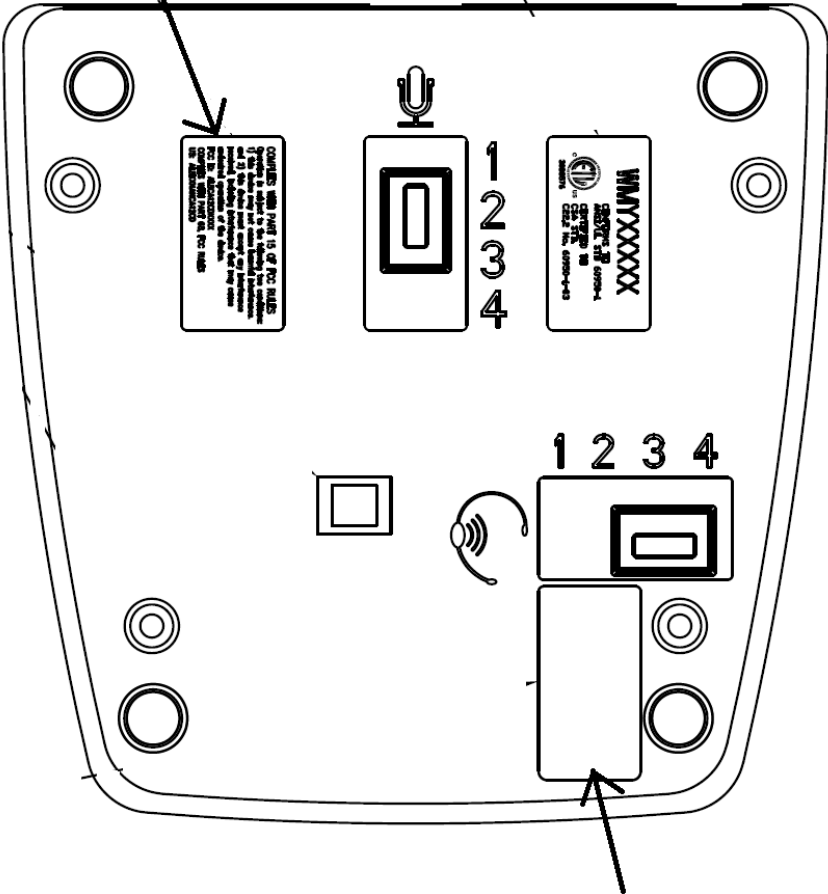

MODEL: CA12CDSX
IC: 457A-CA12CDSX
FW: 19.09
MADE IN MEXICO

Material: 0.1mm White PET/S333/BG50WH (Fasson) or Flexcon PM-500-W highgloss.

White Polyester, .005 thick.

Adhesive: 3M #467 Permanent Pressure Sensitive with release backing, or Flexcon Y-23 Adhesive.

Ink: Resin used in plastics (polyester, polypropylene) and Cloth (Nylon, Tyvek, satin Ribbon) and makes indelible impression, supports high and low temperatures, or antistatic materials as polyester. Ideal for frozen products, electrical components, water resistant to dust and dirt.

2. Composition and Information on Ingredients

| Ingredient | CAS Number | Weight % | ACGIH TLV | PEL | STEL |
|-----------------|--------------|-----------|-----------|-----|------|
| Polyester Film | 25038-59-9 | 54% - 65% | | | |
| Polymeric Resin | Trade Secret | 14% - 21% | | | |
| Carbon Black | 1333-86-4 | 6% - 12% | 3.5 | 3.5 | |
| Carnauba Wax | 8015-86-9 | 7% - 10% | | | |
| Wax | Trade Secret | 5% - 7% | | | |