




Report No.: HK08120648-1  
Standby Mode With POE  
POE's AC Mains "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 16  
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1 9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0192

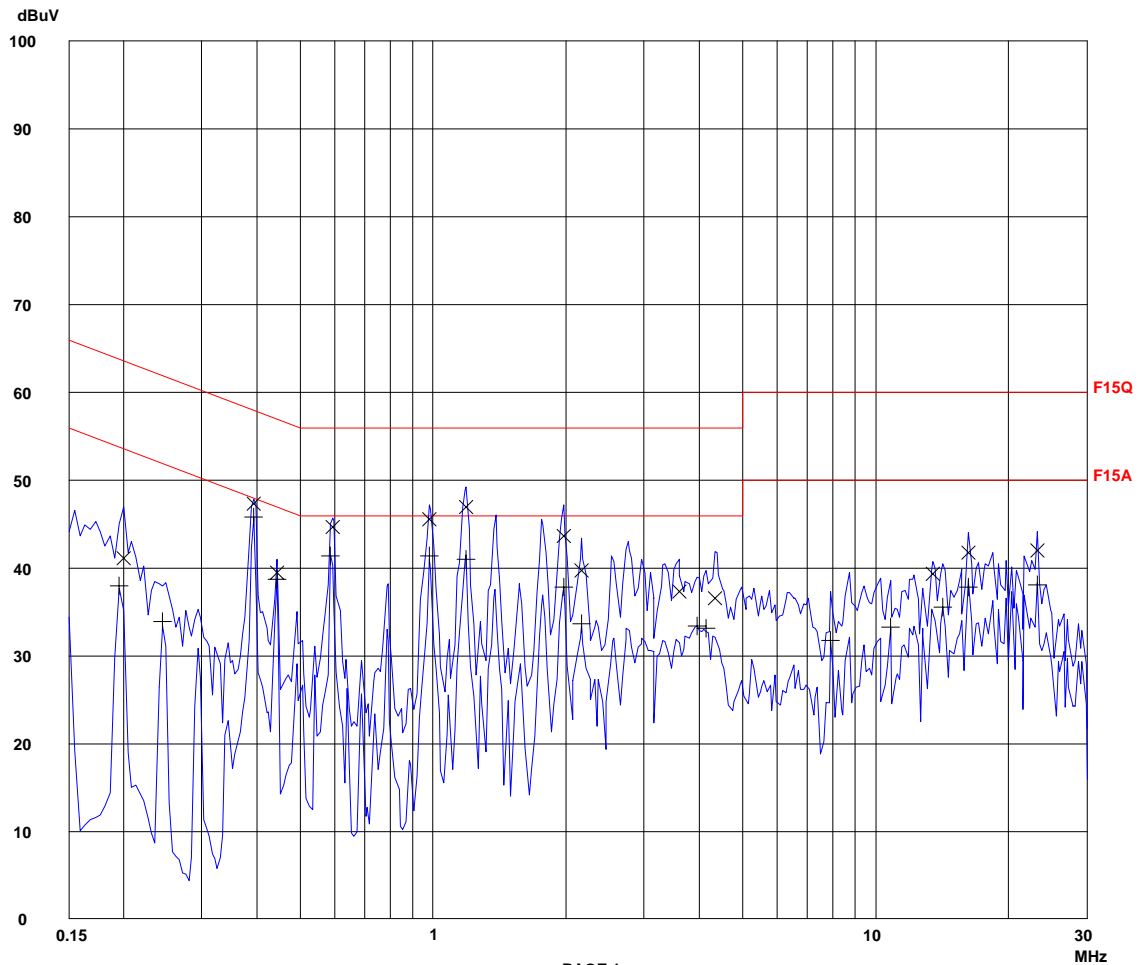



Report No.: HK08120648-1  
Standby Mode With POE  
POE's AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|  
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge  
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.19950	41.1	63.6	-22.5
0.39300	47.3	58.0	-10.7
0.44250	39.4	57.0	-17.6
0.59100	44.7	56.0	-11.3
0.98250	45.6	56.0	-10.4
1.18500	46.9	56.0	-9.1
1.96800	43.6	56.0	-12.4
2.17050	39.7	56.0	-16.3
3.59250	37.3	56.0	-18.7
4.33500	36.5	56.0	-19.5
13.47900	39.3	60.0	-20.7
16.22850	41.7	60.0	-18.3
23.12700	41.9	60.0	-18.1

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.19500	37.9	53.9	-16.0
0.24450	33.9	52.0	-18.1
0.39300	45.7	48.0	-2.3
0.44250	38.7	47.0	-8.3
0.58650	41.4	46.0	-4.6
0.98250	41.3	46.0	-4.7
1.18500	41.0	46.0	-5.0
1.96800	37.8	46.0	-8.2
2.16600	33.6	46.0	-12.4
3.94350	33.3	46.0	-12.7
4.14150	33.1	46.0	-12.9
7.92150	31.7	50.0	-18.3
10.79250	33.2	50.0	-16.8
14.21250	35.5	50.0	-14.5
16.22850	37.8	50.0	-12.2
23.12700	38.0	50.0	-12.0

\* limit exceeded




Report No.: HK08120648-1  
Standby Mode With POE  
POE's AC Mains "N"

Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 16  
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1 9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0192

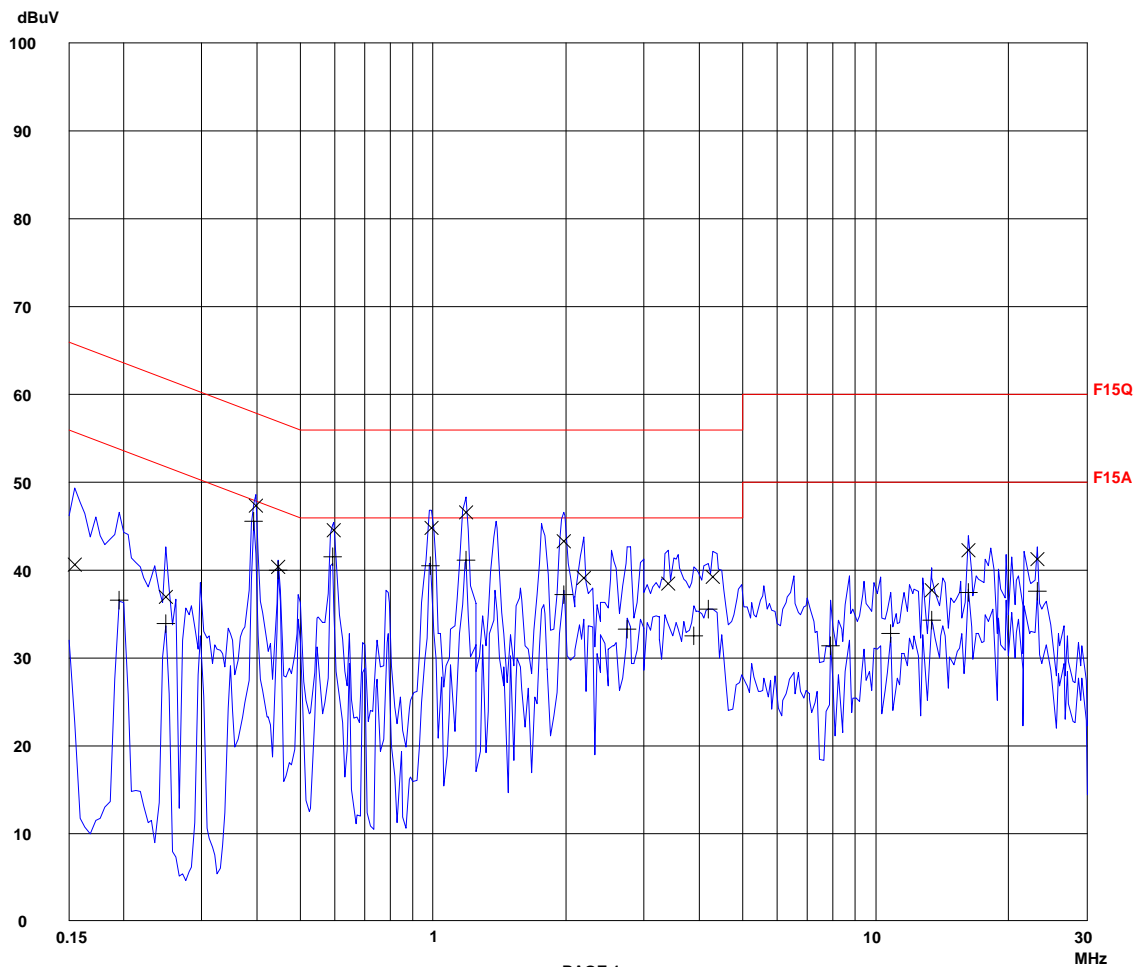



Report No.: HK08120648-1  
Standby Mode With POE  
POE's AC Mains "N"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|  
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge  
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15450	40.6	65.7	-25.1
0.24900	36.9	61.8	-24.9
0.39750	47.3	57.9	-10.6
0.44700	40.3	56.9	-16.6
0.59550	44.5	56.0	-11.5
0.99150	44.8	56.0	-11.2
1.18500	46.5	56.0	-9.5
1.97250	43.2	56.0	-12.8
2.18850	39.1	56.0	-16.9
3.39000	38.4	56.0	-17.6
4.28550	39.1	56.0	-16.9
13.35750	37.7	60.0	-22.3
16.22850	42.3	60.0	-17.7
23.12700	41.2	60.0	-18.8

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.19500	36.5	53.9	-17.4
0.24900	33.8	51.8	-18.0
0.39300	45.5	48.0	-2.5
0.44700	39.9	46.9	-7.0
0.59100	41.5	46.0	-4.5
0.98700	40.5	46.0	-5.5
1.18500	41.0	46.0	-5.0
1.97250	37.2	46.0	-8.8
2.74200	33.2	46.0	-12.8
3.88950	32.4	46.0	-13.6
4.18650	35.5	46.0	-10.5
7.92150	31.3	50.0	-18.7
10.79250	32.7	50.0	-17.3
13.35750	34.3	50.0	-15.7
16.22850	37.4	50.0	-12.6
23.12700	37.5	50.0	-12.5

\* limit exceeded




Report No.: HK08120648-1  
VOIP Talk & PC Online Mode  
With POE  
PC's AC Mains "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 16  
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1 9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0192

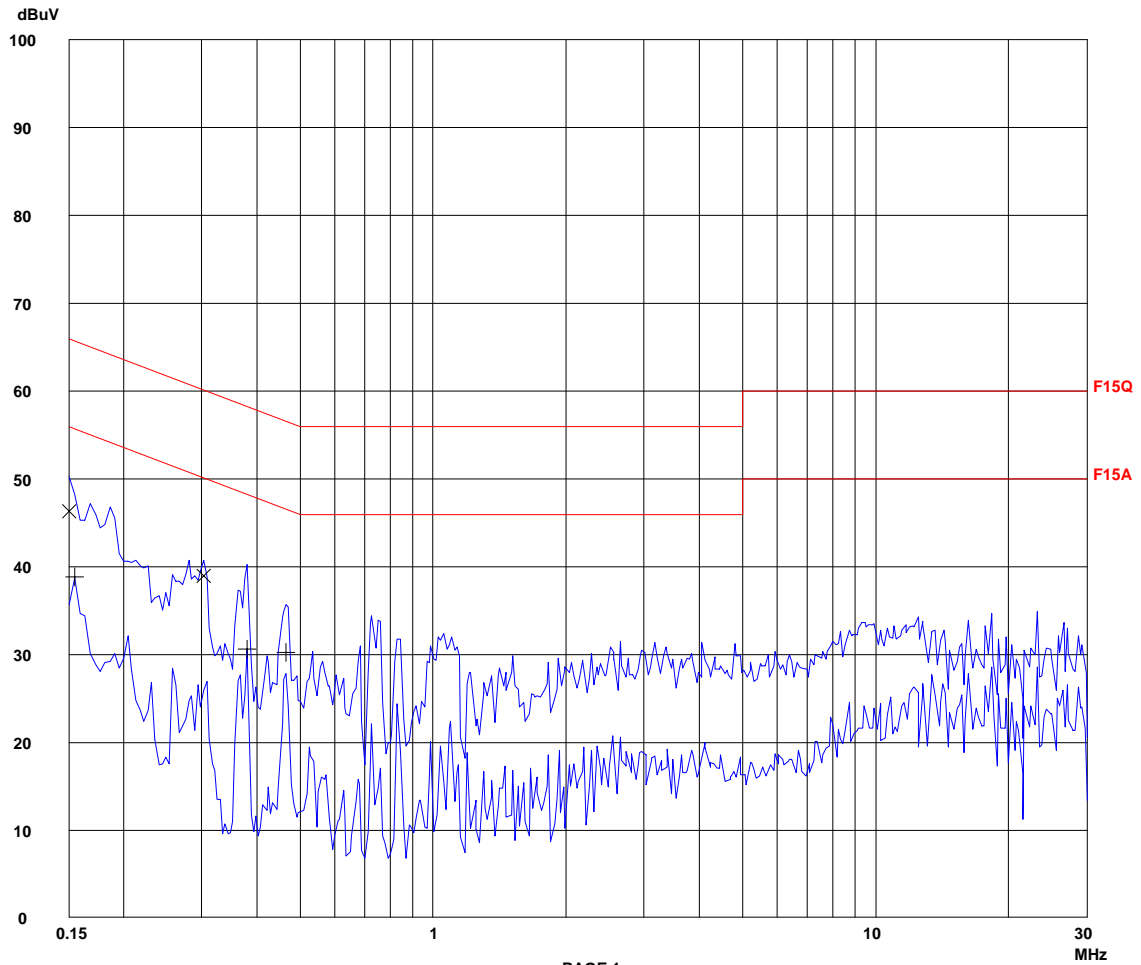



Report No.: HK08120648-1  
VOIP Talk & PC Online Mode  
With POE  
PC's AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|  
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge  
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15000	46.3	66.0	-19.7
0.30300	38.9	60.1	-21.2

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.15450	38.8	55.7	-16.9
0.37950	30.6	48.3	-17.7
0.46500	30.2	46.6	-16.4

\* limit exceeded




Report No.: HK08120648-1  
Standby Mode Without POE  
EUT's AC Mains "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 16  
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1 9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0192

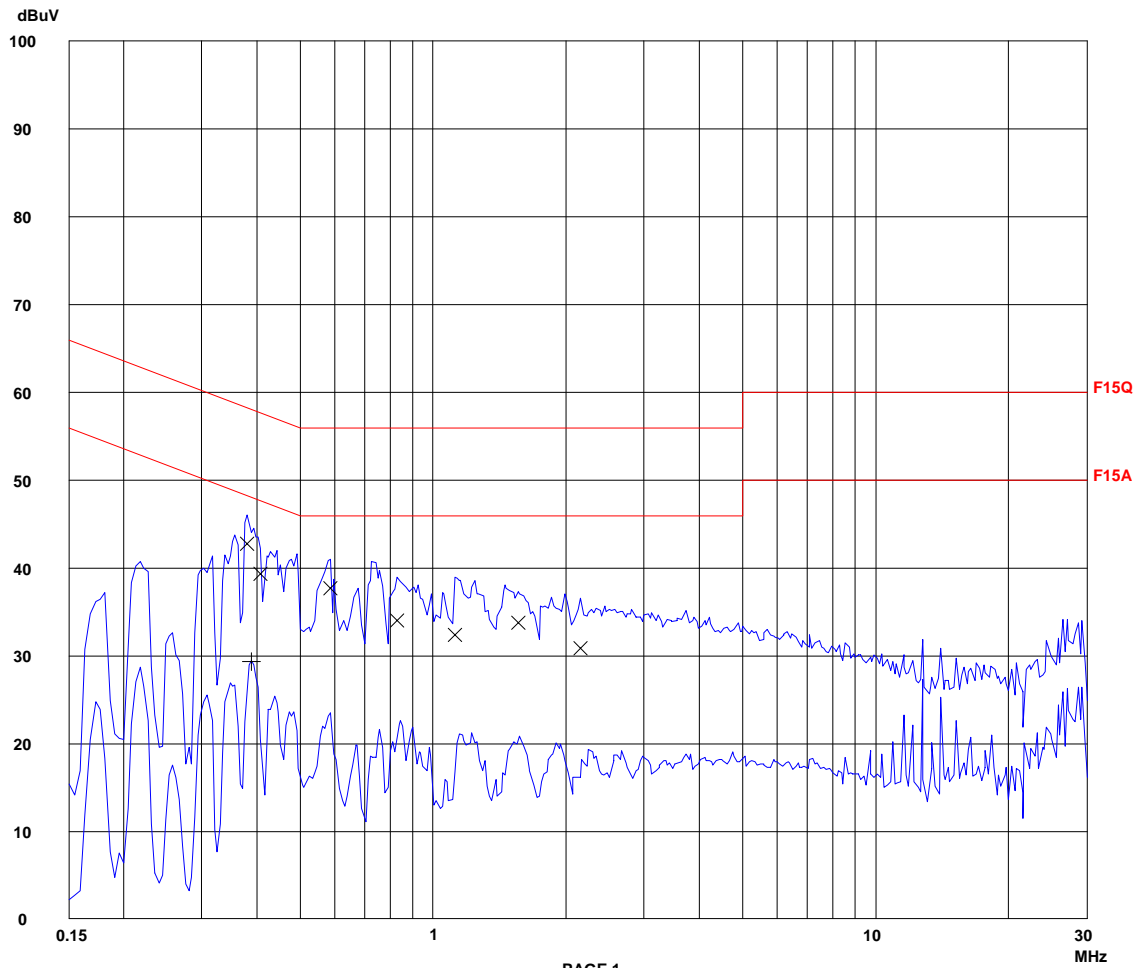



Report No.: HK08120648-1  
Standby Mode Without POE  
EUT's AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|  
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge  
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.37950	42.8	58.3	-15.5
0.40650	39.3	57.7	-18.4
0.58650	37.6	56.0	-18.4
0.82950	34.0	56.0	-22.0
1.12200	32.4	56.0	-23.6
1.55400	33.7	56.0	-22.3
2.15700	30.8	56.0	-25.2

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.38850	29.3	48.1	-18.8

\* limit exceeded






Report No.: HK08120648-1  
Standby Mode Without POE  
PC's AC Mains "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 16  
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1 9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0192

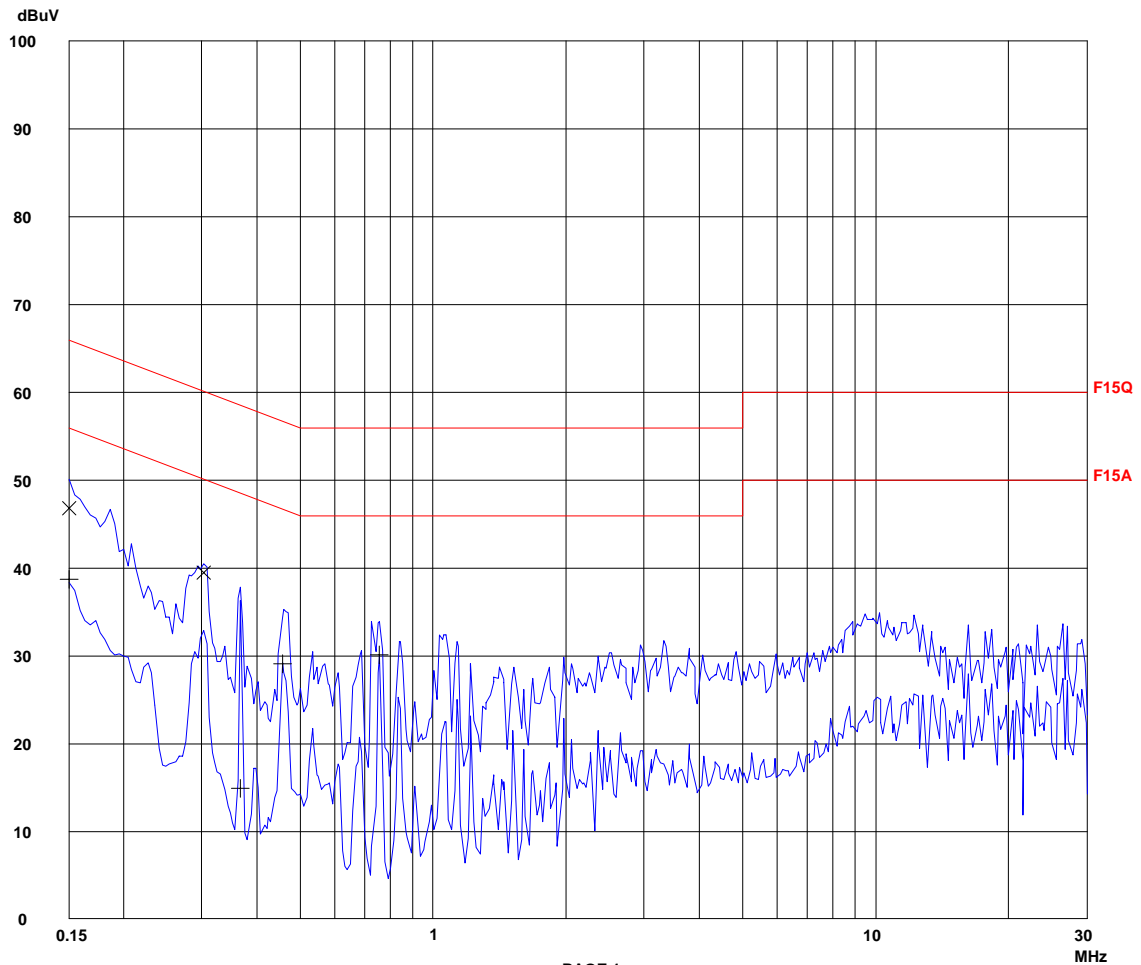



Report No.: HK08120648-1  
Standby Mode Without POE  
PC's AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|  
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge  
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15000	46.8	66.0	-19.2
0.30300	39.5	60.1	-20.6

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.15000	38.6	56.0	-17.4
0.36600	14.8	48.6	-33.8
0.45600	29.1	46.8	-17.7
0.75750	30.0	46.0	-16.0

\* limit exceeded




Report No.: HK08120648-1  
VOIP Talk & PC Online Mode  
Without POE  
EUT's AC Mains "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 16  
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1 9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0192

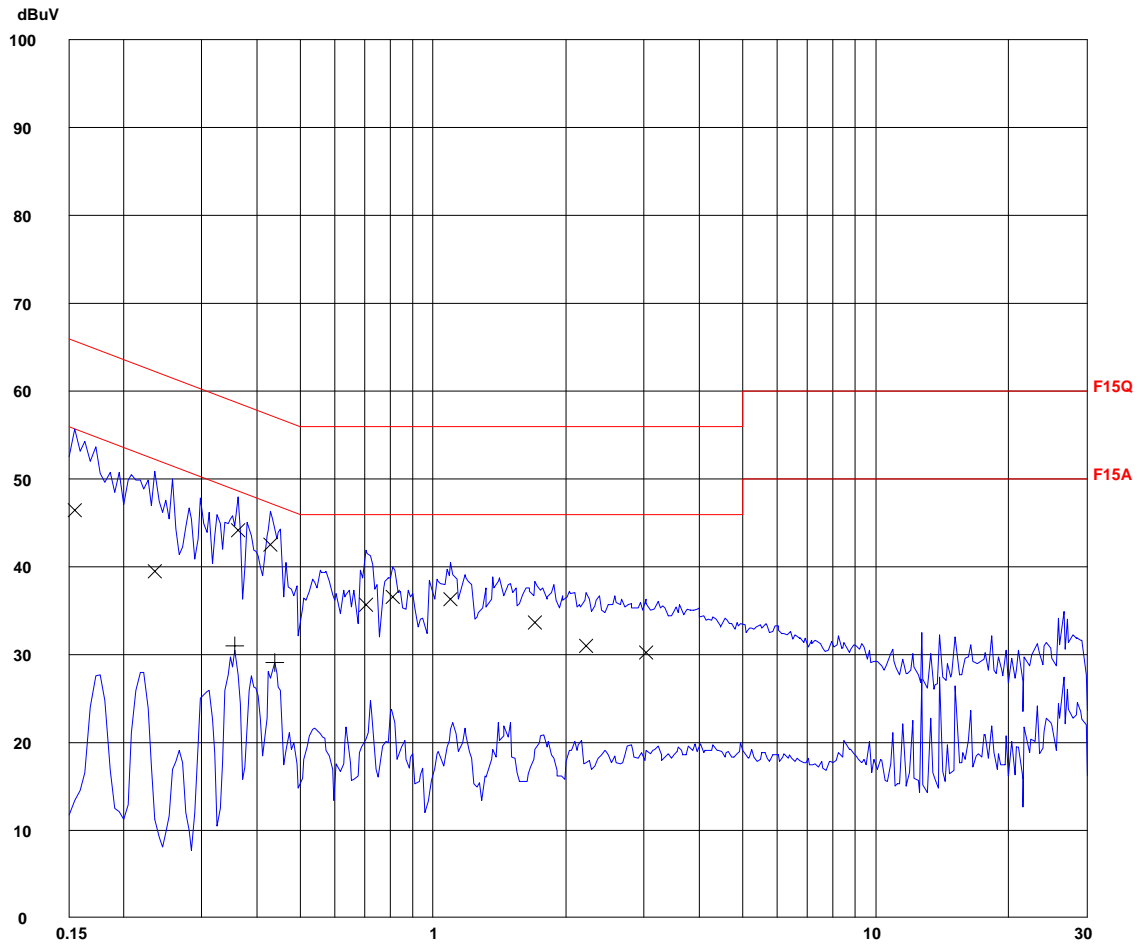



Report No.: HK08120648-1  
VOIP Talk & PC Online Mode  
Without POE  
EUT's AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|  
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge  
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB  
Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15450	46.4	65.7	-19.3
0.23550	39.5	62.2	-22.7
0.36150	44.2	58.7	-14.5
0.42900	42.4	57.3	-14.9
0.70350	35.6	56.0	-20.4
0.81150	36.5	56.0	-19.5
1.09500	36.3	56.0	-19.7
1.69800	33.6	56.0	-22.4
2.21100	30.9	56.0	-25.1
3.02550	30.2	56.0	-25.8

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.35700	31.0	48.8	-17.8
0.43800	29.0	47.2	-18.2

\* limit exceeded




Report No.: HK08120648-1  
VOIP Talk & PC Online Mode  
Without POE  
PC's AC Mains "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 16  
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0192

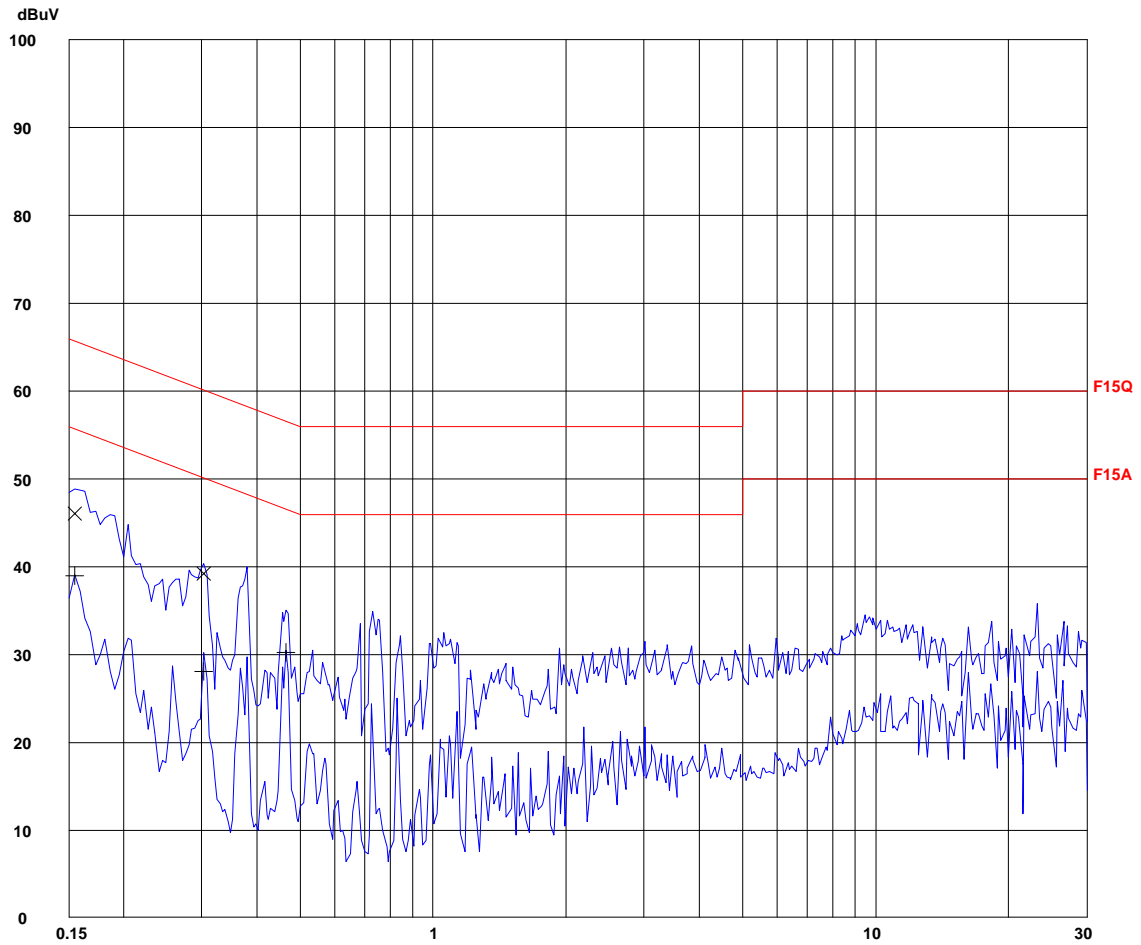



Report No.: HK08120648-1  
VOIP Talk & PC Online Mode  
Without POE  
PC's AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|  
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge  
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB  
Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15450	46.0	65.7	-19.7
0.30300	39.1	60.1	-21.0

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.15450	38.9	55.7	-16.8
0.30300	28.0	50.1	-22.1
0.46500	30.2	46.6	-16.4

\* limit exceeded