



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT
FOR**

BLUETOOTH ANALOG ADAPTER (DONGLE)

MODEL NUMBER: 35BAA; 590A

FCC ID: AL835BAA

REPORT NUMBER: 05U3529-3B

ISSUE DATE: SEPTEMBER 06, 2005

Prepared for
**PLANTRONICS, INC.
345 ENCINAL STREET
SANTA CRUZ, CA 95060, USA**

Prepared by
**COMPLIANCE ENGINEERING SERVICES, INC.
d.b.a.
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

**Details of specific model(s) tested and model differences shall be identified in body of report*

NVLAP[®]
LAB CODE:200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
A	8/9/05	Initial Issue	Thu
B	9/6/05	Added one model: 590A	Thu
		Added Sections 5.2 and 5.3	Thu
		Added an I/O Cable table and setup diagram under Section 5.8	Thu
		Added test result and plots under Section 7.3	Thu
		Added LC setup photos under Section 8	Thu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. MODEL(S) TESTED	6
5.3. MANUFACTURER'S DESCRIPTION OF MODEL DIFFERENCE	6
5.4. MAXIMUM OUTPUT POWER	6
5.5. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.6. SOFTWARE AND FIRMWARE	6
5.7. WORST-CASE CONFIGURATION AND MODE	7
5.8. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	11
7. LIMITS AND RESULTS	12
7.1. ANTENNA PORT CHANNEL TESTS	12
7.1.1. 20 dB BANDWIDTH	12
7.1.2. PEAK OUTPUT POWER	16
7.1.3. AVERAGE POWER	17
7.1.4. PEAK POWER SPECTRAL DENSITY	18
7.1.5. CONDUCTED SPURIOUS EMISSIONS	22
7.2. RADIATED EMISSIONS	31
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	31
7.2.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ	34
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHZ	43
7.3. POWERLINE CONDUCTED EMISSIONS	47
8. SETUP PHOTOS	53

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: PLANTRONICS, INC.
345 ENCINAL STREET
SANTA CRUZ, CA. 95060
USA

EUT DESCRIPTION: BLUETOOTH ANALOG ADAPTER (DONGLE)

MODEL: 35BAA; 590A

SERIAL NUMBER: 50 (Emission) & 136 (Conduction)

DATE TESTED: July 20 to August 26, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth Analog Adapter (Dongle) which operated in 2400 – 2480 MHz band.

The radio module is manufactured by Plamex SA De CV.

5.2. MODEL(S) TESTED

EUT Model: 35BAA

5.3. MANUFACTURER'S DESCRIPTION OF MODEL DIFFERENCE

Model 590A is identical to the tested model 35BAA except for the model number for marketing purposes.

5.4. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Output Power (dBm)	Output Power (mW)
2402 - 2480	2.66	1.85

5.5. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a printed on PCBA antenna (manufactured by Plantronics), with a maximum of -0.5 dBi.

5.6. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was RFC Stack 1.2 (b01472), rev. 2.0 a.

The EUT driver software installed in the host support equipment during testing was CSRBC01, rev.1.20.

The test utility software used during testing was Bluetest and PStool, rev. 1.20.0.0.

5.7. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2441 MHz.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	PP01L	6P326A01	DoC
AC Adapter	Dell	AA20031	9364U	N/A
Test Fixture	Plantronics	N/A	N/A	N/A
DC Power Supply (5V)	Speedy-Tech	66879-01	N/A	N/A
DC Power Supply (3.8V)	HP	E3610A	N/A	N/A
CD Player	Craig	CD2863	N/A	N/A
Pulsar Desktop Charging Stand	Plantronics	PDCS	119	N/A

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	DC Plug	Unshielded	2m	No
2	Audio	1	Line Out	Unshielded	.2m	No
3	AC	2	US115	Unshielded	1.5m	No
4	DC	1	DC	Unshielded	1.5m	No
5	Parallel	1	DB25	Shielded	1.5m	No
6	Serial	1	DB9	Shielded	1.5m	No
7	BNC	1	BNC	Shielded	1.5m	No


I/O CABLES - With USB Charging Cable for Line Conducted Emissions testing

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	DC Plug	Unshielded	2m	No
2	AC	1	US115	Unshielded	1.5m	No
3	USB	1	USB	Shielded	2m	Charging


TEST SETUP

The EUT is installed in a test fixture in order to setup channel and power. Test software from laptop exercised the radio card.

SETUP DIAGRAM FOR TESTS

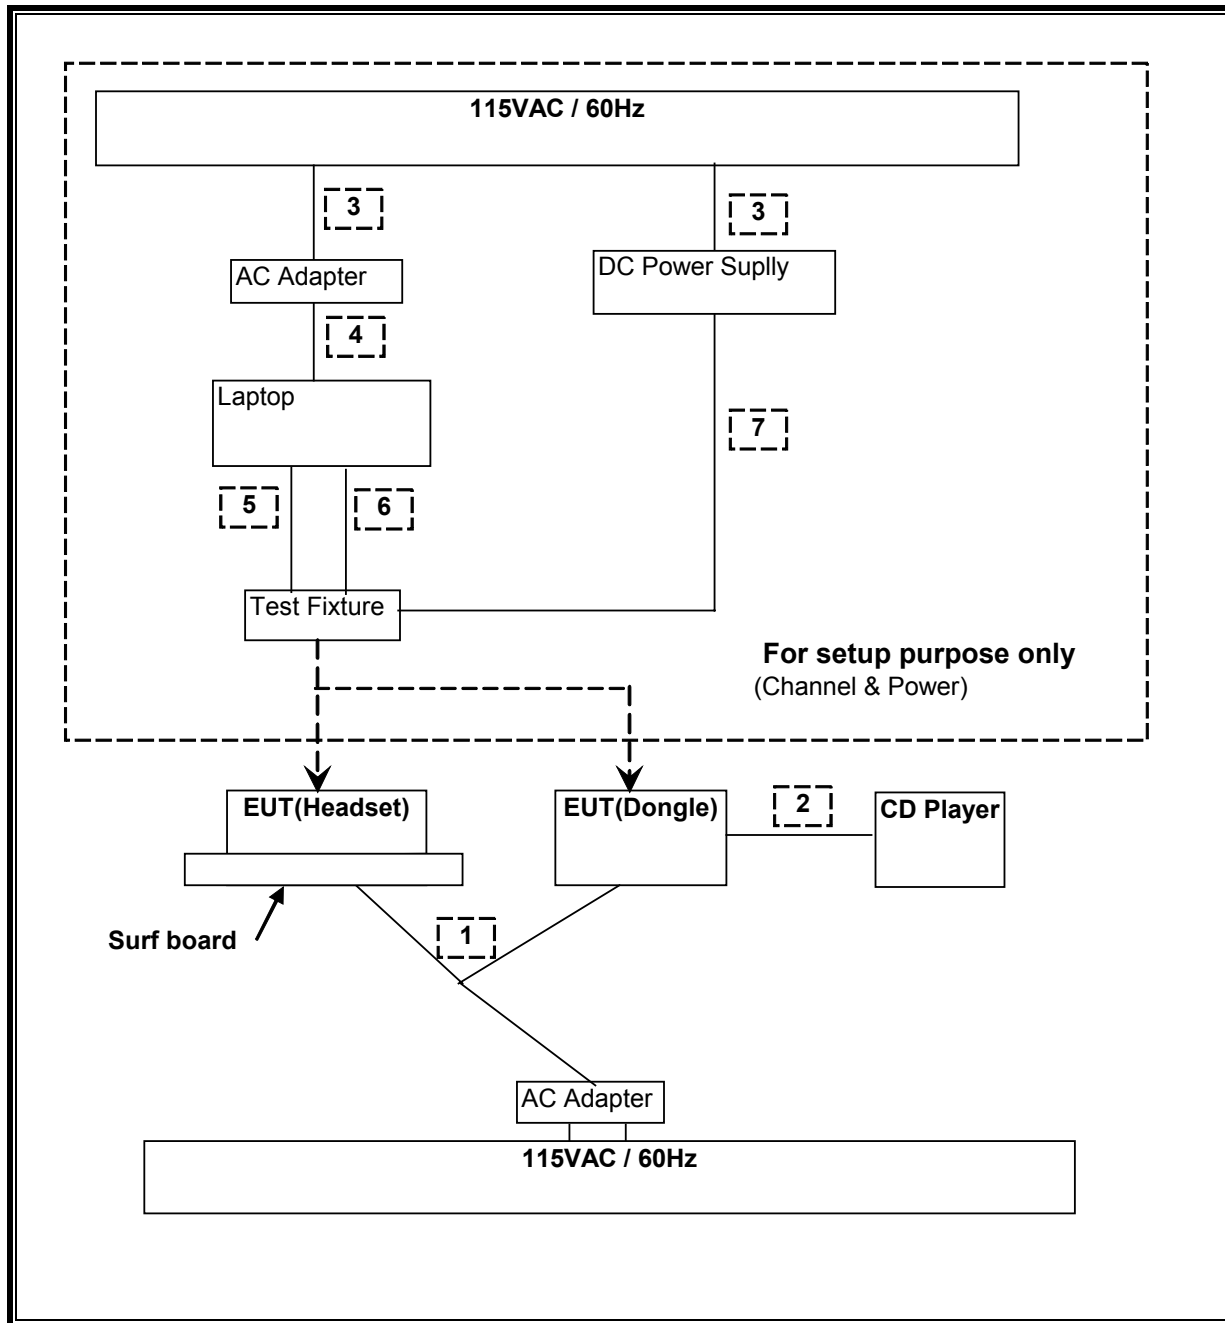

SETUP DIAGRAM FOR TESTS – With USB Charging Cable for Line Conducted Emissions testing

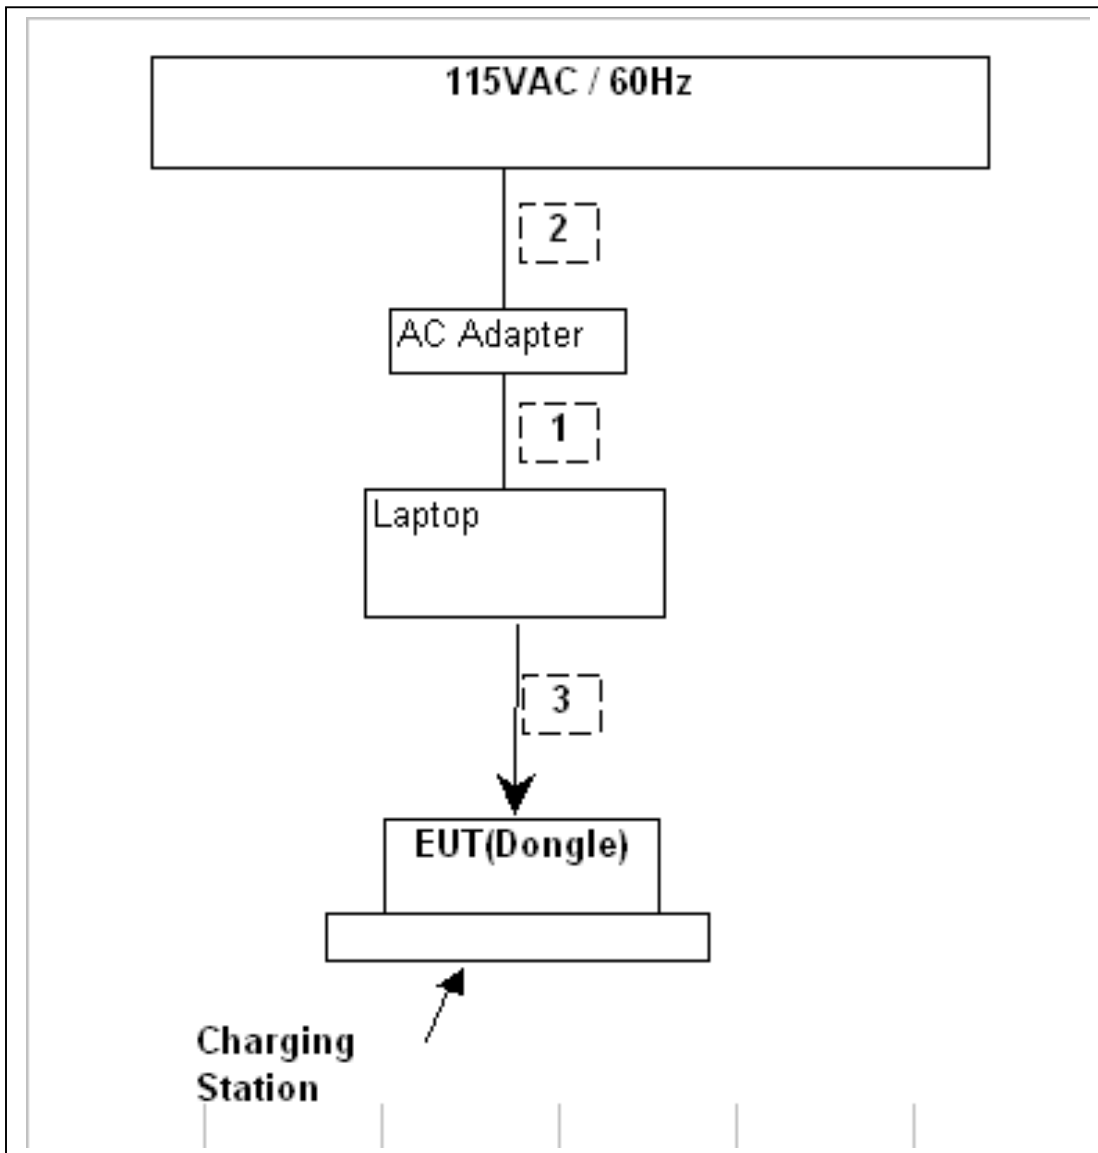

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Spectrum Analyzer	Agilent	E4446A	MY43360112	1/13/2006
Peak Power Meter	Agilent	E4416A	GB41291160	2/9/06
Peak / Average Power Sensor	Agilent	E9327A	US40440755	2/10/06
Preamplifier, 1 ~ 26.5 GHz	HP	8449B	3008A00369	8/17/06
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29301	9/12/05
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/21/05
RF Filter Section	HP	85420E	3705A00256	11/21/05
30MHz--- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	12/22/05
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/05
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/21/05
Site A Line Stabilizer / Conditioner	Triplite	LC-1800a	A0051681	CNR
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/05

7. LIMITS AND RESULTS

7.1. ANTENNA PORT CHANNEL TESTS

7.1.1. 20 dB BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 20 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.


RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2402	891.199
Middle	2441	862.233
High	2480	880.480

20 dB BANDWIDTH

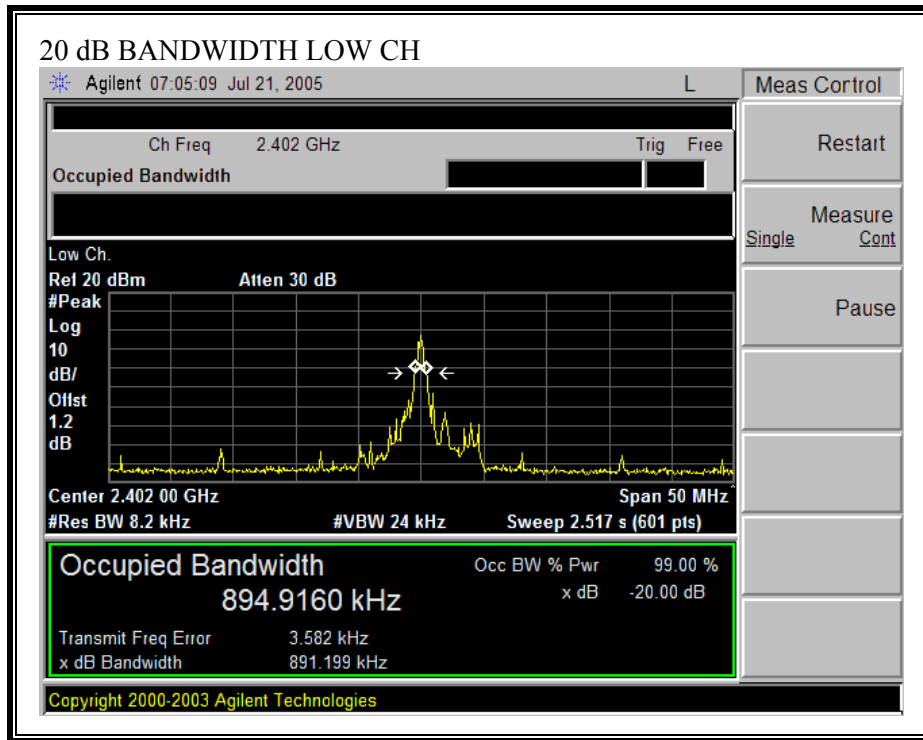

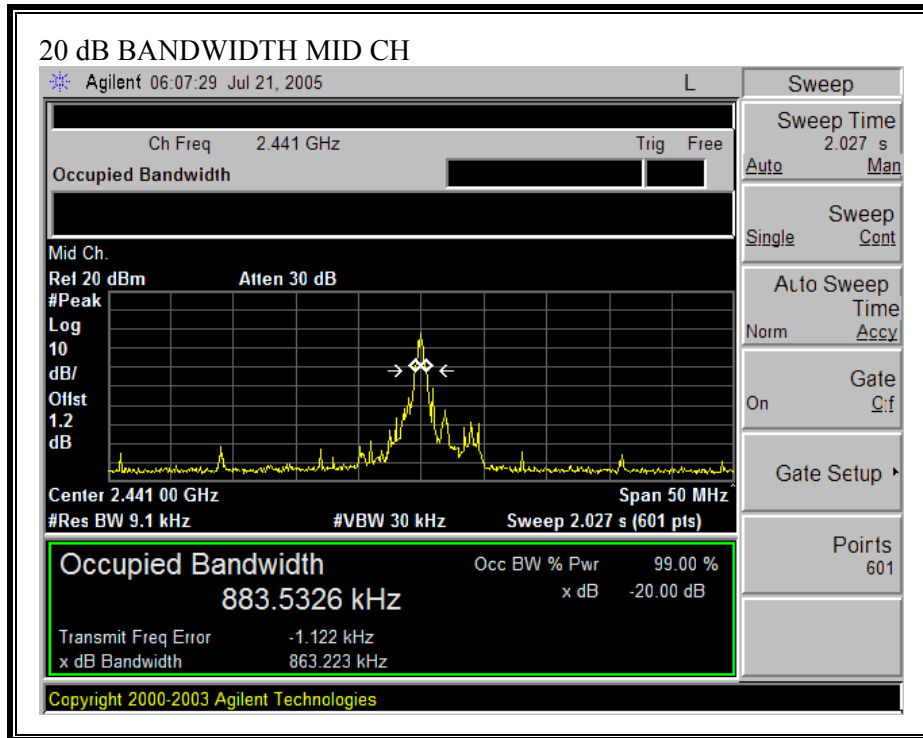

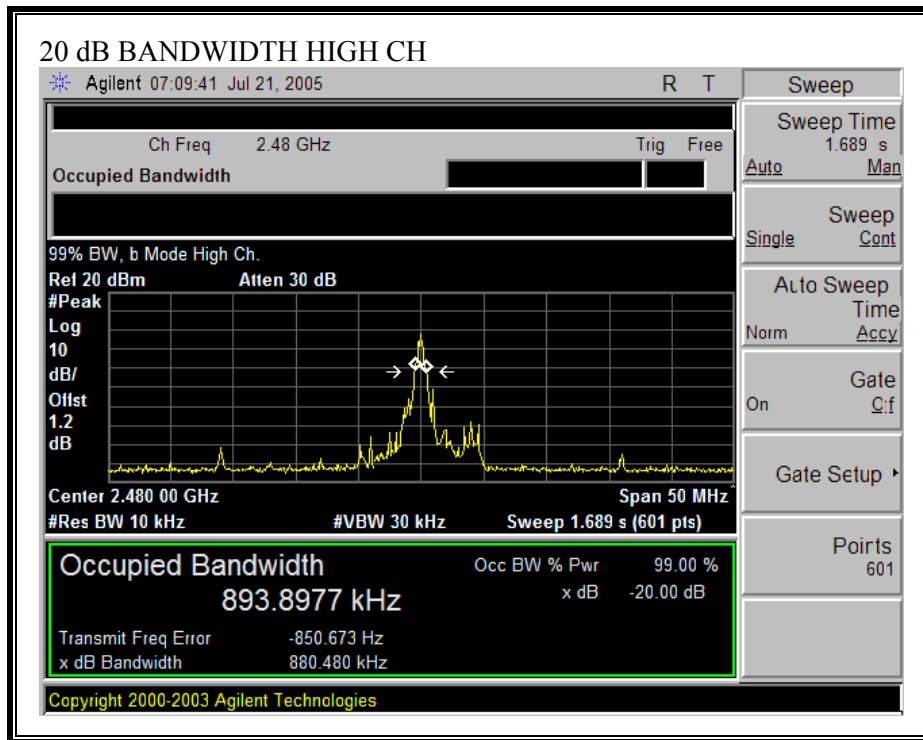

7.1.2. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is -0.5 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output power is connected to peak power.

RESULTS

No non-compliance noted:

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	2.29	30	-27.71
Middle	2441	2.66	30	-27.34
High	2480	2.14	30	-27.86

7.1.3. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 1.2 dB cable was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	-2.66
Middle	2441	-2.36
High	2480	-2.87

7.1.4. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

§15.247 (f) The digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.


RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-8.74	8	-16.74
Middle	2441	-8.75	8	-16.75
High	2480	-9.11	8	-17.11

PEAK POWER SPECTRAL DENSITY

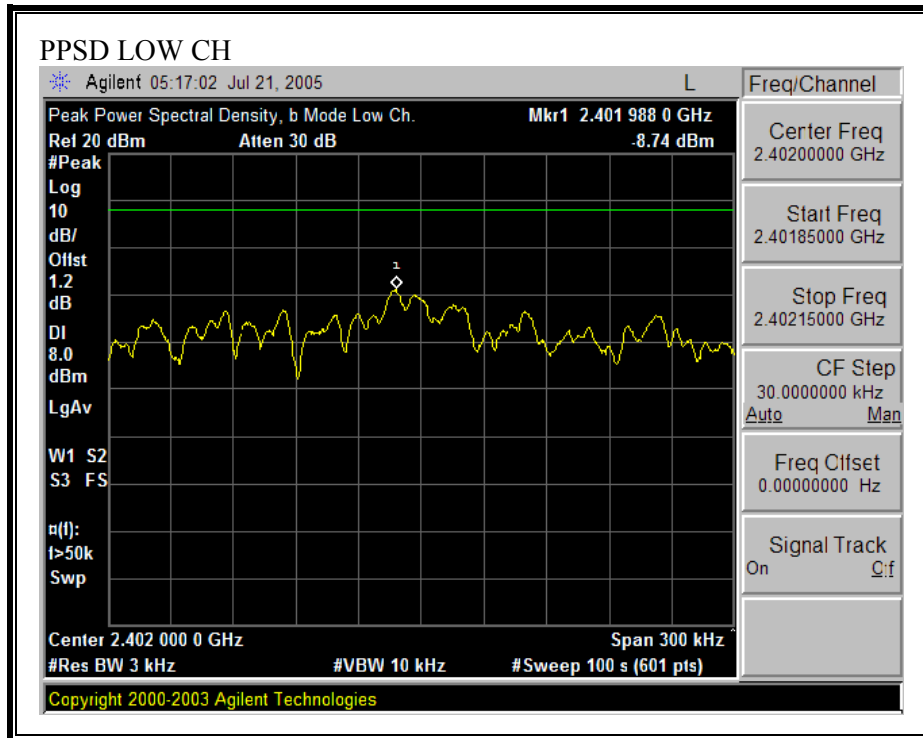

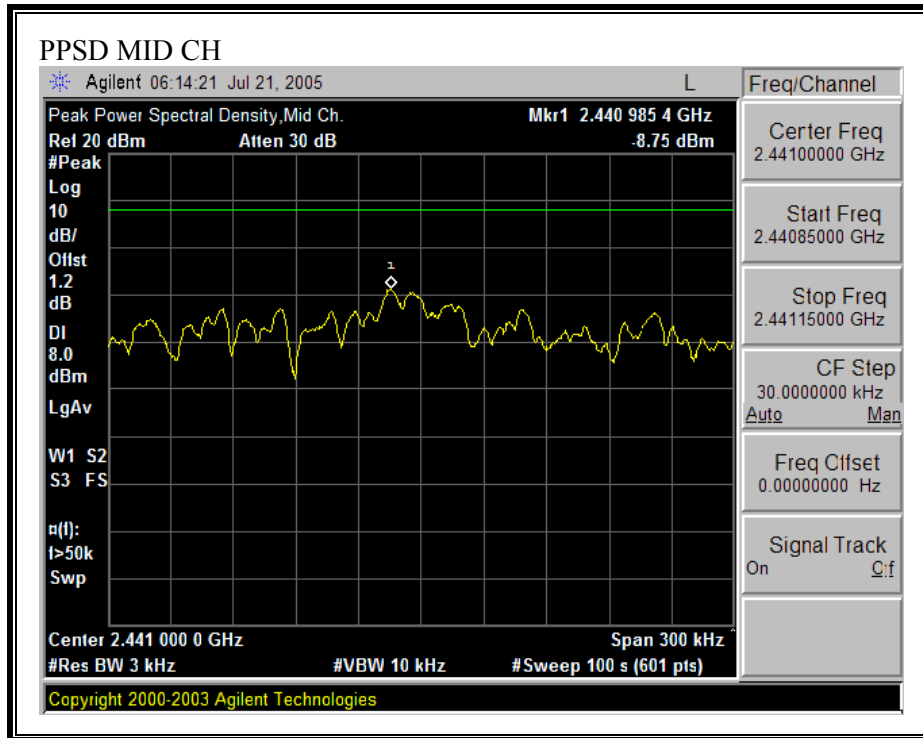

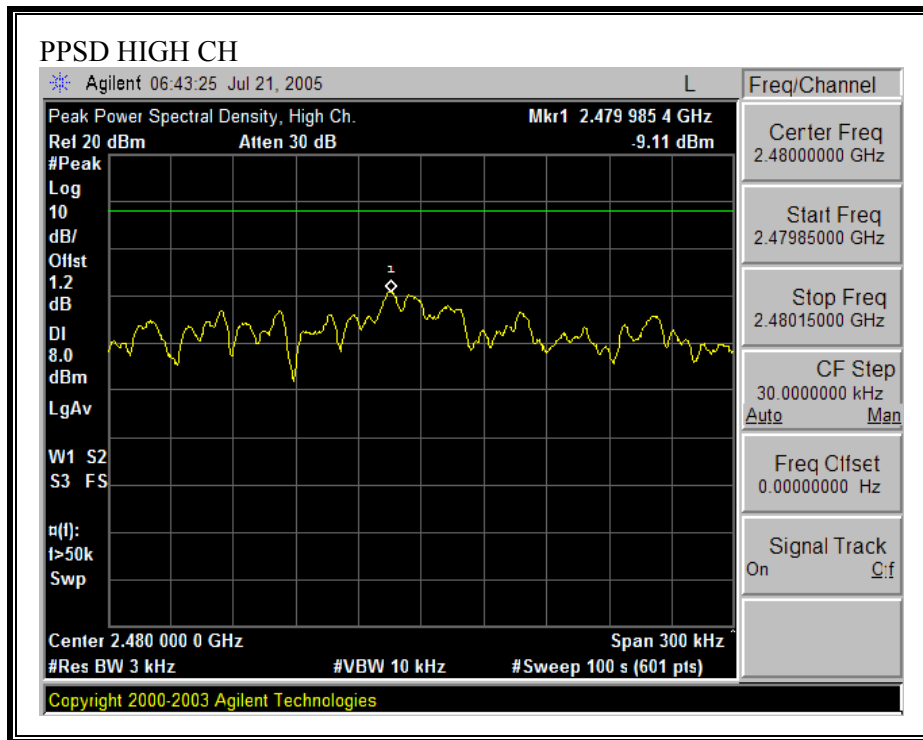

7.1.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL

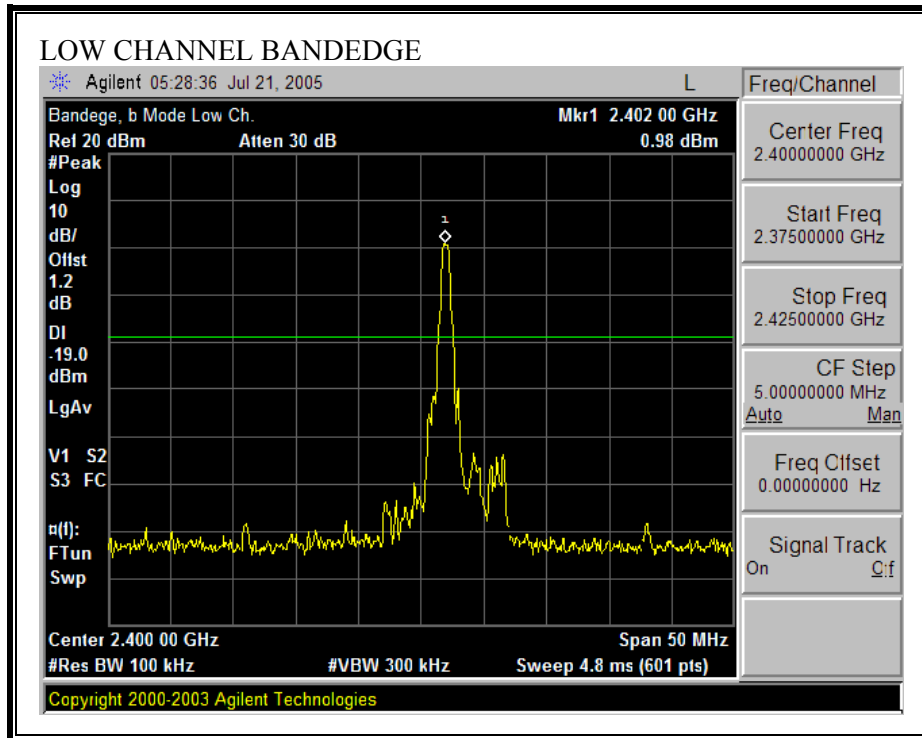

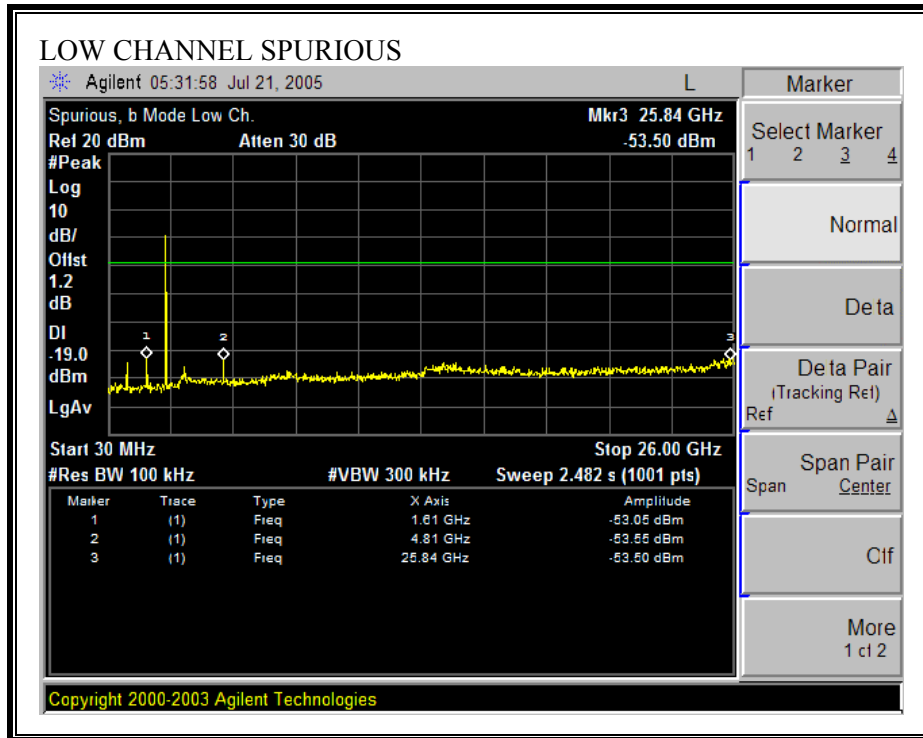



SPURIOUS EMISSIONS, MID CHANNEL

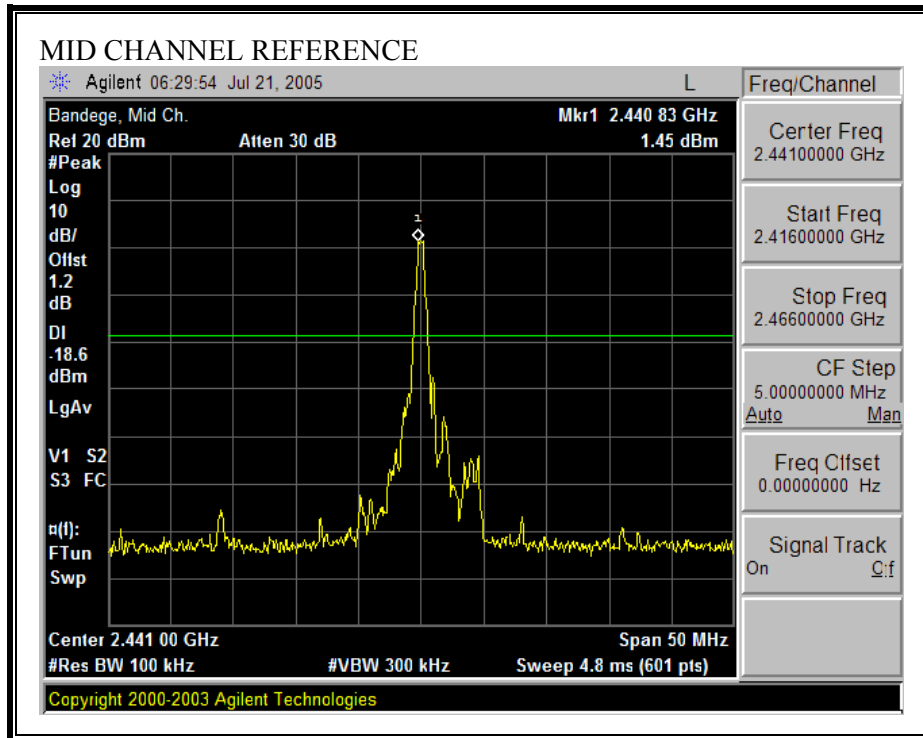

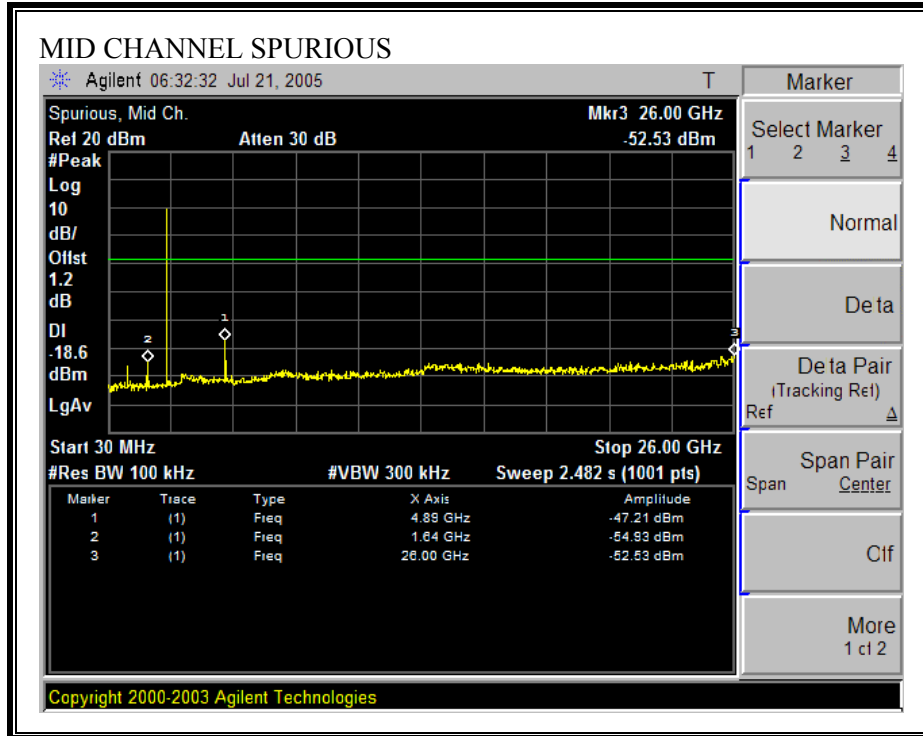



SPURIOUS EMISSIONS, HIGH CHANNEL

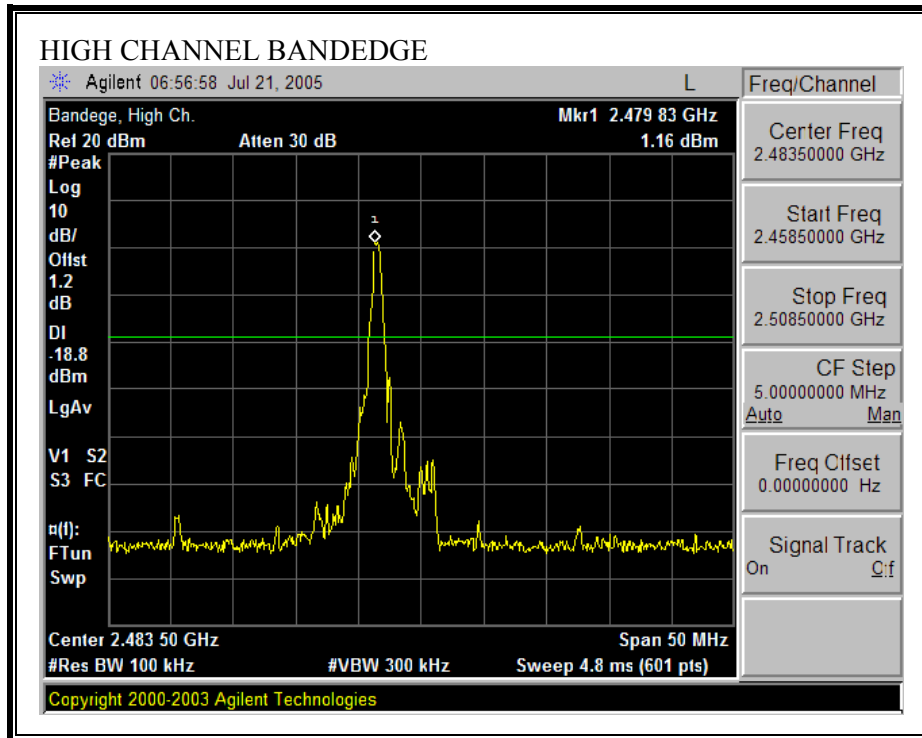

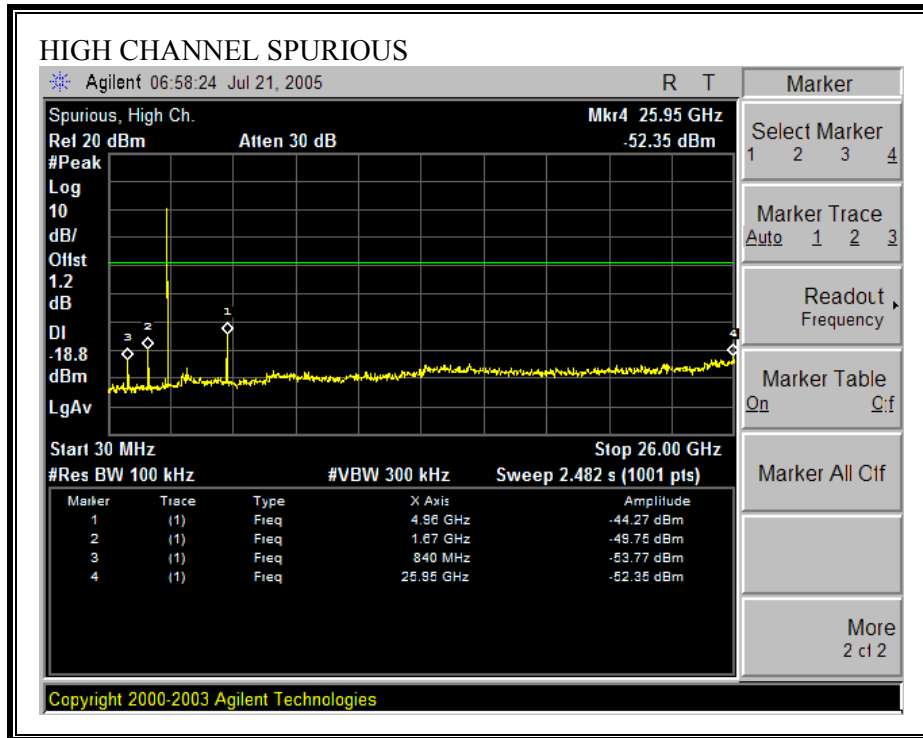

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

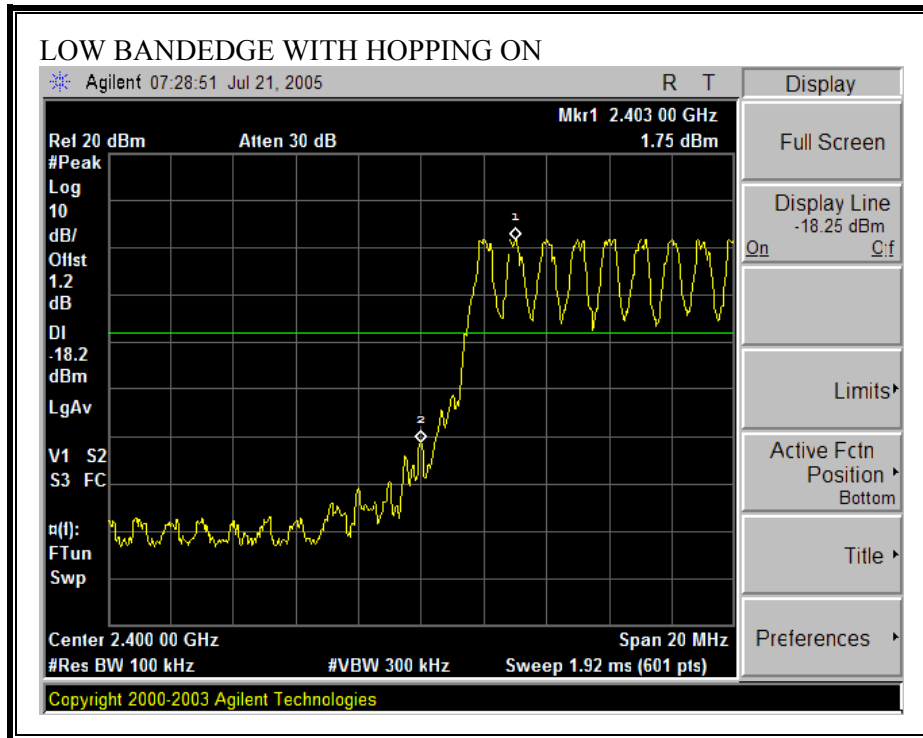

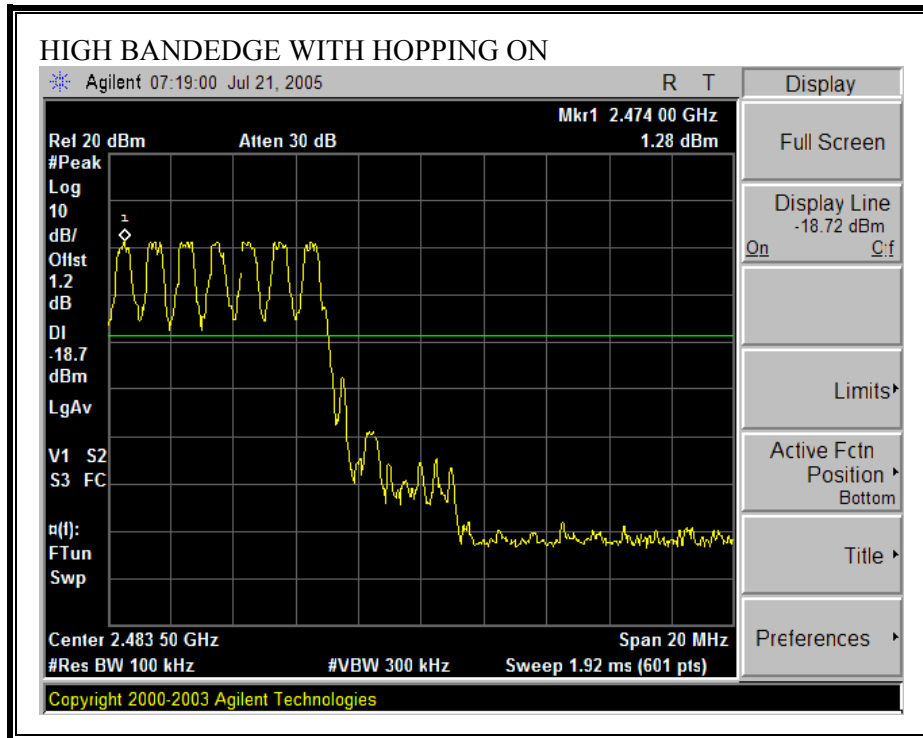

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

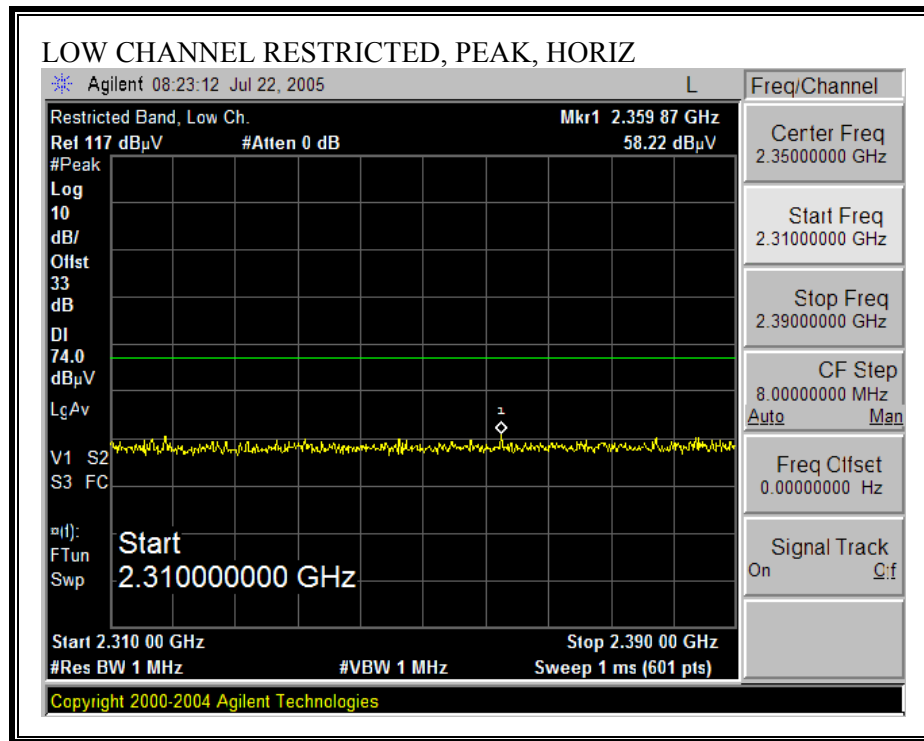

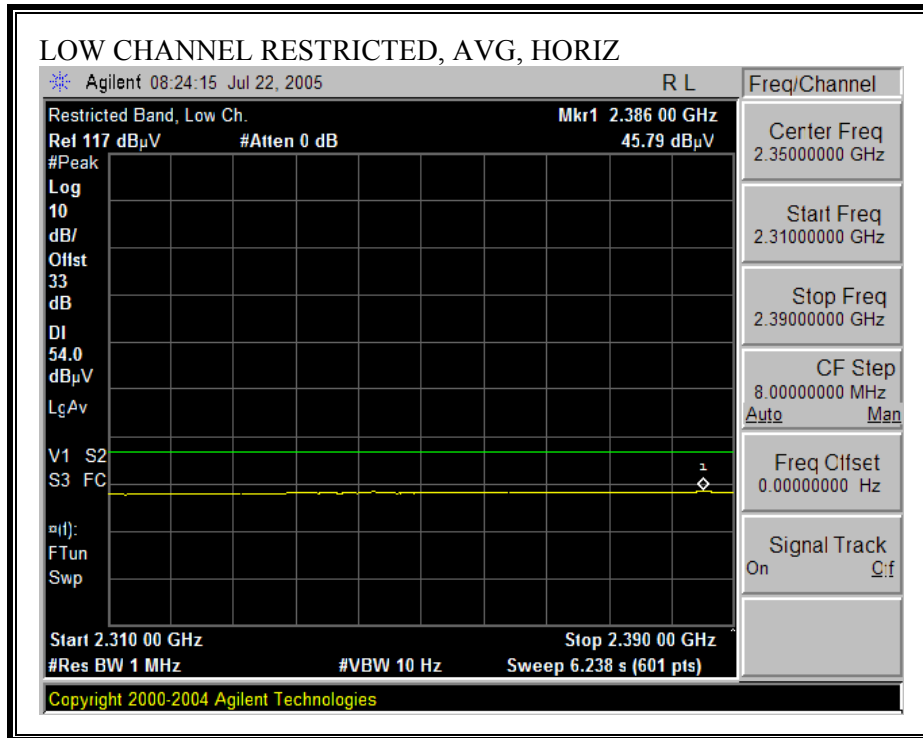



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

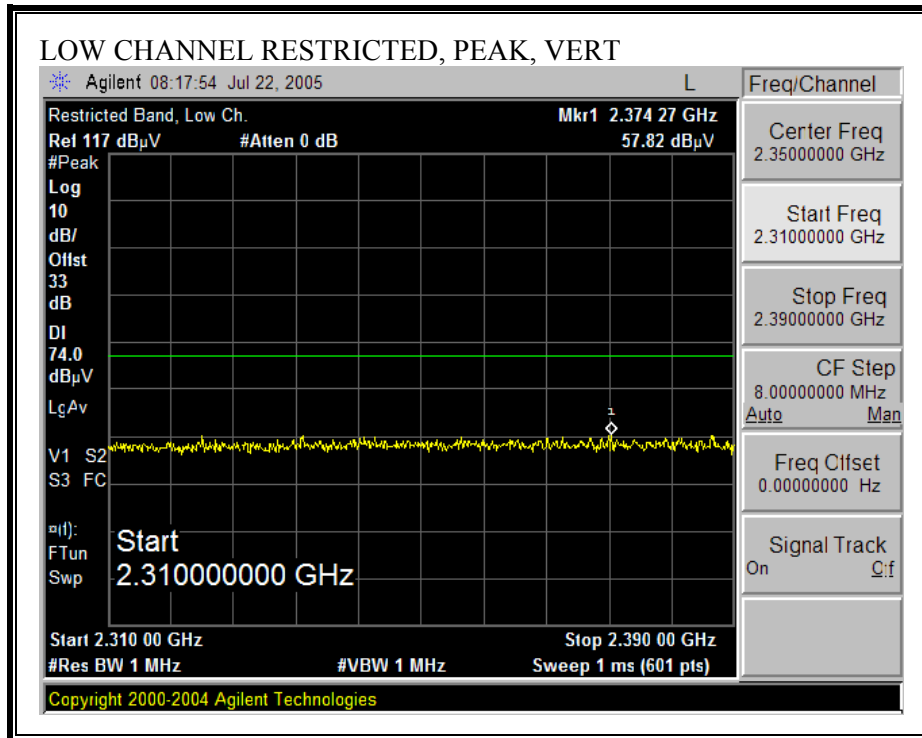

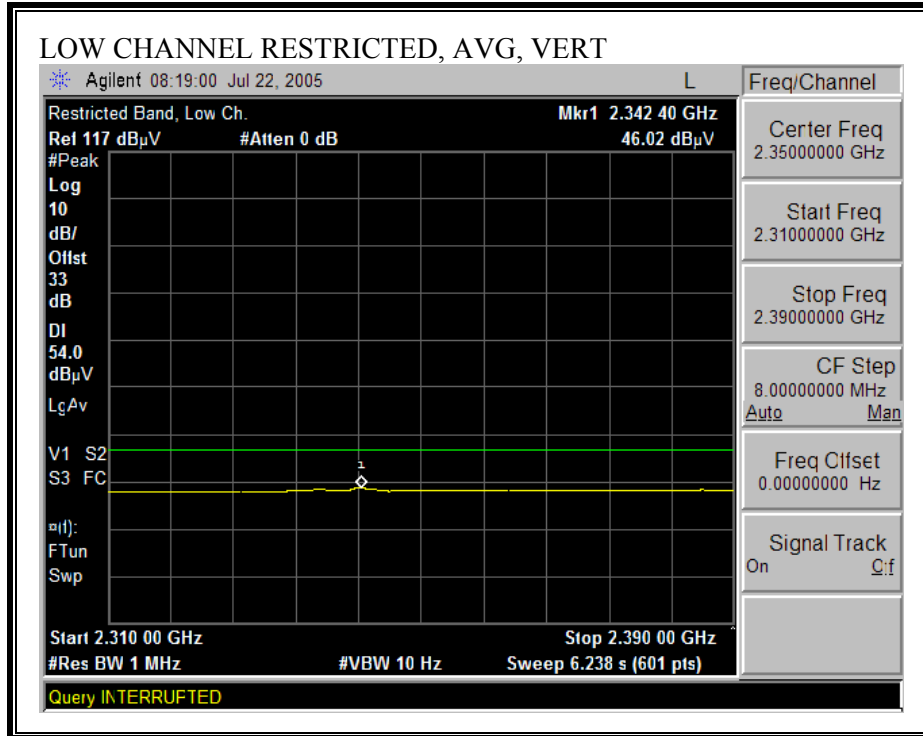



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

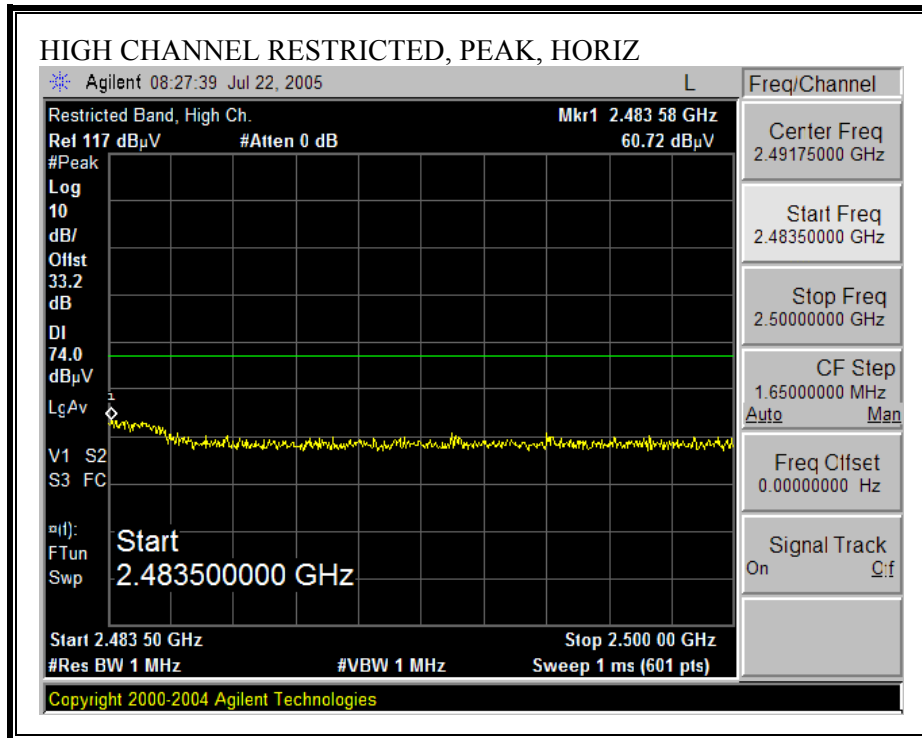

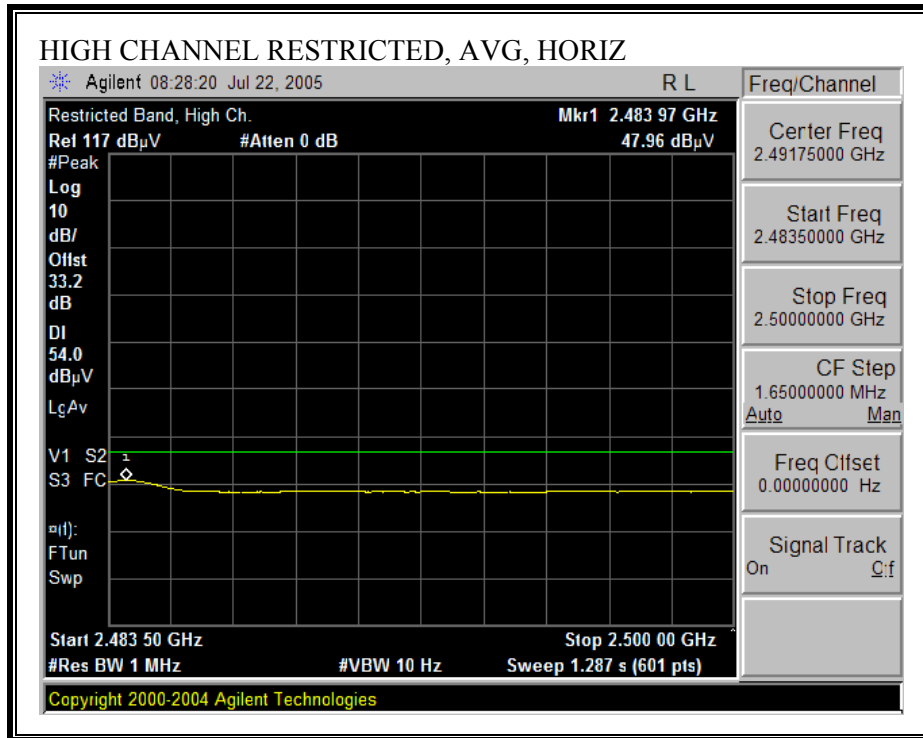

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

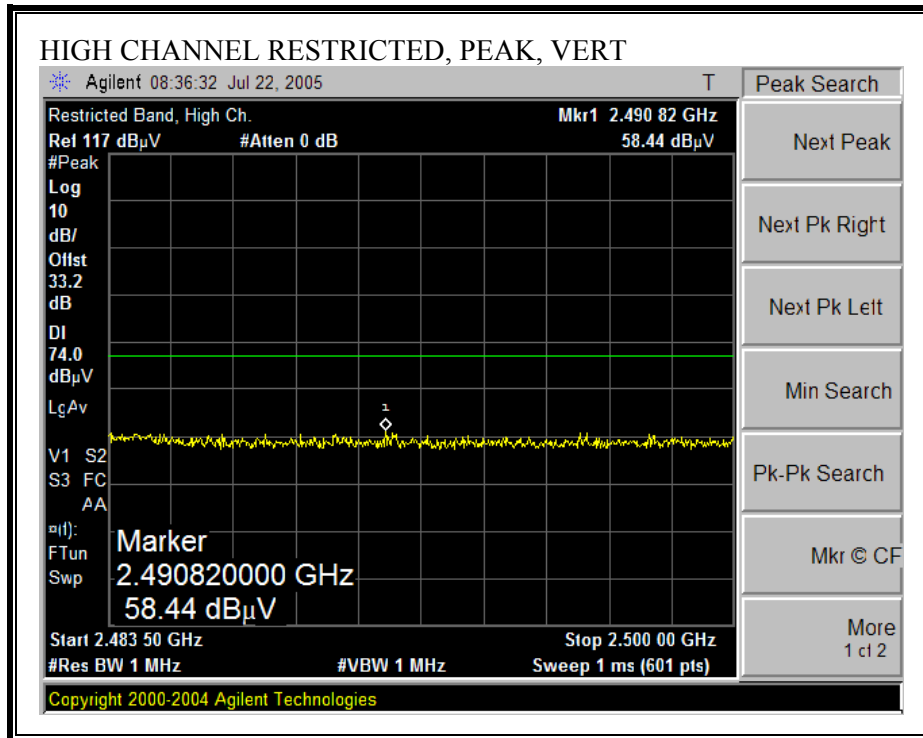

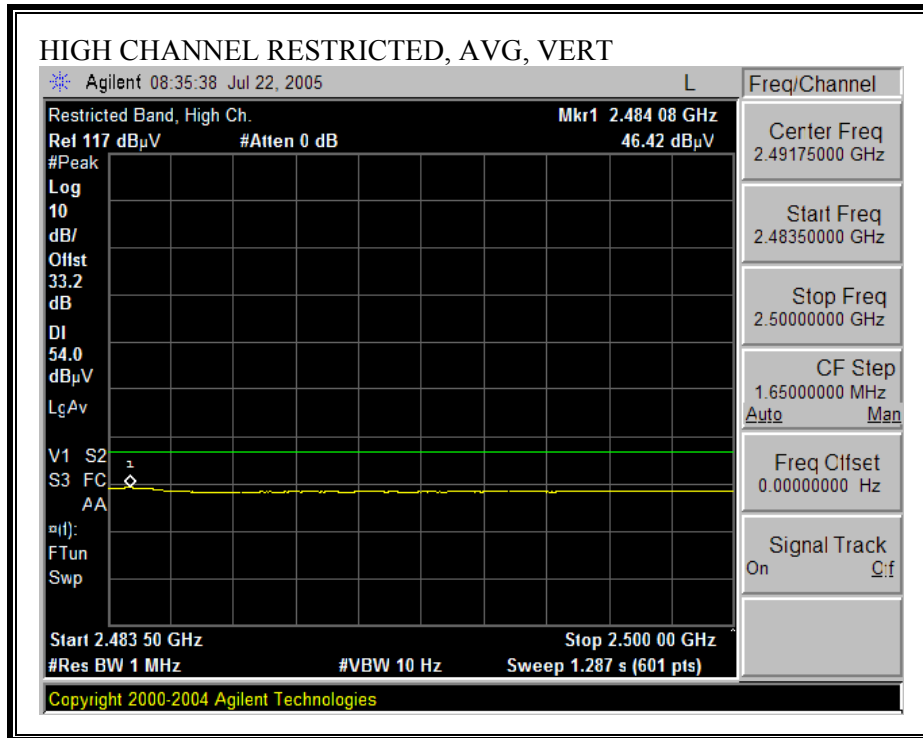

HARMONICS AND SPURIOUS EMISSIONS

07/22/05 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: VIEN TRAN
 Project #: 05U3529-1
 Company: PLANTRONICS
 EUT Descrip.: BLUETOOTH DONGLE
 EUT M/N: 35BAA
 Test Target: FCC PART 15
 Mode Oper: TRANSMITTING LOW, MID & HI CHANNELS_HARMONIC & SPUR

Test Equipment:

EMCO Horn 1-18GHz T119; S/N: 29301 @3m	Pre-amplifier 1-26GHz T34 HP 8449B	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit FCC 15.209
---	---------------------------------------	------------------------	--------------	---------------------

Hi Frequency Cables

2 foot cable 2_Vien	3 foot cable	4 foot cable	12 foot cable 12_Vien	HPF HPF_4.0GHz	Reject Filter
------------------------	--------------	--------------	--------------------------	-------------------	---------------

Peak Measurements
 RBW=VBW=1MHz


Average Measurements
 RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
LOW CH = 2402 MHz															
4.804	3.0	56.5	38.1	34.0	3.1	-33.6	0.0	0.6	60.6	42.2	74	54	-13.4	-11.8	V
7.206	3.0	43.0	31.0	35.6	3.7	-33.3	0.0	0.6	49.6	37.6	74	54	-24.4	-16.4	V
4.804	3.0	58.0	39.1	34.0	3.1	-33.6	0.0	0.6	62.1	43.2	74	54	-11.9	-10.8	H
7.206	3.0	43.5	30.1	35.6	3.7	-33.3	0.0	0.6	50.1	36.7	74	54	-23.9	-17.3	H
MID CH = 2441 MHz															
4.882	3.0	56.9	38.9	34.1	3.1	-33.5	0.0	0.6	61.2	43.2	74	54	-12.8	-10.8	V
7.323	3.0	42.9	31.0	35.6	3.7	-33.3	0.0	0.6	49.6	37.7	74	54	-24.4	-16.3	V
4.882	3.0	59.5	39.7	34.1	3.1	-33.5	0.0	0.6	63.8	44.0	74	54	-10.2	-10.0	H
7.323	3.0	43.6	31.9	35.6	3.7	-33.3	0.0	0.6	50.3	38.6	74	54	-23.7	-15.4	H
HI CH = 2480 MHz															
4.960	3.0	58.9	38.9	34.1	3.1	-33.5	0.0	0.6	63.3	43.3	74	54	-10.7	-10.7	V
7.440	3.0	43.6	31.2	35.7	3.8	-33.3	0.0	0.6	50.4	38.0	74	54	-23.6	-16.0	V
4.960	3.0	59.6	39.8	34.1	3.1	-33.5	0.0	0.6	64.0	44.2	74	54	-10.0	-9.8	H
7.440	3.0	43.3	31.4	35.7	3.8	-33.3	0.0	0.6	50.1	38.2	74	54	-23.9	-15.8	H
NO OTHER EMISSIONS WERE DETECTED AFTER 3RD HARMONIC															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

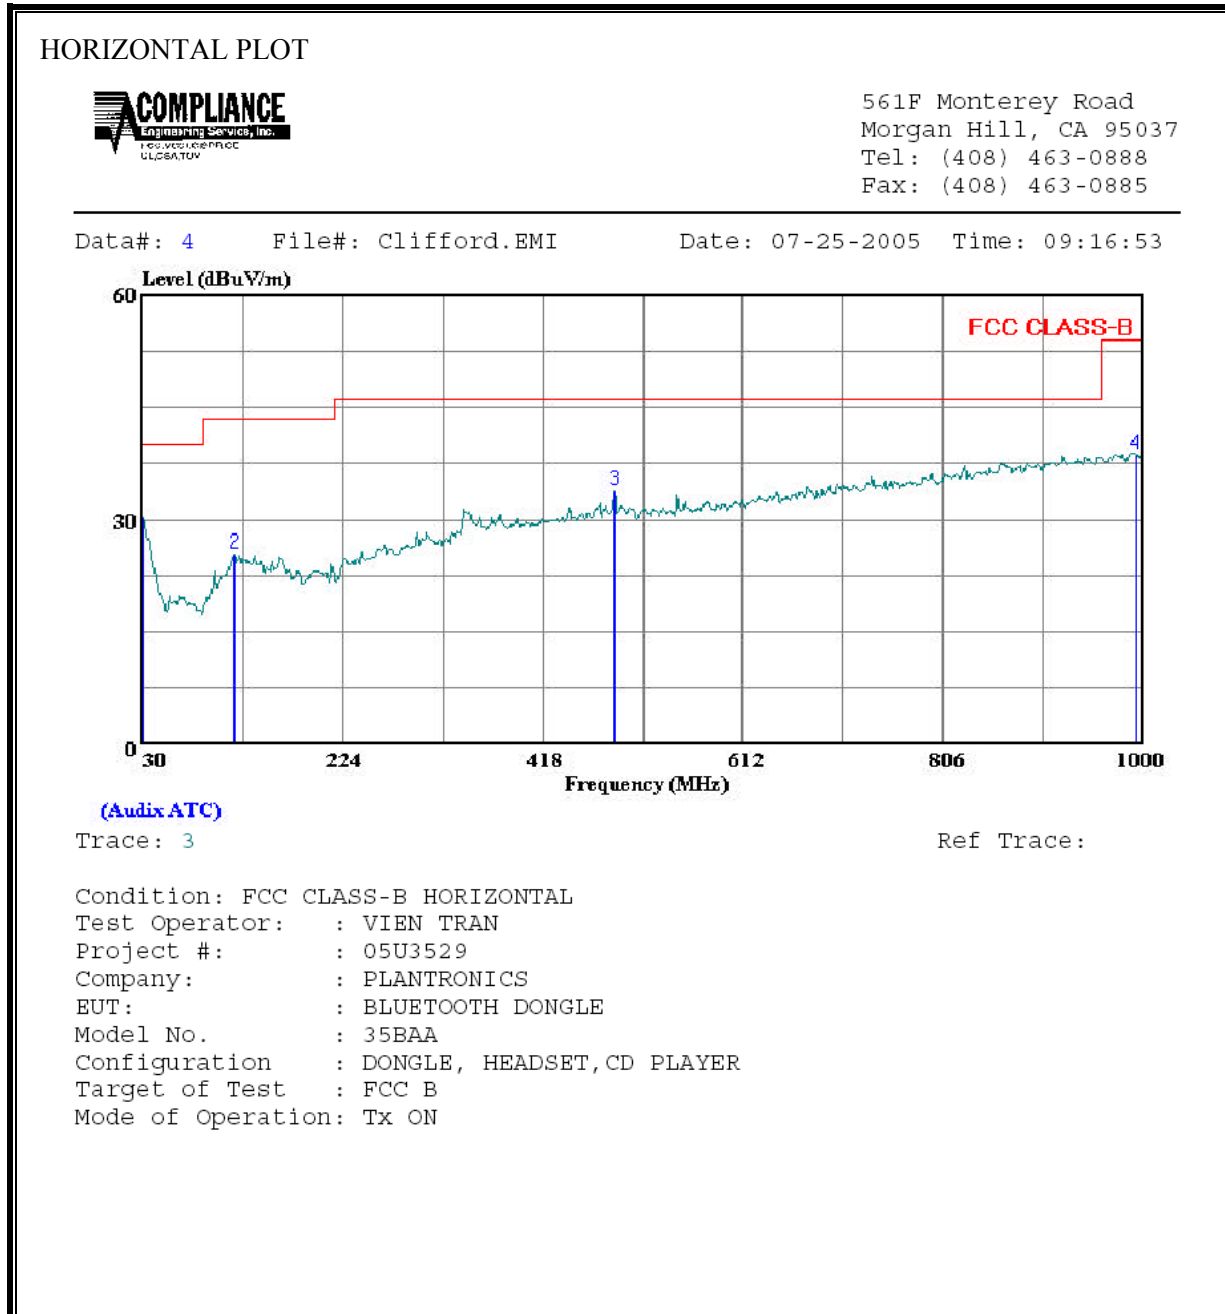

HORIZONTAL DATA							
	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.000	9.92	20.45	30.37	40.00	-9.63	Peak
2	119.240	10.22	15.05	25.27	43.50	-18.23	Peak
3	487.840	13.81	20.00	33.81	46.00	-12.19	Peak
4	993.210	11.77	26.93	38.70	54.00	-15.30	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

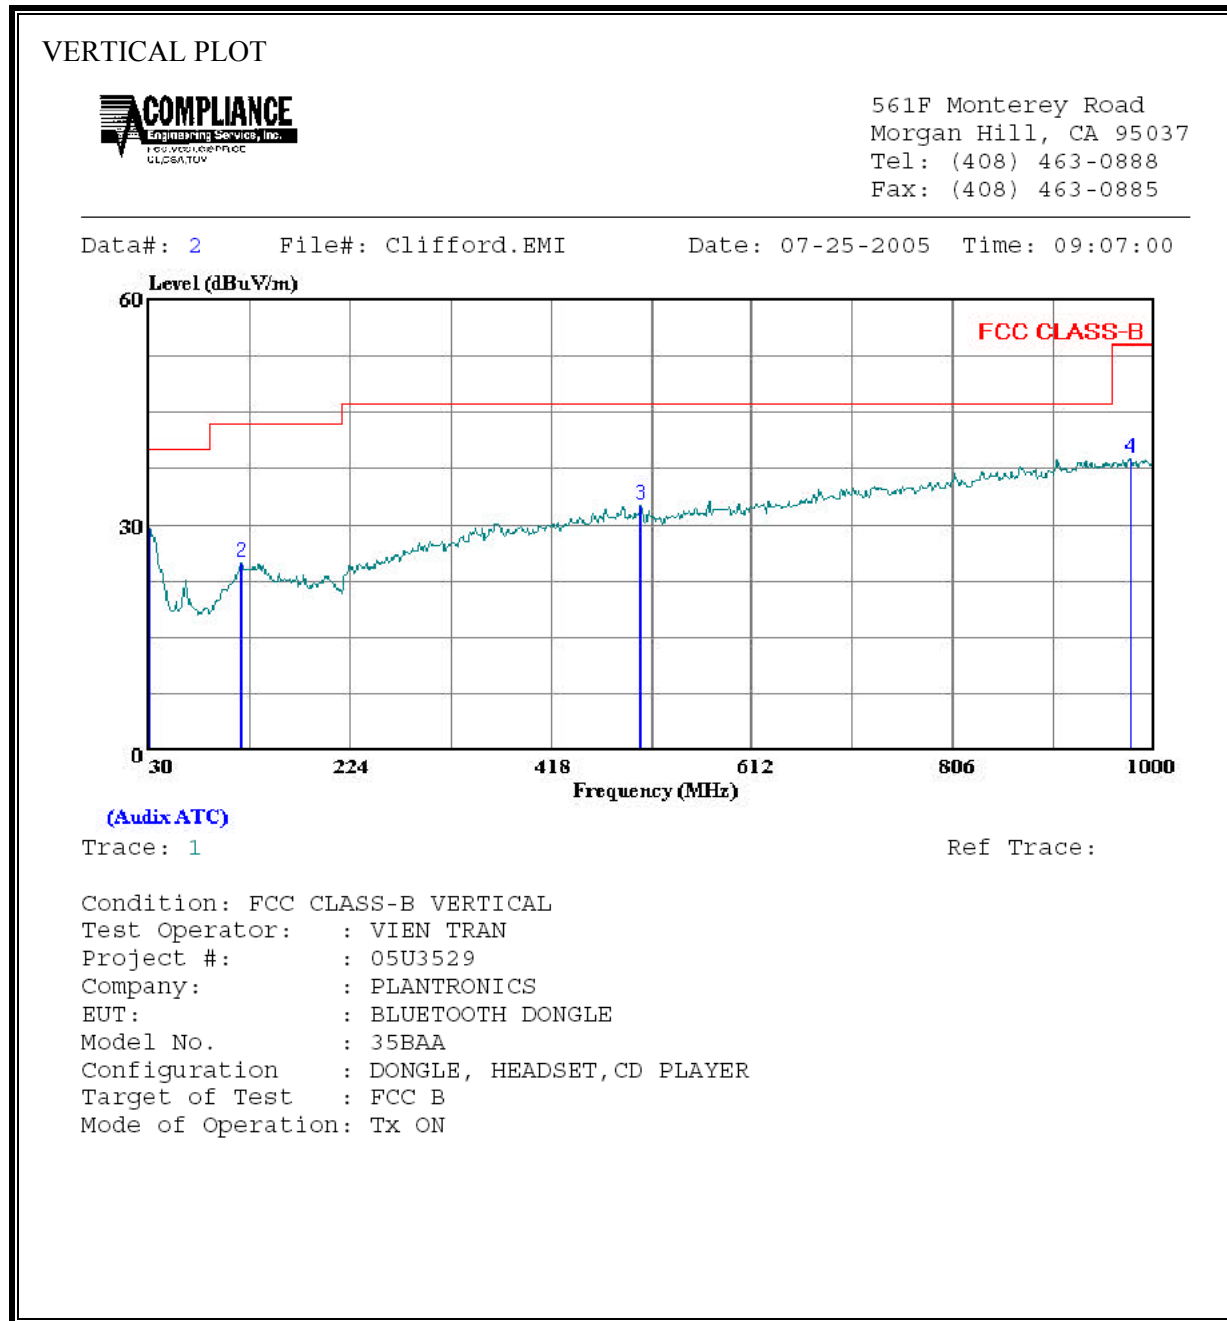

VERTICAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.000	8.98	20.45	29.43	40.00	-10.57	Peak
2	119.240	9.80	15.05	24.85	43.50	-18.65	Peak
3	504.330	12.34	20.26	32.60	46.00	-13.40	Peak
4	977.690	12.11	26.75	38.86	54.00	-15.14	Peak

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:


6 WORST EMISSIONS – without USB Charging Cable

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Class (dB)	Limit		Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)		QP	AV	QP (dB)	AV (dB)	
0.21	43.12	--	--	0.00	63.24	53.24	-20.12	-10.12	L1
0.42	42.50	--	--	0.00	57.47	47.47	-14.97	-4.97	L1
25.05	29.12	--	--	0.00	60.00	50.00	-30.88	-20.88	L1
0.21	40.76	--	--	0.00	63.24	53.24	-22.48	-12.48	L2
0.42	38.42	--	--	0.00	57.47	47.47	-19.05	-9.05	L2
19.12	26.80	--	--	0.00	60.00	50.00	-33.20	-23.20	L2
6 Worst Data									


6 WORST EMISSIONS – with USB Charging Cable (Part No.: 70218)

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Class (dB)	Limit	FCC_B AV	Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.15	51.64	--	16.56	0.00	65.84	55.84	-14.20	-39.28	L1
0.19	51.40	--	35.98	0.00	63.99	53.99	-12.59	-18.01	L1
0.20	51.86	--	39.10	0.00	63.82	53.82	-11.96	-14.72	L1
0.20	53.76	--	39.38	0.00	63.82	53.82	-10.06	-14.44	L2
0.21	52.26	--	39.05	0.00	63.24	53.24	-10.98	-14.19	L2
0.22	50.90	--	34.94	0.00	62.93	52.93	-12.03	-17.99	L2
6 Worst Data									


LINE 1 RESULTS - without USB Charging Cable

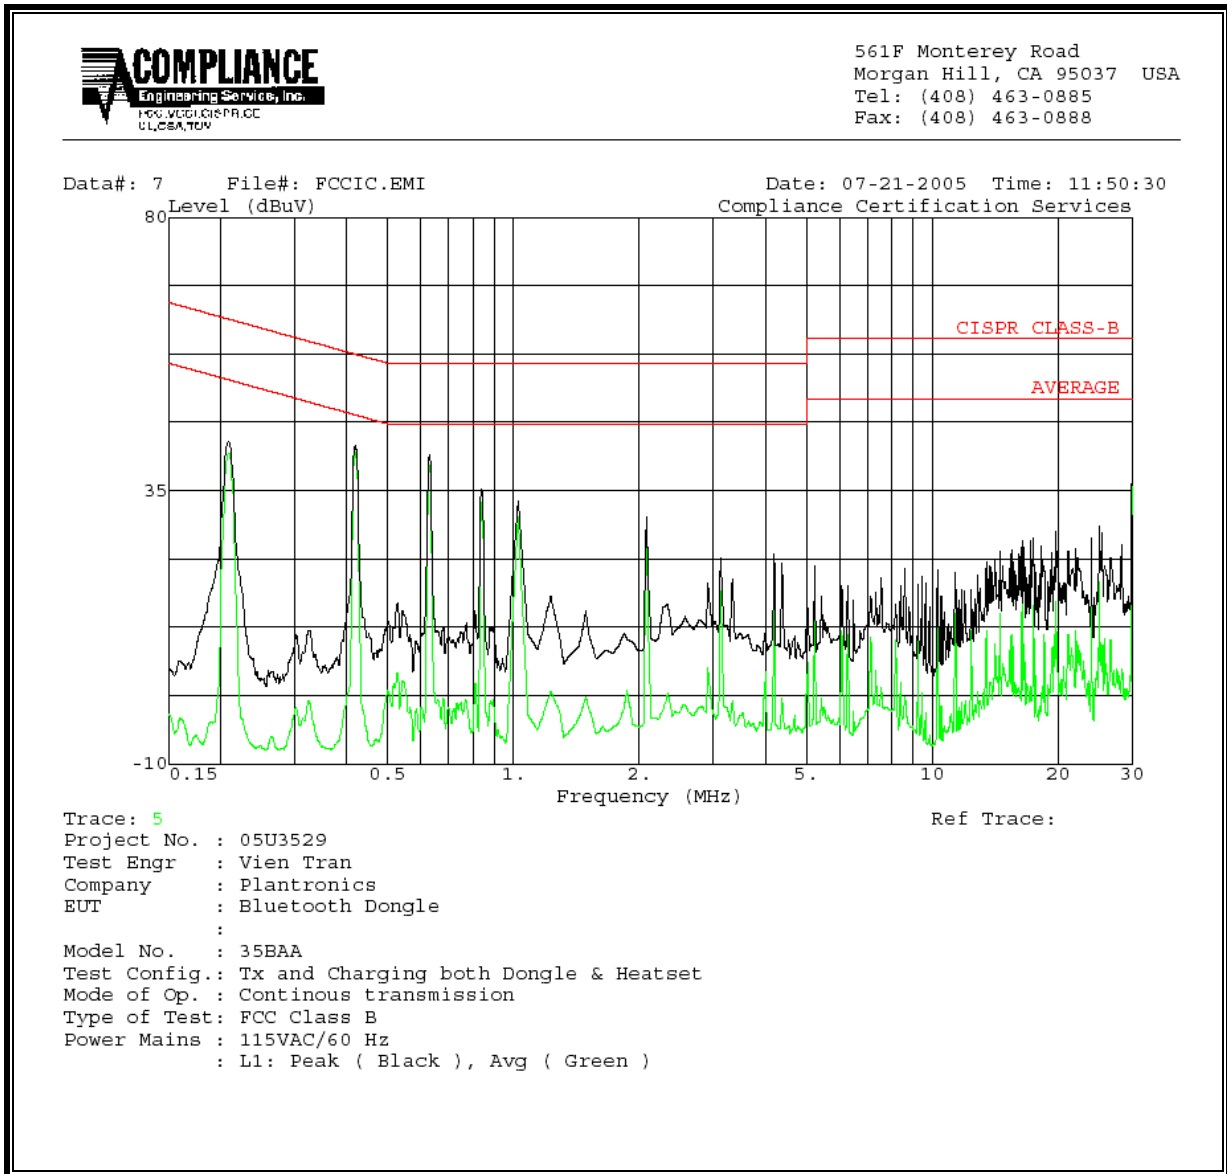


LINE 2 RESULTS- without USB Charging Cable

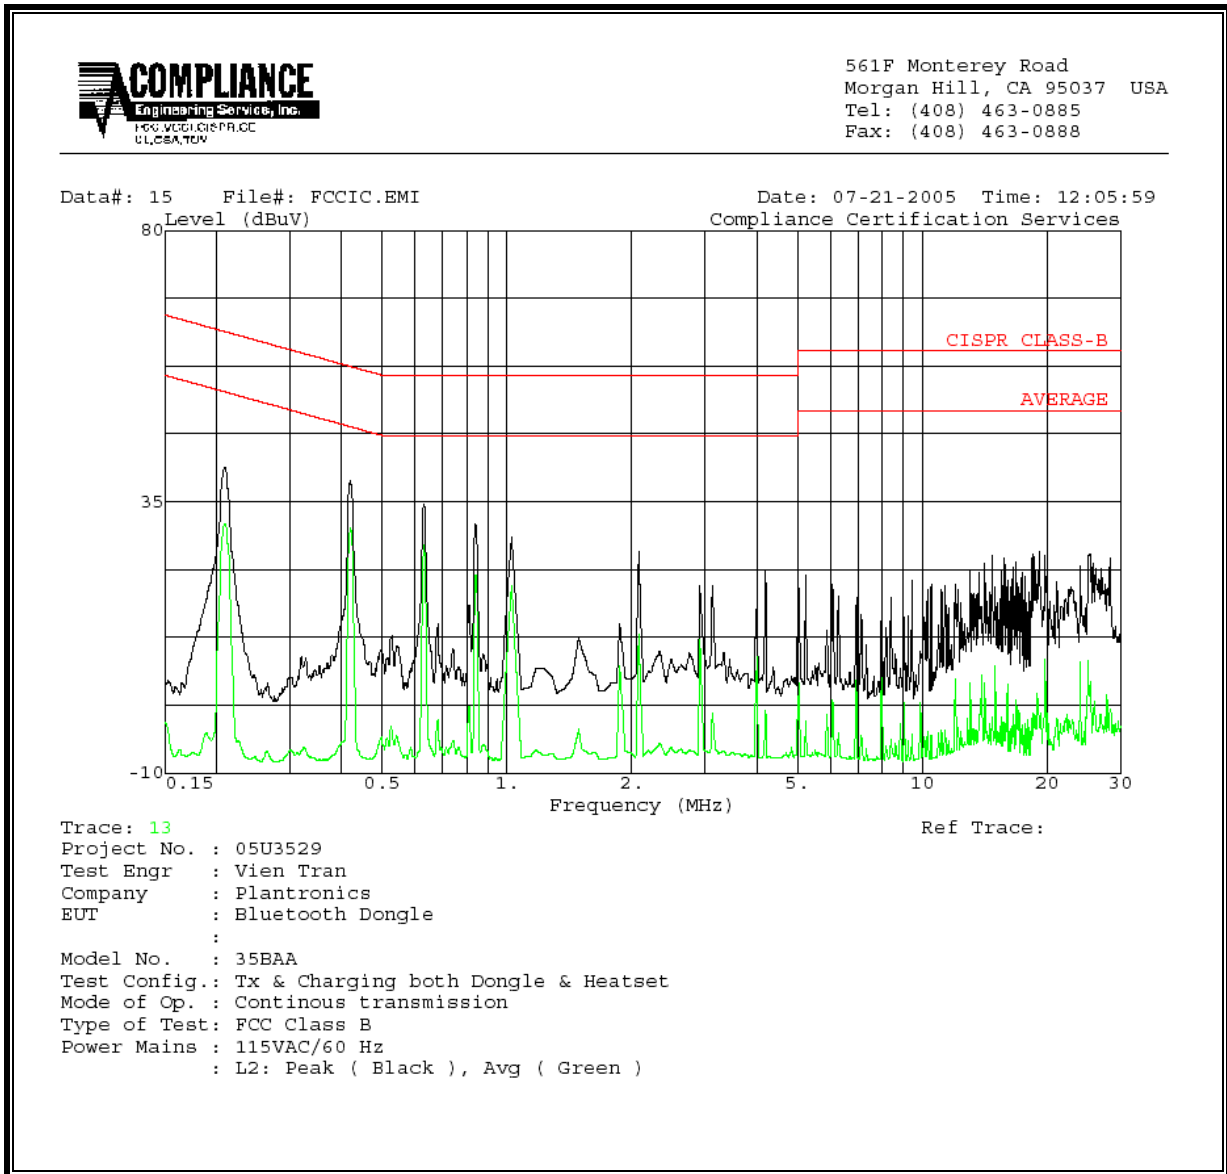

LINE 1 RESULTS – with USB Charging Cable (Part No.: 70218)

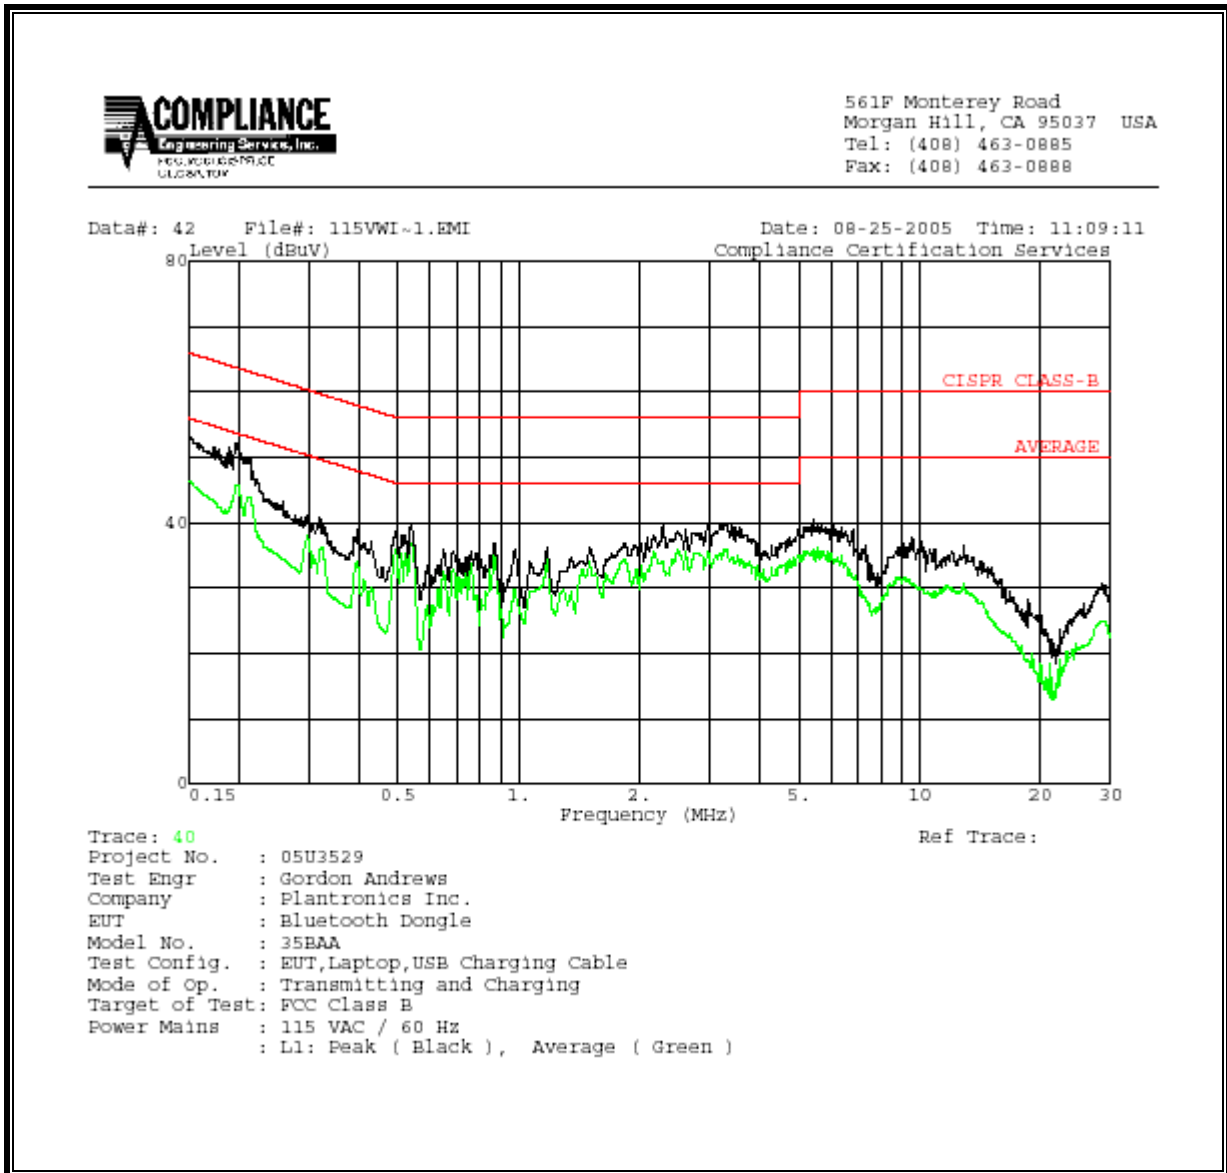


LINE 2 RESULTS- with USB Charging Cable (Part No.: 70218)

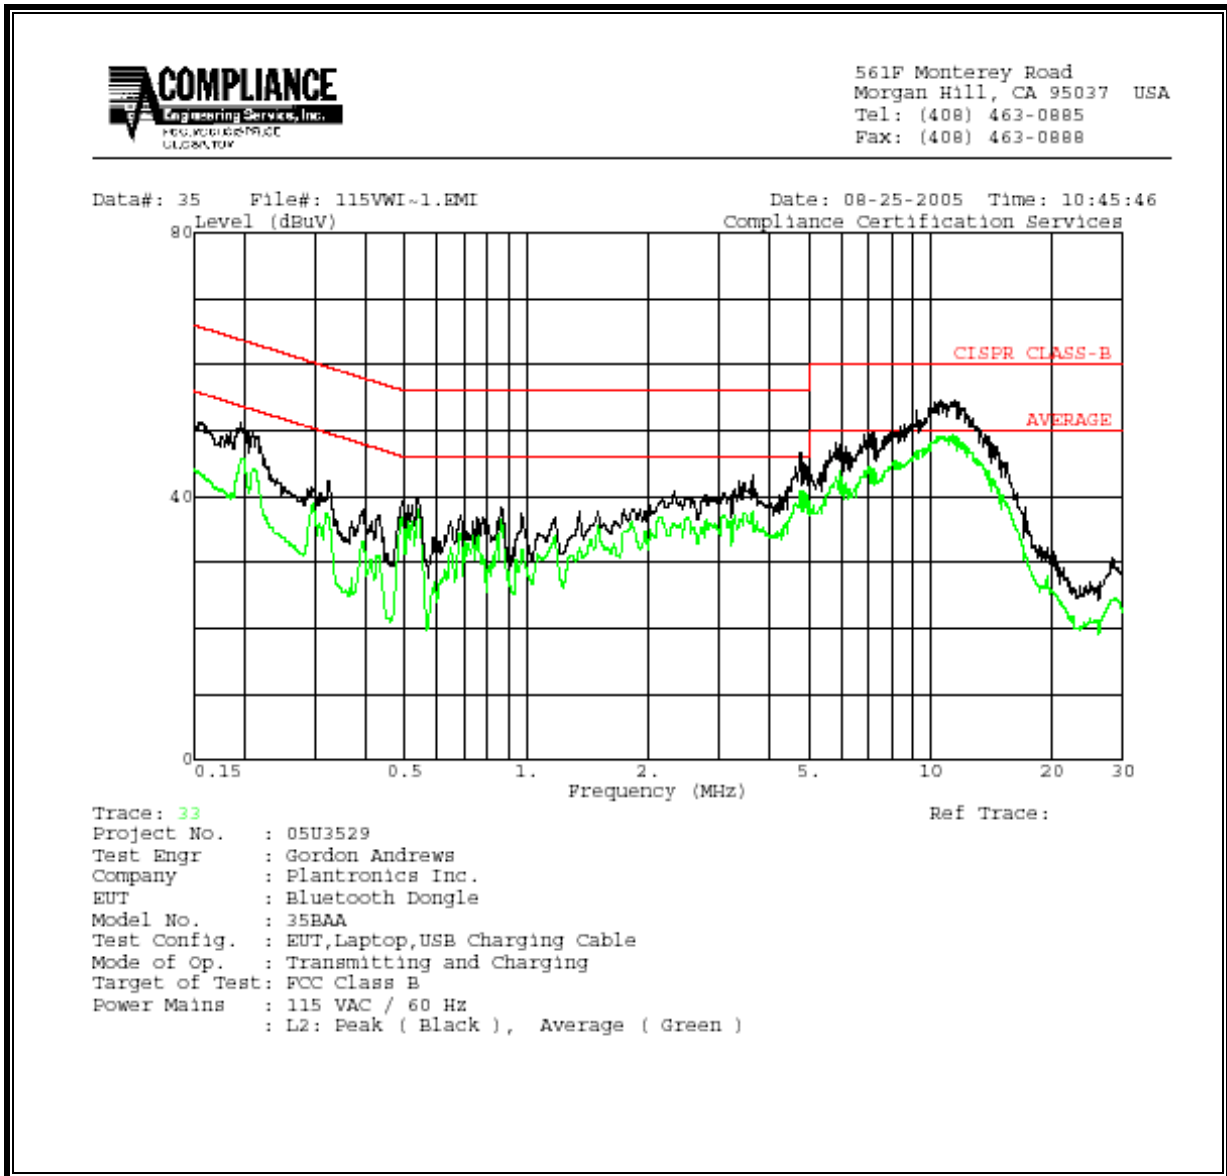

8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

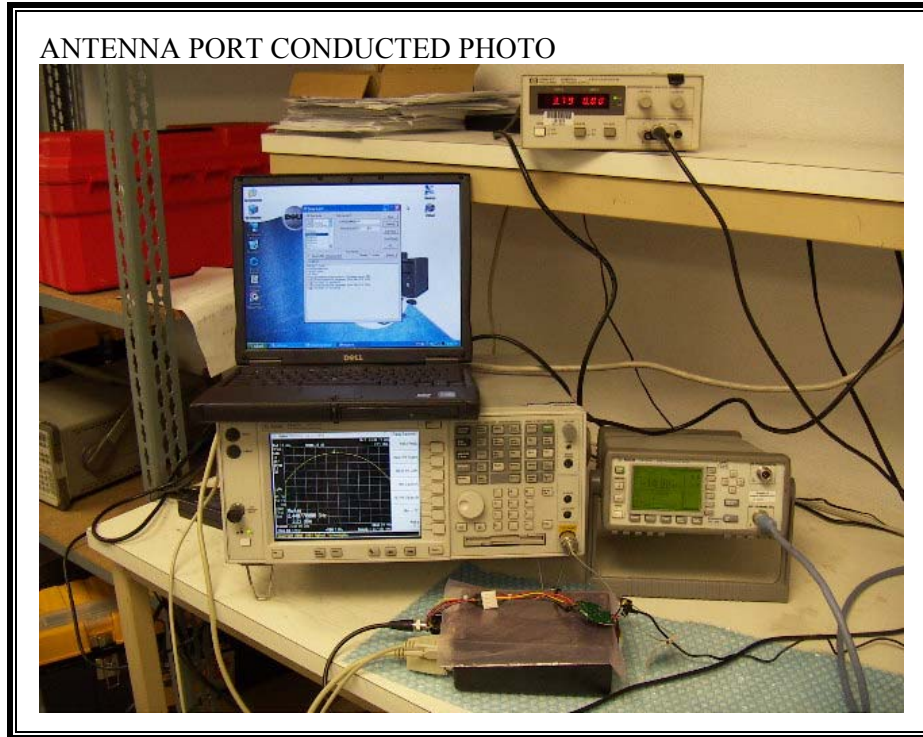

RADIATED RF MEASUREMENT SETUP – ABOVE 1 GHz





RADIATED RF MEASUREMENT SETUP – BELOW 1 GHz





POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP – without USB Charging Cable

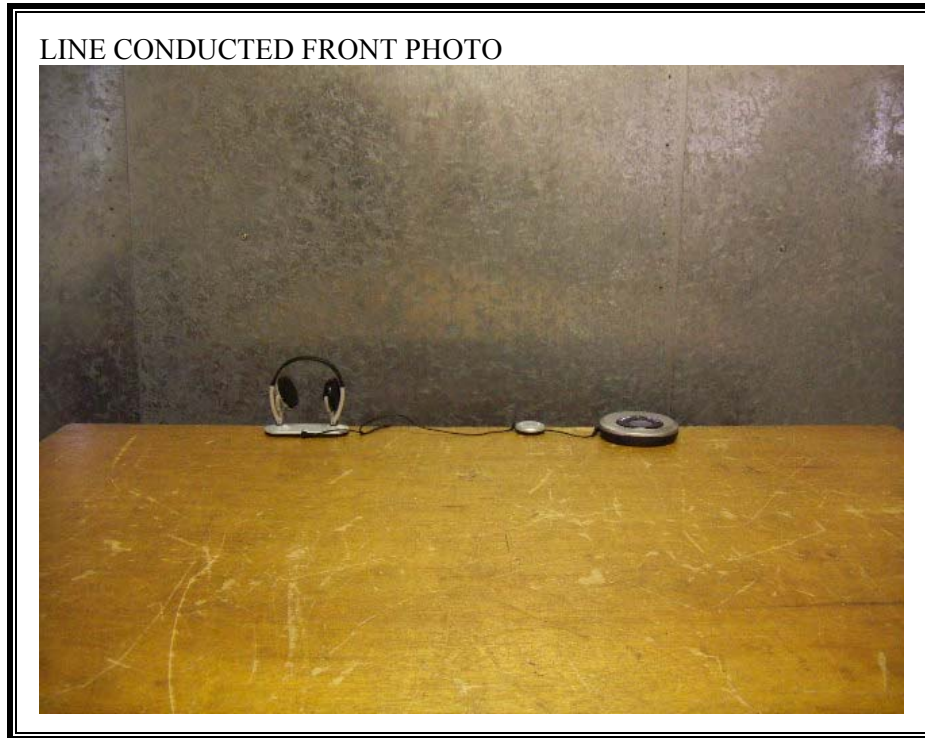

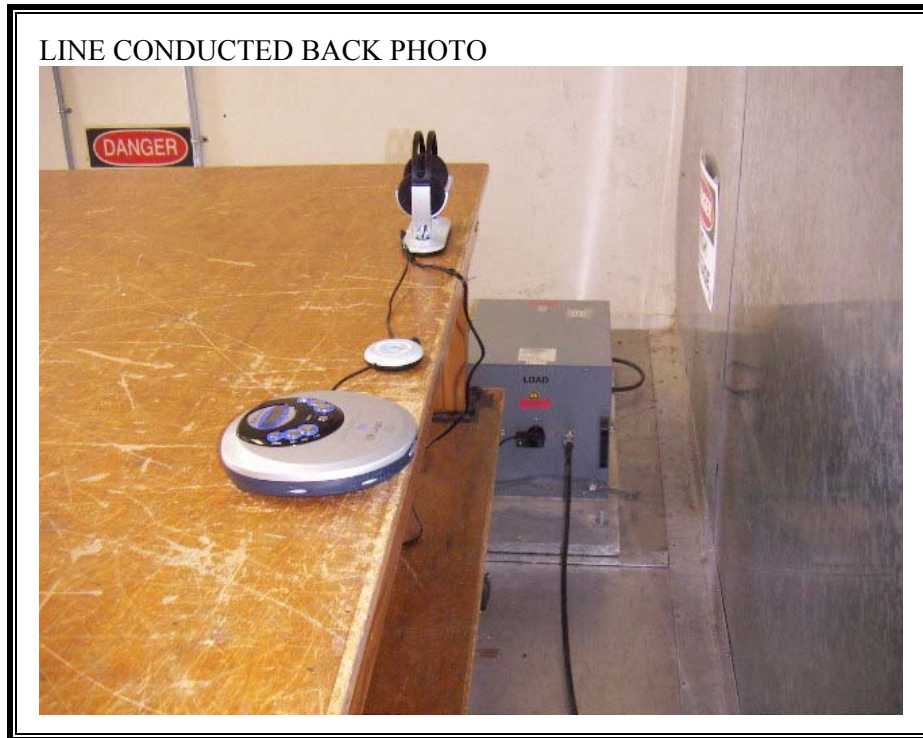

POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP – with USB Charging Cable



LINE CONDUCTED BACK PHOTO



END OF REPORT