



**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION  
TEST REPORT**

**FOR**

**900 MHZ CORDLESS HEADSET**

**MODEL NUMBER: CS50**

**BRAND NAME: PLANTRONICS**

**FCC ID: AL8CS50YYYY**

**REPORT NUMBER: 03U2166-1B**

**ISSUE DATE: AUGUST 11, 2003**

*Prepared for*  
**PLANTRONICS, INC.  
345 ENCINAL STREET  
SANTA CRUZ, CA 95060  
USA**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>3</b>
<b>2. EUT DESCRIPTION .....</b>	<b>4</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
4.1. <i>FACILITIES AND EQUIPMENT .....</i>	<i>5</i>
4.2. <i>TABLE OF ACCREDITATIONS AND LISTINGS .....</i>	<i>6</i>
<b>5. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
5.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>7</i>
5.2. <i>MEASUREMENT UNCERTAINTY .....</i>	<i>7</i>
5.3. <i>TEST AND MEASUREMENT EQUIPMENT .....</i>	<i>8</i>
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>9</b>
6.1. <i>SETUP OF THE HEADSET .....</i>	<i>9</i>
<b>7. APPLICABLE LIMITS AND TEST RESULTS .....</b>	<b>11</b>
7.1. <i>6 dB BANDWIDTH .....</i>	<i>11</i>
7.2. <i>99% BANDWIDTH .....</i>	<i>15</i>
7.3. <i>PEAK OUTPUT POWER .....</i>	<i>19</i>
7.4. <i>AVERAGE POWER .....</i>	<i>24</i>
7.5. <i>PEAK POWER SPECTRAL DENSITY .....</i>	<i>25</i>
7.6. <i>CONDUCTED SPURIOUS EMISSIONS .....</i>	<i>29</i>
7.7. <i>RADIATED EMISSIONS .....</i>	<i>36</i>
7.8. <i>POWERLINE CONDUCTED EMISSIONS .....</i>	<i>43</i>
<b>8. SETUP PHOTOS .....</b>	<b>44</b>

# 1. TEST RESULT CERTIFICATION

**COMPANY NAME:** PLANTRONICS, INC.  
345 ENCINAL STREET  
SANTA CRUZ, CA 95060, USA

**EUT DESCRIPTION:** 900 MHz Cordless Headset

**MODEL:** CS50

**DATE TESTED:** Aug.1 – Aug.8, 2003


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

Tested By:



MIKE HECKROTTE  
CHIEF ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

THANH NGUYEN  
EMC TECHNICIAN  
COMPLIANCE CERTIFICATION SERVICES

## 2. EUT DESCRIPTION

The EUT is the 900MHz Cordless Headset. The Remote Headset unit operates in frequency range from 902 to 928 MHz. The Remote Headset has 15.72dBm with antenna gain of 2.1dBi.

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/1992, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.







### 4. FACILITIES AND ACCREDITATION

#### 4.1. FACILITIES AND EQUIPMENT

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 4.2. TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 1300
Japan	VCCI	CISPR 22 Two OATS and one conducted Site	 R-1014, R-619, C-640
Norway	NEMKO	EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1	 ELA 117
Norway	NEMKO	EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC	 ELA-171
Taiwan	BSMI	CNS 13438	 SL2-IN-E-1012
Canada	Industry Canada	RSS210 Low Power Transmitter and Receiver	 IC2324 A,B,C, and F

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measurement instruments utilized to perform the tests documented in this report have been calibrated in accordance with the manufacturer's recommendations, and are traceable to national standards.

### 5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
Quasi-Peak Adaptor	HP	85650A	2521A01038	7/16/2004
SA Display Section 3	HP	85662A	2314A04793	7/16/2004
SA RF Section, 1.5 GHz	HP	85680A	2314A02604	11/26/2003
Preamplifier, 1300 MHz	HP	8447D	2944A06550	8/22/2003
Antenna, Log Periodic 200 ~ 1000 MHz	EMCO	3146	9107-3163	3/6/2004
Antenna, Biconical	Eaton	94455-1	1214	3/6/2004
EMI Test Receiver	R & S	ESHS 20	827129/006	7/18/2004
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	837990	9/6/2003
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	9/6/2003
Line Filter	Lindgren	LMF-3489	497	NCR
Spectrum Analyzer	Agilent	E4446A	US42070220	1/13/2004
Spectrum Analyzer	Agilent	E4440A	US41421507	5/8/2004
Power Meter	Agilent	E4416A	GB41291160	9/5/2003




## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1. SETUP OF THE HEADSET

The Headset is standalone device, no support equipment and no I/O cable connected.

**SETUP DIAGRAM HEADSET**



## 7. APPLICABLE LIMITS AND TEST RESULTS

### 7.1. 6 dB BANDWIDTH

#### LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.


#### RESULTS


No non-compliance noted:


Headset

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	906	1167	500	667
Middle	915	1167	500	667
High	924	1183	500	683

**6 DB BANDWIDTH HEADSET**

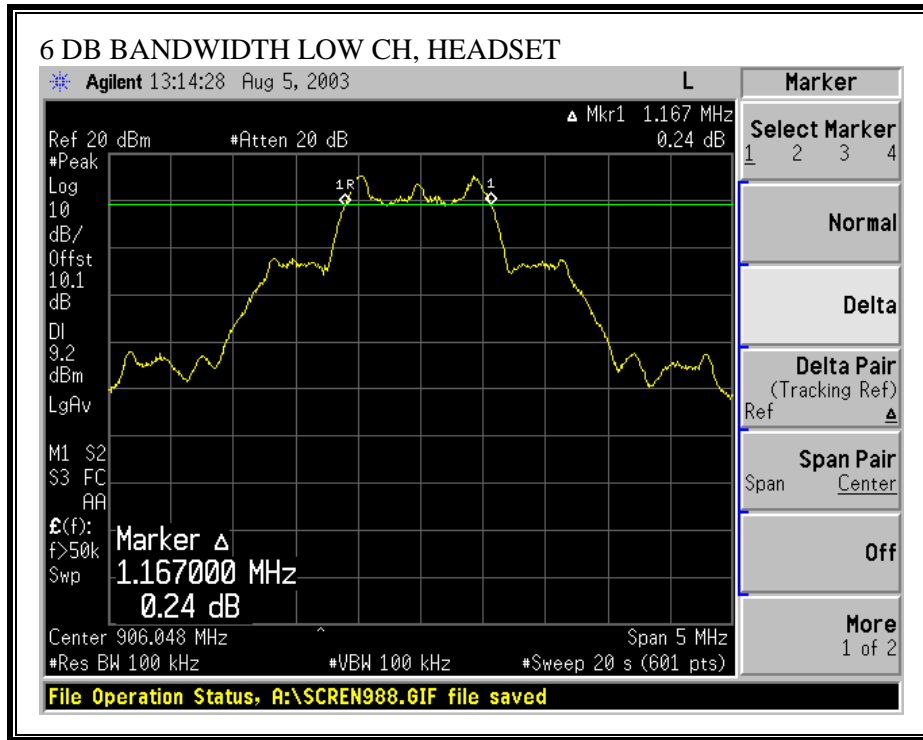

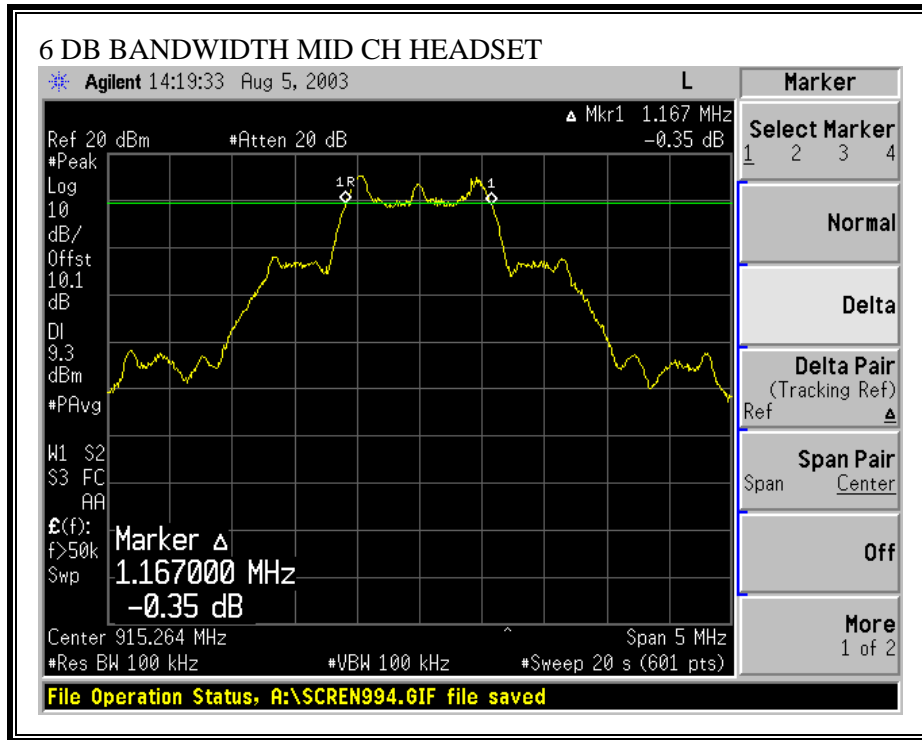

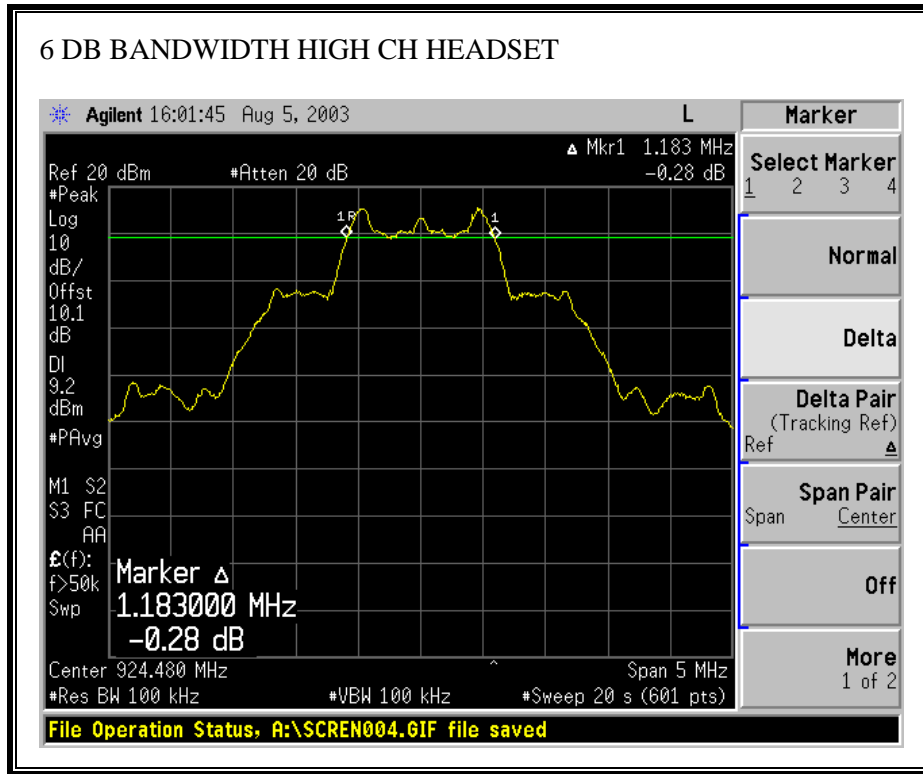

## 7.2. 99% BANDWIDTH

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


### RESULTS

No non-compliance noted:


#### HEADSET


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	906	2.2349
Middle	915	2.2332
High	924	2.2719

99% BANDWIDTH HEADSET

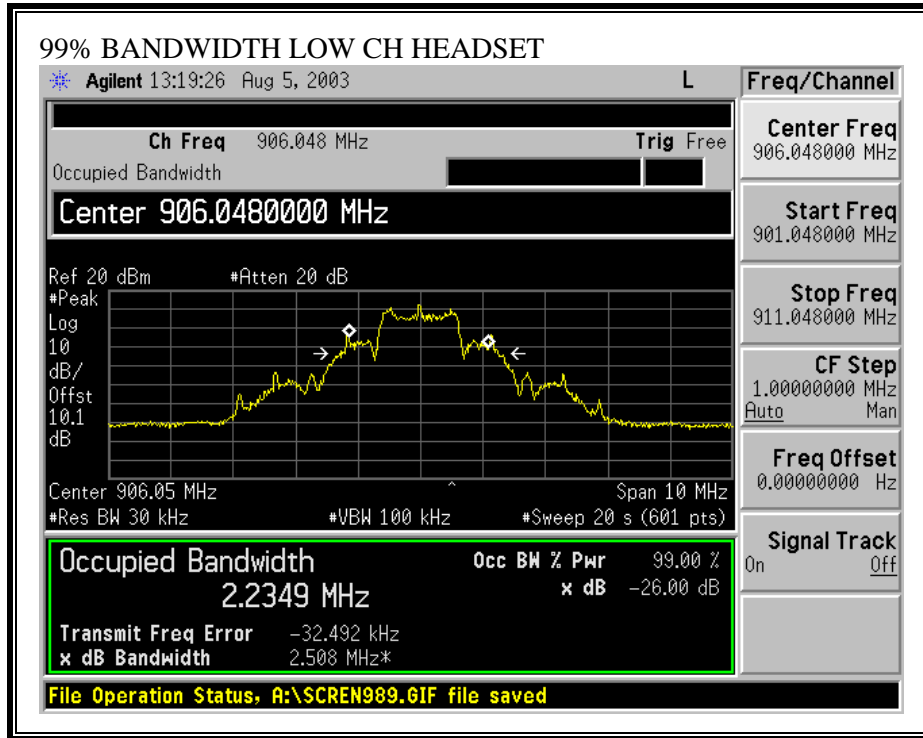



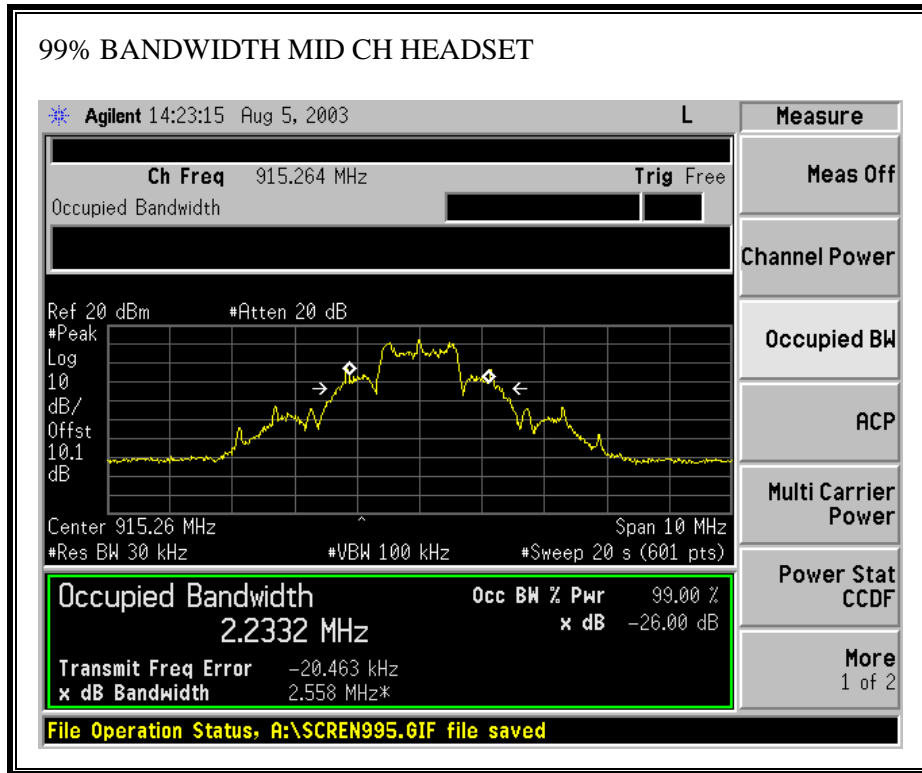

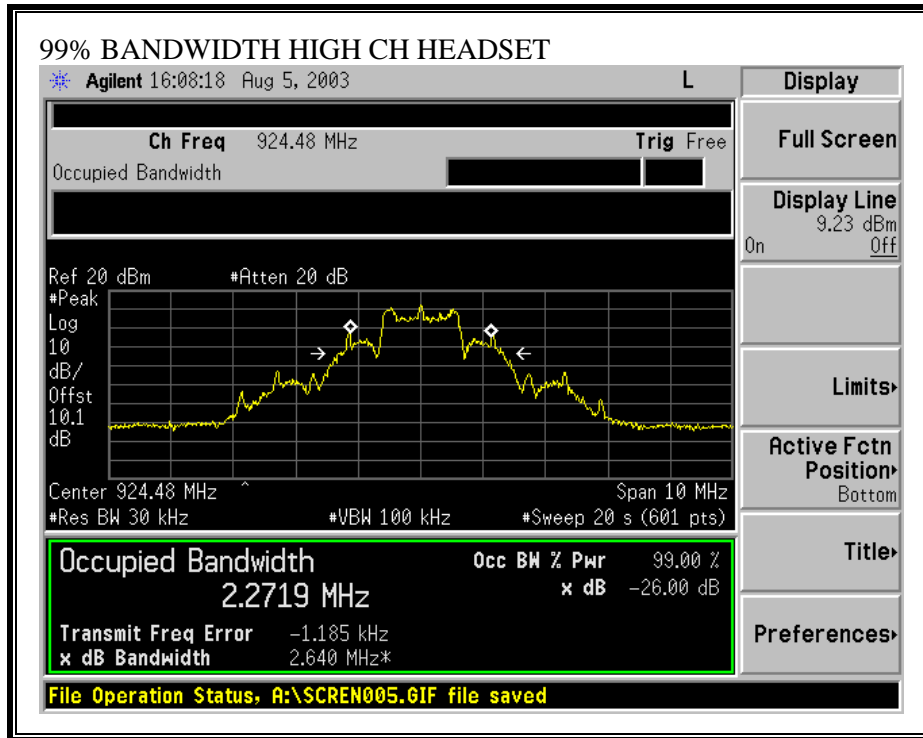

### **7.3. PEAK OUTPUT POWER**

#### **PEAK POWER LIMIT**

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is 2.1 dBi, therefore the limit is 30 dBm.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over the 99% bandwidth.


**RESULTS**


No non-compliance noted:


**HEADSET**

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	900	15.68	30	-14.32
Middle	915	15.72	30	-14.28
High	924	15.67	30	-14.33

**OUTPUT POWER HEADSET**

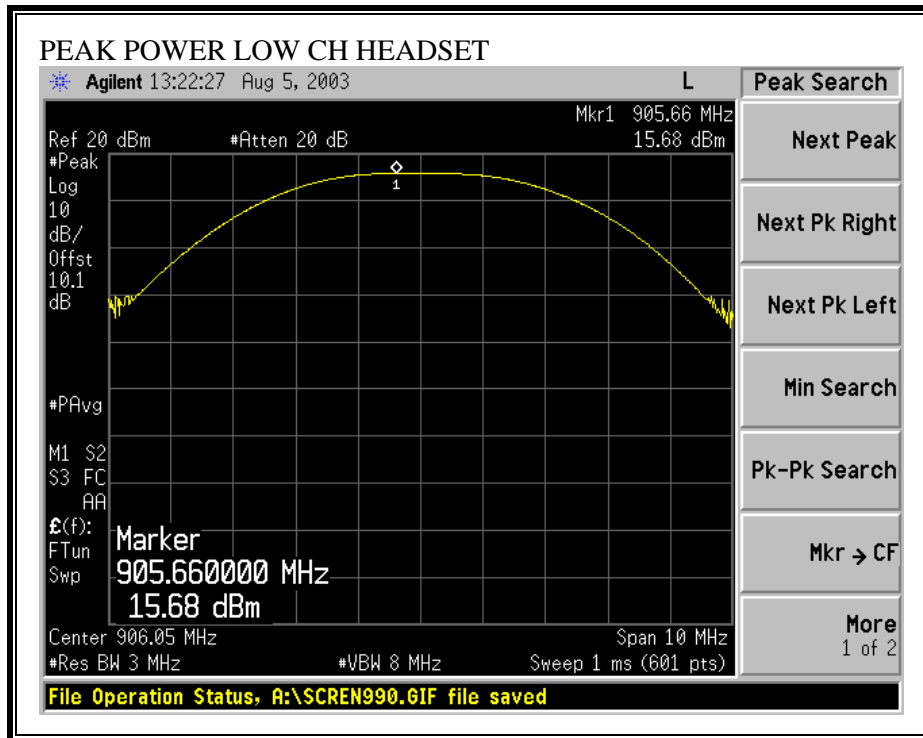

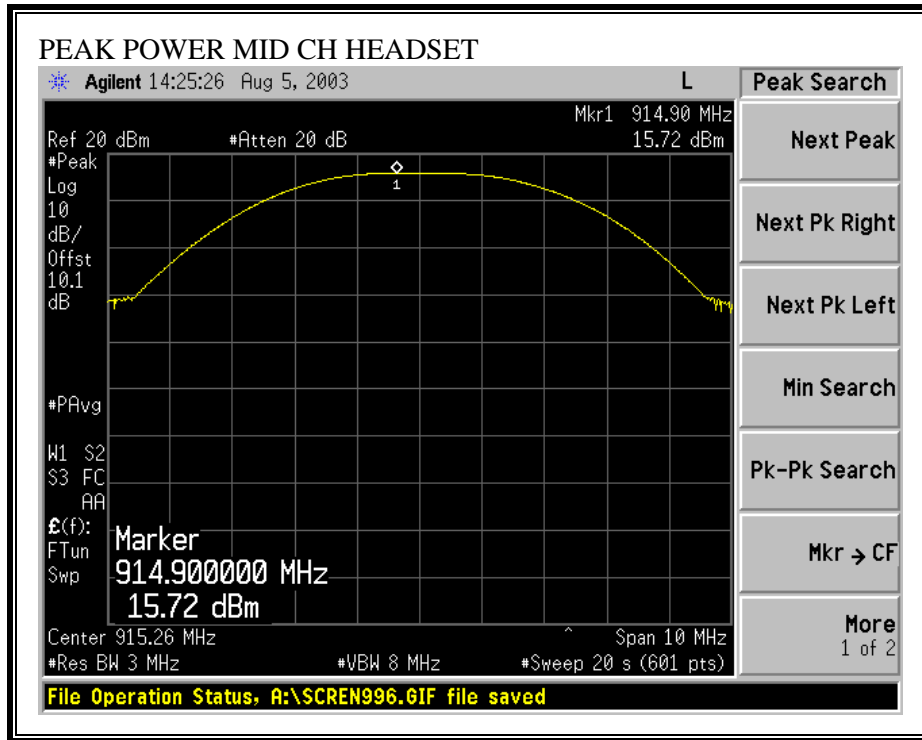

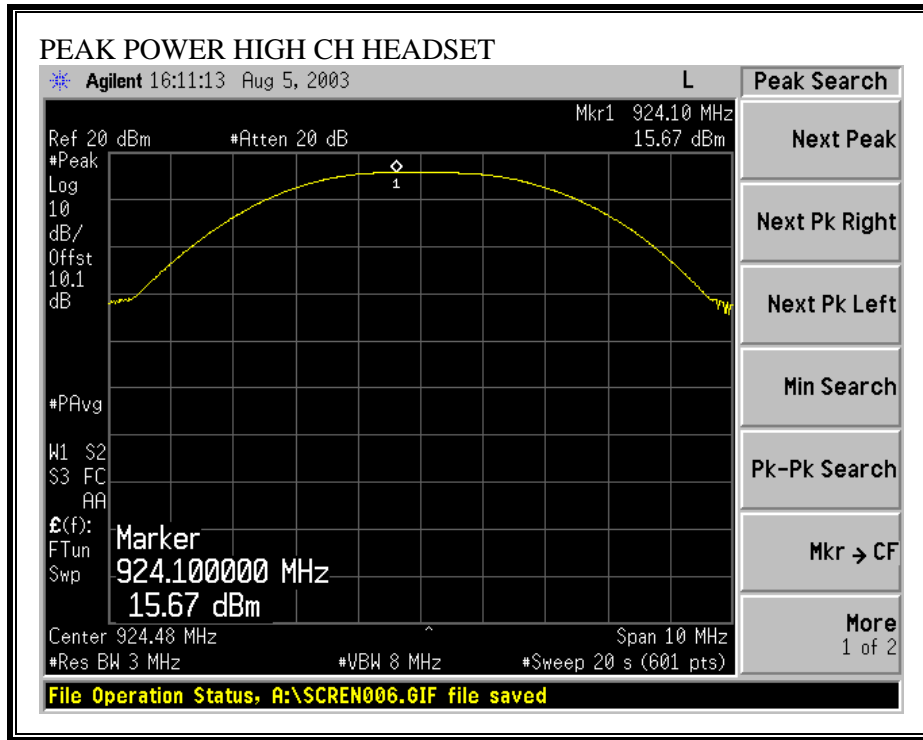

## 7.4. AVERAGE POWER

### AVERAGE POWER LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.1 dB (including 10 dB pad and .1dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### HEADSET

Channel	Frequency (MHz)	Average Power (dBm)
Low	906	1.30
Middle	915	1.36
High	924	1.30



## 7.5. PEAK POWER SPECTRAL DENSITY

### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.


### RESULTS

No non-compliance noted:


#### HEADSET

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	906	2.99	8	-5.01
Middle	915	1.98	8	-6.02
High	924	3.09	8	-4.91

**PEAK POWER SPECTRAL DENSITY HEADSET**

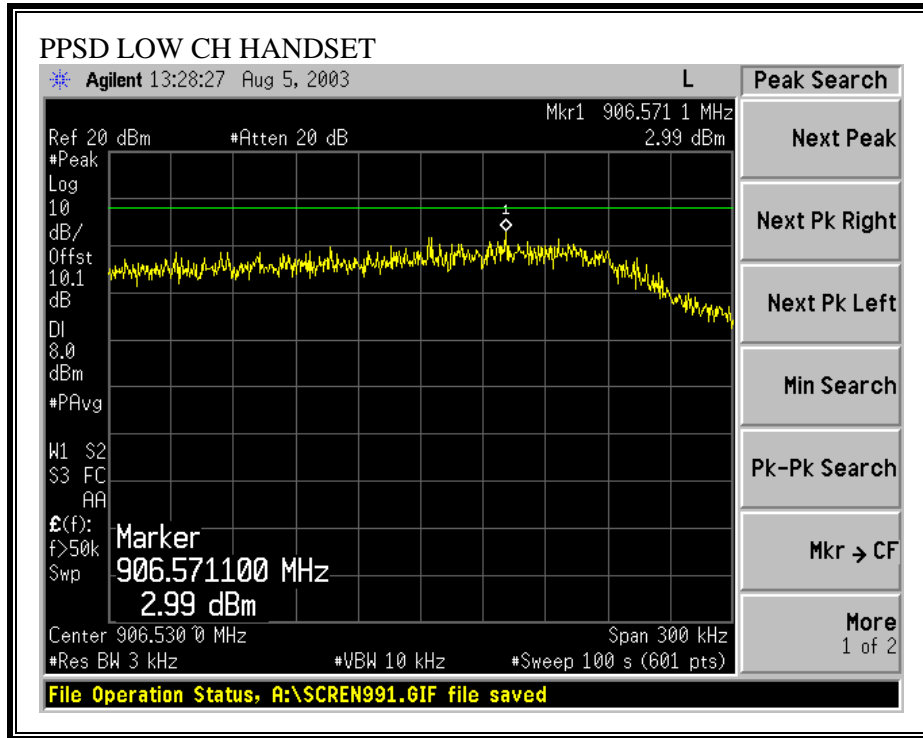



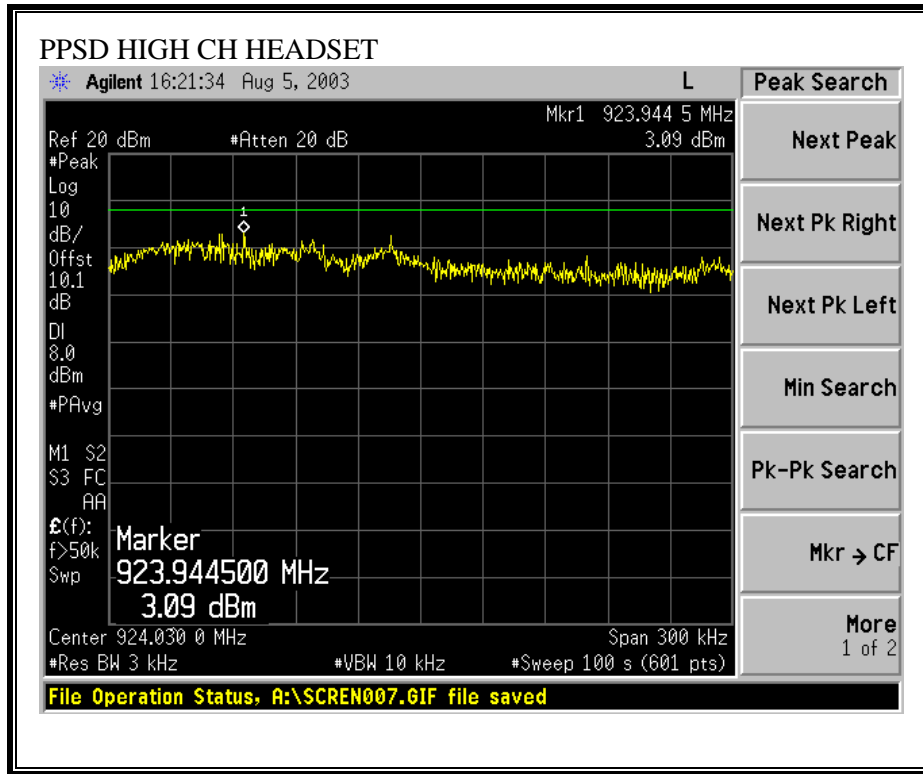

## 7.6. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


The spectrum from 30 MHz to 10 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### RESULTS


No non-compliance noted:

**SPURIOUS EMISSIONS, LOW CHANNEL, HEADSET**

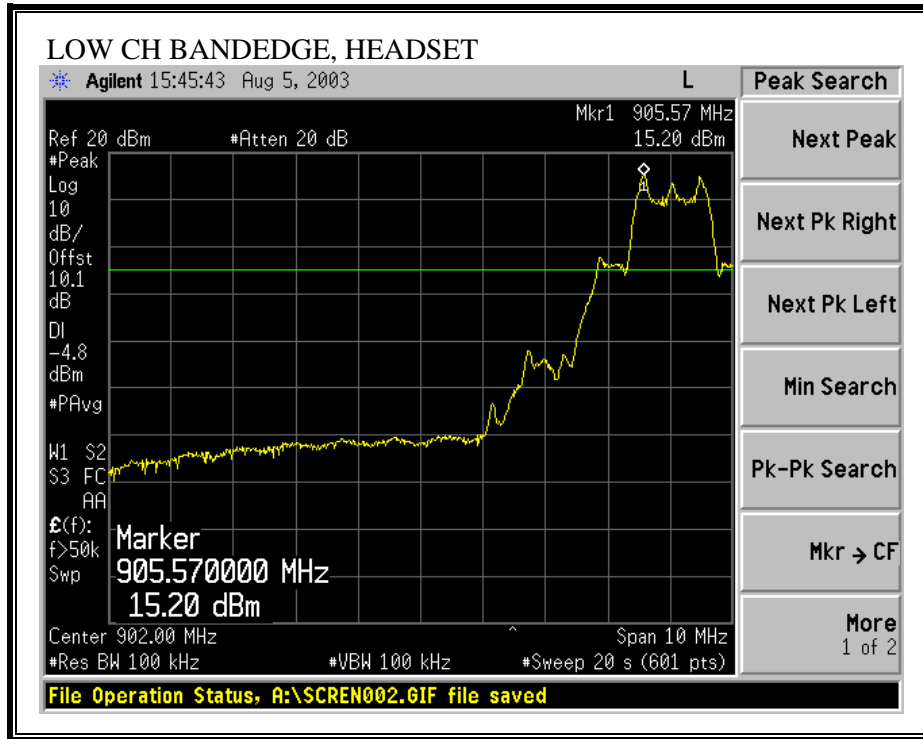


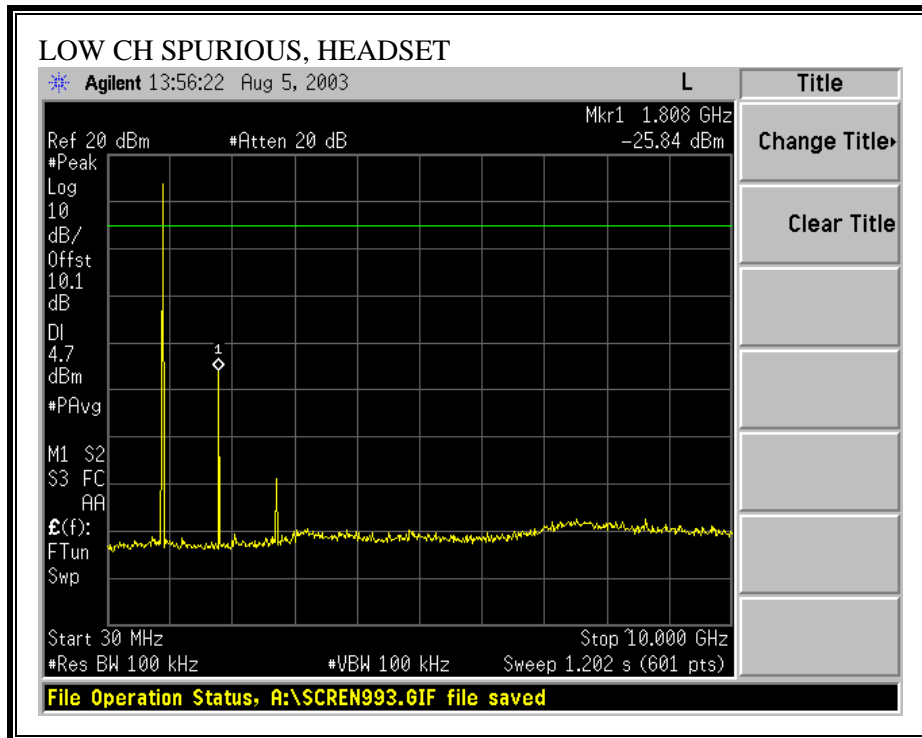


**SPURIOUS EMISSIONS, MID CHANNEL, HEADSET**

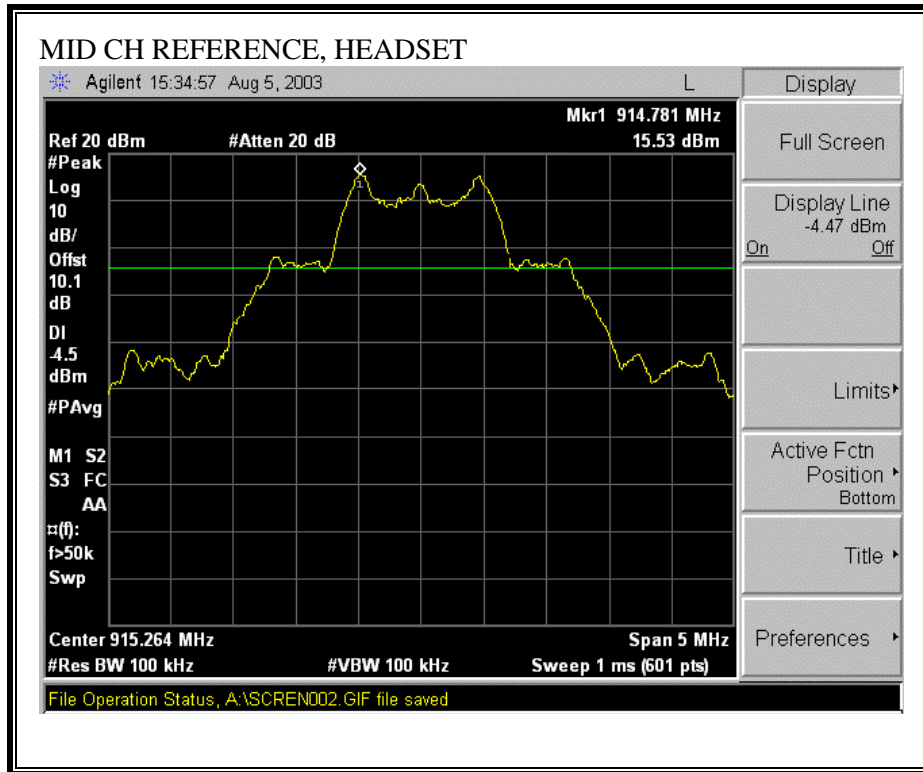




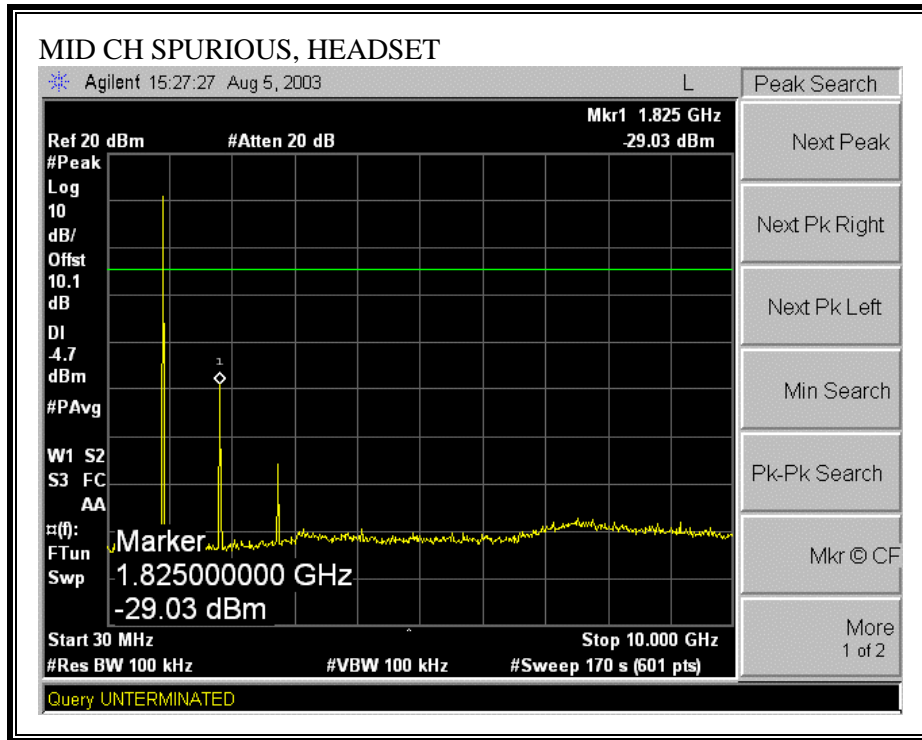

**SPURIOUS EMISSIONS, HIGH CHANNEL, HEADSET**

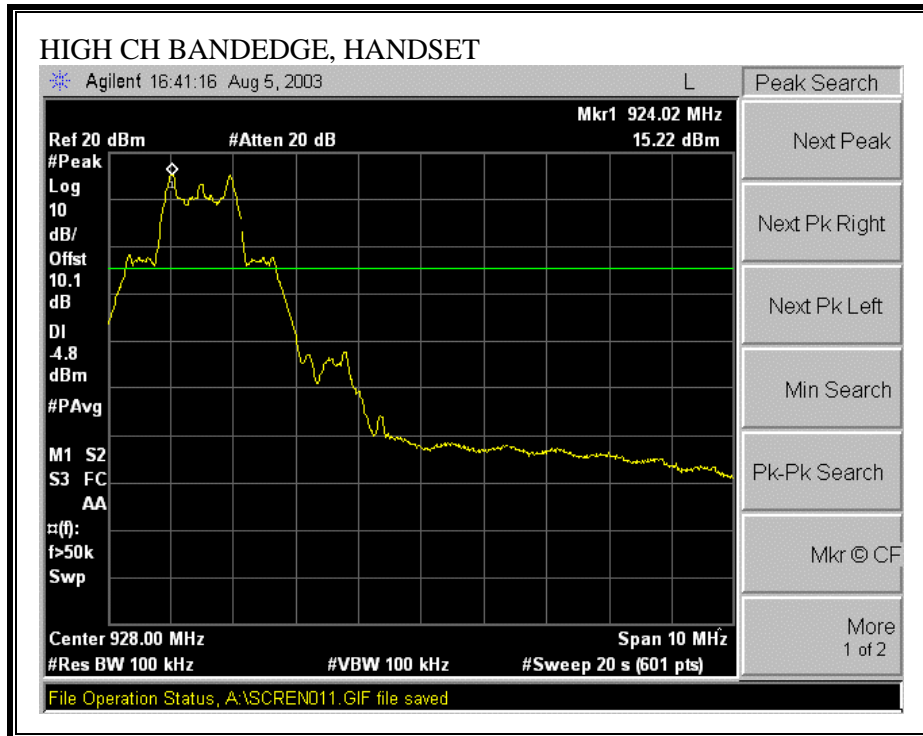

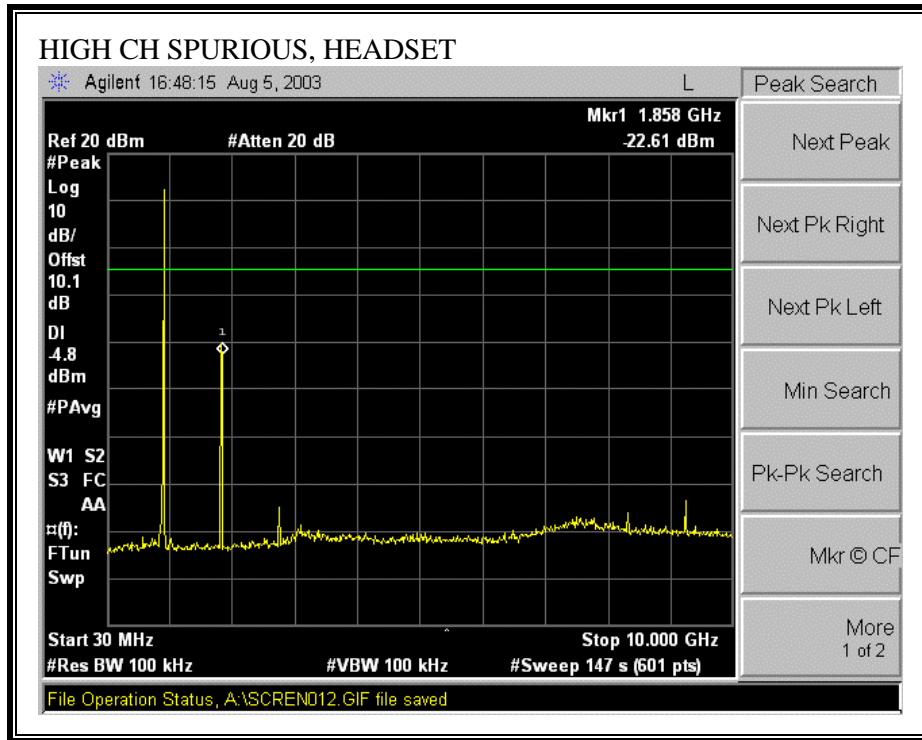

## 7.7. RADIATED EMISSIONS

### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 10 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## **RESULTS**

No non-compliance noted:

**HARMONICS AND SPURIOUS EMISSIONS HEADSET LOW CHANNEL**

08/04/03 **High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: THANH NGUYEN  
 Project #: 03U2166-1  
 Company: PLANTRONICS INC.  
 EUT Descr.: 900MHZ Headset & Adapter. HeadSet unit  
 EUT M/N: CS50  
 Test Target: FCC Part 15 & RSS 210.  
 Mode Oper: TX Mode

**Test Equipment:**

EMCO Horn 1-18GHz T59; S/N: 3245 @3m	Pre-amplifier 1-26GHz T87 Miteq924342	Spectrum Analyzer E4407B ESA	Horn > 18GHz
---	--	---------------------------------	--------------

Hi Frequency Cables:  
 (2 ft)  (2 ~ 3 ft)  (4 ~ 6 ft)  (12 ft)

**Peak Measurements:** 1 MHz Resolution Bandwidth  
 1MHz Video Bandwidth  
**Average Measurements:** 1 MHz Resolution Bandwidth  
 10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
Tx at LOW Channel 906.048MHz															
Harmonics Emissions .															
1.812	9.8	80.1	56.5	27.5	1.5	-43.3	0.0	1.0	66.8	43.2	74.0	54.0	-7.2	-10.8	V
2.718	9.8	53.3	36.2	30.1	2.2	-43.2	0.0	1.0	43.4	26.3	74.0	54.0	-30.6	-27.7	V
3.624	9.8	54.6	35.2	31.9	2.7	-43.7	0.0	1.0	46.5	27.1	74.0	54.0	-27.5	-26.9	V
4.530	9.8	51.8	32.2	32.0	3.0	-44.4	0.0	1.0	43.4	23.8	74.0	54.0	-30.6	-30.2	V
5.436	9.8	56.3	36.7	33.7	3.4	-44.8	0.0	1.0	49.5	29.9	74.0	54.0	-24.5	-24.1	V
6.342	9.8	60.2	36.5	34.7	3.8	-44.8	0.0	1.0	54.8	31.2	74.0	54.0	-19.2	-22.8	V
1.812	9.8	79.3	56.7	27.5	1.5	-43.3	0.0	1.0	66.0	43.4	74.0	54.0	-8.0	-10.6	H
2.718	9.8	51.2	33.2	30.1	2.2	-43.2	0.0	1.0	41.3	23.3	74.0	54.0	-32.7	-30.7	H
3.624	9.8	54.4	31.2	31.9	2.7	-43.7	0.0	1.0	46.3	23.1	74.0	54.0	-27.7	-30.9	H
4.530	9.8	54.2	33.1	32.0	3.0	-44.4	0.0	1.0	45.8	24.7	74.0	54.0	-28.2	-29.3	H
5.436	9.8	57.5	34.2	33.7	3.4	-44.8	0.0	1.0	50.7	27.4	74.0	54.0	-23.3	-26.6	H
6.342	9.8	59.1	35.1	34.7	3.8	-44.8	0.0	1.0	53.7	29.7	74.0	54.0	-20.3	-24.3	H
No more spurious emissions up to 10th harmonic.															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

**HARMONICS AND SPURIOUS EMISSIONS HEADSET MID CHANNEL**

08/04/03 <b>High Frequency Measurement</b> Compliance Certification Services, Morgan Hill Open Field Site  Test Engr: THANH NGUYEN Project #: 03U2166-1 Company: PLANTRONICS INC. EUT Descrip.: 900MHZ Headset & Adapter. HeadSet unit EUT M/N: CS50 Test Target: FCC Part 15 & RSS 210. Mode Oper: TX Mode  <b>Test Equipment:</b> <table style="width:100%; border: none;"> <tr> <td style="border: 1px solid black; padding: 2px;">EMCO Horn 1-18GHz</td> <td style="border: 1px solid black; padding: 2px;">Pre-amplifier 1-26GHz</td> <td style="border: 1px solid black; padding: 2px;">Spectrum Analyzer</td> <td style="border: 1px solid black; padding: 2px;">Horn &gt; 18GHz</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">T59; S/N: 3245 @3m</td> <td style="border: 1px solid black; padding: 2px;">T87 Miteq 924342</td> <td style="border: 1px solid black; padding: 2px;">E4407B ESA</td> <td style="border: 1px solid black; padding: 2px;"></td> </tr> </table> Hi Frequency Cables <input type="checkbox"/> (2 ft) <input checked="" type="checkbox"/> (2 ~ 3 ft) <input type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)  <table style="width:100%; border: none;"> <tr> <td style="width: 50%;"><b>Peak Measurements:</b> 1 MHz Resolution Bandwidth 1MHz Video Bandwidth</td> <td style="width: 50%;"><b>Average Measurements:</b> 1 MHz Resolution Bandwidth 10Hz Video Bandwidth</td> </tr> </table>																EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Spectrum Analyzer	Horn > 18GHz	T59; S/N: 3245 @3m	T87 Miteq 924342	E4407B ESA		<b>Peak Measurements:</b> 1 MHz Resolution Bandwidth 1MHz Video Bandwidth	<b>Average Measurements:</b> 1 MHz Resolution Bandwidth 10Hz Video Bandwidth
EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Spectrum Analyzer	Horn > 18GHz																						
T59; S/N: 3245 @3m	T87 Miteq 924342	E4407B ESA																							
<b>Peak Measurements:</b> 1 MHz Resolution Bandwidth 1MHz Video Bandwidth	<b>Average Measurements:</b> 1 MHz Resolution Bandwidth 10Hz Video Bandwidth																								
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes										
Tx at MID Channel 915.264MHz																									
Harmonics Emissions .																									
1.831	9.8	83.0	59.2	27.6	1.6	-43.3	0.0	1.0	69.9	46.0	74.0	54.0	-4.1	-8.0	V										
2.745	9.8	51.2	32.0	30.2	2.2	-43.2	0.0	1.0	41.4	22.2	74.0	54.0	-32.6	-31.8	V										
3.659	9.8	54.4	30.2	32.0	2.7	-43.7	0.0	1.0	46.3	22.1	74.0	54.0	-27.7	-31.9	V										
3.660	9.8	51.5	30.2	32.0	2.7	-43.7	0.0	1.0	43.4	22.1	74.0	54.0	-30.6	-31.9	V										
4.574	9.8	59.3	36.6	32.9	3.0	-44.5	0.0	1.0	51.8	29.1	74.0	54.0	-22.2	-24.9	V										
4.578	9.8	60.0	36.6	32.9	3.0	-44.5	0.0	1.0	52.5	29.1	74.0	54.0	-21.5	-24.9	V										
5.489	9.8	53.8	38.5	33.7	3.4	-44.8	0.0	1.0	47.1	31.8	74.0	54.0	-26.9	-22.2	V										
5.494	9.8	57.9	38.5	33.7	3.4	-44.8	0.0	1.0	51.2	31.8	74.0	54.0	-22.8	-22.2	V										
6.410	9.8	52.4	37.8	34.8	3.8	-44.8	0.0	1.0	47.1	32.5	74.0	54.0	-26.9	-21.5	V										
7.320	9.8	55.3	38.5	36.0	4.1	-44.5	0.0	1.0	51.9	35.0	74.0	54.0	-22.1	-19.0	V										
1.831	9.8	80.1	56.3	27.6	1.6	-43.3	0.0	1.0	66.9	43.1	74.0	54.0	-7.1	-10.9	H										
2.745	9.8	59.4	32.0	30.2	2.2	-43.2	0.0	1.0	49.6	22.2	74.0	54.0	-24.4	-31.8	H										
3.659	9.8	60.8	37.8	32.0	2.7	-43.7	0.0	1.0	52.7	29.7	74.0	54.0	-21.3	-24.3	H										
3.660	9.8	61.3	37.8	32.0	2.7	-43.7	0.0	1.0	53.2	29.7	74.0	54.0	-20.8	-24.3	H										
4.574	9.8	59.3	36.6	32.9	3.0	-44.5	0.0	1.0	51.8	29.1	74.0	54.0	-22.2	-24.9	H										
4.578	9.8	60.0	36.6	32.9	3.0	-44.5	0.0	1.0	52.5	29.1	74.0	54.0	-21.5	-24.9	H										
5.489	9.8	59.2	38.5	33.7	3.4	-44.8	0.0	1.0	52.5	31.8	74.0	54.0	-21.5	-22.2	H										
5.494	9.8	59.8	38.5	33.7	3.4	-44.8	0.0	1.0	53.0	31.8	74.0	54.0	-21.0	-22.2	H										
6.410	9.8	53.0	37.8	34.8	3.8	-44.8	0.0	1.0	47.7	32.5	74.0	54.0	-26.3	-21.5	H										
7.320	9.8	52.0	38.5	36.0	4.1	-44.5	0.0	1.0	48.6	35.0	74.0	54.0	-25.4	-19.0	H										
No more spurious emissions up to 10th harmonic																									
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit												
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit												
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit												
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit												
CL	Cable Loss					HPF	High Pass Filter																		



**HARMONICS AND SPURIOUS EMISSIONS HEADSET HIGH CHANNEL**

08/04/03 <b>High Frequency Measurement</b> Compliance Certification Services, Morgan Hill Open Field Site  Test Engr: THANH NGUYEN Project #: 03U2166-1 Company: PLANTRONICS INC. EUT Descr.: 900MHZ Headset & Adapter. HeadSet unit EUT M/N: CS50 Test Target: FCC Part 15 & RSS 210. Mode Oper: TX Mode  <b>Test Equipment:</b> <table style="width:100%; border: none;"> <tr> <td style="border: 1px solid black; padding: 2px;">EMCO Horn 1-18GHz</td> <td style="border: 1px solid black; padding: 2px;">Pre-amplifier 1-26GHz</td> <td style="border: 1px solid black; padding: 2px;">Spectrum Analyzer</td> <td style="border: 1px solid black; padding: 2px;">Horn &gt; 18GHz</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">T59; S/N: 3245 @3m</td> <td style="border: 1px solid black; padding: 2px;">T87 Miteq 924342</td> <td style="border: 1px solid black; padding: 2px;">E4407B ESA</td> <td style="border: 1px solid black; padding: 2px;"></td> </tr> </table> <p>Hi Frequency Cables: <input type="checkbox"/> (2 ft) <input checked="" type="checkbox"/> (2 ~ 3 ft) <input type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)</p> <p><b>Peak Measurements:</b> 1 MHz Resolution Bandwidth 1MHz Video Bandwidth  <b>Average Measurements:</b> 1 MHz Resolution Bandwidth 10Hz Video Bandwidth</p>																EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Spectrum Analyzer	Horn > 18GHz	T59; S/N: 3245 @3m	T87 Miteq 924342	E4407B ESA	
EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Spectrum Analyzer	Horn > 18GHz																				
T59; S/N: 3245 @3m	T87 Miteq 924342	E4407B ESA																					
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes								
Tx at HIGH Channel 924.48MHz																							
Harmonics Emissions .																							
1.849	9.8	80.1	54.3	28.5	1.6	-43.3	0.0	1.0	67.8	42.0	74.0	54.0	-6.2	-12.0	V								
2.773	9.8	53.3	37.5	31.4	2.2	-43.2	0.0	1.0	44.7	28.9	74.0	54.0	-29.3	-25.1	V								
3.698	9.8	54.6	38.7	32.3	2.7	-43.7	0.0	1.0	46.8	30.9	74.0	54.0	-27.2	-23.1	V								
4.622	9.8	51.8	36.2	32.0	3.1	-44.5	0.0	1.0	43.3	27.7	74.0	54.0	-30.7	-26.3	V								
5.546	9.8	56.3	36.7	33.6	3.4	-44.8	0.0	1.0	49.5	29.8	74.0	54.0	-24.5	-24.2	V								
6.471	9.8	60.2	37.8	36.2	3.8	-44.8	0.0	1.0	56.4	34.0	74.0	54.0	-17.6	-20.0	V								
1.849	9.8	79.3	55.4	27.4	1.6	-43.3	0.0	1.0	65.9	42.0	74.0	54.0	-8.1	-12.0	H								
2.773	9.8	51.2	38.2	34.0	2.2	-43.2	0.0	1.0	45.2	32.2	74.0	54.0	-28.8	-21.8	H								
3.698	9.8	54.4	37.3	32.6	2.7	-43.7	0.0	1.0	46.9	29.8	74.0	54.0	-27.1	-24.2	H								
4.622	9.8	54.2	35.1	34.3	3.1	-44.5	0.0	1.0	48.0	28.9	74.0	54.0	-26.0	-25.1	H								
5.546	9.8	57.5	34.2	33.8	3.4	-44.8	0.0	1.0	50.9	27.6	74.0	54.0	-23.1	-26.4	H								
6.471	9.8	59.1	36.4	35.3	3.8	-44.8	0.0	1.0	54.4	31.7	74.0	54.0	-19.6	-22.3	H								
No more spurious emissions up to 10th harmonic.																							
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit										
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit										
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit										
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit										
CL	Cable Loss					HPF	High Pass Filter																

**SPURIOUS EMISSIONS 30 TO 1000 MHz HEADSET**



FCC, VCCI, CISPR, CE, AUSTEL, NZ  
 UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001  
 PHONE: (408) 463-0885 FAX: (408) 463-0888

*Project #:* 03U2166-1  
*Report #:* 030801C02  
*Date & Time:* 08/01/03 1:45 PM  
*Test Engr:* Frank Ibrahim

*Company:* Plantronics, Inc.  
*EUT Description:* 900MHz Cordless Telephone Handset Adapter: Remote Unit, model CS50  
*Test Configuration:* Stand Alone EUT  
*Type of Test:* FCC Class B  
*Mode of Operation:* TX ON at mid channel

[<< Main Sheet](#)


Freq. (MHz)	Reading (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
980.00	42.50	23.73	6.04	27.08	45.18	54.00	-8.82	3mH	0.00	1.00	P
612.00	41.30	18.70	4.61	27.81	36.80	46.00	-9.20	3mH	0.00	1.00	P
610.00	39.60	18.64	4.60	27.80	35.04	46.00	-10.96	3mV	0.00	1.00	P
980.00	37.80	23.73	6.04	27.08	40.48	54.00	-13.52	3mV	0.00	1.00	P
305.00	37.90	14.56	3.03	26.43	29.06	46.00	-16.94	3mH	0.00	1.00	P
250.00	36.80	11.59	2.71	26.43	24.67	46.00	-21.33	3mV	0.00	1.00	P
6 Worst Data											

## **7.8. POWERLINE CONDUCTED EMISSIONS**


Not applicable. The Headset is standalone device.


## 8. SETUP PHOTOS

### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

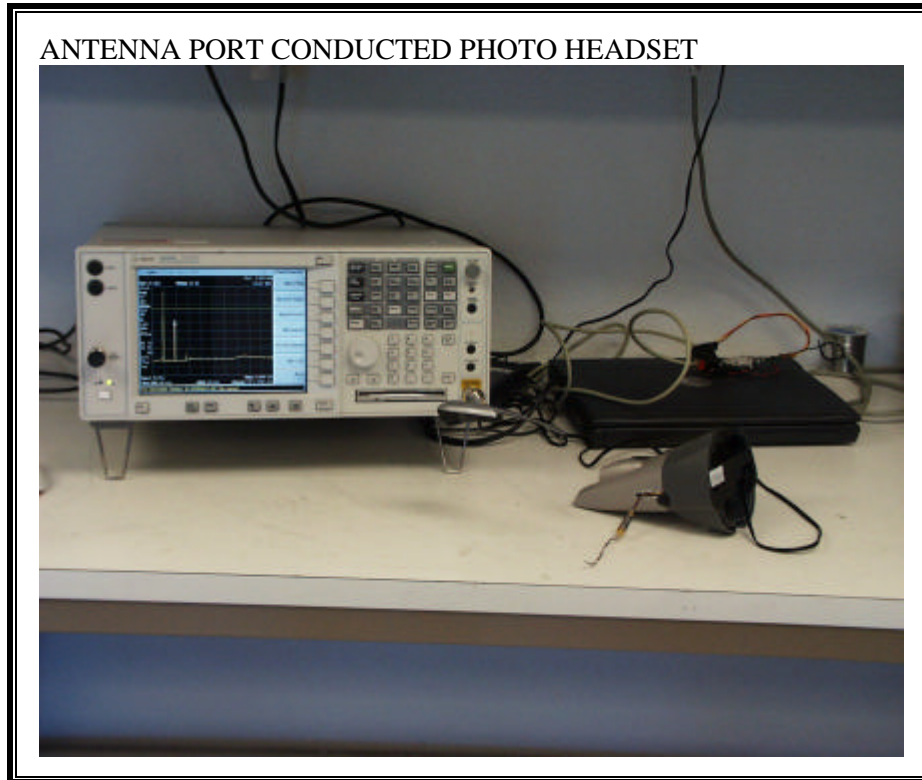

**RADIATED RF MEASUREMENT SETUP**

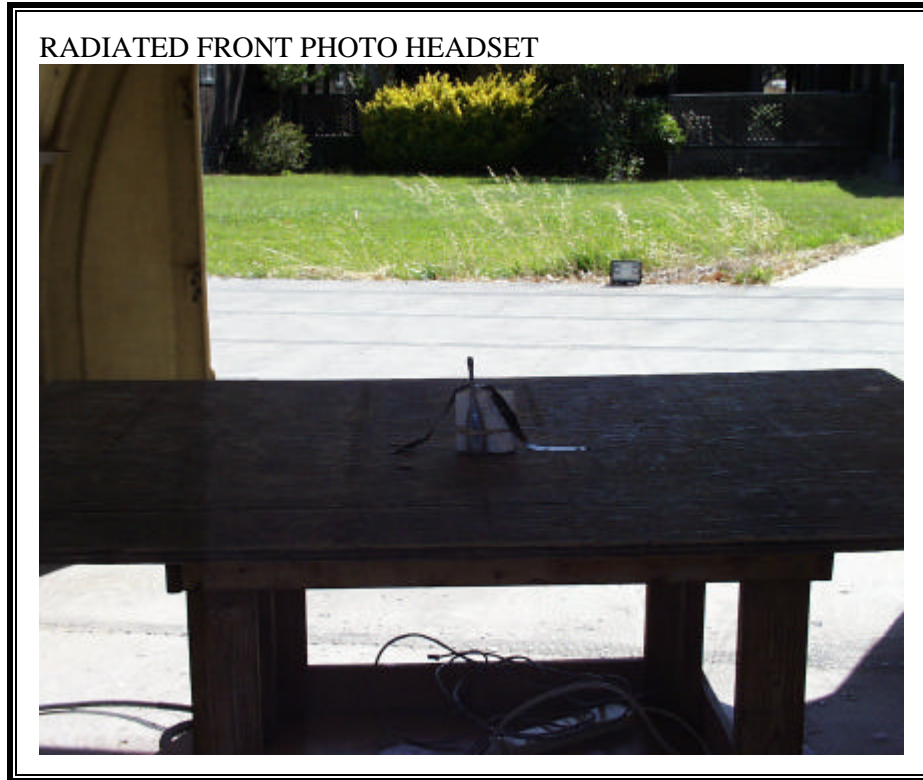

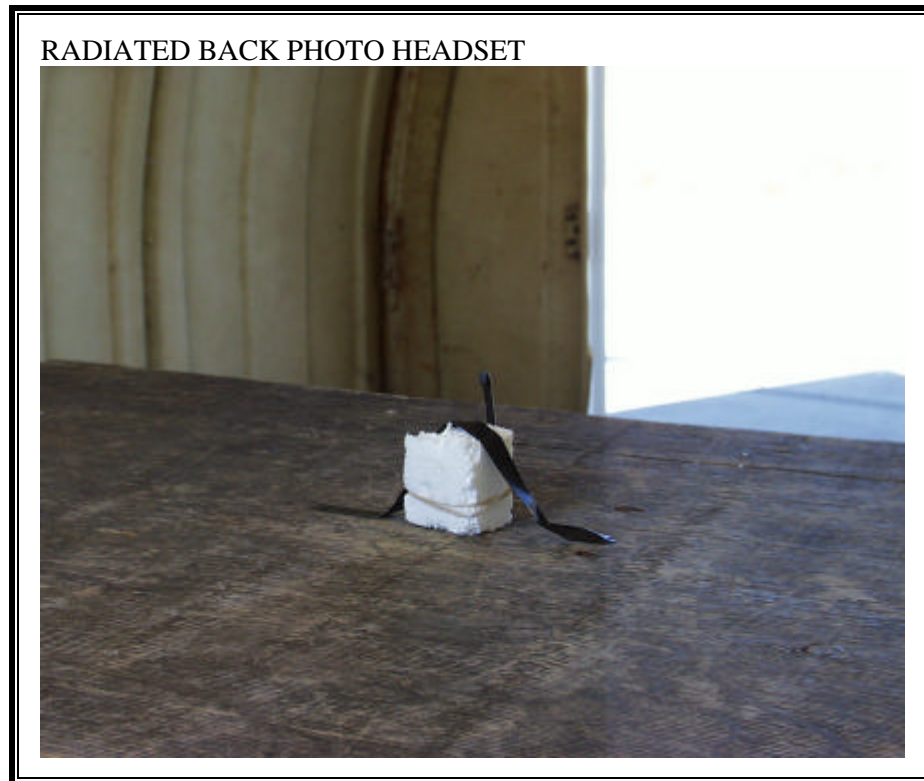

**END OF REPORT**