


PAGE NO.

1 of 43.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

TEST REPORT

- a)
- b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85224
- c) Report Number: d9890040
- d) Client: Kenwood Communications Corporation
P.O. Box 22745
Long Beach, CA 90801-5745
- e) Identification: TK-890
FCC ID: ALH22943110
Description: UHF FM Mobile Transceiver
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: September 24, 1998
EUT Received:
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by: 
Morton Flom, P. Eng.
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO.

2 of 43.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

22, 74, 90

Sub-part2.983(a): NAME AND ADDRESS OF APPLICANT:Kenwood Communications Corporation
2201 E. Dominguez St
P.O. Box 22745
Long Beach, CA 90801-5745VENDOR:Kenwood Communications Corporation
P.O. Box 22745
Long Beach, CA 90801-57452.983(b): FCC ID: ALH22943110MODEL NO: TK-8902.983(c): QUANTITY PRODUCTION PLANNED.2.983(d): TECHNICAL DESCRIPTION: SEE ATTACHED EXHIBITS(1): TYPE OF EMISSION: 16K0F3E, 11K0F3E(2): FREQUENCY RANGE, MHz: 450 to 490(3): POWER RATING, Watts: 5 to 45
Switchable Variable N/A(4): MAXIMUM POWER RATING, Watts: 500

PAGE NO.

3 of 43.

2.983(d)

(5): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE, INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
 COLLECTOR VOLTAGE, Vdc = per manual
 SUPPLY VOLTAGE, Vdc = 13.6

(6): FUNCTION OF ACTIVE CIRCUIT DEVICES:

PLEASE SEE ATTACHED EXHIBITS

(7): CIRCUIT DIAGRAM:

PLEASE SEE ATTACHED EXHIBITS

(8): MANUAL:

PLEASE SEE ATTACHED EXHIBITS

(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(10): DESCRIPTION OF CIRCUITRY & DEVICES PROVIDED FOR DETERMINING AND STABILIZING FREQUENCY:

PLEASE SEE ATTACHED EXHIBITS

(11): DESCRIPTION OF CIRCUITS OR DEVICES EMPLOYED FOR
 (a) SUPPRESSION OF SPURIOUS RADIATION,
 (b) LIMITING MODULATION,
 (c) LIMITING POWER:

PLEASE SEE ATTACHED EXHIBITS

(12): DIGITAL MODULATION DESCRIPTION:

ATTACHED EXHIBITS
 N/A

x

2.983(e): TEST AND MEASUREMENT DATA:

FOLLOWS

2.983(f): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

2.983(g): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

PAGE NO.

4 of 43.

Sub-part
2.983(e):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.981, 2.983, 2.985, 2.987, 2.989, 2.991, 2.993, 2.995, 2.997, 2.999 and the following individual Parts:

- 21 - Domestic Public Fixed Radio Services
- 22 - Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- 22.901(d) - Alternative technologies and auxiliary services
- 23 - International Fixed Public Radiocommunication services
- 24 - Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- 80 - Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 - Aviation Services
- 90 - Private Land Mobile Radio Services
- 94 - Private Operational-Fixed Microwave Service
- 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 101 - Fixed Microwave Services

PAGE NO.

5 of 43.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 6 of 43.

NAME OF TEST: Carrier Output Power (Conducted)

SPECIFICATION: FCC: 47 CFR 2.985(a)
IC: RSS-119, Section 6.2

GUIDE: TIA/EIA-603, Paragraph 2.2.1

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS

FREQUENCY OF CARRIER, MHz = 470, 450, 490


<u>POWER SETTING</u>	<u>R. F. POWER, WATTS</u>
Low	5
High	45

SUPERVISED BY:


Morton Flom, P. Eng.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
 TEST 2: FREQUENCY STABILITY

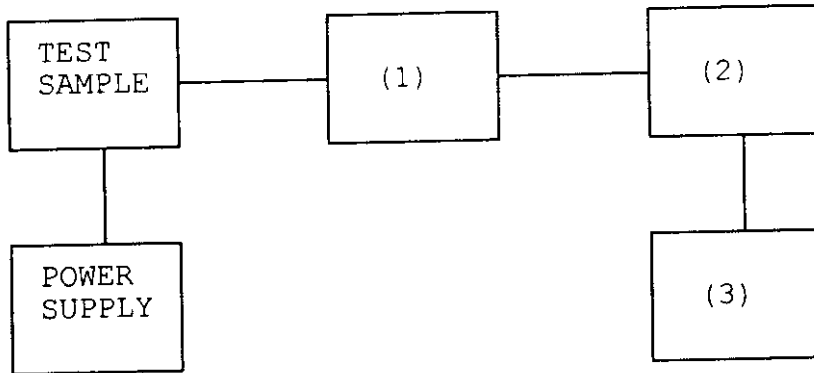

Asset Description s/n

(1) COAXIAL ATTENUATOR

_____	i00122	Narda 766-10	7802
_____	i00123	Narda 766-10	7802A
_____	i00069	Bird 8329 (30 dB)	1006
<u>x</u>	i00113	Sierra 661A-3D	1059

(2) POWER METERS

_____	i00014	HP 435A	1733A05836
<u>x</u>	i00039	HP 436A	2709A26776
<u>x</u>	i00020	HP 8901A POWER MODE	2105A01087

(3) FREQUENCY COUNTER

_____	i00042	HP 5383A	1628A00959
<u>x</u>	i00019	HP 5334B	2704A00347
<u>x</u>	i00020	HP 8901A FREQUENCY MODE	2105A01087

PAGE NO. 8 of 43.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: FCC: 47 CFR 2.991
IC: RSS-119, Section 6.3

GUIDE: TIA/EIA-603, Paragraph 2.2.13

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.

2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.

3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz	=	470, 450, 490
SPECTRUM SEARCHED, GHz	=	0 to 10 x F _c
MAXIMUM RESPONSE, Hz	=	1780
ALL OTHER EMISSIONS	=	≥ 20 dB BELOW LIMIT
LIMIT(S), dBc		
	- (43+10xLOG P)	= -50 (5 Watts)
	- (43+10xLOG P)	= -59.5 (45 Watts)


Morton Flom P. Eng.

Morton Flom, P. Eng.

SUPERVISED BY:

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
 TEST B. OUT-OF-BAND SPURIOUS

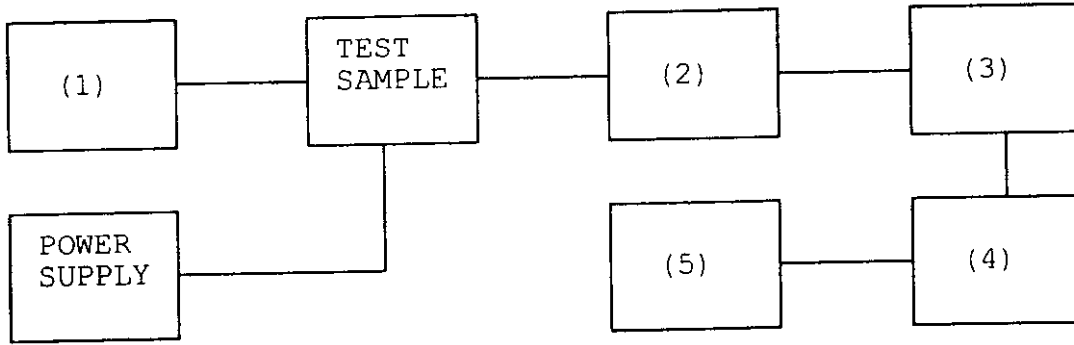

Asset	Description	s/n
(1)	<u>AUDIO OSCILLATOR/GENERATOR</u>	
—	i00010 HP 204D	1105A04683
—	i00017 HP 8903A	2216A01753
x	i00012 HP 3312A	1432A11250
(2)	<u>COAXIAL ATTENUATOR</u>	
—	i00122 Narda 766-10	7802
—	i00123 Narda 766-10	7802A
x	i00069 Bird 8329 (30 dB)	1006
x	i00113 Sierra 661A-3D	1059
(3)	<u>FILTERS; NOTCH, HP, LP, BP</u>	
x	i00126 Eagle TNF-1	100-250
x	i00125 Eagle TNF-1	50-60
x	i00124 Eagle TNF-1	250-850
(4)	<u>SPECTRUM ANALYZER</u>	
x	i00048 HP 8566B	2511A01467
—	i00029 HP 8563E	3213A00104
(5)	<u>SCOPE</u>	
—	i00058 HP 1741A	2251A09356
—	i00030 HP 54502A	2927A00209
—	i00071 Tektronix 935	1935-B011343

PAGE NO.

10 of 43.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g9890127: 1998-Sep-18 Fri 10:14:00
 STATE: 1:Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc
470.000000	939.620000	-31.5	-68.4
470.000000	1410.308000	-31.5	-68.4
470.000000	1880.102000	-30.7	-67.6
470.000000	2350.483000	-30.4	-67.3
470.000000	2819.678000	-33.2	-70.1
470.000000	3290.181000	-33.4	-70.3
470.000000	3759.593000	-33.5	-70.4
470.000000	4230.488000	-32.3	-69.2
470.000000	4699.697000	-33.7	-70.6
470.000000	5169.900000	-33.3	-70.2
470.000000	5640.145000	-33.8	-70.7
470.000000	6110.300000	-25.7	-62.6
470.000000	6580.080000	-27.1	-64
470.000000	7049.794000	-27.7	-64.6

PAGE NO.

11 of 43.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g9890130: 1998-Sep-18 Fri 10:17:00
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc
470.000000	940.301000	-30.1	-76.6
470.000000	1410.294000	-31.5	-78
470.000000	1879.897000	-29.4	-75.9
470.000000	2349.639000	-28.2	-74.7
470.000000	2819.582000	-31.4	-77.9
470.000000	3289.748000	-32.5	-79
470.000000	3759.619000	-33.3	-79.8
470.000000	4230.197000	-32.3	-78.8
470.000000	4699.514000	-32.1	-78.6
470.000000	5170.221000	-32	-78.5
470.000000	5640.120000	-32.1	-78.6
470.000000	6109.962000	-26	-72.5
470.000000	6580.007000	-26.3	-72.8
470.000000	7050.072000	-25.8	-72.3

PAGE NO. 12 of 43.
NAME OF TEST: Field Strength of Spurious Radiation
SPECIFICATION: FCC: 47 CFR 2.993(a)
IC: N/A
GUIDE: TIA/EIA-603, Paragraph 2.2.12
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. A description of the measurement facilities was filed with the FCC and was found to be in compliance with the requirements of Section 15.38, by letter from the FCC dated March 3, 1997, FILE 31040/SIT. All pertinent changes will be reported to the Commission by up-date prior to March 2000.
2. At first, in order to locate all spurious frequencies and approximate amplitudes, and to determine proper equipment functioning, the test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
3. In the field, the test sample was placed on a wooden turntable above ground at three (or thirty) meters away from the search antenna. The test sample was connected to an R.F. Wattmeter and a 50 ohm dummy load, and adjusted to its rated output.

In order to obtain the maximum response at each spurious frequency, the turntable was rotated. Also, the Search Antennas were raised and lowered vertically, and all cables were oriented. Excess power lead was coiled near the power supply.
4. A signal generator, connected with a non-radiating cable to a vertically polarized half-wave antenna (for each frequency involved) was substituted for the transmitter. The Search Antenna was raised and lowered to obtain maximum indicated.
5. The signal generator output was adjusted until a signal level indication equal to that from the transmitter was obtained.
6. Steps 4 and 5 were repeated, using a horizontally polarized half-wave antenna. The higher of the two observations was noted.

PAGE NO. 13 of 43.
NAME OF TEST: Field Strength of Spurious Radiation
SPECIFICATION: FCC: 47 CFR 2.993(a)
 IC: N/A

MEASUREMENT PROCEDURE (CONT.)

7. Power into the half-wave antenna was calculated from the characteristic impedance of the line, and the voltage output from the signal generator.

8. The level of each spurious radiation with reference to the transmitter power in dB, was calculated from:

$$\text{SPURIOUS LEVEL, dB} = 10 \text{ LOG } \left(\frac{\text{Calculated Spurious Power}}{\text{Tx Power (Wattmeter)}} \right) \text{ [from para. 7].}$$


9. The worst case for all channels is shown.

10. Measurement summary:

FREQUENCY OF CARRIER, MHz	=	470, 450, 490
SPECTRUM SEARCHED, GHz	=	0 to 10 x F _c
MAXIMUM RESPONSE, Hz	=	1780
ALL OTHER EMISSIONS	=	≥ 20 dB BELOW LIMIT
LIMIT(S), dBc		
	- (43+10xLOG P)	= -50 (5 Watts)
	- (43+10xLOG P)	= -59.5 (45 Watts)

11. Measurement results: ATTACHED FOR WORST CASE

RADIATED TEST SETUP

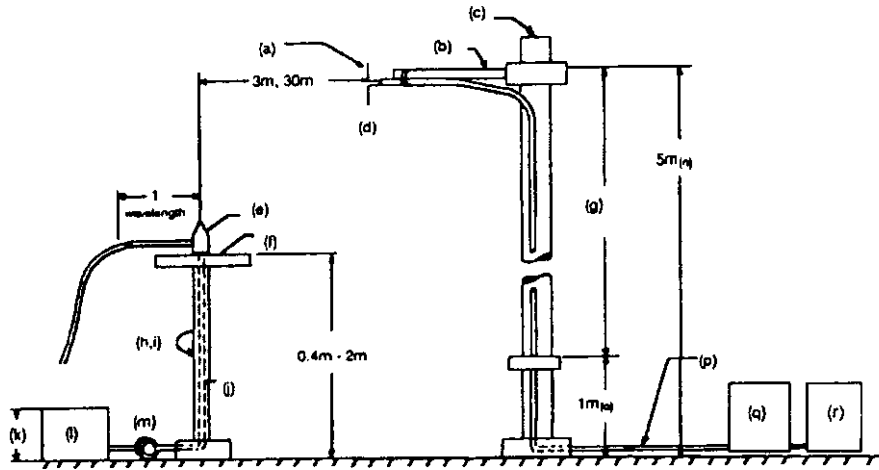

NOTES:

- (a) Search Antenna - Rotatable on boom
- (b) Non-metallic boom
- (c) Non-metallic mast
- (d) Adjustable horizontally
- (e) Equipment Under Test
- (f) Turntable
- (g) Boom adjustable in height.
- (h) External control cables routed horizontally at least one wavelength.
- (i) Rotatable
- (j) Cables routed through hollow turntable center
- (k) 30 cm or less
- (l) External power source
- (m) 10 cm diameter coil of excess cable
- (n) 25 cm (V), 1 m-7 m (V, H)
- (o) 25 cm from bottom end of 'V', 1m normally
- (p) Calibrated Cable at least 10m in length
- (q) Amplifier (optional)
- (r) Spectrum Analyzer

Asset	Description	s/n	Cycle	Last Cal
<u>TRANSDUCER</u>				
___	i00065 EMCO 3109B 100Hz-50MHz	2336	12 mo.	
___	i00033 Singer 94593-1 10kHz-32MHz	0219	12 mo.	
X	i00088 EMCO 3109-B 25MHz-300MHz	2336	12 mo.	none
X	i00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	none
X	i00103 EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	none
___	i00085 EMCO 3116 10GHz-40GHz	2076	12 mo.	
<u>AMPLIFIER</u>				
___	i00028 HP 8449A	2749A00121	12 mo.	Mar-98
<u>SPECTRUM ANALYZER</u>				
___	i00029 HP 8563E	3213A00104	12 mo.	
X	i00033 HP 85462A	3625A00357	12 mo.	Dec-97
___	i00048 HP 8566B	2511AD1467	6 mo.	Mar-98

Per ANSI C63.4-1992, 10.1.4

PAGE NO. 15 of 43.

NAME OF TEST: Field Strength of Spurious Radiation

ALL OTHER EMISSIONS = \geq 20 dB BELOW LIMIT

EMISSION, MHz/HARMONIC	SPURIOUS LEVEL, dBc	
	Low	High
2nd to 10th	<-25	<-25

Morton Flom P. Eng.

Morton Flom, P. Eng.


SUPERVISED BY:

PAGE NO. 16 of 43.
NAME OF TEST: Emission Masks (Occupied Bandwidth)
SPECIFICATION: FCC: 47 CFR 2.989(c)(1)
IC: RSS-119, Section 6.4
GUIDE: TIA/EIA-603, Paragraph 2.2.11
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for ± 2.5 kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED


POWER: LOW
MODULATION: NONE

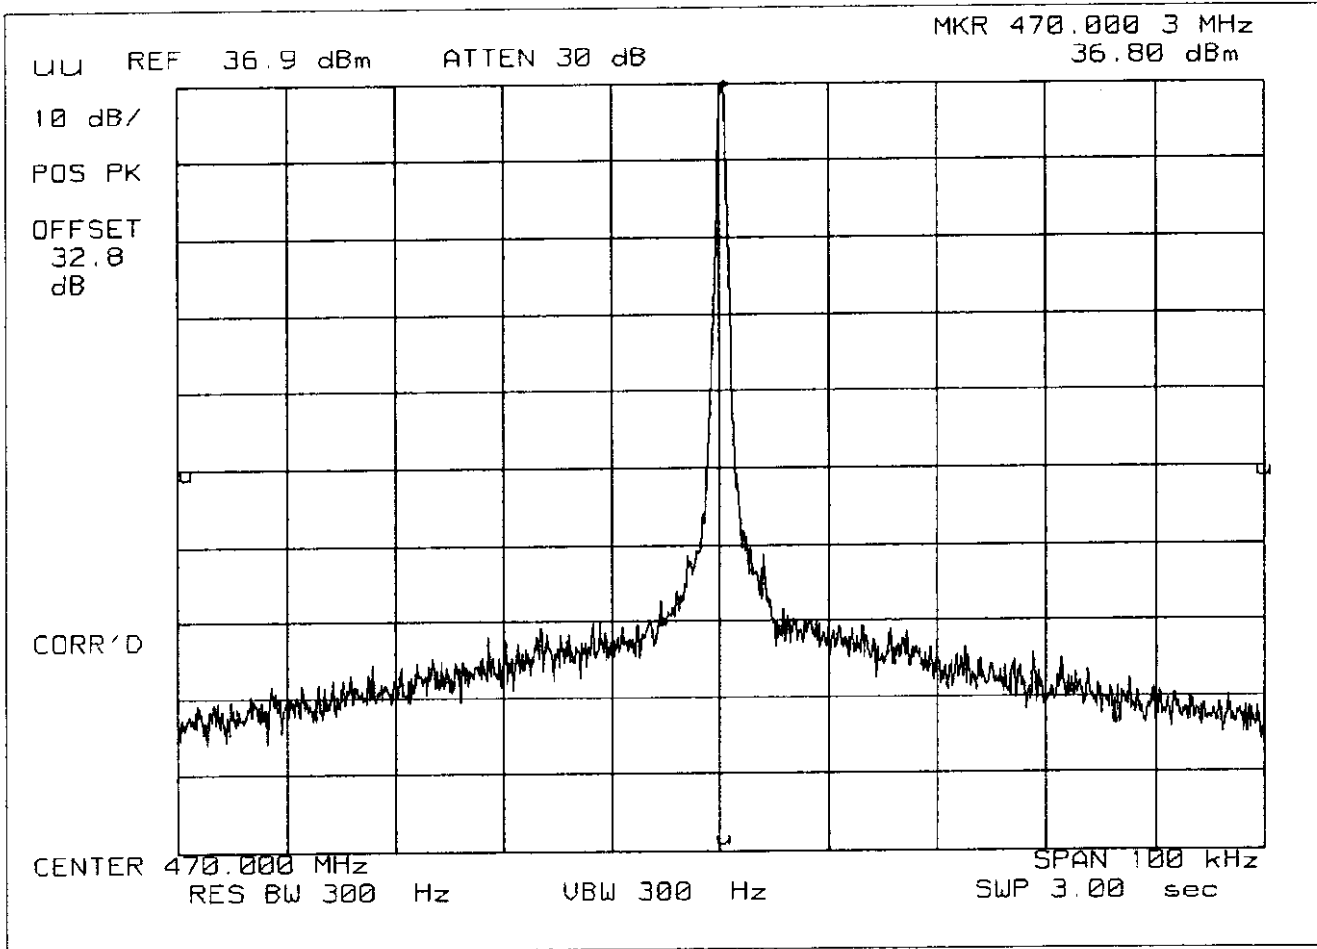

POWER: LOW
MODULATION: VOICE: 2500 Hz SINE WAVE
MASK: D, VHF/UHF 12.5kHz BW

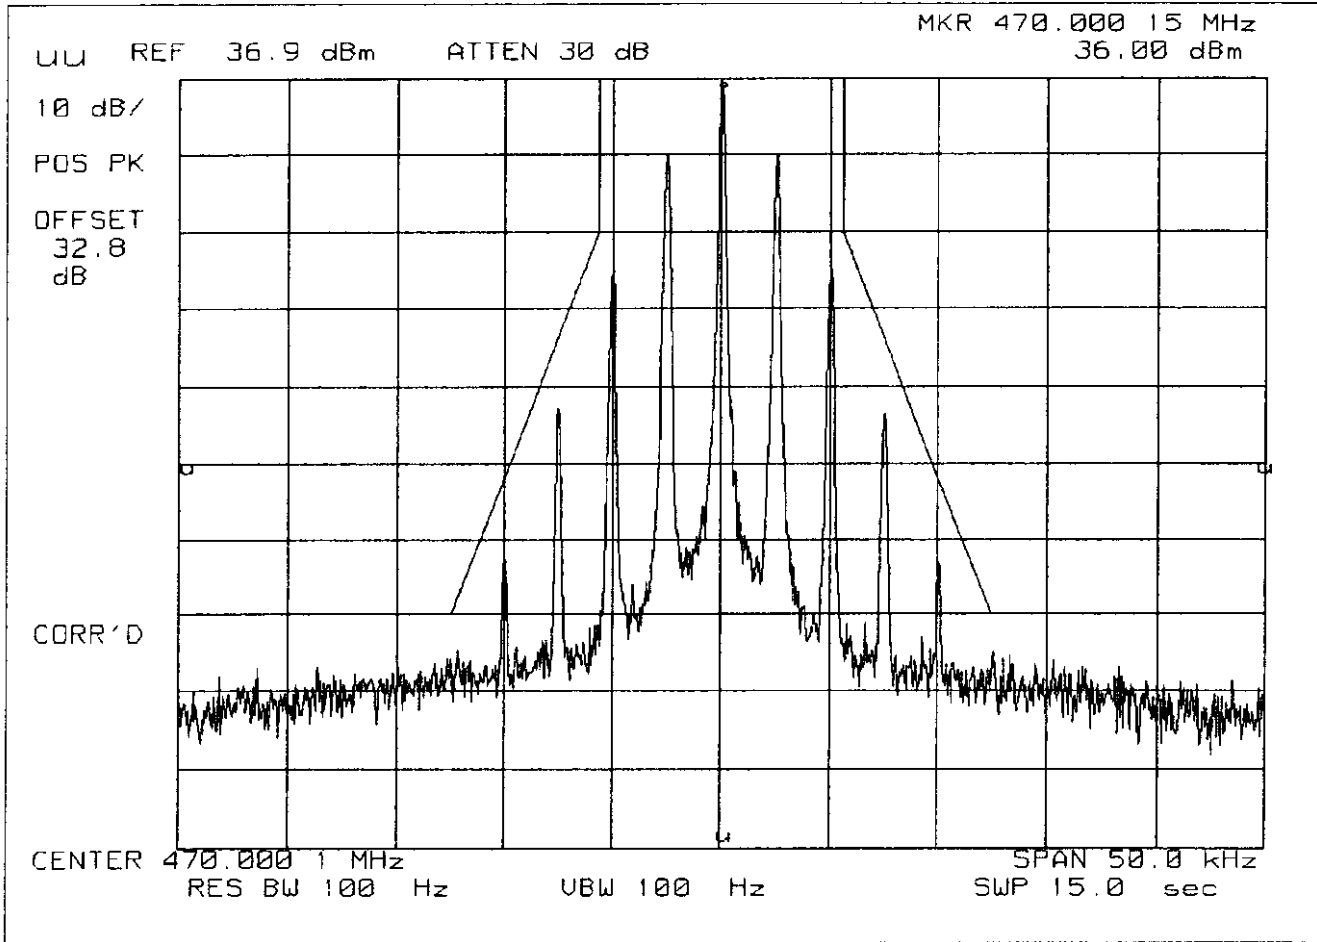

POWER: LOW
MODULATION: VOICE: 2500 Hz SINE WAVE
MASK: B, VHF/UHF 25kHz, w/LPF

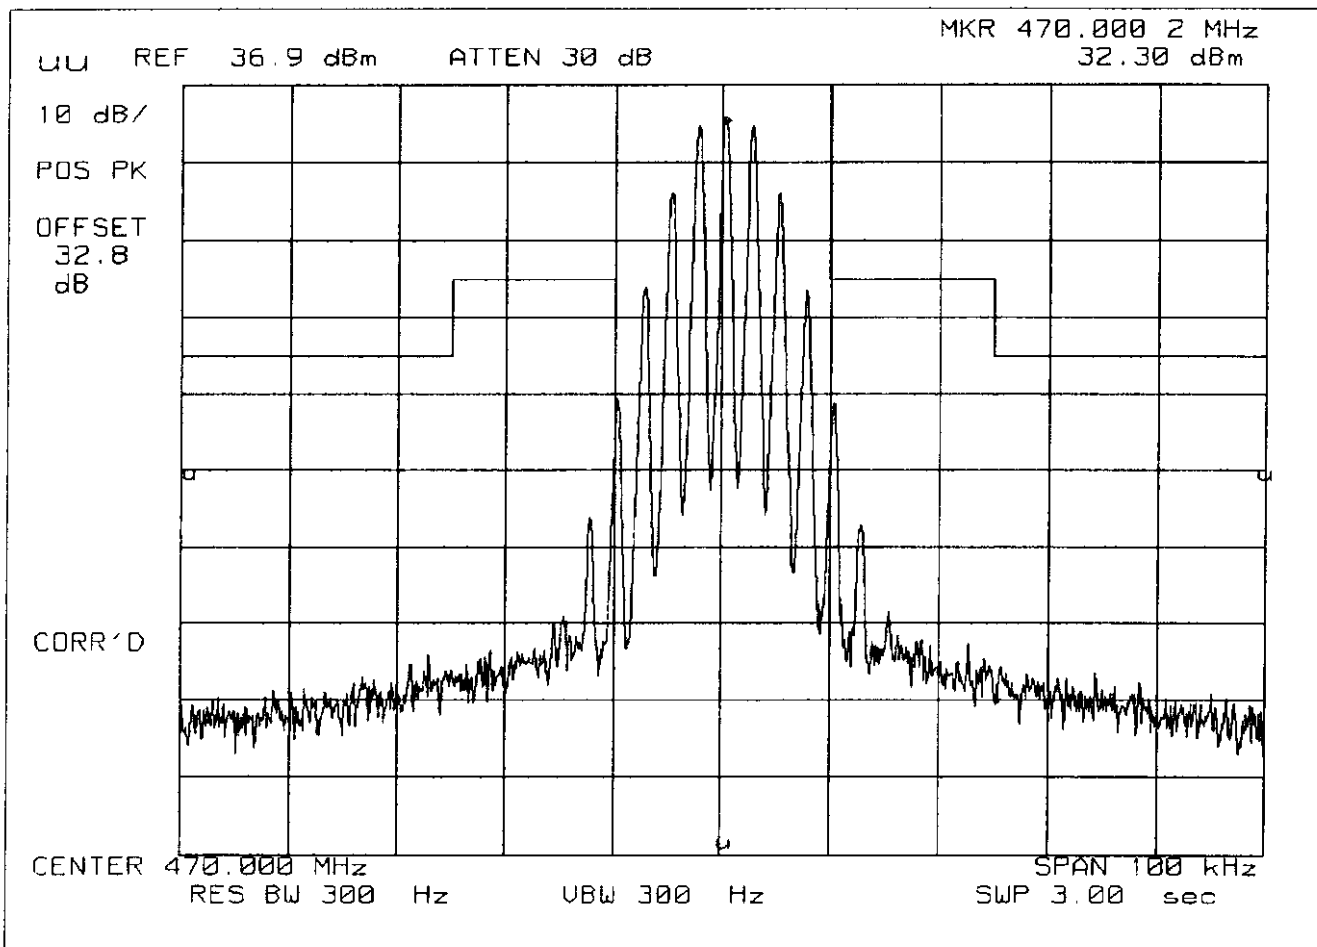


SPECTRUM ANALYZER PRESENTATION

KENWOOD, tk-890

1998-SEP-18, 09:37, FRI

POWER: HIGH

MODULATION: NONE

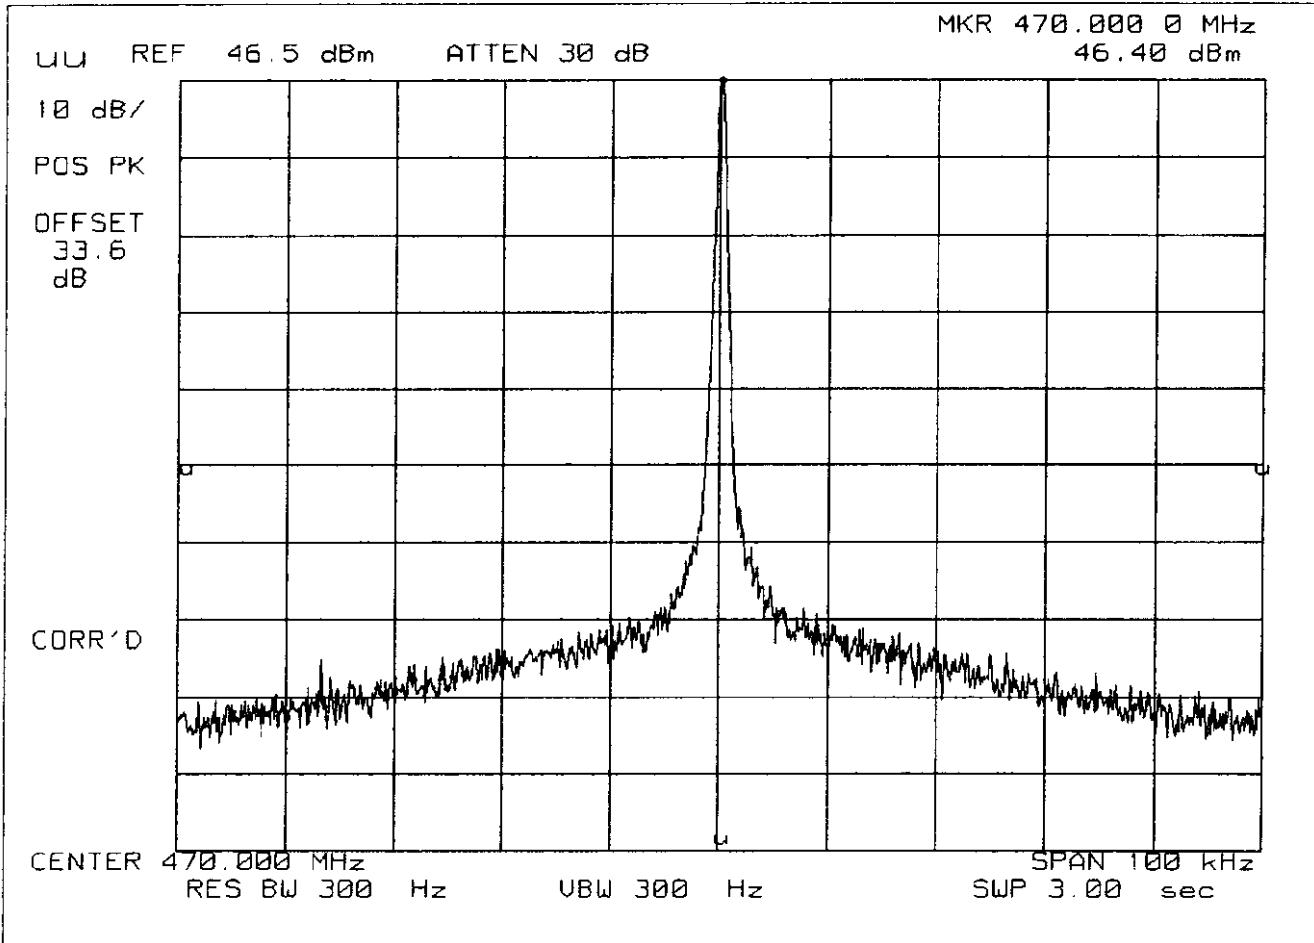


SPECTRUM ANALYZER PRESENTATION


KENWOOD, tk-890

1998-SEP-18, 09:52, FRI

POWER: HIGH
MODULATION: VOICE: 2500 Hz SINE WAVE
MASK: D, VHF/UHF 12.5kHz BW

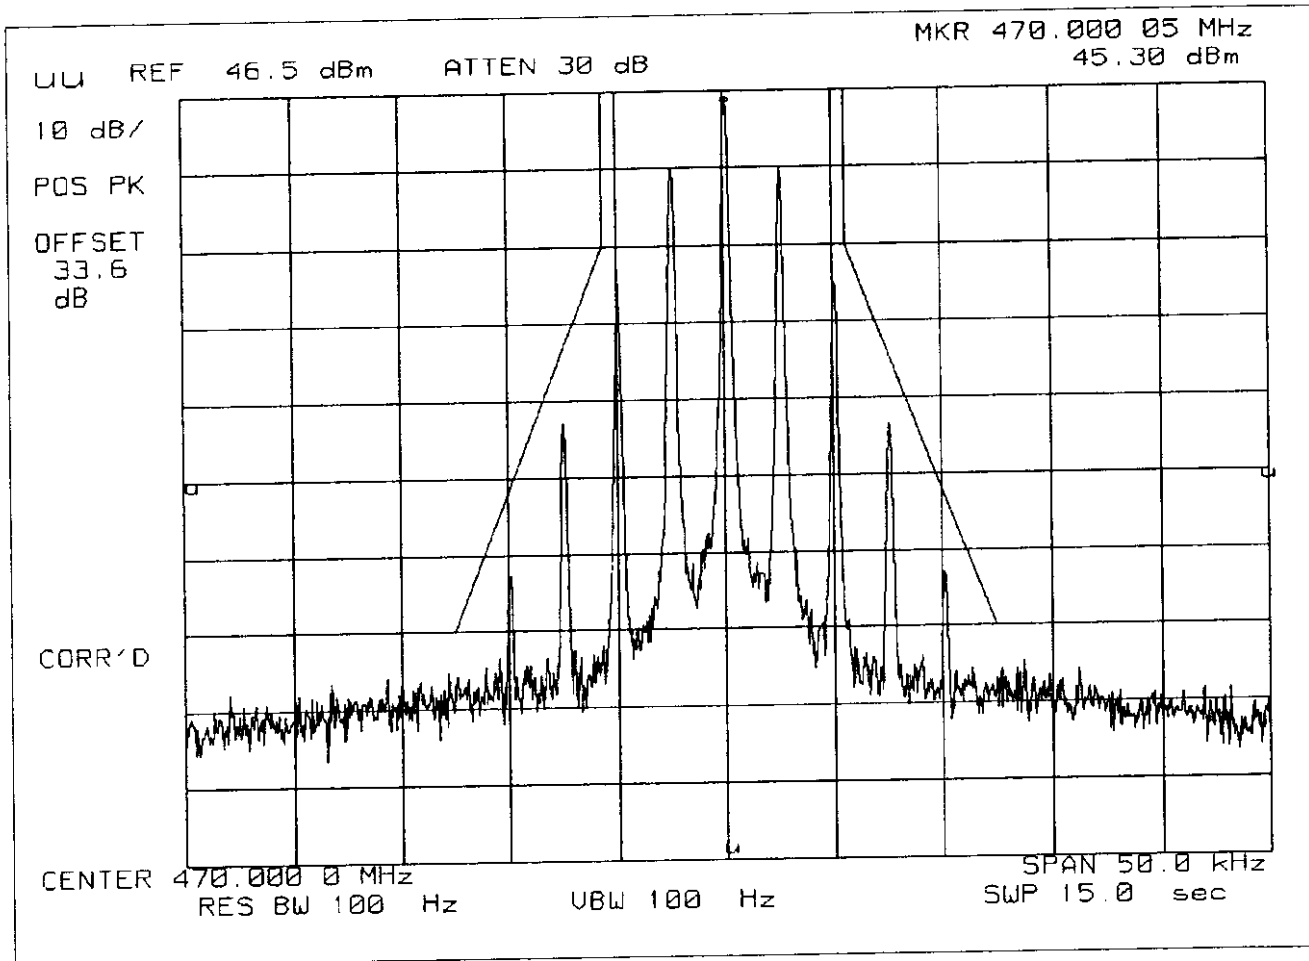

POWER: HIGH
MODULATION: VOICE: 2500 Hz SINE WAVE
MASK: B, VHF/UHF 25kHz, w/LPF

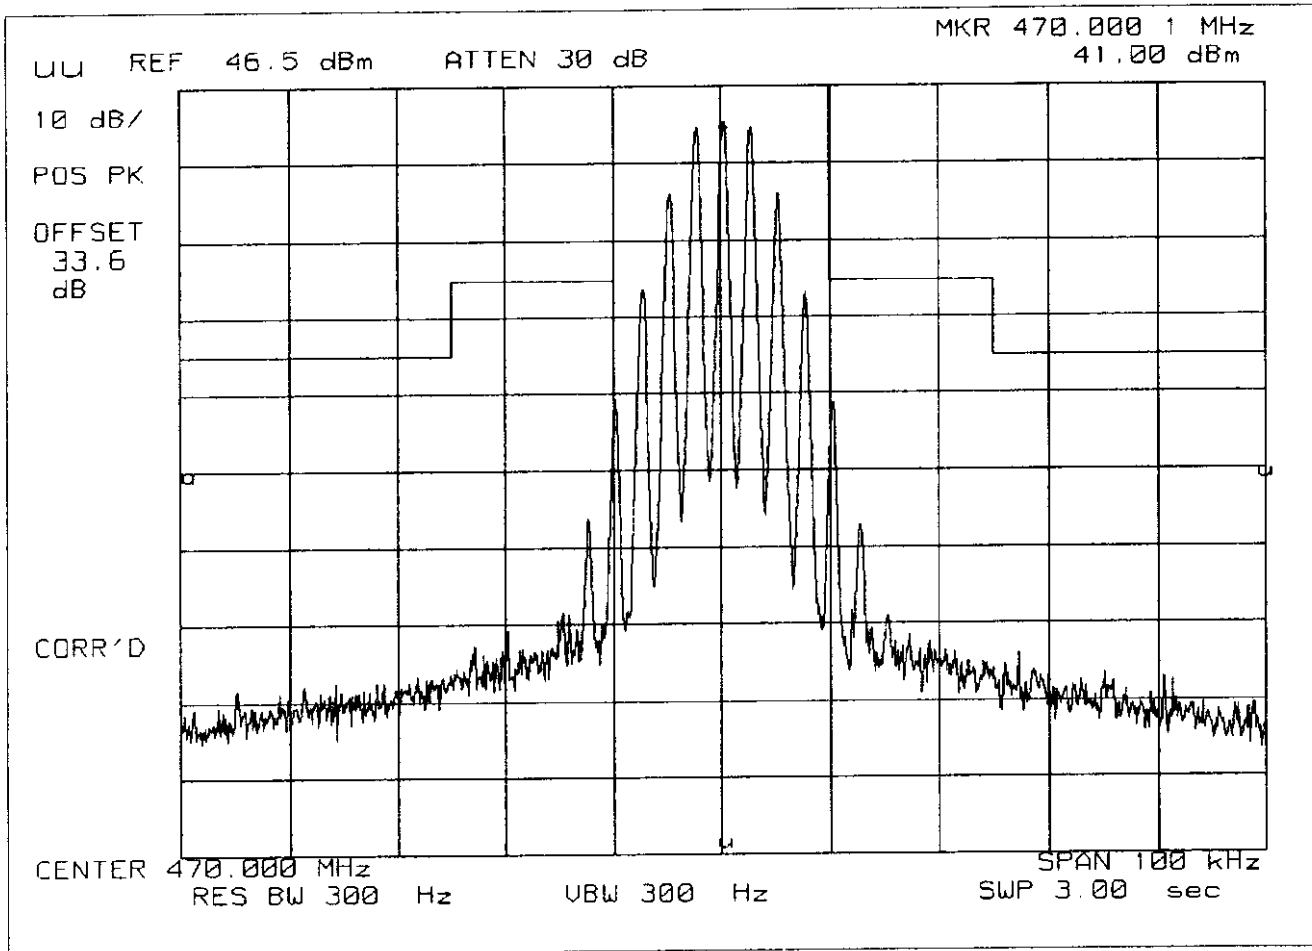

PAGE NO. 23 of 43.

NAME OF TEST: Transient Frequency Behavior

SPECIFICATION: FCC: 47 CFR 90.214
IC: RSS-119, Section 6.5

GUIDE: TIA/EIA-603, Paragraph 2.2.19

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was setup as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a guide.
2. The transmitter was turned on.
3. Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded as step f.
4. The transmitter was turned off.
5. An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step f, as measured at the output of the combiner. This level was then fixed for the remainder of the test and is recorded at step h.
6. The oscilloscope was setup using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5 ms/div (VHF).
7. The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded as step l.
8. The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.

LEVELS MEASURED:


step f, dBm	= -16.0
step h, dBm	= -47.9
step l, dBm	= 2.3



SUPERVISED BY:


Morton Flom, P. Eng.

TRANSIENT FREQUENCY BEHAVIOR

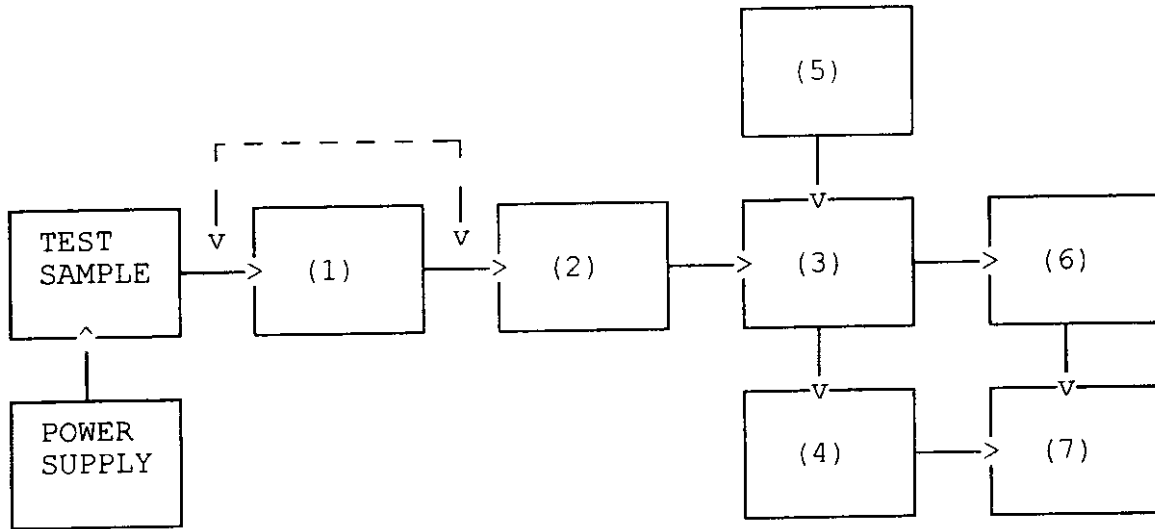


Asset	Description	s/n
(1)	ATTENUATOR (Removed after 1st step)	
<u>x</u>	<u>i00112</u> Philco 30 dB	989
(2)	ATTENUATOR	
<u> </u>	<u>i00112</u> Philco 30 dB	989
<u> </u>	<u>i00172</u> Bird 30 dB	989
<u>x</u>	<u>i00122</u> Narda 10 dB	7802
<u> </u>	<u>i00123</u> Narda 10 dB	7802A
<u> </u>	<u>i00110</u> Kay Variable	145-387
(3)	COMBINER	
<u>x</u>	<u>i00154</u> 4 x 25 Ω COMBINER	154
(4)	CRYSTAL DETECTOR	
<u>x</u>	<u>i00159</u> HP 8470B	1822A10054
(5)	RF SIGNAL GENERATOR	
<u> </u>	<u>i00018</u> HP 8656A	2228A03472
<u> </u>	<u>i00031</u> HP 8656A	2402A06180
<u>x</u>	<u>i00067</u> HP 8920A	3345U01242
(6)	MODULATION ANALYZER	
<u>x</u>	<u>i00020</u> HP 8901A	2105A01087
(7)	SCOPE	
<u>x</u>	<u>i00030</u> HP 54502A	2927A00209

MODULATION: Ref Gen=12.5 kHz Deviation
REMARK: CARRIER ON TIME

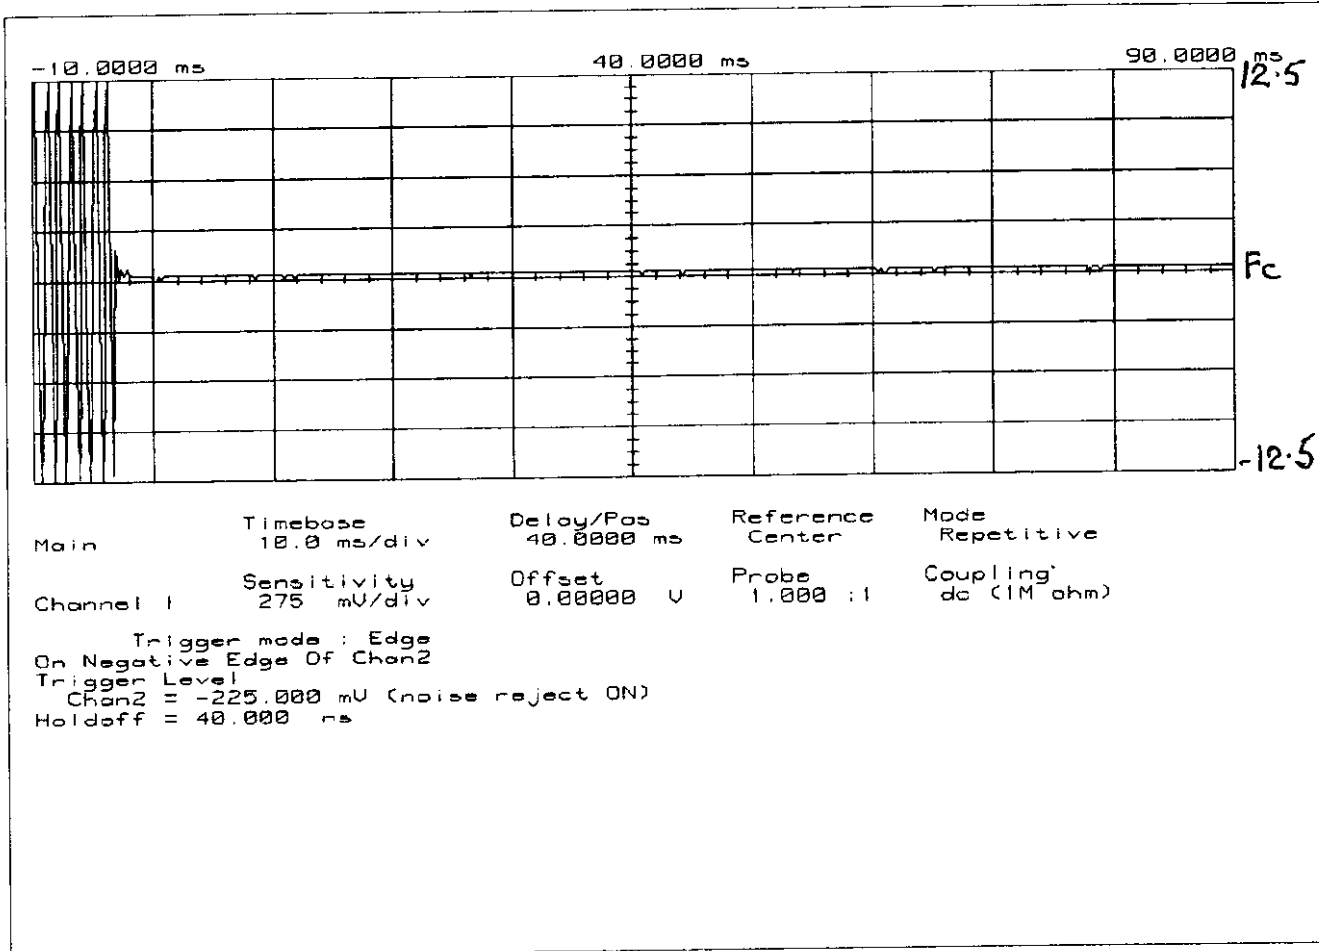

MODULATION: Ref Gen=12.5 kHz Deviation
REMARK: CARRIER OFF TIME

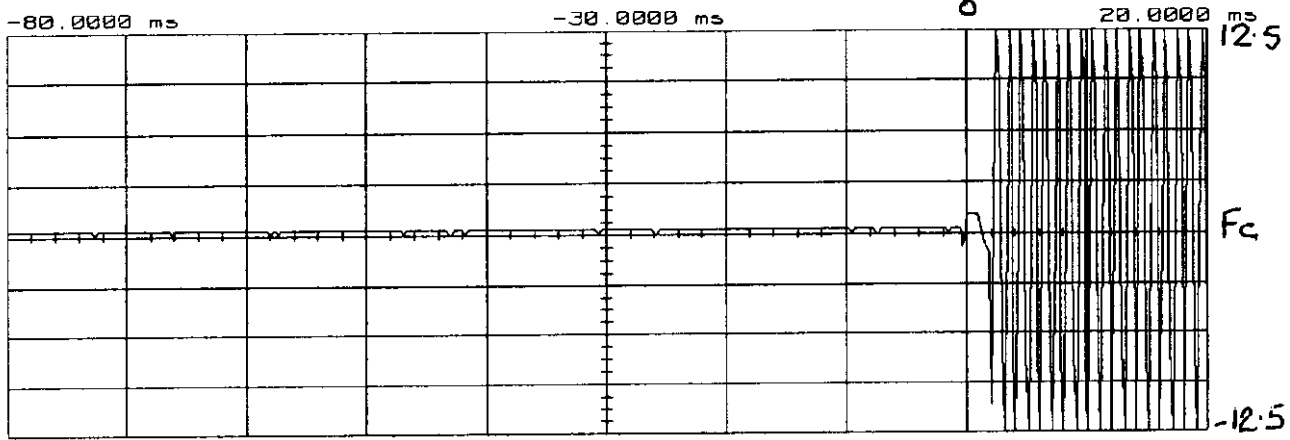

Main	Timebase 10.0 ms/div	Delay/Pos -30.0000 ms	Reference Center	Mode Repetitive
Channel 1	Sensitivity 275 mV/div	Offset 0.00000 V	Probe 1.000 :1	Coupling dc (1M ohm)

Trigger mode : Edge
On Positive Edge Of Chan2
Trigger Level
Chan2 = -225.000 mV (noise reject ON)
Holdoff = 40.000 ns

L:\DC\YRAC\4380918021.PCT COPYRIGHT (C) 1998 BY N. FLOM ASSOCIATES, INC. ALL RIGHTS RESERVED


OSCILLOSCOPE PRESENTATION

KENWOOD, tk-890

1998-SEP-18, 10:41, FRI

MODULATION: Ref Gen=25 kHz Deviation

REMARK: CARRIER ON TIME

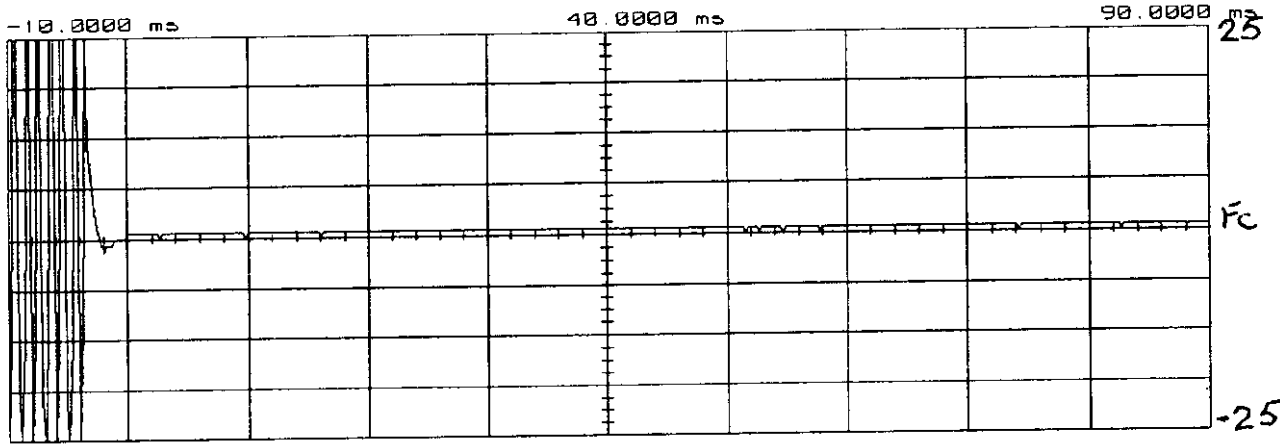


Main	Timebase 10.0 ms/div	Delay/Pos 40.0000 ms	Reference Center	Mode Repetitive
Channel 1	Sensitivity 275 mV/div	Offset 0.00000 V	Probe 1.000 :1	Coupling dc (1M ohm)

Trigger mode : Edge
 On Negative Edge Of Chan2
 Trigger Level
 Chan2 = -225.000 mV (noise reject ON)
 Holdoff = 40.000 ns

L:\OSYRACLS\88918818\F11 COPYTEXT (C) 1998 BY H. FLOR ASSOCIATES, INC. ALL RIGHTS RESERVED

MODULATION: Ref Gen=25 kHz Deviation
REMARK: CARRIER OFF TIME

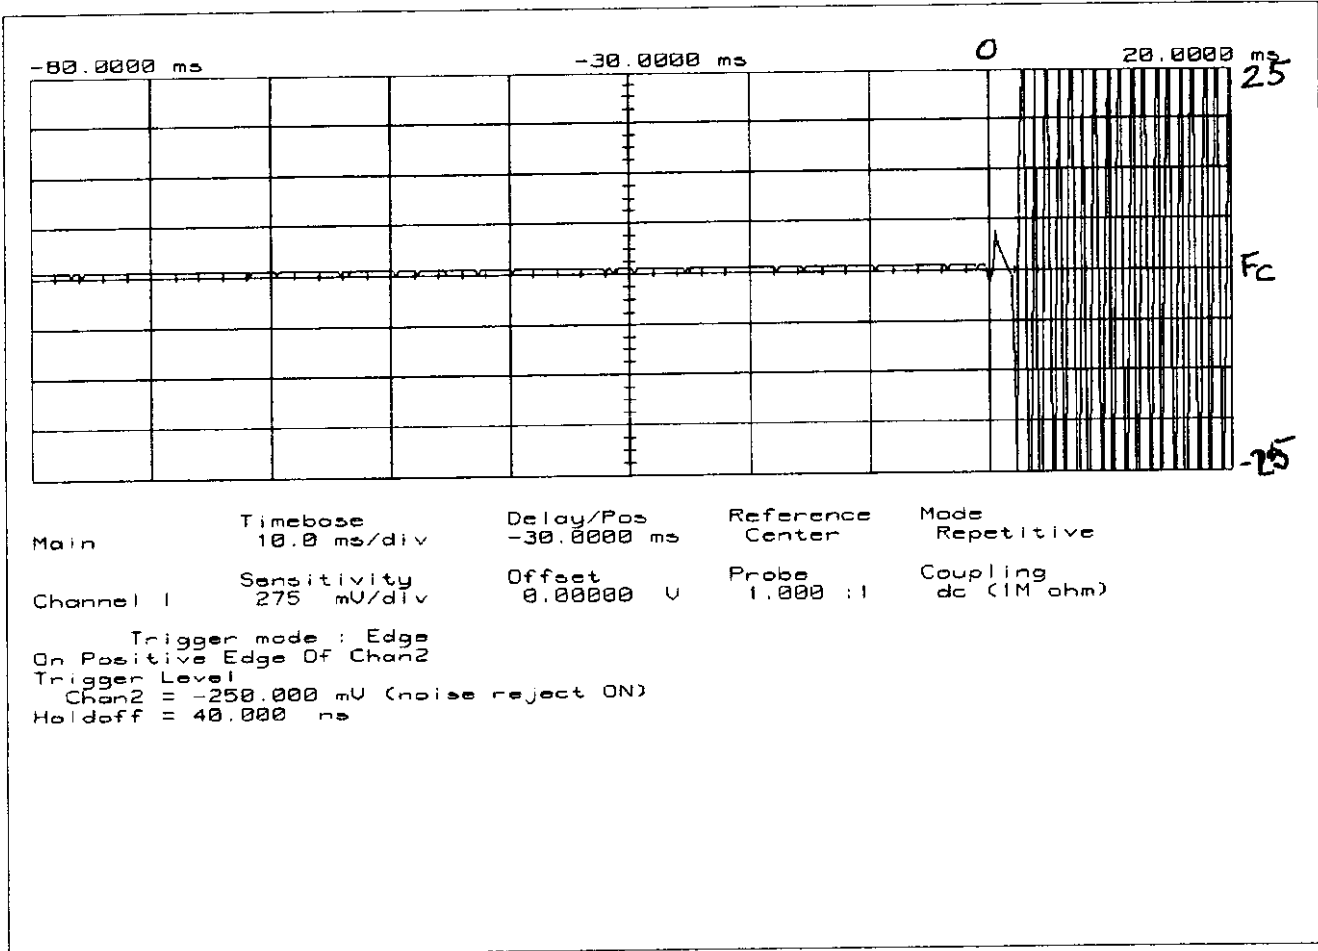


PAGE NO. 29 of 43.
NAME OF TEST: Audio Low Pass Filter (Voice Input)
SPECIFICATION: FCC: 47 CFR 2.987(a)
IC: RSS-119, Section 6.6
GUIDE: TIA/EIA-603, Paragraph 2.2.15
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

- TEST A. MODULATION CAPABILITY/DISTORTION
- TEST B. AUDIO FREQUENCY RESPONSE
- TEST C. HUM AND NOISE LEVEL
- TEST D. RESPONSE OF LOW PASS FILTER
- TEST E. MODULATION LIMITING

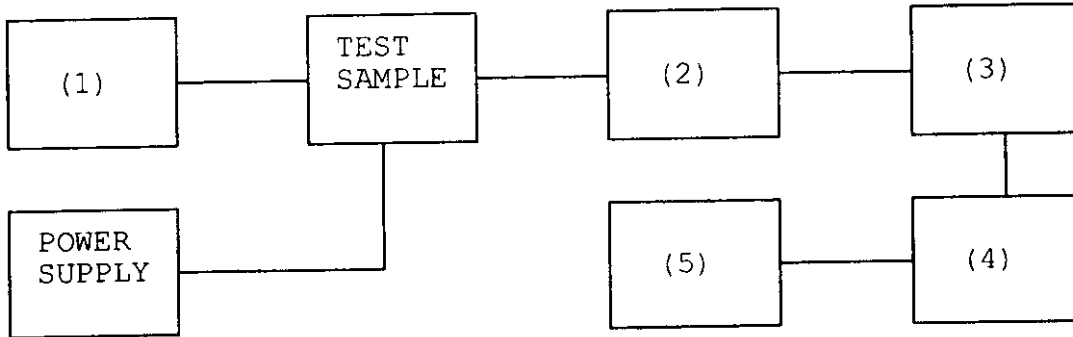


Asset	Description	s/n
<u>(1) LINE IMPEDANCE STABILIZATION NETWORK</u>		
	i00010 HP 204D	1105A04683
x	i00017 HP 8903A	2216A01753
x	i00118 HP 33120A	US36002064
<u>(2) COAXIAL ATTENUATOR</u>		
	i00122 NARDA 766-10	7802
	i00123 NARDA 766-10	7802A
x	i00113 SIERRA 661A-3D	1059
	i00069 BIRD 8329 (30 dB)	10066
<u>(3) MODULATION ANALYZER</u>		
x	i00020 HP 8901A	2105A01087
<u>(4) AUDIO ANALYZER</u>		
x	i00017 HP 8903A	2216A01753
<u>(5) SCOPE</u>		
	i00058 HP 1741A	2215A09356
	i00071 Tektronix 935	1935-B011343

FREQUENCY RESPONSE OF AUDIO LOW PASS FILTER

KENWOOD, tk-890

11 SEP 1998, 14:28

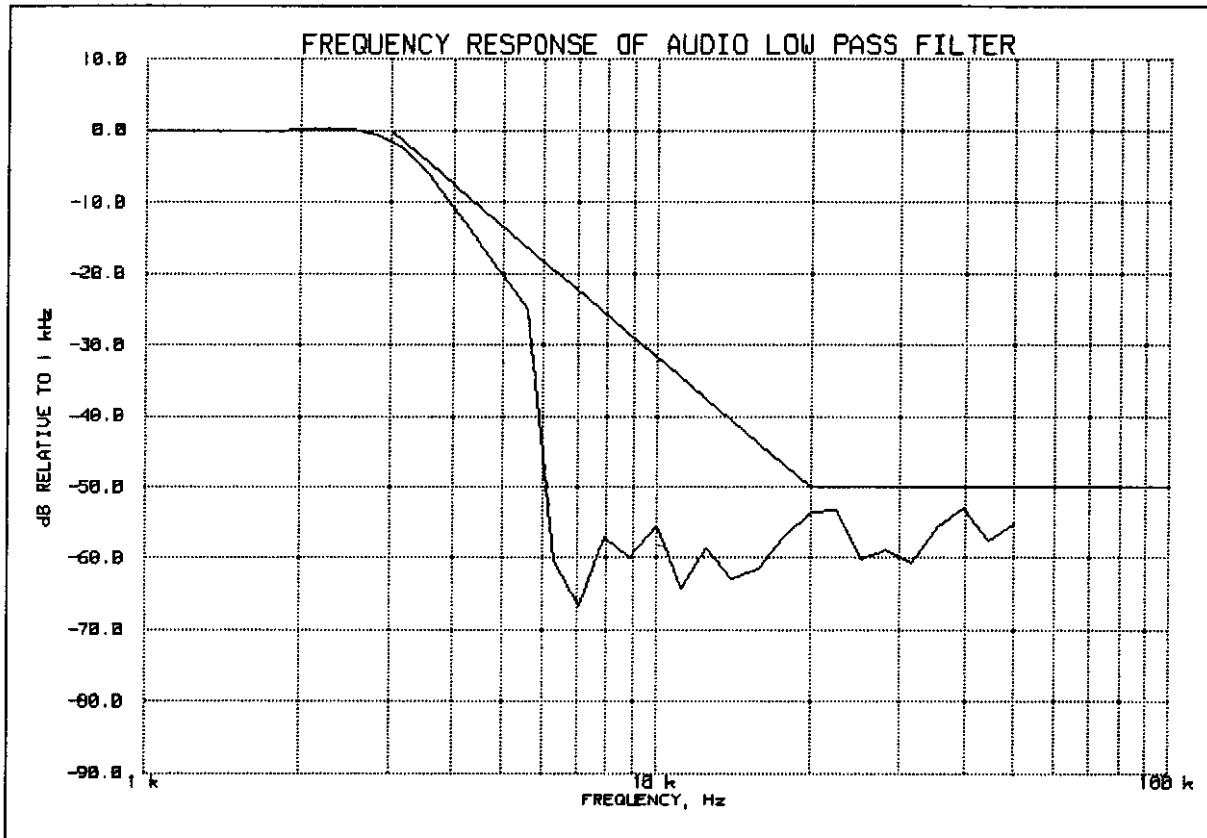


PEAK AUDIO FREQUENCY, Hz: 2240

PAGE NO. 32 of 43.
NAME OF TEST: Audio Frequency Response
SPECIFICATION: FCC: 47 CFR 2.987(a)
IC: N/A
GUIDE: TIA/EIA-603, Paragraph 2.2.6
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

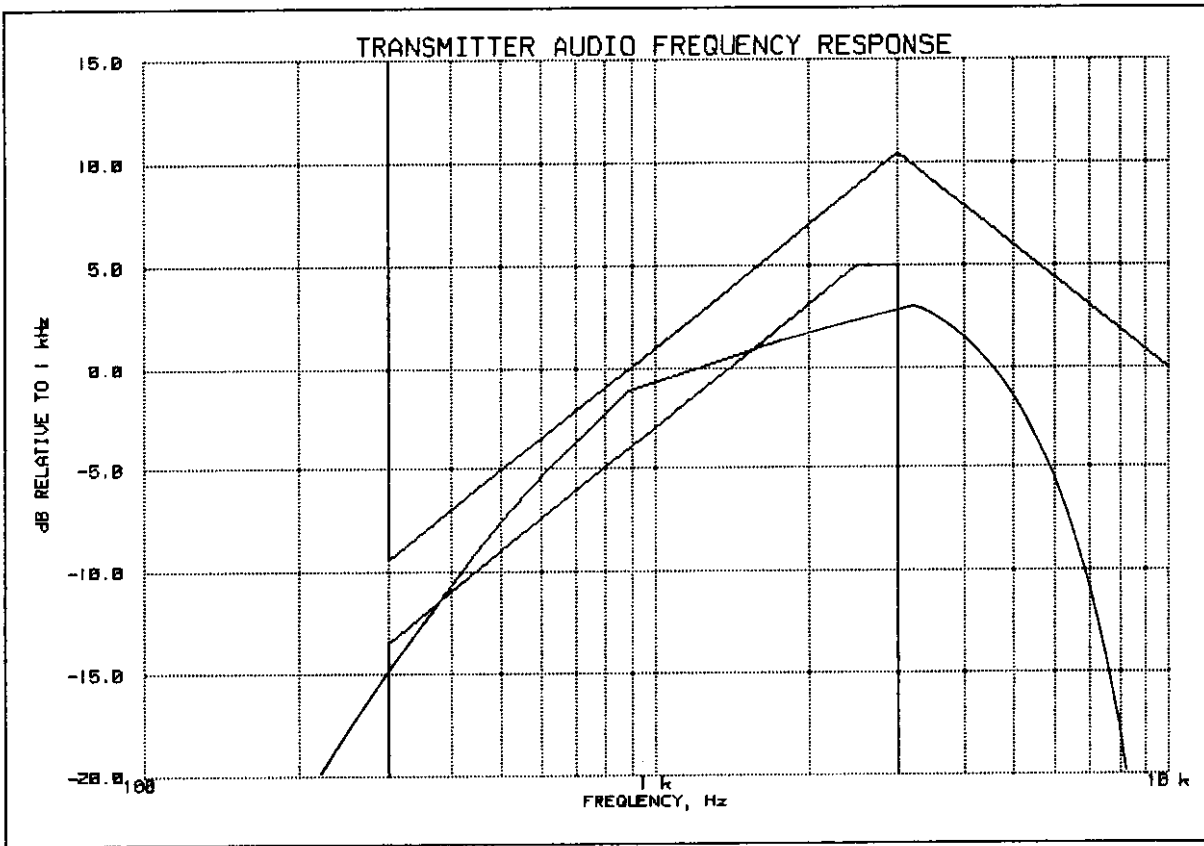

PEAK AUDIO FREQUENCY, Hz: 1780


TABLE VALUES:

FREQUENCY, Hz	LEVEL, dB	FREQUENCY, Hz	LEVEL, dB	FREQUENCY, Hz	LEVEL, dB
300	1.4	30000	1.4		
20000	1.4	50000	1.4		

PAGE NO. 34 of 43.
NAME OF TEST: Modulation Limiting
SPECIFICATION: FCC: 47 CFR 2.987(b)
IC: RSS-119, Section 6.6
GUIDE: TIA/EIA-603, Paragraph 2.2.3
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

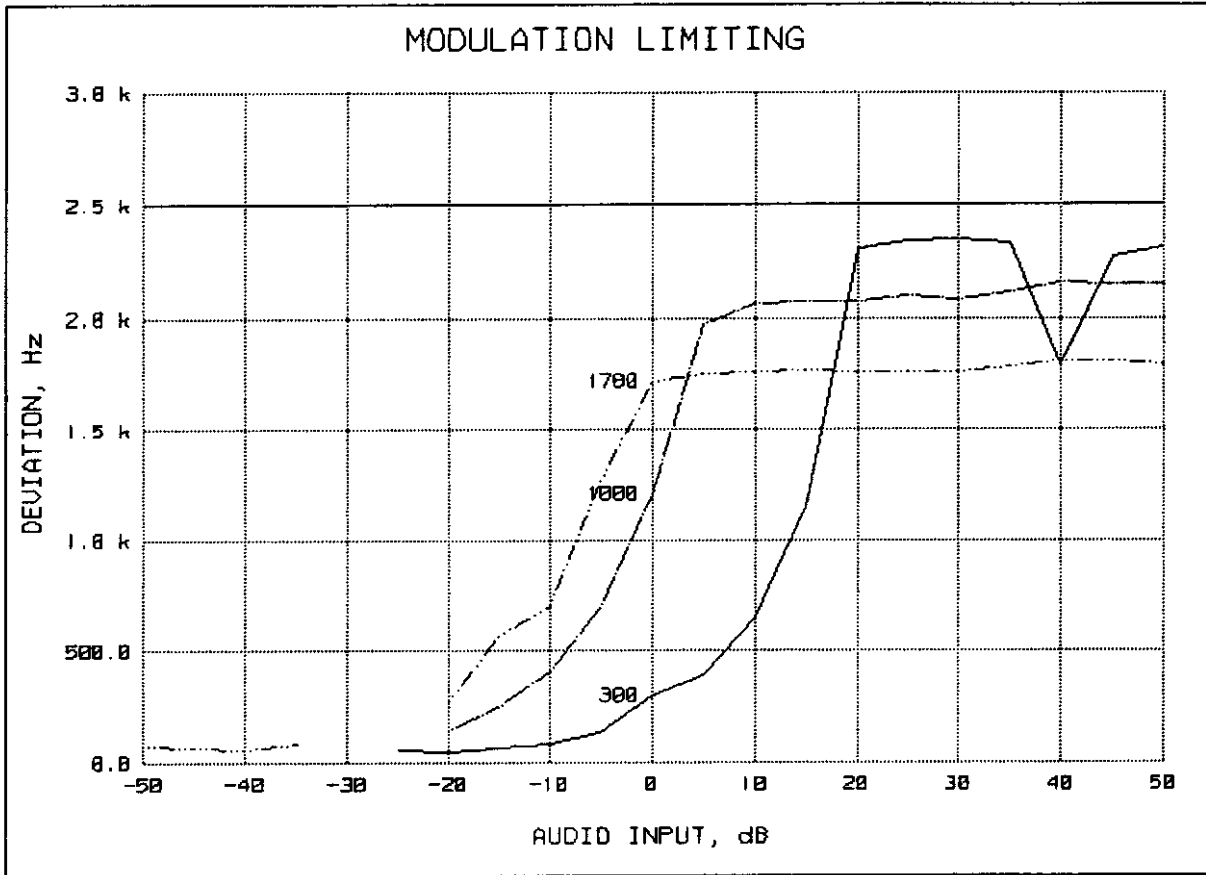


REFERENCE DEVIATION, kHz = 1.25

REFERENCE MODULATION, Hz = 1000

PEAKS = POSITIVE

AUDIO AMPLITUDE, mV = 8.49

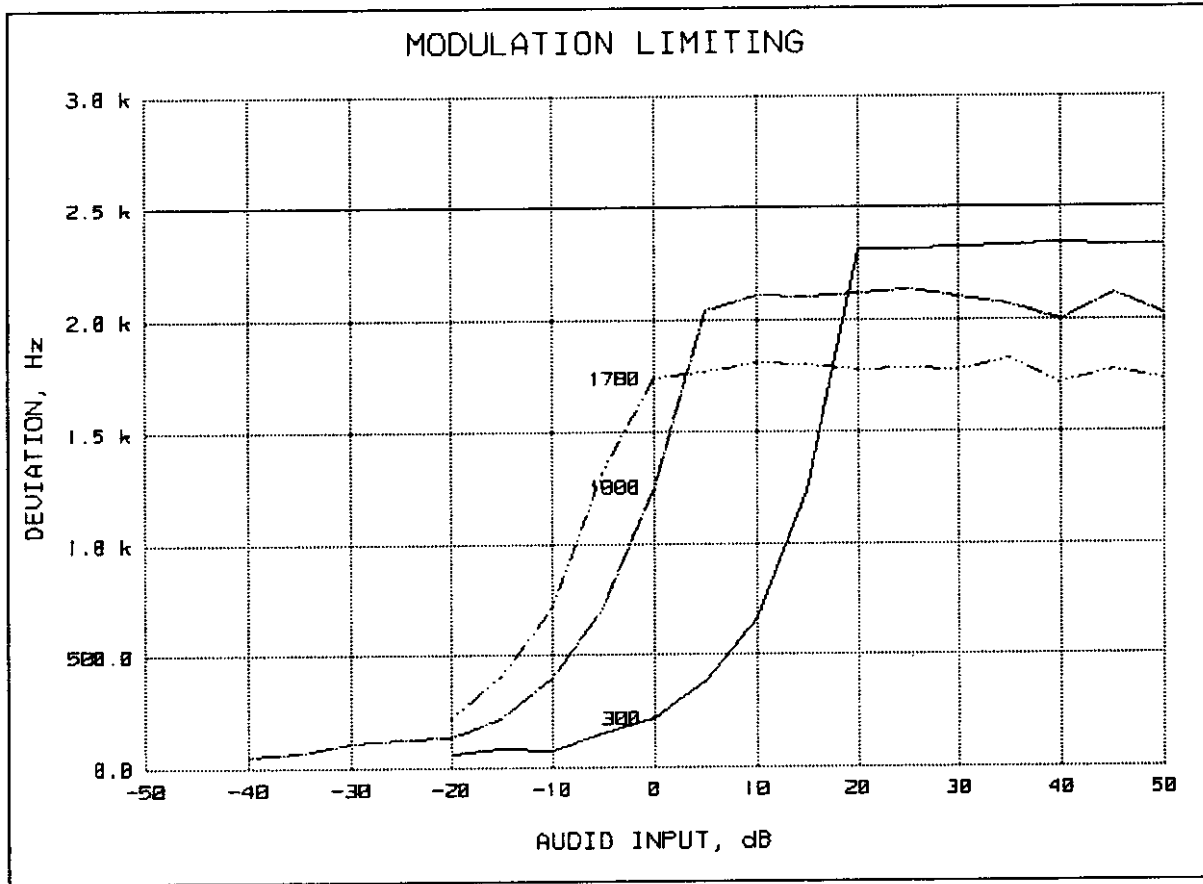


REFERENCE DEVIATION, kHz = 1.25

REFERENCE MODULATION, Hz = 1000

PEAKS = NEGATIVE

AUDIO AMPLITUDE, mV = 8.79

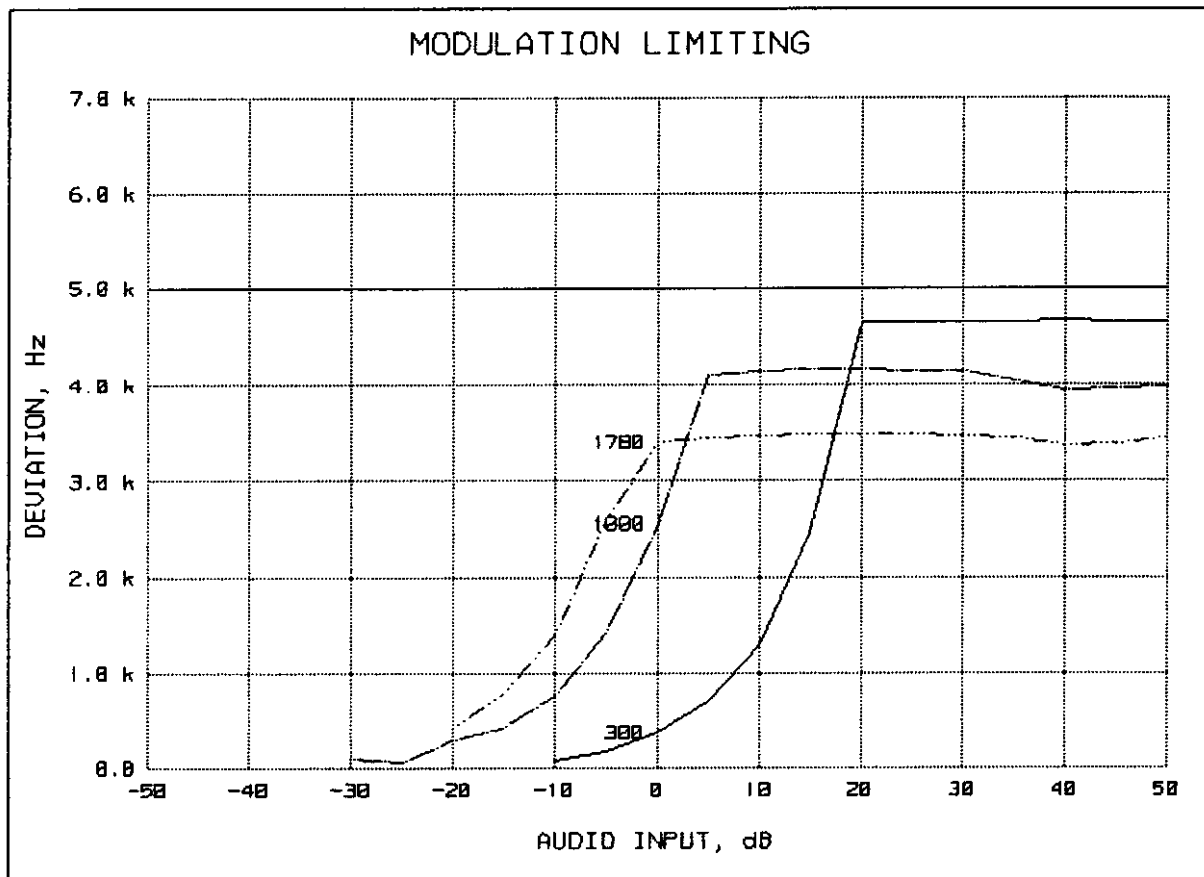


REFERENCE DEVIATION, kHz = 2.5

REFERENCE MODULATION, Hz = 1000

PEAKS = NEGATIVE

AUDIO AMPLITUDE, mV = 9.1

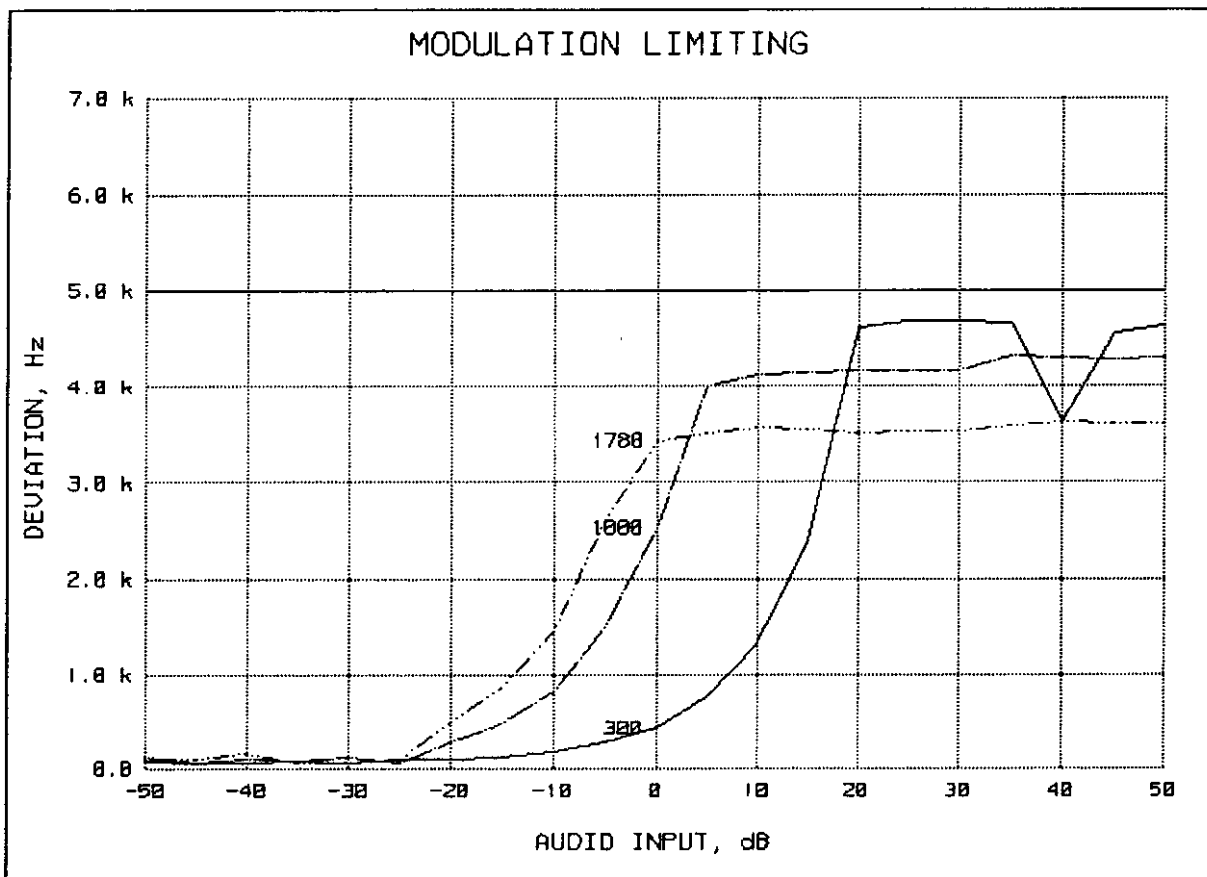

REFERENCE DEVIATION, kHz = 2.5

REFERENCE MODULATION, Hz = 1000

PEAKS = POSITIVE

AUDIO AMPLITUDE, mV = 8.79

PAGE NO. 39 of 43.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: FCC: 47 CFR 2.995(a)(1)
IC: RSS-119, Section 7.0

GUIDE: TIA/EIA-603, Paragraph 2.2.2

TEST CONDITIONS: As Indicated


TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

- TEST A. OPERATIONAL STABILITY
- TEST B. CARRIER FREQUENCY STABILITY
- TEST C. OPERATIONAL PERFORMANCE STABILITY
- TEST D. HUMIDITY
- TEST E. VIBRATION
- TEST F. ENVIRONMENTAL TEMPERATURE
- TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
- TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

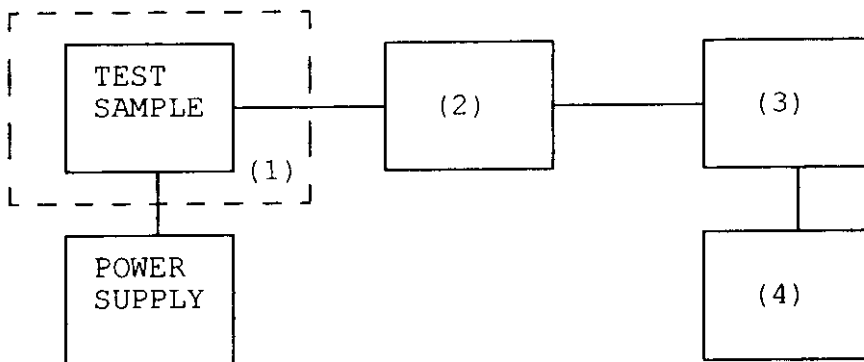

Asset Description s/n

(1) TEMPERATURE, HUMIDITY, VIBRATION

<u>x</u>	i00027	Tenny Temp. Chamber	9083-765-234
<u> </u>	i00	Weber Humidity Chamber	
<u> </u>	i00	L.A.B. RVH 18-100	

(2) COAXIAL ATTENUATOR

<u> </u>	i00122	NARDA 766-10	7802
<u> </u>	i00123	NARDA 766-10	7802A
<u>x</u>	i00113	SIERRA 661A-3D	1059
<u> </u>	i00069	BIRD 8329 (30 dB)	10066

(3) R.F. POWER

<u> </u>	i00014	HP 435A POWER METER	1733A05839
<u>x</u>	i00039	HP 436A POWER METER	2709A26776
<u>x</u>	i00020	HP 8901A POWER MODE	2105A01087


(4) FREQUENCY COUNTER

<u> </u>	i00042	HP 5383A	1628A00959
<u>x</u>	i00019	HP 5334B	2704A00347
<u>x</u>	i00020	HP 8901A	2105A01087

TRANSMITTER FREQUENCY STABILITY

KENWOOD, tk-890

11 SEP 1998, 15:34

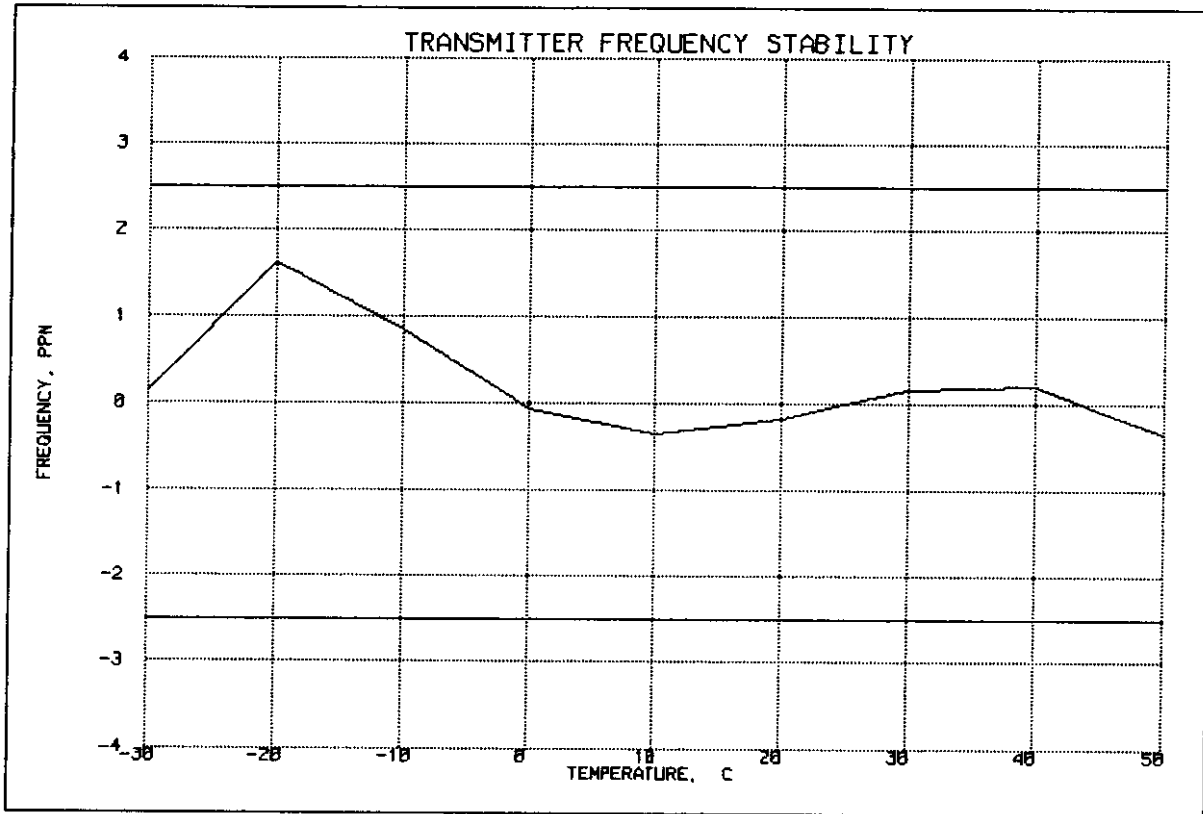

COPYRIGHT (C) 1998 BY N. FLOM ASSOCIATES, INC. ALL RIGHTS RESERVED.

FREQUENCY OF CARRIER, MHz = 469.99993

LIMIT, ppm = 2.5

LIMIT, Hz = 1175

PAGE NO. 42 of 43.
NAME OF TEST: Frequency Stability (Voltage Variation)
SPECIFICATION: FCC: 47 CFR 2.995 (b)(1)
 IC: RSS-119, Section 7.0
GUIDE: TIA/EIA-603, Paragraph 2.2.2
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)
 g9890118: 1998-Sep-11 Fri 15:05:09
 STATE: 0:General

LIMIT, ppm = 2.5
 LIMIT, Hz = 1175
 BATTERY END POINT (Voltage) = 11.1

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	11.39	470.000000	0	0.00
100	13.4	470.000000	0	0.00
115	15.41	470.000000	0	0.00
83	11.1	469.999990	-10	-0.02

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 43 of 43.
NAME OF TEST: Necessary Bandwidth and Emission Bandwidth
SPECIFICATION: FCC: 47 CFR 2.202(g)
 IC: N/A

MODULATION = 16K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz = 3
 MAXIMUM DEVIATION (D), kHz = 5
 CONSTANT FACTOR (K) = 1
 NECESSARY BANDWIDTH (B_n), kHz = $(2 \times M) + (2 \times D \times K)$
 = 16.0

MODULATION = 11K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz = 3
 MAXIMUM DEVIATION (D), kHz = 2.5
 CONSTANT FACTOR (K) = 1
 NECESSARY BANDWIDTH (B_n), kHz = $(2 \times M) + (2 \times D \times K)$
 = 11.0

Morton Flom P. Eng.

Morton Flom, P. Eng.

SUPERVISED BY:
END OF TEST REPORT

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:


Morton Flom, P. Eng.

STATEMENT OF QUALIFICATIONS

EDUCATION:

1. B. ENG. in ENGINEERING PHYSICS, 1949, McGill University, Montreal, Canada.
2. Post Graduate Studies, McGill University & Sir George Williams University, Montreal.

PROFESSIONAL AFFILIATIONS:

1. ARIZONA SOCIETY OF PROFESSIONAL ENGINEERS (NSPE), #026 031 821.
2. ORDER OF ENGINEERS (QUEBEC) 1949. #4534.
3. ASSOCIATION OF PROFESSIONAL ENGINEERS, GEOPHYSICISTS & GEOLOGISTS OF ALBERTA #5916.
4. REGISTERED ENGINEERING CONSULTANT - GOVERNMENT OF CANADA, DEPARTMENT OF COMMUNICATIONS. Radio Equipment Approvals.
5. IEEE, Lifetime Member No. 0417204 (member since 1947).

EXPERIENCE:

1. Research/Development/Senior Project Engineer, R.C.A. LIMITED (4 years).
2. Owner/Chief Engineer of Electronics. Design/Manufacturing & Cable TV Companies (10 years).
3. CONSULTING ENGINEER (over 25 years).


MORTON FLOM, P. Eng.