

MFA **M. Flom Associates, Inc. - Global Compliance Center**
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date: May 2, 2000

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Kenwood Communications Corporation
Equipment: TK-860HG-1 and TK-862HG-1
FCC ID: ALH29383210
FCC Rules: 22, 74, 90, 95


Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

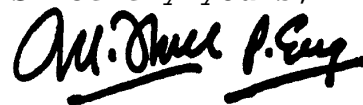

Morton Flom, P. Eng.

enclosure(s)
cc: Applicant
MF/cvr

LIST OF EXHIBITS
(FCC **CERTIFICATION** (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Kenwood Communications Corporation

FCC ID: ALH29383210

BY APPLICANT:

1. LETTER OF AUTHORIZATION
2. IDENTIFICATION DRAWINGS, 2.1033(c)(11)
 - ___ LABEL
 - ___ LOCATION OF LABEL
 - ___ COMPLIANCE STATEMENT
 - ___ LOCATION OF COMPLIANCE STATEMENT
3. PHOTOGRAPHS, 2.1033(c)(12)
4. DOCUMENTATION: 2.1033(c)
 - (3) USER MANUAL
 - (9) TUNE UP INFO
 - (10) SCHEMATIC DIAGRAM
 - (10) CIRCUIT DESCRIPTION
 - BLOCK DIAGRAM
 - PARTS LIST
 - ACTIVE DEVICES
5. PART 90.203(e) & (g) ATTESTATION

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS

MFA **M. Flom Associates, Inc. - Global Compliance Center**
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Sub-part
2.1033(c):

EQUIPMENT IDENTIFICATION

FCC ID: ALH29383210

NAMEPLATE DRAWING

ATTACHED, EXHIBIT 1.

LOCATION

AS PER LABEL DRAWING(S)

DATE OF REPORT

May 2, 2000

SUPERVISED BY:



Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.


Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

| <u>RULE</u> | <u>DESCRIPTION</u> | <u>PAGE</u> |
|---------------|--|-------------|
| | Test Report | 1 |
| 2.1033(c) | General Information Required | 2 |
| 2.1033(c)(14) | Rule Summary | 5 |
| | Standard Test Conditions and Engineering Practices | 6 |
| 2.1046(a) | Carrier Output Power (Conducted) | 7 |
| 2.1051 | Unwanted Emissions (Transmitter Conducted) | 9 |
| 2.1053(a) | Field Strength of Spurious Radiation | 13 |
| 2.1049(c)(1) | Emission Masks (Occupied Bandwidth) | 16 |
| 90.214 | Transient Frequency Behavior | 25 |
| 2.1047(a) | Audio Low Pass Filter (Voice Input) | 43 |
| 2.1047(a) | Audio Frequency Response | 46 |
| 2.1047(b) | Modulation Limiting | 47 |
| 2.1055(a)(1) | Frequency Stability (Temperature Variation) | 53 |
| 2.1055(b)(1) | Frequency Stability (Voltage Variation) | 57 |
| 2.202(g) | Necessary Bandwidth and Emission Bandwidth | 58 |

PAGE NO. 1 of 58.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

- a) TEST REPORT
- b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85224
- c) Report Number: d0050003
- d) Client: Kenwood Communications Corporation
P.O. Box 22745
Long Beach, CA 90801-5745
- e) Identification: TK-860HG-1 and TK-862HG-1
FCC ID: ALH29383210
Description: UHF FM Mobile Transceiver
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: May 2, 2000
EUT Received: April 20, 2000
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by: 
Morton Flom, P. Eng.
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 58.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

22, 74, 90, 95

Sub-part 2.1033

(c)(1): NAME AND ADDRESS OF APPLICANT:

Kenwood Communications Corporation
2201 E. Dominguez St
P.O. Box 22745
Long Beach, CA 90801-5745

MANUFACTURER:

Kenwood Electronics Technologies PTE Ltd.
1 Ang Mo Kio Street 63
Singapore 569110

(c)(2): FCC ID: ALH29383210

MODEL NO: TK-860HG-1 and TK-862HG-1

(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 16K0F3E, 11K0F3E, 16K0F1D,
11K2F1D


(c)(5): FREQUENCY RANGE, MHz: 450 to 490

(c)(6): POWER RATING, Watts: 10 to 40
 Switchable x Variable N/A

FCC GRANT NOTE: BG - The output power is continuously variable from the value listed in this entry to 25%030% of the value listed.

(c)(7): MAXIMUM POWER RATING, Watts: 300

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Association (A2LA) as shown in the scope below.



THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION

ACCREDITED LABORATORY

A2LA has accredited

M. FLOM ASSOCIATES, INC.
Chandler, AZ

for technical competence in the field of

Electrical (EMC) Testing


The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC Guide 25-1990 "General Requirements for the Competence of Calibration and Testing Laboratories" (equivalent to relevant requirements of the ISO 9000 series of standards) and any additional program requirements in the identified field of testing.

Presented this 24th day of November, 1998.



Peter Abjorn
President
For the Accreditation Council
Certificate Number 1008.01
Valid to December 31, 2000

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC GUIDE 25-1990 AND EN 45001

M. FLOM ASSOCIATES, INC.
Electronic Testing Laboratory
3356 North San Marcos Place, Suite 107
Chandler, AZ 85225
Morton Flom Phone: 480 926 3100

ELECTRICAL (EMC)

Valid to: December 31, 2000 Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetic compatibility tests:

| Tests | Standard(s) |
|-------------------------|--|
| RF Emissions | FCC Part 15 (Subparts B and C) using ANSI C63 4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; FCC Part 18; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1; CNS 13438 |
| RF Immunity | EN 50082-1; EN 50082-2; AS/NZS 4251.1 |
| Radiated Susceptibility | EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3 |
| ESD | EN 61000-4-2; IEC 1000-4-2; IEC 801-2 |
| EFT | EN 61000-4-4; IEC 1000-4-4; IEC 801-4 |
| Surge | EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5 |
| 47 CFR (FCC) | 2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97 |

Revised 2/2/2000

Peter Abjorn

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8370 • Phone: 301 644 3248 • Fax: 301 662 2974

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

PAGE NO. 4 of 58.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE, INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
 COLLECTOR VOLTAGE, Vdc = per manual
 SUPPLY VOLTAGE, Vdc = 13.6

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
 x N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

5 of 58.

Sub-part
2.1033(c)(14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- 21 - Domestic Public Fixed Radio Services
- 22 - Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- 22.901(d) - Alternative technologies and auxiliary services
- 23 - International Fixed Public Radiocommunication services
- 24 - Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- 80 - Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 - Aviation Services
- 90 - Private Land Mobile Radio Services
- 94 - Private Operational-Fixed Microwave Service
- 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 97 - Amateur Radio Service
- 101 - Fixed Microwave Services

PAGE NO.

6 of 58.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 58.
NAME OF TEST: Carrier Output Power (Conducted)
SPECIFICATION: 47 CFR 2.1046(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS
(Worst case)

FREQUENCY OF CARRIER, MHz = 470.1, 450.1, 489.9


| POWER SETTING | R. F. POWER, WATTS |
|---------------|--------------------|
| Low | 10 |
| High | 40 |

SUPERVISED BY:

Morton Flom, P. Eng.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
 TEST 2: FREQUENCY STABILITY

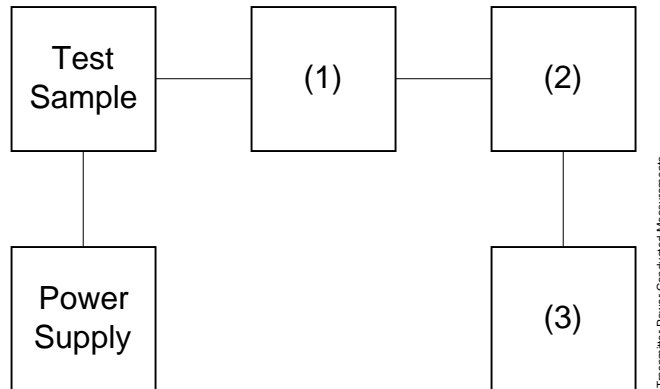

| Asset | Description (as applicable) | s/n |
|--------|--------------------------------|------------|
| (1) | <u>COAXIAL ATTENUATOR</u> | |
| i00122 | Narda 766-10 | 7802 |
| i00123 | Narda 766-10 | 7802A |
| i00069 | Bird 8329 (30 dB) | 1006 |
| i00113 | Sierra 661A-3D | 1059 |
| (2) | <u>POWER METERS</u> | |
| i00014 | HP 435A | 1733A05836 |
| i00039 | HP 436A | 2709A26776 |
| i00020 | HP 8901A POWER MODE | 2105A01087 |
| (3) | <u>FREQUENCY COUNTER</u> | |
| i00042 | HP 5383A | 1628A00959 |
| i00019 | HP 5334B | 2704A00347 |
| i00020 | HP 8901A FREQUENCY MODE | 2105A01087 |

PAGE NO. 9 of 58.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: 47 CFR 2.1051

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE


| | | |
|---------------------------|-----------------|--------------------------|
| FREQUENCY OF CARRIER, MHz | = | 470.1, 450.1, 489.9 |
| SPECTRUM SEARCHED, GHz | = | 0 to 10 x F _c |
| MAXIMUM RESPONSE, Hz | = | 3160 |
| ALL OTHER EMISSIONS | = | ≥ 20 dB BELOW LIMIT |
| LIMIT(S), dBc | | |
| | - (50+10xLOG P) | = -60 (10 Watts) |
| | - (50+10xLOG P) | = -66 (40 Watts) |

SUPERVISED BY:

Morton Flom, P. Eng.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
 TEST B. OUT-OF-BAND SPURIOUS

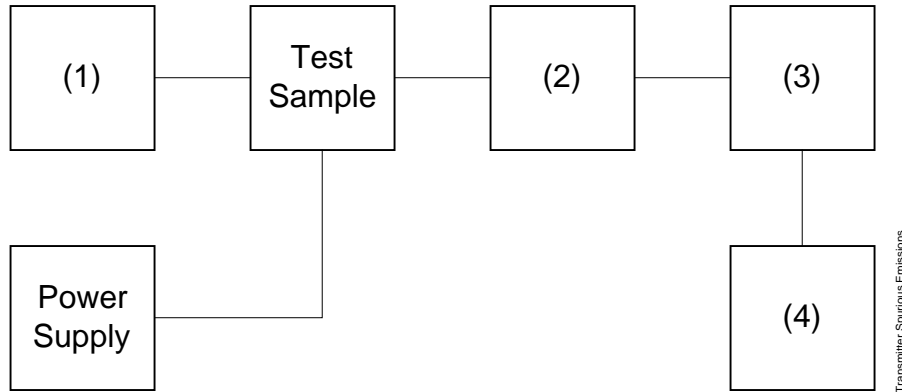

| Asset Description (as applicable) | s/n |
|---------------------------------------|------------|
| (1) <u>AUDIO OSCILLATOR/GENERATOR</u> | |
| i00010 HP 204D | 1105A04683 |
| i00017 HP 8903A | 2216A01753 |
| i00012 HP 3312A | 1432A11250 |
| (2) <u>COAXIAL ATTENUATOR</u> | |
| i00122 Narda 766-10 | 7802 |
| i00123 Narda 766-10 | 7802A |
| i00069 Bird 8329 (30 dB) | 1006 |
| i00113 Sierra 661A-3D | 1059 |
| (3) <u>FILTERS; NOTCH, HP, LP, BP</u> | |
| i00126 Eagle TNF-1 | 100-250 |
| i00125 Eagle TNF-1 | 50-60 |
| i00124 Eagle TNF-1 | 250-850 |
| (4) <u>SPECTRUM ANALYZER</u> | |
| i00048 HP 8566B | 2511A01467 |
| i00029 HP 8563E | 3213A00104 |

PAGE NO. 11 of 58.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g0040362: 2000-Apr-27 Thu 13:52:00
 STATE: 1:Low Power

| FREQUENCY TUNED, MHz | FREQUENCY EMISSION, MHz | LEVEL, dBm | LEVEL, dBc | MARGIN, dB |
|-------------------------|----------------------------|------------|------------|------------|
| 450.100000 | 900.013333 | -36.1 | -77.5 | -16.1 |
| 470.100000 | 940.206667 | -35.1 | -76.5 | -15.1 |
| 489.900000 | 979.778333 | -35.4 | -76.8 | -15.4 |
| 450.100000 | 1349.940000 | -36.8 | -78.2 | -16.8 |
| 470.100000 | 1410.360000 | -34.8 | -76.2 | -14.8 |
| 489.900000 | 1469.226667 | -36.3 | -77.7 | -16.3 |
| 450.100000 | 1800.038333 | -37.3 | -78.7 | -17.3 |
| 470.100000 | 1880.405000 | -35.1 | -76.5 | -15.1 |
| 489.900000 | 1959.578333 | -34.8 | -76.2 | -14.8 |
| 450.100000 | 2250.160000 | -36.9 | -78.3 | -16.9 |
| 470.100000 | 2350.083333 | -35.8 | -77.2 | -15.8 |
| 489.900000 | 2449.541667 | -35.8 | -77.2 | -15.8 |
| 450.100000 | 2700.468333 | -35.6 | -77 | -15.6 |
| 470.100000 | 2820.598333 | -34.9 | -76.3 | -14.9 |
| 489.900000 | 2939.013333 | -36.1 | -77.5 | -16.1 |
| 450.100000 | 3150.880000 | -36.8 | -78.2 | -16.8 |
| 470.100000 | 3290.406667 | -36.1 | -77.5 | -16.1 |
| 489.900000 | 3429.633333 | -36.8 | -78.2 | -16.8 |
| 450.100000 | 3601.078333 | -37.9 | -79.3 | -17.9 |
| 470.100000 | 3760.965000 | -36.8 | -78.2 | -16.8 |
| 489.900000 | 3918.843333 | -35.6 | -77 | -15.6 |
| 450.100000 | 4050.443333 | -37.3 | -78.7 | -17.3 |
| 470.100000 | 4231.048333 | -35.6 | -77 | -15.6 |
| 489.900000 | 4408.843333 | -37.1 | -78.5 | -17.1 |
| 450.100000 | 4500.935000 | -37.9 | -79.3 | -17.9 |
| 470.100000 | 4701.315000 | -35.9 | -77.3 | -15.9 |
| 489.900000 | 4899.240000 | -35.4 | -76.8 | -15.4 |
| 450.100000 | 4951.178333 | -38.3 | -79.7 | -18.3 |
| 470.100000 | 5171.353333 | -36.8 | -78.2 | -16.8 |
| 489.900000 | 5388.868333 | -35.6 | -77 | -15.6 |
| 450.100000 | 5400.818333 | -38.4 | -79.8 | -18.4 |
| 470.100000 | 5640.746667 | -36.8 | -78.2 | -16.8 |
| 450.100000 | 5851.333333 | -37.9 | -79.3 | -17.9 |
| 489.900000 | 5879.191667 | -35.9 | -77.3 | -15.9 |
| 470.100000 | 6111.701667 | -36.8 | -78.2 | -16.8 |
| 450.100000 | 6301.678333 | -37.9 | -79.3 | -17.9 |
| 489.900000 | 6369.101667 | -36.4 | -77.8 | -16.4 |
| 470.100000 | 6581.286667 | -34.9 | -76.3 | -14.9 |
| 450.100000 | 6751.280000 | -35.9 | -77.3 | -15.9 |
| 489.900000 | 6858.551667 | -35.8 | -77.2 | -15.8 |
| 470.100000 | 7051.890000 | -35.4 | -76.8 | -15.4 |
| 489.900000 | 7348.013333 | -35.8 | -77.2 | -15.8 |

PAGE NO. 12 of 58.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g0040361: 2000-Apr-27 Thu 13:49:00
 STATE: 2:High Power

| FREQUENCY TUNED, MHz | FREQUENCY EMISSION, MHz | LEVEL, dBm | LEVEL, dBc | MARGIN, dB |
|-------------------------|----------------------------|------------|------------|------------|
| 450.100000 | 900.056667 | -26.6 | -73 | -6.6 |
| 470.100000 | 940.375000 | -27.3 | -73.7 | -7.3 |
| 489.900000 | 979.728333 | -27.4 | -73.8 | -7.4 |
| 450.100000 | 1350.321667 | -27.3 | -73.7 | -7.3 |
| 470.100000 | 1410.270000 | -27.8 | -74.2 | -7.8 |
| 489.900000 | 1470.123333 | -27.8 | -74.2 | -7.8 |
| 450.100000 | 1800.508333 | -27.9 | -74.3 | -7.9 |
| 470.100000 | 1880.873333 | -27.6 | -74 | -7.6 |
| 489.900000 | 1959.405000 | -25.8 | -72.2 | -5.8 |
| 450.100000 | 2250.995000 | -26.4 | -72.8 | -6.4 |
| 470.100000 | 2350.540000 | -26.6 | -73 | -6.6 |
| 489.900000 | 2449.080000 | -27.6 | -74 | -7.6 |
| 450.100000 | 2700.921667 | -26.6 | -73 | -6.6 |
| 470.100000 | 2820.940000 | -26.4 | -72.8 | -6.4 |
| 489.900000 | 2939.671667 | -28.3 | -74.7 | -8.3 |
| 450.100000 | 3151.128333 | -28.1 | -74.5 | -8.1 |
| 470.100000 | 3290.881667 | -28.3 | -74.7 | -8.3 |
| 489.900000 | 3428.926667 | -26.9 | -73.3 | -6.9 |
| 450.100000 | 3600.491667 | -27.6 | -74 | -7.6 |
| 470.100000 | 3760.658333 | -28.6 | -75 | -8.6 |
| 489.900000 | 3919.113333 | -29.1 | -75.5 | -9.1 |
| 450.100000 | 4050.470000 | -28.9 | -75.3 | -8.9 |
| 470.100000 | 4230.686667 | -28.4 | -74.8 | -8.4 |
| 489.900000 | 4408.815000 | -28.6 | -75 | -8.6 |
| 450.100000 | 4500.641667 | -28.8 | -75.2 | -8.8 |
| 470.100000 | 4701.015000 | -28.1 | -74.5 | -8.1 |
| 489.900000 | 4899.023333 | -28.1 | -74.5 | -8.1 |
| 450.100000 | 4951.368333 | -27.8 | -74.2 | -7.8 |
| 470.100000 | 5171.261667 | -27.9 | -74.3 | -7.9 |
| 489.900000 | 5388.728333 | -28.6 | -75 | -8.6 |
| 450.100000 | 5400.936667 | -29.3 | -75.7 | -9.3 |
| 470.100000 | 5641.541667 | -27.4 | -73.8 | -7.4 |
| 450.100000 | 5851.350000 | -27.4 | -73.8 | -7.4 |
| 489.900000 | 5878.661667 | -28.4 | -74.8 | -8.4 |
| 470.100000 | 6111.041667 | -28.8 | -75.2 | -8.8 |
| 450.100000 | 6301.073333 | -28.1 | -74.5 | -8.1 |
| 489.900000 | 6368.233333 | -28.4 | -74.8 | -8.4 |
| 470.100000 | 6581.850000 | -27.1 | -73.5 | -7.1 |
| 450.100000 | 6751.180000 | -27.1 | -73.5 | -7.1 |
| 489.900000 | 6858.493333 | -28.1 | -74.5 | -8.1 |
| 470.100000 | 7051.980000 | -26.9 | -73.3 | -6.9 |
| 489.900000 | 7348.338333 | -26.8 | -73.2 | -6.8 |

PAGE NO. 13 of 58.
NAME OF TEST: Field Strength of Spurious Radiation
SPECIFICATION: 47 CFR 2.1053(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.12
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. A description of the measurement facilities was filed with the FCC and was found to be in compliance with the requirements of Section 2.948, by letter from the FCC dated March 3, 1997, FILE 31040/SIT. All pertinent changes will be reported to the Commission by up-date prior to March 2003.
2. At first, in order to locate all spurious frequencies and approximate amplitudes, and to determine proper equipment functioning, the test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
3. In the field, the test sample was placed on a wooden turntable above ground at three (or thirty) meters away from the search antenna. Excess power leads were coiled near the power supply.

The cables were oriented in order to obtain the maximum response. At each emission frequency, the turntable was rotated and the search antennas were raised and lowered vertically.
4. The emission was observed with both a vertically polarized and a horizontally polarized search antenna and the worst case was used.
6. The field strength of each emission within 20 dB of the limit was recorded and corrected with the appropriate cable and transducer factors.
7. The worst case for all channels is shown.
8. Measurement results: ATTACHED FOR WORST CASE

PAGE NO. 15 of 58.

NAME OF TEST: Field Strength of Spurious Radiation
 g0040381: 2000-Apr-28 Fri 08:37:00
 STATE: 2:High Power

| FREQUENCY TUNED, MHz | FREQUENCY EMISSION, MHz | METER, dBuV | CF, dB | ERP, dBm | MARGIN, dB |
|-------------------------|----------------------------|----------------|--------|-------------|------------|
| 470.100000 | 940.213000 | 31.94 | 33.58 | -31.9 | -11.9 |
| 470.100000 | 1410.300000 | 24.95 | 36.1 | -36.3 | -16.4 |
| 470.100000 | 1880.400000 | 21.61 | 40.73 | -35 | -15.1 |
| 470.100000 | 2350.508000 | 17.94 | 44.51 | -34.9 | -15 |
| 470.100000 | 2820.608000 | 9.01 | 48.2 | -40.2 | -20.2 |
| 470.100000 | 3290.700000 | 12.19 | 51.34 | -33.8 | -13.9 |
| 470.100000 | 3760.790000 | 15.36 | 52.55 | -29.5 | -9.5 |
| 470.100000 | 4230.911000 | 10.93 | 52.67 | -33.8 | -13.8 |
| 470.100000 | 4701.001000 | 11.14 | 52.86 | -33.4 | -13.4 |

PAGE NO. 16 of 58.
NAME OF TEST: Emission Masks (Occupied Bandwidth)
SPECIFICATION: 47 CFR 2.1049(c)(1)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

17 of 58.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0040386: 2000-Apr-27 Thu 11:28:00
STATE: 1:Low Power

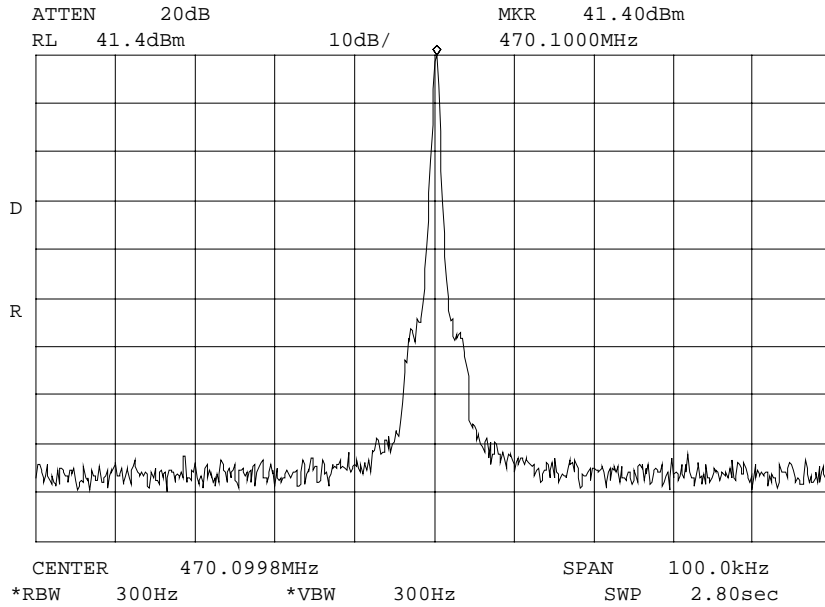


POWER: LOW
MODULATION: NONE

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 18 of 58.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0040391: 2000-Apr-27 Thu 12:15:00
STATE: 1:Low Power

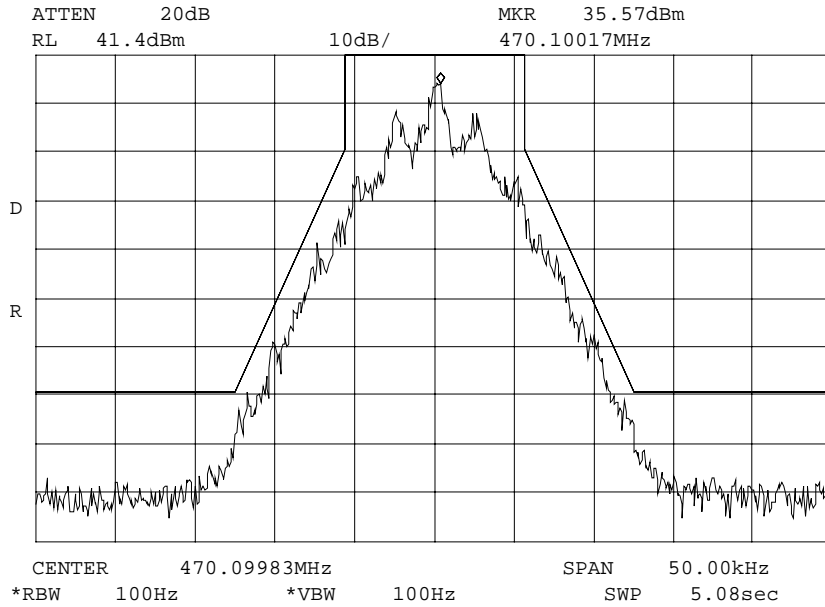

POWER :
MODULATION :


LOW
DATA @ 9600 BITS PER SECOND
MASK : D, VHF/UHF 12.5kHz BW

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO. 20 of 58.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0040385: 2000-Apr-27 Thu 11:26:00
STATE: 2:High Power

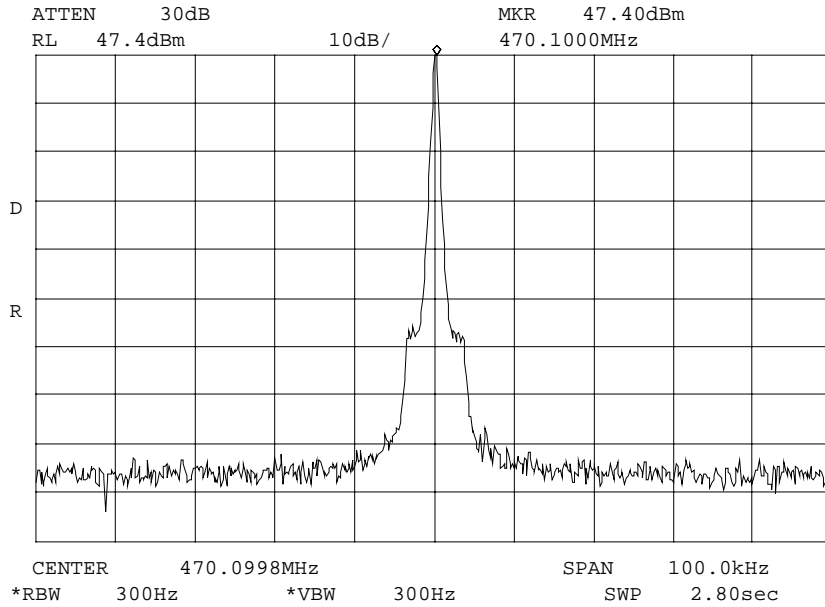


POWER: HIGH
MODULATION: NONE

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 21 of 58.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0040396: 2000-Apr-27 Thu 12:57:00
STATE: 2:High Power

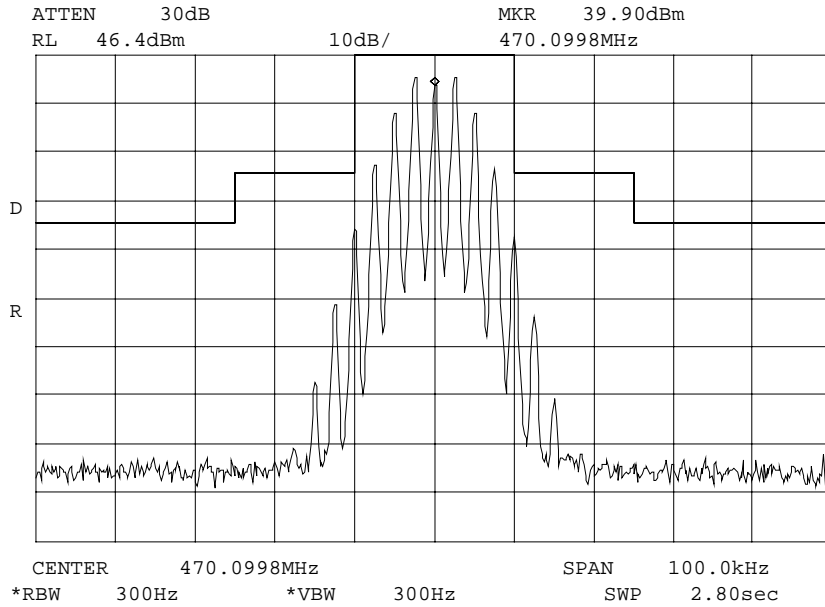

POWER :
MODULATION :


HIGH
VOICE : 2500 Hz SINE WAVE
MASK : B, VHF/UHF 25kHz,
w/LPF

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO. 22 of 58.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0040399: 2000-Apr-27 Thu 13:04:00
STATE: 2:High Power

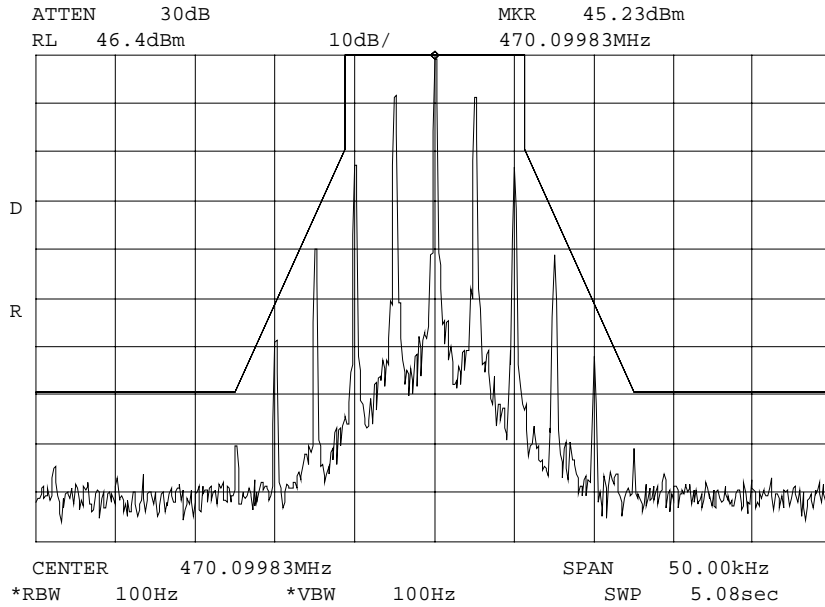

POWER :
MODULATION :


HIGH
VOICE : 2500 Hz SINE WAVE
MASK : D, VHF/UHF 12.5kHz BW

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO. 23 of 58.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0040397: 2000-Apr-27 Thu 12:59:00
STATE: 2:High Power

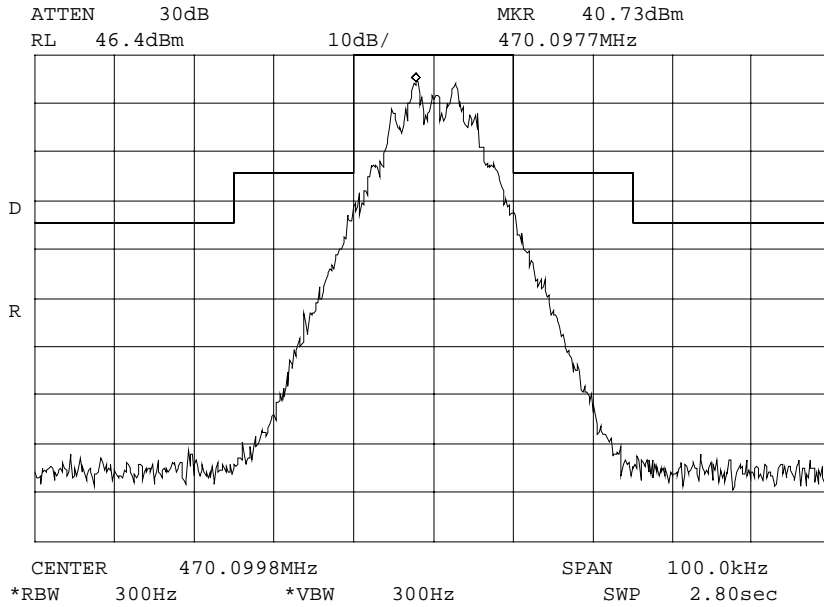

POWER:
MODULATION:


HIGH
DATA @ 19200 BITS PER
SECOND
MASK: B, VHF/UHF 25kHz,
w/LPF

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO. 24 of 58.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0040398: 2000-Apr-27 Thu 13:03:00
STATE: 2:High Power

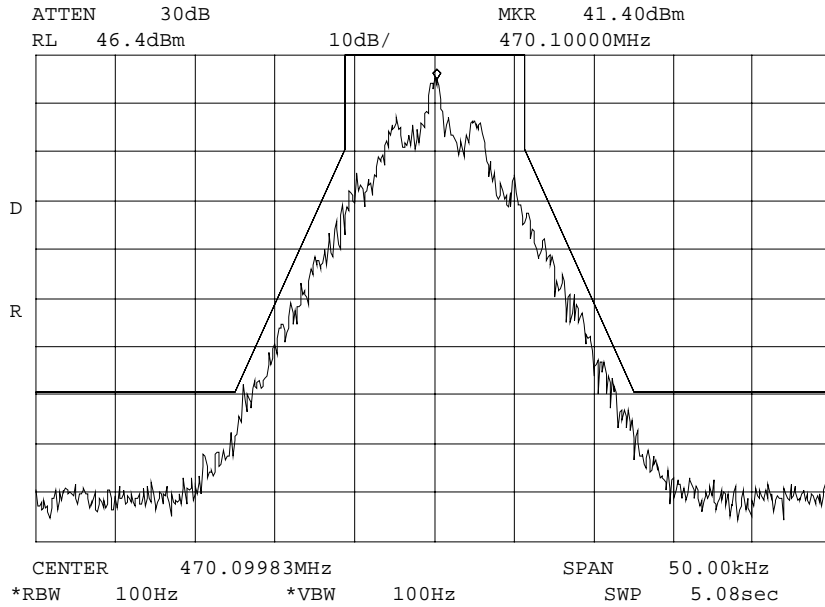

POWER :
MODULATION :

HIGH
DATA @ 9600 BITS PER SECOND
MASK : D, VHF/UHF 12.5kHz BW

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO. 25 of 58.
NAME OF TEST: Transient Frequency Behavior
SPECIFICATION: 47 CFR 90.214
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.19
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was setup as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a *guide*.
2. The transmitter was turned on.
3. Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded as step f.
4. The transmitter was turned off.
5. An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step f, as measured at the output of the combiner. This level was then fixed for the remainder of the test and is recorded at step h.
6. The oscilloscope was setup using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5 ms/div (VHF).
7. The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded as step l.
8. The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.

LEVELS MEASURED:


| | |
|---------------------|---------|
| <u>step f</u> , dBm | = -15.4 |
| <u>step h</u> , dBm | = -46.9 |
| <u>step l</u> , dBm | = 3.1 |



SUPERVISED BY:

Morton Flom, P. Eng.

TRANSIENT FREQUENCY BEHAVIOR

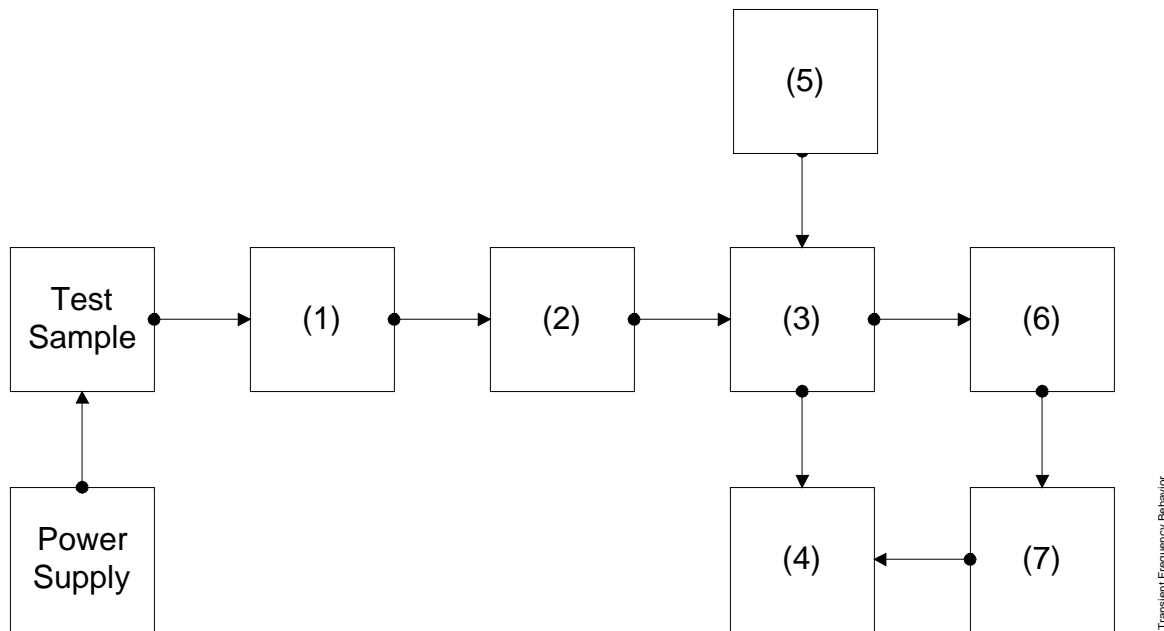


| Asset | Description (as applicable) | s/n |
|-------|--|--|
| (1) | <u>ATTENUATOR</u> (Removed after 1st step) i00112 Philco 30 dB | 989 |
| (2) | <u>ATTENUATOR</u> i00112 Philco 30 dB i00172 Bird 30 dB i00122 Narda 10 dB i00123 Narda 10 dB i00110 Kay Variable | 989 989 7802 7802A 145-387 |
| (3) | <u>COMBINER</u> i00154 4 x 25 Ω COMBINER | 154 |
| (4) | <u>CRYSTAL DETECTOR</u> i00159 HP 8470B | 1822A10054 |
| (5) | <u>RF SIGNAL GENERATOR</u> i00018 HP 8656A i00031 HP 8656A i00067 HP 8920A | 2228A03472 2402A06180 3345U01242 |
| (6) | <u>MODULATION ANALYZER</u> i00020 HP 8901A | 2105A01087 |
| (7) | <u>SCOPE</u> i00030 HP 54502A | 2927A00209 |

PAGE NO.

27 of 58.

NAME OF TEST: Transient Frequency Behavior
g0040364: 2000-Apr-27 Thu 14:37:00
STATE: 2:High Power

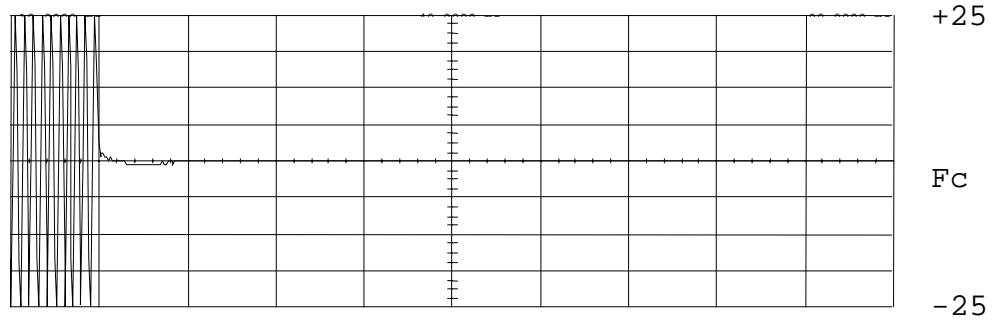

| Chan | Min/Max | Reflex/Dev | Reflex - | Mod |
|-----------|-----------|------------|----------|------------|
| channel 1 | EE0 MW/Hz | 0.00000 V | 1.000 1 | 2 (1M chn) |

Modulation mode: Freq
 As Modulation mode: AS: Auto
 Modulation: Freq1
 Span: 4.000 MHz (center mode: 0.000)
 Hz: 10.000 Hz

POWER:
MODULATION:
DESCRIPTION:


HIGH
Ref Gen=25 kHz Deviation
CARRIER ON TIME

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO. 29 of 58.

NAME OF TEST: Transient Frequency Behavior
 g0040366: 2000-Apr-27 Thu 14:41:00
 STATE: 2:High Power

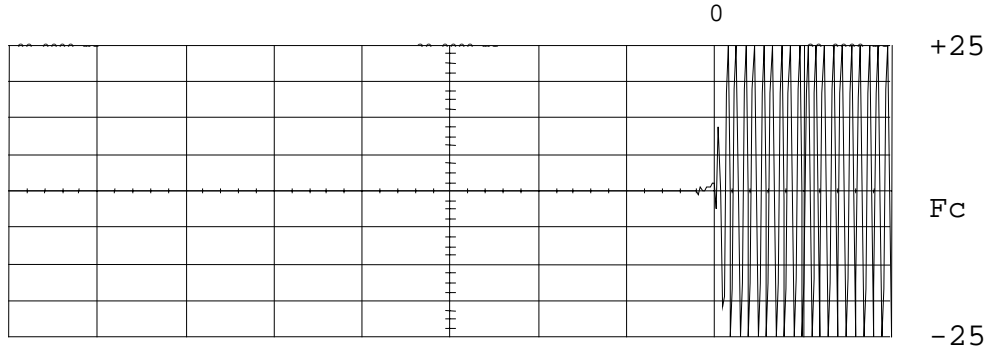

```

Main           Modulation      Rate/Dev      RefGen - Mod-
              10.0 MHz/div      20.0000 Hz      auto      Resolution
channel 1      EEO  MHz/div      0.00000 V      1.000 1 2 (1M chn)
    Modulation mode: Freq
    As resolution mode: 25 kHz
    Modulation type:
    Span: 143.750 MHz (center mode: 0 MHz)
    Resolution: 40.000 Hz
    
```

POWER: HIGH
 MODULATION: Ref Gen=25 kHz Deviation
 DESCRIPTION: CARRIER OFF TIME


SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO.

30 of 58.

NAME OF TEST: Transient Frequency Behavior
g0040367: 2000-Apr-27 Thu 14:41:00
STATE: 2:High Power

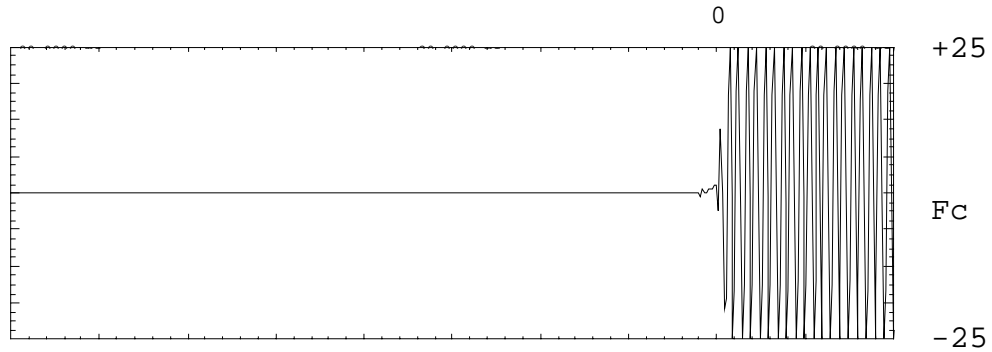

```

Wave      Min/Max      Rate/Sec      Refs     Mode
-----
channel 1  0.000000      0.000000      1.000  1  2 (1M ch)

```

POWER:
MODULATION:
DESCRIPTION:


HIGH
Ref Gen=25 kHz Deviation
CARRIER OFF TIME

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO. 31 of 58.

NAME OF TEST: Transient Frequency Behavior
g0040370: 2000-Apr-27 Thu 14:56:00
STATE: 2:High Power

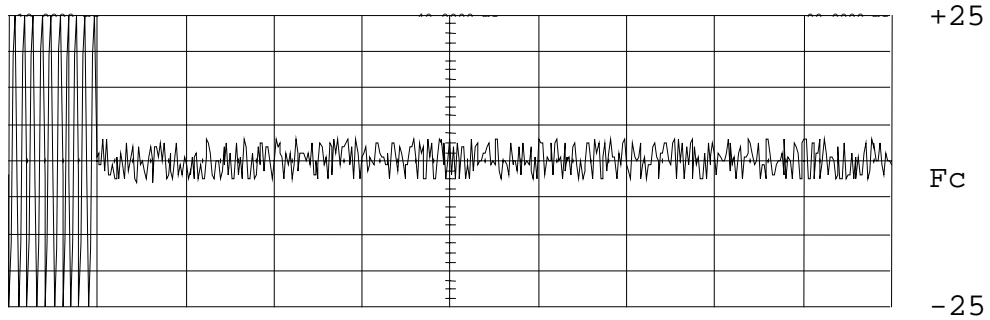

| Chan | Min/Max | Reflex/Dev | Reflex | Mod |
|-----------|-----------|------------|---------|------------|
| channel 1 | EE0 MW/Hz | 0.00000 V | 1.000 1 | 2 (1M chn) |

Modulation mode: Freq
 No. Modulation Modes: 05
 Modulation Type: 1
 Mod: 4.000 MHz (center mode 4.000)
 BW: 40.000 Hz

POWER:
MODULATION:
DESCRIPTION:

HIGH
Ref Gen=25 kHz Deviation
CARRIER ON TIME


SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO.

32 of 58.

NAME OF TEST: Transient Frequency Behavior
g0040371: 2000-Apr-27 Thu 14:57:00
STATE: 2:High Power

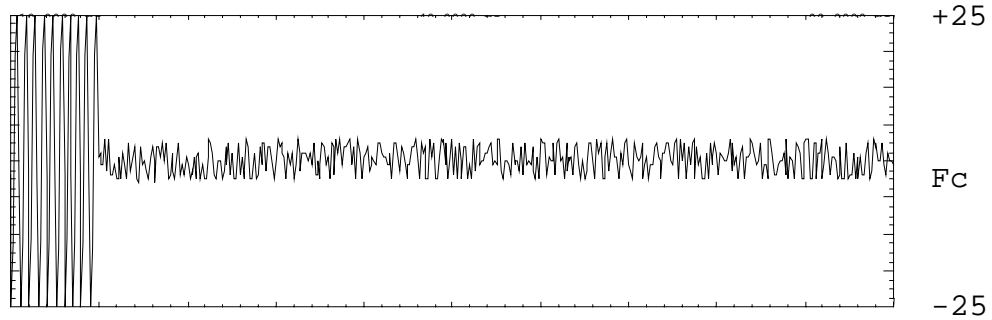

```

Wave      Min:Max      Ref:Ref      Ref:Ref      Mod:
10.0 MHz/div  40.0000 Hz  10000  10000  10000  10000

Channel 1  0.000000  0.000000  1.000  1  2 (1M ch)

Modulation: 0.000000  0.000000
Amplitude: 0.000000  0.000000
Phase: 0.000000  0.000000

```

POWER:
MODULATION:
DESCRIPTION:


HIGH
Ref Gen=25 kHz Deviation
CARRIER ON TIME

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO. 33 of 58.

NAME OF TEST: Transient Frequency Behavior
g0040368: 2000-Apr-27 Thu 14:43:00
STATE: 2:High Power

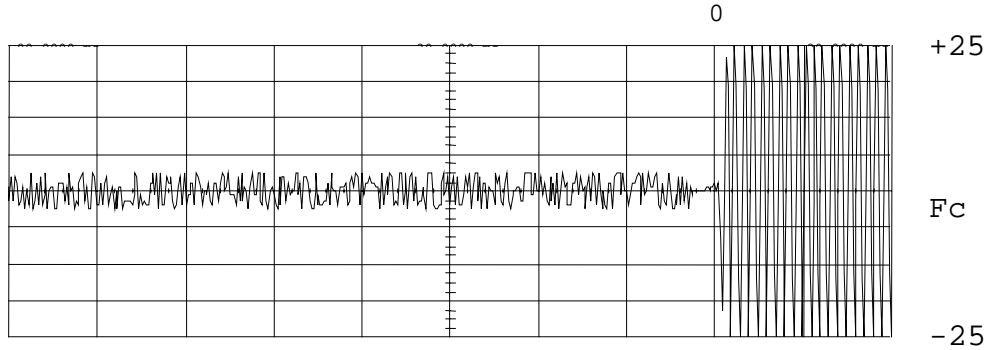

| Wave | Min/Max | Rate/Res | Ref/Gen | Mod |
|-----------|---------|----------|---------|------------|
| channel 1 | EE0 | 0.00000 | 1.000 | 2 (1M chn) |

Resolution: 250 Hz
 Span: 140.000 MHz
 Center: 143.250 MHz
 Scale: 40.000 dB

| | |
|--------------|--------------------------|
| POWER: | HIGH |
| MODULATION: | Ref Gen=25 kHz Deviation |
| DESCRIPTION: | CARRIER OFF TIME |

Morton Flom P. Eng.


SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO.

34 of 58.

NAME OF TEST: Transient Frequency Behavior
g0040369: 2000-Apr-27 Thu 14:44:00
STATE: 2:High Power

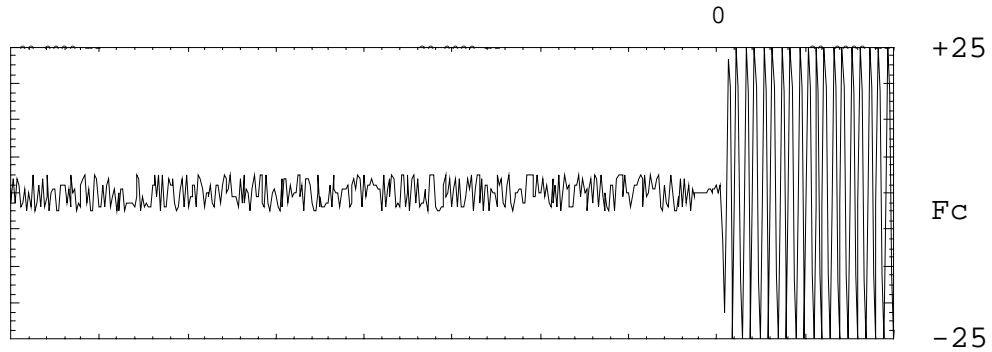

```

             Min/Max      Ref/Res      Ref/Res      Mod
             10.0 Hz/30.0 Hz      30.0000 Hz      30.0000 Hz      25.0000 Hz
             -----
             Channel 1      0.000000 V      1.000 1      2 (1M Ohm)
             -----
             Modulation Mode: FSK
             Modulation Rate: 1200
             Modulation Type: 1
             Modulation: 143.250 Hz (Carrier Mode: FSK)
             Modulation: 40.000 Hz

```

POWER:
MODULATION:
DESCRIPTION:

HIGH
Ref Gen=25 kHz Deviation
CARRIER OFF TIME


SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO.

35 of 58.

NAME OF TEST: Transient Frequency Behavior
g0040374: 2000-Apr-27 Thu 15:07:00
STATE: 2:High Power

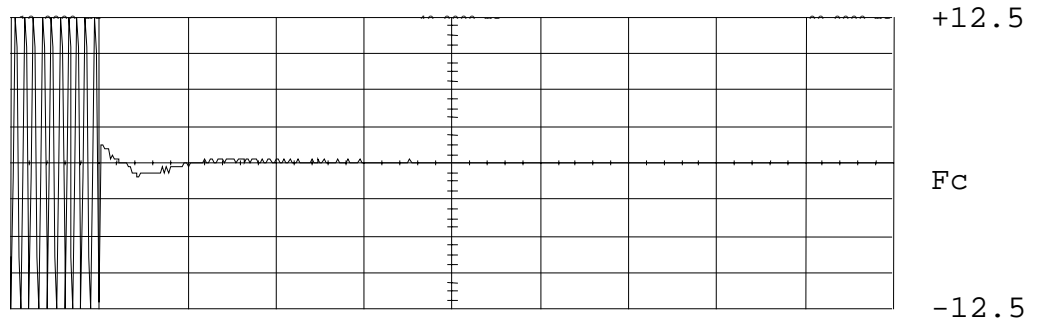

```

             Min:Max           Ref:Ref           Ref:Ref           Ref:Ref
             10.000000         40.000000         10.000000         40.000000
             0.000000         0.000000         0.000000         0.000000
             1.000000         1.000000         1.000000         1.000000
             2.000000         2.000000         2.000000         2.000000
             3.000000         3.000000         3.000000         3.000000
             4.000000         4.000000         4.000000         4.000000
             5.000000         5.000000         5.000000         5.000000
             6.000000         6.000000         6.000000         6.000000
             7.000000         7.000000         7.000000         7.000000
             8.000000         8.000000         8.000000         8.000000
             9.000000         9.000000         9.000000         9.000000
             10.000000        10.000000        10.000000        10.000000
             11.000000        11.000000        11.000000        11.000000
             12.000000        12.000000        12.000000        12.000000
             13.000000        13.000000        13.000000        13.000000
             14.000000        14.000000        14.000000        14.000000
             15.000000        15.000000        15.000000        15.000000
             16.000000        16.000000        16.000000        16.000000
             17.000000        17.000000        17.000000        17.000000
             18.000000        18.000000        18.000000        18.000000
             19.000000        19.000000        19.000000        19.000000
             20.000000        20.000000        20.000000        20.000000
             21.000000        21.000000        21.000000        21.000000
             22.000000        22.000000        22.000000        22.000000
             23.000000        23.000000        23.000000        23.000000
             24.000000        24.000000        24.000000        24.000000
             25.000000        25.000000        25.000000        25.000000
             26.000000        26.000000        26.000000        26.000000
             27.000000        27.000000        27.000000        27.000000
             28.000000        28.000000        28.000000        28.000000
             29.000000        29.000000        29.000000        29.000000
             30.000000        30.000000        30.000000        30.000000
             31.000000        31.000000        31.000000        31.000000
             32.000000        32.000000        32.000000        32.000000
             33.000000        33.000000        33.000000        33.000000
             34.000000        34.000000        34.000000        34.000000
             35.000000        35.000000        35.000000        35.000000
             36.000000        36.000000        36.000000        36.000000
             37.000000        37.000000        37.000000        37.000000
             38.000000        38.000000        38.000000        38.000000
             39.000000        39.000000        39.000000        39.000000
             40.000000        40.000000        40.000000        40.000000
             41.000000        41.000000        41.000000        41.000000
             42.000000        42.000000        42.000000        42.000000
             43.000000        43.000000        43.000000        43.000000
             44.000000        44.000000        44.000000        44.000000
             45.000000        45.000000        45.000000        45.000000
             46.000000        46.000000        46.000000        46.000000
             47.000000        47.000000        47.000000        47.000000
             48.000000        48.000000        48.000000        48.000000
             49.000000        49.000000        49.000000        49.000000
             50.000000        50.000000        50.000000        50.000000
             51.000000        51.000000        51.000000        51.000000
             52.000000        52.000000        52.000000        52.000000
             53.000000        53.000000        53.000000        53.000000
             54.000000        54.000000        54.000000        54.000000
             55.000000        55.000000        55.000000        55.000000
             56.000000        56.000000        56.000000        56.000000
             57.000000        57.000000        57.000000        57.000000
             58.000000        58.000000        58.000000        58.000000
             59.000000        59.000000        59.000000        59.000000
             60.000000        60.000000        60.000000        60.000000
             61.000000        61.000000        61.000000        61.000000
             62.000000        62.000000        62.000000        62.000000
             63.000000        63.000000        63.000000        63.000000
             64.000000        64.000000        64.000000        64.000000
             65.000000        65.000000        65.000000        65.000000
             66.000000        66.000000        66.000000        66.000000
             67.000000        67.000000        67.000000        67.000000
             68.000000        68.000000        68.000000        68.000000
             69.000000        69.000000        69.000000        69.000000
             70.000000        70.000000        70.000000        70.000000
             71.000000        71.000000        71.000000        71.000000
             72.000000        72.000000        72.000000        72.000000
             73.000000        73.000000        73.000000        73.000000
             74.000000        74.000000        74.000000        74.000000
             75.000000        75.000000        75.000000        75.000000
             76.000000        76.000000        76.000000        76.000000
             77.000000        77.000000        77.000000        77.000000
             78.000000        78.000000        78.000000        78.000000
             79.000000        79.000000        79.000000        79.000000
             80.000000        80.000000        80.000000        80.000000
             81.000000        81.000000        81.000000        81.000000
             82.000000        82.000000        82.000000        82.000000
             83.000000        83.000000        83.000000        83.000000
             84.000000        84.000000        84.000000        84.000000
             85.000000        85.000000        85.000000        85.000000
             86.000000        86.000000        86.000000        86.000000
             87.000000        87.000000        87.000000        87.000000
             88.000000        88.000000        88.000000        88.000000
             89.000000        89.000000        89.000000        89.000000
             90.000000        90.000000        90.000000        90.000000
             91.000000        91.000000        91.000000        91.000000
             92.000000        92.000000        92.000000        92.000000
             93.000000        93.000000        93.000000        93.000000
             94.000000        94.000000        94.000000        94.000000
             95.000000        95.000000        95.000000        95.000000
             96.000000        96.000000        96.000000        96.000000
             97.000000        97.000000        97.000000        97.000000
             98.000000        98.000000        98.000000        98.000000
             99.000000        99.000000        99.000000        99.000000
             100.000000       100.000000       100.000000       100.000000

```

POWER:
MODULATION:
DESCRIPTION:

HIGH
Ref Gen=12.5 kHz Deviation
CARRIER ON TIME


SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO.

37 of 58.

NAME OF TEST: Transient Frequency Behavior
g0040376: 2000-Apr-27 Thu 15:09:00
STATE: 2:High Power

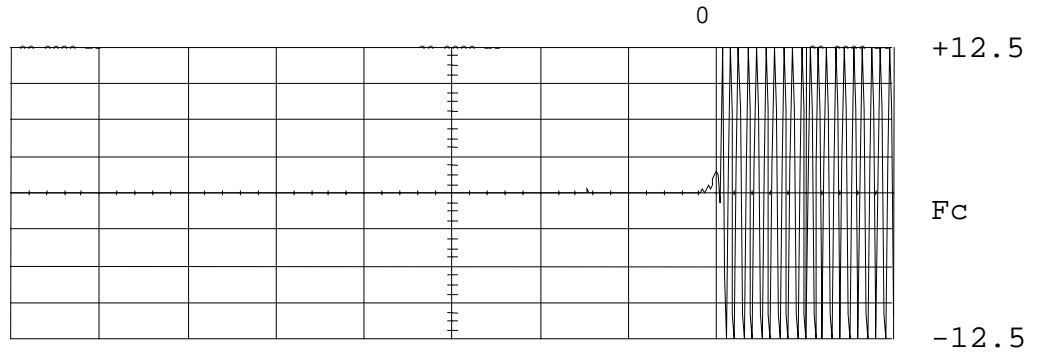

| Chan | Min/Max | Ref/Res | Ref/Res | Mod |
|---------|------------|-----------|---------|------------|
| Chan1 1 | 250 mV/div | 0.00000 V | 1.000 1 | 2 (1M ohm) |

Modulation mode: Freq
 As resolution mode: Off
 Modulation: Freq
 Span: 310.000 MHz (center mode: Off)
 Resolution: 40.000 Hz

POWER:
MODULATION:
DESCRIPTION:


HIGH
Ref Gen=12.5 kHz Deviation
CARRIER OFF TIME

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO. 39 of 58.

NAME OF TEST: Transient Frequency Behavior
g0040372: 2000-Apr-27 Thu 15:03:00
STATE: 2:High Power

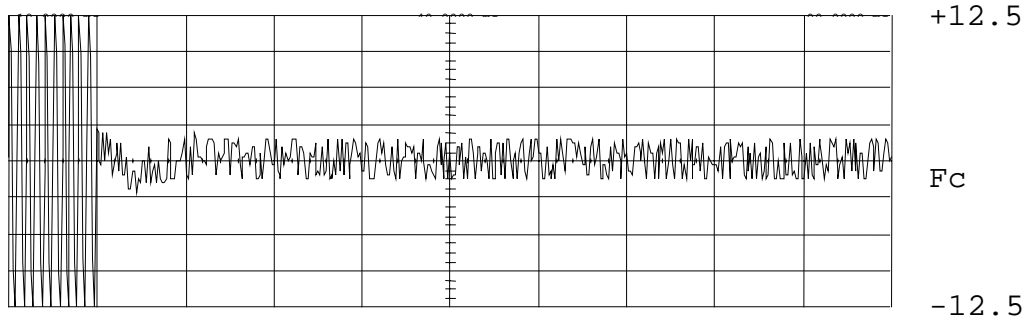

| Chan | Min/Max | Reflex/Dev | Reflex - | Mod |
|-----------|-------------|------------|----------|------------|
| channel 1 | 250 MHz/div | 0.00000 V | 1.000 1 | 2 (1M ohm) |

Modulation mode: FSK
 Asynchronous FSK AS: FSK
 Modulation type: 1
 Rate: 4.000 1M (auto mode 5.0M)
 U-12-55 40.000 Hz

POWER:
MODULATION:
DESCRIPTION:


HIGH
Ref Gen=12.5 kHz Deviation
CARRIER ON TIME

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO. 41 of 58.

NAME OF TEST: Transient Frequency Behavior
g0040378: 2000-Apr-27 Thu 15:11:00
STATE: 2:High Power

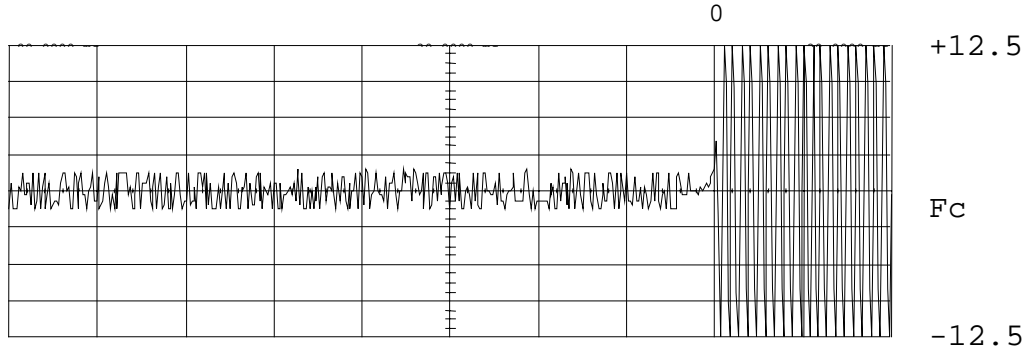

| Chan | Min/Max | Relat/Res | Ref/Gen | Mod |
|---------|------------|-----------|---------|------------|
| Chan1 1 | 250 mV/div | 0.00000 V | 1.000 1 | 2 (1M ohm) |

Modulation: 250 mV/div
 Res: 200.000 MHz
 Ref: 100.000 MHz
 Mod: 100.000 MHz

POWER:
MODULATION:
DESCRIPTION:

HIGH
Ref Gen=12.5 kHz Deviation
CARRIER OFF TIME

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.


PAGE NO. 43 of 58.
NAME OF TEST: Audio Low Pass Filter (Voice Input)
SPECIFICATION: 47 CFR 2.1047(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.15
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED


TRANSMITTER TEST SET-UP

- TEST A. MODULATION CAPABILITY/DISTORTION
- TEST B. AUDIO FREQUENCY RESPONSE
- TEST C. HUM AND NOISE LEVEL
- TEST D. RESPONSE OF LOW PASS FILTER
- TEST E. MODULATION LIMITING

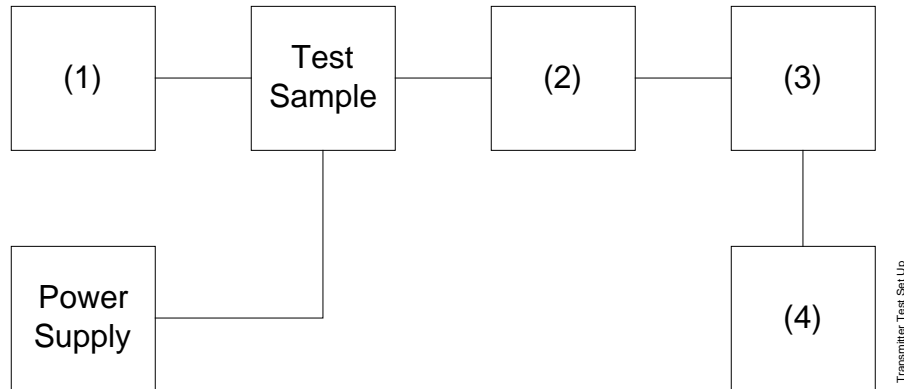

| Asset Description (as applicable) | s/n |
|--------------------------------------|------------|
| (1) <u>Audio Oscillator</u> | |
| i00010 HP 204D | 1105A04683 |
| i00017 HP 8903A | 2216A01753 |
| i00118 HP 33120A | US36002064 |
| (2) <u>COAXIAL ATTENUATOR</u> | |
| i00122 NARDA 766-10 | 7802 |
| i00123 NARDA 766-10 | 7802A |
| i00113 SIERRA 661A-3D | 1059 |
| i00069 BIRD 8329 (30 dB) | 10066 |
| (3) <u>MODULATION ANALYZER</u> | |
| i00020 HP 8901A | 2105A01087 |
| (4) <u>AUDIO ANALYZER</u> | |
| i00017 HP 8903A | 2216A01753 |

FREQUENCY RESPONSE OF AUDIO LOW PASS FILTER
p0040011: KENWOOD, TK-860HG-1 and TK-862HG-1
g0040352: 27 APR 2000, 08:40

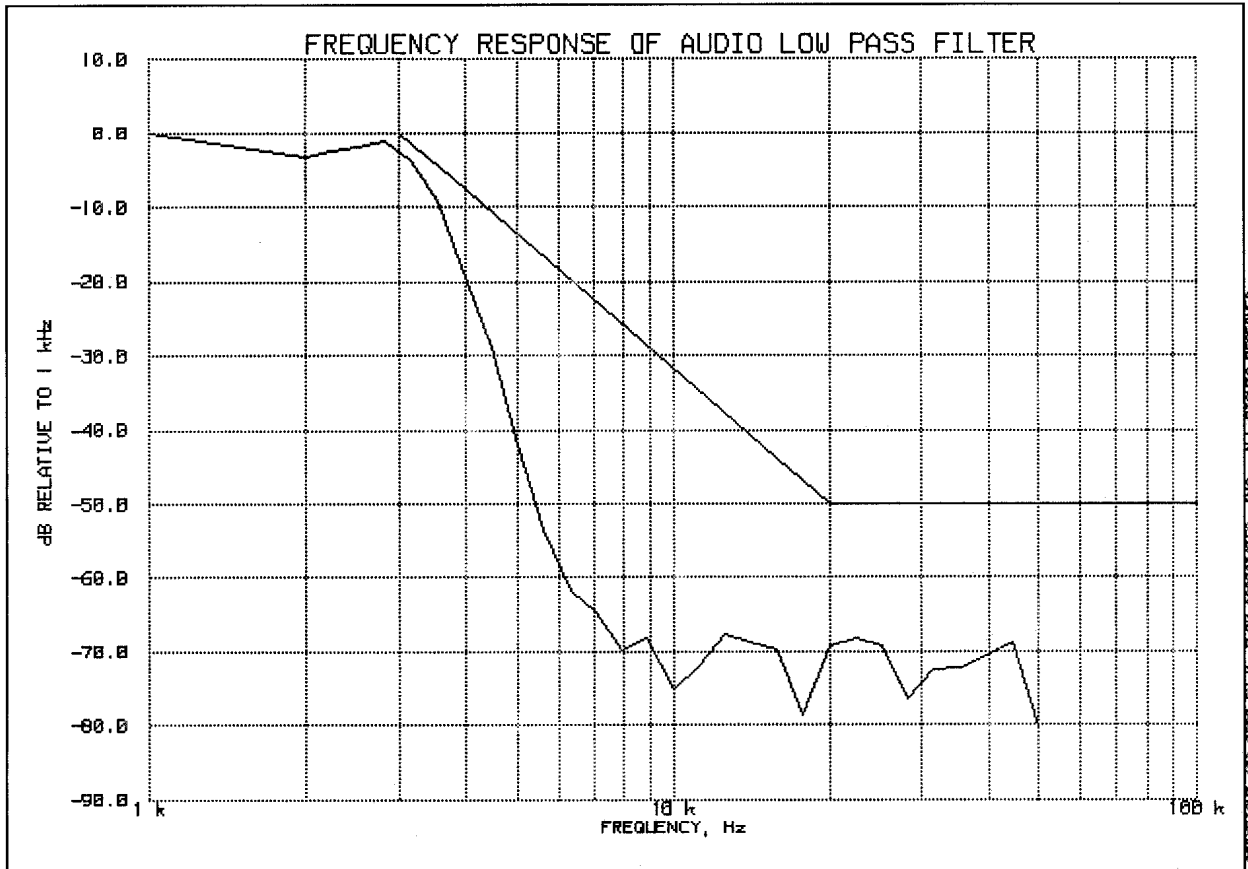

COPYRIGHT (C) 2000 BY M. FLOM ASSOCIATES, INC. ALL RIGHTS RESERVED.

PEAK AUDIO FREQUENCY, Hz: 2820

SUPERVISED BY:


Morton Flom, P. Eng.

PAGE NO. 46 of 58.
NAME OF TEST: Audio Frequency Response
SPECIFICATION: 47 CFR 2.1047(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER AUDIO FREQUENCY RESPONSE
 p0040011: KENWOOD, TK-860HG-1 and TK-862HG-1
 g0040351: 27 APR 2000, 08:35

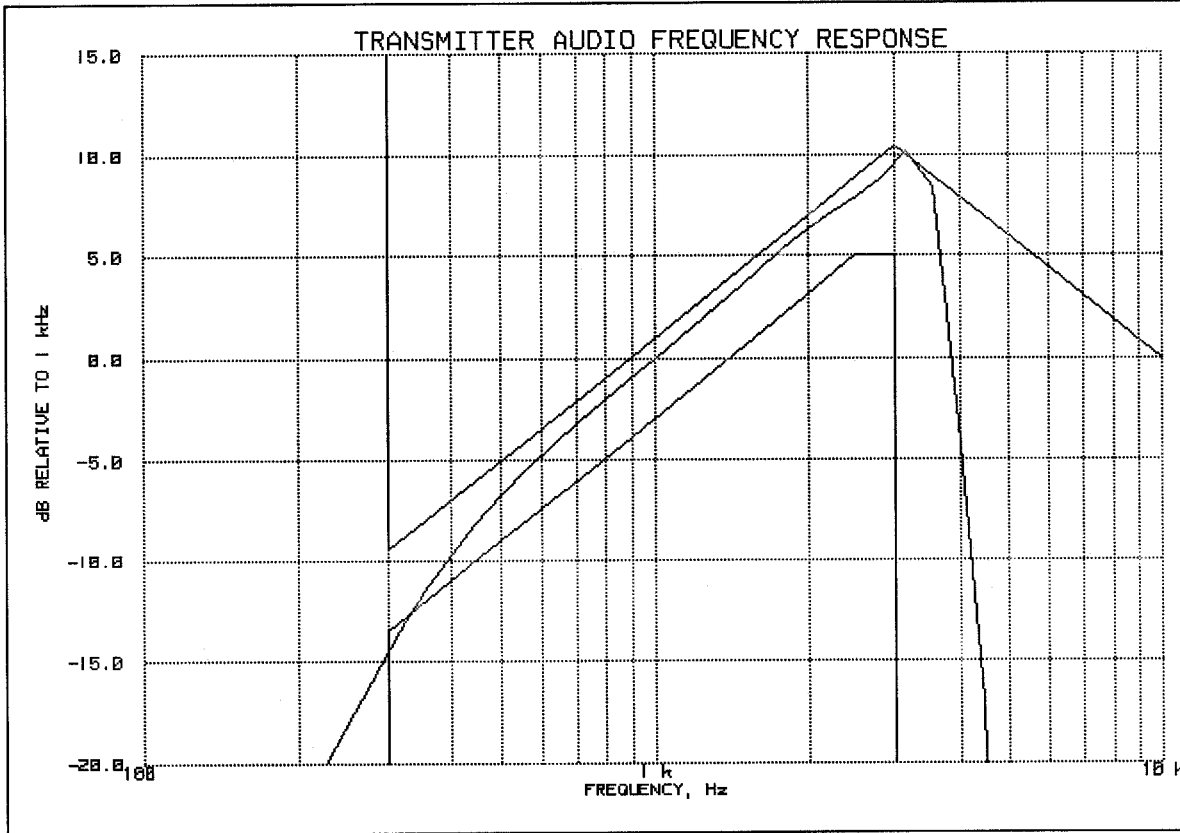

PEAK AUDIO FREQUENCY, Hz: 3160

TABLE VALUES:

| FREQUENCY, Hz | LEVEL, dB | FREQUENCY, Hz | LEVEL, dB |
|---------------|-----------|---------------|-----------|
| 300 | -14.4 | 30000 | -23.9 |

Morton Flom P. Eng.

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 48 of 58.
NAME OF TEST: Modulation Limiting
SPECIFICATION: 47 CFR 2.1047(b)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

MODULATION LIMITING

p0040011: KENWOOD, TK-860HG-1 and TK-862HG-1

g0040353: 2000-APR-27, 08:45

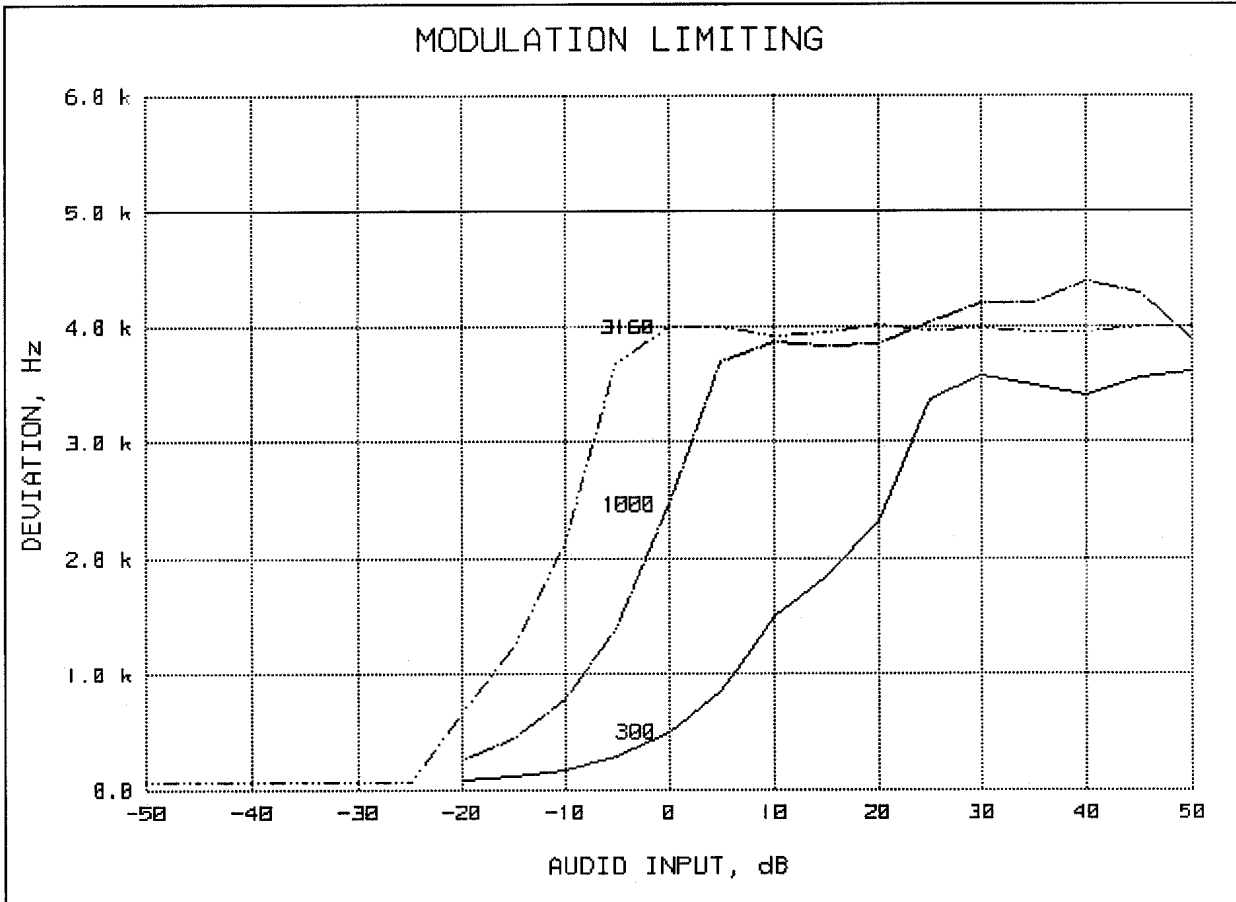

REFERENCE DEVIATION, kHz = 2.5
 REFERENCE MODULATION, Hz = 1000
 PEAKS = POSITIVE
 AUDIO AMPLITUDE, mV = 8.79

Morton Flom P. Eng.


SUPERVISED BY:

Morton Flom, P. Eng.

MODULATION LIMITING

p0040011: KENWOOD, TK-860HG-1 and TK-862HG-1

g0040353: 2000-APR-27, 08:45

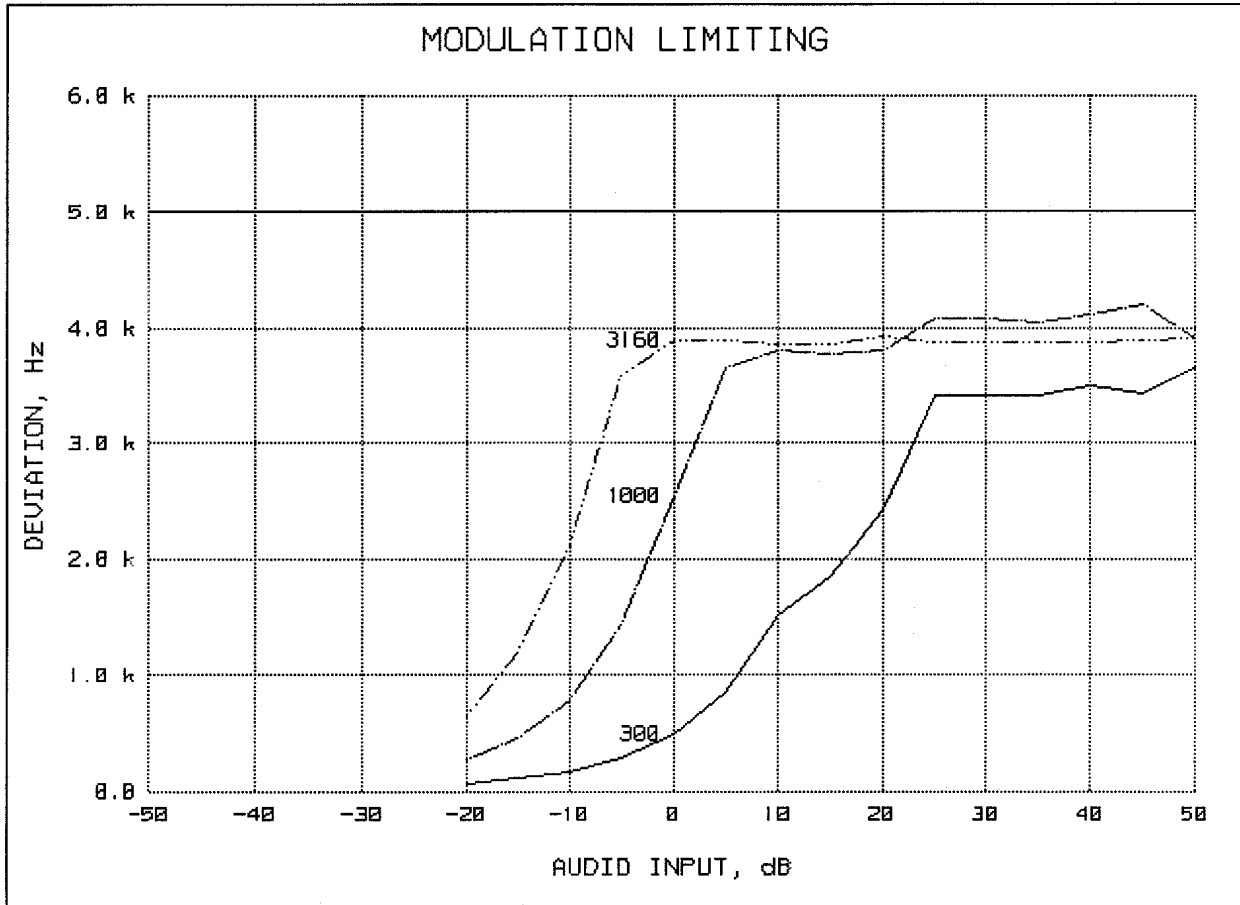

| | | |
|--------------------------|---|----------|
| REFERENCE DEVIATION, kHz | = | 2.5 |
| REFERENCE MODULATION, Hz | = | 1000 |
| PEAKS | = | NEGATIVE |
| AUDIO AMPLITUDE, mV | = | 8.79 |

Morton Flom P. Eng.


SUPERVISED BY:

Morton Flom, P. Eng.

MODULATION LIMITING

p0040011: KENWOOD, TK-860HG-1 and TK-862HG-1

g0040354: 2000-APR-27, 08:49

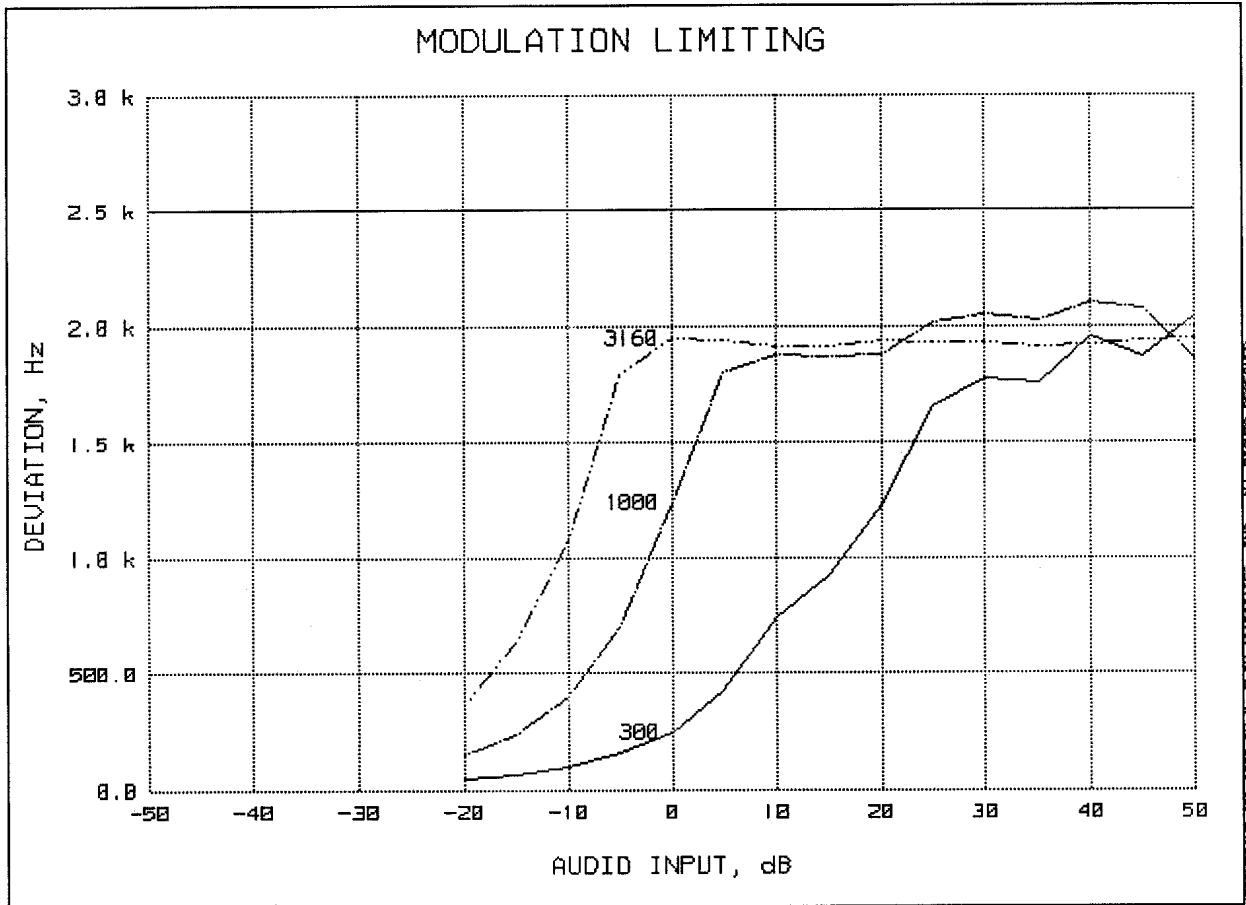

REFERENCE DEVIATION, kHz = 1.25

REFERENCE MODULATION, Hz = 1000

PEAKS = POSITIVE

AUDIO AMPLITUDE, mV = 9.1

Morton Flom P. Eng.


SUPERVISED BY:

Morton Flom, P. Eng.

MODULATION LIMITING

p0040011: KENWOOD, TK-860HG-1 and TK-862HG-1

g0040354: 2000-APR-27, 08:49

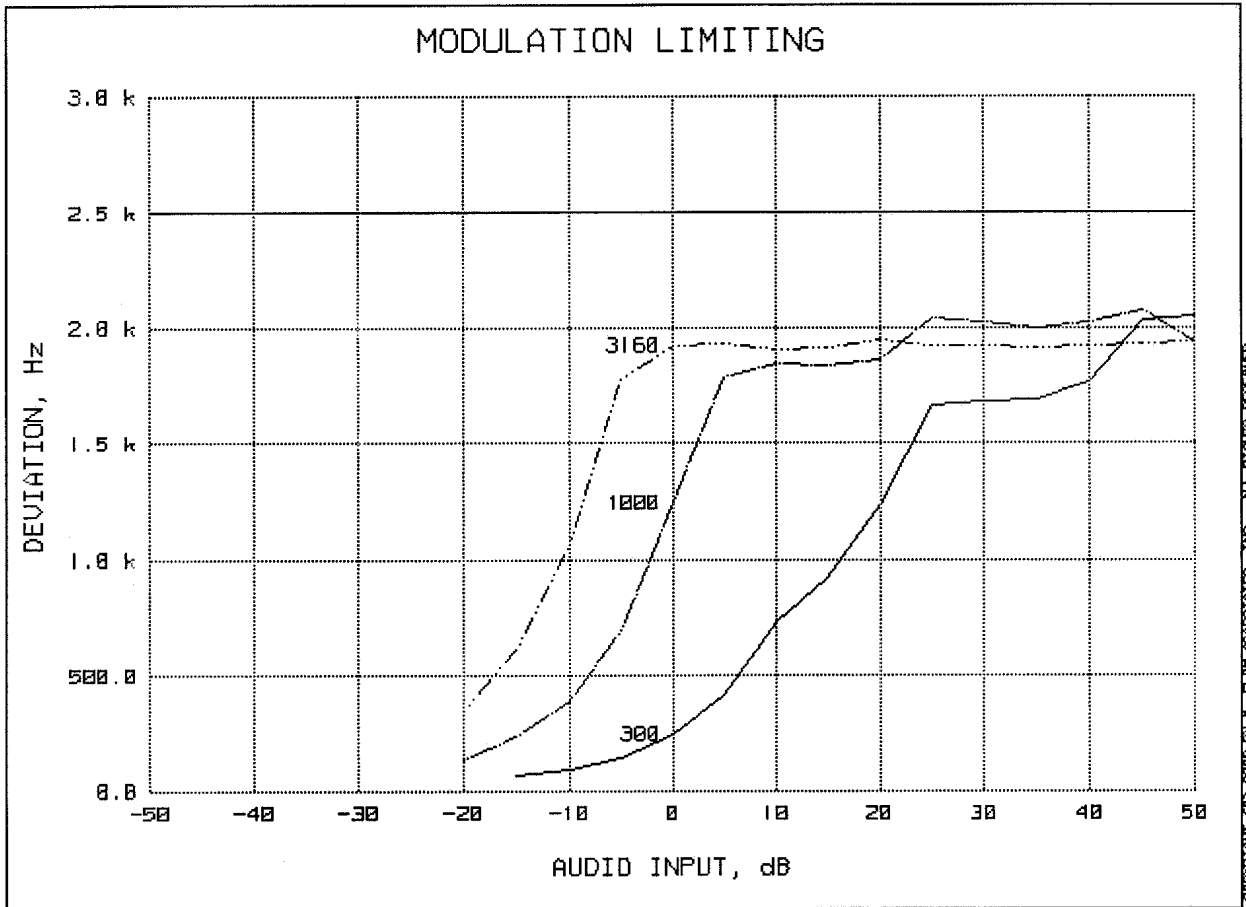

REFERENCE DEVIATION, kHz = 1.25
 REFERENCE MODULATION, Hz = 1000
 PEAKS = NEGATIVE
 AUDIO AMPLITUDE, mV = 9.1

Morton Flom P. Eng.

SUPERVISED BY:

Morton Flom, P. Eng.


PAGE NO. 53 of 58.
NAME OF TEST: Frequency Stability (Temperature Variation)
SPECIFICATION: 47 CFR 2.1055(a)(1)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2
TEST CONDITIONS: As Indicated
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

- TEST A. OPERATIONAL STABILITY
- TEST B. CARRIER FREQUENCY STABILITY
- TEST C. OPERATIONAL PERFORMANCE STABILITY
- TEST D. HUMIDITY
- TEST E. VIBRATION
- TEST F. ENVIRONMENTAL TEMPERATURE
- TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
- TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

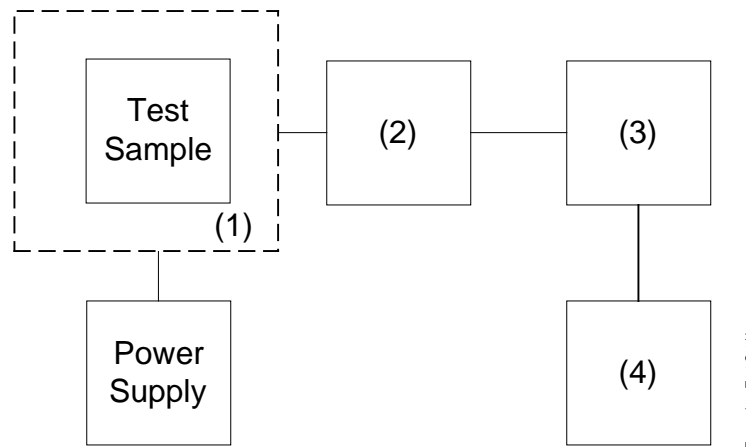


| Asset Description (as applicable) | s/n |
|---|--------------|
| <u>(1) TEMPERATURE, HUMIDITY, VIBRATION</u> | |
| i00027 Tenny Temp. Chamber | 9083-765-234 |
| i00 Weber Humidity Chamber | |
| i00 L.A.B. RVH 18-100 | |
| <u>(2) COAXIAL ATTENUATOR</u> | |
| i00122 NARDA 766-10 | 7802 |
| i00123 NARDA 766-10 | 7802A |
| i00113 SIERRA 661A-3D | 1059 |
| i00069 BIRD 8329 (30 dB) | 10066 |
| <u>(3) R.F. POWER</u> | |
| i00014 HP 435A POWER METER | 1733A05839 |
| i00039 HP 436A POWER METER | 2709A26776 |
| i00020 HP 8901A POWER MODE | 2105A01087 |
| <u>(4) FREQUENCY COUNTER</u> | |
| i00042 HP 5383A | 1628A00959 |
| i00019 HP 5334B | 2704A00347 |
| i00020 HP 8901A | 2105A01087 |

PAGE NO.

55 of 58.

NAME OF TEST: Frequency Stability (Temperature Variation)
g0040355: 2000-Apr-27 Thu 15:37:00
STATE: 0:General

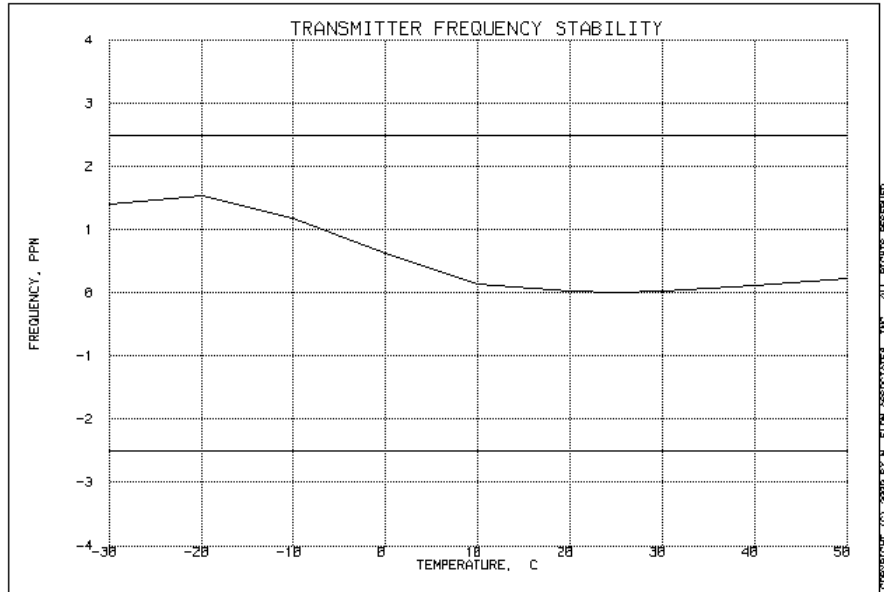

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO.

56 of 58.

PAGE INTENTIONALLY LEFT BLANK

PAGE NO. 57 of 58.
NAME OF TEST: Frequency Stability (Voltage Variation)
SPECIFICATION: 47 CFR 2.1055(b)(1)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

STATE:

LIMIT, ppm = ± 2.5
 LIMIT, Hz = 1125
 BATTERY END POINT (Voltage) = N/A

| % of STV | Voltage | Frequency, MHz | Change, Hz | Change, ppm |
|----------|---------|----------------|------------|-------------|
|----------|---------|----------------|------------|-------------|

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 58 of 58.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 16K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz = 3
 MAXIMUM DEVIATION (D), kHz = 5
 CONSTANT FACTOR (K) = 1
 NECESSARY BANDWIDTH (B_N), kHz = (2xM)+(2xDxK)
 = 16.0

MODULATION = 11K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz = 3
 MAXIMUM DEVIATION (D), kHz = 2.5
 CONSTANT FACTOR (K) = 1
 NECESSARY BANDWIDTH (B_N), kHz = (2xM)+(2xDxK)
 = 11.0

MODULATION = 16K0F1D

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz = 3
 MAXIMUM DEVIATION (D), kHz = 5
 CONSTANT FACTOR (K) = 1
 NECESSARY BANDWIDTH (B_N), kHz = (2xM)+(2xDxK)
 = 16.0

MODULATION = 11K2F1D

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz = 1.875
 MAXIMUM DEVIATION (D), kHz = 3.75
 CONSTANT FACTOR (K) = 1
 NECESSARY BANDWIDTH (B_N), kHz = (2xM)+(2xDxK)
 = 11.2

SUPERVISED BY:

Morton Flom, P. Eng.

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.