



M. Flom Associates, Inc.

International Compliance Testing Laboratory

3356 N. San Marcos Place, Suite 107
Chandler, AZ 85225

toll-free: (866) 311-3268
fax: (480) 926-3598

<http://www.mflom.com>
info@mflom.com

Date: September 20, 2004

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Kenwood USA Corporation
Equipment: TKR-850-2
FCC ID: ALH31113120
FCC Rules: 90, 90.210, Class II Permissive Change

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown i.e.:

- a) Application Form
- b) Test Report
- c) Expository Statement

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

Michael Schafer,
General Manager

enclosure(s)
MS/del



M. Flom Associates, Inc.

International Compliance Testing Laboratory

3356 N. San Marcos Place, Suite 107
Chandler, AZ 85225

toll-free: (866) 311-3268
fax: (480) 926-3598

<http://www.mflom.com>
info@mflom.com

Transmitter Certification

of

FCC ID: ALH31113120

Model: TKR-850-2

to

Federal Communications Commission

Rule Part(s) 90, 90.210,
Class II Permissive Change

Date of report: September 24, 2004

On the Behalf of the Applicant:

Kenwood USA Corporation

At the Request of:

P.O. UPS040831

Kenwood USA Corporation
Communications Division
3975 Johns Creek Court, Suite 300
Suwanee, GA 30024

Attention of:

Joel E. Berger, Research & Development
JBerger@kenwoodusa.com
(678) 474-4722; FAX: -4731

Supervised By:


David E. Lee,
Compliance Test Manager

Table of Contents

<u>Rule</u>	<u>Description</u>	<u>Page</u>
	Test Report	1
2.1033(c)(14)	Rule Summary	2
	Standard Test Conditions and Engineering Practices	3
	Expository Statement for Permissive Changes	5
2.1033(c)	General Information Required	6
2.1046(a)	Carrier Output Power (Conducted)	8
2.1046(a)	RF Power Output (Radiated)	9
2.1053(a)	Field Strength of Spurious Radiation	11

Page Number 1 of 14.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

- a) **Test Report**
- b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225
- c) Report Number: d0490043
- d) Client: Kenwood USA Corporation
Communications Division
3975 Johns Creek Court, Suite 300
Suwanee, GA 30024
- e) Identification: TKR-850-2
FCC ID: ALH31113120
EUT Description: UHF FM Repeater
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: September 24, 2004
EUT Received: 2004-Aug-31
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised By: 
David E. Lee,
Compliance Test Manager
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

Page Number

2 of 14.

Sub-part

2.1033(c)(14):**Test and Measurement Data**

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- 21 - Domestic Public Fixed Radio Services
- 22 - Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- 22.901(d) - Alternative technologies and auxiliary services
- 23 - International Fixed Public Radiocommunication services
- 24 - Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- 80 - Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radio Beacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 - Aviation Services
- 90 - Private Land Mobile Radio Services
- 94 - Private Operational-Fixed Microwave Service
- 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 97 - Amateur Radio Service
- 101 - Fixed Microwave Services

**Standard Test Conditions
and
Engineering Practices**

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2001, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.



A2LA

"A2LA has accredited M. Flom Associates, Inc. Chandler, AZ for technical competence in the field of Electrical Testing. The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 'General Requirements for the Competence of Testing and Calibration Laboratories' and any additional program requirements in the identified field of testing."

Certificate Number: **2152-01**



UNITED STATES DEPARTMENT OF COMMERCE
National Institute of Standards and Technology
Gaithersburg, Maryland 20899

September 15, 1999

Mr. Morton Flom
M. Flom Associates Inc.
3356 N. San Marcos Place, Suite 107
Chandler, AZ 85224

Dear Mr. Flom:

I am pleased to inform you that your laboratory has been validated by the Chinese Taipei Bureau of Standards, Metrology, and Inspection (BSMI) under the Asia Pacific Economic Cooperation Mutual Recognition Arrangement (APEC MRA). Your laboratory is now formally designated to act as a Conformity Assessment Body (CAB) under Appendix B, Phase I Procedures, of the APEC MRA between the American Institute in Taiwan (AIT) and the Taipei Economic and Cultural Representative Office (TECRO) in the United States, covering equipment subject to Electro-Magnetic Compatibility (EMC) requirements. The names of all validated and nominated laboratories will be posted on the NIST website at <http://ts.nist.gov/mra> under the "Asia" category.

As of August 1, 1999, you may submit test data to BSMI to verify that the equipment to be imported into Chinese Taipei satisfies the applicable EMC requirements. Your assigned BSMI number is SL2-IN-E-041R; you must use this number when sending test reports to BSMI. Your designation will remain in force as long as your NVLAP and/or A2LA and/or BSMI accreditation remains valid for the CNS 13438.

Please note that BSMI requires that the entity making application for the approval of regulated equipment must make such application in person at their Taipei office. BSMI also requests the names of the authorized signatories who are authorized to sign the test reports. You can send this information via fax to C-Taipei CAB Response Manager at 301-975-5414. I am also enclosing a copy of the cover sheet that, according to BSMI requirements, must accompany every test report.

NIST

If you have any questions, please contact Robert Gladhill at 301-975-4273 or Joe Dhillon at 301-975-5521. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,

Belinda L. Collins
Belinda L. Collins, Ph.D.
Director, Office of Standards Services

Enclosure

NIST

I am pleased to inform you that your laboratory has been validated by the Chinese Taipei Bureau of Standards, Metrology and Inspection (BSMI) under the Asia Pacific Economic Cooperation Mutual Recognition Agreement (APEC MRA). Your laboratory is now formally designated to act as a Conformity Assessment Body (CAB) under Appendix B, Phase I Procedures, of the APEC MRA between the American Institute in Taiwan (AIT) and the Taipei Economic and Cultural Representative Office (TECRO) in the United States, covering equipment subject to Electro-Magnetic Compatibility (EMC) requirements. The names of all validated and nominated laboratories will be posted on the NIST website at <http://ts.nist.gov/mra> under the 'Asia' category."

BSMI Number: **SL2-IN-E-041R**

Page Number 5 of 14.

Expository Statement
Permissive Change

Applicant: Kenwood USA Corporation

FCC ID: ALH31113120

The applicant has made design changes/improvements to the originally FCC approved equipment.

Data contained herein confirms that a Permissive Change to the unit has been effected and that the performance of the unit is at or better than the levels originally reported to the commission.

The following changes/improvements have been made:

The applicant desires to market the units as a family with common parameters and has adjusted the output levels for High and Low Power to be the same between TKR-850-1 and TKR-850-2. The levels requested on the Grant for the TKR-850-2 (ALH31113120) are 15W and 40W and the attached Test Report supports these settings and show that there is no change in the essential RF characteristics of the device.

Page Number 6 of 14.

List of General Information Required for Certification

In Accordance with FCC Rules and Regulations,
Volume II, Part 2 and to

Parts 90, 90.210

Sub-part 2.1033

(c)(1): Name and Address of Applicant:

Kenwood USA Corporation
Communications Division
3975 Johns Creek Court, Suite 300
Suwanee, GA 30024

Manufacturer:

Kenwood Electronics Technologies PTE Ltd.
1 Ang Mo Kio Street 63
Singapore 569110

(c)(2): FCC ID: ALH31113120

Model Number: TKR-850-2

(c)(4): Type of Emission: 16K0F3E, 11K0F3E

(c)(5): Frequency Range, MHz: 480 to 512

(c)(6): Power Rating, Watts: 15 to 40
 Switchable Variable N/A

(c)(7): Maximum Power Rating, Watts: 300

DUT Results: Passes Fails

Page Number 7 of 14.

Subpart 2.1033 (continued)

(c)(8): Voltages & currents in all elements in final RF stage, including final transistor or solid-state device:

Collector Current, A	=	per manual
Collector Voltage, Vdc	=	per manual
Supply Voltage, Vdc	=	13.6

(c)(14): **Test and Measurement Data:**


Follows

Page Number 8 of 14.
Name of Test: Carrier Output Power (Conducted)
Specification: 47 CFR 2.1046(a)
Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

Measurement Procedure

- A) The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an RF Power Meter.
- B) Measurement accuracy is $\pm 3\%$.

Transmitter Test Set-Up: RF Power Output

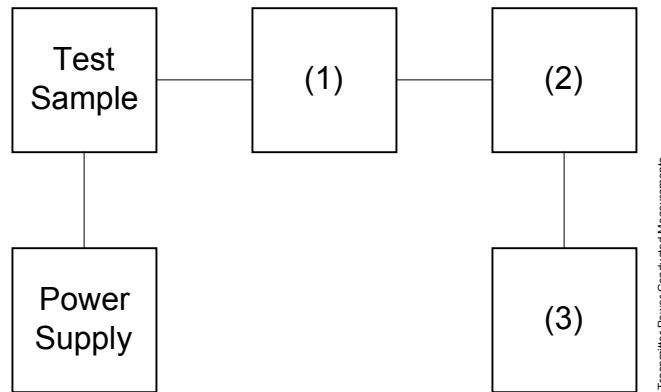

Asset	Description	s/n	Cycle	Last Cal
(1)	Coaxial Attenuator			
X i00231/2	PASTERNAK PE7021-30 (30 dB)	231 or 232	NCR	
(2)	Power Meters			
X i00020	HP 8901A Power Mode	2105A01087	12 mo	Apr-04

Page Number 9 of 14.
Name of Test: RF Power Output (Radiated)
Specification: 47 CFR 2.1046(a)
Test Equipment: As per attached page

Measurement Procedure (Radiated)

1. The EUT was placed on an open-field site and its radiated field strength at a known distance was measured by means of a spectrum analyzer. Equivalent loading was calculated from the equation $P_t = ((E \times R)^2 / 49.2)$ watts, where R = 3m.
2. The readings were taken at 45° increments, throughout the 360° turntable arc, and the average ERP calculated. Transmitter whip antenna, nominally 3dBi gain, was operated on a wooden table 80cm above a ground plane

Measurement Results

g0480152: 2004-Aug-31 Tue 09:53:00

State: 2:High Power

Ambient Temperature: 33°C ± 3°C

Amps Mode:

Frequency Tuned, MHz	Frequency Emission, MHz	Meter, dBuV/m	CF, dB	ERP, dBm	ERP dBm / Watts
480.000000	480.003800	88.12	54.46	45.2	45.40 / 34.67
480.000000	480.005000	86.81	54.46	43.9	
480.000000	480.005000	89.42	54.46	46.5	
480.000000	480.006300	85.74	54.46	42.8	
480.000000	480.006300	91.11	54.46	48.2	
480.000000	480.006300	87.28	54.46	44.4	
480.000000	480.007500	90.56	54.46	47.6	
480.000000	480.007500	87.5	54.46	44.6	

g0480153: 2004-Aug-31 Tue 10:03:00

State: 2:High Power

Ambient Temperature: 33°C ± 3°C

Amps Mode:

Frequency Tuned, MHz	Frequency Emission, MHz	Meter, dBuV/m	CF, dB	ERP, dBm	ERP dBm / Watts
496.000000	496.003800	88.55	54.78	46.0	40.39 / 10.94
496.000000	496.005000	88.29	54.78	45.7	
496.000000	496.005000	89.27	54.78	46.7	
496.000000	496.006300	87.2	54.78	44.6	
496.000000	496.006300	88.95	54.78	46.4	
496.000000	496.006300	88.88	54.78	46.3	
496.000000	496.006300	87.25	54.78	44.7	
496.000000	496.007500	91.33	54.78	48.7	

g0480154: 2004-Aug-31 Tue 10:13:00

State: 2:High Power

Ambient Temperature: 33°C ± 3°C

Amps Mode:

Frequency Tuned, MHz	Frequency Emission, MHz	Meter, dBuV/m	CF, dB	ERP, dBm	ERP dBm / Watts
512.000000	512.003800	87.57	55.66	45.9	36.26 / 4.23
512.000000	512.003800	89.74	55.66	48.0	
512.000000	512.003800	88.57	55.66	46.9	
512.000000	512.003800	88.71	55.66	47.0	
512.000000	512.005000	92.36	55.66	50.6	
512.000000	512.005000	91.16	55.66	49.4	
512.000000	512.005000	90.61	55.66	48.9	
512.000000	512.006300	90.07	55.66	48.4	



Performed by:

David E. Lee,
Compliance Test Manager

Page Number 11 of 14.

Name of Test: Field Strength of Spurious Radiation

Specification: 47 CFR 2.1053(a)

Guide: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917


Measurement Procedure

Definition:

Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

Method of Measurement:


- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth 100 kHz (<1 GHz), 1 MHz (> 1GHz).
 - 2) Video Bandwidth ≥ 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed ≤ 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load that is placed on the turntable. The RF cable to this load should be of minimum length.

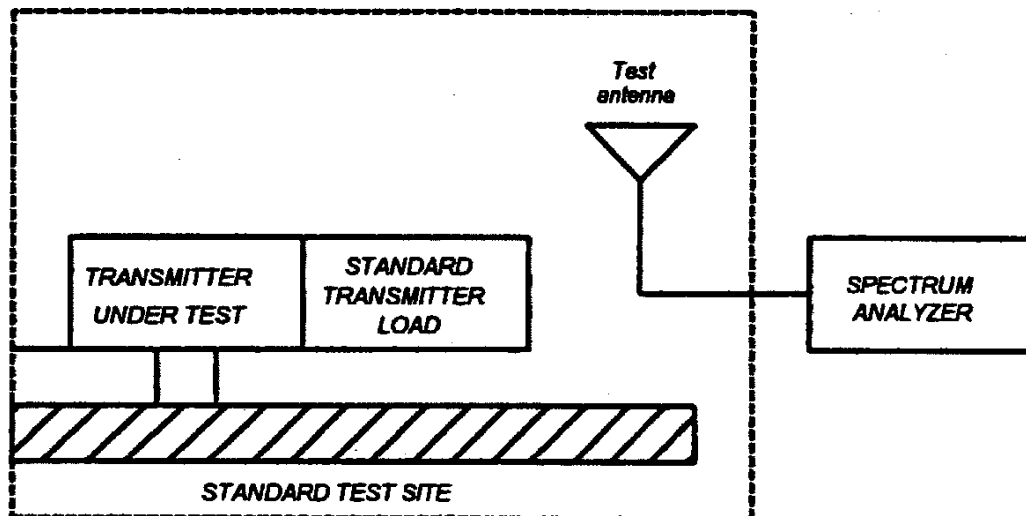

Page Number 12 of 14.

Name of Test: Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

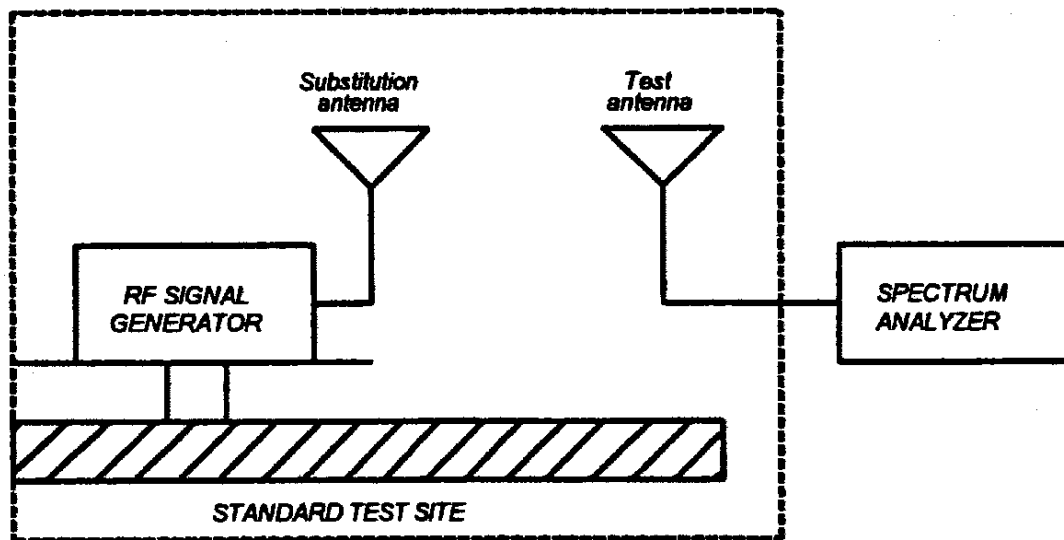

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

Page Number 13 of 14.

Name of Test: Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =

$$10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step I)}$$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment

Asset	Description	s/n	Cycle	Last Cal
Transducer				
	i00088	EMCO 3109-B 25MHz-300MHz	2336	24 mo. Sep-03
X	i00089	April 2001 200MHz-1GHz	001500	24 mo. Sep-03
X	i00103	EMCO 3115 1GHz-18GHz	9208-3925	24 mo. Jan-04
Amplifier				
X	i00028	HP 8449A	2749A00121	12 mo. May-04
Spectrum Analyzer				
X	i00029	HP 8563E	3213A00104	12 mo. May-04
X	i00033	HP 85462A	3625A00357	12 mo. Sep-04
Substitution Generator				
X	i00067	HP 8920A Communication TS	3345U01242	12 mo. May-04
	i00207	HP 8753D Network Analyzer	3410A08514	12 mo. Jun-04

Microphone, Antenna Port, and Cabling

Microphone	<u>Y</u>	Cable Length _____	Meters
Antenna Port Terminated	<u>Y</u>	Load <u>Y</u>	Antenna Gain <u>N/A</u>
All Ports Terminated by Load	<u>Y</u>	Peripheral <u>N</u>	

Page Number 14 of 14.

Name of Test: Field Strength of Spurious Radiation

Measurement Results

All Other Emissions (Worst Case Combinations) = $50 + \text{Log}(40) = -66.02\text{dBc}$
 $41.75\text{dB} - 66.02 = -24.27\text{dBm}$

g0480150: 2004-Aug-30 Mon 14:04:00
 STATE: 1:High Power

Ambient Temperature: 33°C ± 3°C

Frequency Tuned, MHz	Frequency Emission, MHz	Meter, dBuV/m	CF, dB	ERP, dBm
480.000000	960.000000	20.1	36.5	-40.7
480.000000	1440.000000	12.6	38.7	-46.1
480.000000	1920.000000	10.3	44.5	-42.6
480.000000	2400.000000	14.8	48.0	-34.6
480.000000	2880.000000	32.7	8.1	-56.6
480.000000	3360.000000	29.5	10.3	-57.5
480.000000	3840.000000	29.2	14.2	-54.0
480.000000	4320.000000	28.8	15.3	-53.2
480.000000	4800.000000	29.8	15.2	-52.4



Performed by:

David E. Lee,
 Compliance Test Manager

END OF TEST REPORT

**Testimonial
and
Statement of Certification**

This is to Certify:

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certifying Engineer:



David E. Lee,
Compliance Test Manager