

**MFA** **M. Flom Associates, Inc. - Global Compliance Center**  
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176  
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

M E M O

Date: June 2, 2003

Applicant: Kenwood USA Corporation  
Communications Division  
3975 Johns Creek Court, Suite 300  
Suwanee, GA 30024

Equipment: TH-K2AT  
FCC ID: ALH36061110

Please note that the enclosed Reports reflect the results of tests performed to the currently published Federal Communications Commissions Rules and Regulations.

Should the FCC's Examiners' interpretations request new and unpublished requirements, we will be pleased to provide them. We will invoice you accordingly, i.e. for the time spent on re-testing, providing the amended pages and/or Reports and for the time necessary to be spent on electronic filing. We will of course provide you with copies of any of the additions.

We regret any added expense to the Applicants, but of late the FCC continues to change their requirements without any prior written publication and/or notices.

As in the past, we will continue to provide all liaison with the FCC necessary for the successful conclusion of your project and the receipt of your Grant of Equipment Authorization.

Sincerely yours,



Morton Flom, P. Eng.

**MFA** **M. Flom Associates, Inc. - Global Compliance Center**  
 3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176  
 www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

SUMMARY OF RESTRICTIONS:

To all clients using T.C.B.'s for Certification

1. All submissions to the FCC are subject to their Examiner's interpretation.
2. The FCC can set aside any action; modify or set aside any action, within 30 days. (FCC Rule 1.108, 1.113).
3. Under Rule 2.803, if device is not certified then it must **NOT** be sold, leased, offered for sale, imported, shipped or distributed or advertised for sale.
3. FCC can revoke its certificates at any time if the equipment does not meet or **CONTINUE** to meet their Rules. (Rule Parts 2.927, 2.939). CFR 47 Rule Part 2.939 gives FCC the authority to revoke or withdraw any equipment Authorization at any time, and by extension to T.C.B's or anyone.
6. FCC can request a sample at any time (2.936).
7. CFR 47 Rule Part 2.962 gives authority to the TCB to request samples (still being marketed) per 2.962(g) to conduct appropriate post-market surveillance (pms) activities. This pms shall be based on type testing a few samples of the total number of product types which the Certification Body (TCB) has certified.
8. For your benefit, you are cautioned to review these rules in their entirety, weighing the pros and cons of early marketing.

M. FLOM ASSOCIATES, INC.



Morton Flom, P. Eng.



**M. Flom Associates, Inc. - Global Compliance Center**

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

C E R T I F I C A T I O N

of

RECEIVER MODEL: TH-K2AT

FCC ID: ALH36061110

to

FEDERAL COMMUNICATIONS COMMISSION

Part 15.121  
(Amateur Scanning Receiver)

DATE OF REPORT: June 2, 2003

ON THE BEHALF OF THE APPLICANT:

Kenwood USA Corporation

AT THE REQUEST OF:

P.O. JB-F-006

Kenwood USA Corporation  
Communications Division  
3975 Johns Creek Court, Suite 300  
Suwanee, GA 30024

Attention of:

Joel E. Berger, Research & Development  
JBerger@kenwoodusa.com  
(678) 474-4722; FAX: -4731

SUPERVISED BY:

A handwritten signature in black ink that reads 'Morton Flom, P. Eng.' The signature is written in a cursive, flowing style.

Morton Flom, P. Eng.


TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
2.948	Description of Measurement Facilities	1
15.109	Receiver Spurious Emissions (Radiated)	6
15.111	Receiver Spurious Emissions (Conducted)	11
15.121(b)	Scanning Receiver	14
15.107	A/C Powerline Conducted Emissions	16

PAGE NO.

1 of 20.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

- a) TEST REPORT
- b) Laboratory: M. Flom Associates, Inc.  
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107  
(Canada: IC 2044) Chandler, AZ 85225
- c) Report Number: d0360001
- d) Client: Kenwood USA Corporation  
Communications Division  
3975 Johns Creek Court, Suite 300  
Suwanee, GA 30024
- e) Identification: TH-K2AT  
FCC ID: ALH36061110  
Description: Amateur Transceiver with Scanning Receiver
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: June 2, 2003  
EUT Received: May 21, 2003
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by:   
Morton Flom, P. Eng.
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Association (A2LA) as shown in the scope below.



**THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION**

**ACCREDITED LABORATORY**

A2LA has accredited

**M. FLOM ASSOCIATES, INC.**  
Chandler, AZ

for technical competence in the field of

**Electrical (EMC) Testing**


The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 "General Requirements for the Competence of Testing and Calibration Laboratories" and any additional program requirements in the identified field of testing. Testing and calibration laboratories that comply with this International Standard also operate in accordance with ISO 9001 or ISO 9002.

Presented this 2<sup>nd</sup> day of March, 2001.



*Pete Abney*  
President  
For the Accreditation Council  
Certificate Number 1008.01  
Valid to December 31, 2002

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



**American Association for Laboratory Accreditation**

**SCOPE OF ACCREDITATION TO ISO/IEC 17025-1999**

M. FLOM ASSOCIATES, INC.  
Electronic Testing Laboratory  
3356 North San Marcos Plaza, Suite 107  
Chandler, AZ 85225  
Morton Flom Phone: 480 926 3100

**ELECTRICAL (EMC)**

Valid to: December 31, 2002 Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetic compatibility tests:

Tests	Standards
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992, CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55922; EN 56081-1; EN 50081-2; IEC61000-3-2; AS/NZS 1044; AS/NZS 1033; AS/NZS 3548; AS/NZS 4251.1; CNS 13478
Harmonic Currents	EN 61000-3-2
Fluctuation and Flicker	EN 61000-3-3
RF Immunity	EN: 50082-1, 50082-2 (both excluding "Power Frequency Magnetic Field Immunity"), 55104 (excluding Power Frequency Magnetic Field and Conducted Immunity); AS/NZS 4251.1
Electrostatic Discharge (ESD)	EN 61000-4-2
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5
Voltage Dips, Short Interruptions, and Line Voltage Variations	EN 61000-4-11
47 CFR (FCC)	Part 2, 18, 21, 22, 23, 24, 25, 26, 27, 34, 80, 87, 90, 95, 97, 101 (excluding S&R Testing)

*James M. Robinson*

(A2LA Cert. No. 1008.01) 05/10/02 Page 1 of 1

5501 Buckeystown Pike, Suite 300 • Frederick, MD 21704-8375 • Phone: 301-644-3248 • Fax: 301-662-2974

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

PAGE NO.

3 of 20.

GENERAL INFORMATION

Part 2.948:

(a)(b) DESCRIPTION OF MEASUREMENT FACILITIES:  
FILE: 31040/SIT

A description of the measurement facilities was filed with the Commission and was found to be in compliance with the requirements of Section 2.948, by letter dated March 13, 2000. All pertinent changes will be reported to the Commission by up-date prior to March 2003.

(b)(4) SUPPORTING STRUCTURES:

SKETCH - ATTACHED EXHIBITS

(b)(5)(6) TEST INSTRUMENTATION:

LIST - SEE EXHIBITS

2.925: IDENTIFICATION OF AN AUTHORIZED DEVICE:

DRAWING - SEE EXHIBITS

LOCATION OF LABEL - SEE PHOTOS

NAME AND ADDRESS OF APPLICANT:

Kenwood USA Corporation  
Communications Division  
3975 Johns Creek Court, Suite 300  
Suwanee, GA 30024

PAGE NO. 4 of 20.  
2.911:  
2.1033(b)(6)

TECHNICAL REPORT

MANUFACTURER:

Kenwood Electronics Technologies PTE Ltd.  
1 Ang Mo Kio Street 63  
Singapore 569110

TRADE NAME:

Kenwood

FCC ID:

ALH36061110

MODEL NO:

TH-K2AT

PHOTOGRAPHS:

SEE LIST OF EXHIBITS

DUT DESCRIPTION:

This unit Passes

15.31: MEASUREMENT STANDARD & PROCEDURE:

- \_\_\_ IEEE STANDARD 187 WAS USED AS A GUIDE.
- \_\_\_ FCC MEASUREMENT PROCEDURE MP-1
- x ANSI 63.4 (1992/2000) "Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz."
- \_\_\_



PAGE NO.

5 of 20.

EXPOSITORY STATEMENT

1. NUMBER OF BANDS = 1
2. NUMBER OF CHANNELS = 99
3. TUNING RANGE, MHz = 136 to 173.995
4. OSCILLATOR RANGE, MHz = 97.15 to 135.145
5. I.F., MHz = 38.85
6. BLOCK DIAGRAM = ATTACHED
7. For cellular receiver only, the radio transceiver meets the requirements of FCC Bulletin OET 53 ("Cellular System Mobile Stations-Land-System Compatibility Specification."). See attached affidavit.

15.203: ANTENNA REQUIREMENT:

- The antenna is permanently attached to the EUT
- The antenna uses a unique coupling
- The EUT must be professionally installed
- The antenna requirement does not apply

SUPERVISED BY:



Morton Flom, P. Eng.

PAGE NO. 6 of 20.

NAME OF TEST: Receiver Spurious Emissions (Radiated)

SPECIFICATION:

15.109: Radiated Interference Limits  
 15.33: Frequency Range of Radiated Measurements  
 80.217: Suppression of Interference Aboard Ships

GUIDE: See measurement procedure below

TEST CONDITIONS: Standard Temperature & Humidity

TEST EQUIPMENT: As per attached page

SEARCH ANTENNAS:

100 Hz - 50 MHz: Emco 3301B Active Rod  
 10 kHz - 32 MHz: Singer 94593-1 Loop  
 25 MHz - 300 MHz: Emco 3109 Biconical  
 200 MHz - 1 GHz: Aprel 2001 Log Periodic  
 1 GHz - 18 GHz: Emco 3115 Horn  
 10 GHz - 40 GHz: Emco 3116 Horn with HP11970A Mixer


MEASUREMENT PROCEDURE

1. At first, bench tests were performed to locate the spurious emissions at the antenna terminals.
2. In the field, tests were conducted over the range shown, The test sample was set up on a wooden turntable above ground, and at a distance of three meters from the antenna connected tot he Spectrum Analyzer.
3. In order to obtain the maximum response at each frequency, the turntable was rotated, and the search antenna was raised and lowered. The EUT was also adjusted for maximum response. Tests were conducted in Horizontal & Vertical polarization modes.
4. The field strength was calculated from:

$$E \text{ } \mu\text{V/m @ 3 m} = \text{Log}_{10}^{-1} \left( \frac{\text{dB}\mu\text{V} + \text{A.F.} + \text{C.L.}}{20} \right)$$

5. MEASUREMENT RESULTS: Attached for "Worst Case" conditions.

RADIATED TEST SETUP

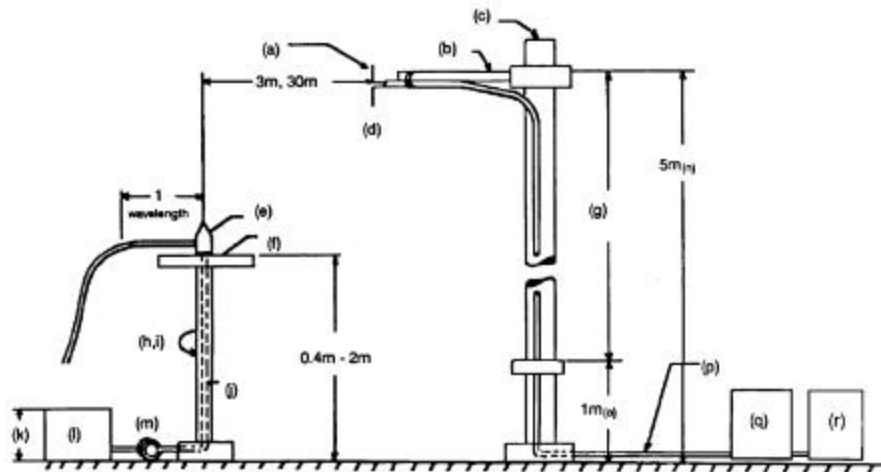

NOTES:

- (a) Search Antenna - Rotatable on boom
- (b) Non-metallic boom
- (c) Non-metallic mast
- (d) Adjustable horizontally
- (e) Equipment Under Test
- (f) Turntable
- (g) Boom adjustable in height.
- (h) External control cables routed horizontally at least one wavelength.
- (i) Rotatable
- (j) Cables routed through hollow turntable center
- (k) 30 cm or less
- (l) External power source
- (m) 10 cm diameter coil of excess cable
- (n) 25 cm (V), 1 m-7 m (V, H)
- (o) 25 cm from bottom end of 'V', 1m normally
- (p) Calibrated Cable at least 10m in length
- (q) Amplifier (optional)
- (r) Spectrum Analyzer

Asset Description (as applicable)	s/n	Cycle	Last Cal
<u>TRANSDUCER</u>			
i00088 EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-02
i00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-02
i00103 EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-02
i00065 EMCO 3301-B Active Monopole	2635	12 mo.	Sep-02
<u>AMPLIFIER</u>			
i00028 HP 8449A	2749A00121	12 mo.	Mar-03
<u>SPECTRUM ANALYZER</u>			
i00029 HP 8563E	3213A00104	12 mo.	Jan-03
i00033 HP 85462A	3625A00357	12 mo.	Jan-03
i00048 HP 8566B	2511AD1467	6 mo.	Jan-03
<u>MISCELLANEOUS</u>			
Microphone	_____		
Antenna	_____		
All Ports Terminated	_____		

PAGE NO.

8 of 20.

TEST SETUP:

Radiated Emissions



PAGE NO. 9 of 20.

NAME OF TEST: Receiver Spurious Emissions (Radiated)

MEASUREMENT DETAILS

SITE REFERENCE = 31040/SIT  
 SPECTRUM SEARCHED = 0 to 10 x F<sub>R</sub>  
 WORST CASE = V  
 LIMITS = 15.109(a) (Attached)  
 ALL OTHER EMISSIONS = 20 dB OR MORE BELOW LIMIT

TESTS WERE CONDUCTED WITH:

- a. All controls and switches operated.
- b. Half-wave dipole antenna or manufacturer/applicant supplied antenna.

SAMPLE CALCULATION:

EMISSION FREQUENCY, MHz = 174.906300  
 LEVEL =  $\text{Log}_{10}^{-1} \left( \frac{-8.52 + 17.85}{20} \right)$   
 LEVEL,  $\mu\text{V}/\text{m}$  @ 3m = 20.82

MEASUREMENT RESULTS = ATTACHED

NOTE: WORST CASE OF SCAN AND NON-SCAN MODES REPORTED.

PAGE NO. 10 of 20.

NAME OF TEST: Receiver Spurious Emissions (Radiated)

RULE 15.109(a) LIMITS:

FREQUENCY, MHz	FIELD STRENGTH μV/m	DISTANCE, m
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

g0350159: 2003-May-27 Tue 12:00:00

STATE: 0:General

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBuV	@ m	C.F., dB	μV/m	@ m
136.050000	174.906300	8.52	3	17.85	20.82	3
155.050000	193.906300	8.43	3	18.99	23.5	3
173.950000	212.801000	6.33	3	19.88	20.44	3
136.050000	349.812000	4.88	3	23.65	26.7	3
155.050000	387.800000	3.57	3	25.7	29.07	3
173.950000	425.600000	2.78	3	26.34	28.58	3
136.050000	524.718000	3.72	3	27.27	35.44	3
155.050000	581.700000	3.68	3	29.46	45.39	3
173.950000	638.400000	3	3	30.48	47.21	3
155.050000	775.600000	3.37	3	32.3	60.74	3
173.950000	851.191300	-5.07	3	32.45	23.39	3
155.050000	969.500000	3.71	3	39.41	143.22	3
173.950000	1063.991300	0.59	3	36.4	70.71	3

All other emissions in the required measurement range were more than 20 dB below the required limits.



PERFORMED BY:

David Lee

PAGE NO. 11 of 20.

NAME OF TEST: Receiver Spurious Emissions (Conducted)

SPECIFICATION: FCC: 47 CFR 15.111

GUIDE: See Measurement Procedure Below

TEST CONDITIONS: S. T. & H.

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The equipment under test was connected to an HP 8556B Spectrum Analyzer.
2. At each required test frequency, measurements were performed across the range of the lowest intermediate frequency to the greater of 1 GHz or 10 times the highest internally generated frequency.
3. For equipment with canning modes of operation, measurements were made in the scanning mode. Scanning capability outside the band of operation was checked and reported.
4. All other emissions were 20 dB or more below the limit.
5. Measurement Results: Attached.

MEASUREMENT DETAILS

STANDARD TEST VOLTAGE = As per Page 2

FREQUENCY OF CARRIER, MHz = As indicated

SPECTRUM SEARCHED, GHz = 0 to 5


ALL OTHER EMISSIONS =  $\leq 2$  pW

MEASUREMENT RESULTS = ATTACHED

NOTE: WORST CASE OF SCAN AND NON-SCAN MODES REPORTED.

RECEIVER:

- TEST A. ANTENNA CONDUCTED SPURIOUS EMISSIONS
- TEST B. RADIATION, CONDUCTED
- TEST C. SPURIOUS OUTPUT SIGNALS

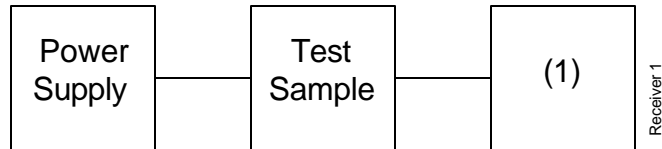

Asset Description (as applicable)	s/n
(1) <u>SPECTRUM ANALYZER</u>	
i00049 HP 8566B	2511AD1467
i00043 HP 8558B	2004AD2076
i00054 HP 8557A	1531A00191
i00029 HP 8563E	3213A00104



PAGE NO. 13 of 20.

NAME OF TEST: Receiver Spurious Emissions (Conducted)

RULE 15.111: RECEIVER CONDUCTED EMISSION LIMITS:

The power at the antenna terminal at any frequency within the range of measurements shall not exceed 2.0 nanowatts.

g0350162: 2003-May-29 Thu 10:48:00

STATE: 0:General

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, uV	LEVEL, pW
173.950000	193.540000	-81.3	19	7
0.000000	657.290000	-80.4	21	9
155.050000	693.210000	-80.2	22	10
0.000000	3007.000000	-77.9	28	16



PERFORMED BY:

David Lee

PAGE NO. 14 of 20.

NAME OF TEST: Scanning Receivers Cellular Band Rejection

SPECIFICATION: FCC: 47 CFR 15.121(b)

TEST EQUIPMENT: As per attached page


GUIDE: 47 CFR 15.121(b): Except as provided in paragraph (c) of this section, scanning receivers shall reject any signals from Cellular Radiotelephone Service frequency bands that are 38 dB or higher based upon a 12 dB SINAD measurement, which is considered the threshold where a signal can be clearly discerned from any interference that may be present.

WARNING: MODIFICATION OF THIS DEVICE TO RECEIVE CELLULAR RADIOTELEPHONE SERVICE SIGNALS IS PROHIBITED UNDER FCC RULES AND FEDERAL LAW.

MEASUREMENT PROCEDURE

1. Equipment was connected as illustrated in the block diagram.
2. A standard signal was applied to the receiver input terminals.
3. Receiver output audio output was adjusted for rated output and with distortion no greater than 10%.
4. The RF Signal generator was adjusted to produce 12dB SINAD without the audio output power dropping by more than 3dB.
5. This was repeated at three frequencies across all bands to establish a reference sensitivity level. The reference sensitivity taken was the lowest, or worst-case sensitivity for all of the bands.
6. The output of the signal generator was then adjusted to a level of +60dB above the reference level sensitivity established in step 5 and set to the first of three frequencies in the cellular subscriber transmit band.
7. Receiver squelch threshold, the signal level required to open the squelch, should be set to open no greater than +20dB above the reference sensitivity.
8. The receiver was then put in the scanning mode and allowed to scan across it's complete receive range.
9. If the receiver unsquelched or stopped on any frequency, the displayed frequency was recorded. The signal generator was then adjusted in output level until a 12dB SINAD from the receiver was produced. The signal generator level associated with this response was also noted.
10. This procedure was repeated for three frequencies in the cellular base station transmit band.
11. The difference in between the signal generator output for any response recorded and the reference sensitivity is the rejection ratio.

SCANNING RECEIVER:

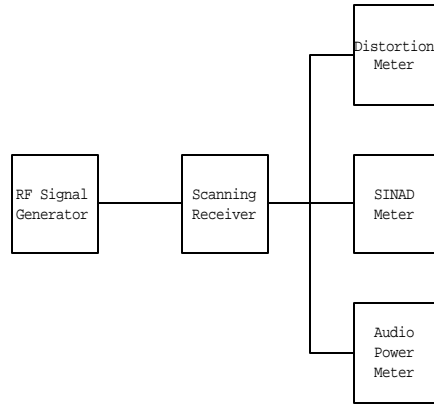

Reference Level Sensitivity measured in step 5 = 130 dBm

RF Signal Generator, MHz	Displayed Frequency, MHz	Level for 12 dB SINAD, dBm	Rejection, dB
136.050	868.97	-122	>130
to	836.40	-122	>130
173.995	824.04	-122	>130

PERFORMED BY:


David Lee

PAGE NO. 16 of 20.  
NAME OF TEST: A/C Powerline Conducted Emissions  
SPECIFICATION: FCC: 47 CFR 15.107  
GUIDE: IEEE Standard 213  
TEST CONDITIONS: S. T. & H.  
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. A test sample was connected to the Public Utility lines through a LISN Ailtech Model 94641-1 (50  $\mu$ H).
2. A reference level of 250  $\mu$ V was set on the Spectrum Analyzer. The spectrum was searched over the range of 450 kHz to 30 MHz.
3. All other emissions were 20 dB or more below limit.
4.   x   The test sample used a charger.  
       The test sample does not use a charger.
5. Measurement Results: Attached.


AC POWERLINE CONDUCTED MEASUREMENTS

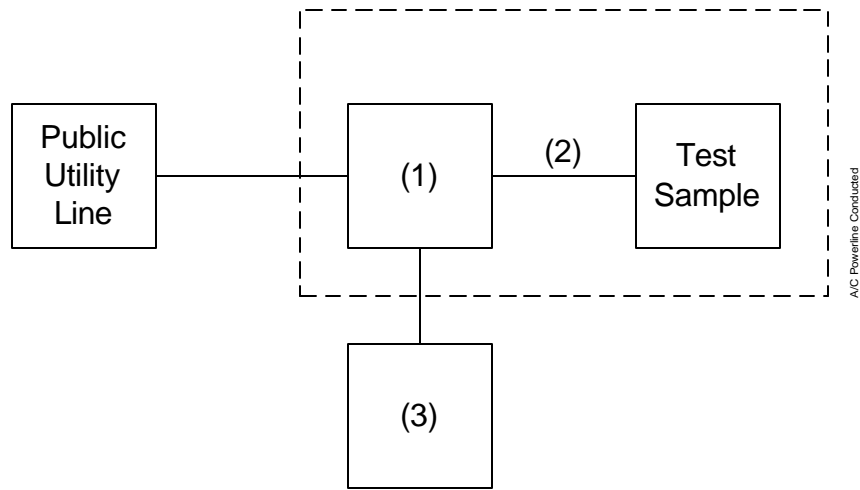

Asset Description (as applicable)	s/n	Cycle	Last Cal
<u>(1) LINE IMPEDANCE STABILIZATION NETWORK</u>			
i00077 Singer 91221-1 (5 μH)	0396	12 mo.	
i00155 Eaton 94641-1 (50 μH)	178	12 mo.	Sep-02
i00167 Ailtech 94641-1 (50 μH)	0103	12 mo.	
<u>(2) SCREEN ROOM</u>			
i00169 Lindgren 22-2/2-0	3861	N/A	none
i00170 Lindgren LG170	4999		
<u>(3) SPECTRUM ANALYZER</u>			
i00029 HP 8563E	3213A00104	12 mo.	Jan-03
i00033 HP 85462A	3625A00357	12 mo.	Jan-03
i00048 HP 8566B	2511AD1467	6 mo.	Jan-03

PAGE NO. 18 of 20.

TEST SETUP: A/C Powerline Conducted Emissions

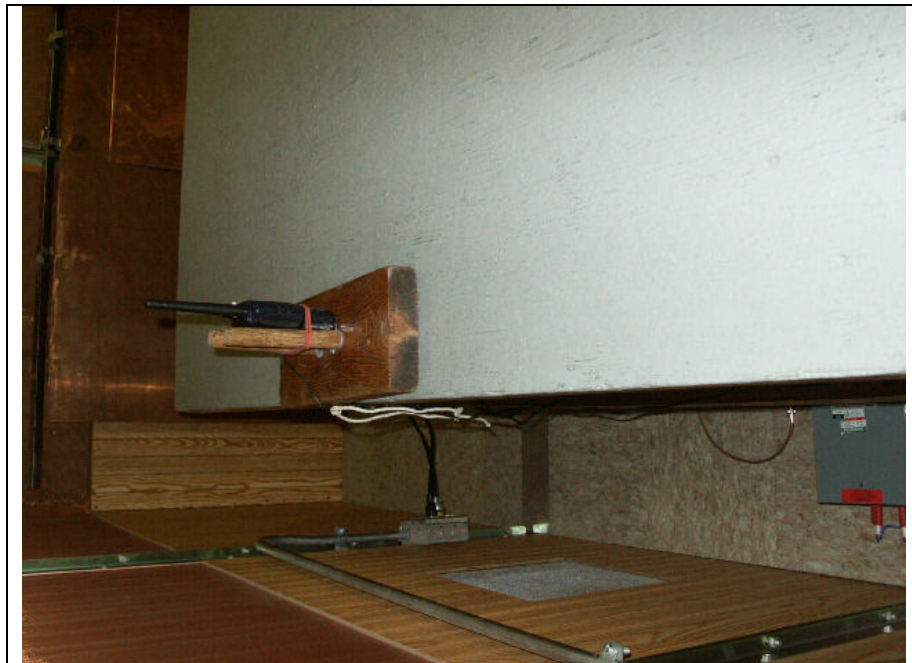


PAGE NO. 19 of 20.

NAME OF TEST: A/C Powerline Conducted Emissions  
g0350160: 2003-May-27 Tue 14:33:00  
STATE: 0:General



ACTV DBT: PBAK  
MBAS DBT: PBAK QP AVG  
MKR 1.60 kHz  
45.98 dBμV

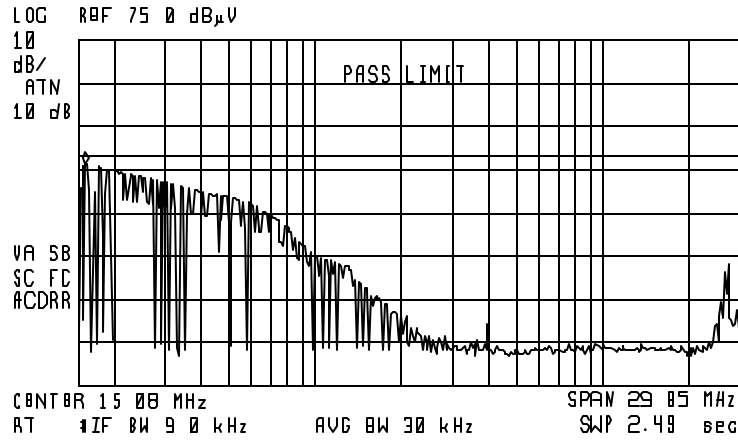

LINE SIDE

PERFORMED BY:


David Lee

PAGE NO. 20 of 20.

NAME OF TEST: A/C Powerline Conducted Emissions  
g0350161: 2003-May-27 Tue 14:40:00  
STATE: 0:General



ACTV DBT: PBAK  
MBAS DBT: PBAK QP AVG  
MKR 1.60 kHz  
45.61 dBμV

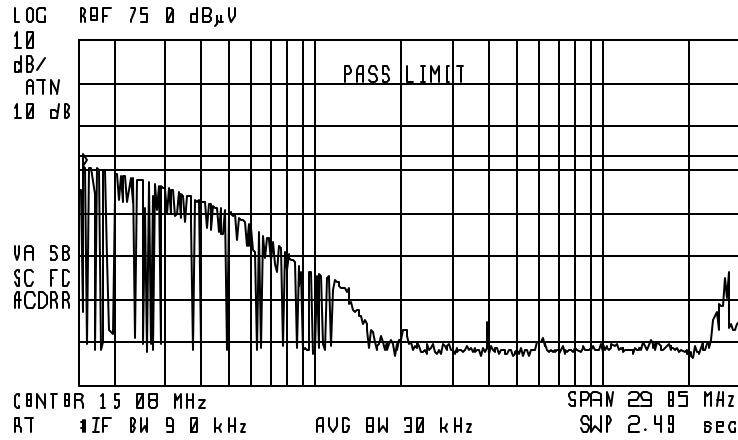

NEUTRAL SIDE

PERFORMED BY:  
END OF TEST REPORT

David Lee



THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

**LABELLING OF SCANNING RECEIVERS**Rule 15.19(2)(3) 2-Part statement: CONSPICUOUS LOCATION ON UNIT

'This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions (1) This device may not cause harmful interference; and (2) this device must accept any interference including interference that may cause undesired operation.'

Rule Part 15.121(f): PERMANENTLY AFFIXED TO UNIT MUST BE ON DEVICE:

'WARNING: Modification of this device to receive cellular radiotelephone service signals is prohibited under FCC Rules and Federal Law.'

Rule 15.21: CAN BE IN MANUAL. SHOW WHAT PAGE AND EXTRACT IT

'Information to User: The User's Manual or Instruction Manual for an intentional or unintentional radiator shall caution the User that changes or modifications not expressly approved by the party responsible for compliance could void the User's authority to operate the equipment.'

"Permanently affixed" means that the label is etched, engraved, stamped, silkscreened, indelibly printed or otherwise permanently marked on a permanently attached part of the equipment or on a nameplate of metal plastic or other material fastened to the equipment by welding, riveting, or permanent adhesive. The label shall be designed to last the expected lifetime of the equipment in the environment in which the equipment may be operated and must not be readily detachable. The label shall not be a stick-on, paper label.

STATEMENT OF COMPLIANCE

THIS IS TO CERTIFY:

THAT, ON THE BASIS OF THE MEASUREMENTS MADE, THE  
EQUIPMENT TESTED IS CAPABLE OF COMPLYING WITH THE  
REQUIREMENTS OF

FCC RULE PART 15, SUBPART B   x  

FCC RULE PART 15, SUBPART C       

USING ANSI C63.4-1992/2000 Draft IN EFFECT AS OF THIS  
DATE, UNDER NORMAL OPERATION, WITH THE USUAL MAINTENANCE.

THAT THE DATA CONTAINED HEREIN IS A SUMMARY (WORST CASE)  
OF THAT OBTAINED ON SEVERAL RANDOMLY-SELECTED PRODUCTION  
SAMPLES.

THAT THE EQUIPMENT MEETS OR EXCEEDS THE REQUIREMENTS OF  
PART 15.

LIST OF EXHIBITS  
(FCC **CERTIFICATION** (RECEIVERS) - REVISED 9/28/98)

APPLICANT: Kenwood USA Corporation

EQUIPMENT: TH-K2AT  
ALH36061110

BY APPLICANT:

IF APPLICABLE: Subsection 2.1033

- 1. LETTER OF AUTHORIZATION x
- 2. ATTESTATION x
- 3. IDENTIFICATION LABEL DRAWING
  - x LABEL
  - x LOCATION OF LABEL
  - x COMPLIANCE STATEMENT
  - x LOCATION OF COMPLIANCE STATEMENT
- 4. DOCUMENTATION: 2.1033(b)
  - (3) USER MANUAL x
  - (4) OPERATIONAL DESCRIPTION x
  - (5) BLOCK DIAGRAM x
  - (5) SCHEMATIC DIAGRAM x
  - (7) PHOTOGRAPHS x

BY M.F.A. INC.

- A. STATEMENT OF COMPLIANCE
- B. STATEMENT OF QUALIFICATIONS