



 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

SAR TEST REPORT (FCC/IC)				
RF EXPOSURE EVALUATION		SPECIFIC ABSORPTION RATE		
APPLICANT	KENWOOD USA CORPORATION			
DEVICE UNDER TEST (DUT)	PORTABLE UHF PTT RADIO TRANSCEIVER (ANALOG/DIGITAL)			
DEVICE FREQUENCY RANGE	406 - 470 MHz			
DEVICE MODEL(S)	NX-300-K2	NX-300-K4	TK-5320-K2	TK-5320-K4
DEVICE IDENTIFIER(S)	FCC ID:	ALH378501	IC CERT. NO.:	282D-378501
APPLICATION TYPE	Certification			
STANDARD(S) APPLIED	FCC 47 CFR §2.1093			
	Health Canada Safety Code 6			
PROCEDURE(S) APPLIED	FCC OET Bulletin 65, Supplement C (01-01)			
	Industry Canada RSS-102 Issue 2			
	IEEE 1528-2003			
	IEC 62209-1:2005			
FCC DEVICE CLASSIFICATION	Licensed Non-Broadcast Transmitter Held to Face (TNF)			
IC DEVICE CLASSIFICATION	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)			
RF EXPOSURE CATEGORY	Occupational / Controlled			
RF EXPOSURE EVALUATION	Face-held & Body-worn			
DATE(S) OF EVALUATION(S)	August 22 & September 23-24, 2008			
TEST REPORT SERIAL NO.	082108ALH-T924-S90U			
TEST REPORT REVISION NO.	Revision 1.0	Initial Release	September 25, 2008	
TEST REPORT SIGNATORIES	Testing Performed By		Test Report Prepared By	
	Sean Johnston Celltech Labs Inc.		Jonathan Hughes Celltech Labs Inc.	
TEST LAB AND LOCATION	Celltech Compliance Testing and Engineering Lab			
	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada			
TEST LAB CONTACT INFO.	Tel.: 250-765-7650		Fax: 250-765-7645	
	info@celltechlabs.com		www.celltechlabs.com	
TEST LAB ACCREDITATION(S)	<div></div> <div>Test Lab Certificate No. 2470.01</div>			

Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 1 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Test Lab Certificate No. 2470.01

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

Test Lab Information	Name	CELLTECH LABS INC.						
	Address	21-364 Lougheed Road, Kelowna, British Columbia V1X 7R8 Canada						
Applicant Information	Name	KENWOOD USA CORPORATION						
	Address	3975 John Creek Court, Suite 300, Suwanee, GA 30024 United States						
Standard(s) Applied	FCC	47 CFR §2.1093			IC	Health Canada Safety Code 6		
Procedure(s) Applied	FCC	OET Bulletin 65, Supplement C (Edition 01-01)						
	IC	RSS-102 Issue 2						
	IEEE	1528-2003			IEC	62209-1:2005		
Device Classification(s)	FCC	Licensed Non-Broadcast Transmitter Held to Face (TNF)						
	IC	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)						
Device RF Exposure Category	Portable	Occupational / Controlled Environment						
Device Identifier(s)	FCC ID:	ALH378501			IC:	282D-378501		
	Model(s)	NX-300-K2		NX-300-K4		TK-5320-K2		
	DUT	NX-300-K4			Serial No.	12345678 (Identical Prototype)		
Device Description	Portable UHF Push-to-Talk (PTT) Radio Transceiver with Speaker-Microphone Antenna Type							
Transmit Frequency Range	406 - 470 MHz							
Modulation Type(s)	Analog (FM) / Digital (FSK)							
Max. RF Output Power Tested	406 MHz		Low Channel		5.0 Watts (Radio)		3.8 Watts (SMA)	Conducted
	438 MHz		Mid Channel		4.9 Watts (Radio)		3.7 Watts (SMA)	Conducted
	470 MHz		High Channel		5.1 Watts (Radio)		3.9 Watts (SMA)	Conducted
Antenna Type(s) Tested	Stubby		450 - 490 MHz		Length: 80 mm		P/N: KRA-23M	
	Stubby		400 - 450 MHz		Length: 80 mm		P/N: KRA-23M3	
	Whip		440 - 490 MHz		Length: 149 mm		P/N: KRA-27M	
	Whip		400 - 450 MHz		Length: 170 mm		P/N: KRA-27M3	
Battery Type(s) Tested	Li-ion		7.4 V		2000 mAh		P/N: KNB-47L	
	Li-ion		7.4 V		2500 mAh		P/N: KNB-48L	
	Ni-MH		7.2 V		2150 mAh		P/N: KNB-50NC	
Body-worn Accessories Tested	Belt-Clip (Radio)		Contains Metal		1.9 cm Spacing		P/N: KBH-11	
	Lapel-Clip (SMA)		Contains Metal		1.4 cm Spacing		P/N: none	
Audio Accessories Tested	Speaker-Microphone						P/N: KMC-25	
	Speaker-Microphone Antenna Type						P/N: KMC-40	
Max. SAR Level(s) Evaluated	Face-held	2.69 W/kg	1g	50% duty cycle		FCC/IC Spatial Peak SAR Limit	8.0 W/kg	1g
	Body-worn	5.14 W/kg	1g	50% duty cycle			Controlled Exposure	

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the Occupational/Controlled Exposure environment. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 2, IEEE 1528-2003 and IEC 62209-1:2005. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results and statements contained in this report pertain only to the device(s) evaluated.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.

Test Report Approved By  Sean Johnston Celltech Labs Inc.



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 2 of 72





	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

TABLE OF CONTENTS	
1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 MEASUREMENT SUMMARY	5
4.0 DETAILS OF SAR EVALUATION	6
5.0 EVALUATION PROCEDURES	6
6.0 SYSTEM PERFORMANCE CHECK	7
7.0 SIMULATED EQUIVALENT TISSUES	8
8.0 SAR LIMITS	8
9.0 ROBOT SYSTEM SPECIFICATIONS	9
10.0 PROBE SPECIFICATION (ET3DV6)	10
11.0 SIDE PLANAR PHANTOM	10
12.0 VALIDATION PLANAR PHANTOM	10
13.0 DEVICE HOLDER	10
14.0 TEST EQUIPMENT LIST	11
15.0 MEASUREMENT UNCERTAINTIES	12
MEASUREMENT UNCERTAINTIES (CONT.)	13
16.0 REFERENCES	14
APPENDIX A - SAR MEASUREMENT DATA	15
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	38
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	43
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	48
APPENDIX E - SYSTEM VALIDATION	71
APPENDIX F - PROBE CALIBRATION	72

Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 3 of 72

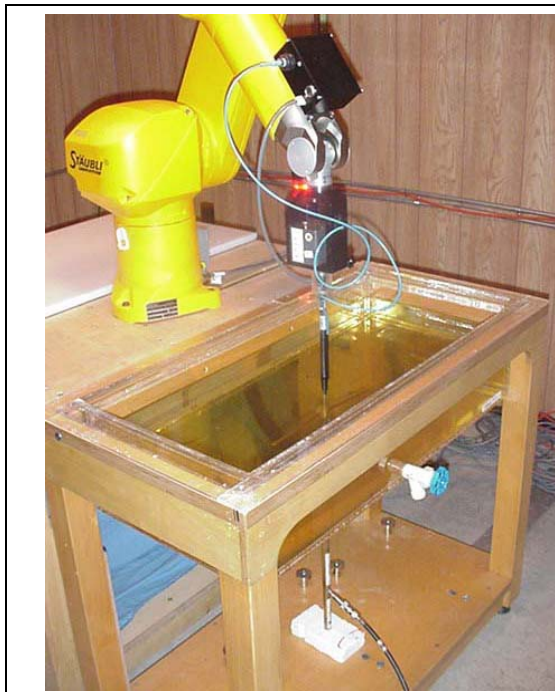
	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

1.0 INTRODUCTION

This measurement report demonstrates that the Kenwood USA Corporation Model(s): NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4 Portable Analog/Digital UHF PTT Radio Transceiver complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]), IC RSS-102 Issue 2 (see reference [4]), IEEE Standard 1528-2003 (see reference [5]) and IEC Standard 62209-1:2005 (see reference [6]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.





DASY4 SAR System with Plexiglas validation phantom



DASY4 SAR System with Plexiglas side planar phantom

Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 4 of 72

	Date(s) of Evaluation Aug. 22 & Sept. 23-24, 2008	Test Report Serial No. 082108ALH-T924-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date September 25, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational / Controlled	

Test Lab Certificate No. 2470.01

3.0 MEASUREMENT SUMMARY

SAR EVALUATION RESULTS

Test Type	Test Date	Freq.	DUT Type	Antenna Part No.	Battery Part No. ¹⁰	Accessory Type(s)		DUT Spacing to Planar Phantom	DUT Cond. Power Before Test		Measured SAR 1g (W/kg)		SAR Drift During Test	Scaled SAR with droop 1g (W/kg)			
		Body-worn				Audio	Watts		Duty Cycle		Duty Cycle						
							cm		DUT	SMA	100%	50%		dB	100%	50%	
Face	8/22	438	Radio	KRA-27M	KNB-48L	n/a	n/a	2.5	4.9	-	5.11	2.56	-0.218	5.37	2.69		
Face	9/23	438	Radio	KRA-27M3	KNB-48L	n/a	n/a	2.5	4.9	-	4.18	2.09	-0.684	4.89	2.45		
Face	9/23	438	Radio	KRA-23M3	KNB-48L	n/a	n/a	2.5	4.9	-	4.94	2.47	-0.052	5.00	2.50		
Face	8/22	438	SMA	KRA-27M	KNB-48L	n/a	n/a	2.5	4.9	3.7	P	0.688	0.344	-0.839	P	0.835	0.417
											S	0.751	0.376		S	0.911	0.456
Face	9/23	438	SMA	KRA-23M3	KNB-48L	n/a	n/a	2.5	4.9	3.7	P	2.01	1.01	-0.248	P	2.13	1.06
											S	1.65	0.825		S	1.75	0.873
Body	8/22	438	Radio	KRA-27M	KNB-47L	Belt-Clip	SM	1.9	4.9	-	7.19	3.60	-0.357	7.81	3.90		
Body	8/22	438	Radio	KRA-27M	KNB-48L	Belt-Clip	SM	1.9	4.9	-	7.26	3.63	-0.230	7.65	3.83		
Body	8/22	438	Radio	KRA-27M	KNB-50NC	Belt-Clip	SM	1.9	4.9	-	5.23	2.62	-0.748	6.21	3.11		
Body	9/24	438	Radio	KRA-27M3	KNB-48L	Belt-Clip	SM	1.9	4.9	-	7.11	3.56	-0.129	7.32	3.66		
Body	9/24	438	Radio	KRA-23M3	KNB-47L	Belt-Clip	SM	1.9	4.9	-	6.65	3.33	0.001	6.65	3.33		
Body	9/24	438	Radio	KRA-23M3	KNB-48L	Belt-Clip	SM	1.9	4.9	-	6.39	3.20	-0.078	6.51	3.25		
Body	9/24	438	Radio	KRA-23M3	KNB-50NC	Belt-Clip	SM	1.9	4.9	-	5.91	2.96	-0.440	6.54	3.27		
Body	8/22	438	SMA	KRA-27M	KNB-48L	Lapel-Clip	-	1.4	4.9	3.7	1.37	0.685	-0.936	1.70	0.850		
Body	9/24	438	SMA	KRA-23M3	KNB-48L	Lapel-Clip	-	1.4	4.9	3.7	1.89	0.945	-0.128	1.95	0.973		
Body	9/24	406	Radio	KRA-23M3	KNB-48L	Belt-Clip	SM	1.9	5.0	-	9.99	5.00	-0.127	10.3	5.14		
Body	9/24	406	Radio	KRA-27M3	KNB-48L	Belt-Clip	SM	1.9	5.0	-	7.10	3.55	-0.527	8.02	4.01		
Body	9/24	470	Radio	KRA-23M	KNB-48L	Belt-Clip	SM	1.9	5.1	-	3.05	1.53	-0.515	3.43	1.72		
Body	8/22	470	Radio	KRA-27M	KNB-48L	Belt-Clip	SM	1.9	5.1	-	7.53	3.77	-0.272	8.02	4.01		

SAR LIMIT(S)

HEAD / BODY

SPATIAL PEAK

RF EXPOSURE CATEGORY

FCC 47 CFR 2.1093

Health Canada Safety Code 6

8.0 W/kg




averaged over 1 gram

Occupational / Controlled

Fluid Type	450 MHz Brain				450 MHz Body				Test Date / Fluid Type	8/22B	8/22M	9/23B	9/24M	Unit
Dielectric Constant ϵ_r	IEEE Target	Date	Meas.	Dev.	IEEE Target	Date	Meas.	Dev.	Atmospheric Pressure	100.9	100.9	101.1	101.1	kPa
	43.5 $\pm 5\%$	8/22	44.3	+1.8%	56.7 $\pm 5\%$	8/22	56.2	-0.9%	Relative Humidity	35	35	35	35	%
		9/23	44.4	+2.1%		9/24	56.9	+0.3%	Ambient Temperature	24.0	24.1	23.8	24.0	°C
Conductivity σ (mho/m)	IEEE Target	Date	Meas.	Dev.	IEEE Target	Date	Meas.	Dev.	Fluid Temperature	22.9	23.0	22.8	22.8	°C
	0.87 $\pm 5\%$	8/22	0.89	+2.3%	0.94 $\pm 5\%$	8/22	0.93	-1.1%	Fluid Depth	≥ 15				cm
		9/23	0.89	+2.3%		9/24	0.91	-3.2%	ρ (Kg/m ³)	1000				

1.	Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
2.	Secondary peak SAR levels measured within 2 dB of the primary were reported (P = Primary, S = Secondary).
3.	The face-held SAR evaluations were performed with the worst-case battery type from the body-worn SAR evaluations.
4.	The SAR evaluations with the Speaker-Microphone-Antenna accessory were performed in the worst-case battery configuration from the Radio evaluations.
5.	The power droop of the DUT measured by the DASY4 system for the duration of the SAR evaluations was added to the measured SAR level to report scaled SAR results as shown in the above test data table. A SAR-versus-Time power droop evaluation was performed in the test configuration that reported the maximum-scaled SAR level. See Appendix A (SAR Test Plots) for SAR-versus-Time power droop evaluation plot.
6.	The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
7.	The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.
8.	The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer.
9.	The SAR evaluations were performed within 24 hours of the system performance check.
10.	KNB-47L = Standard Capacity Li-ion Battery KNB-48L = Extended Capacity Li-ion Battery KNB-50NC = Ni-MH Battery
11.	Abbreviations: SM = Speaker-Microphone; SMA = Speaker-Microphone Antenna Type

Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 5 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

4.0 DETAILS OF SAR EVALUATION

The Kenwood USA Corporation Model(s): NX-300-K2, NX-300-K4, TK-5320-2K, TK-5320-K4 Portable UHF PTT Radio Transceiver was compliant for localized Specific Absorption Rate (Occupational / Controlled Exposure) based on the test provisions and conditions described below. Detailed photographs of the test setup are shown in Appendix D.

Test Configuration(s)

1. The Radio Transceiver was evaluated in a face-held configuration with the front of the DUT placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front side of the DUT and the outer surface of the planar phantom.
2. The Speaker-Microphone with Antenna (SMA) was evaluated in a face-held configuration with the front of the SMA placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front side of the SMA and the outer surface of the planar phantom. The Speaker-Microphone with Antenna was connected to the audio port of the Radio Transceiver and the antenna connector on the Radio Transceiver was terminated.
3. The Radio Transceiver was evaluated in a body-worn configuration with the back of the DUT placed parallel to the outer surface of the planar phantom. The attached belt-clip accessory was touching the planar phantom and provided a 1.9 cm spacing from the back of the DUT to the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with the customer-supplied speaker-microphone accessory connected to the audio port.
4. The Speaker-Microphone with Antenna (SMA) was evaluated in a body-worn configuration with the back of the DUT placed parallel to the outer surface of the planar phantom. The attached lapel-clip was touching the planar phantom and provided a 1.4 cm spacing from the back of the DUT to the outer surface of the planar phantom. The Speaker-Microphone with Antenna was connected to the audio port of the Radio Transceiver and the antenna connector on the Radio Transceiver was terminated.



Test Mode & Output Power

5. The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
6. The RF conducted output power levels were measured prior to the SAR evaluations at the antenna connector of the DUT using a Gigatronics 8652A Universal Power Meter according to the procedures described in FCC §2.1046 and IC RSS-Gen.

5.0 EVALUATION PROCEDURES

- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
- (ii) For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
- Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
- Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

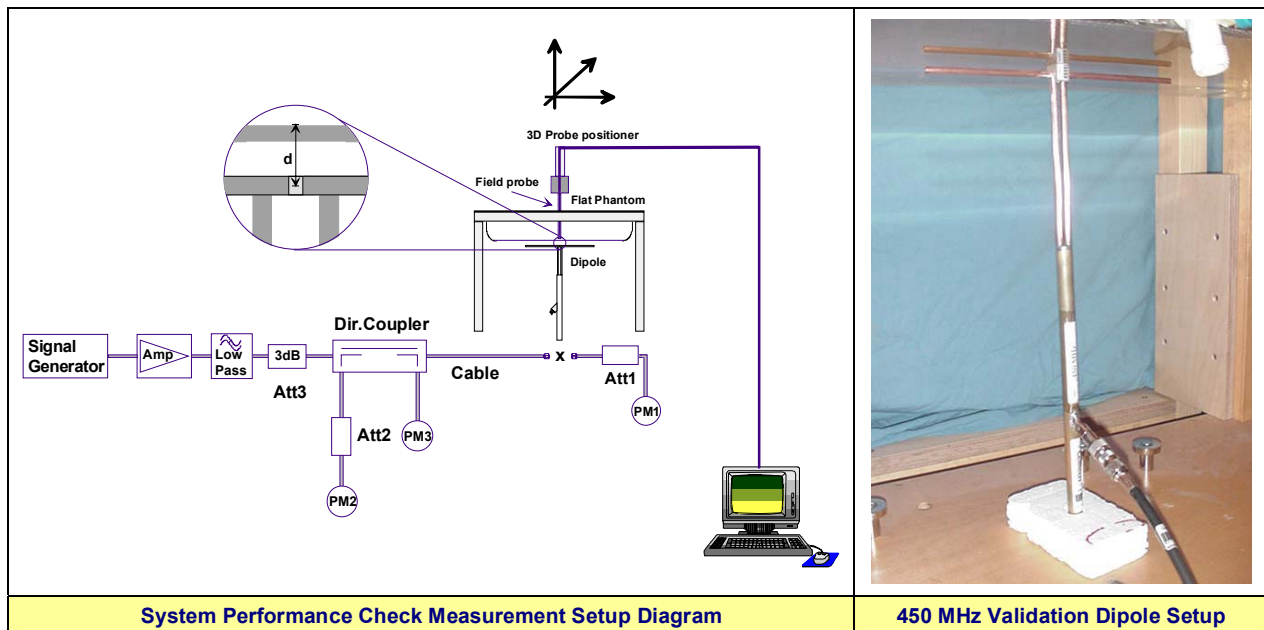
Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 6 of 72

	Date(s) of Evaluation Aug. 22 & Sept. 23-24, 2008	Test Report Serial No. 082108ALH-T924-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date September 25, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational / Controlled	



6.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a system check was performed using a Plexiglas planar phantom and 450 MHz dipole (see Appendix B for system performance check test plot). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the system validation target SAR value (see Appendix E for system validation procedures).

SYSTEM PERFORMANCE CHECK EVALUATIONS																
Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
	Freq. MHz	Sys. Val Target	Meas.	Dev.	Sys. Val Target	Meas.	Dev.	Sys. Val Target	Meas.	Dev.						
Aug 22	Brain 450	1.18 $\pm 10\%$	1.22	+3.4%	43.4 $\pm 5\%$	44.3	+2.1%	0.89 $\pm 5\%$	0.89	0.0%	1000	24.0	22.9	≥ 15	35	100.9
Sep 23	Brain 450	1.18 $\pm 10\%$	1.22	+3.4%	43.4 $\pm 5\%$	44.4	+2.3%	0.89 $\pm 5\%$	0.89	0.0%	1000	23.8	22.8	≥ 15	35	101.1
Note(s)		1. The target SAR value is referenced from the System Validation procedure performed by Celltech Labs Inc. (see Appendix E).														
		2. The target dielectric parameters are referenced from the System Validation procedure performed by Celltech Labs Inc. (see Appendix E).														
		3. The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.														
		4. The SAR evaluations were performed within 24 hours of the system performance check.														



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4		DUT:	Portable UHF PTT Radio Transceiver			
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 7 of 72

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

7.0 SIMULATED EQUIVALENT TISSUES




The simulated tissue mixtures consisted of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide was added and visual inspection made to ensure air bubbles were not trapped during the mixing process. The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz Brain	450 MHz Body
	System Check & DUT Evaluation	DUT Evaluation
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

8.0 SAR LIMITS

SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	(General Population / Uncontrolled Exposure)	(Occupational / Controlled Exposure)
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 8 of 72

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 ILAC-MRA ACCREDITED	 21A ACCREDITED	Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled			


9.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.(s)	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Evaluation Phantom</u>	
Type	Side Planar Phantom
Shell Material	Plexiglas
Bottom Thickness	2.0 mm ± 0.1 mm
Outer Dimensions	75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)
<u>Validation Phantom (≤ 450MHz)</u>	
Type	Planar Phantom
Shell Material	Plexiglas
Bottom Thickness	6.2 mm ± 0.1 mm
Outer Dimensions	86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)

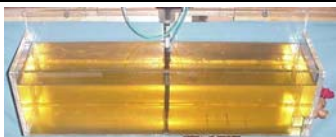
Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 9 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	


10.0 PROBE SPECIFICATION (ET3DV6)

<p>Construction: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)</p> <p>Calibration: In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)</p> <p>Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)</p> <p>Directivity: ± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal to probe axis)</p> <p>Dynamic Range: $5 \mu\text{W/g}$ to $> 100 \text{ mW/g}$; Linearity: ± 0.2 dB</p> <p>Surface Detect: ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces</p> <p>Dimensions: Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm</p> <p>Application: General dosimetry up to 3 GHz Compliance tests of mobile phone</p>	 <p>ET3DV6 E-Field Probe</p>
---	--


11.0 SIDE PLANAR PHANTOM

<p>The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.</p>	 <p>Plexiglas Side Planar Phantom</p>
---	--



12.0 VALIDATION PLANAR PHANTOM

<p>The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted to the table of the DASY4 compact system.</p>	 <p>Plexiglas Validation Planar Phantom</p>
--	---

13.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	 <p>Device Holder</p>
--	---



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 10 of 72

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

14.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE DATE
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	NA	NA
x	-Robot	00046	599396-01	NA	NA
x	-DAE4	00019	353	22Apr08	22Apr09
x	-ET3DV6 E-Field Probe	00017	1590	21Jul08	21Jul09
x	-450 MHz Validation Dipole	00024	136	25Jul08	25Jul09
	-SAM Phantom V4.0C	00154	1033	NA	NA
	-Barski Planar Phantom	00155	03-01	NA	NA
x	-Plexiglas Side Planar Phantom	00156	161	NA	NA
x	-Plexiglas Validation Planar Phantom	00157	137	NA	NA
	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	NA	NA
x	HP 85070C Dielectric Probe Kit	00033	US39240170	NA	NA
x	Gigatronics 8652A Power Meter	00007	1835272	23Apr08	23Apr09
x	Gigatronics 80701A Power Sensor	00014	1833699	23Apr08	23Apr09
x	HP 8753ET Network Analyzer	00134	US39170292	28Apr08	28Apr09
x	HP 8648D Signal Generator	00005	3847A00611	NR	NR
	Rohde & Schwarz SMR20 Signal Generator	00006	100104	NR	NR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	NR	NR
	Amplifier Research 10W1000C Power Amplifier	00041	27887	NR	NR
	Nextec NB00383 Microwave Amplifier	00151	0535	NR	NR
Abbr.	NA = Not Applicable		NR = Not Required		

Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4		DUT:	Portable UHF PTT Radio Transceiver			
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 11 of 72



	Date(s) of Evaluation Aug. 22 & Sept. 23-24, 2008	Test Report Serial No. 082108ALH-T924-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date September 25, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational / Controlled	

Test Lab Certificate No. 2470.01

15.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration (450 MHz)	6.65	Normal	1	1	6.65	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	0.8	Rectangular	1.732050808	1	0.5	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Test Sample Related						
Device positioning	2.9	Normal	1	1	2.9	12
Device holder uncertainty	3.6	Normal	1	1	3.6	8
Power drift	5	Rectangular	1.732050808	1	2.9	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	3.2	Normal	1	0.64	2.0	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.1	Normal	1	0.6	1.3	∞
Combined Standard Uncertainty					11.26	
Expanded Uncertainty (k=2)					22.52	
Measurement Uncertainty Table in accordance with IEEE 1528-2003 and IEC 62209-1:2005						



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 12 of 72

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

MEASUREMENT UNCERTAINTIES (CONT.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration (450 MHz)	6.65	Normal	1	1	6.65	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	0.8	Rectangular	1.732050808	1	0.5	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Dipole						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	0	Normal	1	0.64	0.0	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.3	Normal	1	0.6	1.4	∞
Combined Standard Uncertainty					9.39	
Expanded Uncertainty (k=2)					18.77	
Measurement Uncertainty Table in accordance with IEEE 1528-2003 and IEC 62209-1:2005						



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 13 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

16.0 REFERENCES




- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."

Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 14 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

APPENDIX A - SAR MEASUREMENT DATA

Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 15 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	
Test Lab Certificate No. 2470.01				

Date Tested: 08/22/2008

Face-held SAR - Radio - KRA-27M Antenna - KNB-48L Li-ion Battery - Mid Channel - 438 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Ambient Temp: 24°C; Fluid Temp: 22.9°C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 4.9 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 44.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 5.36 mW/g

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Radio Transceiver

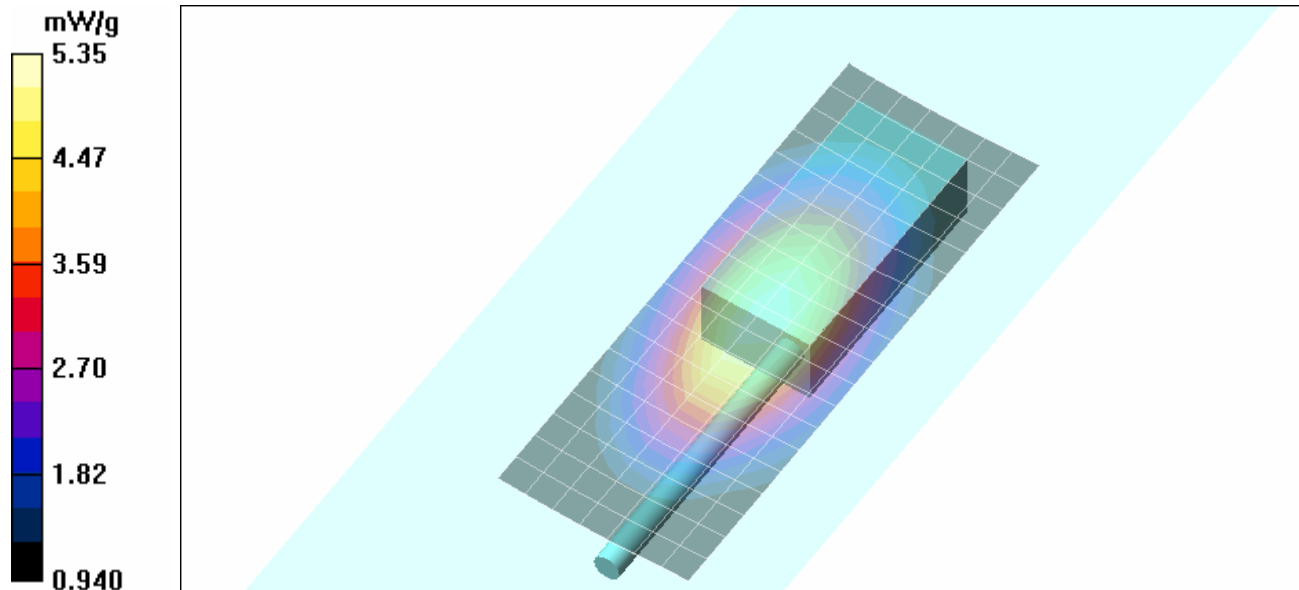
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 80.2 V/m; Power Drift = -0.218 dB

Peak SAR (extrapolated) = 6.96 W/kg

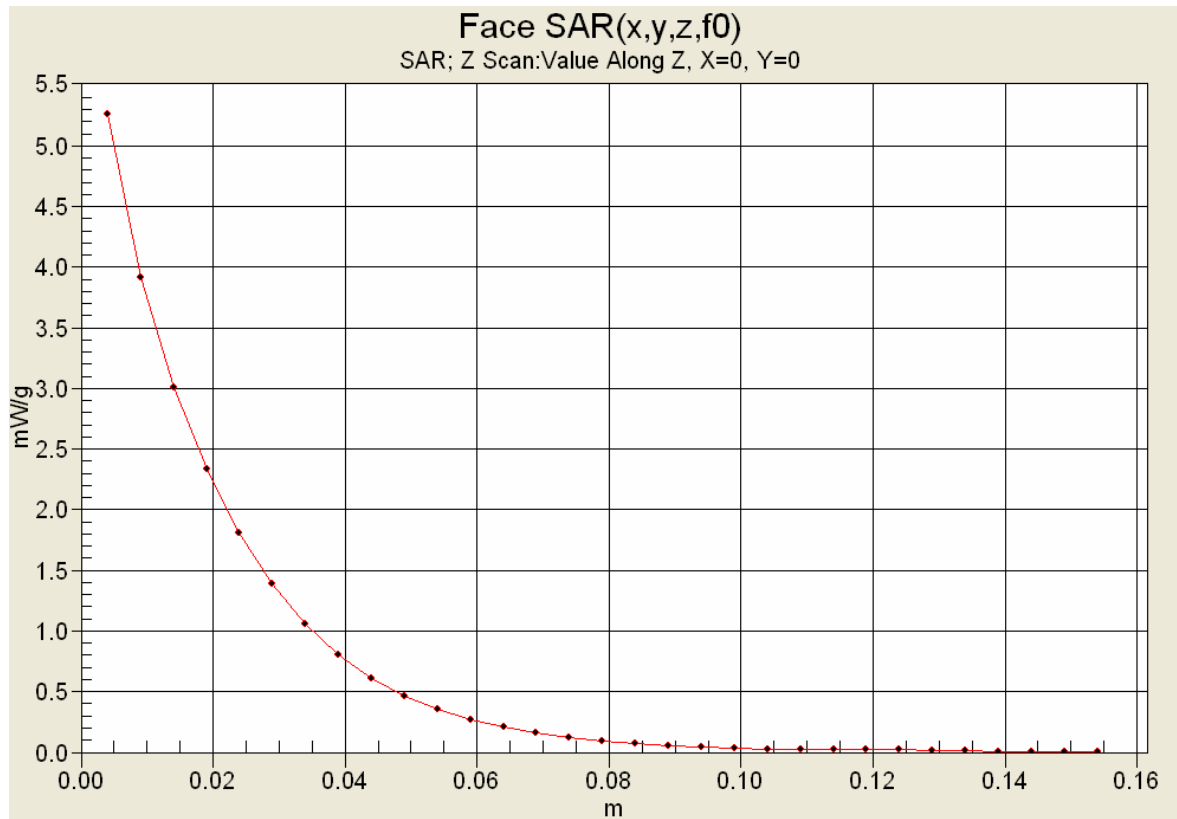
SAR(1 g) = 5.11 mW/g; SAR(10 g) = 3.83 mW/g




Maximum value of SAR (measured) = 5.35 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 16 of 72

Z-Axis Scan



 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 ILAC-MRA ACCREDITED 
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	
Test Lab Certificate No. 2470.01				

Date Tested: 09/23/2008

Face-held SAR - Radio - KRA-27M3 Antenna - KNB-48L Li-ion Battery - Mid Channel - 438 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Ambient Temp: 23.8°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 4.9 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 44.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x22x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.91 mW/g

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Radio Transceiver

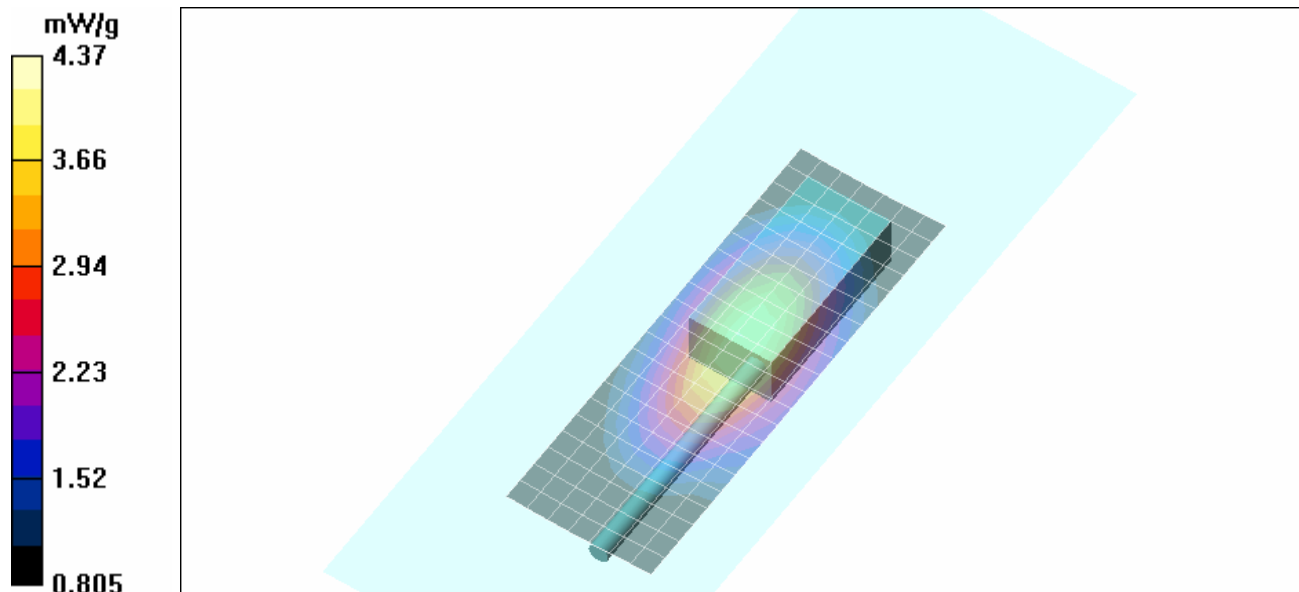
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 75.6 V/m; Power Drift = -0.684 dB



Peak SAR (extrapolated) = 5.70 W/kg

SAR(1 g) = 4.18 mW/g; SAR(10 g) = 3.12 mW/g

Maximum value of SAR (measured) = 4.37 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4		DUT:	Portable UHF PTT Radio Transceiver			
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 18 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 09/23/2008

Face-held SAR - Radio - KRA-23M3 Antenna - KNB-48L Li-ion Battery - Mid Channel - 438 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Ambient Temp: 23.8°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 4.9 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 44.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x22x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.83 mW/g

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Radio Transceiver

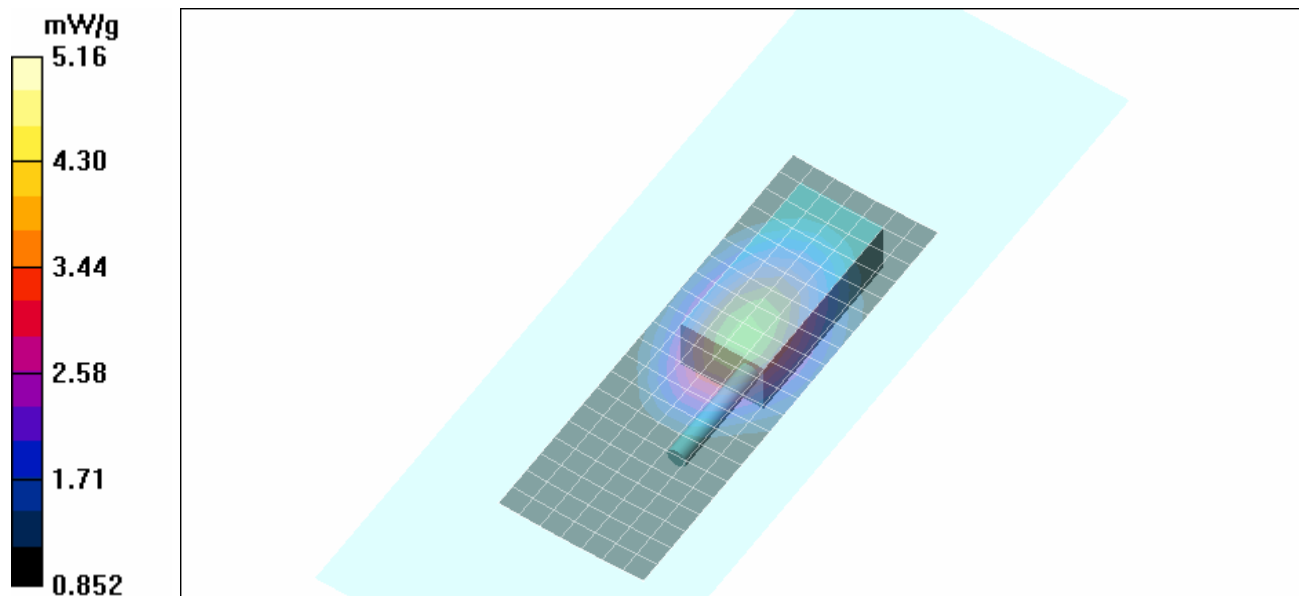
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 75.4 V/m; Power Drift = -0.052 dB



Peak SAR (extrapolated) = 6.76 W/kg

SAR(1 g) = 4.94 mW/g; SAR(10 g) = 3.68 mW/g

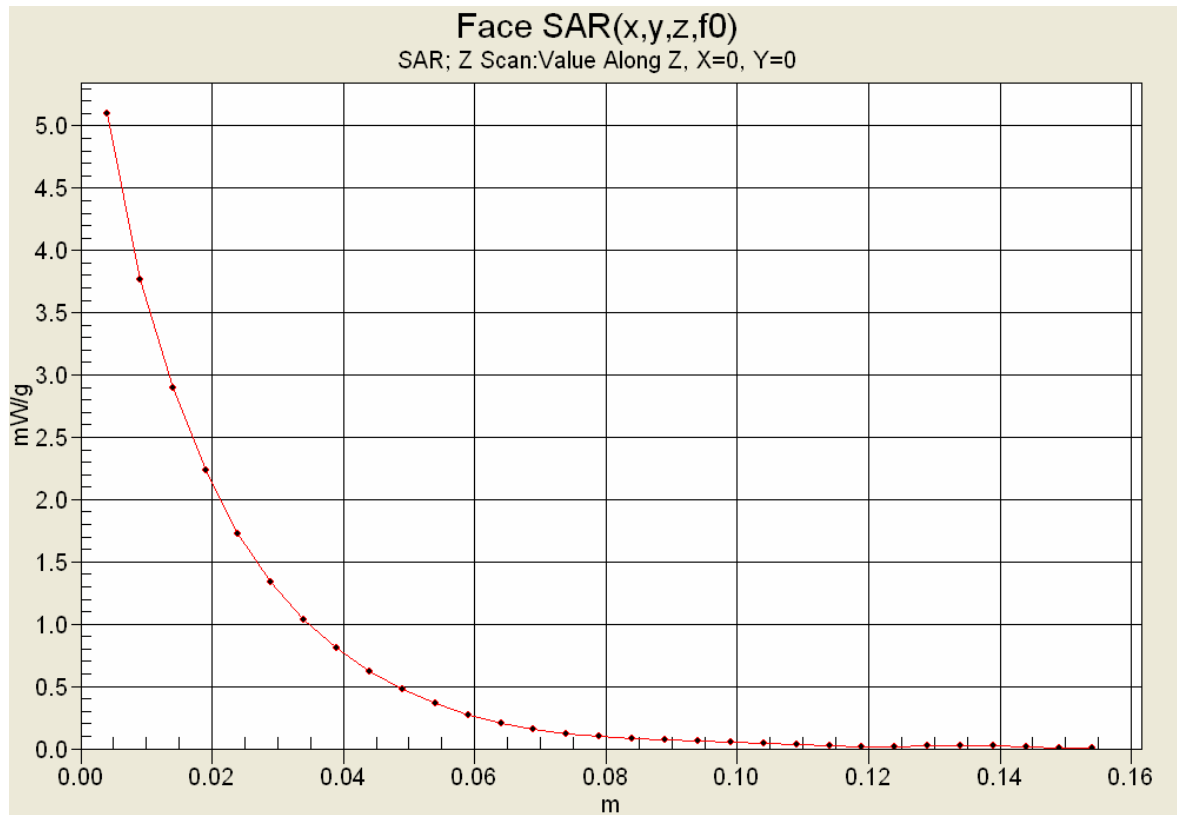
Maximum value of SAR (measured) = 5.16 mW/g





Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 19 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Z-Axis Scan



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 20 of 72

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 08/22/2008

Face-held SAR - SMA - KRA-27M Antenna - KNB-48L Li-ion Battery - Mid Channel - 438 MHz

DUT: Kenwood NX-300-K4; Type: Portable UHF PTT Radio Transceiver w/ Speaker-Mic-Antenna; Serial: 12345678

Ambient Temp: 24°C; Fluid Temp: 22.9°C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 3.7 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 44.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Speaker-Microphone with Antenna Area Scan (8x17x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.849 mW/g

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Speaker-Microphone with Antenna Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.3 V/m; Power Drift = -0.839 dB

Peak SAR (extrapolated) = 0.989 W/kg

SAR(1 g) = 0.688 mW/g; SAR(10 g) = 0.498 mW/g

Maximum value of SAR (measured) = 0.724 mW/g

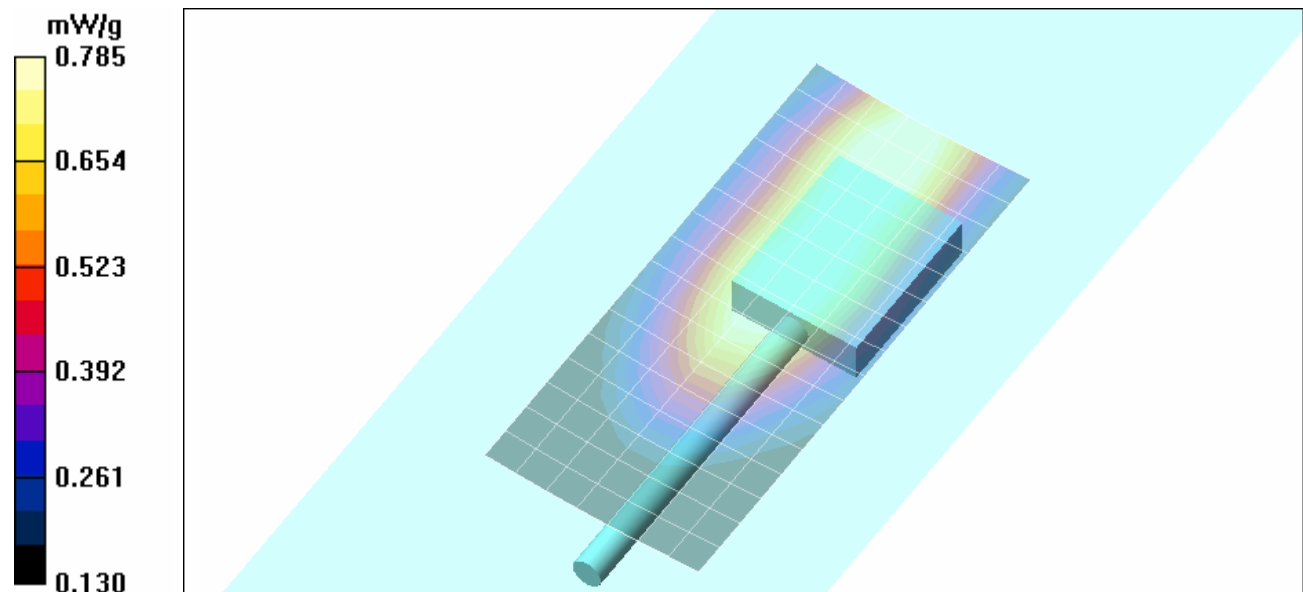
Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Speaker-Microphone with Antenna Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.3 V/m; Power Drift = -0.839 dB



Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.751 mW/g; SAR(10 g) = 0.551 mW/g

Maximum value of SAR (measured) = 0.785 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4		DUT:	Portable UHF PTT Radio Transceiver			
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 21 of 72

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 09/23/2008

Face-held SAR - SMA - KRA-23M3 Antenna - KNB-48L Li-ion Battery - Mid Channel - 438 MHz

DUT: Kenwood NX-300-K4; Type: Portable UHF PTT Radio Transceiver w/ Speaker-Mic-Antenna; Serial: 12345678

Ambient Temp: 23.8°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 3.7 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 44.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Speaker-Microphone with Antenna Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.95 mW/g

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Speaker-Microphone with Antenna Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.7 V/m; Power Drift = -0.248 dB

Peak SAR (extrapolated) = 2.86 W/kg

SAR(1 g) = 2.01 mW/g; SAR(10 g) = 1.46 mW/g

Maximum value of SAR (measured) = 2.10 mW/g

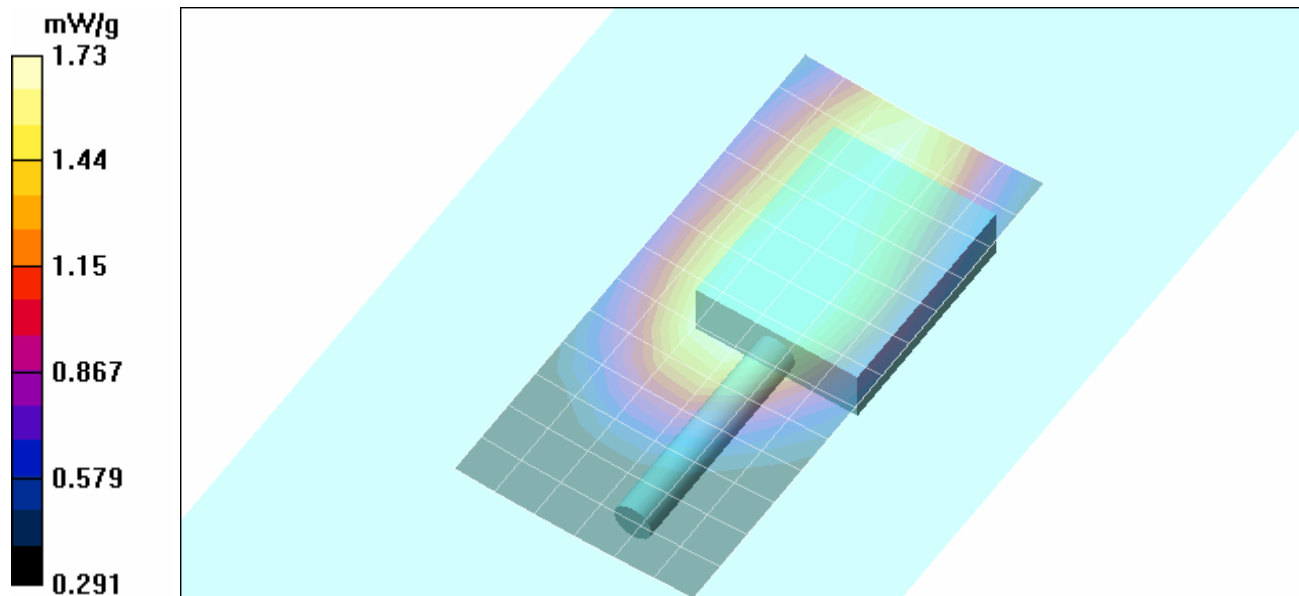
Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom - Speaker-Microphone with Antenna Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.7 V/m; Power Drift = -0.248 dB




Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 1.65 mW/g; SAR(10 g) = 1.22 mW/g

Maximum value of SAR (measured) = 1.73 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 22 of 72

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 ILAC-MRA ACCREDITED 
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	
Test Lab Certificate No. 2470.01				

Date Tested: 08/22/2008

Body-worn SAR - Radio - KRA-27M Antenna - KNB-47L Li-ion Battery - Mid Channel - 438 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Body-worn Accessory: Belt-Clip (P/N: KBH-11); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 24.1°C; Fluid Temp: 23°C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 4.9 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 56.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.94 mW/g

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

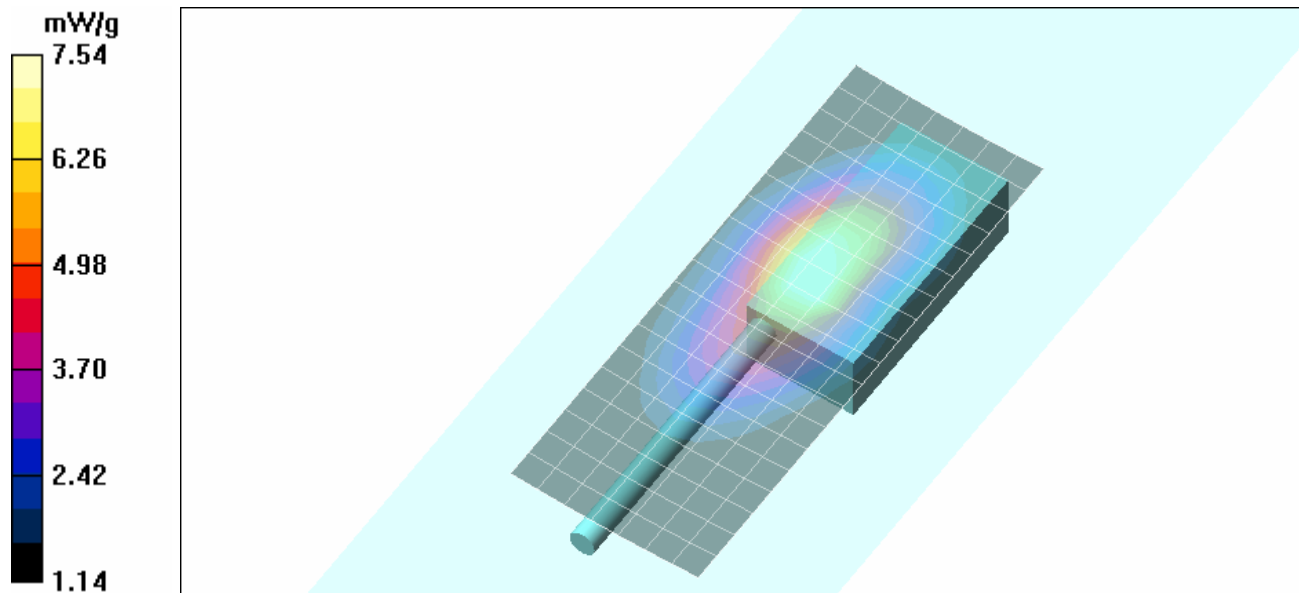
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 83.7 V/m; Power Drift = -0.357 dB



Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 7.19 mW/g; SAR(10 g) = 5.25 mW/g

Maximum value of SAR (measured) = 7.54 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4		DUT:	Portable UHF PTT Radio Transceiver			
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 23 of 72

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 08/22/2008

Body-worn SAR - Radio - KRA-27M Antenna - KNB-48L Li-ion Battery - Mid Channel - 438 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Body-worn Accessory: Belt-Clip (P/N: KBH-11); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 24.1°C; Fluid Temp: 23°C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 4.9 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 56.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.32 mW/g

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

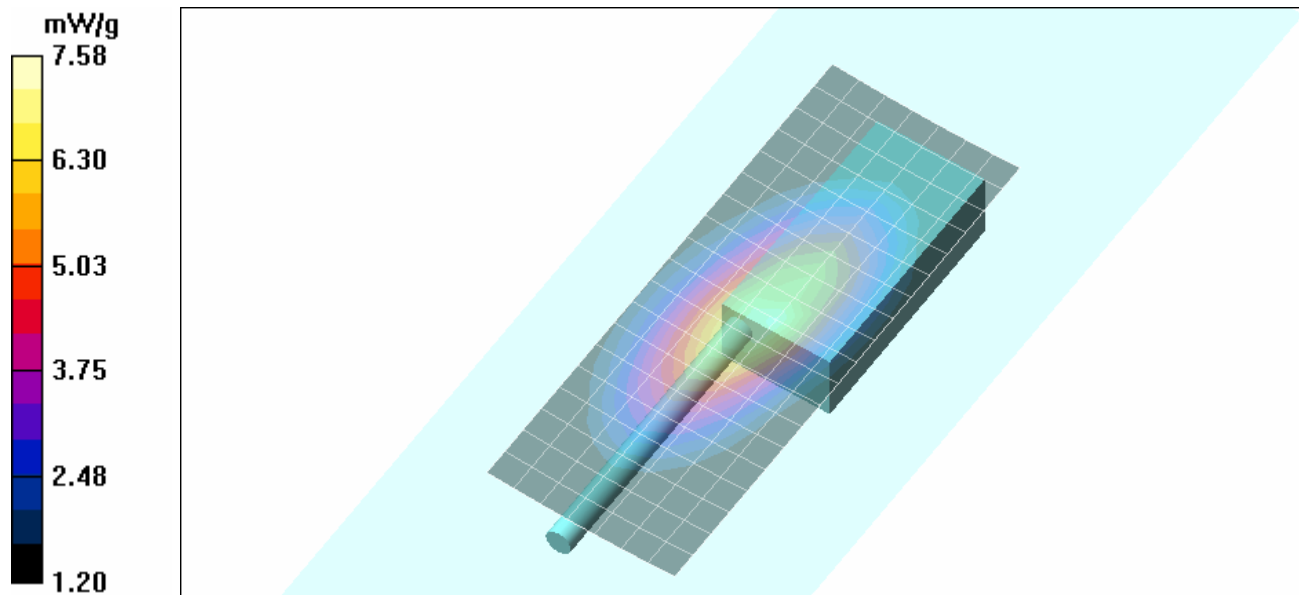
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 94.2 V/m; Power Drift = -0.230 dB



Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 7.26 mW/g; SAR(10 g) = 5.18 mW/g

Maximum value of SAR (measured) = 7.58 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4		DUT:	Portable UHF PTT Radio Transceiver			
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 24 of 72

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 08/22/2008

Body-worn SAR - Radio - KRA-27M Antenna - KNB-50NC Ni-MH Battery - Mid Channel - 438 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Body-worn Accessory: Belt-Clip (P/N: KBH-11); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 24.1°C; Fluid Temp: 23°C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 4.9 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 56.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 5.61 mW/g

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

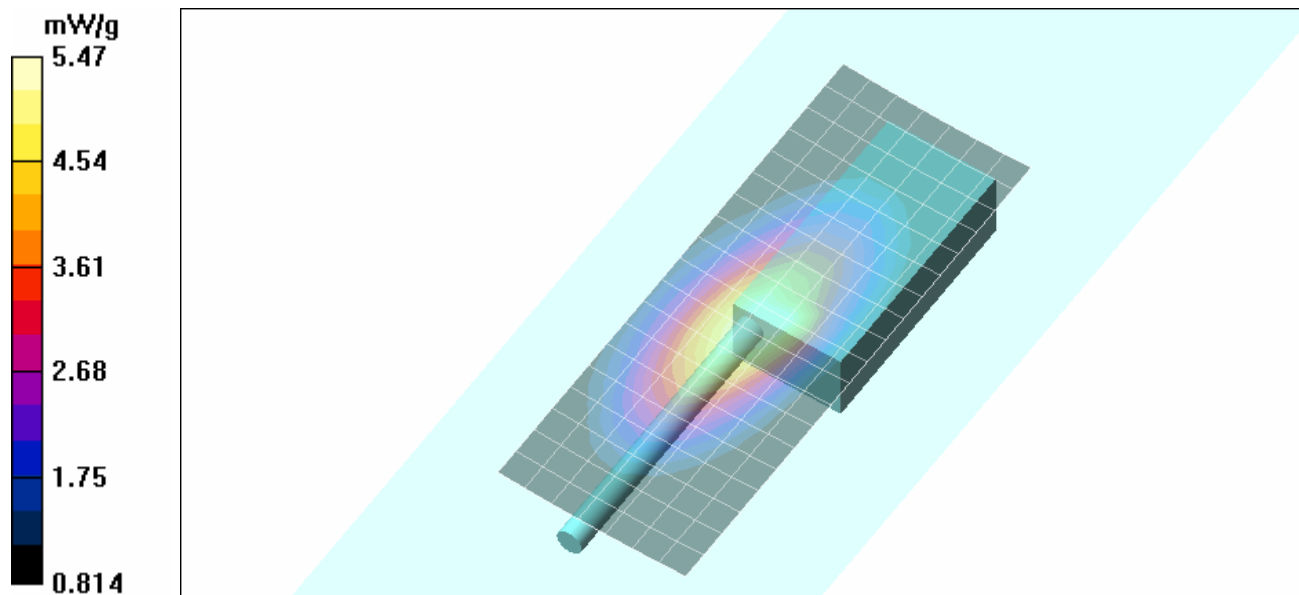
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 81.0 V/m; Power Drift = -0.748 dB



Peak SAR (extrapolated) = 7.75 W/kg

SAR(1 g) = 5.23 mW/g; SAR(10 g) = 3.75 mW/g

Maximum value of SAR (measured) = 5.47 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 25 of 72

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 09/24/2008

Body-worn SAR - Radio - KRA-27M3 Antenna - KNB-48L Li-ion Battery - Mid Channel - 438 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Body-worn Accessory: Belt-Clip (P/N: KBH-11); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 24°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 4.9 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 56.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 8.28 mW/g

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

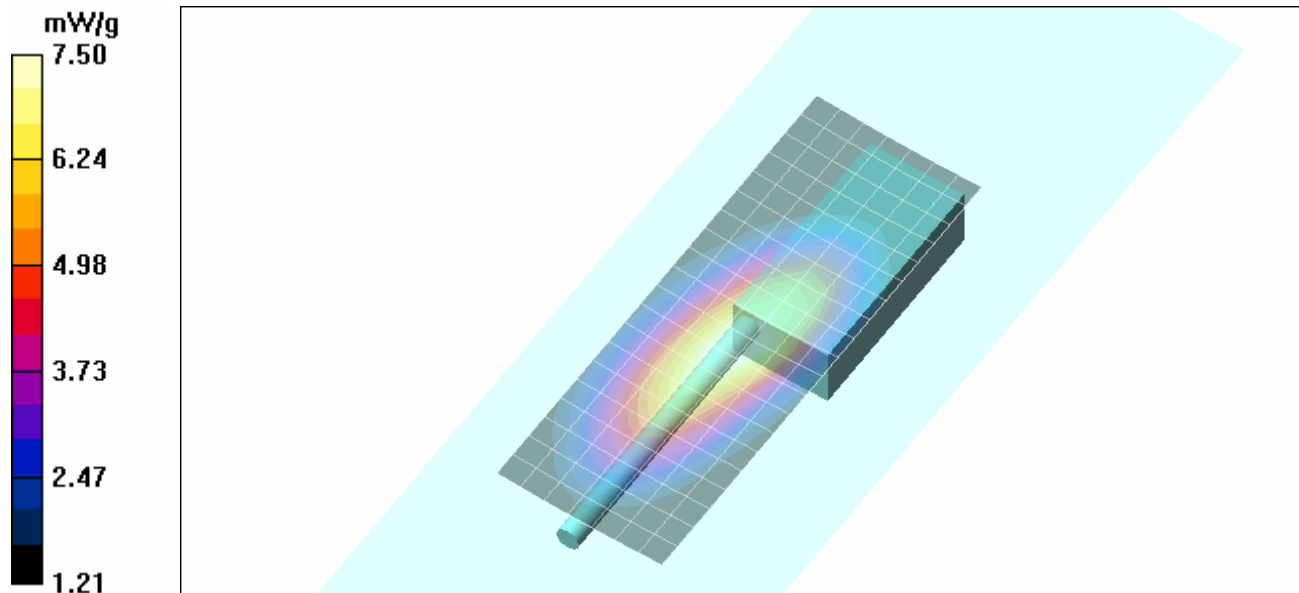
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 88.5 V/m; Power Drift = -0.129 dB



Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 7.11 mW/g; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 7.50 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4		DUT:	Portable UHF PTT Radio Transceiver			
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 26 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 09/24/2008

Body-worn SAR - Radio - KRA-23M3 Antenna - KNB-47L Li-ion Battery - Mid Channel - 438 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Body-worn Accessory: Belt-Clip (P/N: KBH-11); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 24°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 4.9 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 56.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 5.88 mW/g

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

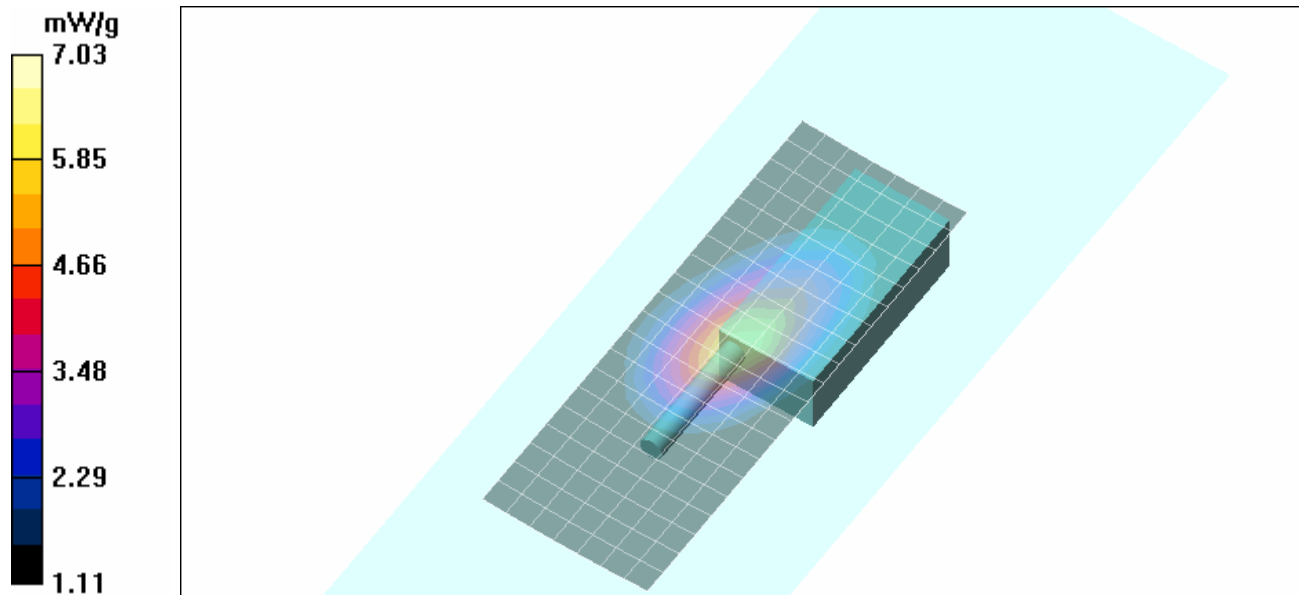
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 84.4 V/m; Power Drift = 0.001 dB




Peak SAR (extrapolated) = 9.84 W/kg

SAR(1 g) = 6.65 mW/g; SAR(10 g) = 4.78 mW/g

Maximum value of SAR (measured) = 7.03 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 27 of 72

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 09/24/2008

Body-worn SAR - Radio - KRA-23M3 Antenna - KNB-48L Li-ion Battery - Mid Channel - 438 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Body-worn Accessory: Belt-Clip (P/N: KBH-11); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 24°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 4.9 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 56.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 6.70 mW/g

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

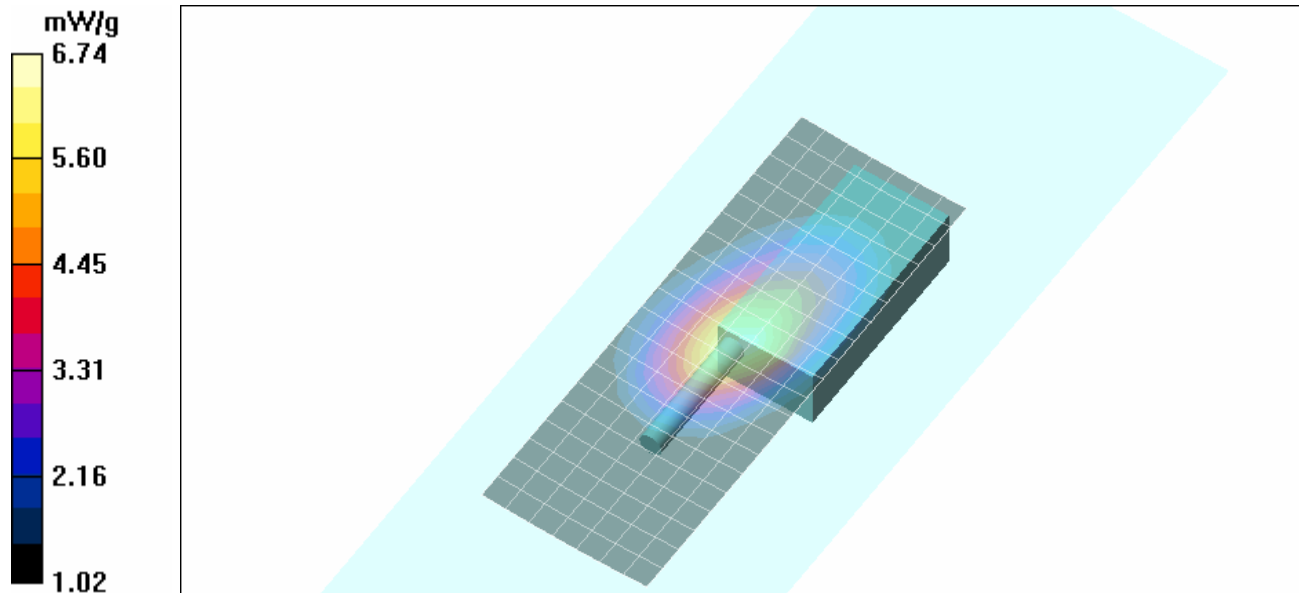
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 84.4 V/m; Power Drift = -0.078 dB



Peak SAR (extrapolated) = 9.40 W/kg

SAR(1 g) = 6.39 mW/g; SAR(10 g) = 4.58 mW/g

Maximum value of SAR (measured) = 6.74 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4		DUT:	Portable UHF PTT Radio Transceiver			
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 28 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	
Test Lab Certificate No. 2470.01				

Date Tested: 09/24/2008

Body-worn SAR - Radio - KRA-23M3 Antenna - KNB-50NC Ni-MH Battery - Mid Channel - 438 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Body-worn Accessory: Belt-Clip (P/N: KBH-11); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 24°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 4.9 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 56.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 6.07 mW/g

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

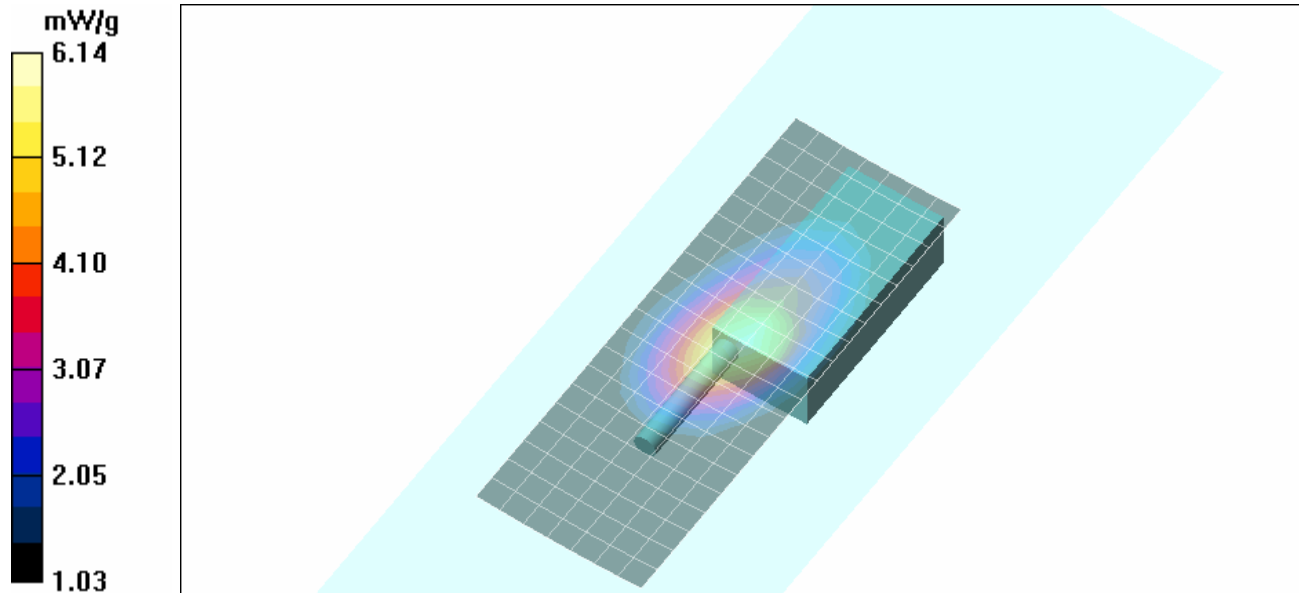
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 84.3 V/m; Power Drift = -0.440 dB




Peak SAR (extrapolated) = 8.70 W/kg

SAR(1 g) = 5.91 mW/g; SAR(10 g) = 4.28 mW/g

Maximum value of SAR (measured) = 6.14 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 29 of 72

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 08/22/2008

Body-worn SAR - SMA - KRA-27M Antenna - KNB-48L Li-ion Battery - Mid Channel - 438 MHz

DUT: Kenwood NX-300-K4; Type: Portable UHF PTT Radio Transceiver w/ Speaker-Mic-Antenna; Serial: 12345678

Ambient Temp: 24.1°C; Fluid Temp: 23°C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 3.7 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 56.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.4 cm Lapel-Clip Spacing from Back Side of DUT to Planar Phantom - Speaker-Mic with Antenna

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.34 mW/g

Body-worn SAR - 1.4 cm Lapel-Clip Spacing from Back Side of DUT to Planar Phantom - Speaker-Mic with Antenna

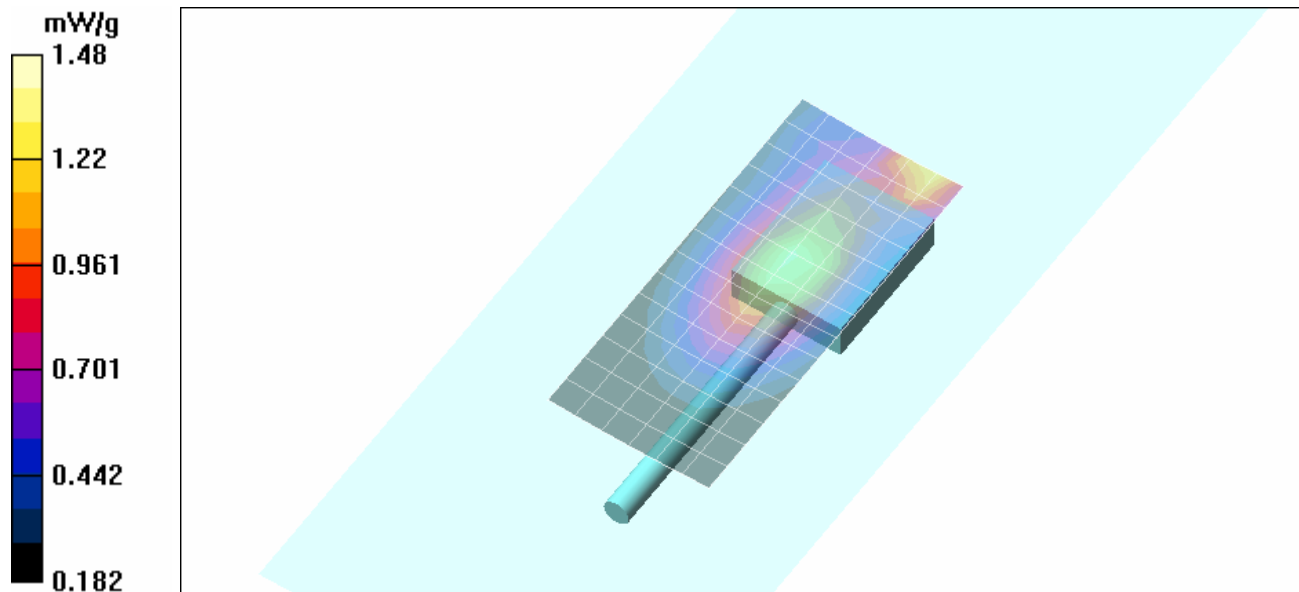
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 43.0 V/m; Power Drift = -0.936 dB



Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.37 mW/g; SAR(10 g) = 0.935 mW/g

Maximum value of SAR (measured) = 1.48 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4		DUT:	Portable UHF PTT Radio Transceiver			
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 30 of 72

 Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 09/24/2008

Body-worn SAR - SMA - KRA-23M3 Antenna - KNB-48L Li-ion Battery - Mid Channel - 438 MHz

DUT: Kenwood NX-300-K4; Type: Portable UHF PTT Radio Transceiver w/ Speaker-Mic-Antenna; Serial: 12345678

Ambient Temp: 24°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 3.7 W Conducted

Frequency: 438 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 56.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.4 cm Lapel-Clip Spacing from Back Side of DUT to Planar Phantom - Speaker-Mic with Antenna

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 2.03 mW/g

Body-worn SAR - 1.4 cm Lapel-Clip Spacing from Back Side of DUT to Planar Phantom - Speaker-Mic with Antenna

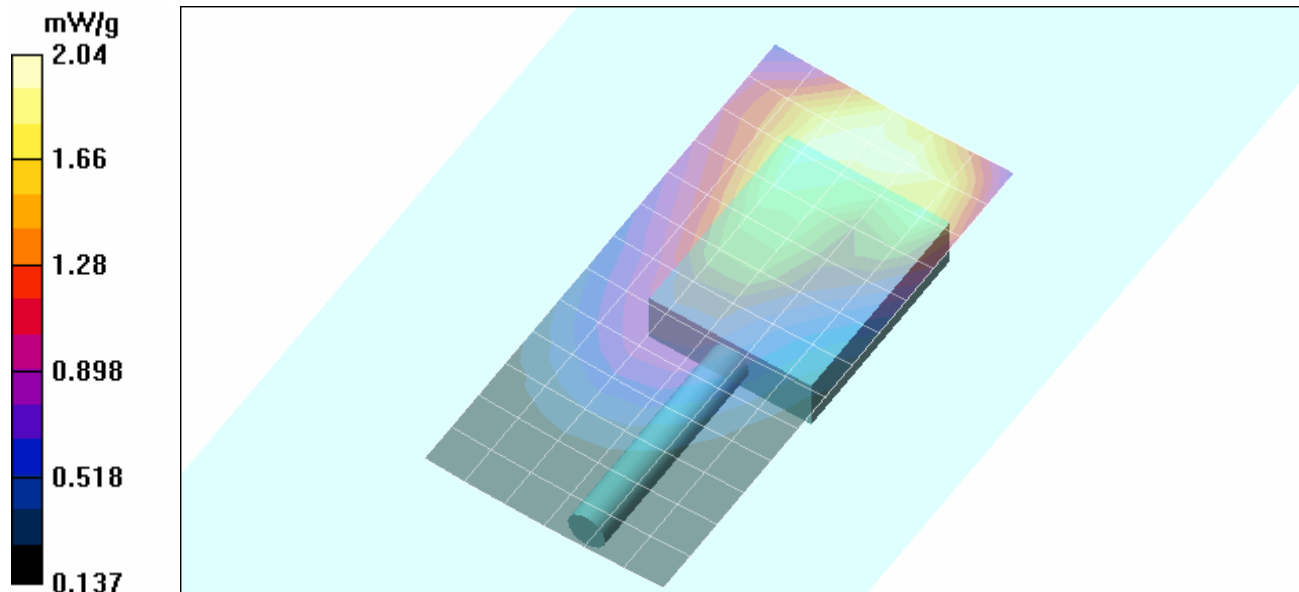
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 36.7 V/m; Power Drift = -0.128 dB



Peak SAR (extrapolated) = 2.98 W/kg

SAR(1 g) = 1.89 mW/g; SAR(10 g) = 1.19 mW/g

Maximum value of SAR (measured) = 2.04 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4		DUT:	Portable UHF PTT Radio Transceiver			
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 31 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	
Test Lab Certificate No. 2470.01				

Date Tested: 09/24/2008

Body-worn SAR - Radio - KRA-23M3 Antenna - KNB-48L Li-ion Battery - Low Channel - 406 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Body-worn Accessory: Belt-Clip (P/N: KBH-11); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 24°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 5.0 W Conducted

Frequency: 406 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 56.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 8.51 mW/g

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

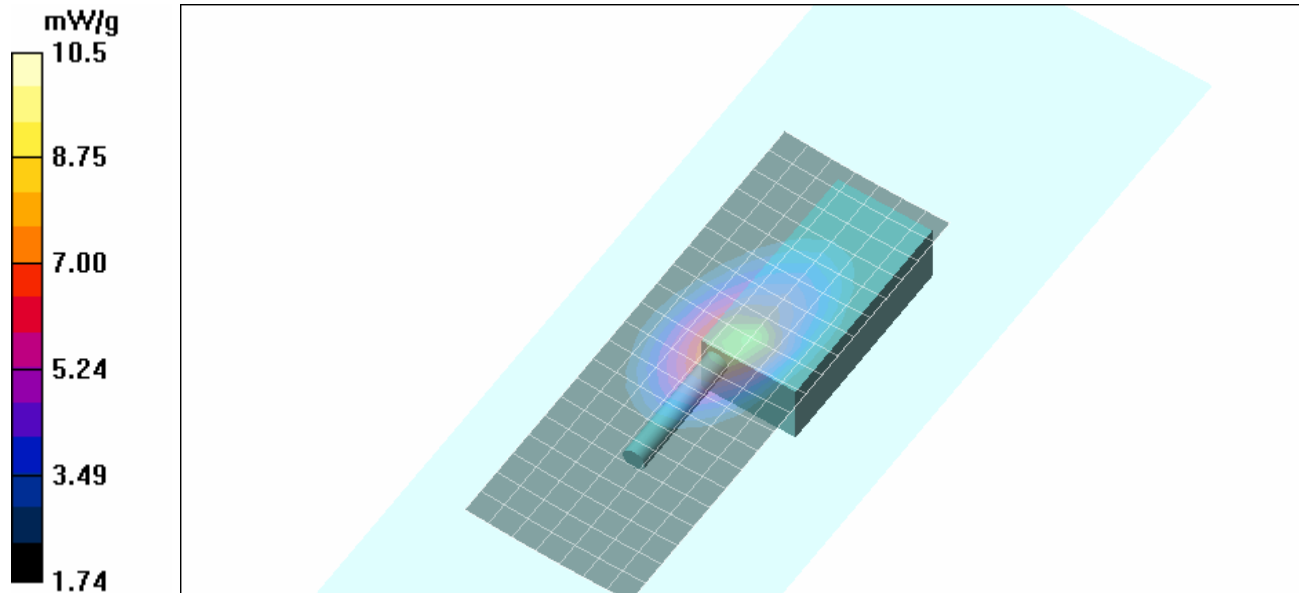
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 105.4 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 14.7 W/kg

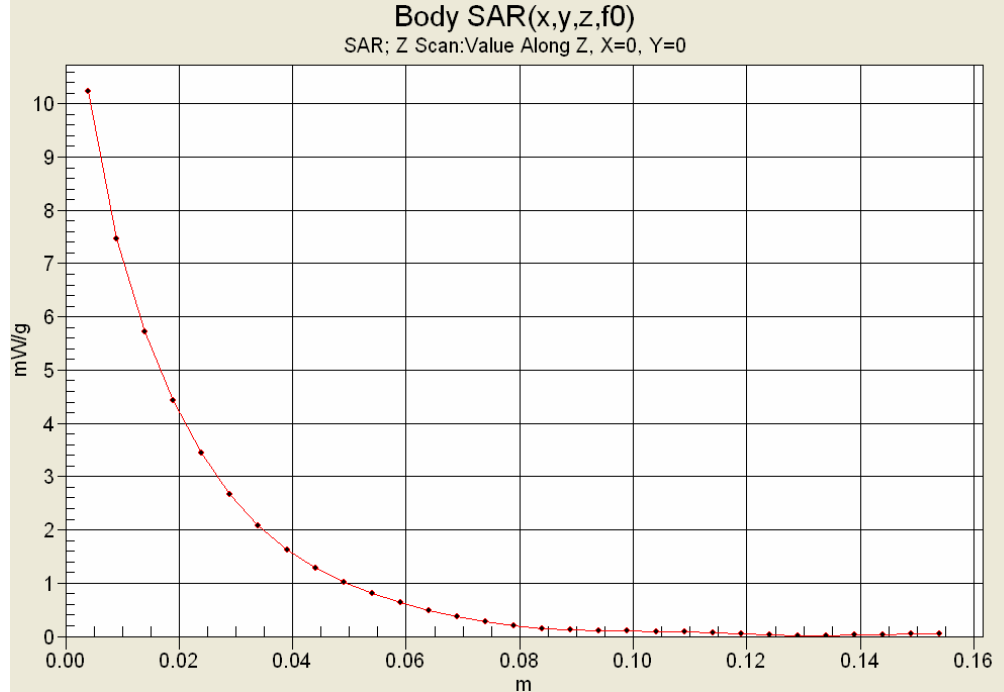
SAR(1 g) = 9.99 mW/g; SAR(10 g) = 7.19 mW/g

Maximum value of SAR (measured) = 10.5 mW/g



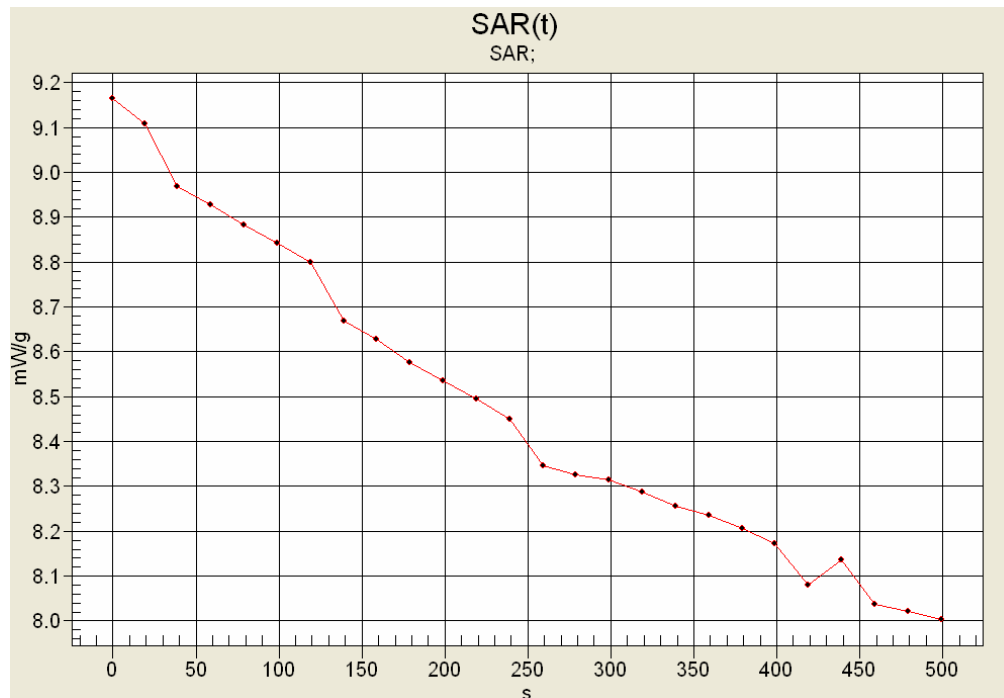
Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 32 of 72

Z-Axis Scan






SAR-versus-Time Power Droop Evaluation

Body-worn Configuration
Low Channel - 406 MHz
KRA-23M3 Antenna
KNB-48L Battery



Max SAR: 9.16 mW/g
Low SAR: 8.00 mW/g (-0.588 dB)
SAR after 340s: 8.26 mW/g (-0.449 dB)
(340s = Zoom Scan Duration)

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	
Test Lab Certificate No. 2470.01				

Date Tested: 09/24/2008

Body-worn SAR - Radio - KRA-27M3 Antenna - KNB-48L Li-ion Battery - Low Channel - 406 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Body-worn Accessory: Belt-Clip (P/N: KBH-11); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 24°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 5.0 W Conducted

Frequency: 406 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 56.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.92 mW/g

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

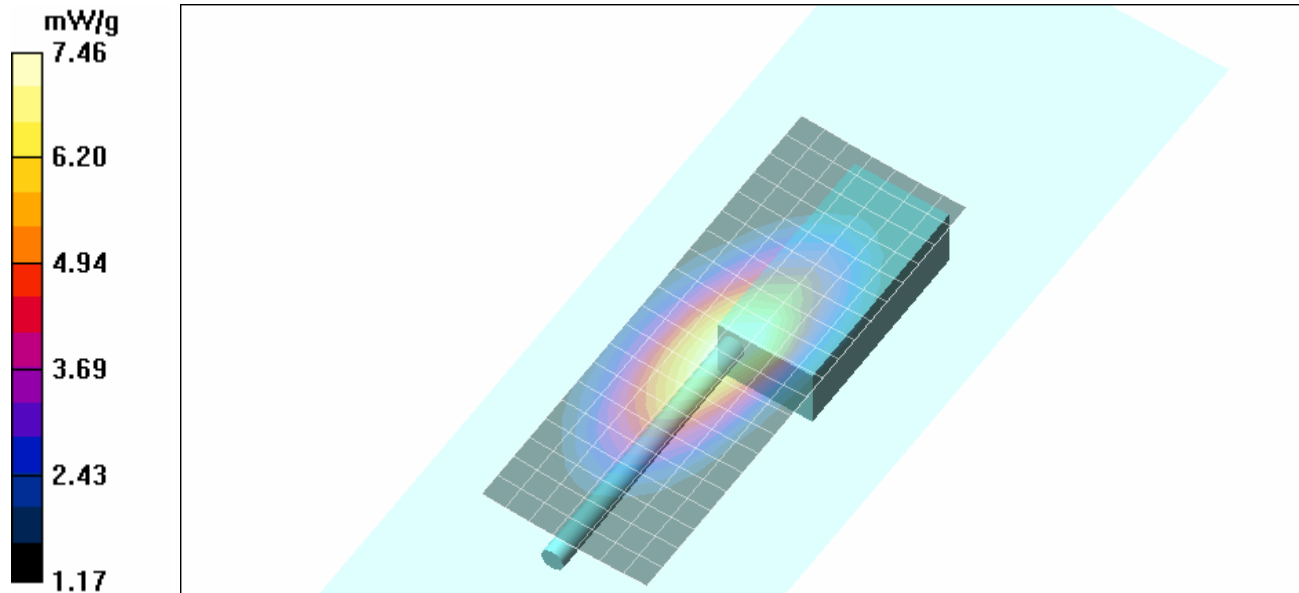
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 92.6 V/m; Power Drift = -0.527 dB



Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 7.1 mW/g; SAR(10 g) = 5.11 mW/g

Maximum value of SAR (measured) = 7.46 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 34 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 09/24/2008

Body-worn SAR - Radio - KRA-23M Antenna - KNB-48L Li-ion Battery - High Channel - 470 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Body-worn Accessory: Belt-Clip (P/N: KBH-11); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 24°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 5.1 W Conducted

Frequency: 470 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 56.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x21x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.41 mW/g

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

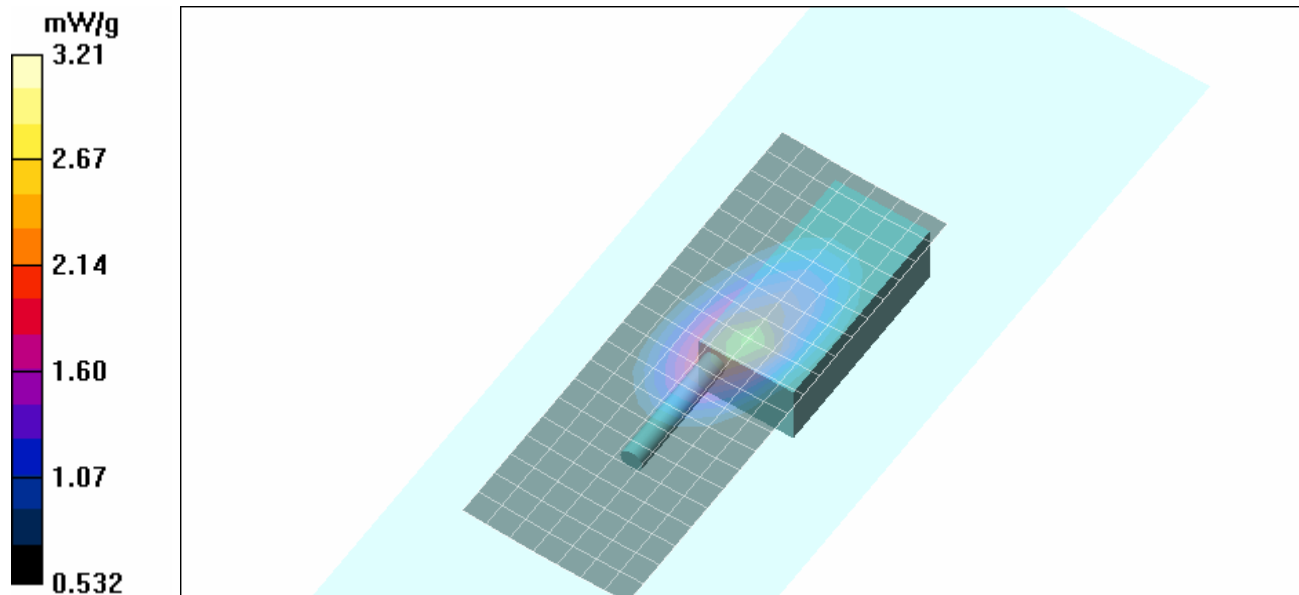
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 60.6 V/m; Power Drift = -0.515 dB




Peak SAR (extrapolated) = 4.58 W/kg

SAR(1 g) = 3.05 mW/g; SAR(10 g) = 2.13 mW/g

Maximum value of SAR (measured) = 3.21 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4		DUT:	Portable UHF PTT Radio Transceiver			
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 35 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 08/22/2008

Body-worn SAR - Radio - KRA-27M Antenna - KNB-48L Li-ion Battery - High Channel - 470 MHz

DUT: Kenwood Model: NX-300-K4; Type: Portable UHF PTT Radio Transceiver; Serial: 12345678

Body-worn Accessory: Belt-Clip (P/N: KBH-11); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 24.1°C; Fluid Temp: 23°C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: FM (CW)

RF Output Power: 5.1 W Conducted

Frequency: 470 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.93 \text{ mho/m}$; $\epsilon_r = 56.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

Area Scan (8x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 6.73 mW/g

Body-worn SAR - 1.9 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom - Radio Transceiver

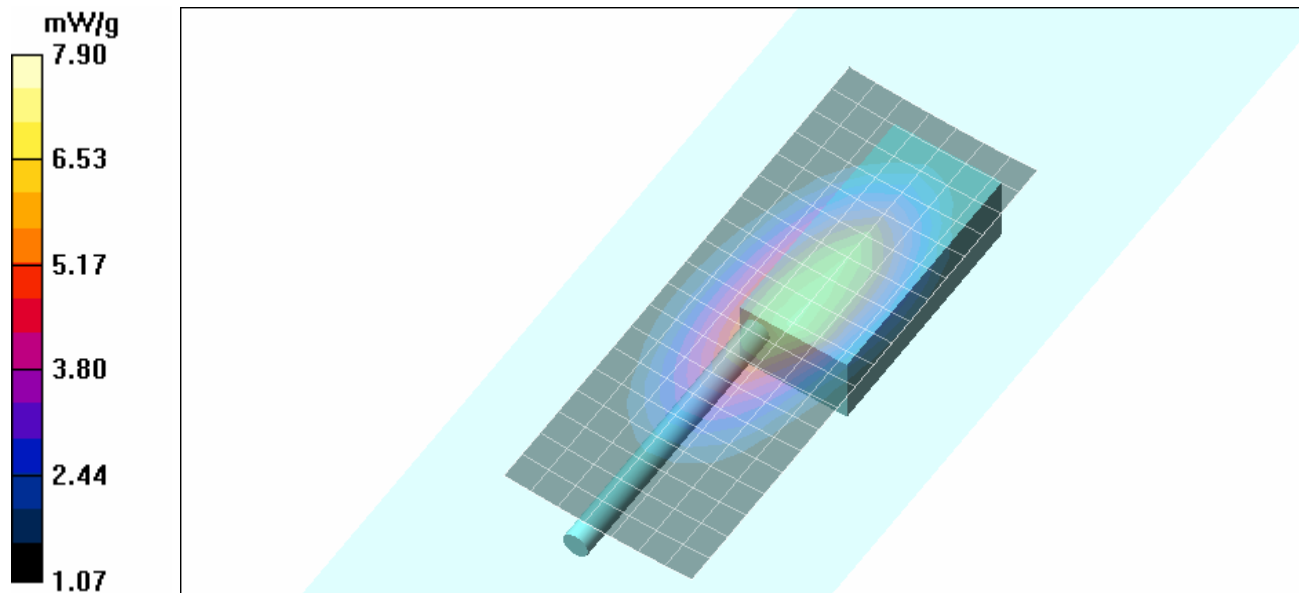
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 92.6 V/m; Power Drift = -0.272 dB

Peak SAR (extrapolated) = 11.7 W/kg

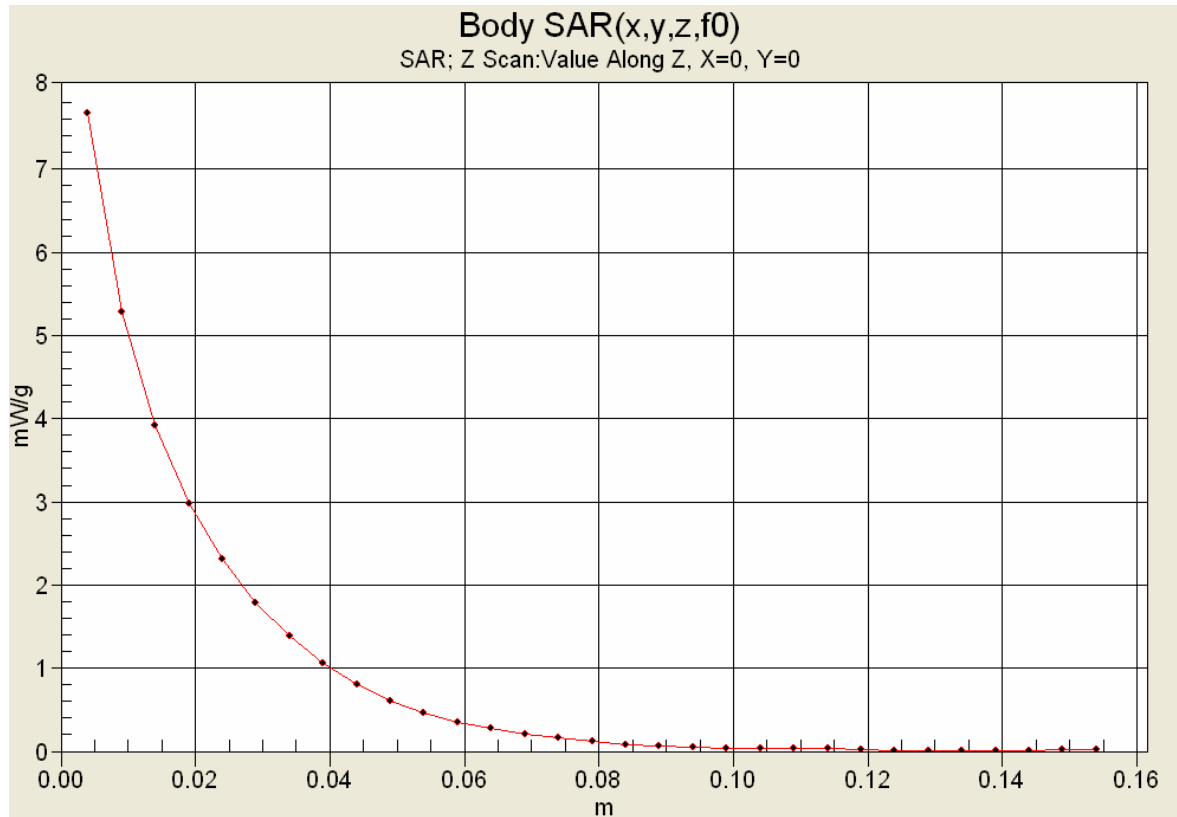
SAR(1 g) = 7.53 mW/g; SAR(10 g) = 5.24 mW/g



Maximum value of SAR (measured) = 7.90 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4		DUT:	Portable UHF PTT Radio Transceiver			
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 36 of 72



Z-Axis Scan



	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 38 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 08/22/2008

System Performance Check - 450 MHz Dipole - HSL

DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 07/25/2008

Ambient Temp: 24°C; Fluid Temp: 22.9°C; Barometric Pressure: 100.9 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 44.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Validation Planar; Type: Plexiglas; Serial: TE#137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 450 MHz Dipole

Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.21 mW/g

System Performance Check - 450 MHz Dipole

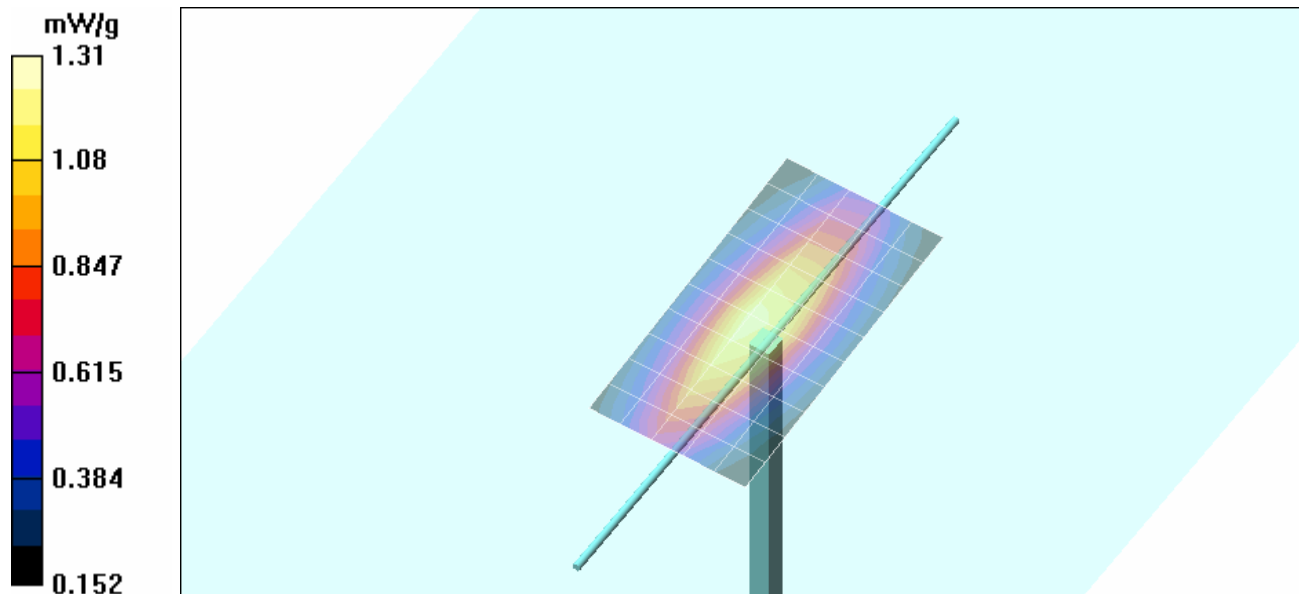
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 40.1 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 1.91 W/kg

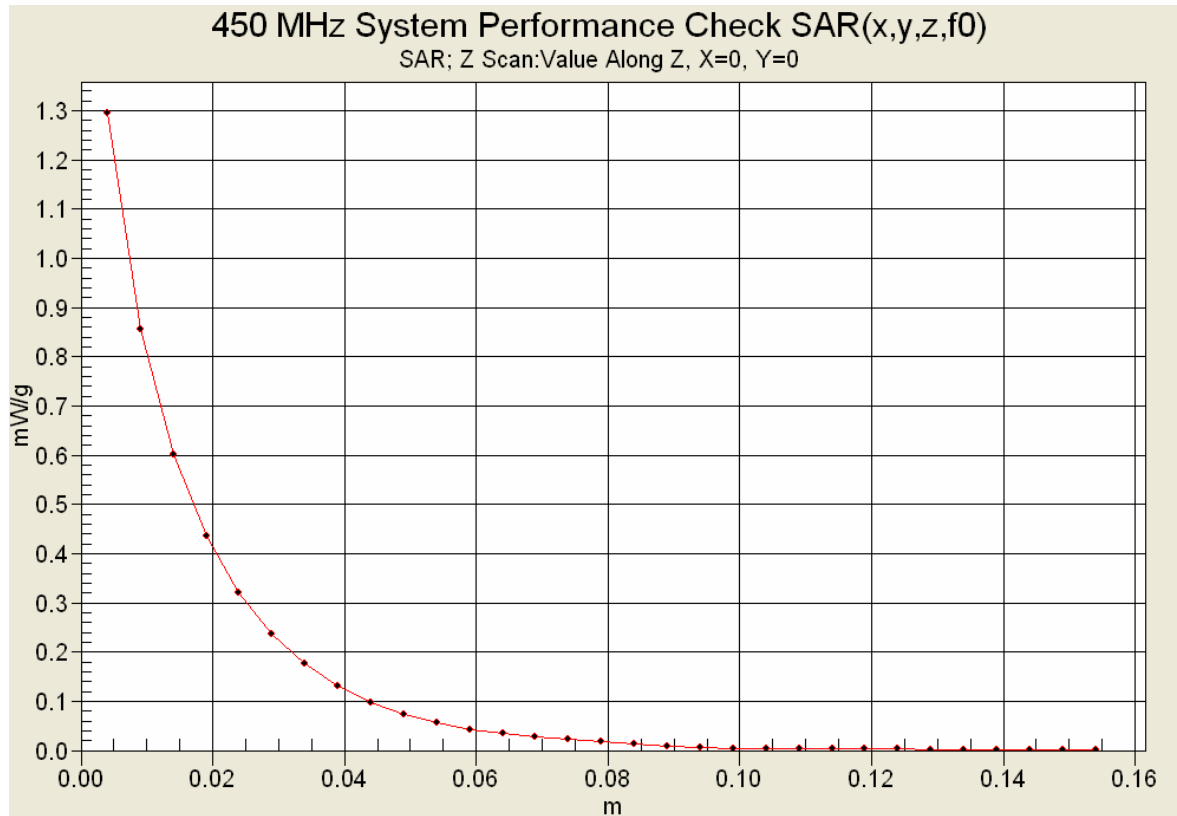
SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.814 mW/g




Maximum value of SAR (measured) = 1.31 mW/g



Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 39 of 72

Z-Axis Scan



 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Date Tested: 09/23/2008

System Performance Check - 450 MHz Dipole - HSL

DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 07/25/2008

Ambient Temp: 23.8°C; Fluid Temp: 22.8°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 44.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Validation Planar; Type: Plexiglas; Serial: TE#137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 450 MHz Dipole

Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.21 mW/g

System Performance Check - 450 MHz Dipole

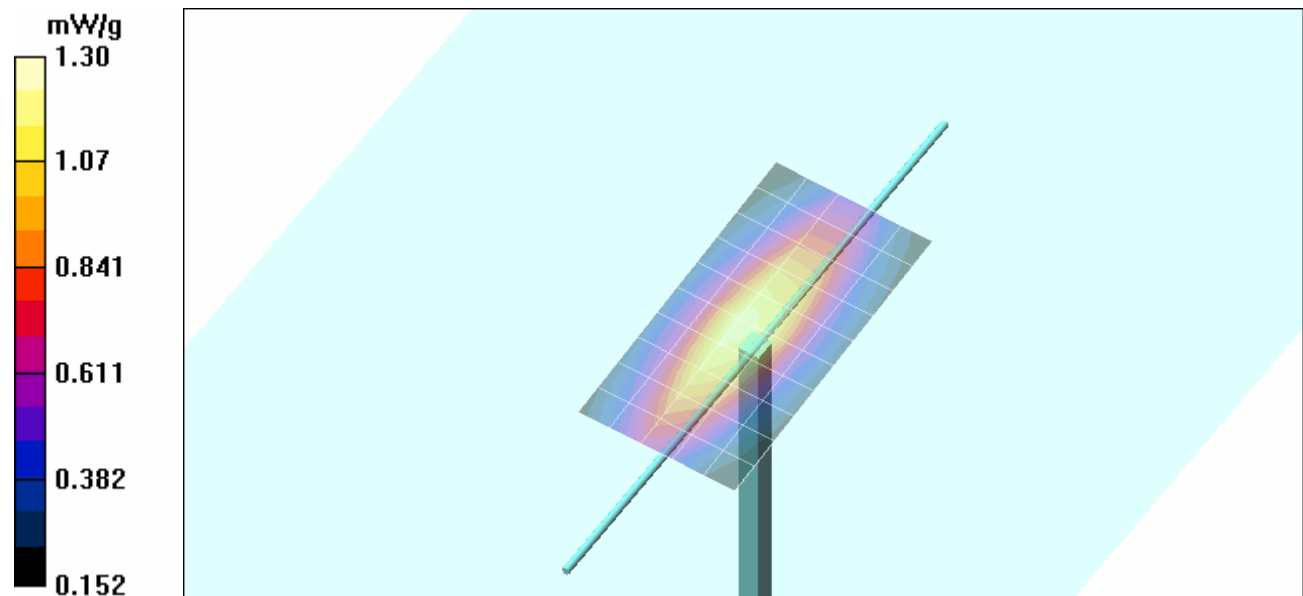
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 40.0 V/m; Power Drift = -0.032 dB




Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.812 mW/g

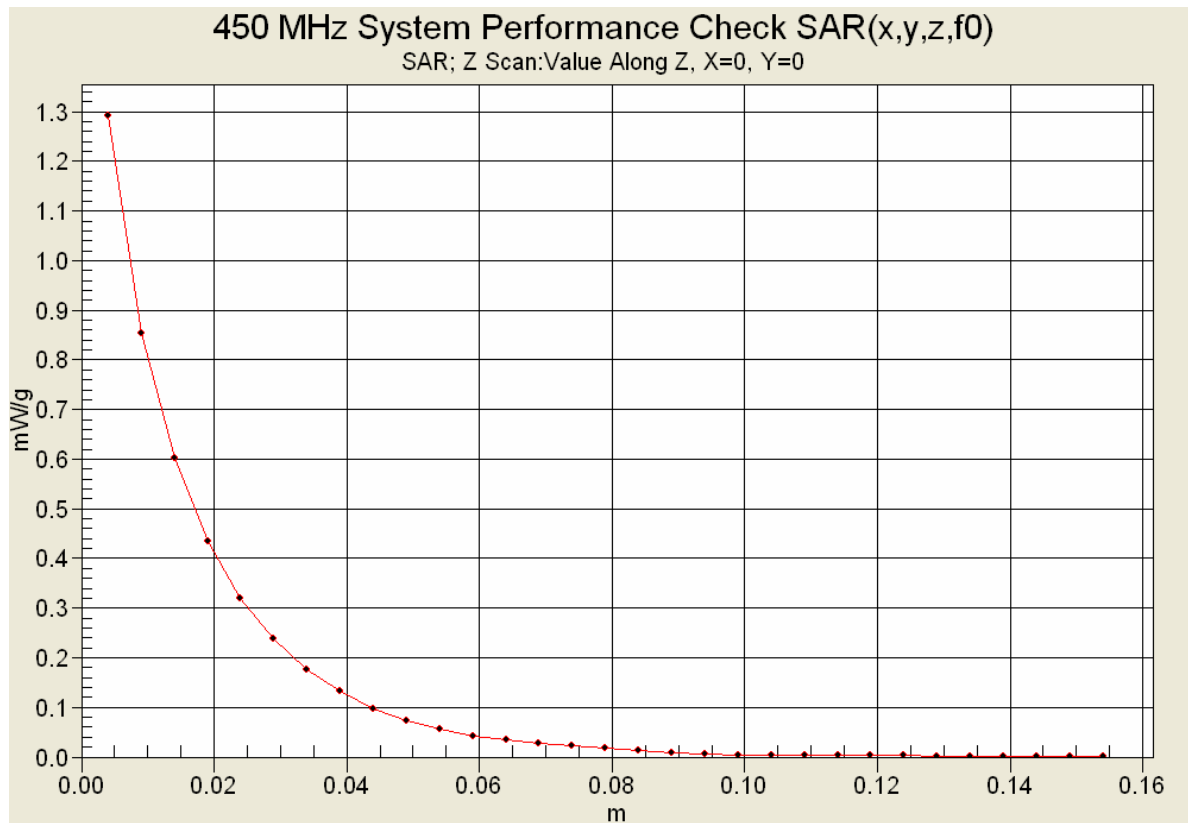
Maximum value of SAR (measured) = 1.30 mW/g





Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 41 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

Z-Axis Scan






Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 42 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS


Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 43 of 72



	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	
Test Lab Certificate No. 2470.01				

450 MHz System Performance Check & DUT Evaluation (Brain)

Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
22/Aug/2008
Frequency (GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM

Freq	FCC_eHF	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	47.36	0.79
0.3600	44.58	0.87	46.68	0.80
0.3700	44.46	0.87	45.61	0.82
0.3800	44.34	0.87	46.20	0.83
0.3900	44.22	0.87	45.77	0.82
0.4000	44.10	0.87	46.06	0.83
0.4100	43.98	0.87	45.27	0.83
0.4200	43.86	0.87	45.62	0.85
0.4300	43.74	0.87	45.23	0.85
0.4400	43.62	0.87	44.90	0.87
0.4500	43.50	0.87	44.26	0.89
0.4600	43.45	0.87	44.15	0.89
0.4700	43.40	0.87	44.37	0.90
0.4800	43.34	0.87	44.33	0.91
0.4900	43.29	0.87	43.70	0.92
0.5000	43.24	0.87	43.42	0.91
0.5100	43.19	0.87	43.18	0.93
0.5200	43.14	0.88	43.31	0.93
0.5300	43.08	0.88	42.95	0.94
0.5400	43.03	0.88	43.25	0.96
0.5500	42.98	0.88	43.09	0.97


Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 44 of 72




	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

450 MHz DUT Evaluation (Body)

Celltech Labs Inc,
Test Result for UIM Dielectric Parameter
22/Aug/2008
Frequency (GHz)
FCC_eB FCC Limits for Body Epsilon
FCC_sB FCC Limits for Body Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	57.76	0.85
0.3600	57.60	0.93	58.22	0.84
0.3700	57.50	0.93	57.73	0.85
0.3800	57.40	0.93	57.79	0.86
0.3900	57.30	0.93	57.34	0.87
0.4000	57.20	0.93	57.08	0.88
0.4100	57.10	0.93	57.66	0.90
0.4200	57.00	0.94	57.43	0.91
0.4300	56.90	0.94	56.67	0.90
0.4400	56.80	0.94	56.80	0.92
0.4500	56.70	0.94	56.21	0.93
0.4600	56.66	0.94	56.54	0.91
0.4700	56.62	0.94	56.18	0.94
0.4800	56.58	0.94	56.37	0.95
0.4900	56.54	0.94	55.46	0.94
0.5000	56.51	0.94	56.19	0.96
0.5100	56.47	0.94	55.97	0.98
0.5200	56.43	0.95	55.19	0.98
0.5300	56.39	0.95	55.88	0.99
0.5400	56.35	0.95	55.43	1.00
0.5500	56.31	0.95	55.46	1.01

Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 45 of 72



	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	
Test Lab Certificate No. 2470.01				

450 MHz System Performance Check & DUT Evaluation (Brain)

Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
23/Sep/2008
Frequency (GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM

Freq	FCC_eHFCC	sHFCC	Test_e	Test_s
0.3500	44.70	0.87	46.60	0.80
0.3600	44.58	0.87	46.30	0.81
0.3700	44.46	0.87	46.15	0.82
0.3800	44.34	0.87	45.58	0.83
0.3900	44.22	0.87	45.68	0.84
0.4000	44.10	0.87	45.59	0.85
0.4100	43.98	0.87	45.08	0.86
0.4200	43.86	0.87	45.01	0.87
0.4300	43.74	0.87	44.61	0.88
0.4400	43.62	0.87	44.72	0.89
0.4500	43.50	0.87	44.41	0.89
0.4600	43.45	0.87	44.13	0.90
0.4700	43.40	0.87	43.97	0.92
0.4800	43.34	0.87	43.69	0.92
0.4900	43.29	0.87	43.55	0.93
0.5000	43.24	0.87	43.27	0.94
0.5100	43.19	0.87	43.08	0.95
0.5200	43.14	0.88	42.89	0.96
0.5300	43.08	0.88	42.67	0.97
0.5400	43.03	0.88	42.63	0.98
0.5500	42.98	0.88	42.38	0.99

Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 46 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	
Test Lab Certificate No. 2470.01				

450 MHz DUT Evaluation (Body)

Celltech Labs Inc,
Test Result for UIM Dielectric Parameter
24/Sep/2008

Frequency (GHz)

FCC_eB FCC Limits for Body Epsilon



FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM


Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	58.36	0.84
0.3600	57.60	0.93	58.11	0.85
0.3700	57.50	0.93	58.24	0.85
0.3800	57.40	0.93	57.99	0.86
0.3900	57.30	0.93	57.72	0.87
0.4000	57.20	0.93	57.81	0.87
0.4100	57.10	0.93	57.49	0.89
0.4200	57.00	0.94	57.46	0.89
0.4300	56.90	0.94	57.47	0.90
0.4400	56.80	0.94	57.26	0.91
0.4500	56.70	0.94	56.85	0.91
0.4600	56.66	0.94	56.91	0.93
0.4700	56.62	0.94	56.75	0.93
0.4800	56.58	0.94	56.68	0.95
0.4900	56.54	0.94	56.53	0.95
0.5000	56.51	0.94	56.41	0.95
0.5100	56.47	0.94	55.91	0.97
0.5200	56.43	0.95	55.91	0.97
0.5300	56.39	0.95	55.94	0.98
0.5400	56.35	0.95	55.55	0.99
0.5500	56.31	0.95	55.63	0.99

Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 47 of 72

	<u>Date(s) of Evaluation</u> Aug. 22 & Sept. 23-24, 2008	<u>Test Report Serial No.</u> 082108ALH-T924-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> September 25, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational / Controlled	

APPENDIX E - SYSTEM VALIDATION

Applicant:	Kenwood USA Corporation	FCC ID:	ALH378501	IC:	282D-378501	406-470 MHz	KENWOOD
Model(s):	NX-300-K2, NX-300-K4, TK-5320-K2, TK-5320-K4			DUT:	Portable UHF PTT Radio Transceiver		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 71 of 72

	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:	SV450B-072508-R1.0		
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:	Brain

450 MHz SYSTEM VALIDATION

Type:

450 MHz Validation Dipole

Asset Number:

00024

Serial Number:

136

Place of Validation:

Celltech Labs Inc.

Date of Validation:

July 25, 2008

Celltech Labs Inc. certifies that the 450 MHz System Validation was performed on the date indicated above.

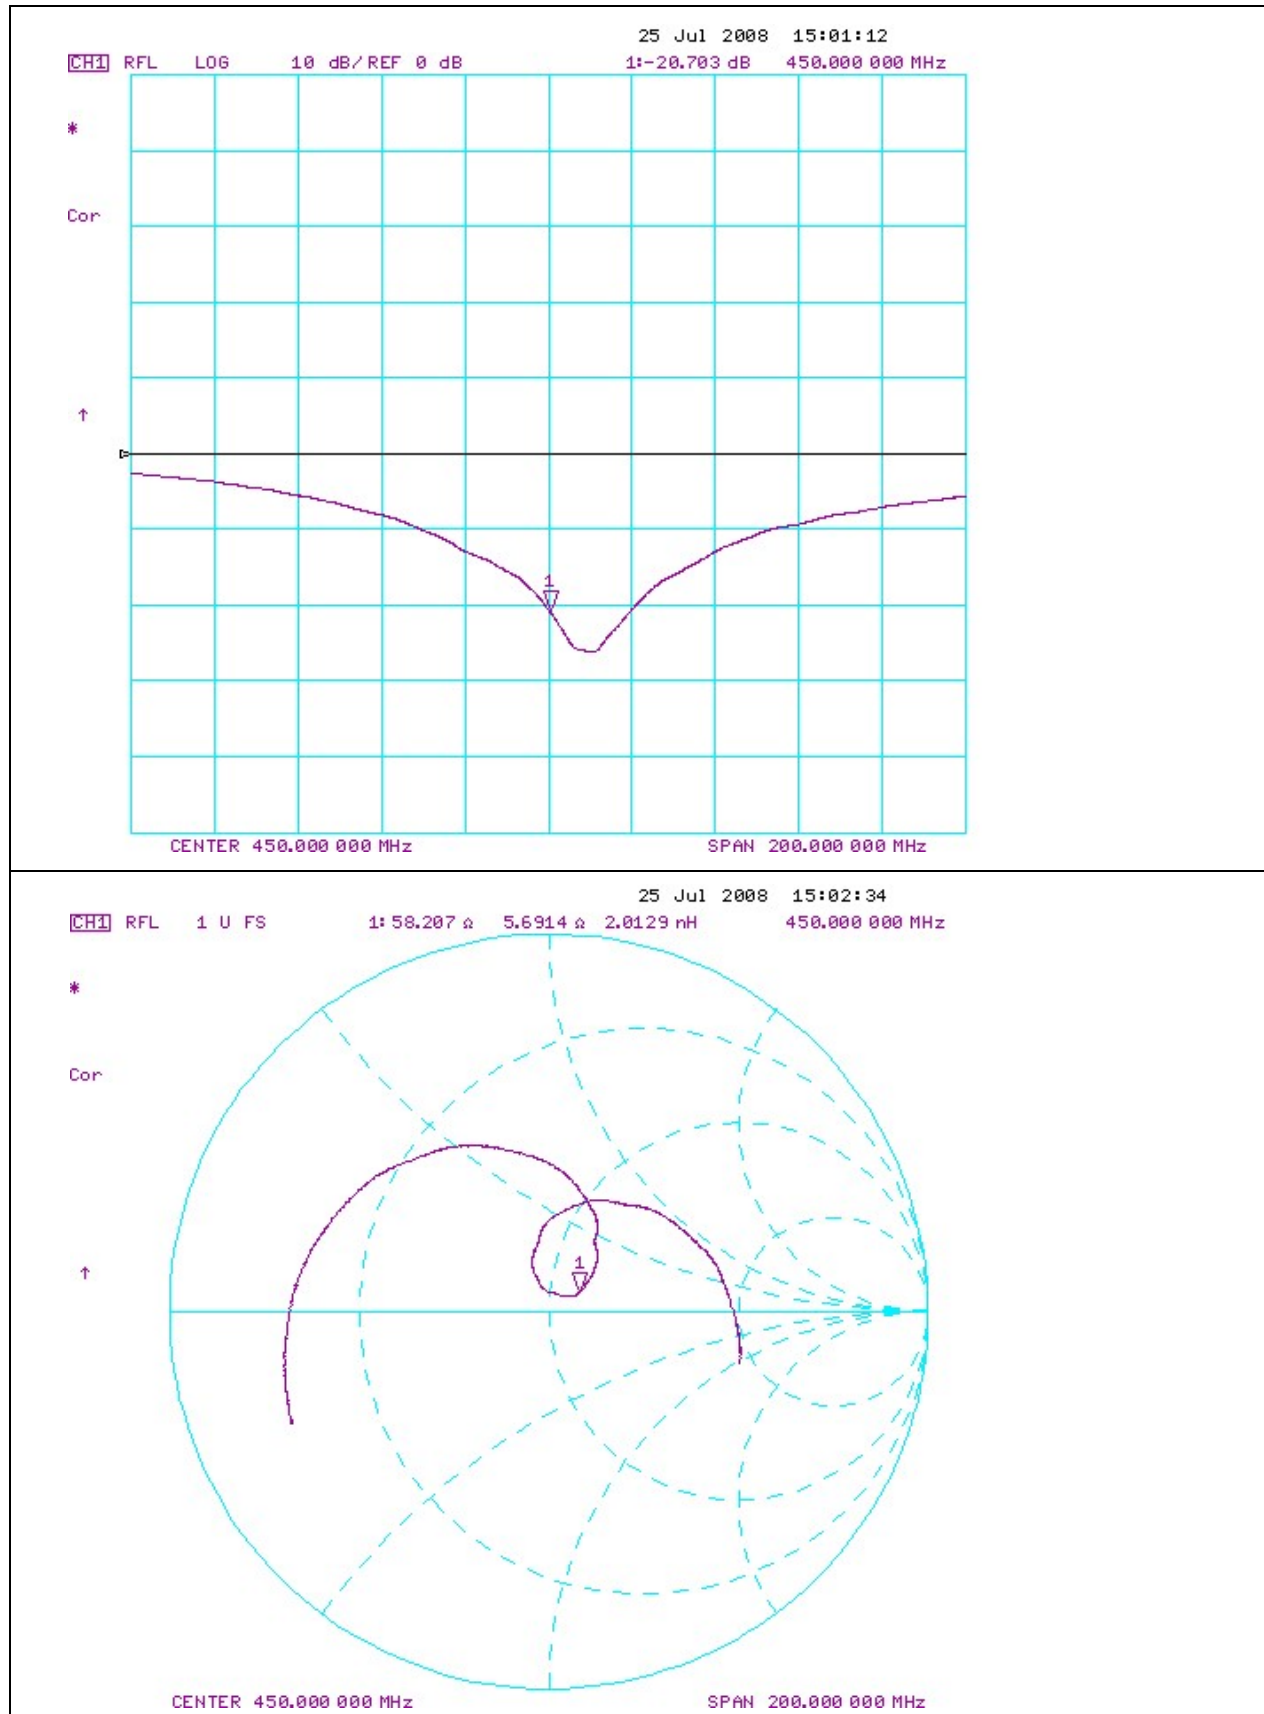
Validated by:

Sean Johnston

Signature:



2. Validation Dipole VSWR Data



	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:		SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:	Brain

3. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	396.0	250.0	6.0
450	270.0	167.0	6.0
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.5	30.4	3.6
3000	41.5	25.0	3.6

4. Validation Phantom

The validation phantom (planar) was constructed using relatively low-loss tangent Plexiglas material.

The inner dimensions of the validation phantom are as follows:

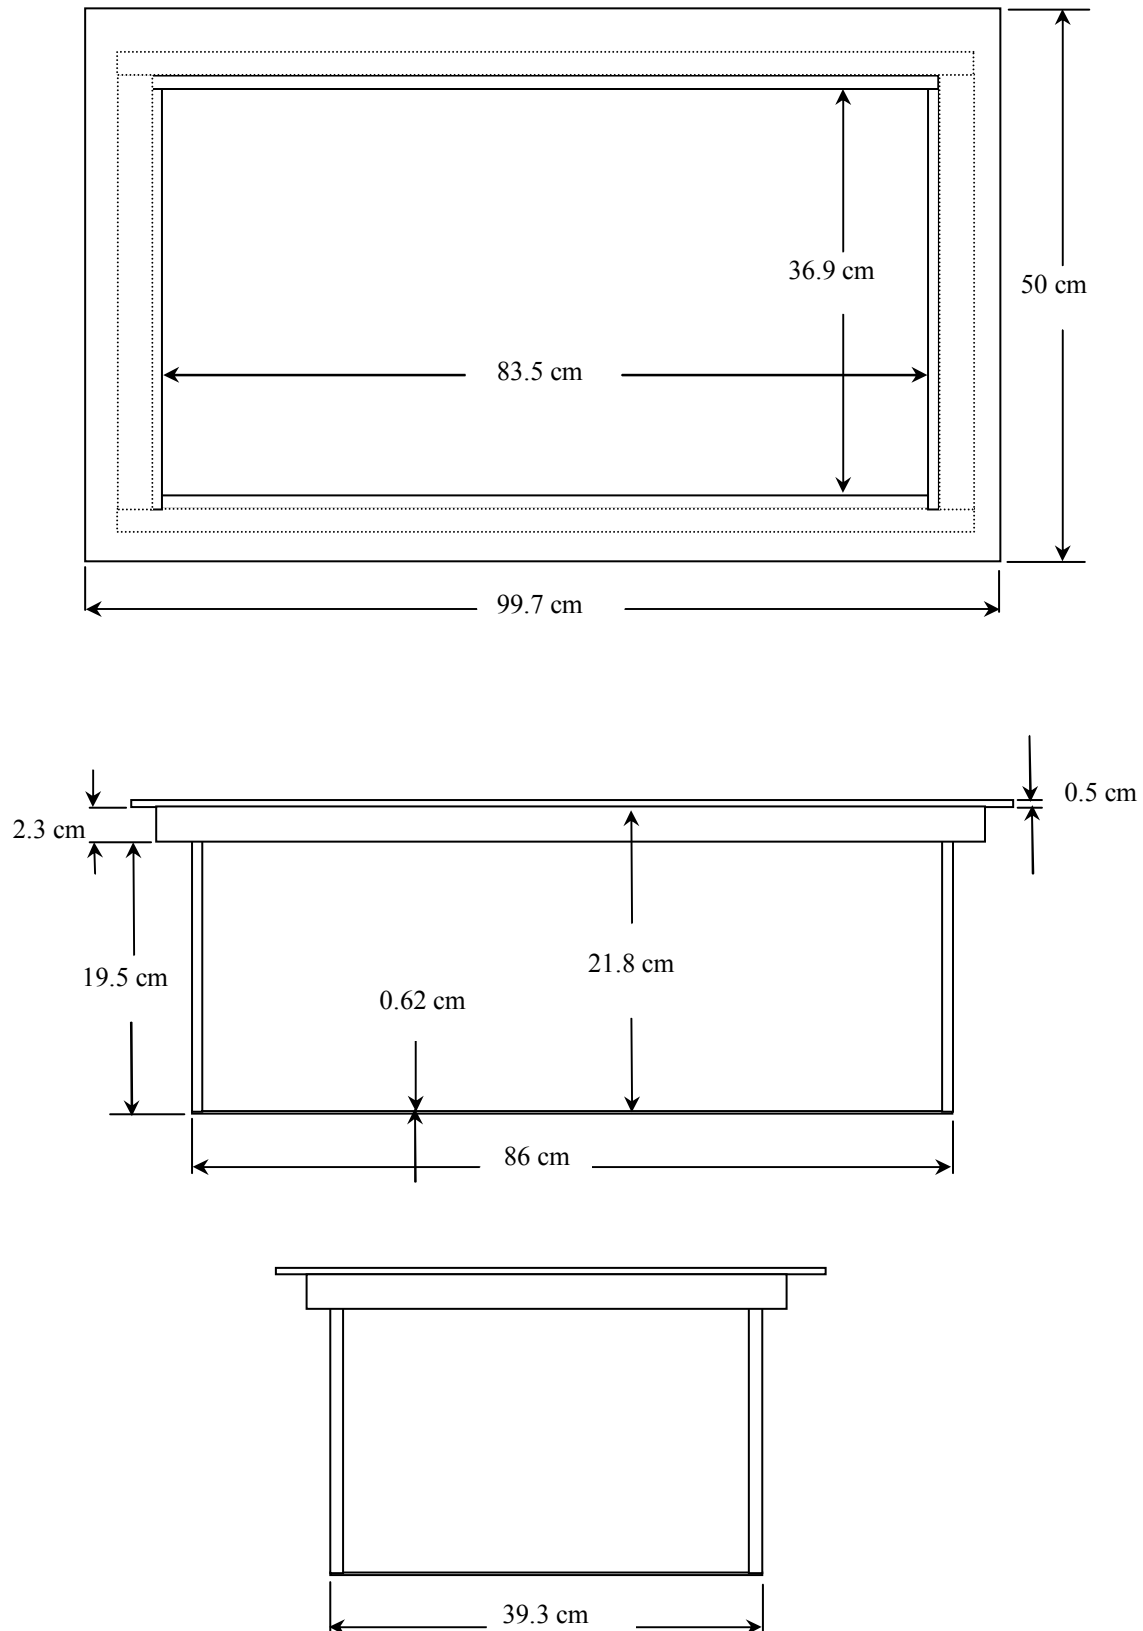
Length: 83.5 cm
Width: 36.9 cm
Height: 21.8 cm

The bottom section of the validation phantom is constructed of 6.2 ± 0.1 mm Plexiglas.

5. Test Equipment List

TEST EQUIPMENT	ASSET NO.	SERIAL NO.	DATE OF CAL.	CAL. DUE DATE
SPEAG DASY4 Measurement Server	00158	1078	N/A	N/A
SPEAG Robot	00046	599396-01	N/A	N/A
SPEAG DAE4	00019	353	22Apr08	22Apr09
SPEAG ET3DV6 E-Field Probe	00017	1590	21Jul08	21Jul09
450 MHz Validation Dipole	00024	136	25Jul08	25Jul09
Plexiglas Validation Planar Phantom	00157	137	N/A	N/A
HP 85070C Dielectric Probe Kit	00033	US39240170	N/A	N/A
Gigatronics 8652A Power Meter	00007	1835272	23Apr08	23Apr09
Gigatronics 80701A Power Sensor	00014	1833699	23Apr08	23Apr09
HP 8753ET Network Analyzer	00134	US39170292	28Apr08	28Apr09
HP 8648D Signal Generator	00005	3847A00611	NCR	NCR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	NCR	NCR

6. Dimensions of Plexiglas Planar Phantom



	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:		SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:	Brain

7. 450 MHz System Validation Setup



	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:		SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:	Brain

8. 450 MHz Validation Dipole Setup

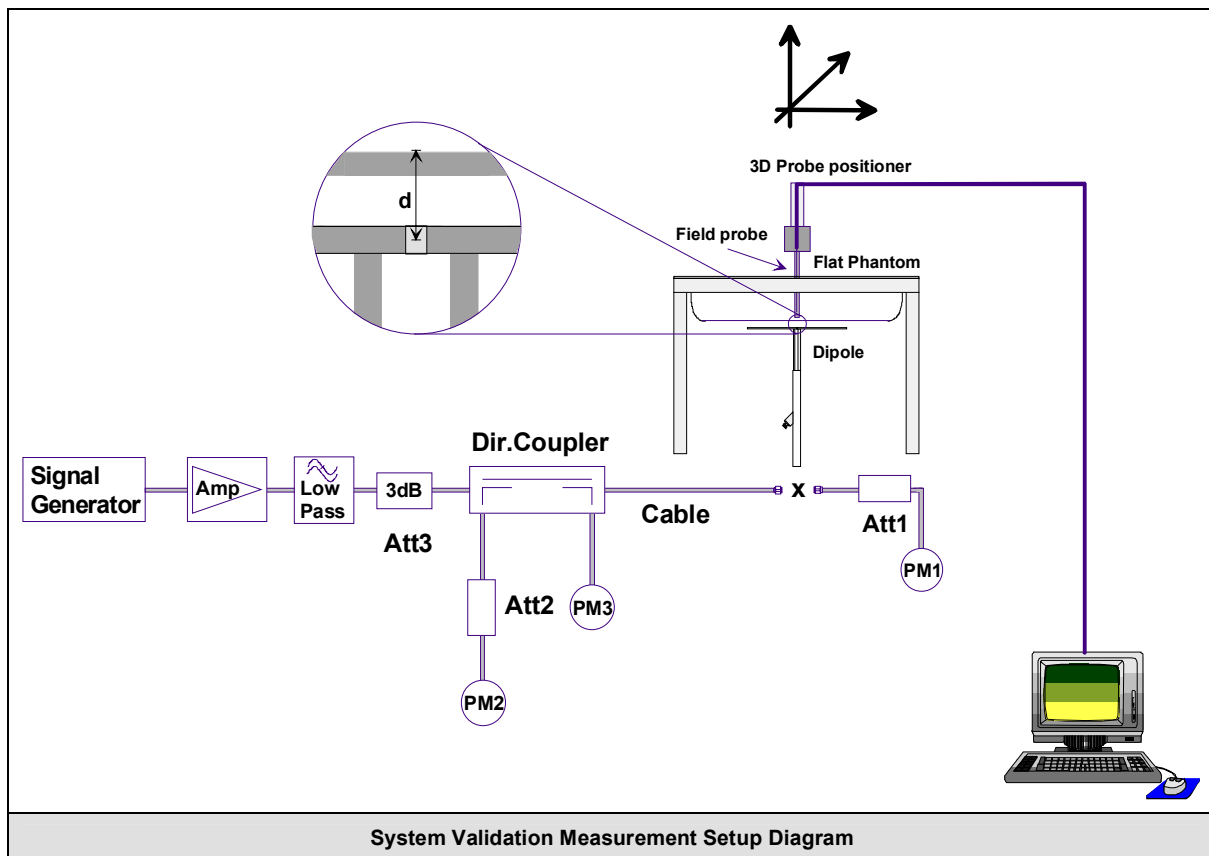



	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:		SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:	Brain

9. SAR Measurement

Measurements were made using a dosimetric E-field probe ET3DV6 (S/N: 1590, Conversion Factor 7.66). The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the procedures described below.

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.



	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:		SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:	Brain

10. Measurement Conditions

The validation phantom was filled with 450 MHz Brain tissue simulant.

Relative Permittivity: 43.4 (-0.2% deviation from target)
Conductivity: 0.89 mho/m (+2.3% deviation from target)
Fluid Temperature: 23.1°C (Start of Test) / 23.2°C (End of Test)
Fluid Depth: ≥ 15.0 cm

Environmental Conditions:

Ambient Temperature: 24.1°C
Barometric Pressure: 100.9 kPa
Humidity: 31%

The 450 MHz Brain tissue simulant consisted of the following ingredients:

Ingredient	Percentage by weight	
Water	38.56%	
Sugar	56.32%	
Salt	3.95%	
HEC	0.98%	
Dowicil 75	0.19%	
IEEE/IEC Target Dielectric Parameters (450 MHz):	$\epsilon_r = 43.5 (+/- 5\%)$	$\sigma = 0.87 \text{ S/m } (+/- 5\%)$

11. System Validation SAR Results

SAR @ 0.25W Input averaged over 1g (W/kg)				SAR @ 1W Input averaged over 1g (W/kg)			
IEEE/IEC Target		Measured	Deviation	IEEE/IEC Target		Measured	Deviation
1.23	+/- 10%	1.18	-4.0%	4.92	+/- 10%	4.72	-4.0%
SAR @ 0.25W Input averaged over 10g (W/kg)				SAR @ 1W Input averaged over 10g (W/kg)			
IEEE/IEC Target		Measured	Deviation	IEEE/IEC Target		Measured	Deviation
0.825	+/- 10%	0.775	-6.1%	3.30	+/- 10%	3.10	-6.1%

	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:		SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:	Brain

Date Tested: 07/25/2008

System Validation - 450 MHz Dipole - HSL

DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 07/25/2008

Ambient Temp: 24.1°C; Fluid Temp: 23.1°C; Barometric Pressure: 100.9 kPa; Humidity: 31%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 43.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Validation Planar; Type: Plexiglas; Serial: TE#137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

450 MHz Dipole - System Validation

Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.18 mW/g

450 MHz Dipole - System Validation

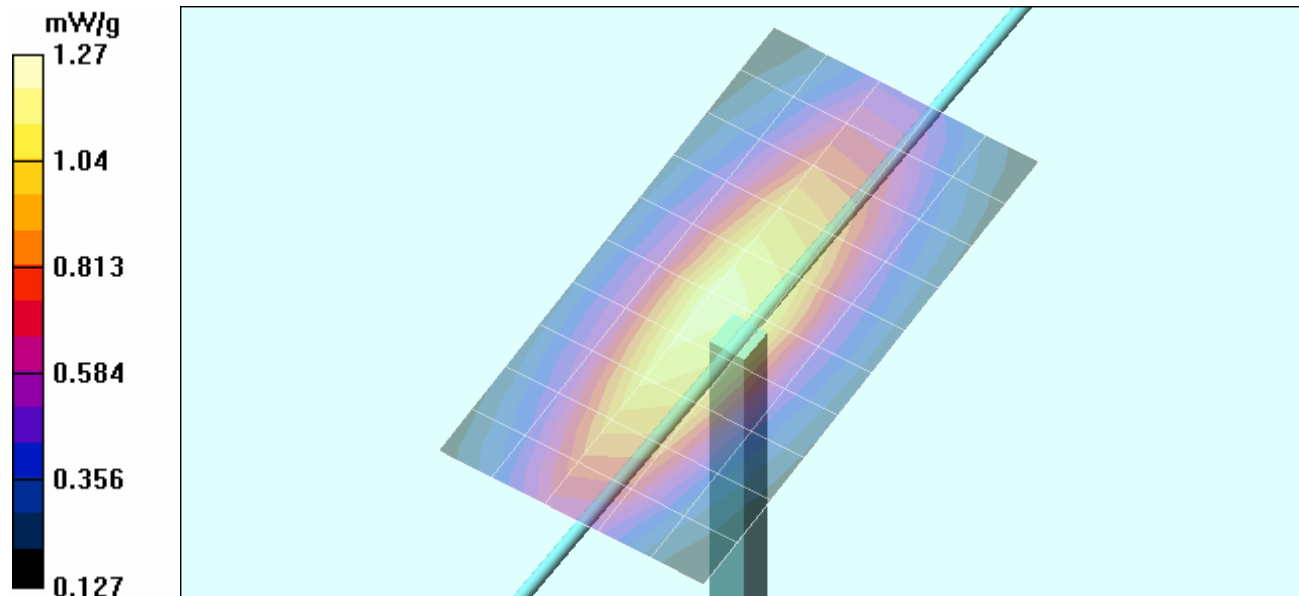
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 38.3 V/m; Power Drift = 0.000 dB

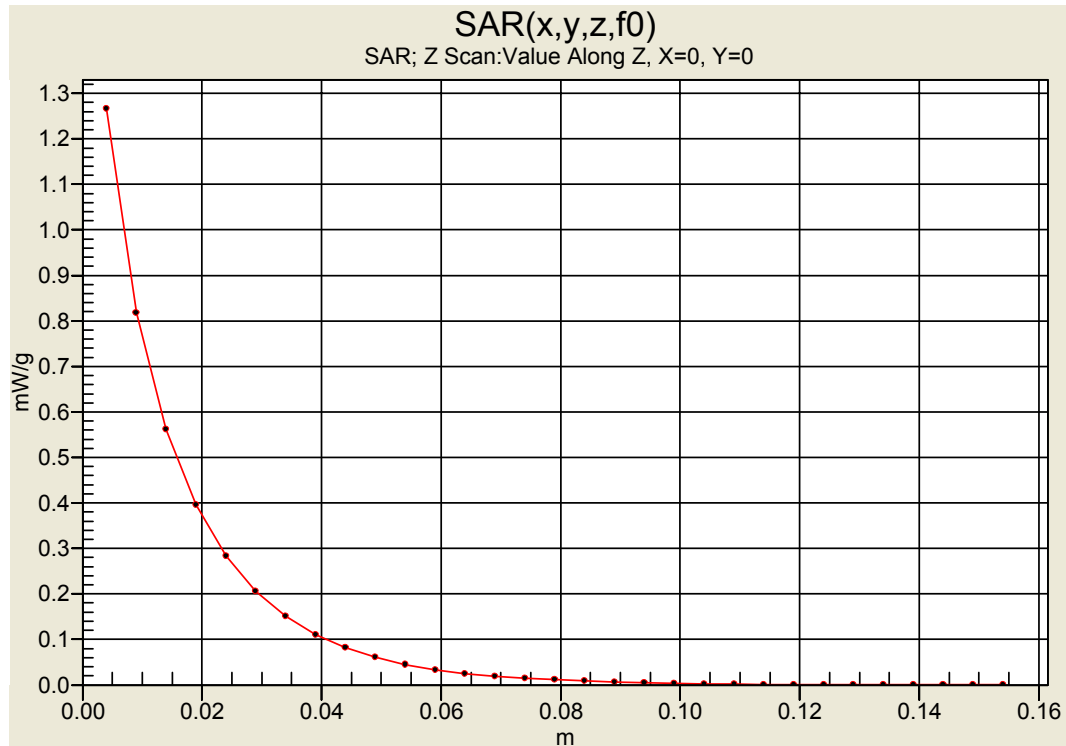
Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.775 mW/g

Maximum value of SAR (measured) = 1.27 mW/g



Z-Axis Scan



12. Measured Fluid Dielectric Parameters

System Validation - 450 MHz (Brain)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Fri 25/Jul/2008

Frequency (GHz)


IEEE_eH IEEE 1528-2003 Limits for Head Epsilon

IEEE_sH IEEE 1528-2003 Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	IEEE_eH	IEEE_sH	Test_e	Test_s
0.3500	44.70	0.87	46.31	0.80
0.3600	44.58	0.87	45.65	0.82
0.3700	44.46	0.87	45.27	0.82
0.3800	44.34	0.87	45.47	0.83
0.3900	44.22	0.87	44.76	0.84
0.4000	44.10	0.87	44.57	0.87
0.4100	43.98	0.87	44.63	0.86
0.4200	43.86	0.87	44.66	0.86
0.4300	43.74	0.87	43.79	0.89
0.4400	43.62	0.87	43.68	0.87
0.4500	43.50	0.87	43.44	0.89
0.4600	43.45	0.87	43.27	0.90
0.4700	43.40	0.87	43.17	0.90
0.4800	43.34	0.87	43.66	0.91
0.4900	43.29	0.87	42.68	0.92
0.5000	43.24	0.87	42.39	0.95
0.5100	43.19	0.87	42.24	0.94
0.5200	43.14	0.88	41.96	0.95
0.5300	43.08	0.88	42.42	0.95
0.5400	43.03	0.88	41.99	0.97
0.5500	42.98	0.88	41.92	0.98

	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:		SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:	Brain

13. Measurement Uncertainties

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration (450 MHz)	6.65	Normal	1	1	6.65	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	0.8	Rectangular	1.732050808	1	0.5	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Dipole						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.3	Normal	1	0.64	1.5	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	0.2	Normal	1	0.6	0.1	∞
Combined Standard Uncertainty					9.40	
Expanded Uncertainty (k=2)					18.80	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 and IEC 62209-1:2005						