



Flom Test Labs
EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268
fax: (480) 926-3598
<http://www.flomlabs.com>
info@flomlabs.com

Date: October 20, 2006

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Kenwood USA Corporation
Equipment: TK-5310 K3
FCC ID: ALH39913110
FCC Rules: 22, 74, 90

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

Hoosamuddin S. Bandukwala, Lab Director

enclosure(s)
cc: Applicant
HSB/mdw

Flom Test Labs
3356 North San Marcos Place, Suite 107
Chandler, Arizona 85225-7176
(866) 311-3268 phone, (480) 926-3598 fax

FCC ID: ALH39913110
MFA p0680009, d06a0020



Flom Test Labs
EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268
fax: (480) 926-3598
<http://www.flomlabs.com>
info@flomlabs.com

Date: October 20, 2006

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Kenwood USA Corporation
Equipment: TK-5310 K3
FCC ID: ALH39913110
FCC Rules: 22, 74, 90

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown i.e.:

- a) Application Form
- b) Test Report (if applicable)
- c) Filing Fees
- d) Copy of Original Grant
- e) Expository Statement and/or letter by Applicant
- f) Photos (if applicable)
- g) Label Drawing (if changes have been made)

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

Hoosamuddin S. Bandukwala, Lab Director

enclosure(s)
cc: Applicant
HSB/mdw

Flom Test Labs
3356 North San Marcos Place, Suite 107
Chandler, Arizona 85225-7176
(866) 311-3268 phone, (480) 926-3598 fax

FCC ID: ALH39913110
MFA p0680009, d06a0020



Flom Test Labs
EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268
fax: (480) 926-3598
<http://www.flomlabs.com>
info@flomlabs.com

Transmitter Certification

of

FCC ID: ALH39913110

Model: TK-5310 K3

to

Federal Communications Commission

Rule Part(s) 22, 74, 90

Date of report: October 20, 2006

On the Behalf of the Applicant:

Kenwood USA Corporation

At the Request of:

P.O.

Kenwood USA Corporation
Communications Division
3975 Johns Creek Court, Suite 300
Suwanee, GA 30024

Attention of:

Joel E. Berger, Research & Development
JBerger@kenwoodusa.com
(678) 474-4722; FAX: -4731

Supervised by:

Hoosamuddin S. Bandukwala, Lab Director

Flom Test Labs
3356 North San Marcos Place, Suite 107
Chandler, Arizona 85225-7176
(866) 311-3268 phone, (480) 926-3598 fax

FCC ID: ALH39913110
MFA p0680009, d06a0020

List of Exhibits

(FCC **Certification** (Transmitters) - Revised 9/28/98)

Applicant: Kenwood USA Corporation

FCC ID: ALH39913110

By Applicant:

1. Letter of Authorization
2. Confidentiality Request: 0.457 And 0.459
3. Part 90.203(e) & (g) Attestation
4. Identification Drawings, 2.1033(c)(11)
 - Label
 - Location of Label
 - Compliance Statement
 - Location of Compliance Statement
5. Photographs, 2.1033(c)(12)
6. Documentation: 2.1033(c)
 - (3) User Manual
 - (9) Tune Up Info
 - (10) Schematic Diagram
 - (10) Circuit Description
 - Block Diagram
 - Parts List
 - Active Devices
7. MPE/SAR Report

By M.F.A. Inc.:

- A. Testimonial & Statement of Certification

The Applicant has been cautioned as to the following:

15.21 Information to the User.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.


Table of Contents

| Rule | Description | Page |
|---------------|----------------------------------------------------|------|
| 2.1033(c)(14) | Rule Summary | 2 |
| | Standard Test Conditions and Engineering Practices | 3 |
| 2.1033(c) | General Information Required | 4 |
| 2.1046(a) | ERP Carrier Power (Radiated) | 8 |
| 2.1046(a) | RF Power Output (Radiated) | 8 |
| 2.1051 | Unwanted Emissions (Transmitter Conducted) | 9 |
| 2.1053(a) | Field Strength of Spurious Radiation | 11 |
| 2.1049(c)(1) | Emission Masks (Occupied Bandwidth) | 15 |
| 2.1047(a) | Audio Low Pass Filter (Voice Input) | 30 |
| 2.1047(a) | Audio Frequency Response | 30 |
| 2.1047(b) | Modulation Limiting | 34 |
| 2.1055(a)(1) | Frequency Stability (Temperature Variation) | 36 |
| 2.1055(b)(1) | Frequency Stability (Voltage Variation) | 38 |
| 2.202(g) | Necessary Bandwidth and Emission Bandwidth | 38 |

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

- a) **Test Report**
- b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225
- c) Report Number: d06a0020
- d) Client: Kenwood USA Corporation
Communications Division
3975 Johns Creek Court, Suite 300
Suwanee, GA 30024
- e) Identification: TK-5310 K3
FCC ID: ALH39913110
- EUT Description: UHF P25 Transceiver
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: October 20, 2006
EUT Received:
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Hoosamuddin S. Bandukwala, Lab Director

- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

Sub-part

2.1033(c)(14):

Test and Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

| | |
|-------------------------------------|------------------------------------------------------------------------------------|
| <input type="checkbox"/> | 21 - Domestic Public Fixed Radio Services |
| <input checked="" type="checkbox"/> | 22 - Public Mobile Services |
| <input type="checkbox"/> | 22 Subpart H - Cellular Radiotelephone Service |
| <input type="checkbox"/> | 22.901(d) - Alternative technologies and auxiliary services |
| <input type="checkbox"/> | 23 - International Fixed Public Radiocommunication services |
| <input type="checkbox"/> | 24 - Personal Communications Services |
| <input checked="" type="checkbox"/> | 74 Subpart H - Low Power Auxiliary Stations |
| <input type="checkbox"/> | 80 - Stations in the Maritime Services |
| <input type="checkbox"/> | 80 Subpart E - General Technical Standards |
| <input type="checkbox"/> | 80 Subpart F - Equipment Authorization for Compulsory Ships |
| <input type="checkbox"/> | 80 Subpart K - Private Coast Stations and Marine Utility Stations |
| <input type="checkbox"/> | 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats |
| <input type="checkbox"/> | 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes |
| <input type="checkbox"/> | 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act |
| <input type="checkbox"/> | 80 Subpart V - Emergency Position Indicating Radio Beacons (EPIRB'S) |
| <input type="checkbox"/> | 80 Subpart W - Global Maritime Distress and Safety System (GMDSS) |
| <input type="checkbox"/> | 80 Subpart X - Voluntary Radio Installations |
| <input type="checkbox"/> | 87 - Aviation Services |
| <input checked="" type="checkbox"/> | 90 - Private Land Mobile Radio Services |
| <input type="checkbox"/> | 94 - Private Operational-Fixed Microwave Service |
| <input type="checkbox"/> | 95 Subpart A - General Mobile Radio Service (GMRS) |
| <input type="checkbox"/> | 95 Subpart C - Radio Control (R/C) Radio Service |
| <input type="checkbox"/> | 95 Subpart D - Citizens Band (CB) Radio Service |
| <input type="checkbox"/> | 95 Subpart E - Family Radio Service |
| <input type="checkbox"/> | 95 Subpart F - Interactive Video and Data Service (IVDS) |
| <input type="checkbox"/> | 97 - Amateur Radio Service |
| <input type="checkbox"/> | 101 - Fixed Microwave Services |

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-2003, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst-case measurements.



A2LA

"A2LA has accredited M. Flom Associates, Inc. Chandler, AZ for technical competence in the field of Electrical Testing. The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 'General Requirements for the Competence of Testing and Calibration Laboratories' and any additional program requirements in the identified field of testing."

Certificate Number: **2152-01**

List of General Information Required for Certification

In Accordance with FCC Rules and Regulations,
Volume II, Part 2 and to

22, 74, 90

Sub-part 2.1033

(c)(1): **Name and Address of Applicant:**

Kenwood USA Corporation
Communications Division
3975 Johns Creek Court, Suite 300
Suwanee, GA 30024

Manufacturer :

Kenwood Corporation
14-6, Dogenzaka 1-Chome
Shibuya-ku, Tokyo 150, Japan
OR
Kenwood Electronics Technologies PTE Ltd.
1 Ang Mo Kio Street 63
Singapore 569110

(c)(2): **FCC ID:** ALH39913110

Model Number: TK-5310 K3

(c)(3): **Instruction Manual(s):**

Please see attached exhibits

(c)(4): **Type of Emission:** 16K0F3E/11K0F3E/8K10F1E/8K10F1D

(c)(5): **Frequency Range, MHz:** 450 to 520

(c)(6): **Power Rating, Watts:** 1 to 4 watts
 _____ Switchable x Variable _____ N/A

FCC Grant Note:

(c)(7): **Maximum Power Rating, Watts:**

DUT Results: Passes _____ x _____ Fails _____

Subpart 2.1033 (continued)

(c)(8): Voltages & currents in all elements in final RF stage, including final transistor or solid-state device:

| | | |
|------------------------|---|-----|
| Collector Current, A | = | 2 |
| Collector Voltage, Vdc | = | 7.5 |
| Supply Voltage, Vdc | = | 7.5 |

(c)(9): **Tune-Up Procedure:**

Please see attached exhibits

(c)(10): **Circuit Diagram/Circuit Description:**

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Please see attached exhibits

(c)(11): **Label Information:**

Please see attached exhibits

(c)(12): **Photographs:**

Please see attached exhibits

(c)(13): **Digital Modulation Description:**

 Attached Exhibits
 x N/A

(c)(14): **Test and Measurement Data:**


Follows

Name of Test: Carrier Output Power (Conducted)
Specification: 47 CFR 2.1046(a)
Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

Measurement Procedure

- A) The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an RF Power Meter.
- B) Measurement accuracy is $\pm 3\%$.

Transmitter Test Set-Up: RF Power Output

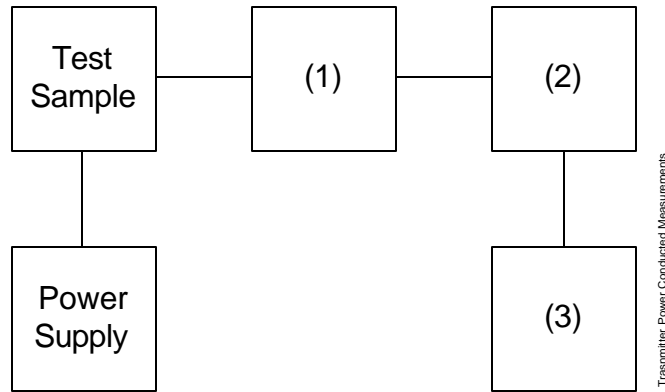


| | Asset | Description | s/n | Cycle | Last Cal |
|-----|---------------------------|-----------------------------|---------------|--------|----------|
| (1) | Coaxial Attenuator | | | | |
| X | i00231/2 | PASTERNAK PE7021-30 (30 dB) | 231 or 232 | NCR | |
| | i00122/3 | NARDA 766 (10 dB) | 7802 or 7802A | NCR | |
| (2) | Power Meters | | | | |
| X | i00020 | HP 8901A Power Mode | 2105A01087 | 12 mo. | May-06 |
| (3) | Frequency Counter | | | | |
| X | i00020 | HP 8901A Frequency Mode | 2105A01087 | 12 mo. | May-06 |

Name of Test: Carrier Output Power (Conducted)

Measurement Results
(Worst case)

Frequency of Carrier, MHz = 450.110, 519.95, 485.05
Ambient Temperature = 23°C ± 3°C

| Power Setting | RF Power, Watts |
|---------------|-----------------|
| Low | 1 |
| High | 4 |

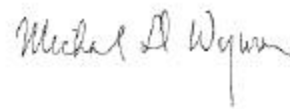

Performed by:

Michael D. Wyman

Name of Test: RF Power Output (Radiated)
Specification: 47 CFR 2.1046(a)
Test Equipment: As per attached page

Measurement Procedure (Radiated)

1. The EUT was placed on an open-field site and its radiated field strength at a known distance was measured by means of a spectrum analyzer. Equivalent loading was calculated from the equation $P_t = ((E \times R)^2 / 49.2)$ watts, where R = 3m.
2. Measurement accuracy is ± 1.5 dB.

Measurement Results

State: Ambient Temperature: 23°C \pm 3°C
Amps Mode:

| Frequency Tuned, MHz | Frequency Emission, MHz | Meter, dBuV/m | CF, dB | ERP, dBm |
|-------------------------|----------------------------|------------------|--------|----------|
| Hi power | 450.000000 | 113.5 | 21.6 | 37.7 |
| | 485.000000 | 106.6 | 22.8 | 32.0 |
| | 519.973000 | 104.7 | 23.0 | 30.4 |
| Low Power | 450.000000 | 109.8 | 21.6 | 34.1 |
| | 485.000000 | 99.9 | 22.8 | 25.3 |
| | 519.973000 | 102.7 | 23.0 | 28.3 |

Name of Test: Unwanted Emissions (Transmitter Conducted)


Specification: 47 CFR 2.1051

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

Measurement Procedure

- A) The emissions were measured for the worst case as follows:
- 1). within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - 2). from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
- B) The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.

Transmitter Test Set-Up: Spurious Emission

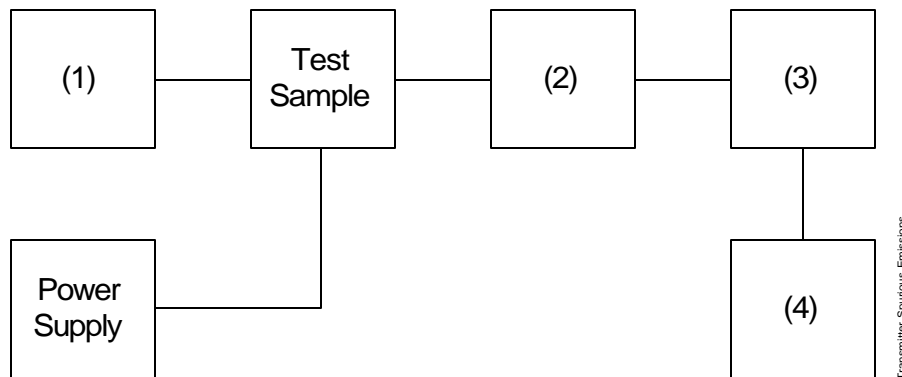

| Asset | Description | s/n | | |
|---------------------------------------|---------------|-----------------------------------|---------------|---------------|
| (1) Audio Oscillator/Generator | | | | |
| X | i00017 | HP 8903A Audio Analyzer | 2216A01753 | 12 mo. Aug-06 |
| | i00002 | HP 3336B Synthesizer / Level Gen. | 1931A01465 | 12 mo. Jun-07 |
| (2) Coaxial Attenuator | | | | |
| X | i00231/2 | PASTERNAK PE7021-30 (30 dB) | 231 or 232 | NCR |
| | i0012/3 | NARDA 766 (10 dB) | 7802 or 7802A | NCR |
| (3) Filters; Notch, HP, LP, BP | | | | |
| | None required | | | |
| (4) Spectrum Analyzer | | | | |
| X | i00048 | HP 8566B Spectrum Analyzer | 2511A01467 | 12 mo. Aug-06 |
| | i00029 | HP 8563E Spectrum Analyzer | 3213A00104 | 12 mo. Jan-06 |

Name of Test: Unwanted Emissions (Transmitter Conducted)

Measurement Results
(Worst Case)

Summary:

Frequency of carrier, MHz = 450.110, 519.95, 485.05
 Spectrum Searched, GHz = 0 to 10 x F_c
 Maximum Response, Hz = 1780
 All Other Emissions = = 20 dB Below Limit
 Limit(s), dBc
 -(43+10xLOG P) = -43 (1 Watt)
 -(43+10xLOG P) = -49 (4 Watts)

Tabulated Results follow:

Measurement Results

g0690038: 2006-Sep-21 Thu 09:41:00
 State: 1:High Power

Ambient Temperature: 23°C ± 3°C

| Frequency Tuned, MHz | Frequency Emission, MHz | Level, dBm | Level, dBc | Margin, dB |
|----------------------|-------------------------|------------|------------|------------|
| 450.110000 | 900.013000 | -42 | -77.5 | -29 |
| 519.950000 | 1038.500000 | -45.4 | -74.5 | -61.4 |
| 485.050000 | 970.114000 | -32.8 | -68.3 | -19.8 |
| 450.110000 | 1350.007000 | -41.3 | -76.8 | -28.3 |
| 519.950000 | 1557.710000 | -44.0 | -73.1 | -60.0 |
| 485.050000 | 1455.146000 | -38 | -73.5 | -25 |
| 450.110000 | 1800.464000 | -42.6 | -78.1 | -29.6 |
| 519.950000 | 2084.660000 | -43.9 | -73.0 | -59.9 |
| 485.050000 | 1940.075000 | -41.4 | -76.9 | -28.4 |
| 450.110000 | 2250.630000 | -41.7 | -77.2 | -28.7 |
| 519.950000 | 2601.020000 | -42.9 | -72.0 | -58.9 |
| 485.050000 | 2425.392000 | -41.1 | -76.6 | -28.1 |
| 450.110000 | 2700.288000 | -42.9 | -78.4 | -29.9 |
| 519.950000 | 3120.200000 | -43.6 | -72.7 | -59.6 |
| 485.050000 | 2910.049000 | -43.9 | -79.4 | -30.9 |
| 450.110000 | 3151.097000 | -44.3 | -79.8 | -31.3 |
| 519.950000 | 3637.840000 | -44.4 | -73.5 | -60.4 |
| 485.050000 | 3395.566000 | -43.7 | -79.2 | -30.7 |
| 450.110000 | 3600.947000 | -43.4 | -78.9 | -30.4 |
| 519.950000 | 4156.010000 | -44.4 | -73.5 | -60.4 |
| 485.050000 | 3880.295000 | -43.8 | -79.3 | -30.8 |
| 450.110000 | 4050.635000 | -43.7 | -79.2 | -30.7 |
| 485.050000 | 4365.322000 | -43.9 | -79.4 | -30.9 |
| 450.110000 | 4501.383000 | -42.7 | -78.2 | -29.7 |
| 485.050000 | 4850.236000 | -43.1 | -78.6 | -30.1 |

Performed by:

Name of Test: Field Strength of Spurious Radiation
Specification: 47 CFR 2.1053(a)
Guide: ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917


Measurement Procedure

Definition:

Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.


Method of Measurement:

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth 100 kHz (<1 GHz), 1 MHz (> 1GHz).
 - 2) Video Bandwidth = 3 times Resolution Bandwidth, or 30 kHz (22.917)
 - 3) Sweep Speed ≤ 2000 Hz/second
 - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load that is placed on the turntable. The RF cable to this load should be of minimum length.

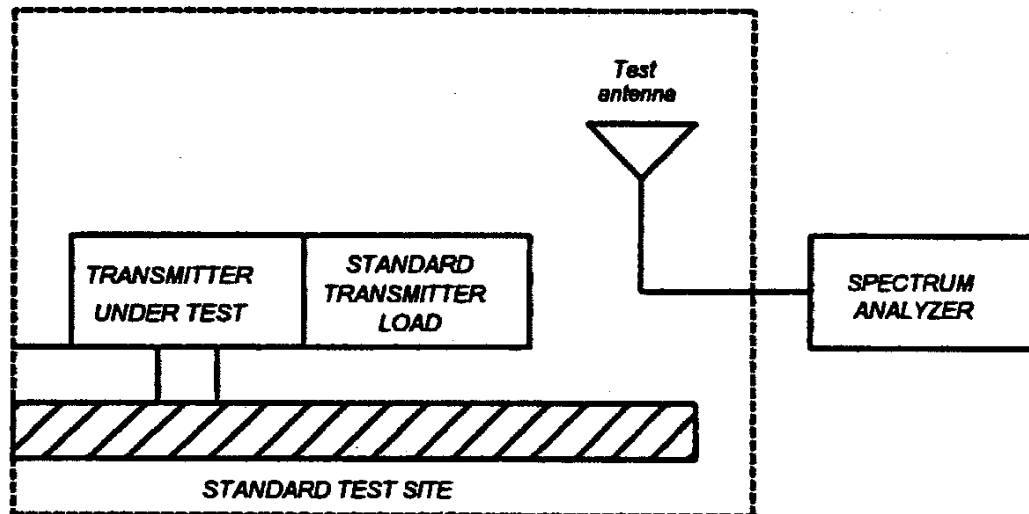

Name of Test: Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

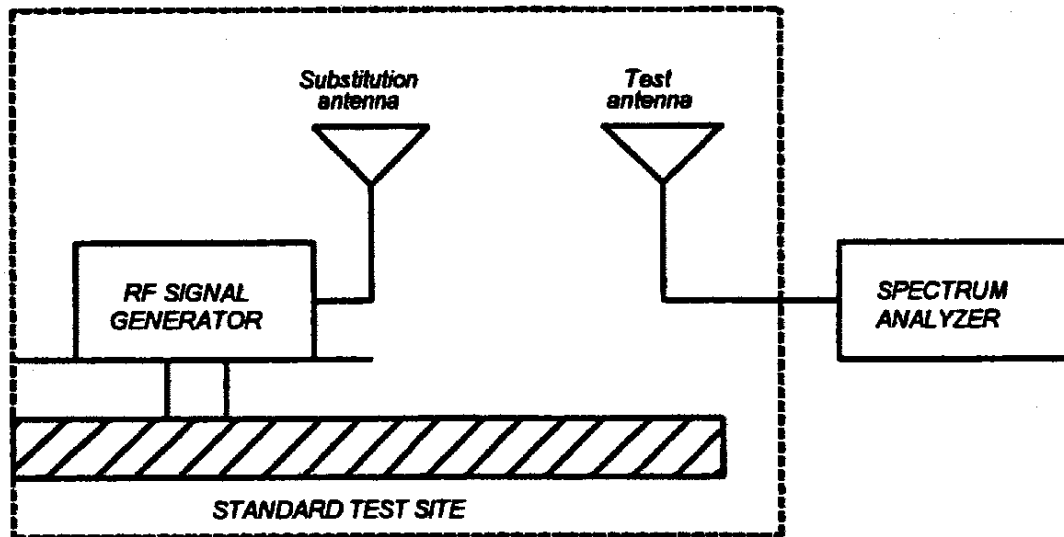

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

Name of Test: Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =

$$10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step I)}$$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment

| Asset | Description | s/n | Cycle | Last Cal |
|-------------------------------|-------------|---------------------------|------------|----------------|
| Transducer | | | | |
| | i00088 | EMCO 3109-B 25MHz-300MHz | 2336 | 12 mo. Oct-07 |
| X | i00089 | Apriel 2001 200MHz-1GHz | 001500 | 12 mo. Oct-07` |
| X | i00103 | EMCO 3115 1GHz-18GHz | 9208-3925 | 12 mo. Sep-06 |
| Amplifier | | | | |
| X | i00028 | HP 8449A | 2749A00121 | 12 mo. Dec-06 |
| Spectrum Analyzer | | | | |
| X | i00029 | HP 8563E | 3213A00104 | 12 mo. Jan -06 |
| X | i00033 | HP 85462A | 3625A00357 | 12 mo. Oct-06 |
| Substitution Generator | | | | |
| X | i00067 | HP 8920A Communication TS | 3345U01242 | 12 mo. Jun-06 |
| | i00207 | HP 8753D Network Analyzer | 3410A08514 | 12 mo. May-06 |

Microphone, Antenna Port, and Cabling

Microphone _____ Cable Length _____ Meters
 Antenna Port Terminated _____ Load _____ Antenna Gain _____
 All Ports Terminated by Load _____ Peripheral _____

Name of Test: Field Strength of Spurious Radiation


Measurement Results

g0690042: 2006-Sep-26 Tue 10:08:00
STATE: 2:High Power

Ambient Temperature: 23°C ± 3°C

| Frequency Tuned, MHz | Frequency Emission, MHz | ERP, dBm | ERP, dBc |
|----------------------|-------------------------|----------|----------|
| 450.110000 | 900.096800 | -36.3 | |

Note: No other emissions were found.

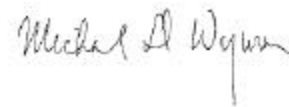

Performed by:

Michael D. wyman

Name of Test: Emission Masks (Occupied Bandwidth)


Specification: 47 CFR 2.1049(c)(1)

Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

Measurement Procedure

- A) The EUT and test equipment were set up as shown below
- B) For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for $\pm 2.5/\pm 1.25$ kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
- C) For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
- D) The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.

Transmitter Test Set-Up: Occupied Bandwidth

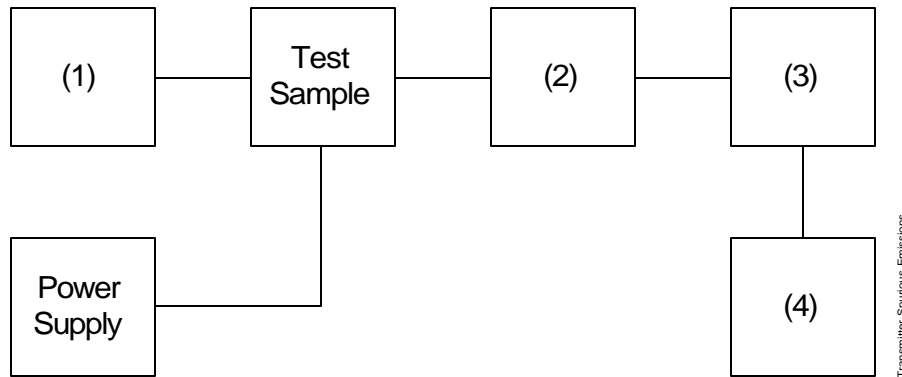


| Asset | Description | s/n | Cycle | Last Cal |
|---------------------------------------|--------------------------------|------------|--------|----------|
| (1) Audio Oscillator/Generator | | | | |
| X i00017 | HP 8903A Modulation Meter | 2216A01753 | 12 mo. | Jul-05 |
| (2) Coaxial Attenuator | | | | |
| X i00231/2 | PASTERNAK PE7021-30 (30 dB) | 231 or 232 | NCR | |
| i00123 | NARDA 766 (10 dB) | 7802A | NCR | |
| (3) Interface | | | | |
| X i00021 | HP 8954A Transceiver Interface | 2146A00159 | NCR | |
| (4) Spectrum Analyzer | | | | |
| X i00048 | HP 8566B Spectrum Analyzer | 2511A01467 | 12 mo. | Aug-06 |
| i00029 | HP 8563E Spectrum Analyzer | 3213A00104 | 12 mo. | Jan-06 |

Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0690025: 2006-Sep-21 Thu 08:06:00
 State: 1:Low Power

Ambient Temperature: 23°C ± 3°C

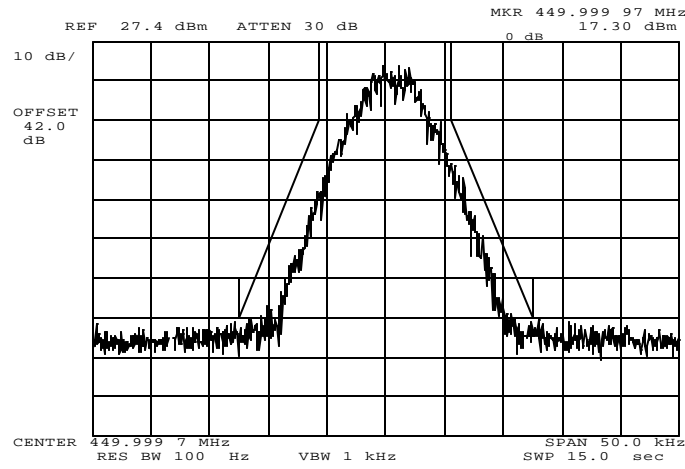

Power: LOW
 Modulation: Ref Gen=12.5 kHz Deviation
 LO CHANNEL

Michael D Wyman

Performed by:


Michael D. wyman

Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0690026: 2006-Sep-21 Thu 08:18:00
 State: 1:Low Power

Ambient Temperature: 23°C ± 3°C

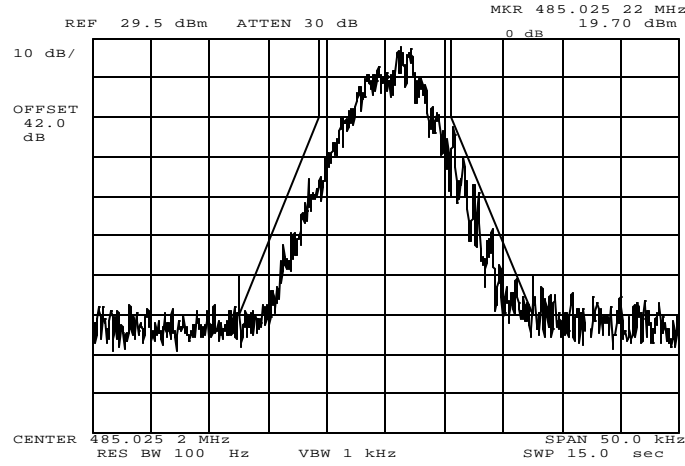

Power: LOW
 Modulation: Ref Gen=12.5 kHz Deviation
 MID CHANNEL

Michael D Wyman

Performed by:


Michael D. Wyman

Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0690033: 2006-Sep-21 Thu 08:25:00
State: 1:Low Power

Ambient Temperature: 23°C ± 3°C

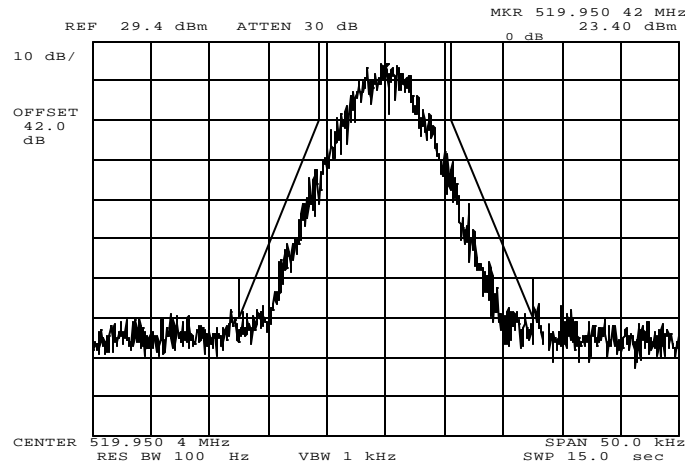

Power:
Modulation:

LOW
Ref Gen=12.5 kHz Deviation
HI CHANNEL

Michael D Wyman

Performed by:


Michael D. Wyman

Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0690034: 2006-Sep-21 Thu 08:28:00
 State: 2:High Power

Ambient Temperature: 23°C ± 3°C

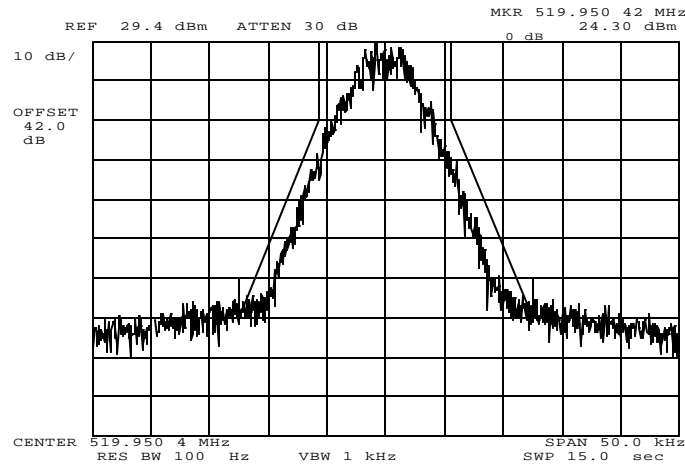

Power:
 Modulation:

HIGH
 Ref Gen=12.5 kHz Deviation
 HI CHANNEL

Michael D Wyman

Performed by:


Michael D. Wyman

Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0690035: 2006-Sep-21 Thu 08:30:00
 State: 2:High Power

Ambient Temperature: 23°C ± 3°C

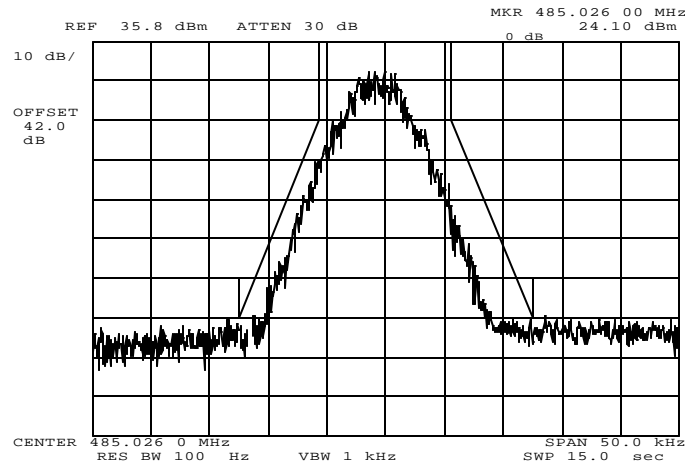

Power:
 Modulation:

HIGH
 Ref Gen=12.5 kHz Deviation
 MID CHANNEL

Michael D Wyman

Performed by:


Michael D. Wyman

Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0690036: 2006-Sep-21 Thu 08:32:00
State: 2:High Power

Ambient Temperature: 23°C ± 3°C

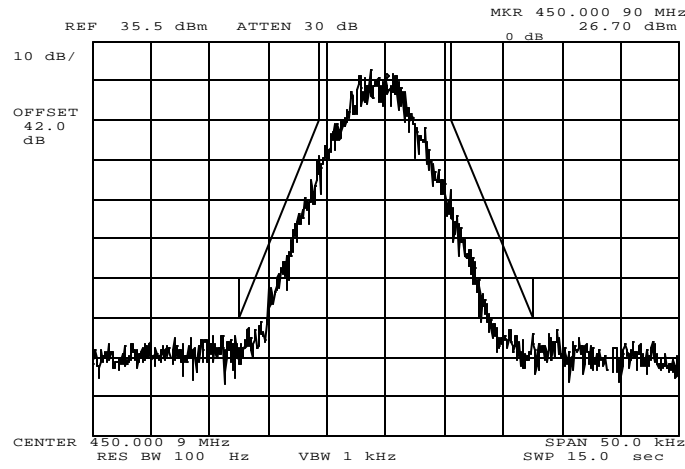

Power:
Modulation:

HIGH
Ref Gen=12.5 kHz Deviation
LO CHANNEL

Michael D Wyman

Performed by:


Michael D. Wyman

Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0690036: 2006-Sep-21 Thu 08:32:00
State: 2:High Power

Ambient Temperature: 23°C ± 3°C

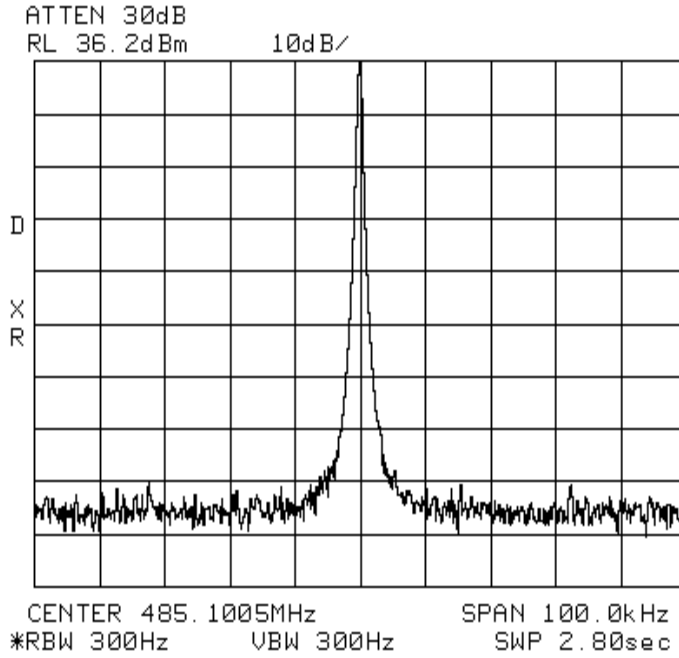

Power: HIGH
Modulation: Ref Gen=25 kHz Deviation

Data Supplied by Applicant


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0690036: 2006-Sep-21 Thu 08:32:00

State: 2:High Power

Ambient Temperature: 23°C ± 3°C

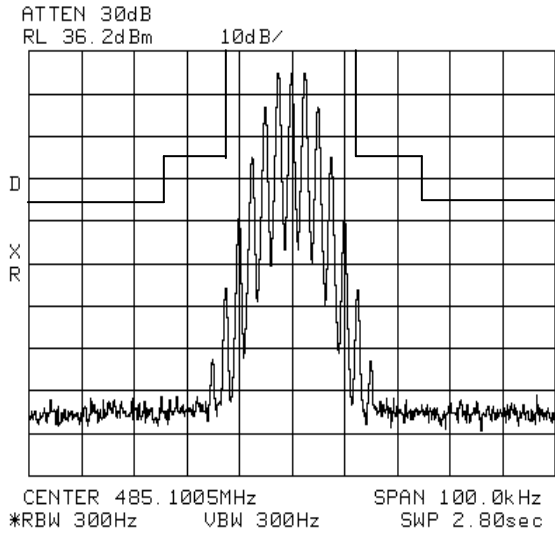

Power: High

Modulation Ref Gen 25 Khz Deviation
Emission Mask B

Data Supplied by Applicant


Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0690036: 2006-Sep-21 Thu 08:32:00
State: 2:High Power

Ambient Temperature: 23°C ± 3°C

LO CHANNEL

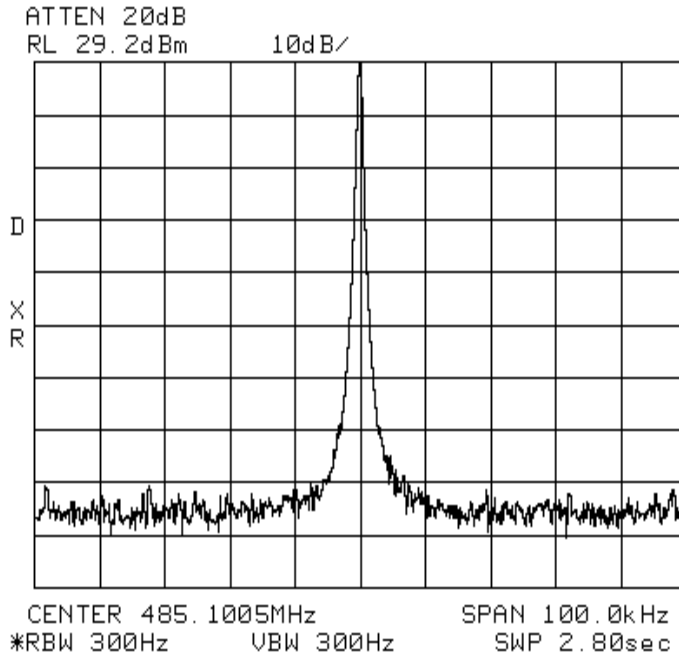

Power Low
Modulation Ref Gen 25 kHz Deviation


Data Supplied by Applicant

Name of Test: Emission Masks (Occupied Bandwidth)

Measurement Results

g0690036: 2006-Sep-21 Thu 08:32:00
State: 2:High Power

Ambient Temperature: 23°C ± 3°C

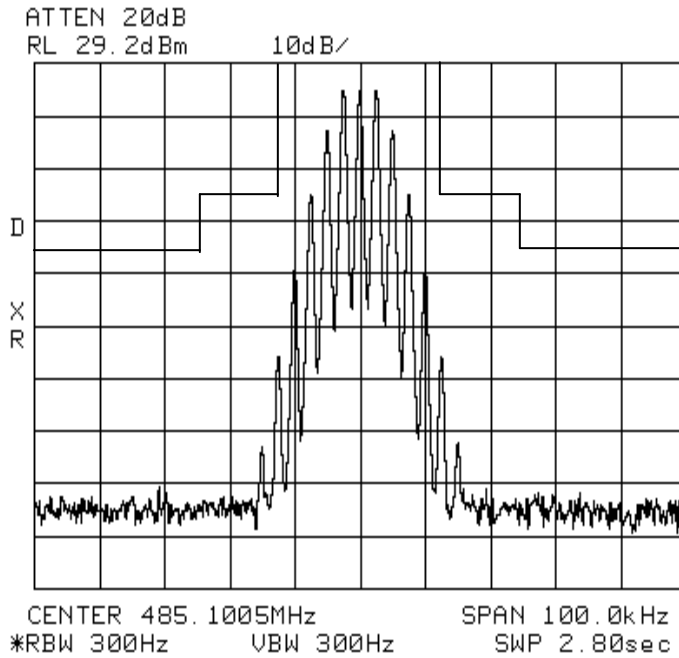


Power Low
Modulation: Ref Gen 25 kHz Deviation
Emission Mask B

Data Supplied By Applicant

Name of Test: Transient Frequency Behavior
Specification: 47 CFR 90.214
Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.19

Measurement Procedure

- A) The EUT was setup as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a *guide*.
- B) The transmitter was turned on.
- C) Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded.
- D) The transmitter was turned off.
- E) An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step C) above, measured at the output of the combiner. This level was then fixed for the remainder of the test.
- F) The oscilloscope was setup using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5 ms/div (VHF).
- G) The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded.
- H) The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.

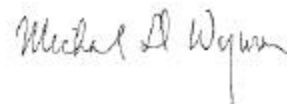


Performed by:

Michael D. Wyman

Name of Test: Transient Frequency Behavior



Transmitter Set-Up

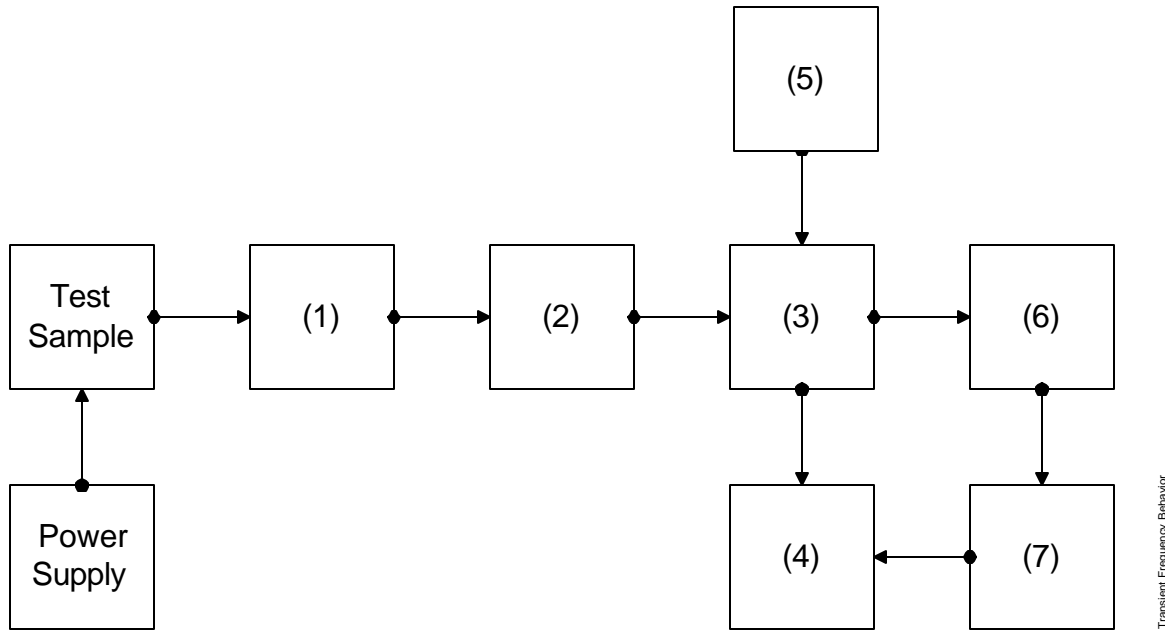

| Asset | Description | s/n | Cycle | Last Cal |
|--------------------------------|--------------------------------|---------------|--------|----------|
| (1) Attenuator | (Removed after 1st step) | | | |
| X i00231/2 | PASTERNAK PE7021-30 (30 dB) | 231 or 232 | NCR | |
| (2) Attenuator | | | | |
| X i00231/2 | PASTERNAK PE7021-30 (30 dB) | 231 or 232 | NCR | |
| i00122/3 | NARDA 766 (10 dB) | 7802 or 7802A | NCR | |
| (3) Combiner | | | | |
| X i00154 | 4 x 25 Ω Combiner | 154 | NCR | |
| (4) Crystal Decoder | | | | |
| X i00159 | HP 8470B Crystal Detector | 1822A10054 | NCR | |
| (5) RF Signal Generator | | | | |
| X i00067 | HP 8920A Communication TS | 3345U01242 | 12 mo. | Jun-06 |
| (6) Modulation Analyzer | | | | |
| X i00020 | HP 8901A Modulation Meter | 2105A01087 | 12 mo. | May-05 |
| (7) Oscilloscope | | | | |
| X i00030 | HP 54502A Digital Oscilloscope | 2927A00209 | 12 mo. | Feb-04 |

Name of Test: Transient Frequency Behavior

State: Ambient Temperature: 23°C ± 3°C

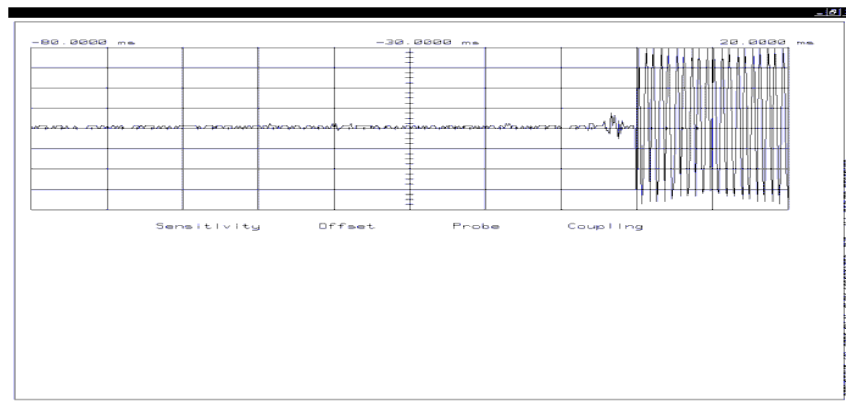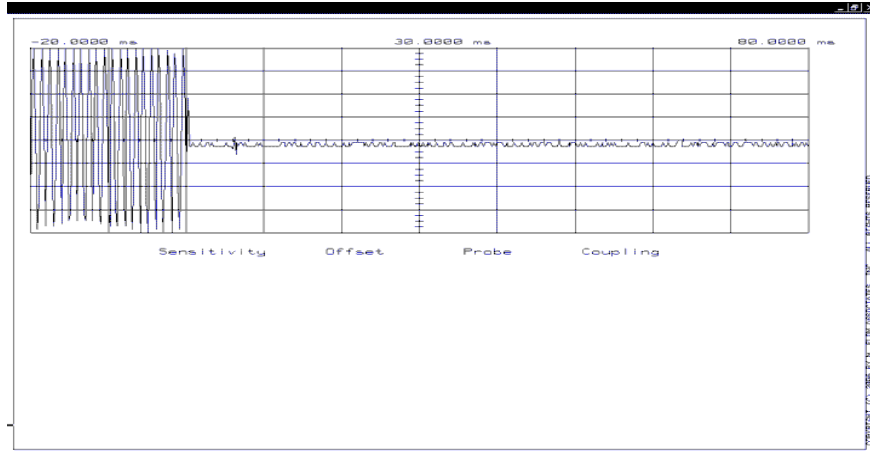

Power: 4 watts
 Modulation: 12.5 kHz
 Description: Carrier on, Carrier off Testing

Michael D Wyman


Performed by: Michael D. Wyman

Name of Test: Audio Low Pass Filter (Voice Input)
Specification: 47 CFR 2.1047(a)
Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.15

Measurement Procedure

- A) The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
- B) The audio output was connected at the output to the modulated stage.

Transmitter Test Set-Up: Response of Low Pass Filter

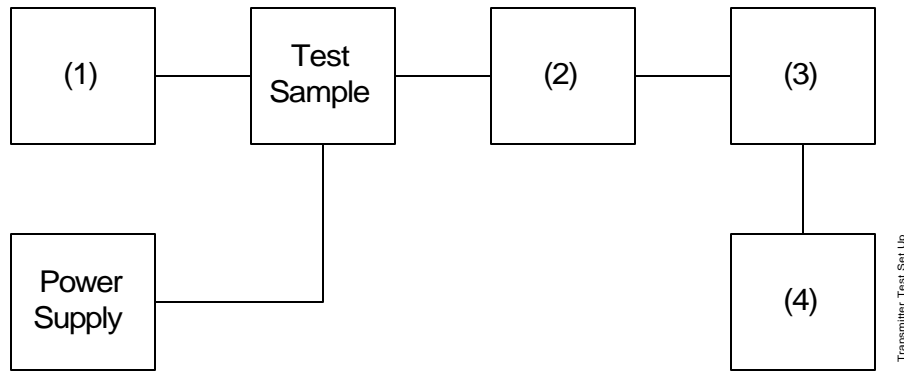

| Asset | Description | s/n | Cycle | Last Cal |
|--------------------------------|------------------------------------------|---------------|--------|----------|
| (1) Audio Oscillator | | | | |
| X | i00002 HP 3336B Synthesizer / Level Gen. | 1931A01465 | 12 mo | Jun-06 |
| (2) Coaxial Attenuator | | | | |
| | i00122/3 NARDA 766 (10dB)10 | 7802 or 7802A | NCR | |
| X | i00231/2 PASTERNAK PE7021-30 (30 dB) | 231 or 232 | NCR | |
| (3) Modulation Analyzer | | | | |
| X | i00020 HP 8901A Modulation Meter | 2105A01087 | 12 mo. | May-06 |
| (4) Audio Analyzer | | | | |
| X | i00001 HP 3586B Selective Level Meter | 1928A01360 | 12 mo. | Aug-06 |


Name of Test: Audio Low Pass Filter (Voice Input)

Measurement Results

[B13] [B14]
State: [B15]

Ambient Temperature: 23°C ± 3°C

[B16]

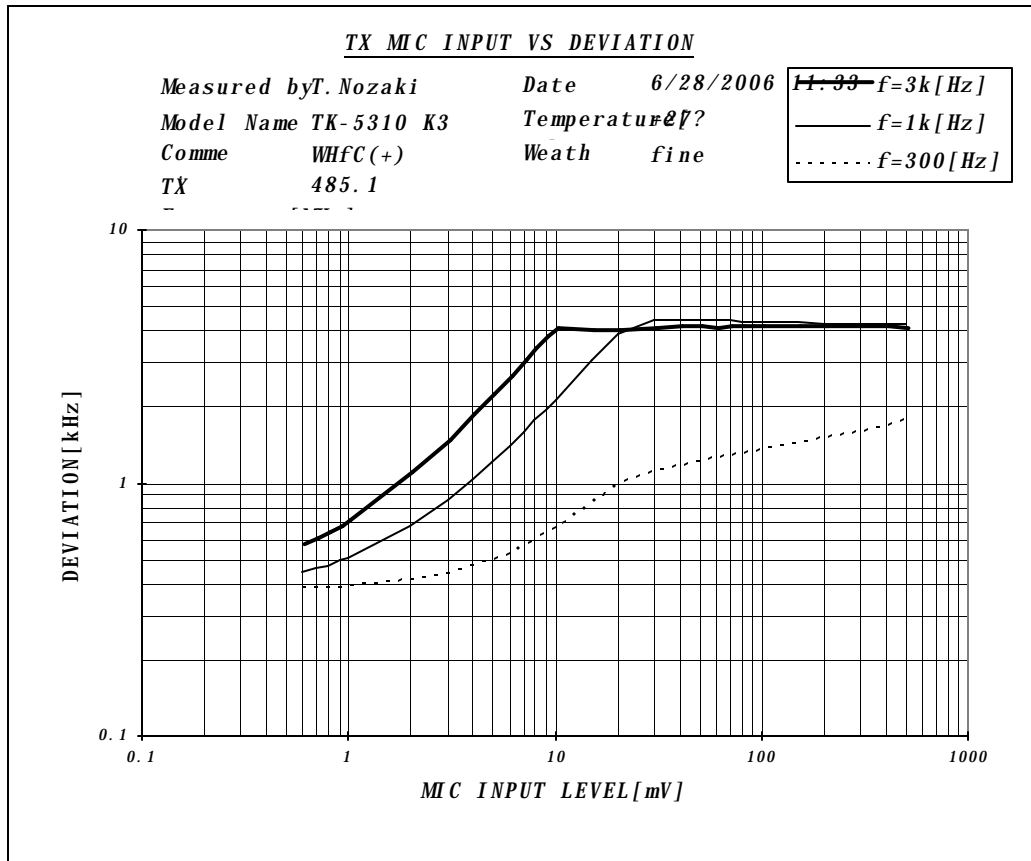

Data Supplied By Applicant

[B17]


Name of Test: Audio Low Pass Filter (Voice Input)

Measurement Results

[B20] [B21]
State: [B22]

Ambient Temperature: 23°C ± 3°C

[B23]

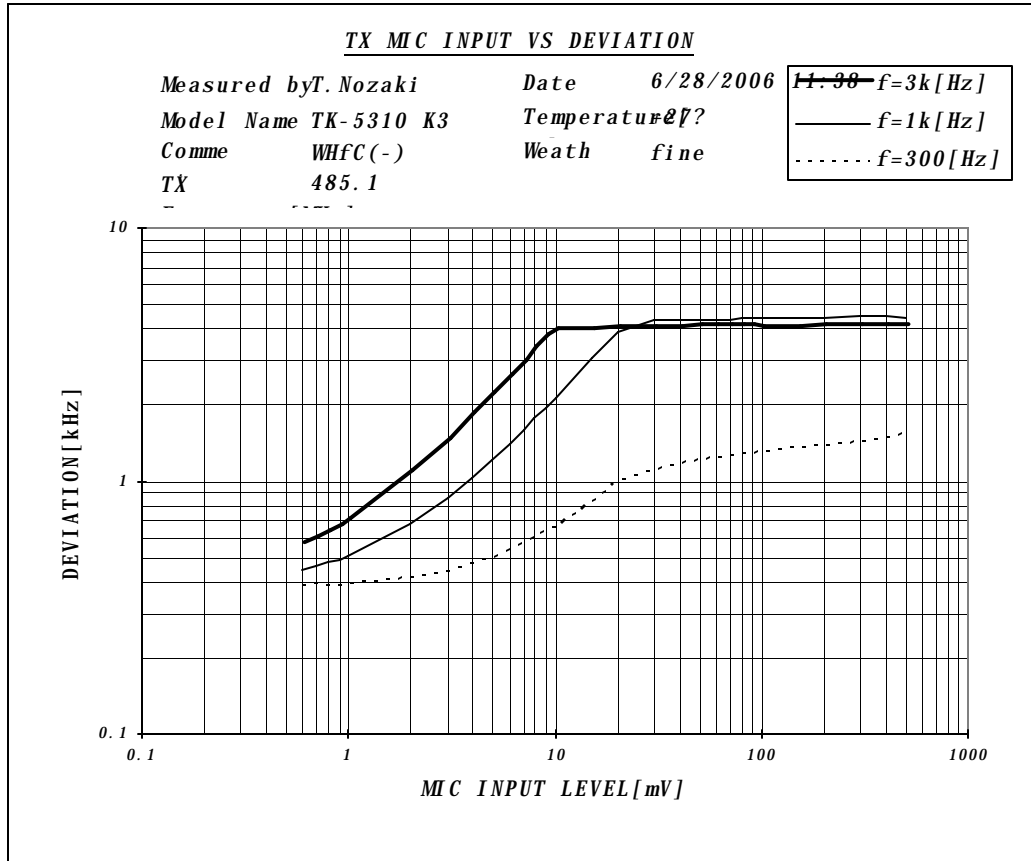

[B24]


Data Supplied by Applicant

Name of Test: Audio Frequency Response
Specification: 47 CFR 2.1047(a)
Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6

Measurement Procedure

- A) The EUT and test equipment were set up as shown below.
- B) The audio signal generator was connected to the audio input circuit/microphone of the EUT.
- C) The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- D) With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
- E) The response in dB relative to 1 kHz was measured, using the HP 8901A Modulation Meter.

Transmitter Test Set-Up: Audio Frequency Response

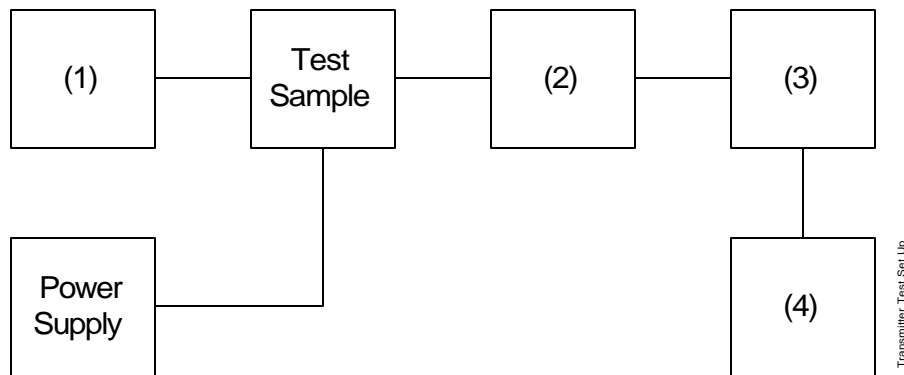


| Asset | Description | s/n | Cycle | Last Cal |
|--------------------------------|-----------------------------|---------------|--------|----------|
| (1) Audio Oscillator | | | | |
| X i00017 | HP 8903A Audio Analyzer | 2216A01753 | 12 mo. | Aug-06 |
| (2) Coaxial Attenuator | | | | |
| | i00122/3 NARDA 766-(10 dB) | 7802 or 7802A | NCR | |
| X i00231/2 | PASTERNAK PE7021-30 (30 dB) | 231 or 232 | NCR | |
| (3) Modulation Analyzer | | | | |
| X i00020 | HP 8901A Modulation Meter | 2105A01087 | 12 mo. | May-06 |
| (4) Audio Analyzer | | | | |
| X i00017 | HP 8903A Audio Analyzer | 2216A01753 | 12 mo. | Aug-06 |

Name of Test: Audio Frequency Response

Measurement Results

g06a0038: 2006-Oct-12 Thu 14:01:00
State: 0:General

Ambient Temperature: 23°C ± 3°C

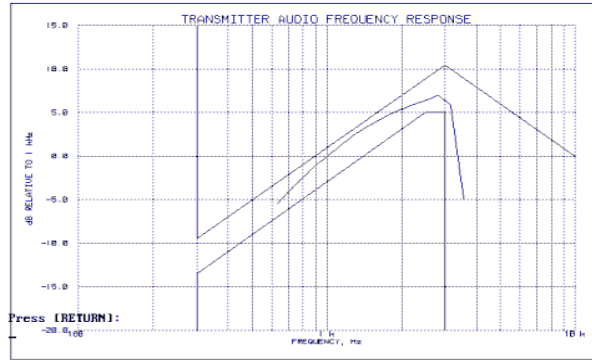

Frequency of Maximum Audio Response, Hz = 2.5 kHz

Performed by:


Michael D. Wyman

Name of Test: Modulation Limiting
Specification: 47 CFR 2.1047(b)
Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3

Measurement Procedure

- A) The signal generator was connected to the input of the EUT as shown below.
- B) The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
- C) The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
- D) Measurements were performed for both negative and positive modulation and the respective results were recorded.

Transmitter Test Set-Up: Modulation Limiting

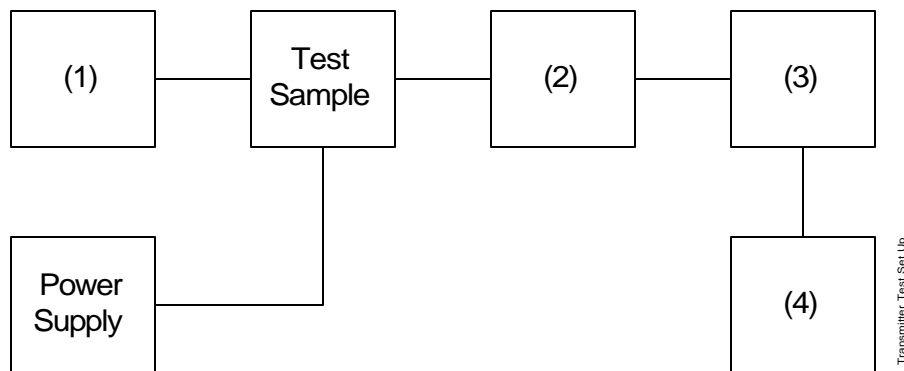

| Asset | Description | s/n | | |
|--------------------------------|--------------------------------------|---------------|--------|--------|
| (1) Audio Oscillator | | | | |
| X | i00017 HP 8903A Audio Analyzer | 2216A01753 | 12 mo. | Aug-06 |
| (2) Coaxial Attenuator | | | | |
| | i0012/23 NARDA 766-(10 dB) | 7802 or 7802A | NCR | |
| X | i00231/2 PASTERNAK PE7021-30 (30 dB) | 231 or 232 | NCR | |
| (3) Modulation Analyzer | | | | |
| X | i00020 HP 8901A Modulation Meter | 2105A01087 | 12 mo. | May-06 |
| (4) Audio Analyzer | | | | |
| X | i00017 HP 8903A Audio Analyzer | 2216A01753 | 12 mo. | Aug-06 |


Name of Test: Modulation Limiting

Measurement Results


g06a0037: 2006-Oct-11 Wed 17:55:00
State: 0:General

Ambient Temperature: 23°C ± 3°C

Positive
Peaks:

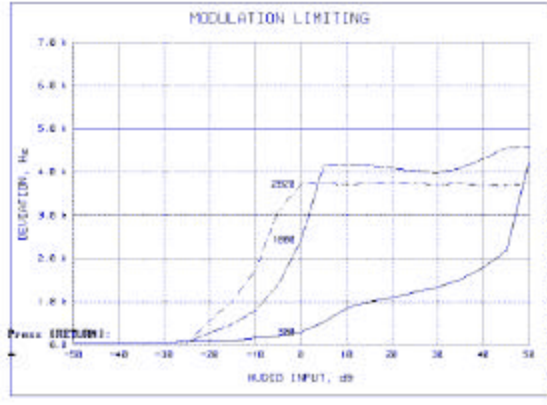

Negative
Peaks:

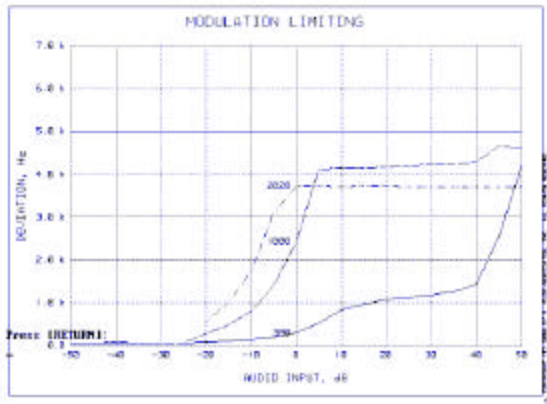

Michael D Wyman

Performed by:


Michael D. wyman

Name of Test: Frequency Stability (Temperature Variation)
Specification: 47 CFR 2.1055(a)(1)
Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

Measurement Procedure

- A) The EUT and test equipment were set up as shown on the following page.
- B) With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
- C) With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
- D) The temperature tests were performed for the worst case.

Transmitter Test Set-Up: Temperature Variation

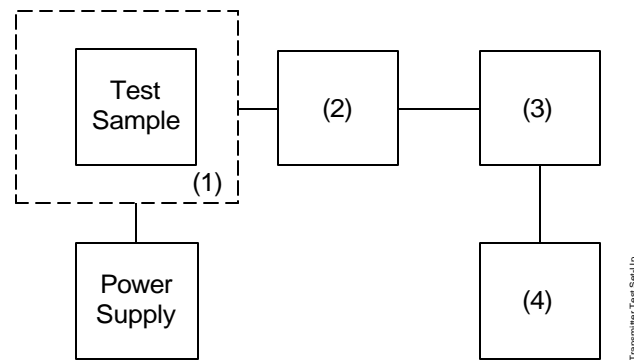


| Asset | Description | s/n | Cycle | Last Cal |
|---------------------------------------------|-----------------------------|---------------|--------|----------|
| (1) Temperature, Humidity, Vibration | | | | |
| X i00027 | Tenney Temp. Chamber | 9083-765-234 | NCR | |
| (2) Coaxial Attenuator | | | | |
| X i00231/2 | PASTERNAK PE7021-30 (30 dB) | 231 or 232 | NCR | |
| i00122/3 | NARDA 766 (10 dB) | 7802 or 7802A | NCR | |
| (3) RF Power | | | | |
| X i00067 | HP 8920A Communications TS | 3345U01242 | 12 mo. | Jun-06 |
| (4) Frequency Counter | | | | |
| X i00067 | HP 8920A Communications TS | 3345U01242 | 12 mo. | Jun-06 |

Name of Test: Frequency Stability (Temperature Variation)

Measurement Results

State: Ambient Temperature: 23°C ± 3°C

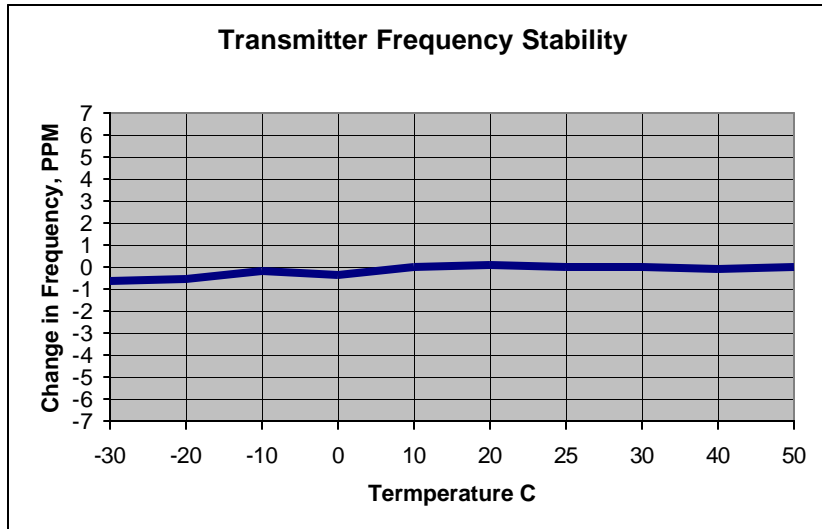


| Temp | Change in Freq Hz | Change in Freq PPM |
|------|-------------------|--------------------|
| -30 | -250.0 | -0.6 |
| -20 | -240.0 | -0.5 |
| -10 | -100.0 | -0.2 |
| 0 | -130.0 | -0.3 |
| 10 | 20.0 | 0.0 |
| 20 | 60.0 | 0.1 |
| 25 | 0.0 | 0.0 |
| 30 | 0.0 | 0.0 |
| 40 | -50.0 | -0.1 |
| 50 | -20.0 | 0.0 |

Name of Test: Frequency Stability (Voltage Variation)
Specification: 47 CFR 2.1055(d)(1)
Guide: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

Measurement Procedure

- A) The EUT was placed in a temperature chamber (if required) at 25±5°C and connected as shown below.
- B) The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- C) The variation in frequency was measured for the worst case.

Transmitter Test Set-Up: Voltage Variation

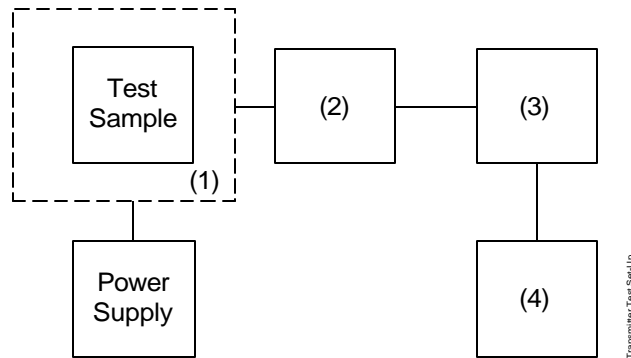

| Asset | Description | s/n | Cycle | Last Cal |
|---------------------------------------------|-----------------------------|---------------|--------|----------|
| (1) Temperature, Humidity, Vibration | | | | |
| i00027 | Tenney Temp. Chamber | 9083-765-234 | NCR | |
| (2) Coaxial Attenuator | | | | |
| X i00231/2 | PASTERNAK PE7021-30 (30 dB) | 231 or 232 | NCR | |
| i00122/3 | NARDA 766 (10 dB) | 7802 or 7802A | NCR | |
| (3) RF Power | | | | |
| X i00020 | HP 8901A Power Mode | 2105A01087 | 12 mo. | Jun-06 |
| (4) Frequency Counter | | | | |
| X i00020 | HP 8901A Frequency Mode | 2105A01087 | 12 mo. | Jun-06 |

Results:
Frequency Stability (Voltage Variation)

 [B27] [B28]
 State: [B29]

Ambient Temperature: 23°C ± 3°C

 Limit, ppm = [B30] Wide 5.0 Narrow 2.5 (Mobile)
 Limit, Hz = [B31] 775
 Battery End Point (Voltage) = [B32] 6.2

| % of STV | Voltage | Frequency, MHz | Change, Hz | Change, ppm |
|----------|---------|----------------|------------|-------------|
| [B34] | [B35] | [B36] | [B37] | [B38] [B39] |
| 115 | 8.6 | 485.10022 | 220 | 0.45 |
| 100 | 7.5 | 485.10021 | 210 | 0.43 |
| 85 | 6.4 | 485.10021 | 210 | 0.43 |
| 83 | 6.2 | 485.10022 | 220 | 0.45 |

Data Supplied By Applicant

[B41]

Name of Test: Necessary Bandwidth and Emission Bandwidth

Specification: 47 CFR 2.202(g)

Modulation = 16K0F3E

Necessary Bandwidth Calculation:

| | | |
|--------------------------------------------|---|---------------|
| Maximum Modulation (M), kHz | = | 3 |
| Maximum Deviation (D), kHz | = | 5 |
| Constant Factor (K) | = | 1 |
| Necessary Bandwidth (B _N), kHz | = | (2xM)+(2xDxK) |
| | = | 16.0 |

Modulation = 11K0F3E

Necessary Bandwidth Calculation:

| | | |
|--------------------------------------------|---|---------------|
| Maximum Modulation (M), kHz | = | 3 |
| Maximum Deviation (D), kHz | = | 2.5 |
| Constant Factor (K) | = | 1 |
| Necessary Bandwidth (B _N), kHz | = | (2xM)+(2xDxK) |
| | = | 11.0 |

Modulation = 8K10F1E


Necessary Bandwidth Calculation:

| | | |
|--------------------------------------------|---|---------------|
| Maximum Modulation (M), kHz | = | 1.41 |
| Maximum Deviation (D), kHz | = | 2.5 |
| Constant Factor (K) | = | 1 |
| Necessary Bandwidth (B _N), kHz | = | (2xM)+(2xDxK) |
| | = | 7.82 |

Modulation = 8K10F1D

Necessary Bandwidth Calculation:

| | | |
|--------------------------------------------|---|---------------|
| Maximum Modulation (M), kHz | = | 1.41 |
| Maximum Deviation (D), kHz | = | 2.5 |
| Constant Factor (K) | = | 1 |
| Necessary Bandwidth (B _N), kHz | = | (2xM)+(2xDxK) |
| | = | 7.82 |

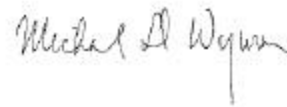

Performed by:

Michael D. Wyman


END OF TEST REPORT

**Testimonial
and
Statement of Certification**

This is to Certify:

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certifying Engineer:



Hoosamuddin S. Bandukwala, Lab Director