
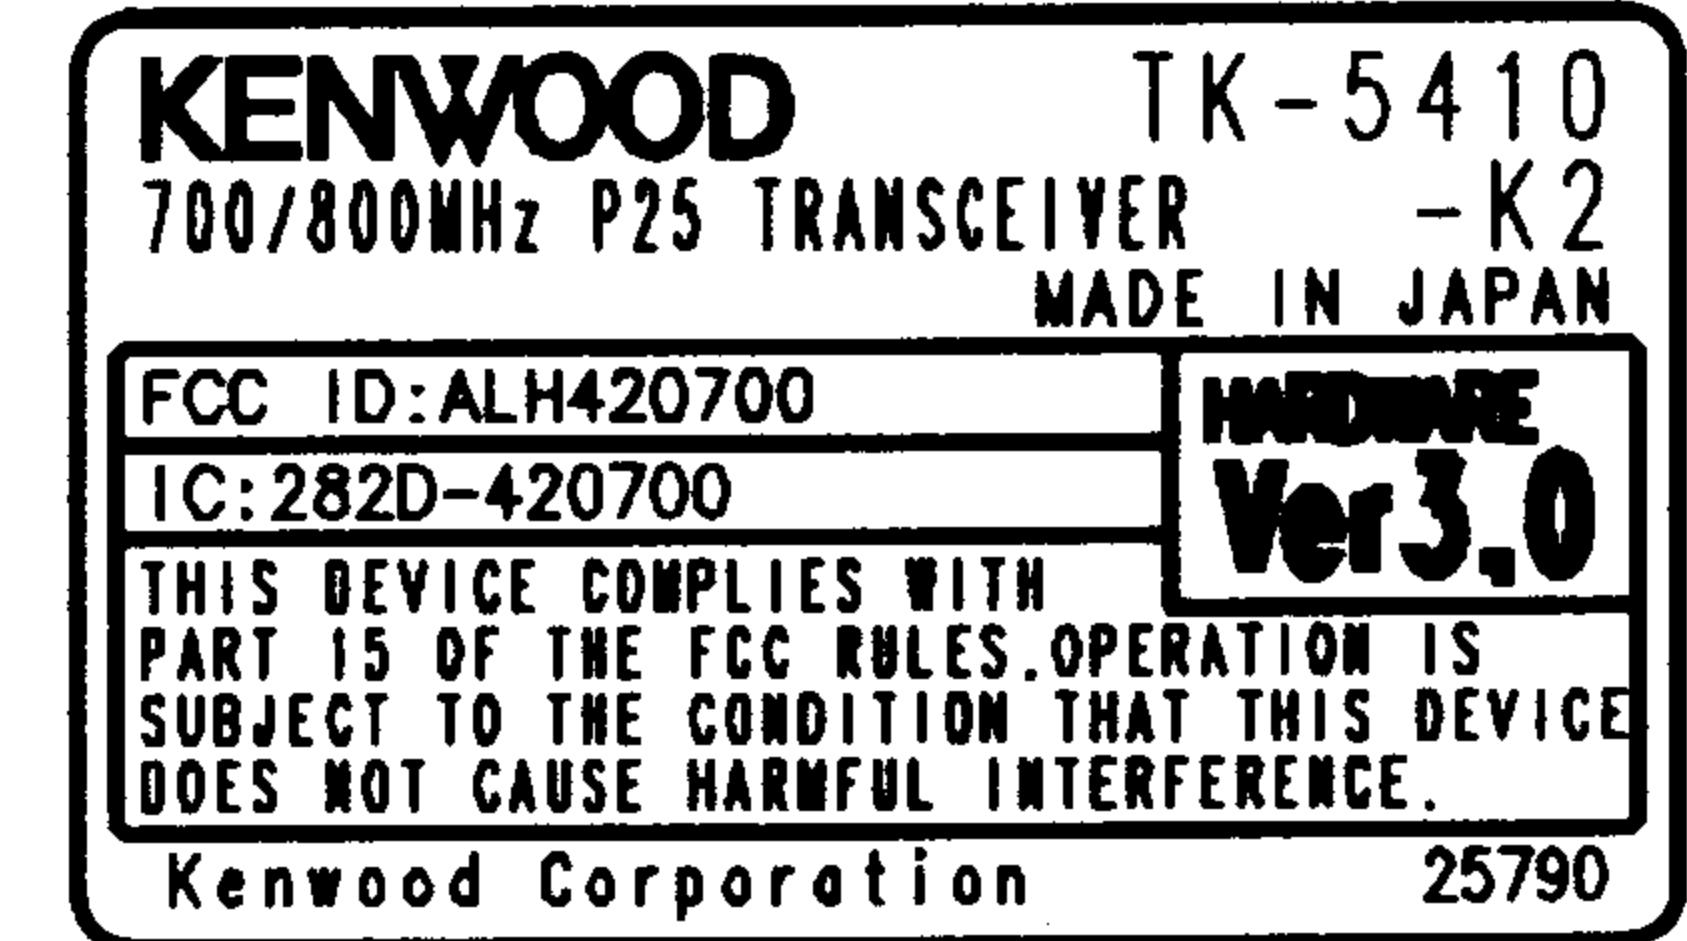


| 1              | 2   | 3      | 4                             |
|----------------|-----|--------|-------------------------------|
| TOLERANCE (C)  | MMV | SYMBOL | REVISION NO. CODE ISSUED DATE |
| ~ 6 ±0.15      | -   | △ XALL | - NEW ADDITION - 200 - -      |
| 6 ~ 30 ±0.20   |     |        |                               |
| 30 ~ 80 ±0.30  |     |        |                               |
| 80 ~ 250 ±0.40 |     |        |                               |
| 250~500 ±0.55  |     |        |                               |


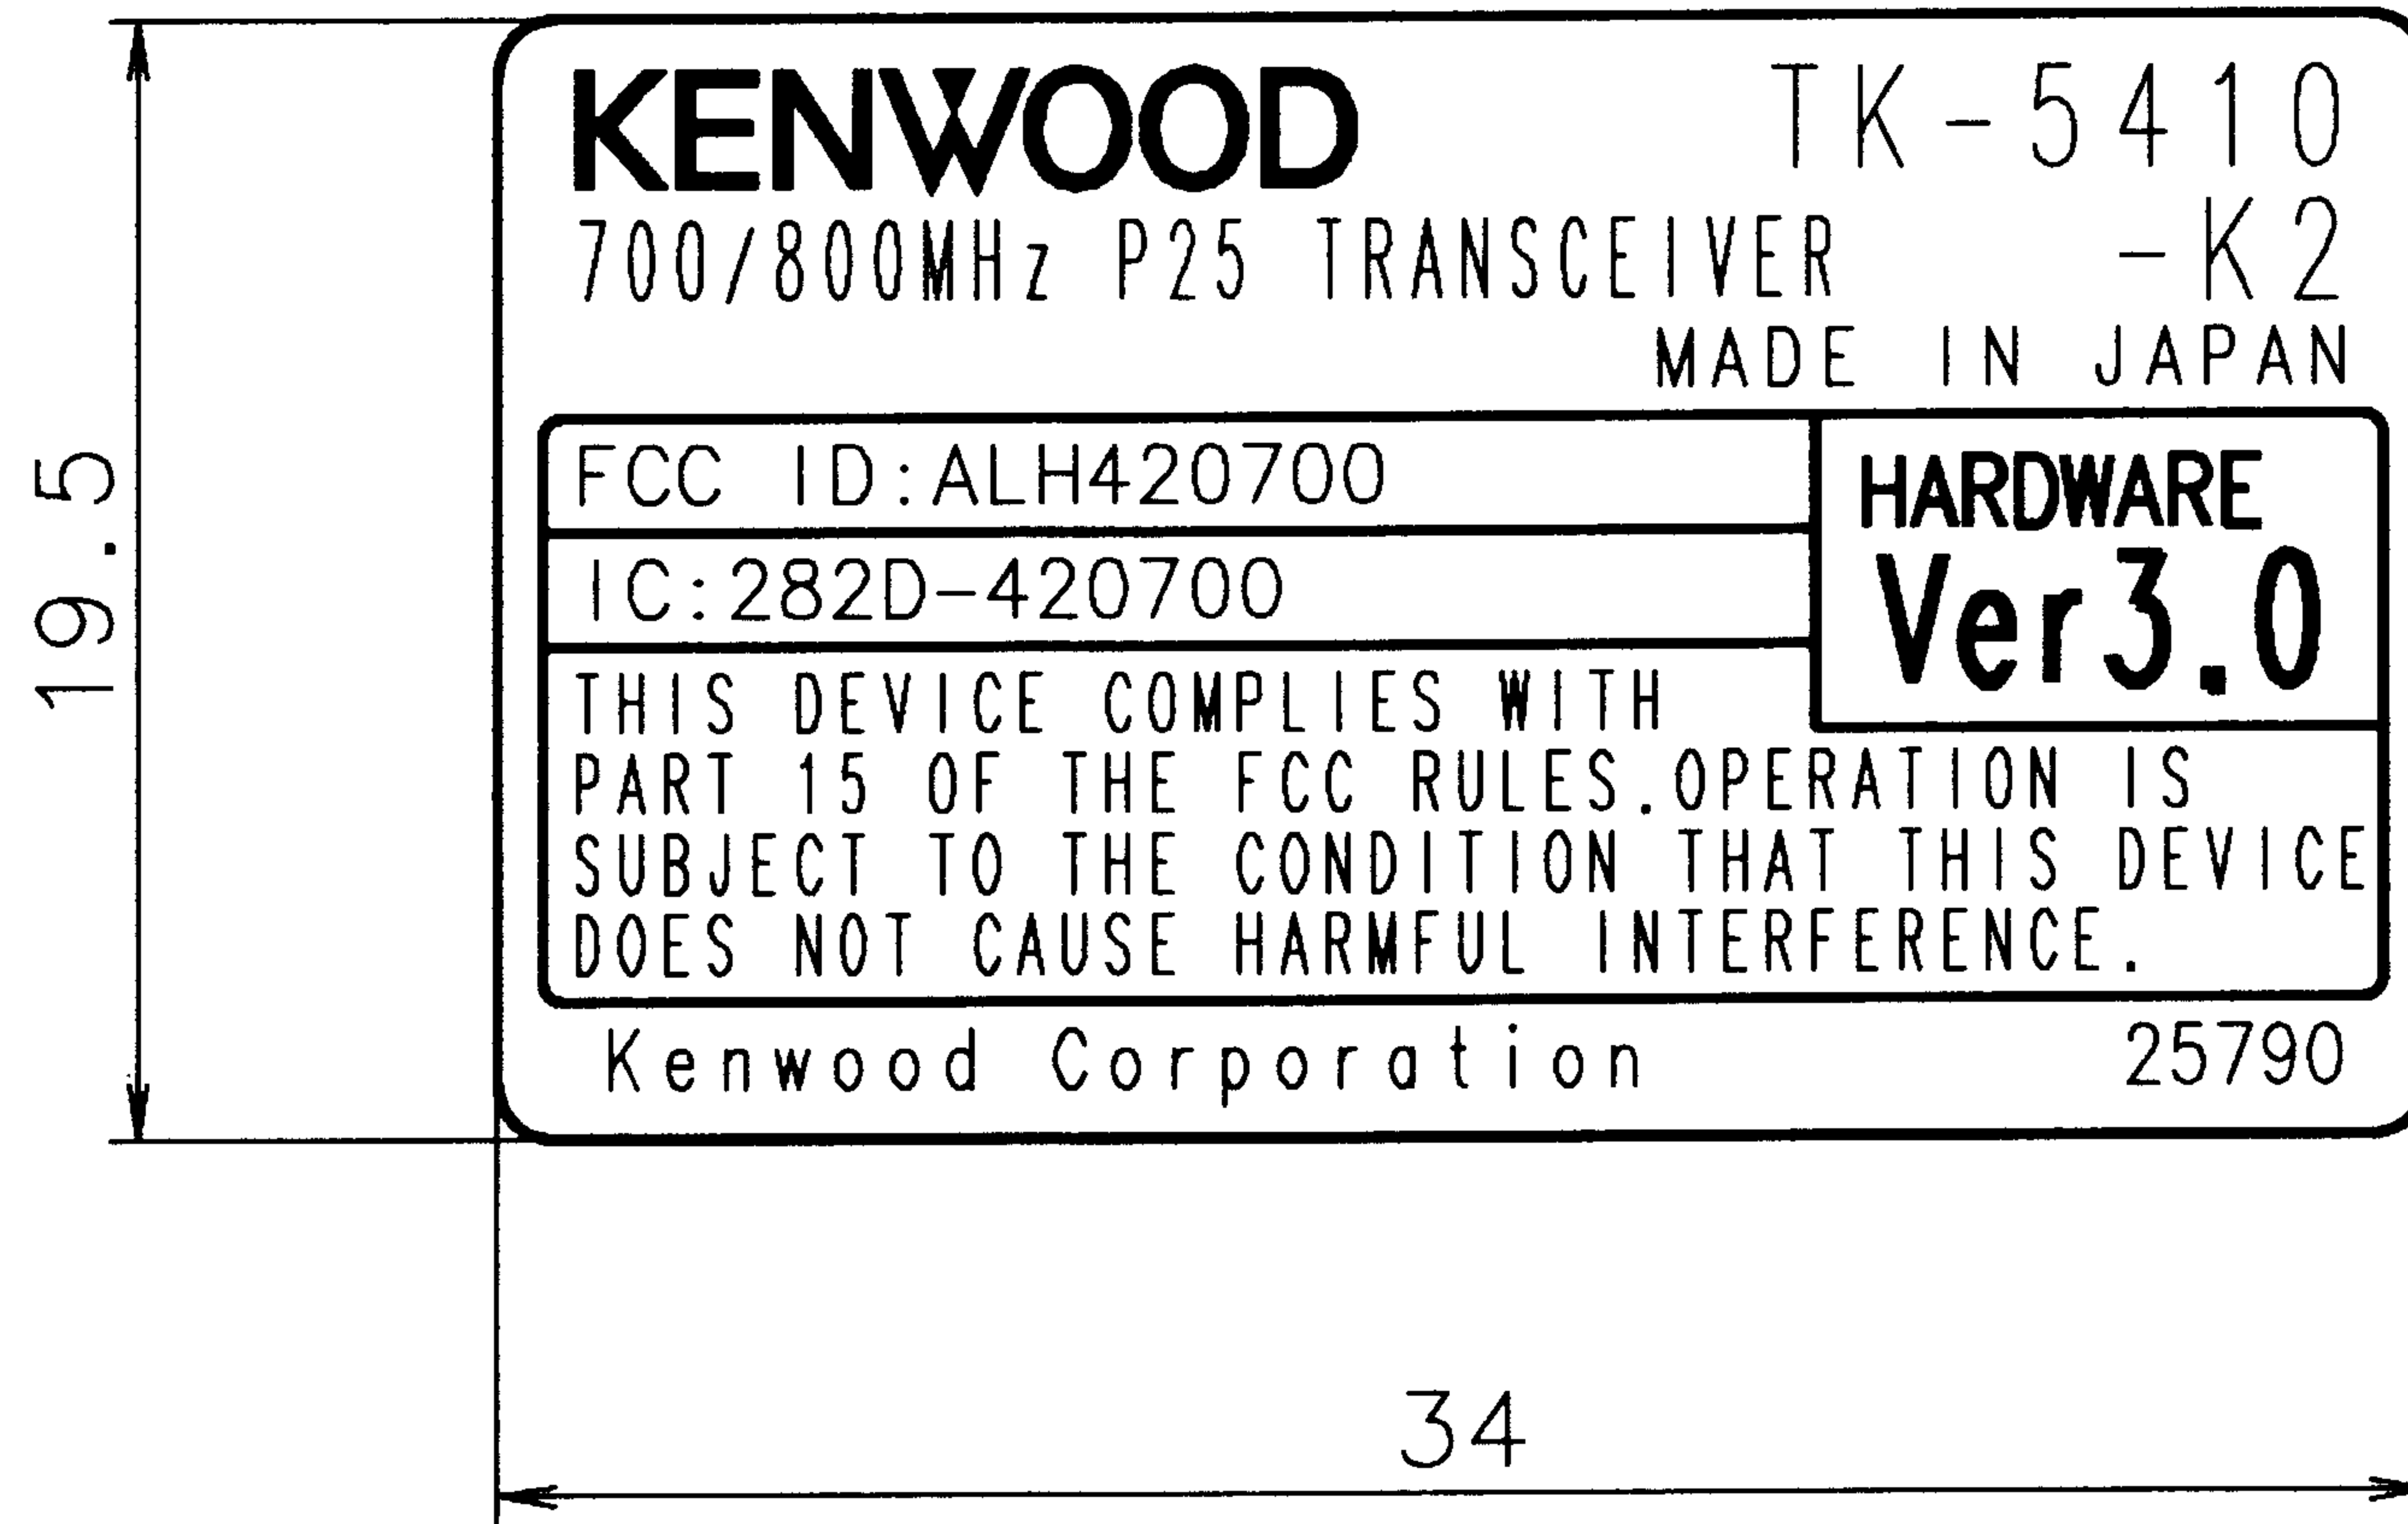


1:1

| -            | -           | -                           | -        | AL EVAPORATION<br>PLATE t0.1<br>FROSTED SILVER | SEAL PRINTING,<br>STRONG TACKIFIER,<br>LAMINATE(FROSTING) | Y50-6370-10 | -    |
|--------------|-------------|-----------------------------|----------|--|---|-------------|------|
| NO.          | PART NUMBER | NOTE                        | MATERIAL | FINISH   | MODEL   | QTY.        |      |
| SCALE NT:S   |             | DESIGNED                    | CHECKED  | APPROVED                                       | PART NAME   |             | -    |
| UNIT : mm    |             |                             |          |  | MODEL NAME PLATE  |             | -    |
|              |             | DATE                        | 200 - -  | DRAWING NUMBER                                 |   | MMV -       | -    |
| JIS Z8310-84 |             | KENWOOD Kenwood Corporation |          | PART NO.                                       |   | SHEET NO.   | REL. |
|              |             |                             |          | B72-2579-04                                    |   | 1/1         | 00   |

DRWN. DATE 2009-08-26

| 1              | 2       | 3      | 4                 |
|----------------|---------|--------|-------------------|
| TOLERANCE (C)  | MMV     | SYMBOL | REVISION NO. CODE |
| ~ 6 ±0.15      | -       | △ XALL | NEW ADDITION      |
| 6 ~ 30 ±0.20   |         |        |                   |
| 30 ~ 80 ±0.30  |         |        |                   |
| 80 ~ 250 ±0.40 |         |        |                   |
| 250~500 ±0.55  |         |        |                   |
| ISSUED         | DATE    |        |                   |
| -              | 200 - - |        |                   |

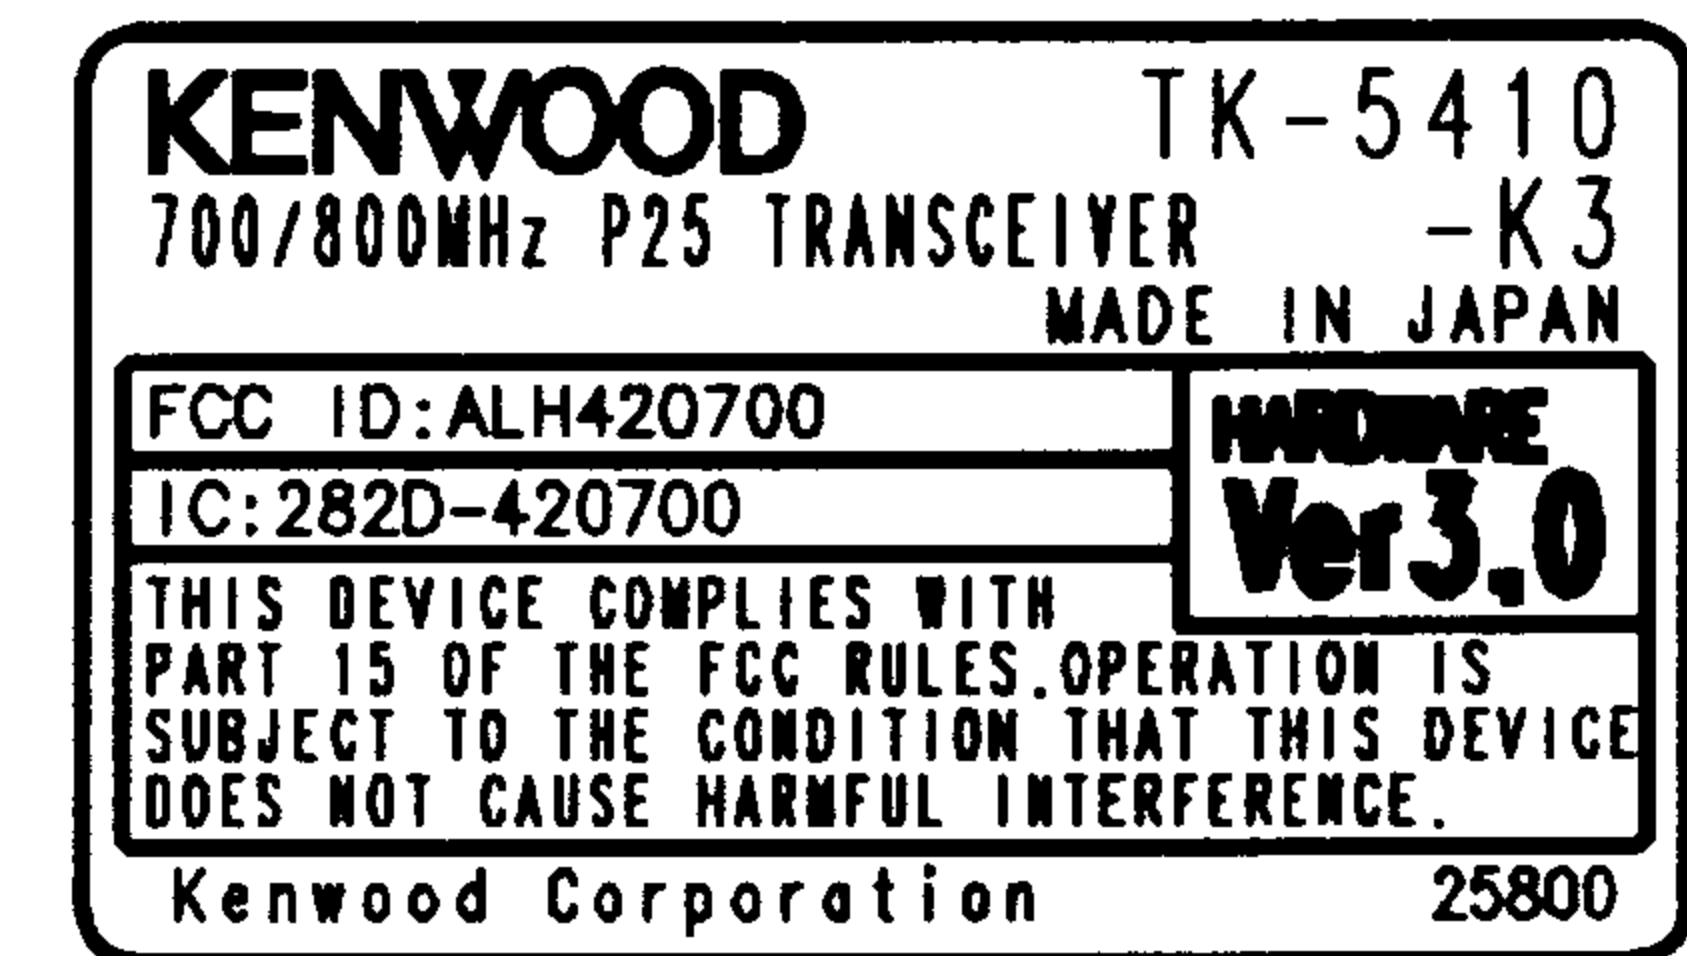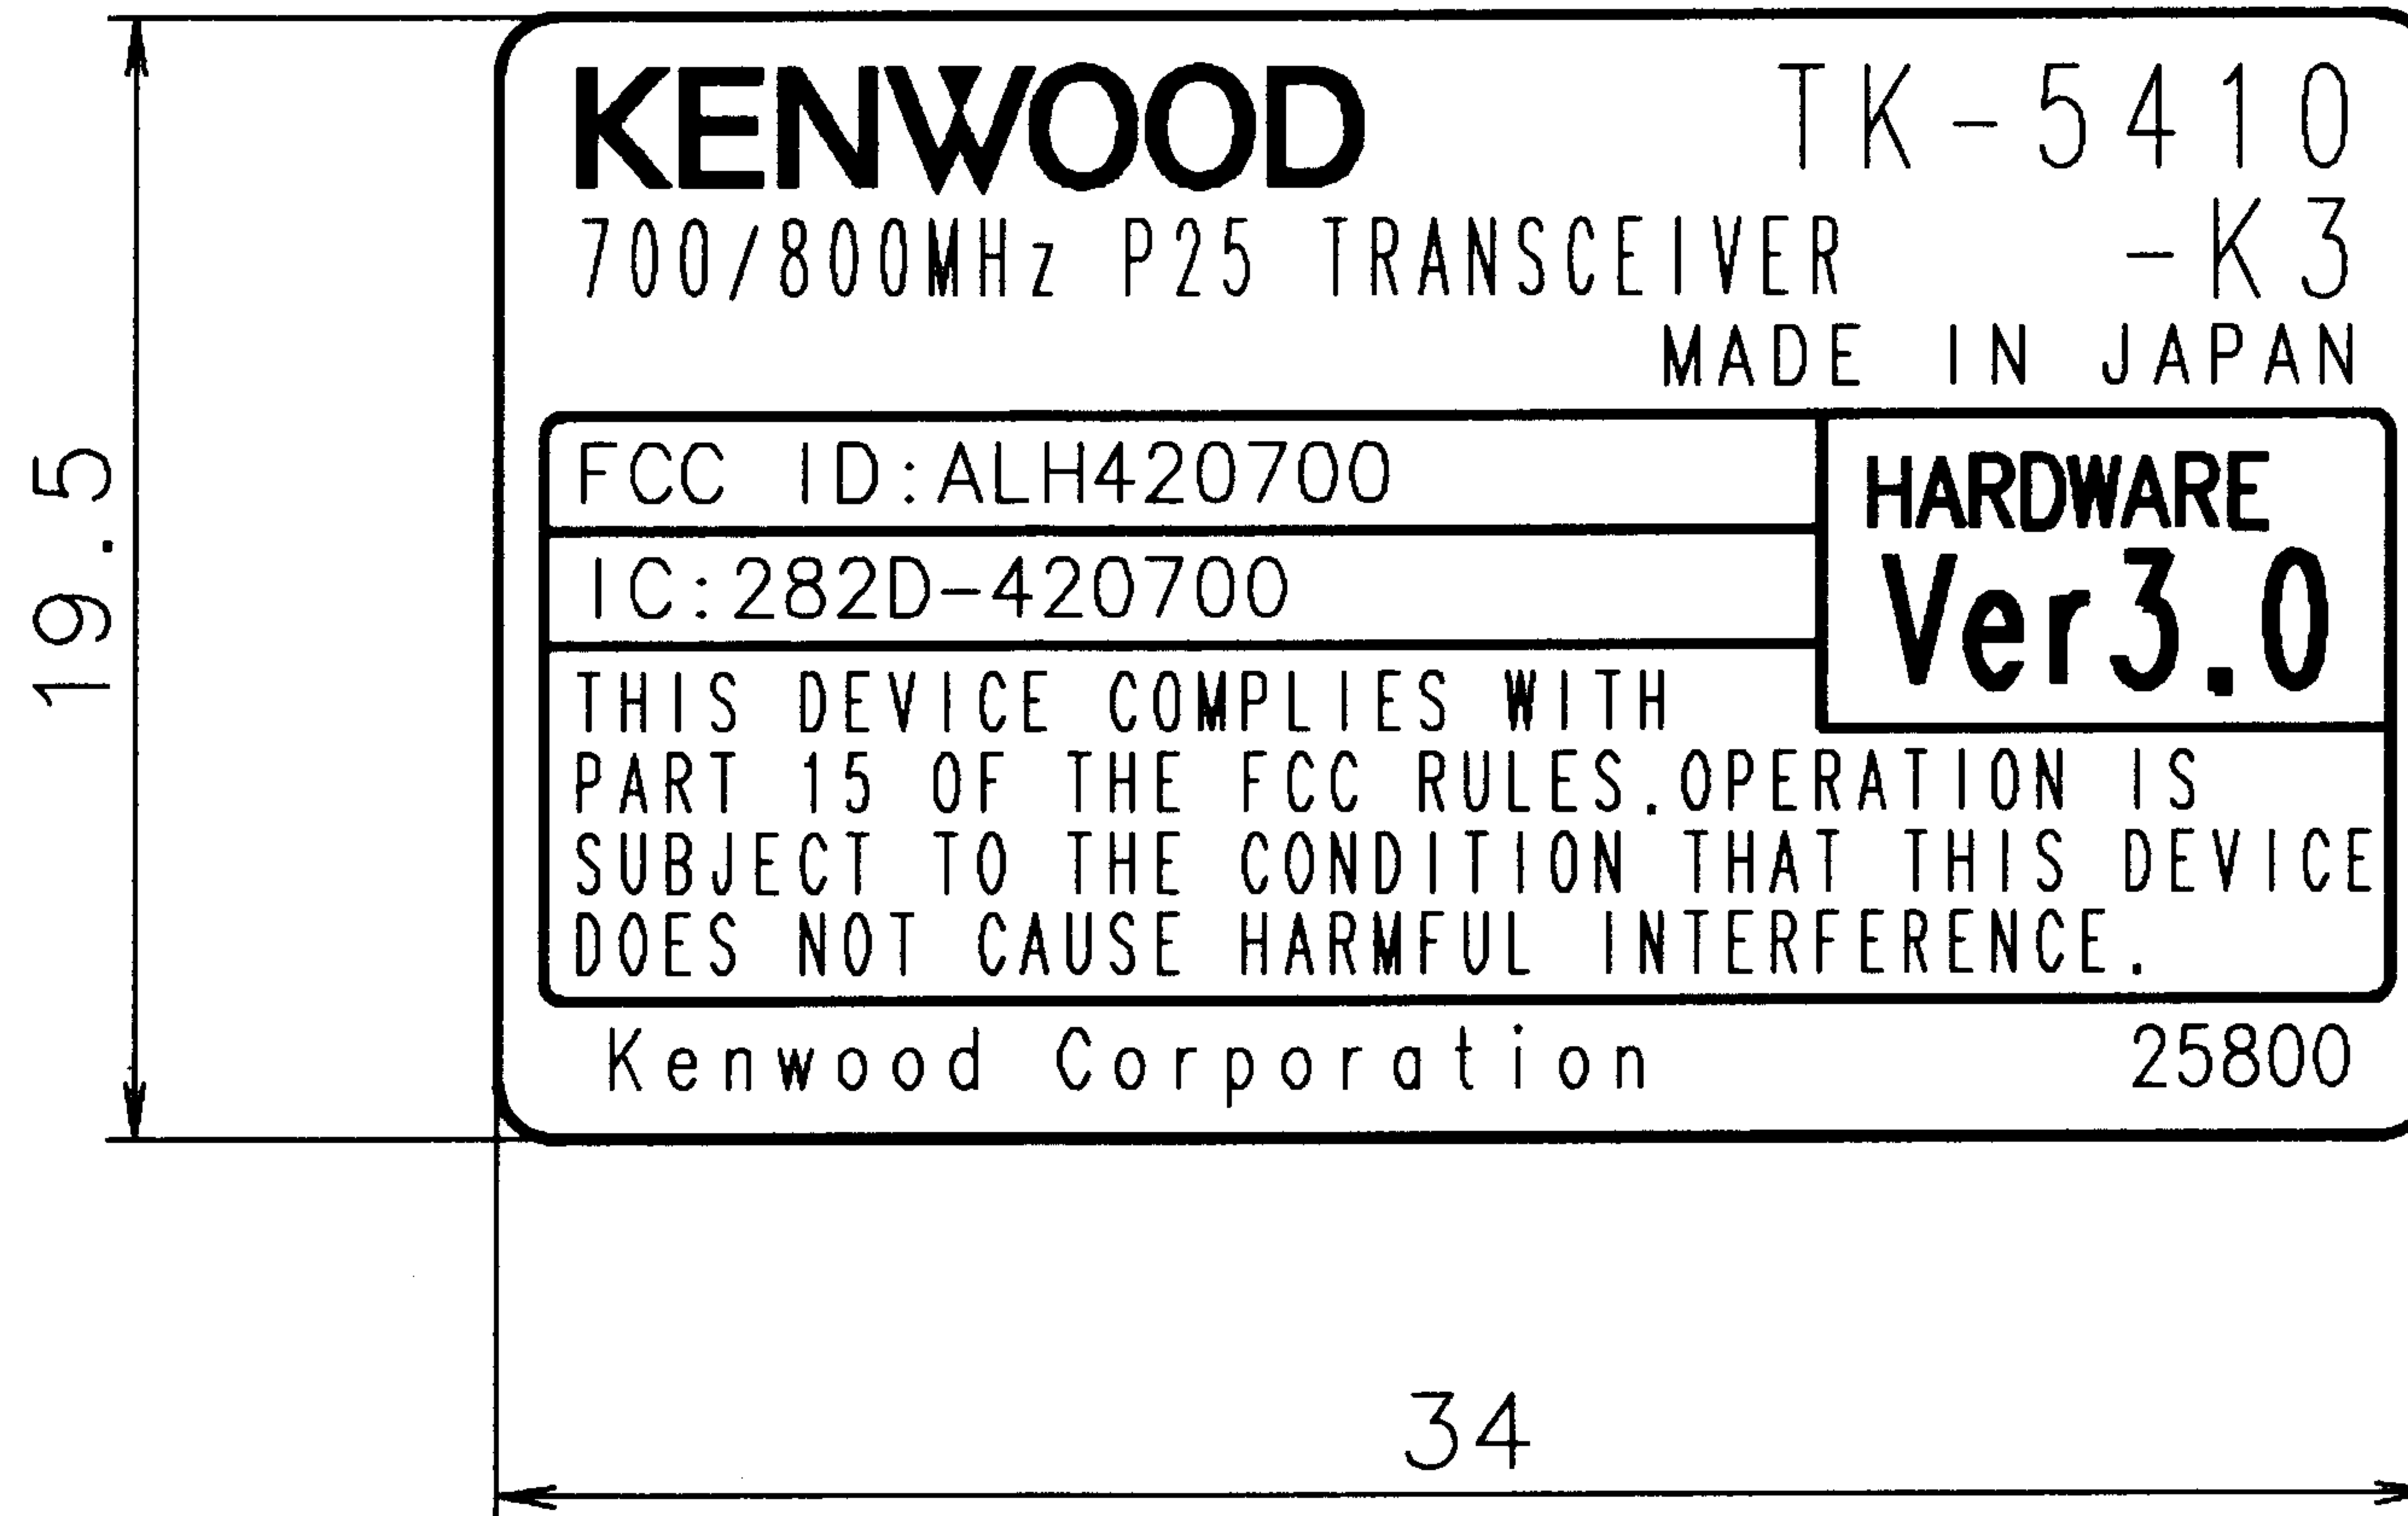


1:1

| -            | -           | -                                  | -        | AL EVAPORATION<br>PLATE t0.1<br>FROSTED SILVER | SEAL PRINTING,<br>STRONG TACKIFIER,<br>LAMINATE(FROSTING) | Y50-6370-10 | -    |
|--------------|-------------|------------------------------------|----------|--|---|-------------|------|
| NO.          | PART NUMBER | NOTE                               | MATERIAL | FINISH   | MODEL   | QTY.        |      |
| SCALE NT:S   |             | DESIGNED                           | CHECKED  | APPROVED                                       | PART NAME   |             | -    |
| UNIT : mm    |             |                                    |          |  | MODEL NAME PLATE  |             | -    |
|              |             | DATE                               | 200 - -  | DRAWING NUMBER                                 |   | MMV -       | -    |
| JIS Z8310-84 |             | <b>KENWOOD</b> Kenwood Corporation |          | PART NO.                                       |   | SHEET NO.   | REL. |
|              |             |                                    |          | B72-2580-04                                    |   | 1/1         | 00   |
|              |             |                                    |          |  |   |             | Y    |

DRWN. DATE 2009-08-26

|     |        |              |              |        |            |
|-----|--------|--------------|--------------|--------|------------|
| MMV | SYMBOL | REVISION NO. | CORD         | ISSUED | DATE       |
| -   | △ XALL | 42232        | NEW ADDITION |        | 2001-03-14 |

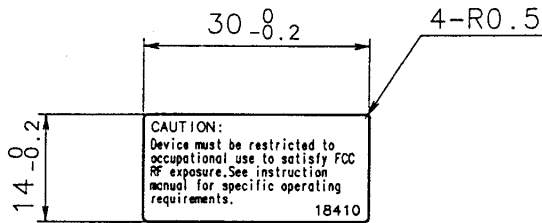

CAUTION:  
Device must be restricted to occupational use to satisfy FCC RF exposure. See instruction manual for specific operating requirements.  
18410

(2:1)

NOTES:

MUST BE PRINTED WITH FILM.

|              |                |                     |             |  |  |             |      |
|--------------|----------------|---------------------|-------------|--|--|-------------|------|
| -            | -              | -                   | -           | AL EVAPORATION SHEET 10.1 FROSTED SILVER | SEAL PRINTING, STRONG TACKFIER, LAMINATE(FROSTING) | Y50-5130-12 | -    |
| NO.          | PART NUMBER    | NOTE                | MATERIAL    | FINISH                                   | MODEL  | QTY.        |      |
| SCALE        | 1:1            | DESIGNED            | CHECKED     | APPROVED                                 | PART NAME  |             | -    |
| UNIT         | mm             |                     |             |  | CAUTION LABEL                                      |             | -    |
|              | DATE           | 2001-03-14          |             | DRAWING NUMBER                           | MMV-   | SHEET NO.   | REL. |
| JIS Z8310-84 | <b>KENWOOD</b> | KENWOOD CORPORATION | B41-1841-04 | 1/1                                      | 00   |             |      |

TK-5410-K2,TK-5410-K3  
FCC ID: ALH420700  
IC: 282D-420700



TK-5210-K2



TK-5410-K3