




	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

SAR TEST REPORT (FCC/IC)

RF EXPOSURE EVALUATION	SPECIFIC ABSORPTION RATE
APPLICANT / MANUFACTURER	KENWOOD USA CORPORATION
DEVICE UNDER TEST (DUT)	5W PORTABLE FM VHF PUSH-TO-TALK RADIO TRANSCEIVER
DEVICE MODEL(S)	NX-210-K2
DEVICE FREQUENCY RANGE(S)	FCC 150 - 174 MHz
	IC 138 - 144 MHz 148 - 174 MHz
DEVICE IDENTIFIER(S)	FCC ID: ALH423500 IC: 282D-423500
APPLICATION TYPE	Certification
STANDARD(S) APPLIED	FCC 47 CFR §2.1093
	Health Canada Safety Code 6
PROCEDURE(S) APPLIED	FCC OET Bulletin 65, Supplement C (01-01)
	FCC Mobile & Portable RF Exp. Proc. (KDB 447498 D01 v03r03)
	Industry Canada RSS-102 Issue 2
	IEEE 1528-2003
	IEC 62209-1:2005
FCC DEVICE CLASSIFICATION	Licensed Non-Broadcast Transmitter Held to Face (TNF)
IC DEVICE CLASSIFICATION	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)
RF EXPOSURE CATEGORY	Occupational / Controlled
RF EXPOSURE EVALUATION(S)	Face-held & Body-worn
DATE(S) OF EVALUATION	January 28, 2009
TEST REPORT SERIAL NO.	012809ALH-T951-S90V
TEST REPORT REVISION NO.	Revision 1.0 Initial Release February 24, 2009
TEST REPORT SIGNATORIES	Testing Performed By Test Report Prepared By
	Sean Johnston Jonathan Hughes Celltech Labs Inc. Celltech Labs Inc.
TEST LAB AND LOCATION	Celltech Compliance Testing and Engineering Lab
	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada
TEST LAB CONTACT INFO.	Tel.: 250-765-7650 Fax: 250-765-7645
	info@celltechlabs.com www.celltechlabs.com
TEST LAB ACCREDITATION(S)	  Test Lab Certificate No. 2470.01

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 1 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION


Test Lab Information	Name	CELLTECH LABS INC.			
	Address	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada			
Applicant Information	Name	KENWOOD USA CORPORATION			
	Address	3970 Johns Creek Court, Suite 100, Suwanee, GA 30024 United States			
Standard(s) Applied	FCC	47 CFR §2.1093	IC	Health Canada Safety Code 6	
Procedure(s) Applied	FCC	OET Bulletin 65, Supplement C (Edition 01-01)			
	FCC	Mobile & Portable RF Exposure Procedures (KDB 447498 D01 v03r03)			
	IC	RSS-102 Issue 2	IEEE	1528-2003	IEC 62209-1:2005
Application Type(s)	FCC/IC	New Certification			
Device Classification(s)	FCC	Licensed Non-Broadcast Transmitter Held to Face (TNF)			
	IC	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)			
Device RF Exposure Category	Portable	Occupational / Controlled Environment			
Device Identifier(s)	FCC ID:	ALH423500			
	IC:	282D-423500			
Device Model(s)	NX-210-K2				
Test Sample Serial No.	KAIRO-19 (Identical Prototype)				
Device Description	Portable FM VHF Push-To-Talk (PTT) Radio Transceiver				
Transmit Frequency Range(s)	FCC	150 - 174 MHz	IC	138 - 144 MHz	148 - 174 MHz
Max. RF Output Power Tested	5.01 Watts	37.0 dBm	Conducted	162 MHz	Mid Channel
Antenna Type(s) Tested	Detachable	Whip	P/N: KRA-26M	Length: 167 mm	
	Detachable	Stubby	P/N: KRA-22M	Length: 110 mm	
Battery Type(s) Tested	Ni-Cd	7.2 V	1700 mAh	P/N: KNB-31A	
	Ni-MH	7.2 V	2500 mAh	P/N: KNB-32N	
	Lithium-ion	7.4 V	1700 mAh	P/N: KNB-33L	
Body-worn Accessories Tested	Metal Belt-Clip (1)	Contains Metal Components			P/N: KBH-10
	Plastic Belt-Clip (2)	Contains Metal Components			P/N: KBH-11
Audio Accessories Tested	Speaker-Microphone (P/N: KMC-25)				
Additional Audio Accessories	Speaker-Mic P/N: KMC-41	Speaker-Mic P/N: KMC-42W	Speaker-Mic P/N: KMC-38GPS		
	Note: additional audio accessories not tested based on minor differences with audio accessory tested				
Max. SAR Level(s) Evaluated	Face-held	0.831 W/kg	1g	50% duty cycle	Occupational / Controlled Exposure
	Body-worn	2.50 W/kg	1g	50% duty cycle	Occupational / Controlled Exposure
FCC/IC Spatial Peak SAR Limit	Head/Body	8.0 W/kg	1g	50% duty cycle	Occupational / Controlled Exposure

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the Occupational / Controlled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 2, IEEE Standard 1528-2003 and IEC International Standard 62209-1:2005. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results and statements contained in this report pertain only to the device(s) evaluated.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.

Test Report Approved By  Sean Johnston Celltech Labs Inc.



Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 2 of 47






	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

TABLE OF CONTENTS	
1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 MEASUREMENT SUMMARY	5
4.0 DETAILS OF SAR EVALUATION	6
5.0 EVALUATION PROCEDURES	6
6.0 SYSTEM PERFORMANCE CHECK	7
7.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	8
8.0 SIMULATED EQUIVALENT TISSUES	8
9.0 SAR LIMITS	8
10.0 ROBOT SYSTEM SPECIFICATIONS	9
11.0 PROBE SPECIFICATION (ET3DV6)	10
12.0 SIDE PLANAR PHANTOM	10
13.0 VALIDATION PLANAR PHANTOM	10
14.0 DEVICE HOLDER	10
15.0 TEST EQUIPMENT LIST	11
16.0 MEASUREMENT UNCERTAINTIES	12
17.0 REFERENCES	13
APPENDIX A - SAR MEASUREMENT DATA	14
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	26
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	29
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	33
APPENDIX E - DIPOLE CALIBRATION (FCC KDB 250418) & PROBE CALIBRATION	47

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 3 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

1.0 INTRODUCTION

This measurement report demonstrates that the Kenwood USA Corporation Model: NX-210-K2 Portable FM VHF PTT Radio Transceiver complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]), IC RSS-102 Issue 2 (see reference [4]), IEEE Standard 1528-2003 (see reference [5]) and IEC International Standard 62209-1:2005 (see reference [6]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses a controller with a built in VME-bus computer.



DASY4 SAR System with Plexiglas validation phantom



DASY4 SAR System with Plexiglas side planar phantom

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD	
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)					
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 4 of 47	



<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)
<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)



3.0 MEASUREMENT SUMMARY

SAR EVALUATION RESULTS



Test Type	Freq. MHz	Ch.	Battery Type	Antenna Type	Accessory Type(s)		Device Distance to Planar Phantom		Cond. Power Before Test Watts	Measured SAR 1g (W/kg)		SAR Drift During Test dB	Scaled SAR with droop 1g (W/kg)	
					Body-worn	Audio	DUT	Antenna		Duty Cycle			Duty Cycle	
										100%	50%		100%	50%
Face	162	Mid	Li-ion	Whip	n/a	n/a	2.5 cm	4.3 cm	5.01	1.44	0.720	-0.621	1.66	0.831
Face	162	Mid	Li-ion	Stubby	n/a	n/a	2.5 cm	4.3 cm	5.01	0.811	0.406	-0.645	0.941	0.470
Body	162	Mid	NiMH	Whip	Belt-Clip 1	Spkr-Mic	1.0 cm	3.0 cm	5.01	2.34	1.17	-0.506	2.63	1.31
Body	162	Mid	NiCd	Whip	Belt-Clip 1	Spkr-Mic	1.0 cm	3.0 cm	5.01	3.10	1.55	-0.649	3.60	1.80
Body	162	Mid	Li-ion	Whip	Belt-Clip 1	Spkr-Mic	2.0 cm	3.2 cm	5.01	4.77	2.39	-0.211	5.01	2.50
Body	162	Mid	NiMH	Stubby	Belt-Clip 1	Spkr-Mic	1.0 cm	3.0 cm	5.01	0.902	0.451	-0.487	1.01	0.505
Body	162	Mid	NiCd	Stubby	Belt-Clip 1	Spkr-Mic	1.0 cm	3.0 cm	5.01	1.32	0.660	-0.663	1.54	0.769
Body	162	Mid	Li-ion	Stubby	Belt-Clip 1	Spkr-Mic	2.0 cm	3.2 cm	5.01	1.44	0.720	-0.287	1.54	0.769
Body	162	Mid	Li-ion	Whip	Belt-Clip 2	Spkr-Mic	2.0 cm	3.2 cm	5.01	4.28	2.14	-0.446	4.74	2.37

SAR LIMIT(S)	HEAD & BODY	SPATIAL PEAK	RF EXPOSURE CATEGORY
FCC 47 CFR 2.1093	Health Canada Safety Code 6	8.0 W/kg	Occupational / Controlled
		averaged over 1 gram	

Test Date	Jan 28, 2009			Jan 28, 2009			Measured Fluid Type	Head	Body	Unit	
Fluid Type	160 MHz Head			160 MHz Body			Atmospheric Pressure	101.1	101.1	kPa	
Dielectric Constant ϵ_r	Interp. Target*	Meas.	Dev.	Interp. Target*	Meas.	Dev.	Relative Humidity	35	35	%	
	51.8	± 5%	53.0	+2.3%	61.7	± 5%	61.9	+0.3%	Ambient Temperature	22.5	22.0
Fluid Type	160 MHz Head			160 MHz Body			Fluid Temperature	21.6	21.5	°C	
Conductivity σ (mho/m)	Interp. Target*	Meas.	Dev.	Interp. Target*	Meas.	Dev.	Fluid Depth	≥ 15	≥ 15	cm	
	0.77	± 5%	0.81	+5.0%	0.81	± 5%	0.81	0.0%	ρ (Kg/m³)	1000	

- Notes**
- * The target dielectric parameters listed in FCC OET Bulletin 65, Supplement C are specified within the frequency range of 150 MHz and 5800 MHz at specific frequencies. In the dielectric property measurement software program supplied by Aprel Laboratories the dielectric properties specified were derived by interpolation method using linear model (see Appendix C).
 - 1. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
 - 2. If the scaled SAR levels evaluated at the mid channel (50% duty cycle) were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).
 - 3. The SAR droop of the DUT measured by the DASY4 system for the duration of the SAR evaluations was added to the measured SAR level and the scaled SAR results are shown in the above test data table.
 - 4. The face-held SAR evaluations were performed utilizing the worst-case battery configuration measured during the body-worn evaluations.
 - 5. Belt-Clip 1 = KBH-10; Belt-Clip 2 = KBH-11

6.	SAR Evaluation Power Thresholds for PTT Devices, $f < 0.5$ GHz (FCC KDB 447498 D01 v03r03 Section 5)b(i) - Mobile & Portable RF Exp. Proc.)						Measured RF Conducted Output Power					
	Exposure Conditions		P mW (General Population)			P mW (Occupational)			100% PTT Duty Cycle		50% PTT Duty Cycle	
	Held to face, $d \geq 2.5$ cm		250			1250			5 Watts		2.5 Watts	
	Body-worn, $d \geq 1.5$ cm		200			1000			5 Watts		2.5 Watts	
	Body-worn, $d \geq 1.0$ cm		150			750			5 Watts		2.5 Watts	
1. The time-averaged output power, corresponding to the required PTT duty factor, is compared with these thresholds. 2. The closest distance between the user and the device or its antenna is used to determine the power thresholds.												

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

4.0 DETAILS OF SAR EVALUATION



The Kenwood USA Corporation Model: NX-210-K2 Portable FM VHF PTT Radio Transceiver described in this report was compliant for localized Specific Absorption Rate (Occupational / Controlled Exposure) based on the test provisions and conditions described below. Detailed photographs of the test setup are shown in Appendix D.

- The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front side of the DUT and the outer surface of the planar phantom.
- The DUT was evaluated in a body-worn configuration with the back of the radio facing the outer surface of the planar phantom and the attached belt-clip accessory placed parallel to and touching the planar phantom. With the Ni-MH and Ni-Cd batteries connected to the DUT the belt-clip provided a 1.0 cm spacing from the back of the DUT to the planar phantom. With the Li-ion battery connected to the DUT the belt-clip provided a 2.0 cm spacing from the back of the DUT to the planar phantom. The DUT was evaluated for body-worn SAR in each battery and antenna configuration with the metal belt-clip (P/N: KBH-10) accessory and the worst-case SAR level configuration was re-evaluated with the plastic belt-clip (P/N: KBH-11) accessory. The DUT was evaluated for body-worn SAR with the customer-supplied speaker-microphone accessory connected to the audio port.
- The DUT was tested at maximum power in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
- The conducted output power levels referenced in this report were measured prior to the SAR evaluations at the antenna connector of the DUT using a Gigatronics 8652A Universal Power Meter in accordance with FCC 47 CFR §2.1046 and IC RSS-Gen.
- The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
- A SAR-versus-Time power droop evaluation was performed in the test configuration that reported the maximum scaled SAR level. See Appendix A (SAR Test Plots) for SAR-versus-Time power droop evaluation plot.
- The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within $\pm 2^{\circ}\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.
- The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).

5.0 EVALUATION PROCEDURES

- The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
 - For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
- Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
- Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix E). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 6 of 47

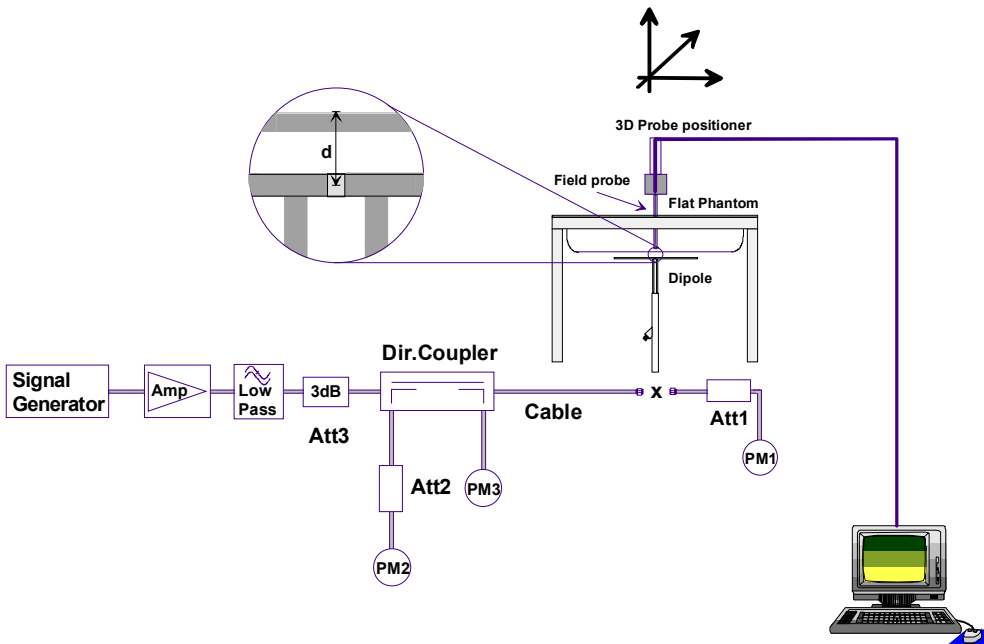
	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

6.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a daily system check was performed using a Plexiglas planar phantom and 300 MHz dipole (see Appendix B for system performance check test plot) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [5]) and IEC International Standard 62209-1:2005 (see reference [6]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the system validation target SAR value (see Appendix E for system validation target SAR value listed on page 10 of the dipole calibration report).

SYSTEM PERFORMANCE CHECK EVALUATION

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Sys. Val. Target	Meas.	Dev.	Sys. Val. Target	Meas.	Dev.	Sys. Val. Target	Meas.	Dev.						
Jan-28	Head 300	0.760 $\pm 10\%$	0.789	+3.8%	44.9 $\pm 5\%$	45.7	+1.8%	0.85 $\pm 5\%$	0.86	+1.2%	1000	22.0	21.2	≥ 15	35	101.1
Notes	1.	The target SAR value is referenced from the System Validation performed by Celltech Labs Inc. (see Appendix E).														
	2.	The target dielectric parameters are referenced from the System Validation performed by Celltech Labs Inc. (see Appendix E).														
	3.	The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.														
	4.	The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).														





System Performance Check Measurement Setup Diagram



300 MHz Validation Dipole Setup

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 7 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

7.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within ± 50 MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within ± 100 MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals, ± 25 MHz < 300 MHz and ± 50 MHz ≥ 300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [8]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	± 25 MHz < 300 MHz
150 MHz	162 MHz	12 MHz	< 25 MHz
The probe calibration and measurement frequency interval is < 25 MHz; therefore the additional steps are not required.			

8.0 SIMULATED EQUIVALENT TISSUES



The simulated tissue mixtures consisted of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide was added and visual inspection made to ensure air bubbles were not trapped during the mixing process. The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES							
INGREDIENT	Water	300 MHz Head Tissue Mixture	37.56 %	150 MHz Head Tissue Mixture	38.35 %	150 MHz Body Tissue Mixture	46.6 %
	Sugar		55.32 %		55.5%		49.7 %
	Salt		5.95 %		5.15%		2.6 %
	HEC		0.98 %		0.9%		1.0 %
	Bactericide		0.19 %		0.1%		0.1 %

9.0 SAR LIMITS

SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	(General Population / Uncontrolled Exposure)	(Occupational / Controlled Exposure)
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			



Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 8 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


10.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Evaluation Phantom</u>	
Type	Side Planar Phantom
Shell Material	Plexiglas
Bottom Thickness	2.0 mm ± 0.1 mm
Inner Dimensions	72.6 cm (L) x 20.3 cm (W) x 20.3 cm (H)
<u>Validation Phantom (≤ 450MHz)</u>	
Type	Planar Phantom
Shell Material	Plexiglas
Bottom Thickness	6 mm ± 0.1 mm
Inner Dimensions	83.5 cm (L) x 36.9 cm (W) x 21.8 cm (H)

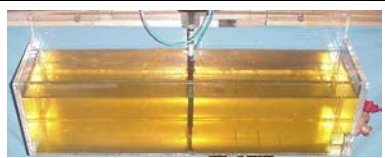
Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 9 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


11.0 PROBE SPECIFICATION (ET3DV6)

<p>Construction: Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)</p> <p>Calibration: In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)</p> <p>Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)</p> <p>Directivity: ± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis)</p> <p>Dynamic Range: 5 μW/g to > 100 mW/g; Linearity: ± 0.2 dB</p> <p>Surface Detect: ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces</p> <p>Dimensions: Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm</p> <p>Application: General dosimetry up to 3 GHz; Compliance tests of mobile phone</p>	
ET3DV6 E-Field Probe	


12.0 SIDE PLANAR PHANTOM

<p>The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.</p>	
Plexiglas Side Planar Phantom	



13.0 VALIDATION PLANAR PHANTOM

<p>The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted to the table of the DASY4 compact system.</p>	
Plexiglas Validation Planar Phantom	

14.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	
Device Holder	



Applicant: Kenwood USA Corp.	Model: NX-210-K2	FCC ID: ALH423500	IC: 282D-423500	KENWOOD
DUT Type: Portable VHF PTT Radio Transceiver	Freq.: 150-174 MHz (FCC)	138-144/148-174 MHz (IC)		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 10 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

15.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE DATE
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	22Apr08	22Apr09
x	-ET3DV6 E-Field Probe	00017	1590	21Jul08	21Jul09
x	-Celltech 300 MHz Validation Dipole	00023	135	26Jan09	26Jan10
x	-Plexiglas Side Planar Phantom	00156	161	CNR	CNR
x	-Plexiglas Validation Planar Phantom	00157	137	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	US39240170	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	23Apr08	23Apr09
x	Gigatronics 80701A Power Sensor	00014	1833699	23Apr08	23Apr09
x	HP 8753ET Network Analyzer	00134	US39170292	28Apr08	28Apr09
x	HP 8648D Signal Generator	00005	3847A00611	CNR	CNR
x	Amplifier Research 10W1000C Power Amplifier	00041	27887	CNR	CNR
Abbr.	CNR = Calibration Not Required				

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 11 of 47



	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION									
Uncertainty Component	IEEE 1528 Section	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value ±% (1g)	Uncertainty Value ±% (10g)	V _i or V _{eff}
Measurement System									
Probe Calibration (150 MHz)	E.2.1	10	Normal	1	1	1	10.0	10	∞
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect	E.2.3	2.5	Rectangular	1.732050808	1	1	1.4	1.4	∞
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measured)	E.3.3	5	Normal	1	0.64	0.43	3.2	2.2	∞
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measured)	E.3.3	2.3	Normal	1	0.6	0.49	1.4	1.1	∞
Combined Standard Uncertainty			RSS				13.81	13.48	
Expanded Uncertainty (95% Confidence Interval)			k=2				27.62	26.96	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 and IEC International Standard 62209-1:2005



Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver		Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)			
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 12 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

17.0 REFERENCES



- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [7] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01 v03r03: January 2009.
- [8] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 13 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX A - SAR MEASUREMENT DATA

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 14 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Date Tested: 01/28/2009

Face-held SAR - Whip Antenna - Li-ion Battery - Mid Channel - 162 MHz

DUT: Kenwood NX-210-K2; Type: Portable FM VHF PTT Radio Transceiver; Serial: KAIRO-19

Ambient Temp: 23.0°C; Fluid Temp: 22.3°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: VHF (CW)

Frequency: 162 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used: $f = 160 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 21/07/2008
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom

Area Scan (8x22x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.62 mW/g

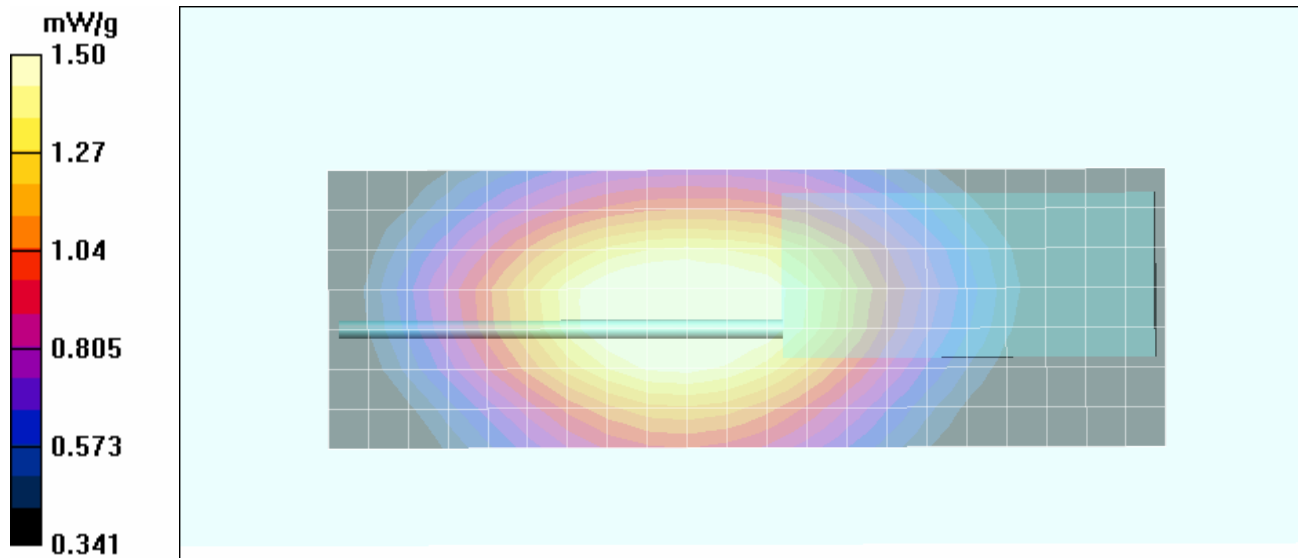
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 41.7 V/m; Power Drift = -0.621 dB

Peak SAR (extrapolated) = 2.10 W/kg

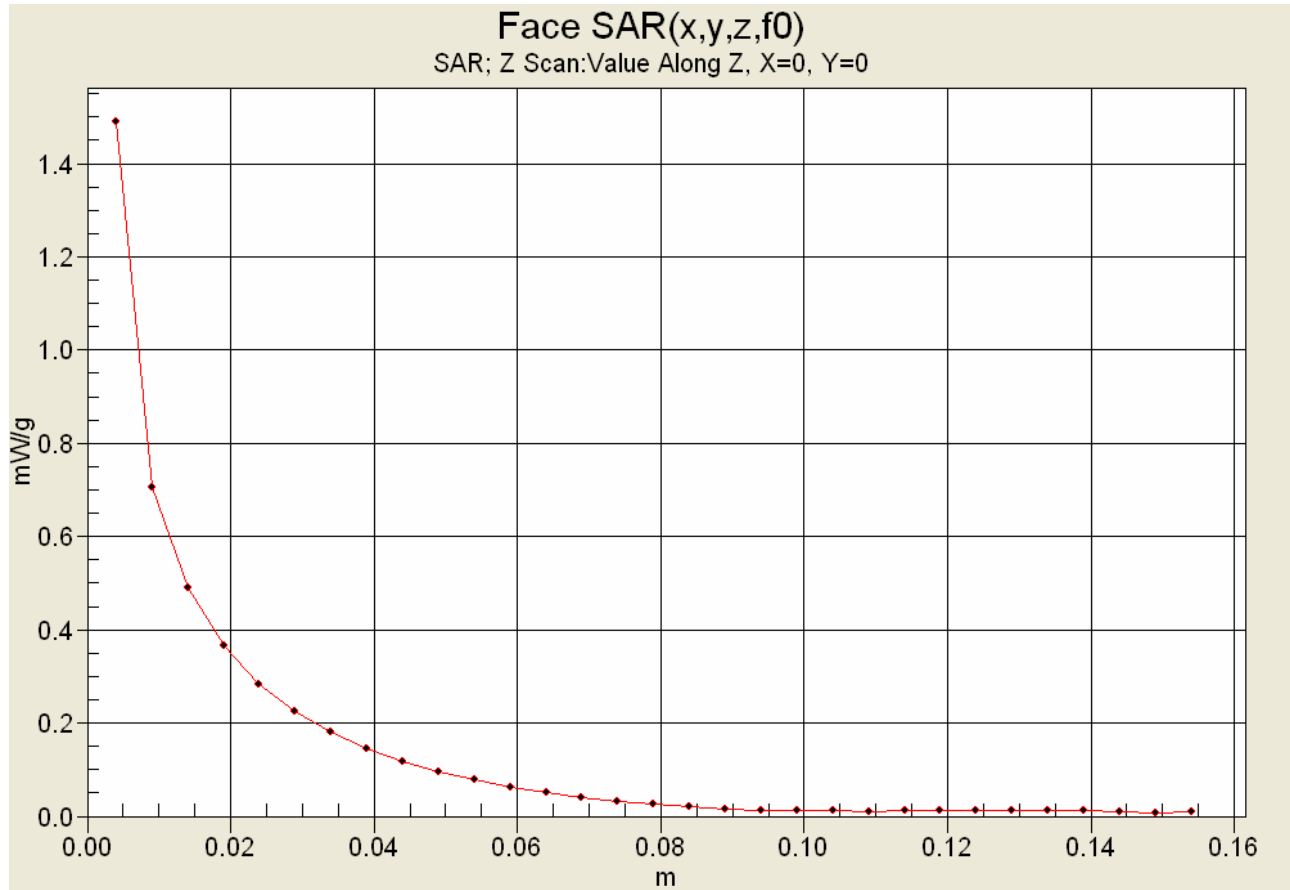
SAR(1 g) = 1.44 mW/g; SAR(10 g) = 1.1 mW/g



Maximum value of SAR (measured) = 1.50 mW/g



Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 15 of 47

Z-Axis Scan



	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 01/28/2009

Face-held SAR - Stubby Antenna - Li-ion Battery - Mid Channel - 162 MHz

DUT: Kenwood NX-210-K2; Type: Portable FM VHF PTT Radio Transceiver; Serial: KAIRO-19

Ambient Temp: 23.0°C; Fluid Temp: 22.3°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: VHF (CW)

Frequency: 162 MHz; Duty Cycle: 1:1

Medium: HSL150 Medium parameters used: $f = 160 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 53$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.9, 8.9, 8.9); Calibrated: 21/07/2008
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom

Area Scan (8x22x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.510 mW/g

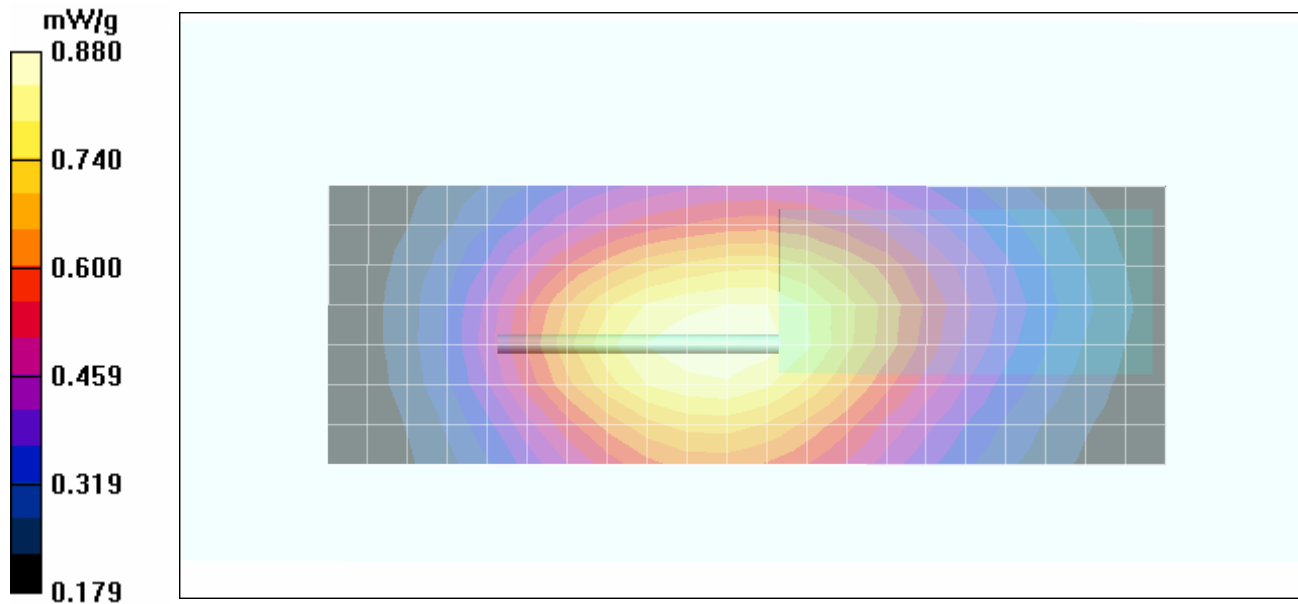
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 32.1 V/m; Power Drift = -0.645 dB



Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.811 mW/g; SAR(10 g) = 0.609 mW/g

Maximum value of SAR (measured) = 0.880 mW/g



Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 17 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 01/28/2009

Body-worn SAR - Whip Antenna - Ni-MH Battery - Mid Channel - 162 MHz

DUT: Kenwood NX-210-K2; Type: Portable FM VHF PTT Radio Transceiver; Serial: KAIRO-19

Body-worn Accessory: Belt-Clip (P/N: KBH-10); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 22.0°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: VHF (CW)

Frequency: 162 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used: $f = 162 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 61.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 – SN1590; ConvF(8.5, 8.5, 8.5); Calibrated: 21/07/2008
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR – 1.0 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

Area Scan (8x22x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.26 mW/g

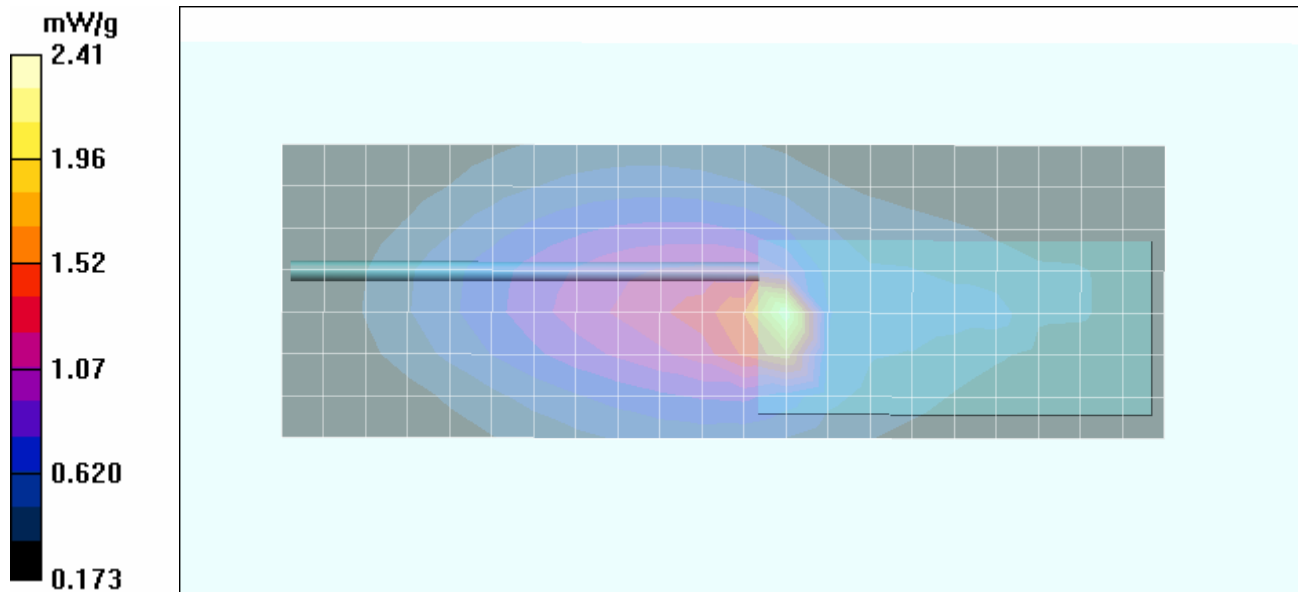
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.1 V/m; Power Drift = -0.506 dB



Peak SAR (extrapolated) = 8.08 W/kg

SAR(1 g) = 2.34 mW/g; SAR(10 g) = 1.23 mW/g

Maximum value of SAR (measured) = 2.41 mW/g



Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 18 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 01/28/2009

Body-worn SAR - Whip Antenna - Ni-Cd Battery - Mid Channel - 162 MHz

DUT: Kenwood NX-210-K2; Type: Portable FM VHF PTT Radio Transceiver; Serial: KAIRO-19

Body-worn Accessory: Belt-Clip (P/N: KBH-10); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 22.0°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: VHF (CW)

Frequency: 162 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used: $f = 162 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 61.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 – SN1590; ConvF(8.5, 8.5, 8.5); Calibrated: 21/07/2008
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR – 1.0 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

Area Scan (8x22x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 4.92 mW/g

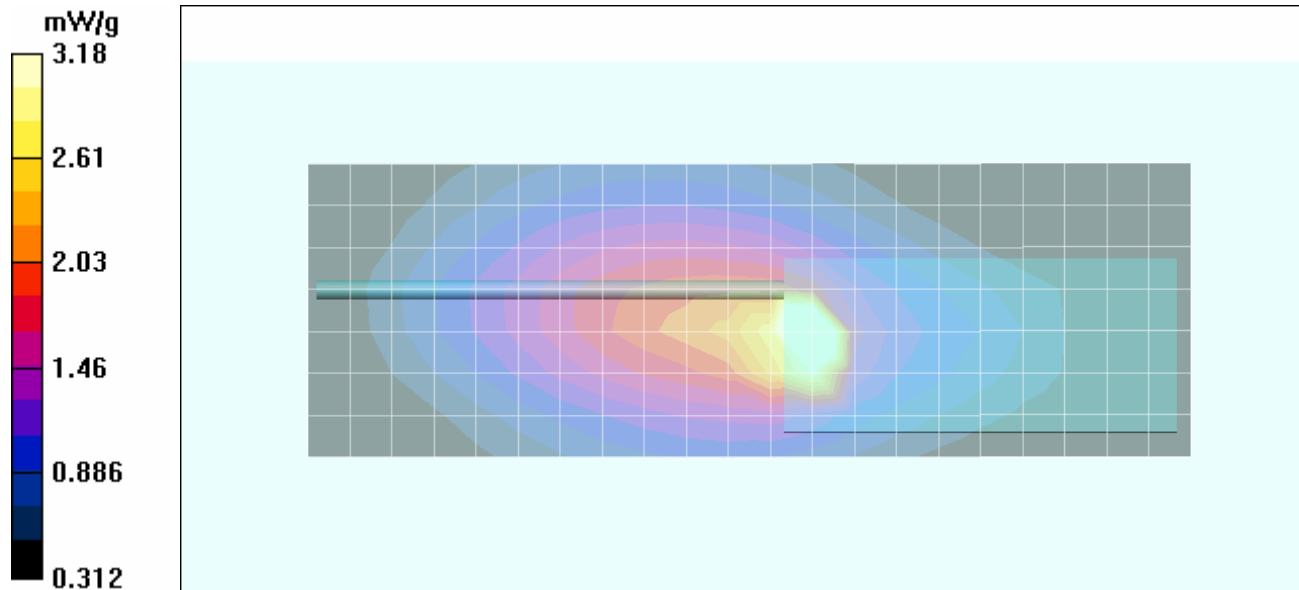
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 62.8 V/m; Power Drift = -0.649 dB



Peak SAR (extrapolated) = 8.10 W/kg

SAR(1 g) = 3.1 mW/g; SAR(10 g) = 1.75 mW/g

Maximum value of SAR (measured) = 3.18 mW/g



Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 19 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 01/28/2009

Body-worn SAR - Whip Antenna - Li-ion Battery - Mid Channel - 162 MHz

DUT: Kenwood NX-210-K2; Type: Portable FM VHF PTT Radio Transceiver; Serial: KAIRO-19

Body-worn Accessory: Belt-Clip (P/N: KBH-10); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 22.0°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: VHF (CW)

Frequency: 162 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used: $f = 162 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 61.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.5, 8.5, 8.5); Calibrated: 21/07/2008
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 2.0 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

Area Scan (8x22x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 4.61 mW/g

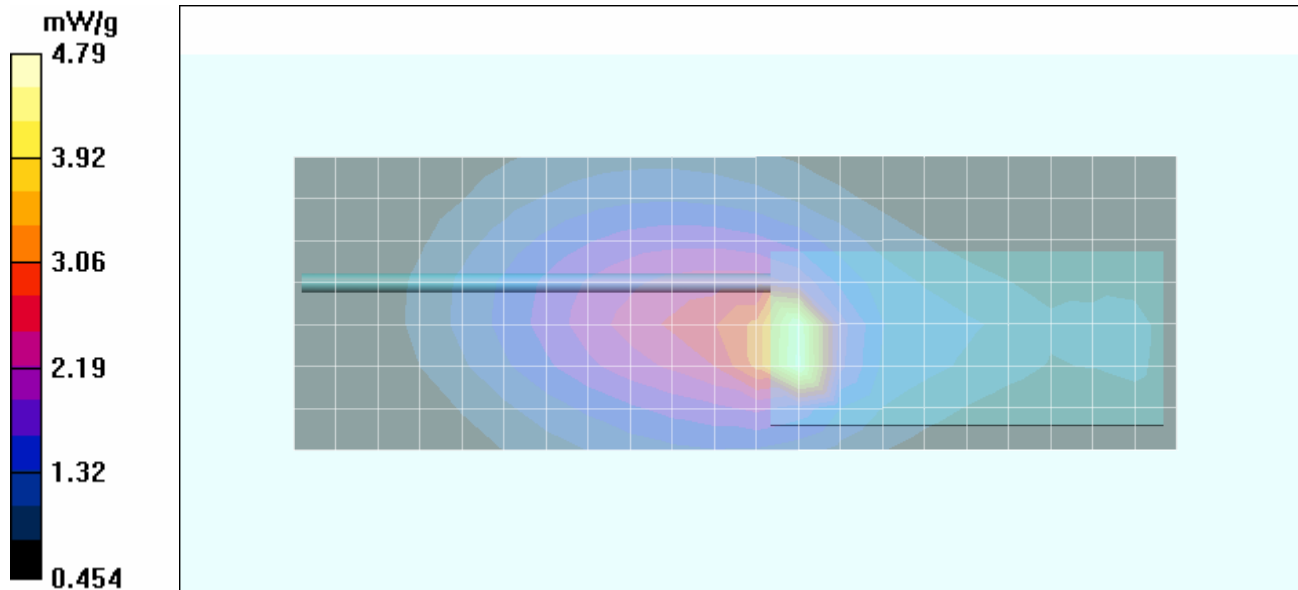
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 64.3 V/m; Power Drift = -0.211 dB

Peak SAR (extrapolated) = 15.1 W/kg

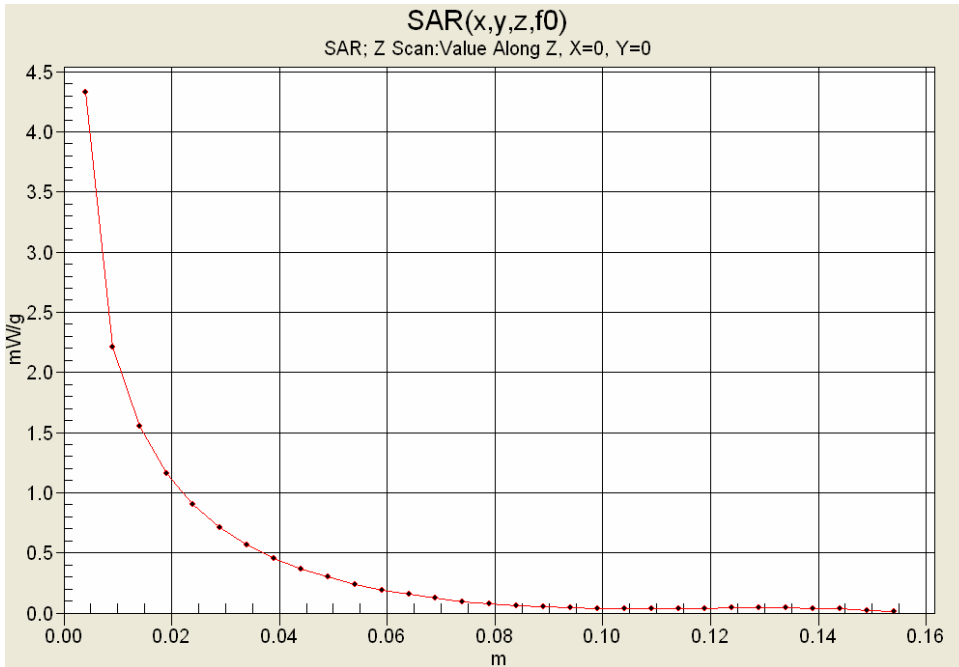
SAR(1 g) = 4.77 mW/g; SAR(10 g) = 2.54 mW/g

Maximum value of SAR (measured) = 4.79 mW/g

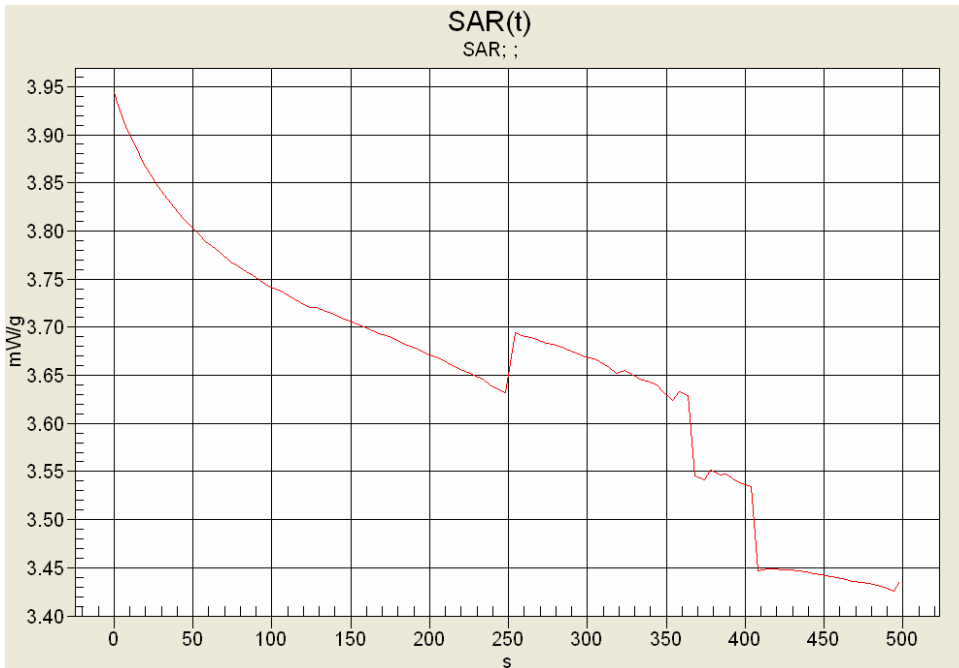


Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 20 of 47

Z-Axis Scan





SAR-versus-Time Power Droop Evaluation
Body-worn Configuration - Mid Channel 162 MHz
Lithium-ion Battery - Whip Antenna



SAR 0s: 3.943 mW/g
 SAR 500s: 3.434 mW/g (-0.600 dB)
 SAR 340s: 3.643 mW/g (-0.344 dB)
 (340s = Zoom Scan Duration)
 (500s = Area Scan Duration)

Applicant: Kenwood USA Corp.	Model: NX-210-K2	FCC ID: ALH423500	IC: 282D-423500	KENWOOD
DUT Type: Portable VHF PTT Radio Transceiver	Freq.: 150-174 MHz (FCC)	138-144/148-174 MHz (IC)		
2009 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 01/28/2009

Body-worn SAR - Stubby Antenna - Ni-MH Battery - Mid Channel - 162 MHz

DUT: Kenwood NX-210-K2; Type: Portable FM VHF PTT Radio Transceiver; Serial: KAIRO-19

Body-worn Accessory: Belt-Clip (P/N: KBH-10); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 22.0°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: VHF (CW)

Frequency: 162 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used: $f = 162 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 61.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.5, 8.5, 8.5); Calibrated: 21/07/2008
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.0 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

Area Scan (8x22x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.11 mW/g

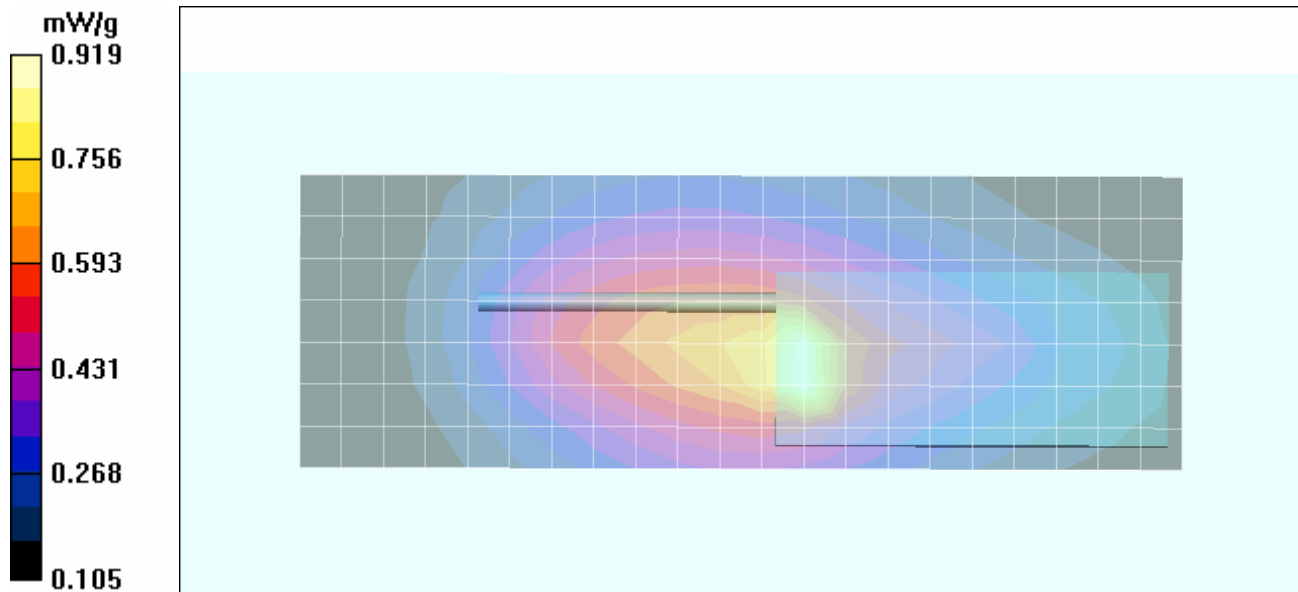
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 34.5 V/m; Power Drift = -0.487 dB



Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.545 mW/g

Maximum value of SAR (measured) = 0.919 mW/g



Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 22 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Date Tested: 01/28/2009

Body-worn SAR - Stubby Antenna - Ni-Cd Battery - Mid Channel - 162 MHz

DUT: Kenwood NX-210-K2; Type: Portable FM VHF PTT Radio Transceiver; Serial: KAIRO-19

Body-worn Accessory: Belt-Clip (P/N: KBH-10); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 22.0°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: VHF (CW)

Frequency: 162 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used: $f = 162 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 61.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.5, 8.5, 8.5); Calibrated: 21/07/2008
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 1.0 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

Area Scan (8x22x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.23 mW/g

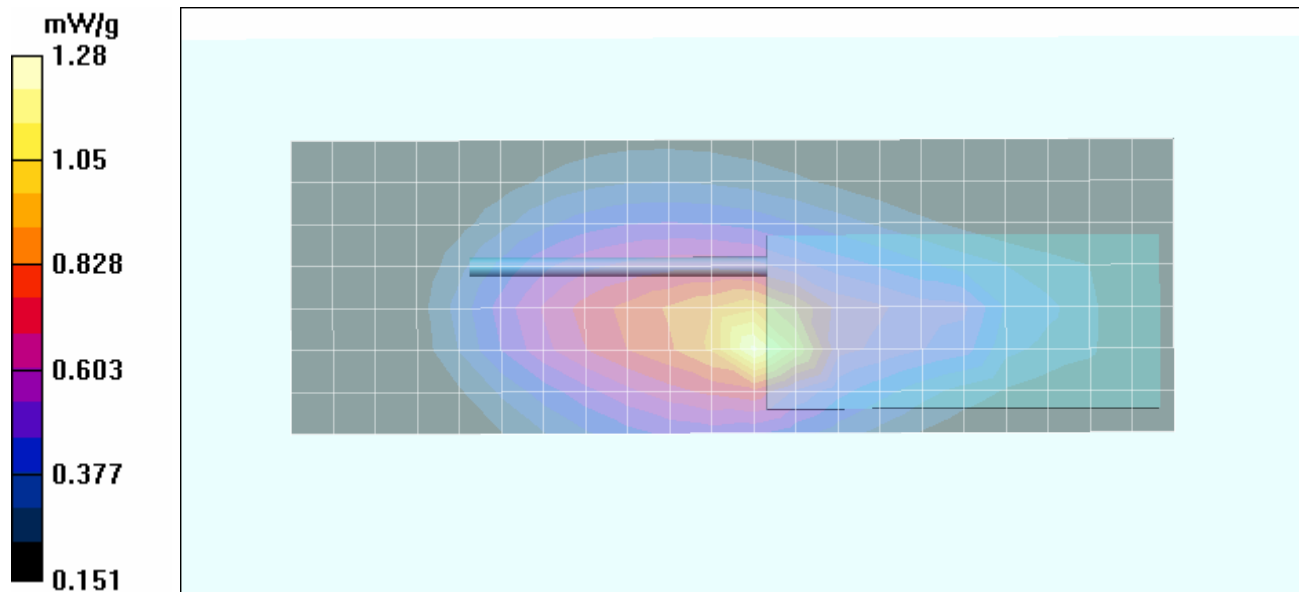
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 40.3 V/m; Power Drift = -0.663 dB



Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 1.32 mW/g; SAR(10 g) = 0.759 mW/g

Maximum value of SAR (measured) = 1.28 mW/g



Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 23 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 01/28/2009

Body-worn SAR - Stubby Antenna - Li-ion Battery - Mid Channel - 162 MHz

DUT: Kenwood NX-210-K2; Type: Portable FM VHF PTT Radio Transceiver; Serial: KAIRO-19

Body-worn Accessory: Belt-Clip (P/N: KBH-10); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 22.0°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: VHF (CW)

Frequency: 162 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used: $f = 162 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 61.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.5, 8.5, 8.5); Calibrated: 21/07/2008
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 2.0 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

Area Scan (8x22x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.85 mW/g

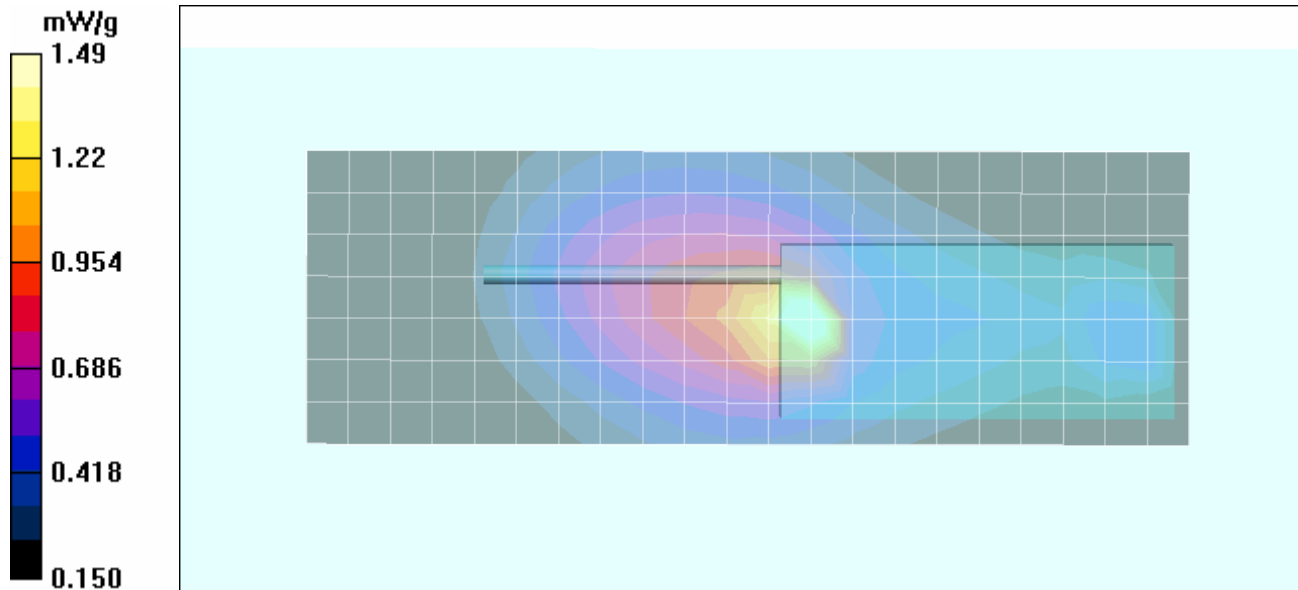
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 41.8 V/m; Power Drift = -0.287 dB



Peak SAR (extrapolated) = 4.11 W/kg

SAR(1 g) = 1.44 mW/g; SAR(10 g) = 0.816 mW/g

Maximum value of SAR (measured) = 1.49 mW/g



Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 24 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 01/28/2009

Body-worn SAR - Whip Antenna - Li-ion Battery - Mid Channel - 162 MHz

DUT: Kenwood NX-210-K2; Type: Portable FM VHF PTT Radio Transceiver; Serial: KAIRO-19

Body-worn Accessory: Belt-Clip (P/N: KBH-11); Audio Accessory: Speaker-Microphone (P/N: KMC-25)

Ambient Temp: 22.0°C; Fluid Temp: 21.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: VHF (CW)

Frequency: 162 MHz; Duty Cycle: 1:1

Medium: M150 Medium parameters used: $f = 162 \text{ MHz}$; $\sigma = 0.81 \text{ mho/m}$; $\epsilon_r = 61.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8.5, 8.5, 8.5); Calibrated: 21/07/2008
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 2.0 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

Area Scan (8x22x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.79 mW/g

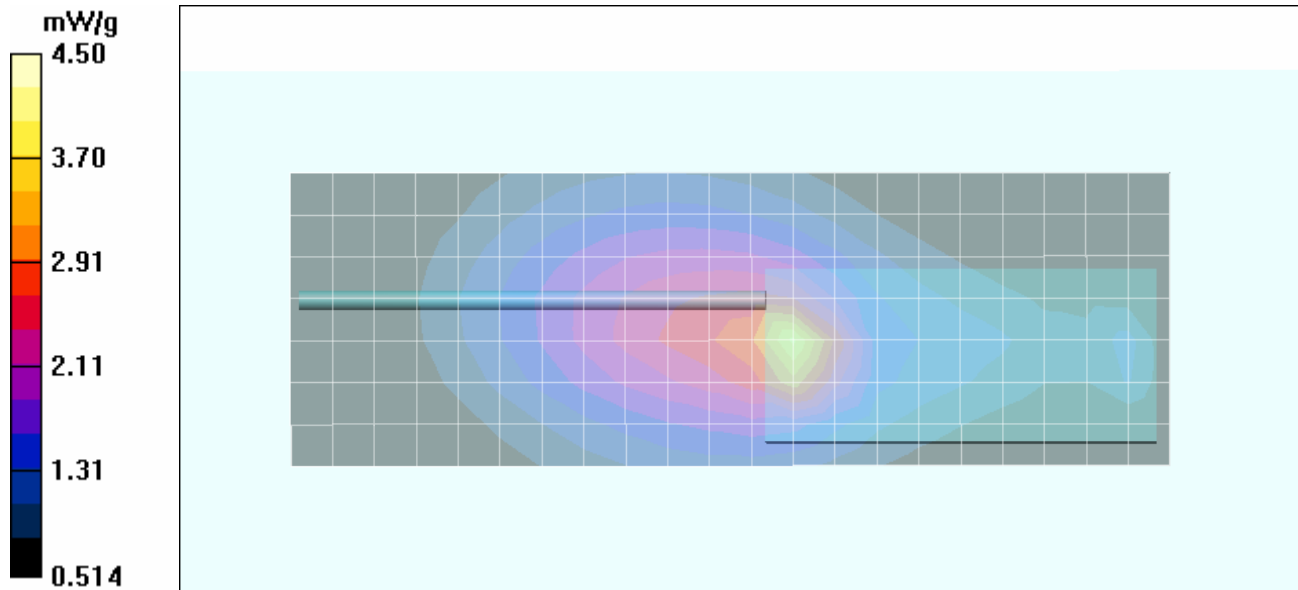
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 62.8 V/m; Power Drift = -0.446 dB



Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 4.28 mW/g; SAR(10 g) = 2.45 mW/g

Maximum value of SAR (measured) = 4.50 mW/g





Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 25 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 26 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 01/28/2009

System Performance Check - 300 MHz Dipole - HSL

DUT: Dipole 300 MHz; Asset: 00023; Serial: 135; Calibrated: 01/26/2009

Ambient Temp: 22.0°C; Fluid Temp: 21.2°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 300 MHz; Duty Cycle: 1:1

Medium: 300 HSL Medium parameters used: $f = 300 \text{ MHz}$; $\sigma = 0.86 \text{ mho/m}$; $\epsilon_r = 45.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(8, 8, 8); Calibrated: 21/07/2008
- Sensor-Surface: 5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Validation Planar; Type: Plexiglas; Serial: TE#137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 300 MHz Dipole

Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.771 mW/g

System Performance Check - 300 MHz Dipole

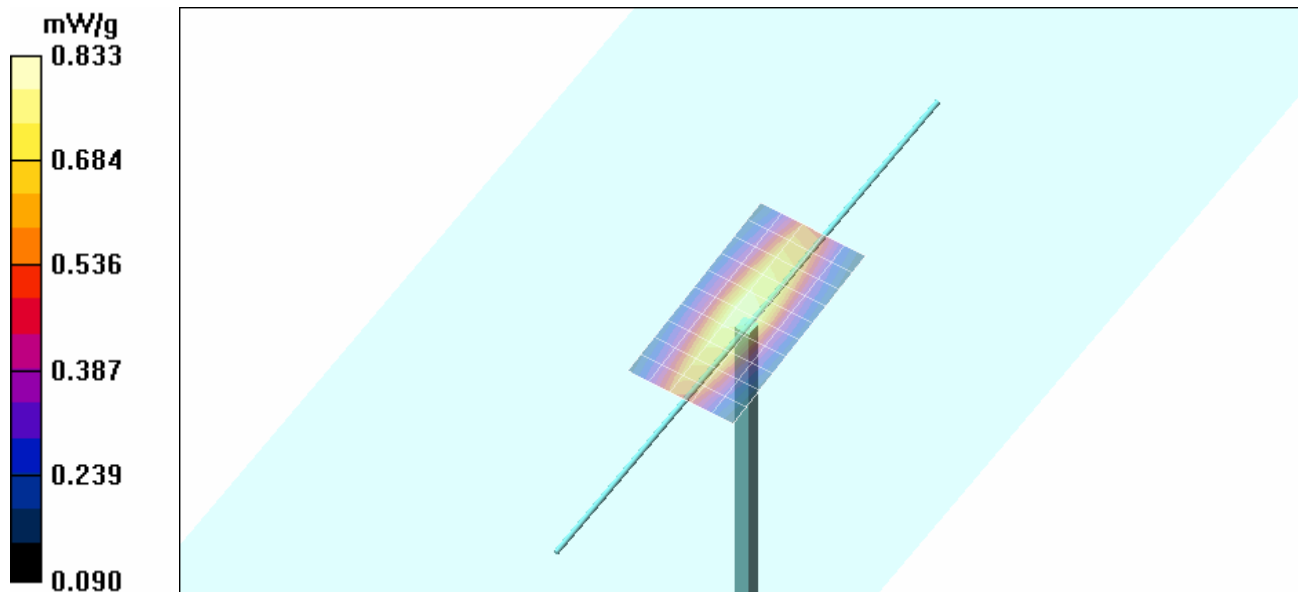
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.4 V/m; Power Drift = -0.090 dB



Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.789 mW/g; SAR(10 g) = 0.517 mW/g

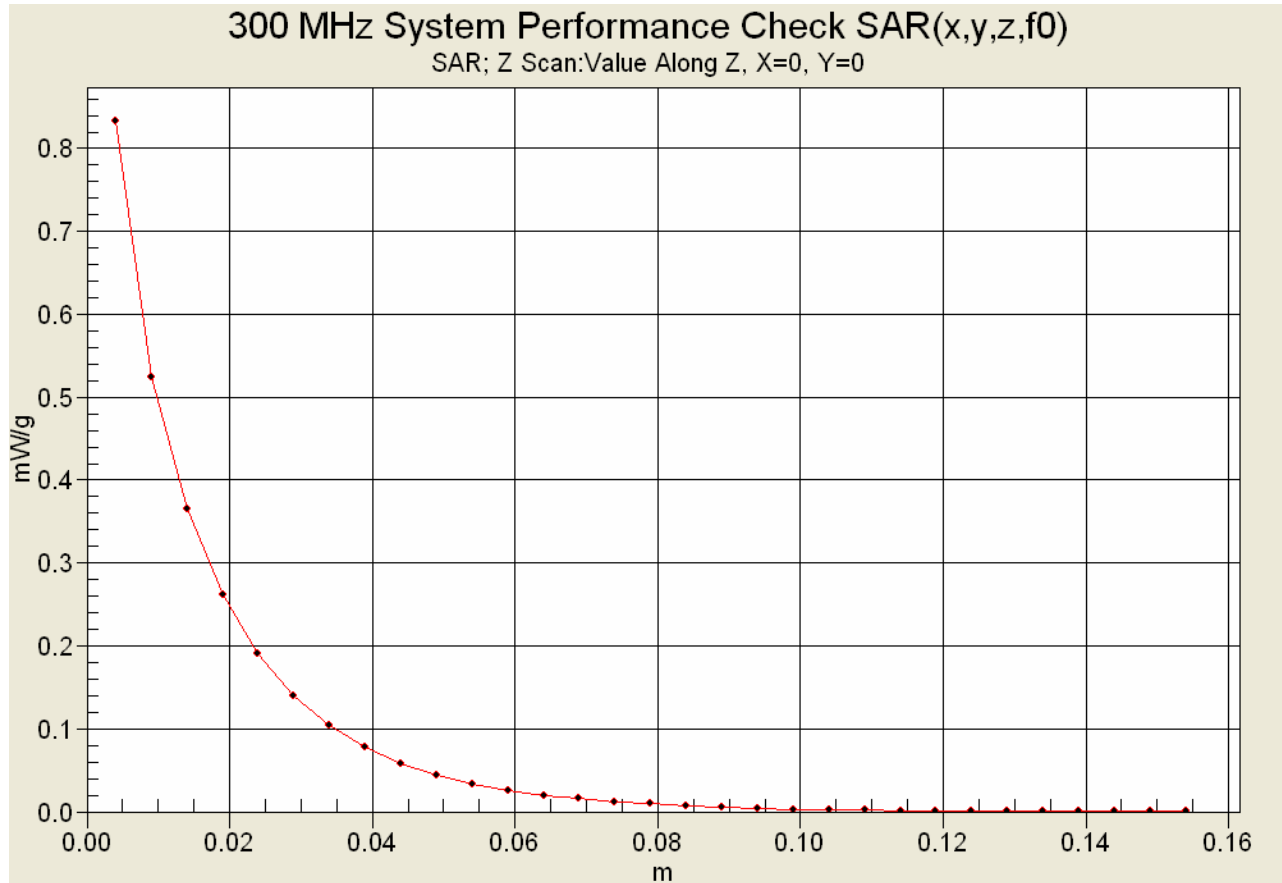
Maximum value of SAR (measured) = 0.833 mW/g





Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 27 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Z-Axis Scan





Applicant: Kenwood USA Corp.	Model: NX-210-K2	FCC ID: ALH423500	IC: 282D-423500	KENWOOD
DUT Type: Portable VHF PTT Radio Transceiver	Freq.: 150-174 MHz (FCC)	138-144/148-174 MHz (IC)		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 28 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 29 of 47



	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

300 MHz System Performance Check (Head)

Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
28/Jan/2009
Frequency (GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM

Freq	FCC_eHF	FCC_sH	Test_e	Test_s
0.2000	49.97	0.80	50.96	0.77
0.2100	49.50	0.80	50.05	0.78
0.2200	49.03	0.81	50.39	0.78
0.2300	48.57	0.82	47.71	0.80
0.2400	48.10	0.83	47.86	0.81
0.2500	47.63	0.83	48.40	0.82
0.2600	47.17	0.84	47.53	0.81
0.2700	46.70	0.85	47.49	0.84
0.2800	46.23	0.86	47.03	0.85
0.2900	45.77	0.86	45.65	0.84
0.3000	45.30	0.87	45.71	0.86
0.3100	45.18	0.87	45.32	0.87
0.3200	45.06	0.87	45.19	0.88
0.3300	44.94	0.87	45.22	0.89
0.3400	44.82	0.87	43.94	0.89
0.3500	44.70	0.87	44.12	0.91
0.3600	44.58	0.87	44.46	0.92
0.3700	44.46	0.87	43.92	0.92
0.3800	44.34	0.87	42.82	0.94
0.3900	44.22	0.87	42.60	0.94
0.4000	44.10	0.87	42.94	0.96

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver		Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)			
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 30 of 47



	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

160 MHz DUT Evaluation (Head)

Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
28/Jan/2009
Frequency (GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM

Freq	FCC_eHF	FCC_sHF	Test_e	Test_s
0.0500	56.97	0.69	66.94	0.66
0.0600	56.50	0.69	54.69	0.73
0.0700	56.03	0.70	55.03	0.72
0.0800	55.57	0.71	60.25	0.74
0.0900	55.10	0.72	55.51	0.72
0.1000	54.63	0.72	58.51	0.75
0.1100	54.17	0.73	56.41	0.74
0.1200	53.70	0.74	53.55	0.76
0.1300	53.23	0.75	51.43	0.78
0.1400	52.77	0.75	54.44	0.77
0.1500	52.30	0.76	53.59	0.78
0.1600	51.83	0.77	53.03	0.81
0.1700	51.37	0.77	52.95	0.81
0.1800	50.90	0.78	52.83	0.81
0.1900	50.43	0.79	49.37	0.82
0.2000	49.97	0.80	50.94	0.83
0.2100	49.50	0.80	50.47	0.83
0.2200	49.03	0.81	49.93	0.84
0.2300	48.57	0.82	50.02	0.84
0.2400	48.10	0.83	48.78	0.85
0.2500	47.63	0.83	48.59	0.86

Applicant: Kenwood USA Corp.	Model: NX-210-K2	FCC ID: ALH423500	IC: 282D-423500	KENWOOD
DUT Type: Portable VHF PTT Radio Transceiver	Freq.: 150-174 MHz (FCC)	138-144/148-174 MHz (IC)		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 31 of 47



	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

160 MHz DUT Evaluation (Body)

Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
28/Jan/2009
Frequency (GHz)
FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB FCC Limits for Body Epsilon
FCC_sB FCC Limits for Body Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM



Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.0500	64.37	0.72	73.70	0.81
0.0600	64.12	0.73	59.79	0.76
0.0700	63.87	0.74	64.90	0.79
0.0800	63.63	0.74	71.74	0.79
0.0900	63.38	0.75	71.52	0.75
0.1000	63.13	0.76	62.71	0.79
0.1100	62.89	0.77	67.41	0.81
0.1200	62.64	0.78	66.44	0.80
0.1300	62.39	0.78	63.89	0.80
0.1400	62.15	0.79	62.28	0.81
0.1500	61.90	0.80	62.34	0.82
0.1600	61.65	0.81	61.85	0.81
0.1700	61.41	0.82	60.83	0.85
0.1800	61.16	0.82	64.30	0.83
0.1900	60.91	0.83	60.87	0.84
0.2000	60.67	0.84	61.52	0.85
0.2100	60.42	0.85	61.03	0.85
0.2200	60.17	0.86	62.13	0.88
0.2300	59.93	0.86	62.14	0.87
0.2400	59.68	0.87	61.90	0.87
0.2500	59.43	0.88	61.08	0.88

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver		Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)			
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 32 of 47

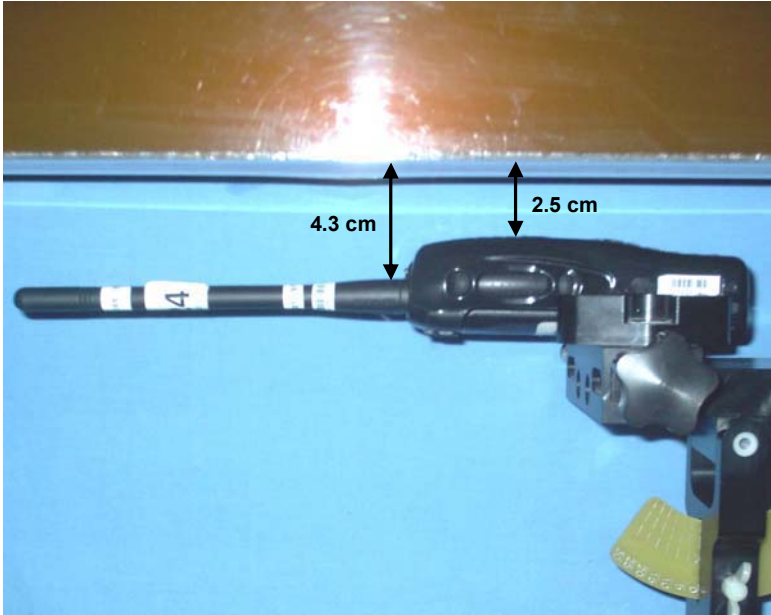
	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

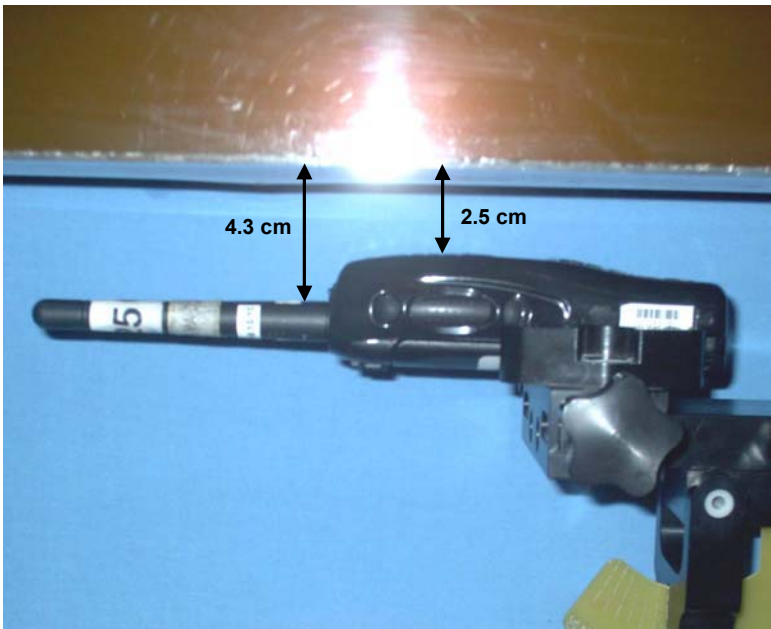
Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 33 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Spacing from Front of DUT to Planar Phantom



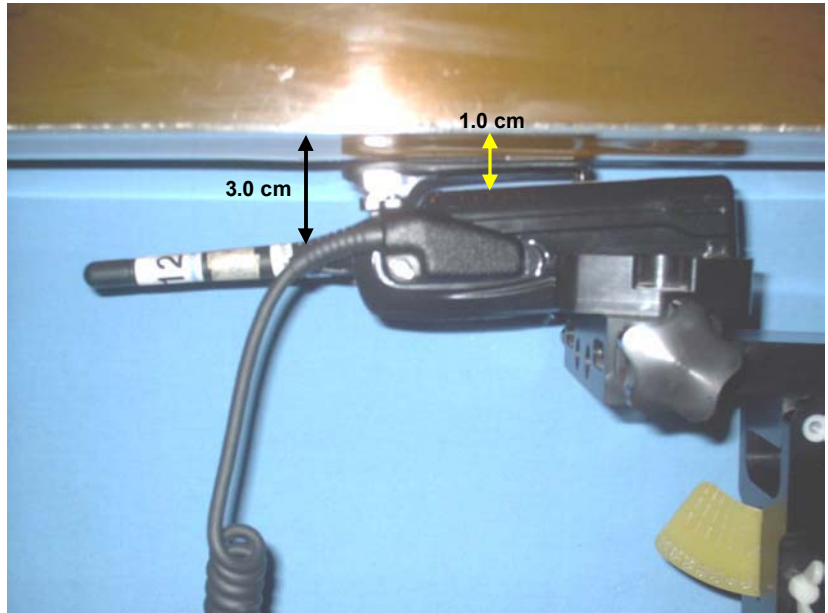
DUT with Li-ion Battery and Whip Antenna (P/N: KRA-26M)



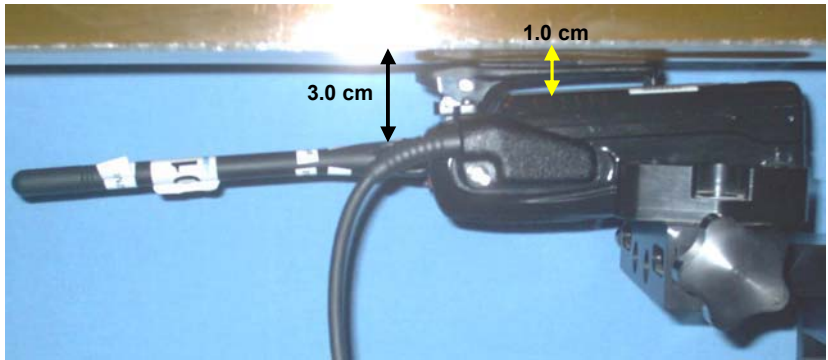
DUT with Li-ion Battery and Stubby Antenna (P/N: KRA-22M)

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 34 of 47

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
DUT with NiCd/NiMH Battery, KBH-10 Belt-Clip & Speaker-Microphone
1.0 cm Belt-Clip Spacing from Back of DUT to Planar Phantom





DUT with Ni-Cd/Ni-MH Battery (same dimensions), Stubby Antenna (P/N: KRA-22M) and KBH-10 Belt-Clip



DUT with Ni-Cd/Ni-MH Battery (same dimensions), Whip Antenna (P/N: KRA-26M) and KBH-10 Belt-Clip

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 35 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
DUT with Li-ion Battery, KBH-10 Belt-Clip & Speaker-Microphone
2.0 cm Belt-Clip Spacing from Back of DUT to Planar Phantom





DUT with Li-ion Battery, Stubby Antenna (P/N: KRA-22M) and KBH-10 Belt-Clip



DUT with Li-ion Battery, Whip Antenna (P/N: KRA-26M) and KBH-10 Belt-Clip

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 36 of 47



	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
DUT with Li-ion Battery, KBH-11 Belt-Clip & Speaker-Microphone
2.0 cm Belt-Clip Spacing from Back of DUT to Planar Phantom



DUT with Li-ion Battery, Whip Antenna (P/N: KRA-26M) and KBH-11 Belt-Clip

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.							Page 37 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

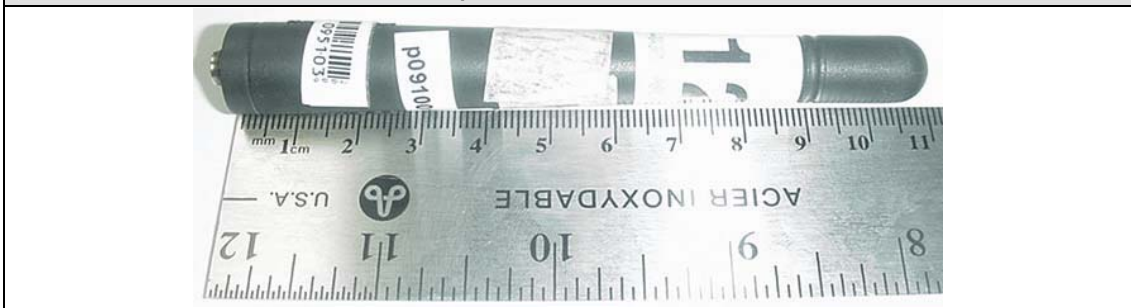
DUT PHOTOGRAPHS



Front & Back of DUT with KRA-26M Whip Antenna Front & Back of DUT with KRA-22M Stubby Antenna





Whip Antenna P/N: KRA-26M



Stubby Antenna P/N: KRA-22M

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 38 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

DUT PHOTOGRAPHS



Left & Right Sides of DUT with Lithium-ion Battery & KBH-10 Belt-Clip accessory



Back of DUT with Li-ion Batt & KBH-10 Belt-Clip



Bottom end of DUT with Lithium-ion Battery & KBH-10 Belt-Clip

Top end of DUT with Lithium-ion Battery & KBH-10 Belt-Clip

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 39 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

DUT PHOTOGRAPHS



Left & Right Sides of DUT with Lithium-ion Battery & KBH-11 Belt-Clip accessory



Back of DUT with Li-ion Batt & KBH-11 Belt-Clip



Bottom end of DUT with Lithium-ion Battery & KBH-11 Belt-Clip

Top end of DUT with Lithium-ion Battery & KBH-11 Belt-Clip



Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.								Page 40 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

DUT PHOTOGRAPHS



Applicant: Kenwood USA Corp.	Model: NX-210-K2	FCC ID: ALH423500	IC: 282D-423500	KENWOOD
DUT Type: Portable VHF PTT Radio Transceiver	Freq.: 150-174 MHz (FCC)	138-144/148-174 MHz (IC)		
2009 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 41 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

DUT PHOTOGRAPHS



Left & Right Sides of DUT with Ni-Cd Battery & KBH-11 Belt-Clip accessory



Back of DUT with Ni-Cd Batt & KBH-11 Belt-Clip



Bottom end of DUT with Ni-Cd Battery & KBH-11 Belt-Clip

Top end of DUT with Ni-Cd Battery & KBH-11 Belt-Clip

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 42 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

DUT PHOTOGRAPHS





Left & Right Sides of DUT with Ni-MH Battery & KBH-10 Belt-Clip accessory

Back of DUT with Ni-MH Batt & KBH-10 Belt-Clip

Bottom end of DUT with Ni-MH Battery & KBH-10 Belt-Clip

Top end of DUT with Ni-MH Battery & KBH-10 Belt-Clip

Applicant: Kenwood USA Corp.	Model: NX-210-K2	FCC ID: ALH423500	IC: 282D-423500	KENWOOD
DUT Type: Portable VHF PTT Radio Transceiver	Freq.: 150-174 MHz (FCC)	138-144/148-174 MHz (IC)		
2009 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 43 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

DUT PHOTOGRAPHS



Left & Right Sides of DUT with Ni-MH Battery & KBH-11 Belt-Clip



Back of DUT with Ni-MH Batt & KBH-11 Belt-Clip



Bottom end of DUT with Ni-MH Battery & KBH-11 Belt-Clip

Top end of DUT with Ni-MH Battery & KBH-11 Belt-Clip

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 44 of 47

	Date(s) of Evaluation January 28, 2009	Test Report Serial No. 012809ALH-T951-S90V	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date February 24, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

DUT PHOTOGRAPHS





Ni-MH Battery P/N: KNB-32N	Li-ion Battery P/N: KNB-33L	Ni-Cd Battery P/N: KNB-31A	Metal Belt-Clip accessory P/N: KBH-10
----------------------------	-----------------------------	----------------------------	---------------------------------------



Ni-MH Battery P/N: KNB-32N	Li-ion Battery P/N: KNB-33L	Ni-Cd Battery P/N: KNB-31A	Plastic Belt-Clip accessory P/N: KBH-11
----------------------------	-----------------------------	----------------------------	---

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 45 of 47

	<u>Date(s) of Evaluation</u> January 28, 2009	<u>Test Report Serial No.</u> 012809ALH-T951-S90V	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> February 24, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

DUT PHOTOGRAPHS



Back of DUT with Battery removed	DUT with Speaker-Microphone Audio Accessory (P/N: KMC-25)
----------------------------------	---

Applicant:	Kenwood USA Corp.	Model:	NX-210-K2	FCC ID:	ALH423500	IC:	282D-423500	KENWOOD
DUT Type:	Portable VHF PTT Radio Transceiver	Freq.:	150-174 MHz (FCC)	138-144/148-174 MHz (IC)				
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 46 of 47