

	<u>Dates of Evaluation (K3)</u> Jan. 4,6,26-28,31, 2011	<u>Test Report Serial No.</u> 121510ALH-T1070-S90U	<u>Test Report Revision No.</u> Rev. 1.3 (4th Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> April 14, 2011	<u>Dates of Evaluation (K/K2)</u> March 30 - April 7, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	

## APPENDIX A - SAR MEASUREMENT PLOTS

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH431000</b>	<b>DUT Models:</b>	<b>NX-320-K/K2/K3</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable UHF-H PTT Radio Transceiver</b>	<b>Transmitter Frequency Range:</b>		<b>450.0 - 512.0 MHz</b>		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 52 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #1 (F1)

Date Tested: 01/06/2011

### Face-held SAR - KRA-23M “Antenna A” - KNB-57L 2000mAh Li-ion “Battery a” – 450.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.10**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 40%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.88 \text{ mho/m}$ ;  $\epsilon_r = 45.6$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 5.80 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 75.4 V/m; Power Drift = 0.071 dB


Peak SAR (extrapolated) = 7.19 W/kg

**SAR(1 g) = 5.28 mW/g; SAR(10 g) = 3.93 mW/g**

Maximum value of SAR (measured) = 5.52 mW/g

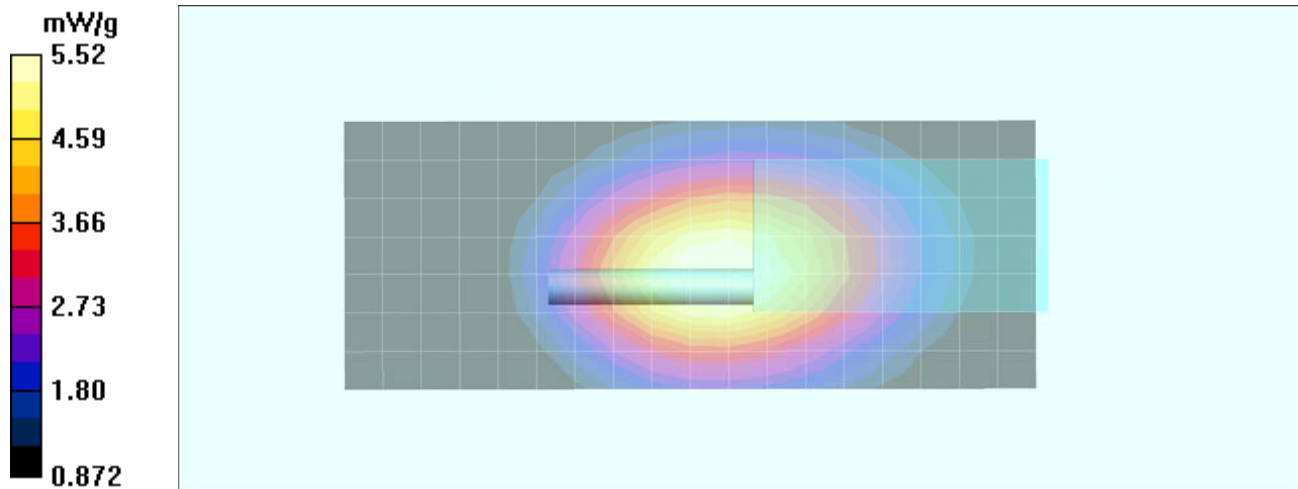

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 53 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	  Test Lab Certificate No. 2470.01
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #2 (F2)

Date Tested: 01/06/2011

### Face-held SAR - KRA-23M2 “Antenna B” - KNB-57L 2000mAh Li-ion “Battery a” – 512.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.10**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 40%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.91 \text{ mho/m}$ ;  $\epsilon_r = 44.6$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 5.78 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 79.0 V/m; Power Drift = -0.188 dB

Peak SAR (extrapolated) = 8.01 W/kg

**SAR(1 g) = 5.82 mW/g; SAR(10 g) = 4.28 mW/g**

Maximum value of SAR (measured) = 6.10 mW/g

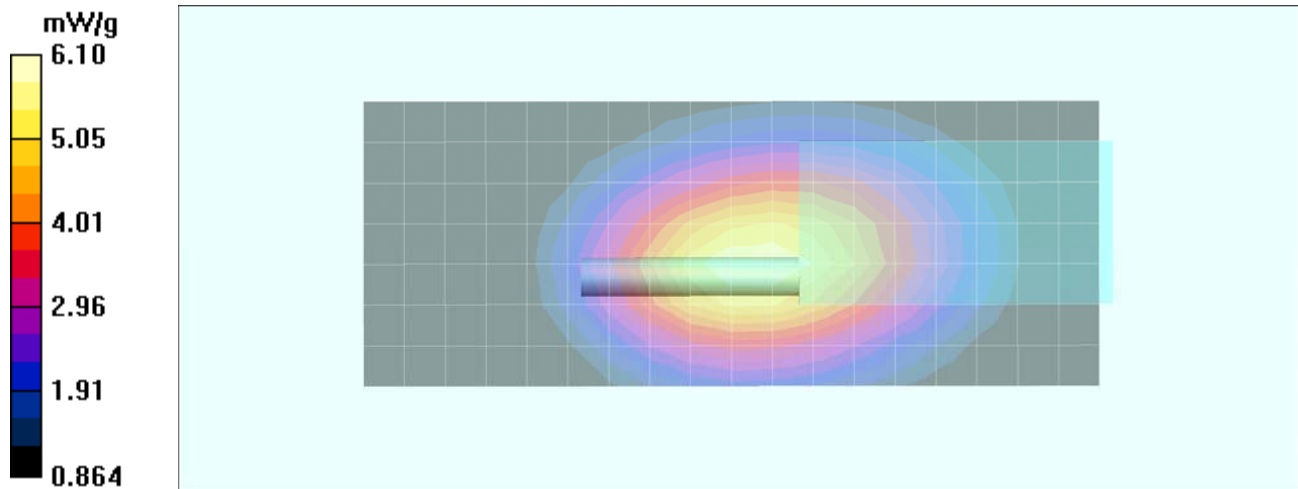

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>	450.0 - 512.0 MHz			
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 54 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

### Face SAR Plot #3 (F3)

Date Tested: 01/06/2011

### Face-held SAR - KRA-27M “Antenna C” - KNB-57L 2000mAh Li-ion “Battery a” – 450.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.10**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 40%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: f = 450 MHz;  $\sigma = 0.88$  mho/m;  $\epsilon_r = 45.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.75 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 80.8 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 7.87 W/kg

**SAR(1 g) = 5.79 mW/g; SAR(10 g) = 4.32 mW/g**

Maximum value of SAR (measured) = 6.06 mW/g

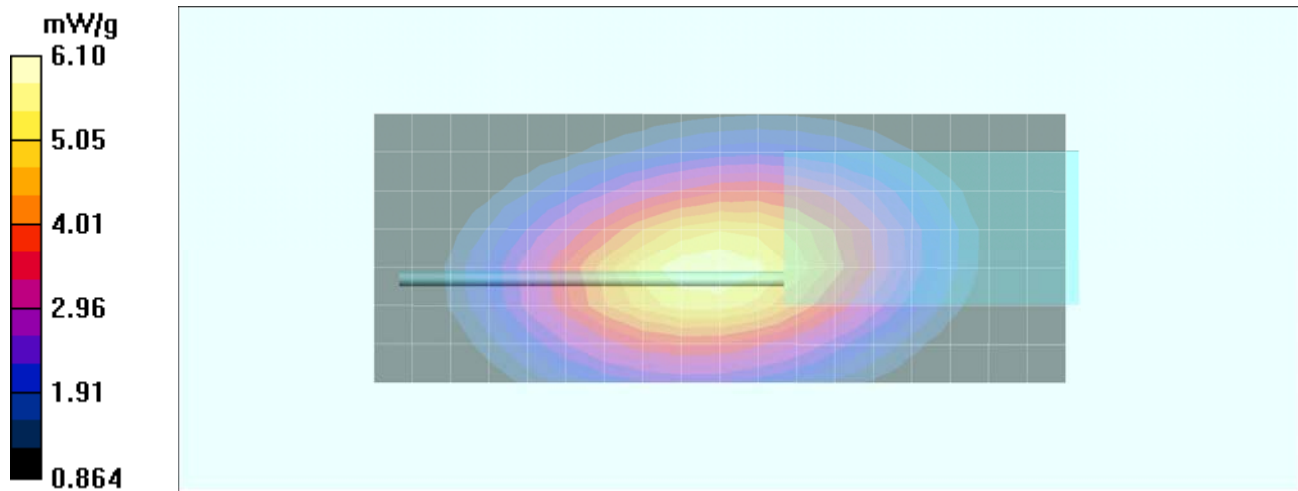

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 55 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #4 (F4)

Date Tested: 01/06/2011

### Face-held SAR - KRA-27M2 “Antenna D” - KNB-57L 2000mAh Li-ion “Battery a” – 512.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.10**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 40%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.91 \text{ mho/m}$ ;  $\epsilon_r = 44.6$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.89 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 90.8 V/m; Power Drift = -0.357 dB



Peak SAR (extrapolated) = 10.0 W/kg

**SAR(1 g) = 7.33 mW/g; SAR(10 g) = 5.44 mW/g**

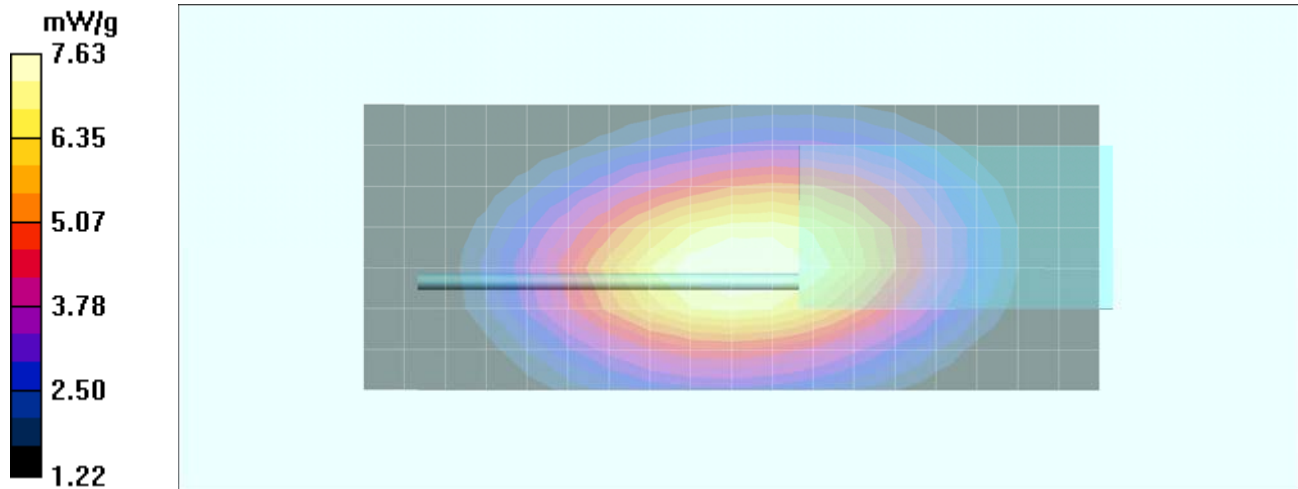
Maximum value of SAR (measured) = 7.63 mW/g





<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 56 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	
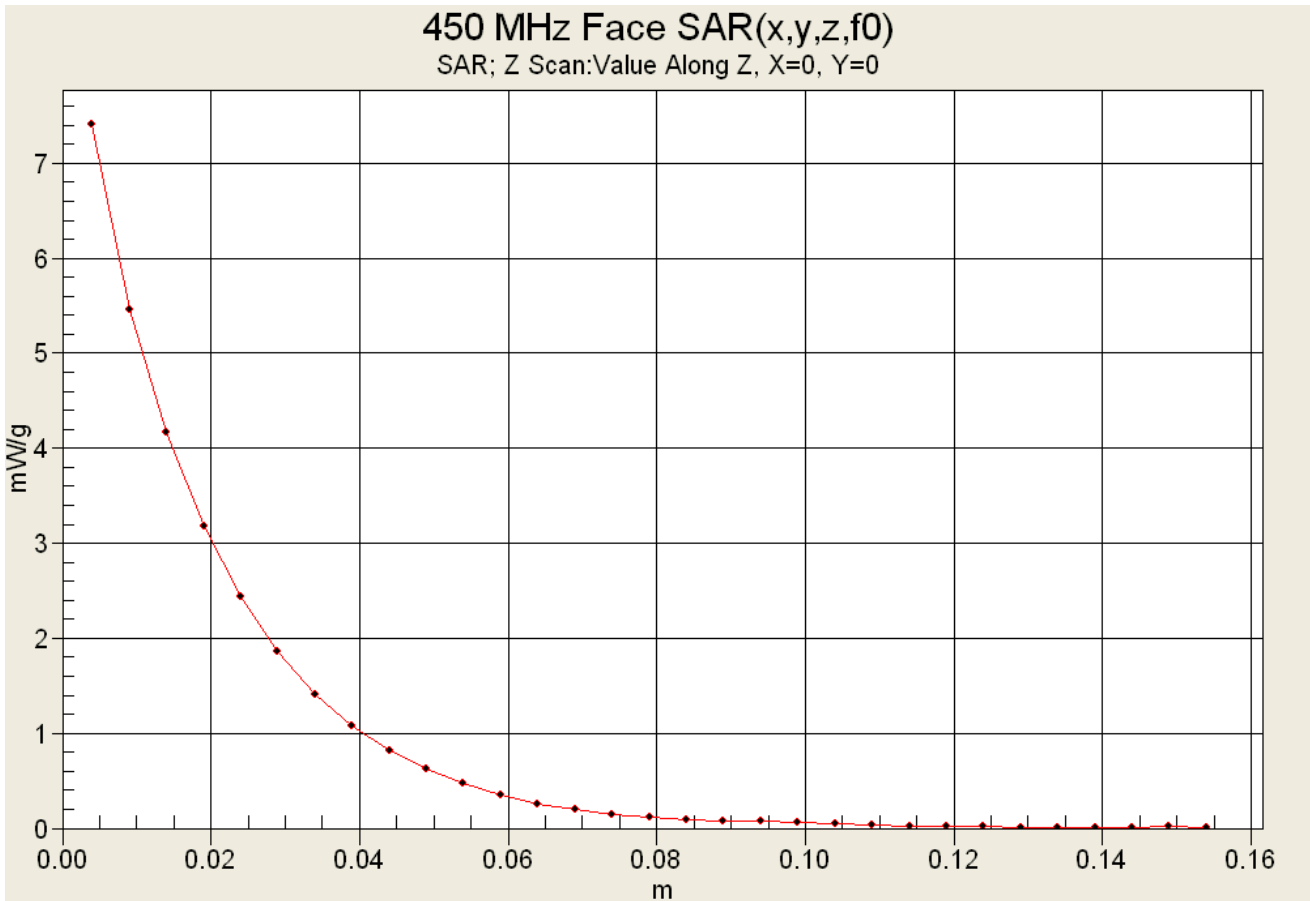
## Z-Axis Scan



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 57 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #5 (F5)

Date Tested: 01/06/2011

### Face-held SAR - KRA-27M2 “Antenna D” - KNB-55L 1480mAh Li-ion “Battery b” – 512.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.10**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 40%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.91 \text{ mho/m}$ ;  $\epsilon_r = 44.6$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.82 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 91.8 V/m; Power Drift = -0.260 dB

Peak SAR (extrapolated) = 9.89 W/kg

**SAR(1 g) = 7.2 mW/g; SAR(10 g) = 5.34 mW/g**

Maximum value of SAR (measured) = 7.51 mW/g

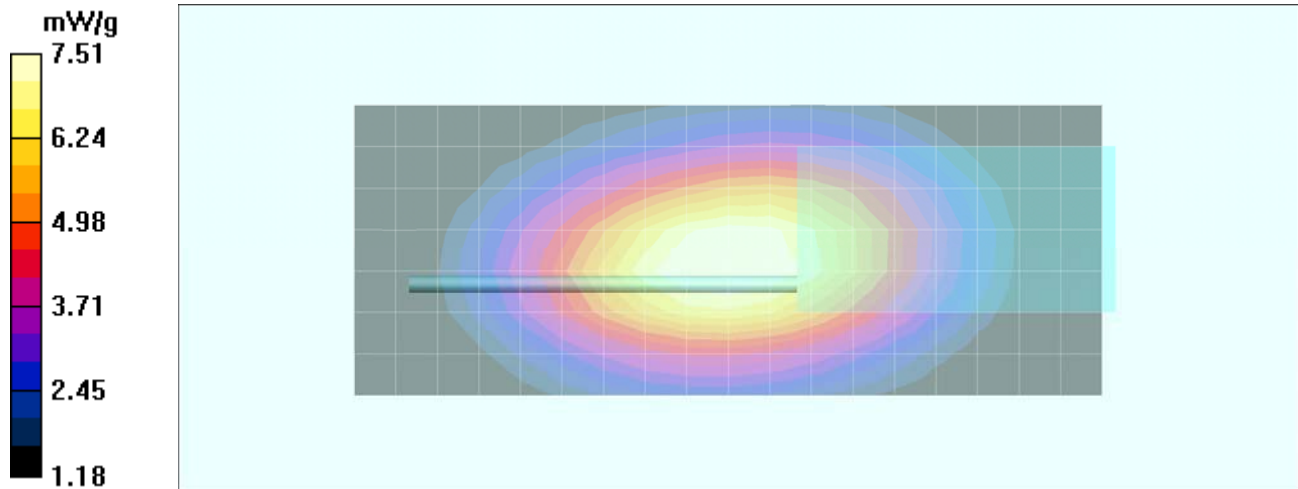

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 58 of 361



	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	  Test Lab Certificate No. 2470.01
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #6 (F6)

Date Tested: 01/06/2011

### Face-held SAR - KRA-27M2 “Antenna D” - KNB-56N 1400mAh Ni-MH “Battery c” – 512.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.10**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 40%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.91 \text{ mho/m}$ ;  $\epsilon_r = 44.6$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.04 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 87.7 V/m; Power Drift = -0.475 dB

Peak SAR (extrapolated) = 9.01 W/kg

**SAR(1 g) = 6.57 mW/g; SAR(10 g) = 4.86 mW/g**

Maximum value of SAR (measured) = 6.87 mW/g

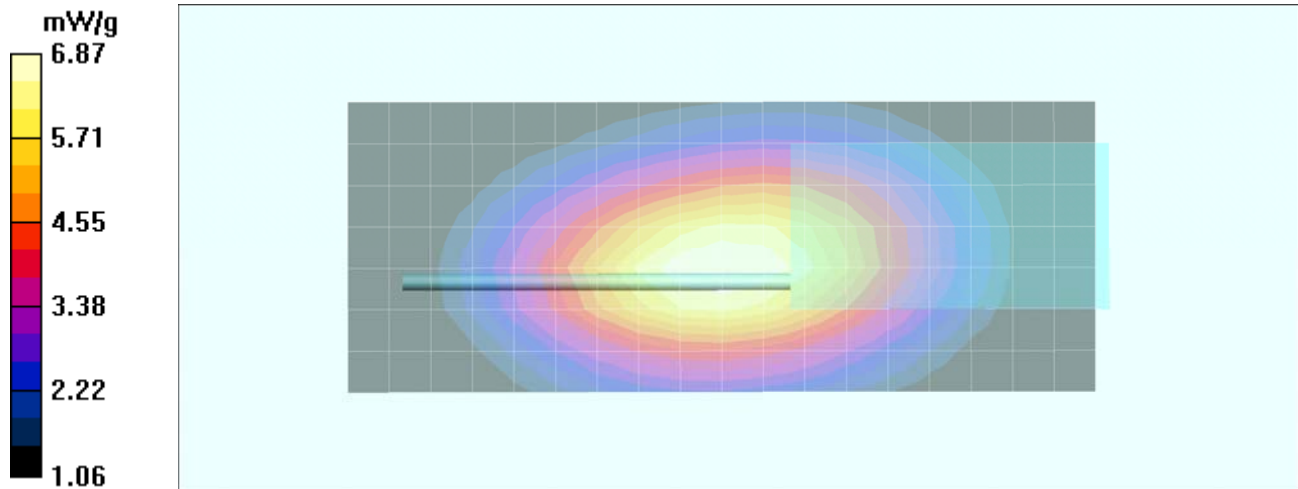

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 59 of 361



	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #7 (F7)

Date Tested: 01/06/2011

### Face-held SAR - KRA-27M2 “Antenna D” – KBP-5 9V AAx6 “Battery d” – 512.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.10**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 40%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.91 \text{ mho/m}$ ;  $\epsilon_r = 44.6$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 5.86 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 89.4 V/m; Power Drift = -1.21 dB

Peak SAR (extrapolated) = 8.06 W/kg

**SAR(1 g) = 5.81 mW/g; SAR(10 g) = 4.28 mW/g**

Maximum value of SAR (measured) = 6.10 mW/g

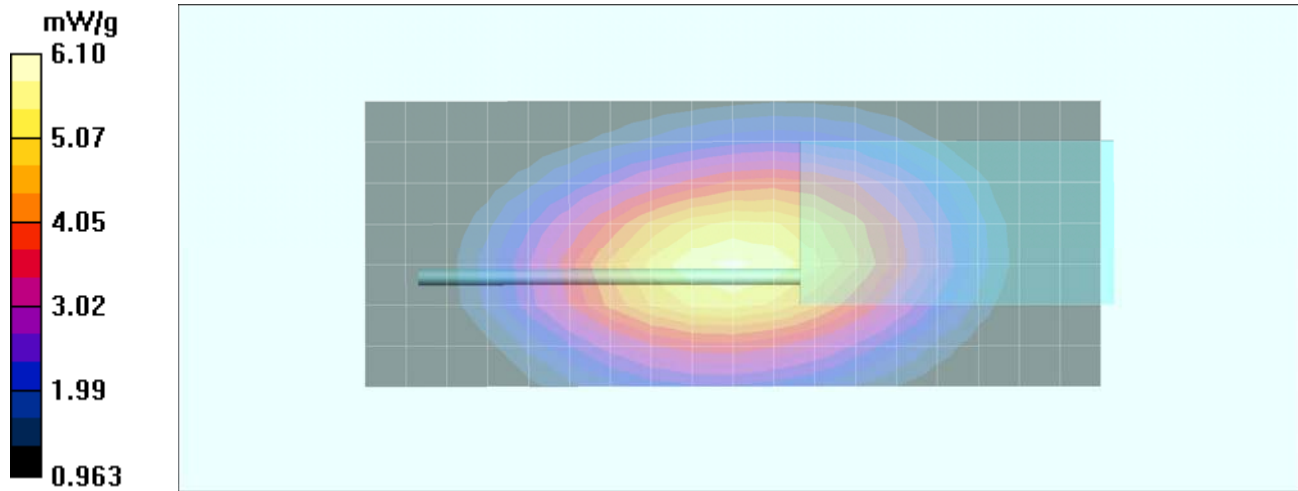

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 60 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	 
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #8 (F8)

Date Tested: 04/07/2011

### Face-held SAR - KRA-23M “Antenna A” – KNB-57L “Battery a” – 450.0 MHz

**DUT: Kenwood NX-320-K; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.0320K124**

Ambient Temp: 22.0°C; Fluid Temp: 21.4°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.84 \text{ mho/m}$ ;  $\epsilon_r = 45$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.82 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 63.4 V/m; Power Drift = 0.239 dB


Peak SAR (extrapolated) = 4.96 W/kg

**SAR(1 g) = 3.59 mW/g; SAR(10 g) = 2.65 mW/g**

Maximum value of SAR (measured) = 3.77 mW/g

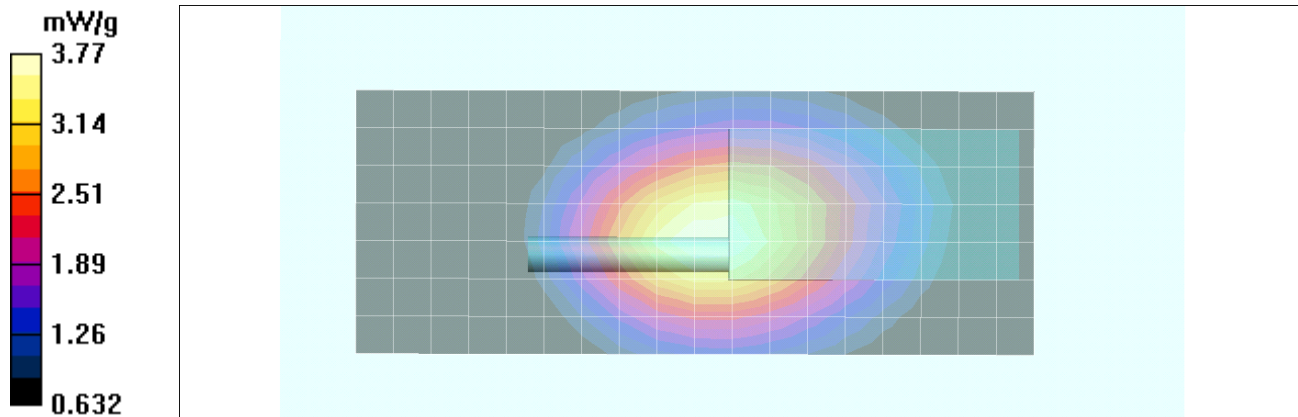

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 61 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	 
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #9 (F9)

Date Tested: 04/07/2011

### Face-held SAR - KRA-23M “Antenna A” – KNB-57L “Battery a” – 450.0 MHz

**DUT: Kenwood NX-320-K2; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.0320K218**

Ambient Temp: 22.0°C; Fluid Temp: 21.4°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.84 \text{ mho/m}$ ;  $\epsilon_r = 45$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.70 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 65.4 V/m; Power Drift = 0.121 dB


Peak SAR (extrapolated) = 5.17 W/kg

**SAR(1 g) = 3.76 mW/g; SAR(10 g) = 2.77 mW/g**

Maximum value of SAR (measured) = 3.93 mW/g

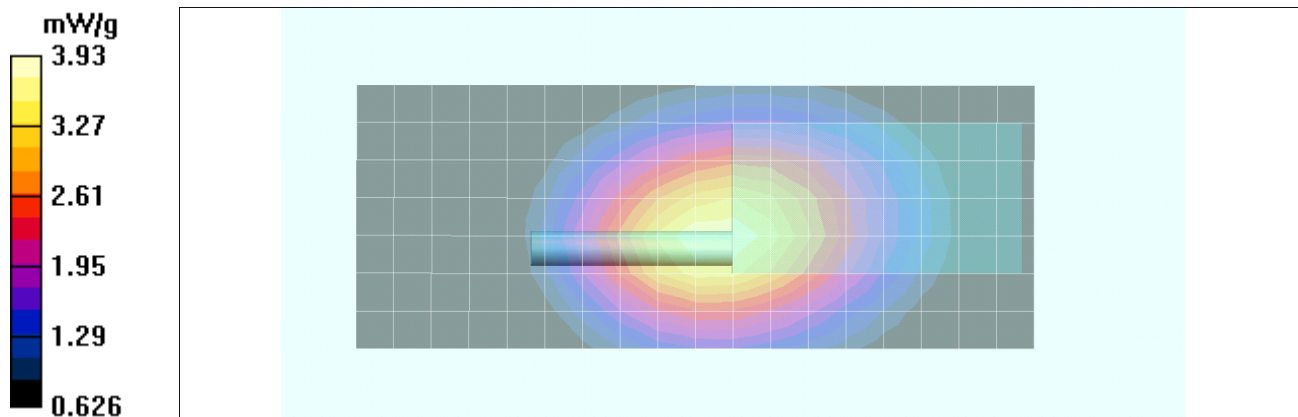

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 62 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	 
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #10 (F10)

Date Tested: 04/07/2011

### Face-held SAR - KRA-23M2 “Antenna B” – KNB-57L “Battery a” – 512.0 MHz

**DUT: Kenwood NX-320-K; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.0320K124**

Ambient Temp: 22.0°C; Fluid Temp: 21.4°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.9 \text{ mho/m}$ ;  $\epsilon_r = 43.8$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 4.80 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 71.9 V/m; Power Drift = -0.045 dB


Peak SAR (extrapolated) = 6.35 W/kg

**SAR(1 g) = 4.59 mW/g; SAR(10 g) = 3.38 mW/g**

Maximum value of SAR (measured) = 4.79 mW/g

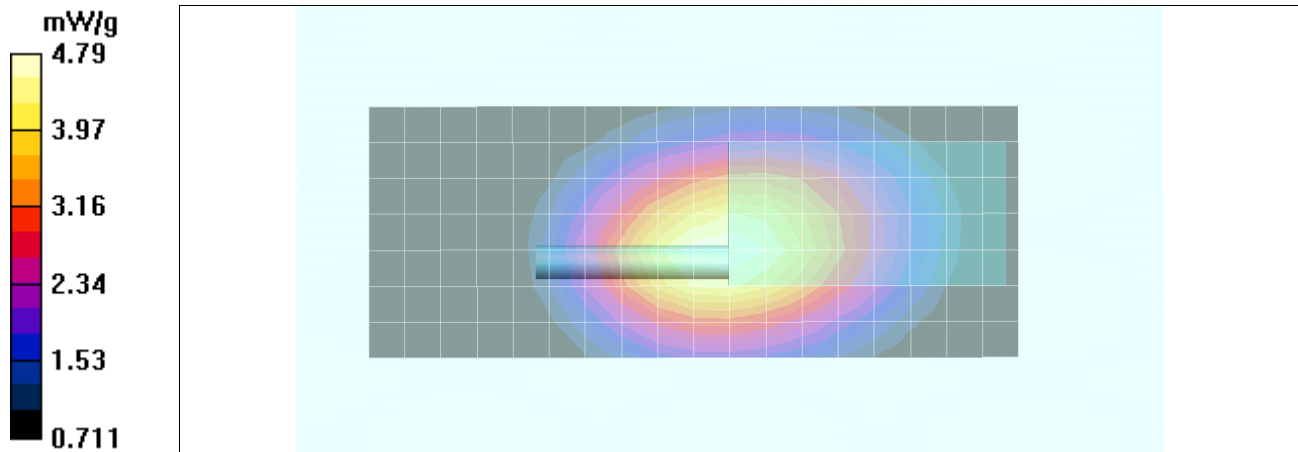

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 63 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	 
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #11 (F11)

Date Tested: 04/07/2011

### Face-held SAR - KRA-23M2 “Antenna B” – KNB-57L “Battery a” – 512.0 MHz

**DUT: Kenwood NX-320-K2; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.0320K218**

Ambient Temp: 22.0°C; Fluid Temp: 21.4°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.9 \text{ mho/m}$ ;  $\epsilon_r = 43.8$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 4.32 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 68.2 V/m; Power Drift = 0.088 dB

Peak SAR (extrapolated) = 5.78 W/kg

**SAR(1 g) = 4.19 mW/g; SAR(10 g) = 3.08 mW/g**

Maximum value of SAR (measured) = 4.39 mW/g

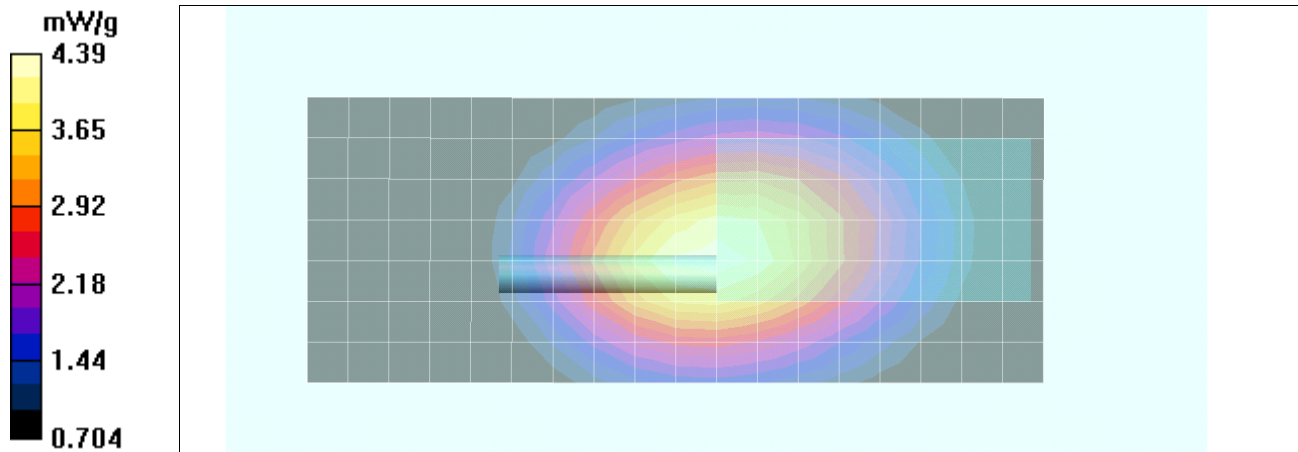

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 64 of 361



	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	  Test Lab Certificate No. 2470.01
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #12 (F12)

Date Tested: 04/07/2011

### Face-held SAR - KRA-27M “Antenna C” – KNB-57L “Battery a” – 450.0 MHz

**DUT: Kenwood NX-320-K; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.0320K124**

Ambient Temp: 22.0°C; Fluid Temp: 21.4°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.84 \text{ mho/m}$ ;  $\epsilon_r = 45$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.82 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 64.5 V/m; Power Drift = 0.133 dB

Peak SAR (extrapolated) = 5.10 W/kg

**SAR(1 g) = 3.71 mW/g; SAR(10 g) = 2.75 mW/g**

Maximum value of SAR (measured) = 3.90 mW/g

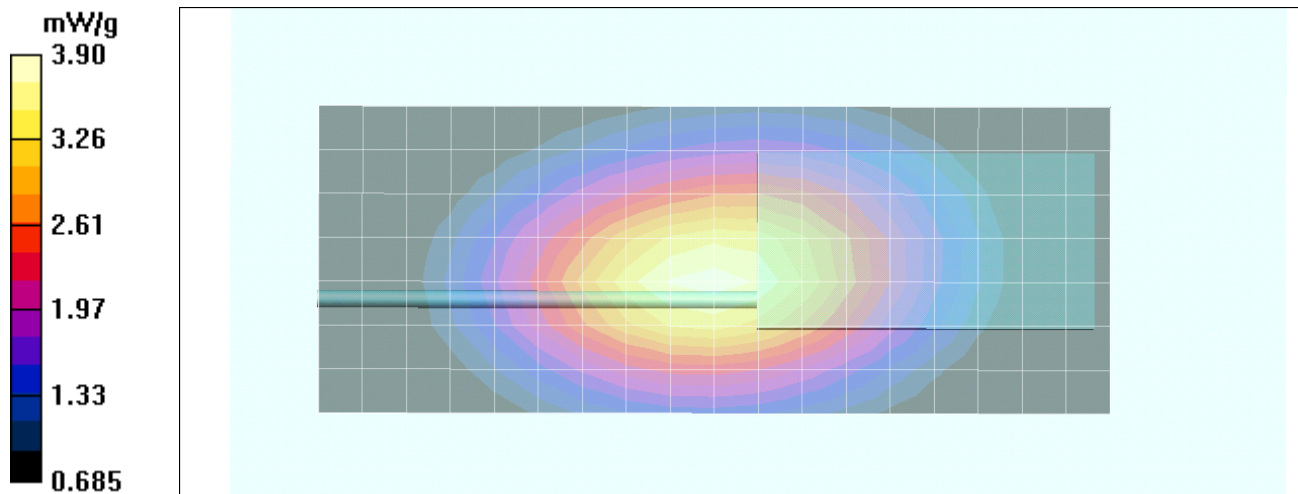

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 65 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #13 (F13)

Date Tested: 04/07/2011

### Face-held SAR - KRA-27M “Antenna C” – KNB-57L “Battery a” – 450.0 MHz

**DUT: Kenwood NX-320-K2; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.0320K218**

Ambient Temp: 22.0°C; Fluid Temp: 21.4°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.84 \text{ mho/m}$ ;  $\epsilon_r = 45$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 4.08 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 65.8 V/m; Power Drift = 0.165 dB

Peak SAR (extrapolated) = 5.26 W/kg

**SAR(1 g) = 3.85 mW/g; SAR(10 g) = 2.86 mW/g**

Maximum value of SAR (measured) = 4.02 mW/g

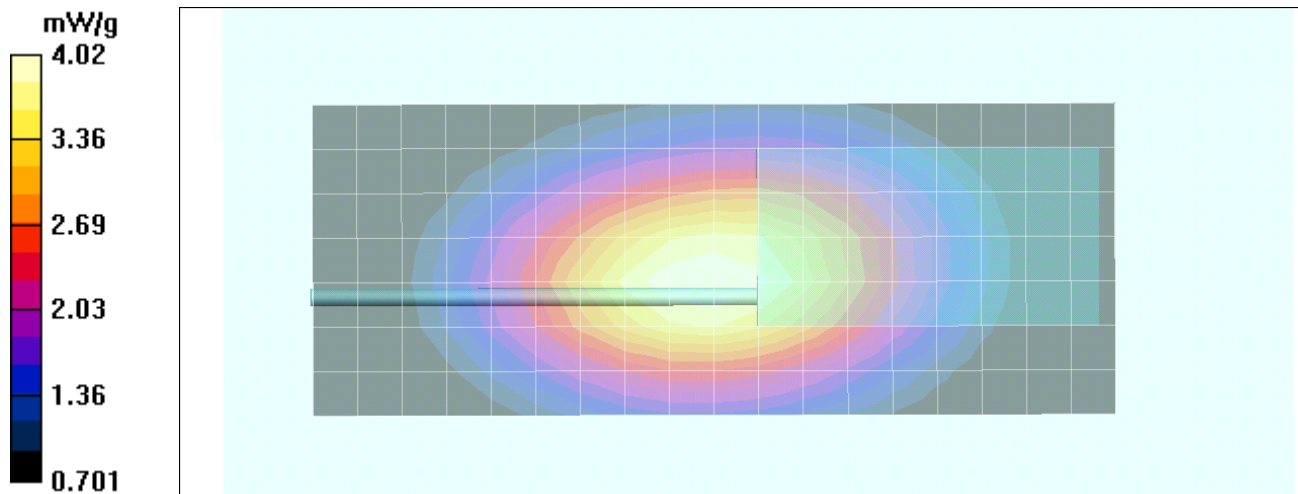

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 66 of 361



	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	  Test Lab Certificate No. 2470.01
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #14 (F14)

Date Tested: 04/07/2011

### Face-held SAR - KRA-27M2 “Antenna D” – KNB-57L “Battery a” – 512.0 MHz

**DUT: Kenwood NX-320-K; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.0320K124**

Ambient Temp: 22.0°C; Fluid Temp: 21.4°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.9 \text{ mho/m}$ ;  $\epsilon_r = 43.8$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.74 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 91.6 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 10.2 W/kg

**SAR(1 g) = 7.45 mW/g; SAR(10 g) = 5.51 mW/g**

Maximum value of SAR (measured) = 7.80 mW/g

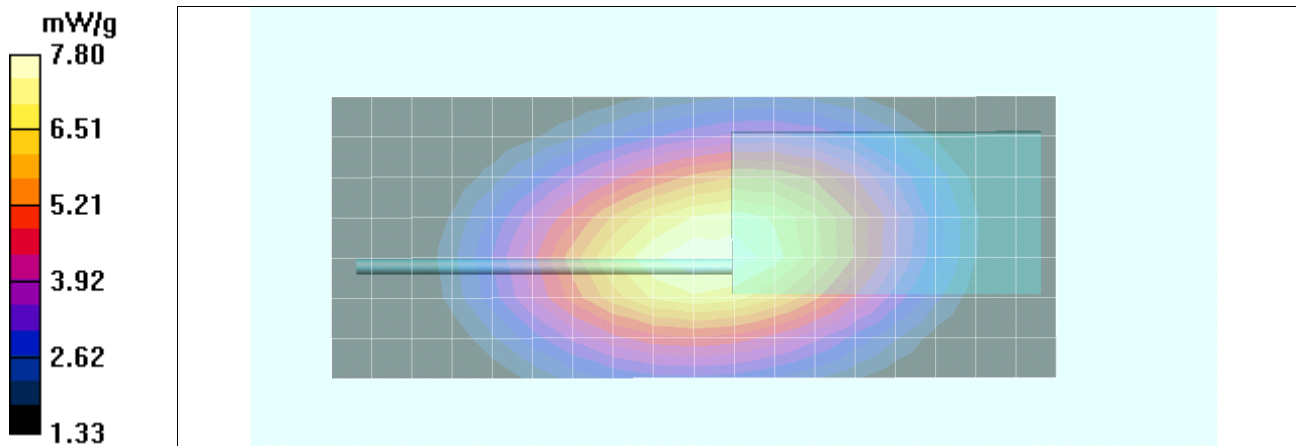

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 67 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	  Test Lab Certificate No. 2470.01
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Face SAR Plot #15 (F15)

Date Tested: 04/07/2011

### Face-held SAR - KRA-27M2 “Antenna D” – KNB-57L “Battery a” – 512.0 MHz

**DUT: Kenwood NX-320-K2; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No.0320K218**

Ambient Temp: 22.0°C; Fluid Temp: 21.4°C; Barometric Pressure: 101.1 kPa; Humidity: 33%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.9 \text{ mho/m}$ ;  $\epsilon_r = 43.8$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.82 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 93.0 V/m; Power Drift = -0.170 dB


Peak SAR (extrapolated) = 10.5 W/kg

**SAR(1 g) = 7.62 mW/g; SAR(10 g) = 5.63 mW/g**


Maximum value of SAR (measured) = 7.97 mW/g

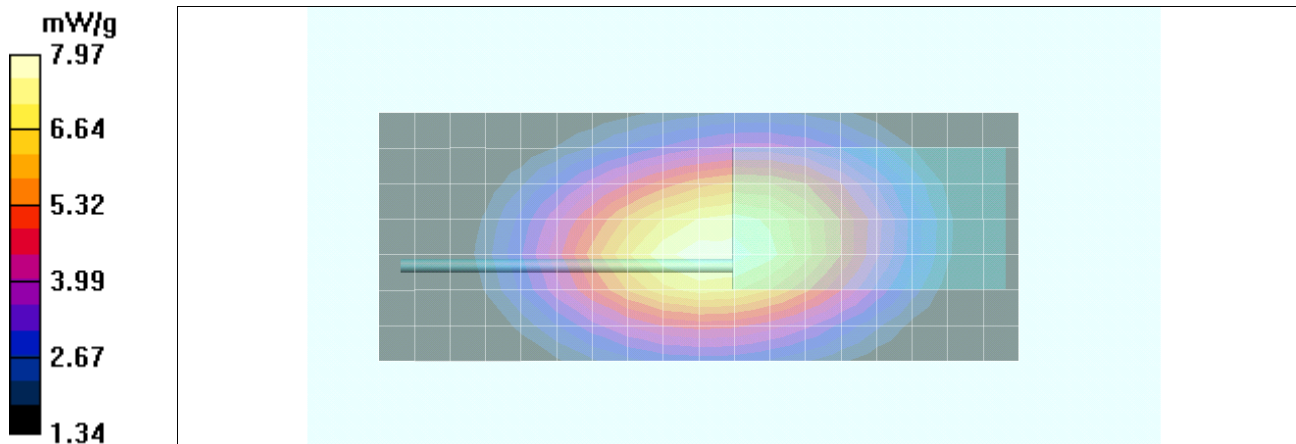

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 68 of 361

	<u>Dates of Evaluation (K3)</u> Jan. 4,6,26-28,31, 2011	<u>Test Report Serial No.</u> 121510ALH-T1070-S90U	<u>Test Report Revision No.</u> Rev. 1.3 (4th Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> April 14, 2011	<u>Dates of Evaluation (K/K2)</u> March 30 - April 7, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	

## Z-Axis Scan

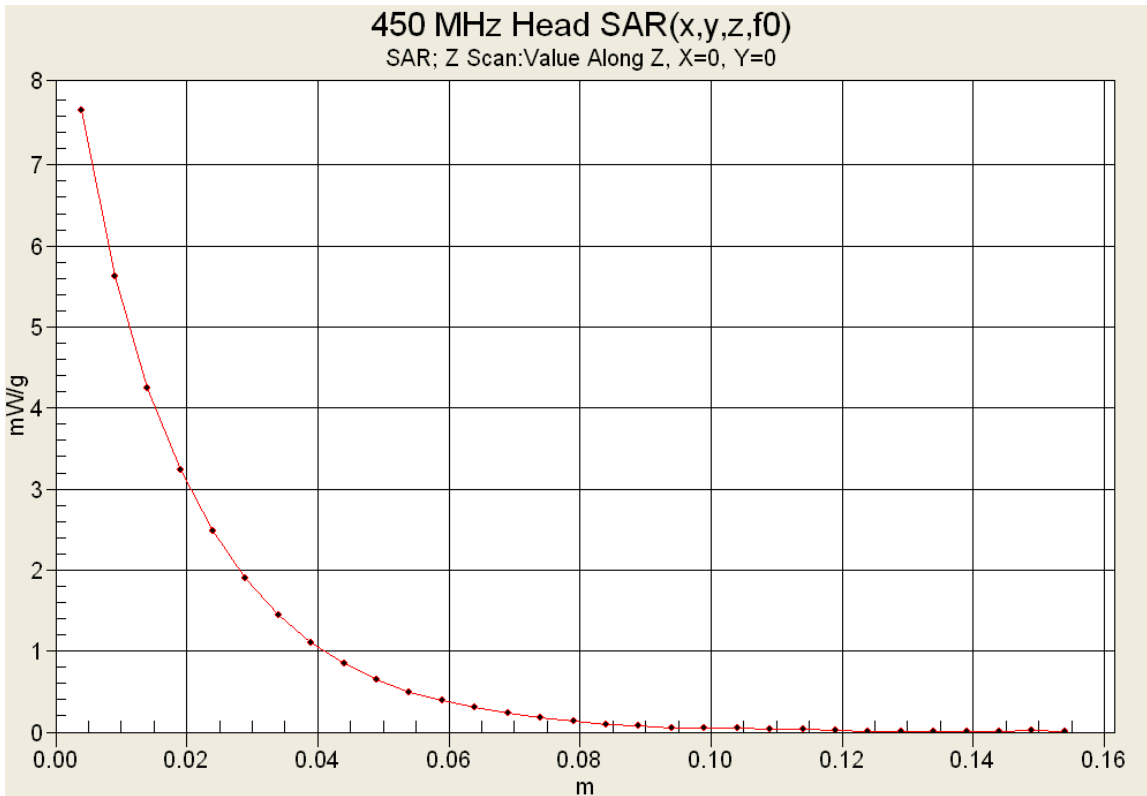

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH431000</b>	<b>DUT Models:</b>	<b>NX-320-K/K2/K3</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable UHF-H PTT Radio Transceiver</b>	<b>Transmitter Frequency Range:</b>		<b>450.0 - 512.0 MHz</b>		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 69 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #1 (B1)

Date Tested: 01/04/2011

### Body-worn SAR - KRA-23M “Antenna A” - KNB-55L 1480mAh Li-ion “Battery b” – 450.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.0°C; Fluid Temp: 22.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.93 \text{ mho/m}$ ;  $\epsilon_r = 58.8$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 8.59 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 93.0 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 12.3 W/kg

**SAR(1 g) = 8.32 mW/g; SAR(10 g) = 6.06 mW/g**

Maximum value of SAR (measured) = 8.72 mW/g

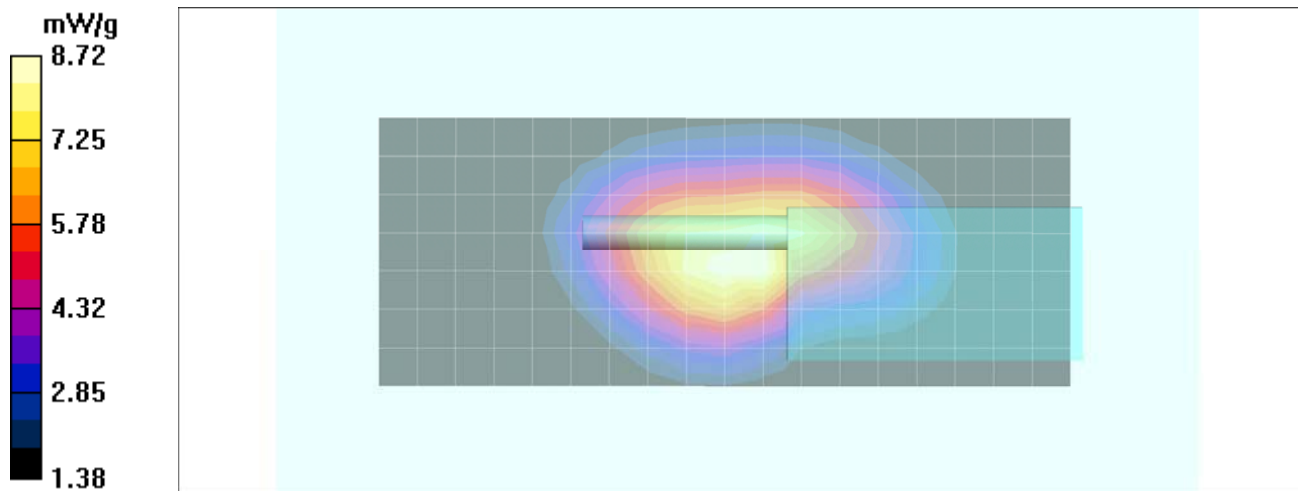

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	KENWOOD
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 70 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #2 (B2)

Date Tested: 01/04/2011

### Body-worn SAR - KRA-23M “Antenna A” - KNB-55L 1480mAh Li-ion “Battery b” – 463.3 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.0°C; Fluid Temp: 22.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 463.3 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 463.3 \text{ MHz}$ ;  $\sigma = 0.92 \text{ mho/m}$ ;  $\epsilon_r = 59.1$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 10.1 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 104.6 V/m; Power Drift = -0.306 dB



Peak SAR (extrapolated) = 13.7 W/kg

**SAR(1 g) = 9.24 mW/g; SAR(10 g) = 6.58 mW/g**

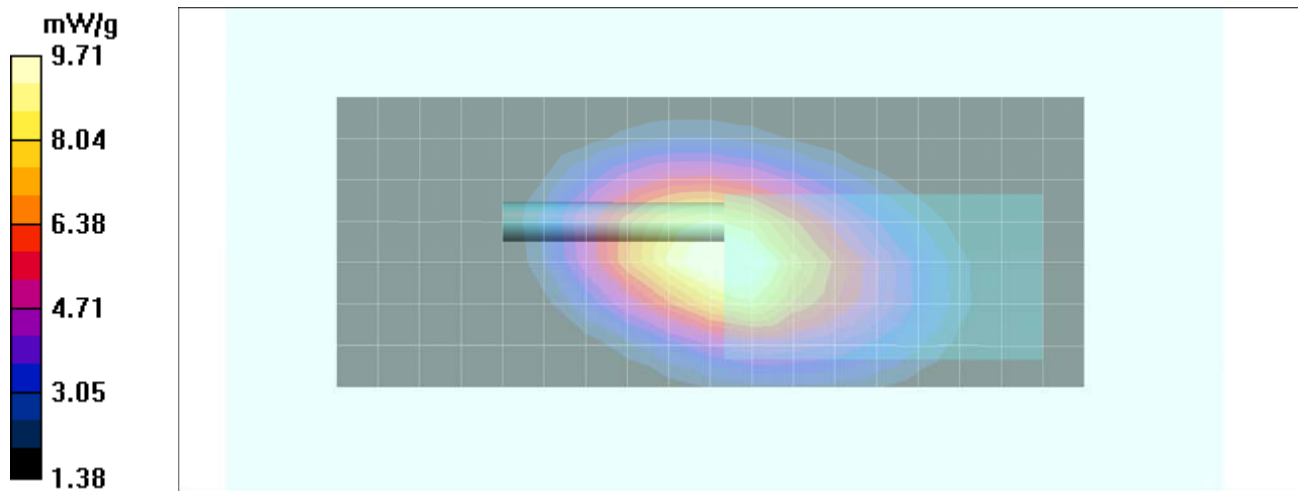Maximum value of SAR (measured) = 9.71 mW/g



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 71 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

### Body SAR Plot #3 (B3)

Date Tested: 01/04/2011

### Body-worn SAR - KRA-23M "Antenna A" - KNB-55L 1480mAh Li-ion "Battery b" – 476.7 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.0°C; Fluid Temp: 22.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 476.7 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 476.7 \text{ MHz}$ ;  $\sigma = 0.94 \text{ mho/m}$ ;  $\epsilon_r = 58.5$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.89 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 97.5 V/m; Power Drift = -0.681 dB

Peak SAR (extrapolated) = 11.5 W/kg

**SAR(1 g) = 7.74 mW/g; SAR(10 g) = 5.5 mW/g**

Maximum value of SAR (measured) = 8.14 mW/g

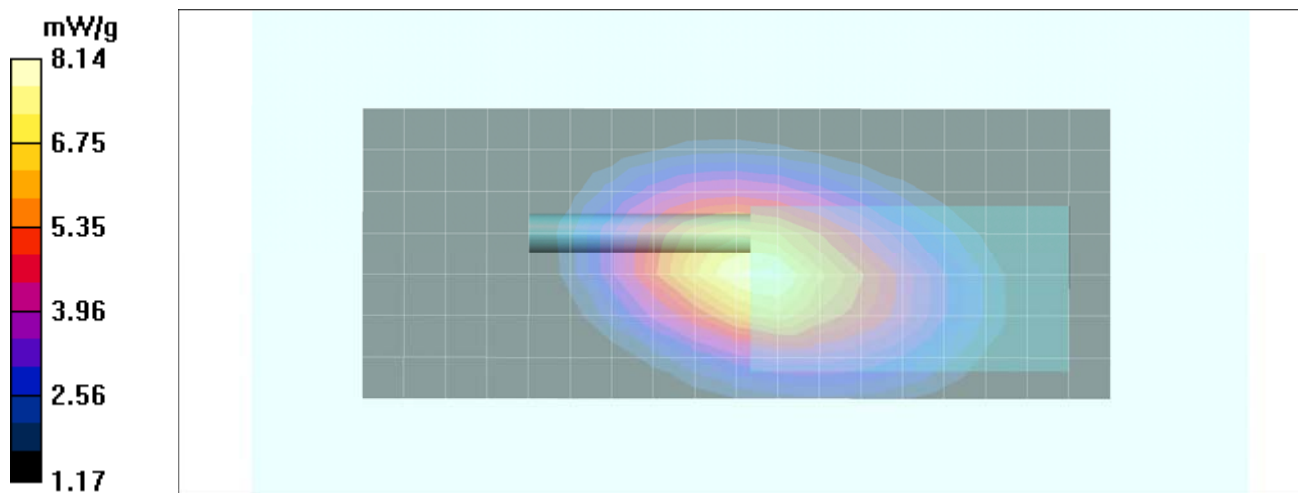

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 72 of 361



	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #4 (B4)

Date Tested: 01/04/2011

### Body-worn SAR - KRA-23M "Antenna A" - KNB-55L 1480mAh Li-ion "Battery b" – 490.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.0°C; Fluid Temp: 22.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 490 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used:  $f = 490 \text{ MHz}$ ;  $\sigma = 0.96 \text{ mho/m}$ ;  $\epsilon_r = 58.4$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 5.71 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 79.8 V/m; Power Drift = -0.303 dB

Peak SAR (extrapolated) = 8.10 W/kg

**SAR(1 g) = 5.43 mW/g; SAR(10 g) = 3.84 mW/g**

Maximum value of SAR (measured) = 5.71 mW/g

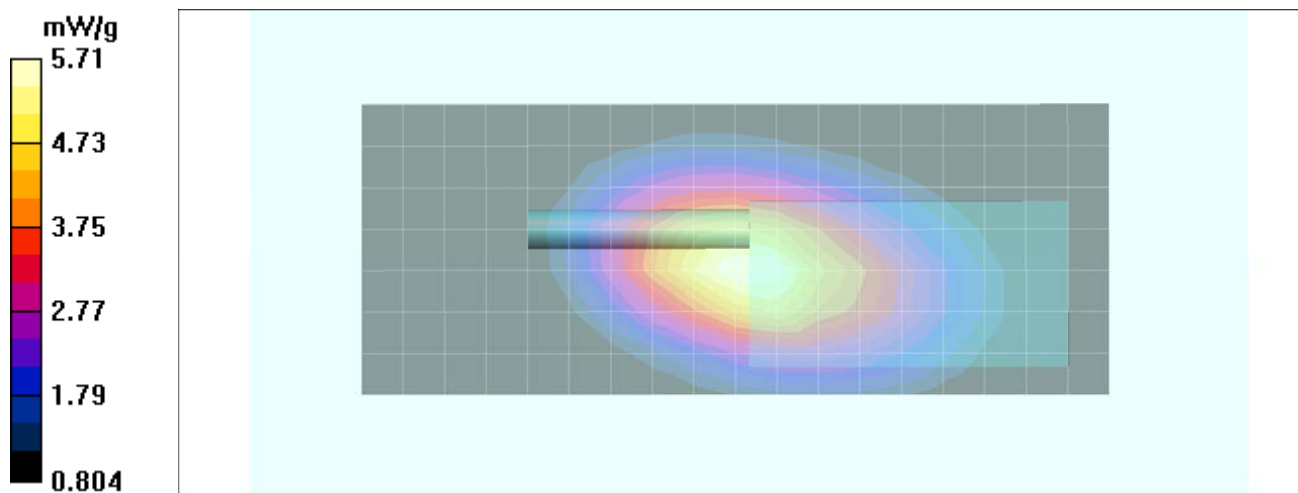

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 73 of 361



	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #5 (B5)

Date Tested: 01/26/2011

### Body-worn SAR - KRA-23M "Antenna A" - KNB-57L 2000mAh Li-ion "Battery a" – 463.3 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.3°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 463.3 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 463.3 \text{ MHz}$ ;  $\sigma = 0.913 \text{ mho/m}$ ;  $\epsilon_r = 57.6$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.6 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 10.6 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 105.2 V/m; Power Drift = -0.145 dB

Peak SAR (extrapolated) = 14.7 W/kg

**SAR(1 g) = 9.95 mW/g; SAR(10 g) = 7.07 mW/g**

Maximum value of SAR (measured) = 10.4 mW/g

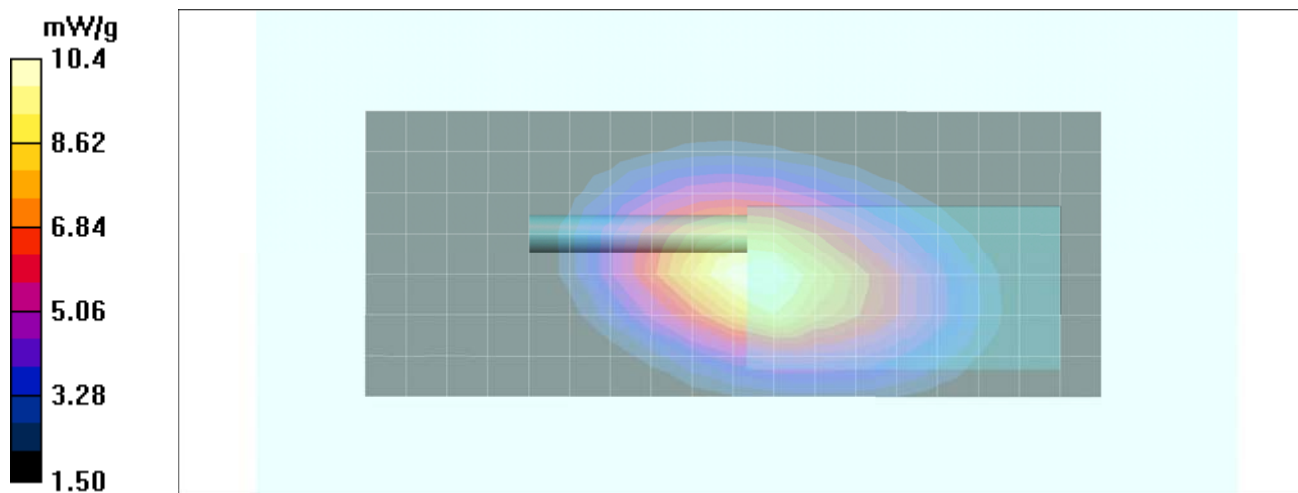

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 74 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #6 (B6)

Date Tested: 01/26/2011

### Body-worn SAR - KRA-23M "Antenna A" - KNB-56N 1400mAh Li-ion "Battery c" – 463.3 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.3°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 463.3 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 463.3 \text{ MHz}$ ;  $\sigma = 0.913 \text{ mho/m}$ ;  $\epsilon_r = 57.6$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.7 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 9.84 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 102.5 V/m; Power Drift = -0.326 dB

Peak SAR (extrapolated) = 13.0 W/kg

**SAR(1 g) = 8.93 mW/g; SAR(10 g) = 6.43 mW/g**

Maximum value of SAR (measured) 9.35 mW/g

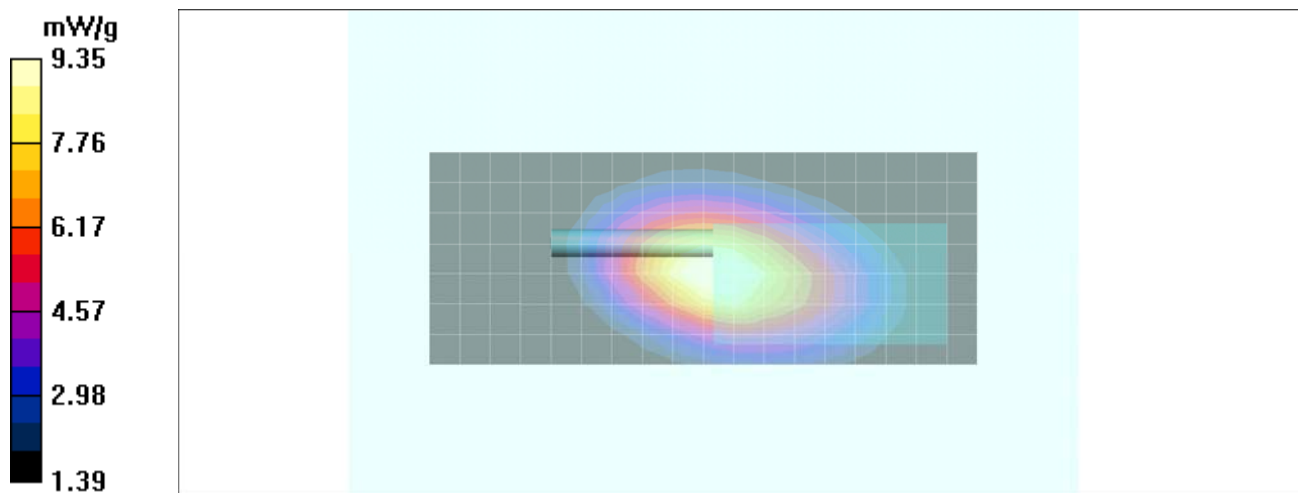

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 75 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #7 (B7)

Date Tested: 01/26/2011

### Body-worn SAR - KRA-23M "Antenna A" – KBP-5 9V AAx6 "Battery d" – 463.3 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.3°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 463.3 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 463.3$  MHz;  $\sigma = 0.913$  mho/m;  $\epsilon_r = 57.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.7 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 7.27 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 103.3 V/m; Power Drift = -1.23 dB


Peak SAR (extrapolated) = 10.9 W/kg

**SAR(1 g) = 7.6 mW/g; SAR(10 g) = 5.56 mW/g**

Maximum value of SAR (measured) 7.92 mW/g

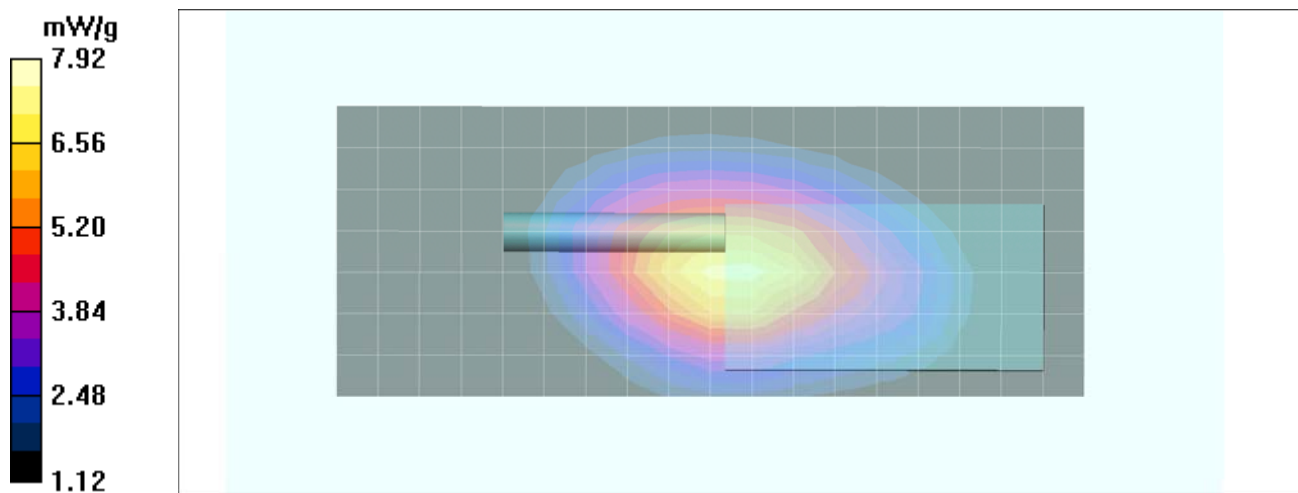

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 76 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #8 (B8)

Date Tested: 01/04/2011

### Body-worn SAR - KRA-23M2 “Antenna B” – KNB-55L Li-ion “Battery b” – 512.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.0°C; Fluid Temp: 22.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.972 \text{ mho/m}$ ;  $\epsilon_r = 58.5$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 9.29 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 90.6 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 12.9 W/kg

**SAR(1 g) = 8.94 mW/g; SAR(10 g) = 6.43 mW/g**

Maximum value of SAR (measured) 9.39 mW/g

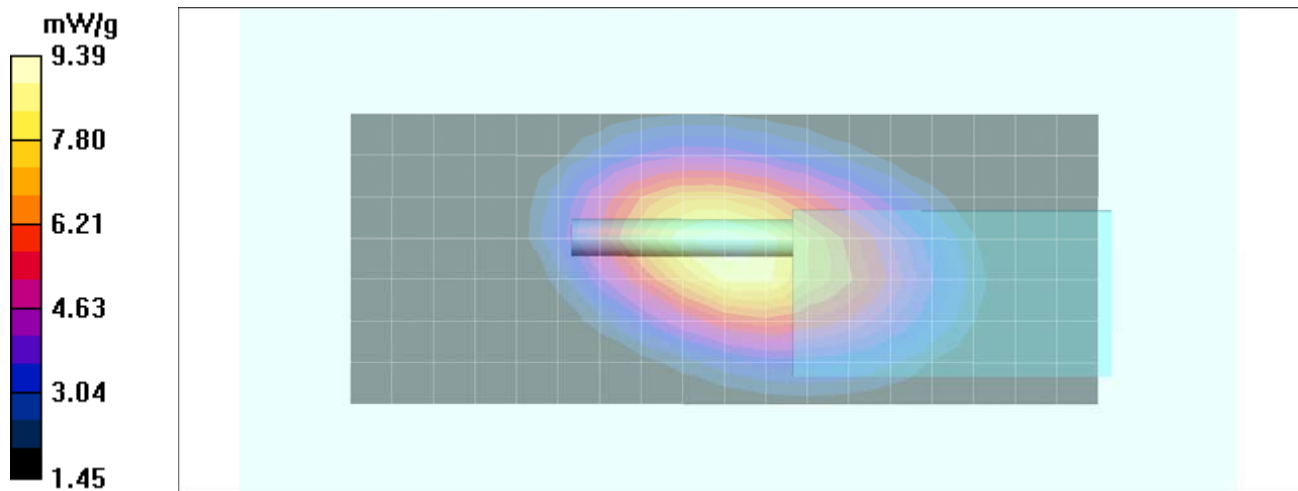

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 77 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #9 (B9)

Date Tested: 01/04/2011

### Body-worn SAR - KRA-23M2 “Antenna B” – KNB-55L Li-ion “Battery b” – 498.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.0°C; Fluid Temp: 22.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 498 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 498 \text{ MHz}$ ;  $\sigma = 0.96 \text{ mho/m}$ ;  $\epsilon_r = 58.4$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 6.77 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 86.3 V/m; Power Drift = -0.480 dB




Peak SAR (extrapolated) = 9.76 W/kg

**SAR(1 g) = 6.6 mW/g; SAR(10 g) = 4.67 mW/g**

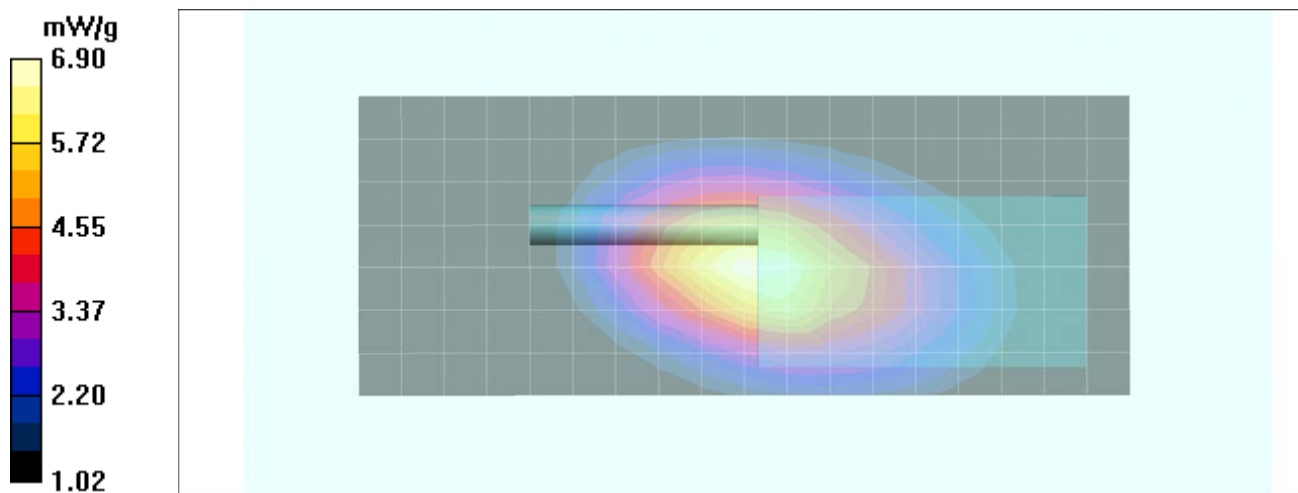Maximum value of SAR (measured) 6.90 mW/g



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 78 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #10 (B10)

Date Tested: 01/26/2011

### Body-worn SAR - KRA-23M2 “Antenna B” – KNB-57L Li-ion “Battery a” – 512.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.3°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.96 \text{ mho/m}$ ;  $\epsilon_r = 57.2$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.6 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 8.41 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 94.9 V/m; Power Drift = -0.475 dB

Peak SAR (extrapolated) = 11.6 W/kg

**SAR(1 g) = 7.87 mW/g; SAR(10 g) = 5.57 mW/g**

Maximum value of SAR (measured) 8.28 mW/g

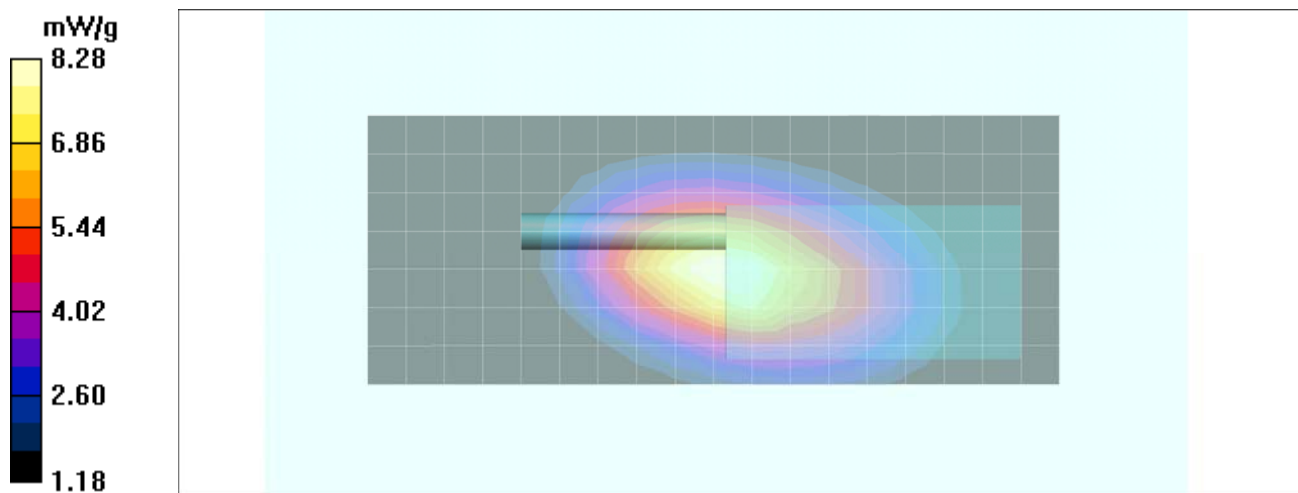

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 79 of 361



	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #11 (B11)

Date Tested: 01/26/2011

### Body-worn SAR - KRA-23M2 “Antenna B” – KNB-56N Ni-MH “Battery c” – 512.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.3°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.96 \text{ mho/m}$ ;  $\epsilon_r = 57.2$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.7 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.97 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 95.2 V/m; Power Drift = -0.311 dB

Peak SAR (extrapolated) = 11.9 W/kg

**SAR(1 g) = 8.09 mW/g; SAR(10 g) = 5.73 mW/g**

Maximum value of SAR (measured) 8.55 mW/g

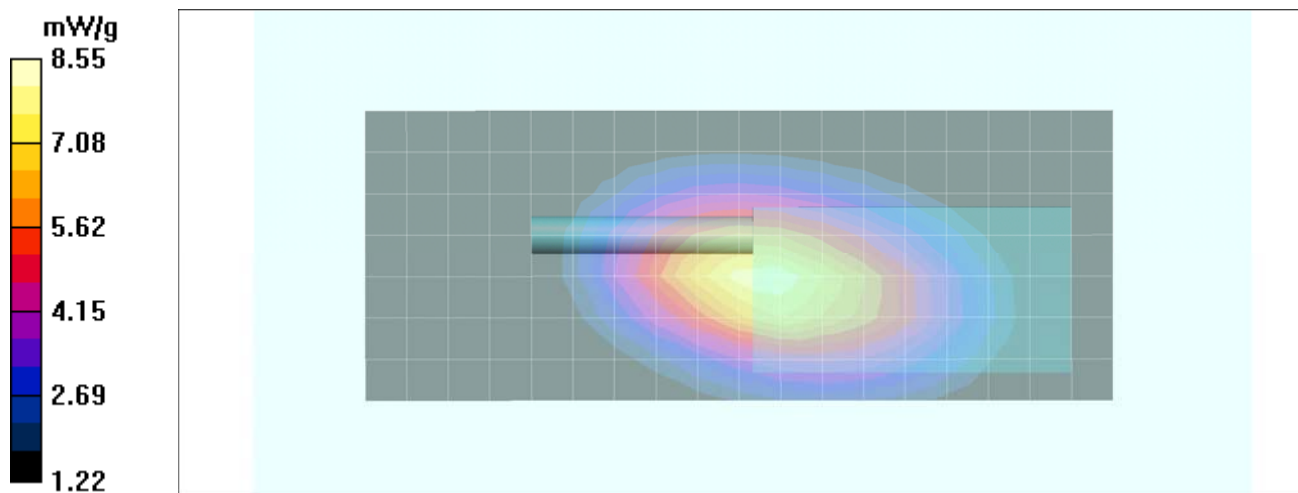

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 80 of 361



	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #12 (B12)

Date Tested: 01/26/2011

### Body-worn SAR - KRA-23M2 “Antenna B” – KBP-5 9V AAx6 “Battery d” – 512.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.3°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.96 \text{ mho/m}$ ;  $\epsilon_r = 57.2$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.7 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 6.83 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 95.4 V/m; Power Drift = -1.13 dB

Peak SAR (extrapolated) = 10.1 W/kg

**SAR(1 g) = 6.85 mW/g; SAR(10 g) = 4.89 mW/g**

Maximum value of SAR (measured) 7.18 mW/g

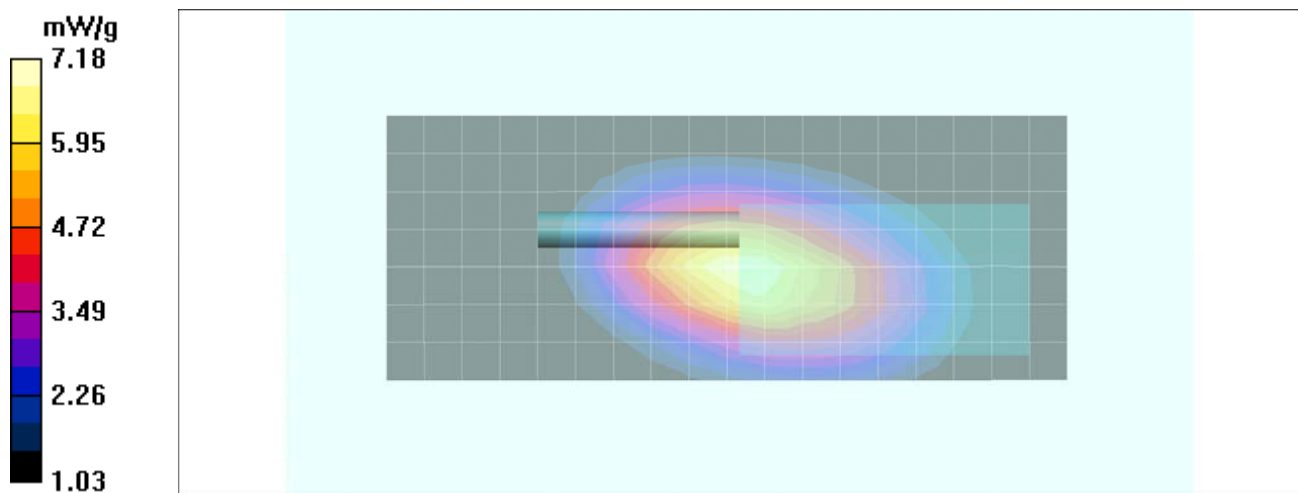

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 81 of 361

	<u>Dates of Evaluation (K3)</u> Jan. 4,6,26-28,31, 2011	<u>Test Report Serial No.</u> 121510ALH-T1070-S90U	<u>Test Report Revision No.</u> Rev. 1.3 (4th Release)	 Test Lab Certificate No. 2470.01
<u>Test Report Issue Date</u> April 14, 2011	<u>Dates of Evaluation (K/K2)</u> March 30 - April 7, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## Body SAR Plot #13 (B13)

Date Tested: 01/04/2011

### Body-worn SAR - KRA-27M "Antenna C" – KNB-55L Li-ion "Battery b" – 450.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.0°C; Fluid Temp: 22.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.93 \text{ mho/m}$ ;  $\epsilon_r = 58.8$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.82 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 94.1 V/m; Power Drift = -0.480 dB


Peak SAR (extrapolated) = 12.0 W/kg

**SAR(1 g) = 7.94 mW/g; SAR(10 g) = 5.77 mW/g**

Maximum value of SAR (measured) 8.25 mW/g

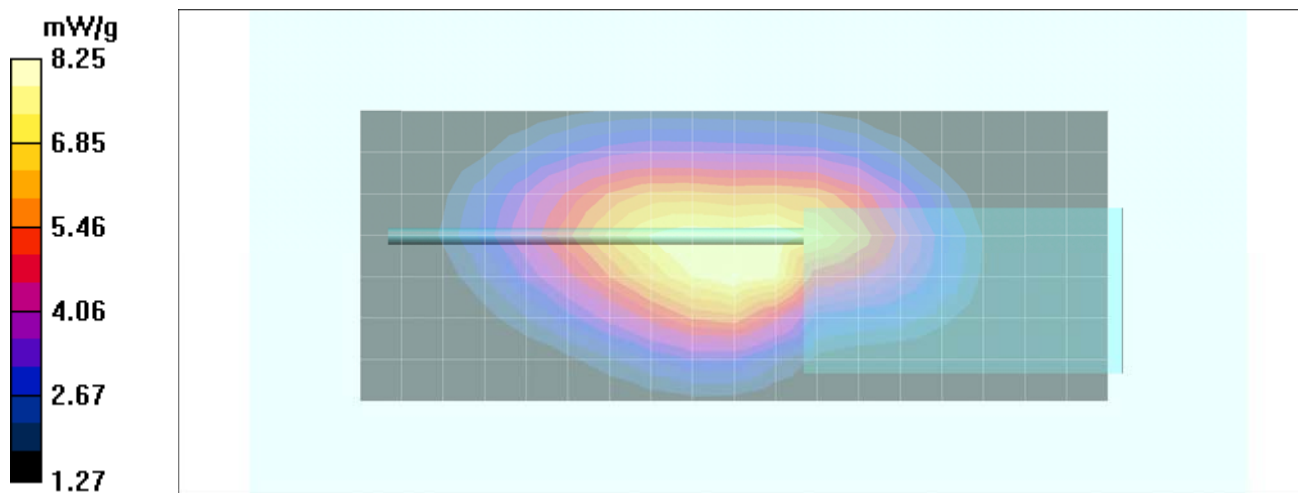

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 82 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #14 (B14)

Date Tested: 01/04/2011

### Body-worn SAR - KRA-27M “Antenna C” – KNB-55L Li-ion “Battery b” – 463.3 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.0°C; Fluid Temp: 22.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 463.3 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 463.3 \text{ MHz}$ ;  $\sigma = 0.92 \text{ mho/m}$ ;  $\epsilon_r = 59.1$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 10.4 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 106.1 V/m; Power Drift = -0.228 dB


Peak SAR (extrapolated) = 14.2 W/kg

**SAR(1 g) = 9.73 mW/g; SAR(10 g) = 7.05 mW/g**

Maximum value of SAR (measured) 10.2 mW/g

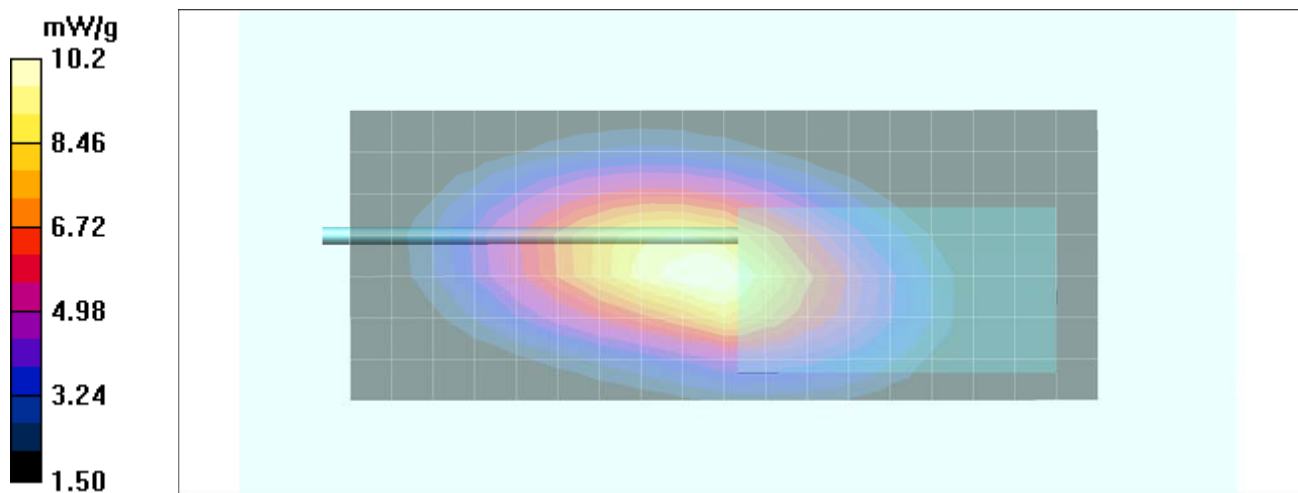

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 83 of 361

 Testing and Engineering Services Lab	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	  Test Lab Certificate No. 2470.01
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #15 (B15)

Date Tested: 01/04/2011

### Body-worn SAR - KRA-27M "Antenna C" – KNB-55L Li-ion "Battery b" – 476.7 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.0°C; Fluid Temp: 22.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 476.7 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 476.7$  MHz;  $\sigma = 0.94$  mho/m;  $\epsilon_r = 58.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.53 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 105.3 V/m; Power Drift = -0.428 dB

Peak SAR (extrapolated) = 13.9 W/kg

**SAR(1 g) = 9.46 mW/g; SAR(10 g) = 6.79 mW/g**

Maximum value of SAR (measured) 9.92 mW/g

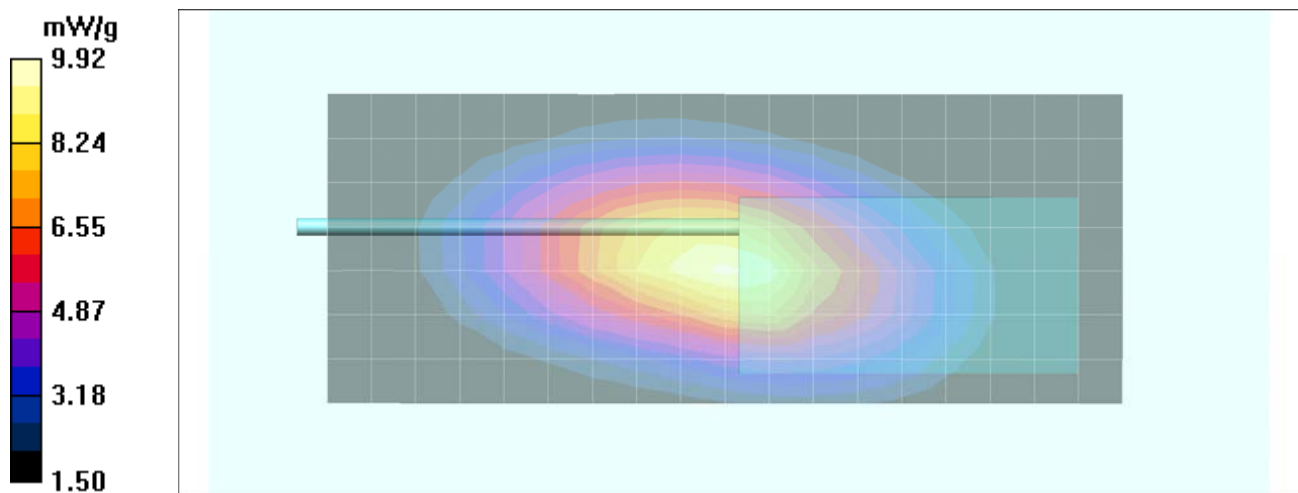

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 84 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #16 (B16)

Date Tested: 01/04/2011

### Body-worn SAR - KRA-27M "Antenna C" – KNB-55L Li-ion "Battery b" – 490.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.0°C; Fluid Temp: 22.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 490 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used:  $f = 490 \text{ MHz}$ ;  $\sigma = 0.96 \text{ mho/m}$ ;  $\epsilon_r = 58.4$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.78 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 94.7 V/m; Power Drift = -0.349 dB



Peak SAR (extrapolated) = 11.7 W/kg

**SAR(1 g) = 7.85 mW/g; SAR(10 g) = 5.6 mW/g**

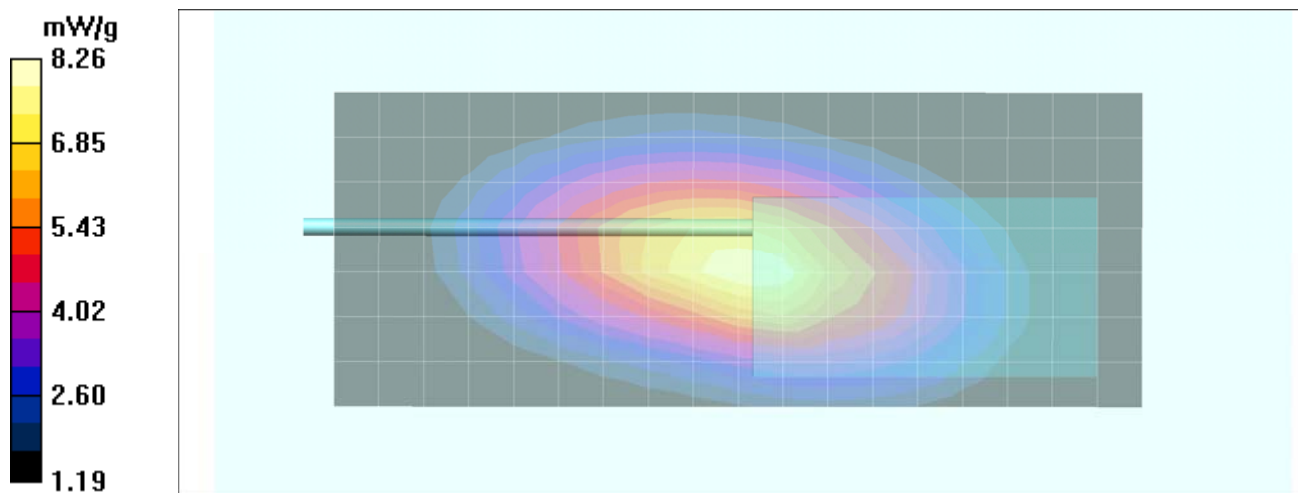Maximum value of SAR (measured) 8.26 mW/g



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 85 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #17 (B17)

Date Tested: 01/26/2011

### Body-worn SAR - KRA-27M "Antenna C" – KNB-57L Li-ion "Battery a" – 476.7 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.3°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 476.7 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 476.7 \text{ MHz}$ ;  $\sigma = 0.927 \text{ mho/m}$ ;  $\epsilon_r = 56.9$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.6 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 9.41 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 103.2 V/m; Power Drift = -0.228 dB

Peak SAR (extrapolated) = 13.3 W/kg

**SAR(1 g) = 9.1 mW/g; SAR(10 g) = 6.56 mW/g**

Maximum value of SAR (measured) 9.52 mW/g

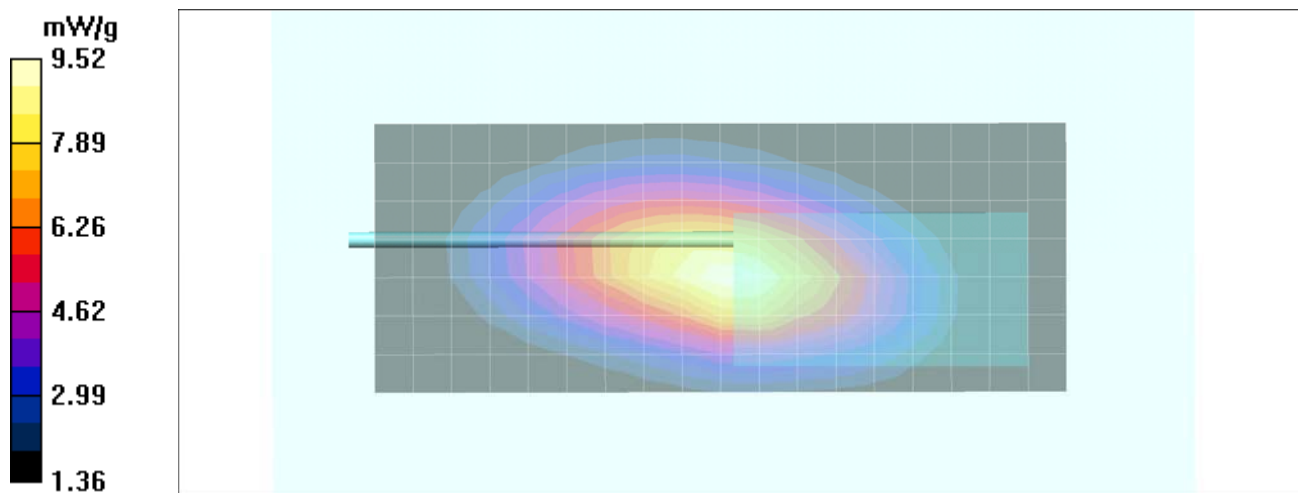

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 86 of 361



 Testing and Engineering Services Lab	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	  ACCREDITED Test Lab Certificate No. 2470.01
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #18 (B18)

Date Tested: 01/26/2011

### Body-worn SAR - KRA-27M "Antenna C" – KNB-56N Ni-MH "Battery c" – 476.7 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.3°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 476.7 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 476.7 \text{ MHz}$ ;  $\sigma = 0.927 \text{ mho/m}$ ;  $\epsilon_r = 56.9$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.7 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 10.1 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 106.4 V/m; Power Drift = -0.384 dB

Peak SAR (extrapolated) = 13.8 W/kg

**SAR(1 g) = 9.52 mW/g; SAR(10 g) = 6.9 mW/g**

Maximum value of SAR (measured) 9.94 mW/g

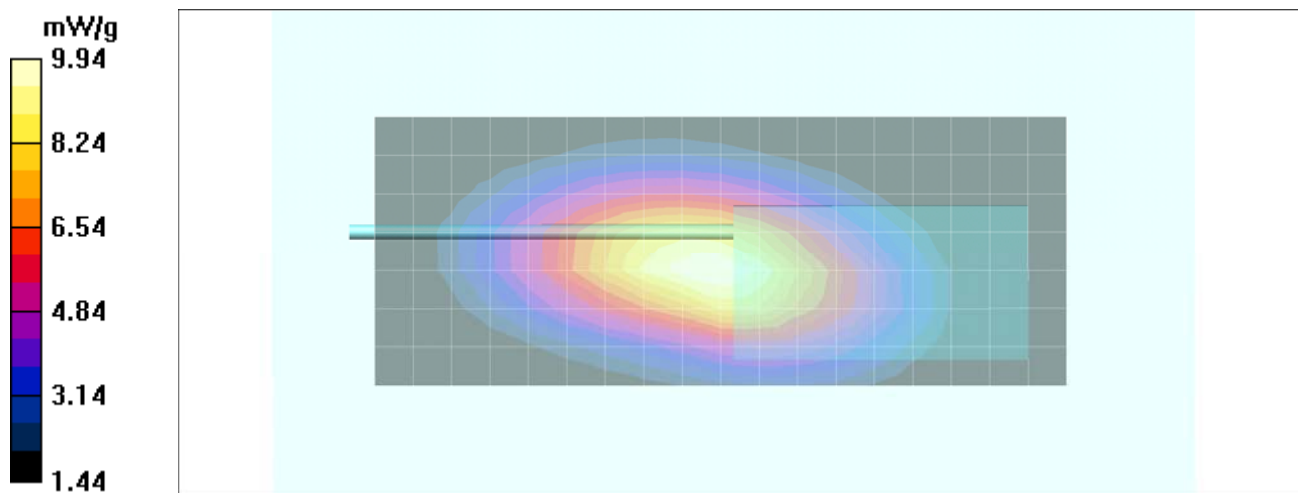

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 87 of 361



	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #19 (B19)

Date Tested: 01/26/2011

### Body-worn SAR - KRA-27M "Antenna C" – KBP-5 9V AAx6 "Battery d" – 476.7 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.3°C; Fluid Temp: 22.7°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 476.7 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 476.7 \text{ MHz}$ ;  $\sigma = 0.927 \text{ mho/m}$ ;  $\epsilon_r = 56.9$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.7 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 8.67 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 100.5 V/m; Power Drift = -1.17 dB

Peak SAR (extrapolated) = 10.9 W/kg

**SAR(1 g) = 7.58 mW/g; SAR(10 g) = 5.55 mW/g**

Maximum value of SAR (measured) 7.92 mW/g

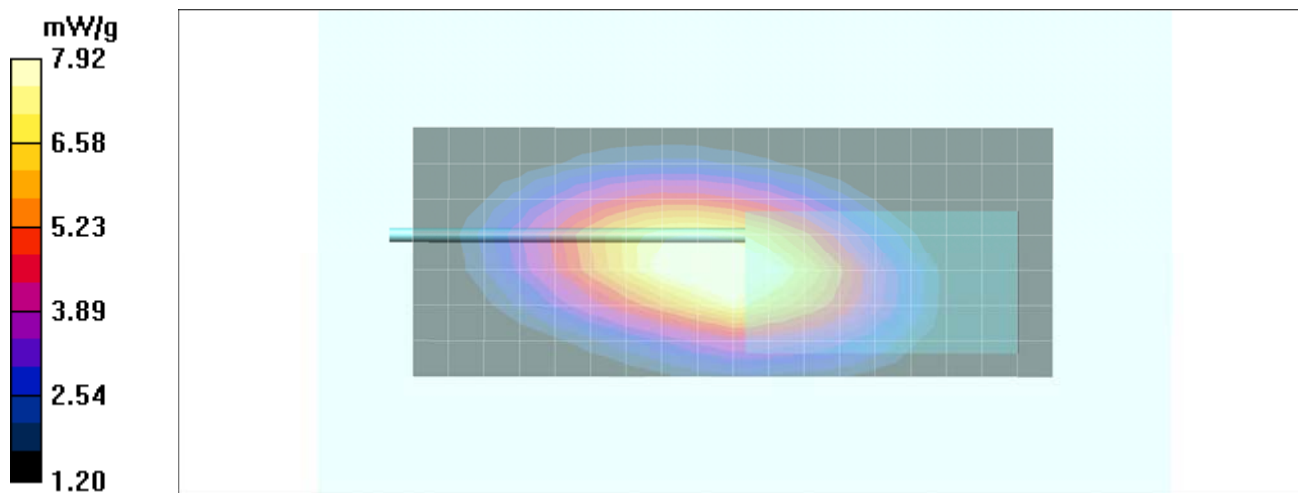

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 88 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	Test Lab Certificate No. 2470.01
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #20 (B20)

Date Tested: 01/04/2011

### Body-worn SAR - KRA-27M2 “Antenna D” – KNB-55L Li-ion “Battery b” – 512.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.0°C; Fluid Temp: 22.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 512 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 512 \text{ MHz}$ ;  $\sigma = 0.972 \text{ mho/m}$ ;  $\epsilon_r = 58.5$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 13.0 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 104.3 V/m; Power Drift = -0.261 dB

Peak SAR (extrapolated) = 18.4 W/kg

**SAR(1 g) = 12.7 mW/g; SAR(10 g) = 9.08 mW/g**


Maximum value of SAR (measured) 13.2 mW/g

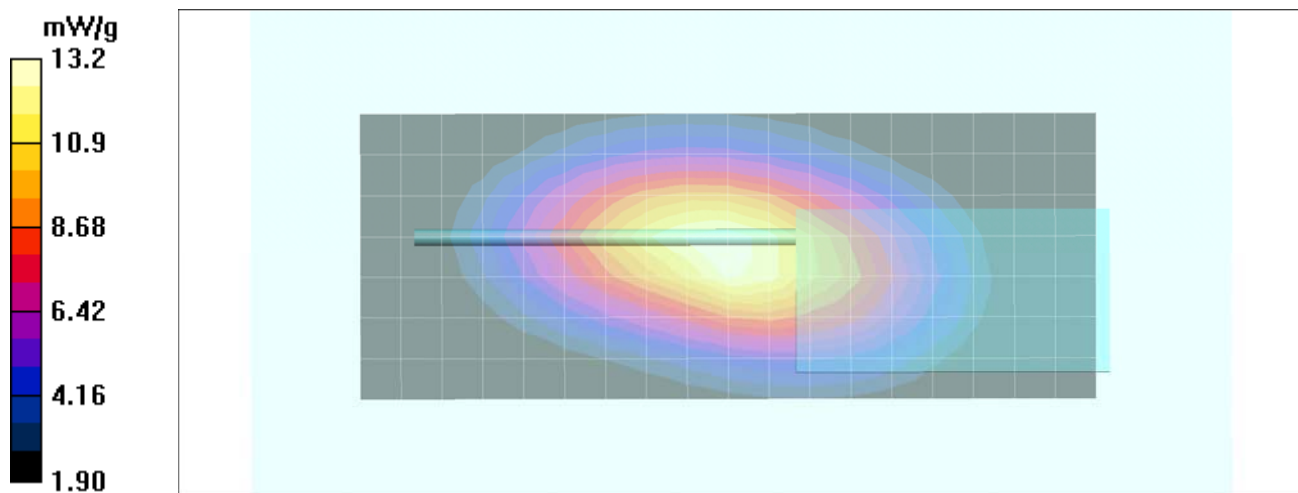


<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	KENWOOD
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 89 of 361

	<u>Dates of Evaluation (K3)</u> Jan. 4,6,26-28,31, 2011	<u>Test Report Serial No.</u> 121510ALH-T1070-S90U	<u>Test Report Revision No.</u> Rev. 1.3 (4th Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> April 14, 2011	<u>Dates of Evaluation (K/K2)</u> March 30 - April 7, 2011	<u>Description of Test(s)</u> Specific Absorption Rate	

## Z-Axis Scan

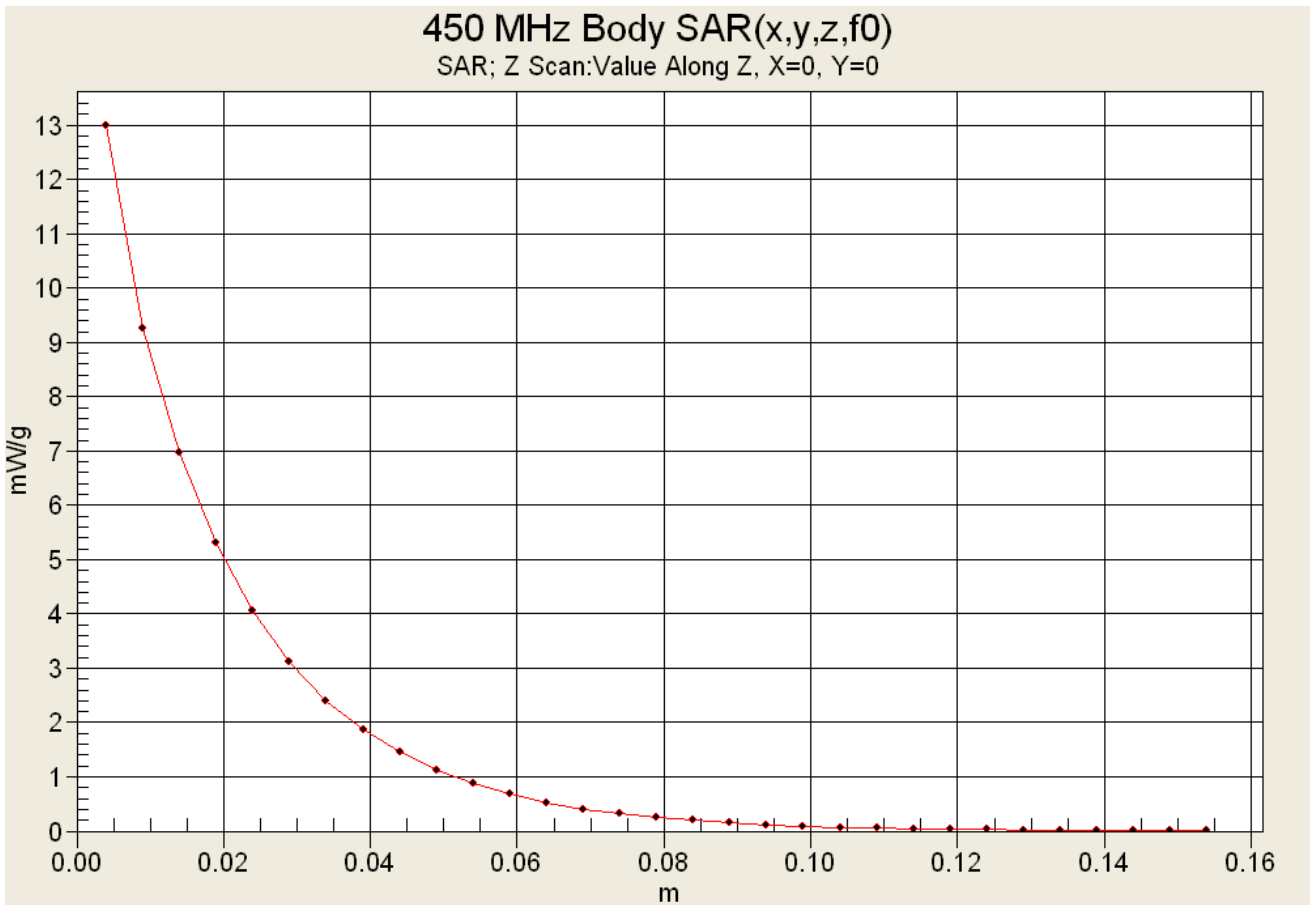

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH431000</b>	<b>DUT Models:</b>	<b>NX-320-K/K2/K3</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable UHF-H PTT Radio Transceiver</b>	<b>Transmitter Frequency Range:</b>		<b>450.0 - 512.0 MHz</b>		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 90 of 361

	<u>Dates of Evaluation (K3)</u>	<u>Test Report Serial No.</u>	<u>Test Report Revision No.</u>	
	Jan. 4,6,26-28,31, 2011	121510ALH-T1070-S90U	Rev. 1.3 (4th Release)	
<u>Test Report Issue Date</u>	<u>Dates of Evaluation (K/K2)</u>	<u>Description of Test(s)</u>	<u>RF Exposure Category</u>	
April 14, 2011	March 30 - April 7, 2011	Specific Absorption Rate	Occupational (Controlled)	

## Body SAR Plot #21 (B21)

Date Tested: 01/04/2011

### Body-worn SAR - KRA-27M2 “Antenna D” – KNB-55L Li-ion “Battery b” – 498.0 MHz

**DUT: Kenwood NX-320-K3; Type: Portable FM UHF-H PTT Radio Transceiver; Serial: No. 10**  
**Default Audio Accessory: Noise Reduction Headset (Behind-the-Head) (P/N: KHS-10-BH)**  
**Body-worn Accessory 1: Belt-Clip (P/N: KBH-12)**

Ambient Temp: 23.0°C; Fluid Temp: 22.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 498 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used (interpolated):  $f = 498 \text{ MHz}$ ;  $\sigma = 0.96 \text{ mho/m}$ ;  $\epsilon_r = 58.4$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

#### Body-worn SAR – 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (8x19x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 12.6 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 117.8 V/m; Power Drift = -0.305 dB

Peak SAR (extrapolated) = 17.6 W/kg

**SAR(1 g) = 12.1 mW/g; SAR(10 g) = 8.68 mW/g**

Maximum value of SAR (measured) 12.7 mW/g

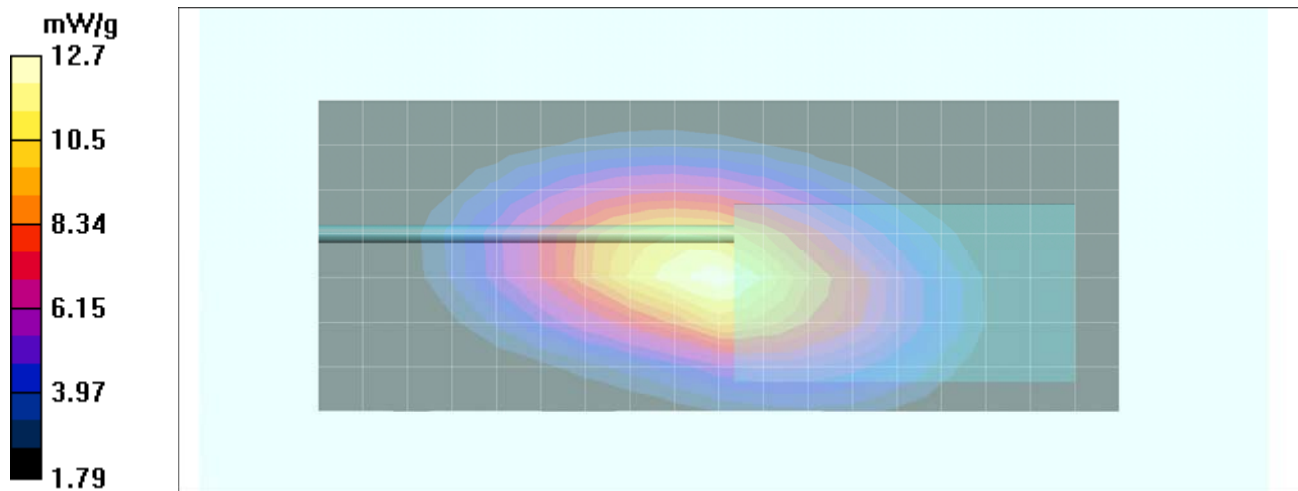

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH431000	<b>DUT Models:</b>	NX-320-K/K2/K3	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable UHF-H PTT Radio Transceiver	<b>Transmitter Frequency Range:</b>		450.0 - 512.0 MHz		
2011 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 91 of 361