



	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## DECLARATION OF COMPLIANCE - SAR RF EXPOSURE EVALUATION (FCC)

<b>Test Lab Information</b>	<b>Name</b>	<b>CELLTECH LABS INC.</b>			
	<b>Address</b>	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada			
<b>Test Lab Accreditation(s)</b>	<b>A2LA</b>	ISO/IEC 17025:2005 (A2LA Test Lab Certificate No. 2470.01)			
<b>Applicant Information</b>	<b>Name</b>	<b>KENWOOD USA CORPORATION</b>			
	<b>Address</b>	3970 Johns Creek Court, Suite 100, Suwanee, GA 30024 United States			
<b>Standards &amp; Procedures Applied</b>	<b>FCC</b>	47 CFR §2.1093			
		KDB 447498 D01v04			
		OET Bulletin 65, Supplement C			
	<b>IEEE</b>	1528-2003			
	<b>IEC</b>	62209-1:2005			
<b>Device Classification(s)</b>	<b>FCC</b>	Licensed Non-Broadcast Transmitter Held to Face (TNF) - FCC Part 90			
<b>Device RF Exposure Category</b>	<b>FCC</b>	Occupational / Controlled			
<b>Application Type(s)</b>	<b>FCC</b>	TCB Certification			
<b>Device Identifier(s)</b>	<b>FCC ID:</b>	ALH437300			
<b>Device Model(s)</b>	TK-3000-1				
<b>Date of Sample Receipt</b>	October 07, 2010				
<b>Date(s) of Evaluations</b>	October 07, 2010				
<b>Test Sample Serial No.</b>	No. 00000028 (Identical Prototype)				
<b>Hardware Revision No.</b>	Revision 0				
<b>Firmware Revision No.</b>	Revision 0				
<b>Device Description</b>	Portable FM UHF Push-To-Talk (PTT) Radio Transceiver				
<b>Transmit Frequency Range(s)</b>	440.0 - 480.0 MHz				
<b>Co-located Transmitter(s)</b>	None				
<b>Manufacturer's Rated Output Power</b>	4 Watts (Conducted)				
<b>Manufacturer's Tolerance Spec.</b>	+/- 0 dB				
<b>RF Output Power Level(s) Tested</b>	36.0 dBm	4.0 Watts	440.0 MHz	Average Conducted	
	36.0 dBm	4.0 Watts	453.0 MHz	Average Conducted	
	36.0 dBm	4.0 Watts	467.0 MHz	Average Conducted	
	36.0 dBm	4.0 Watts	480.0 MHz	Average Conducted	
<b>Antenna Type(s) Tested</b>	Detachable Whip	P/N: T90-0196-05 UHF K	Nc = 4	Length: 150 mm	
<b>Battery Type(s) Tested</b>	Lithium-ion	7.4 V	1130 mAh	P/N: KNB-63L	
<b>Body-worn Accessories Tested</b>	Metal Belt-Clip			P/N: J29-0751-05	
<b>Audio Accessories Tested</b>	Speaker-Microphone			P/N: KMC-45	
<b>Maximum SAR Level(s) Evaluated</b>	Face-held	3.35 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exp.
	Body-worn	4.41 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exp.
<b>FCC/IC Spatial Peak SAR Limit</b>	Head/Body	8.0 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exp.
Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 for the Occupational / Controlled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), IEEE Standard 1528-2003 and IEC International Standard 62209-1:2005. All measurements were performed in accordance with the SAR system manufacturer recommendations.					
I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.					
This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.					
The results and statements contained in this report pertain only to the device(s) evaluated.					
<b>Test Report Approved By</b>			<b>Sean Johnston</b>	<b>Lab Manager</b>	<b>Celltech Labs Inc.</b>

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>		<b>440.0 - 480.0 MHz</b>		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 1 of 48

<b>TABLE OF CONTENTS</b>	
1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS	4
4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ( $f < 0.5$ GHz)	5
5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	5
6.0 NO. OF TEST CHANNELS ( $N_c$ )	5
7.0 MANUFACTURER'S DISCLOSED ACCESSORY LISTING	6
8.0 SAR MEASUREMENT SUMMARY	6
9.0 SAR SCALING (TUNE-UP TOLERANCE)	7
10.0 FLUID DIELECTRIC PARAMETERS	7
11.0 DETAILS OF SAR EVALUATION	8
12.0 SAR EVALUATION PROCEDURES	8
13.0 SYSTEM PERFORMANCE CHECK	9
14.0 SIMULATED EQUIVALENT TISSUES	10
15.0 SAR LIMITS	10
16.0 ROBOT SYSTEM SPECIFICATIONS	11
17.0 PROBE SPECIFICATION (ET3DV6)	12
18.0 SIDE PLANAR PHANTOM	12
19.0 BARSKI PLANAR PHANTOM	12
20.0 DEVICE HOLDER	12
21.0 TEST EQUIPMENT LIST	13
22.0 MEASUREMENT UNCERTAINTIES	14
23.0 REFERENCES	15
APPENDIX A - SAR MEASUREMENT DATA	16
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	28
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	31
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	34
APPENDIX E - DIPOLE CALIBRATION	46
APPENDIX F - PROBE CALIBRATION	47
APPENDIX G - BARSKI PHANTOM CERTIFICATE OF CONFORMITY	48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	



### REVISION HISTORY

REVISION NO.	DESCRIPTION	IMPLEMENTED BY	RELEASE DATE
1.0	Initial Release	Jon Hughes	October 15, 2010

### TEST REPORT SIGN-OFF

DEVICE TESTED BY	REPORT PREPARED BY	QA REVIEW BY	REPORT APPROVED BY
Scott Kulifaj	Scott Kulifaj	Jon Hughes	Sean Johnston

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>	440.0 - 480.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 1.0 INTRODUCTION

This measurement report demonstrates that the Kenwood USA Corporation Model: TK-3000-1 Portable FM UHF PTT Radio Transceiver complies with the SAR (Specific Absorption Rate) RF exposure requirements FCC 47 CFR §2.1093 (see reference [1]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C 01-01 (see reference [2]), IEEE Standard 1528-2003 (see reference [3]) and IEC Standard 62209-1:2005 (see reference [4]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

## 2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (joystick), and remote control is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses a controller with a built in VME-bus computer.

## 3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS



### MEASURED RF CONDUCTED OUTPUT POWER LEVELS

Test Frequency	Mode	dBm	Watts	Method
440.0 MHz	CW	36.0	4.0	Average Conducted
453.0 MHz	CW	36.0	4.0	Average Conducted
467.0 MHz	CW	36.0	4.0	Average Conducted
480.0 MHz	CW	36.0	4.0	Average Conducted

#### Notes

- The test channels were selected in accordance with the procedures specified in FCC KDB 447498 Section 6) c) (see reference [5]).
- The RF conducted output power levels of the DUT were measured by Celltech prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter at the external antenna connector of the radio in accordance with FCC 47 CFR §2.1046 (see reference [10]).

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	KENWOOD
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

#### 4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ( $f \leq 0.5$ GHz)

FCC SAR Evaluation Power Thresholds for PTT Devices, $f \leq 0.5$ GHz*			Manufacturer's Rated RF Output Power	
Exposure Conditions	P mW (General Population)	P mW (Occupational)	100% PTT Duty Cycle	50% PTT Duty Cycle
Held to face, $d \geq 2.5$ cm	250	1250	4 Watts	2 Watts
Body-worn, $d \geq 1.5$ cm	200	1000	4 Watts	2 Watts
Body-worn, $d \geq 1.0$ cm	150	750		
1. The time-averaged output power, corresponding to the required PTT duty factor, is compared with these thresholds. 2. The closest distance between the user and the device or its antenna is used to determine the power thresholds. * Per FCC KDB 447498 D01v04 Section 5)b)i) (see reference [5]).			1. The conducted output power level of the DUT exceeds the FCC threshold for SAR evaluation requirement.	

#### 5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within  $\pm 50$  MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within  $\pm 100$  MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals,  $\pm 25$  MHz < 300 MHz and  $\pm 50$  MHz  $\geq 300$  MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [6]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	$\pm 50$ MHz ( $\geq 300$ MHz)
450 MHz	440.0 MHz	10 MHz	< 50 MHz
	453.0 MHz	3 MHz	< 50 MHz
	467.0 MHz	17 MHz	< 50 MHz
	480.0 MHz	30 MHz	< 50 MHz



Note: Probe calibration and measurement frequency interval is < 50 MHz; therefore the additional steps were not required.

#### 6.0 NO. OF TEST CHANNELS ( $N_c$ )

Antenna Part No.	Test Frequency Range	No. of Test Channels ( $N_c$ )	Test Frequencies
T90-0196-05 UHF K	440.0 - 480.0 MHz	4	440.0, 453.0, 467.0, 480.0 MHz

Note: The number of test channels ( $N_c$ ) were calculated in accordance with the procedures specified in FCC KDB 447498 Section 6) c) (see reference [5]).

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	KENWOOD
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 7.0 MANUFACTURER'S DISCLOSED ACCESSORY LISTING

Part No.	Description	Accessory Type
T90-0196-05 UHF K	Whip Antenna	Antenna
KNB-63L	Li-Ion Battery (7.4V, 1130mAh)	Battery
J29-0751-05	Belt-Clip (contains metal)	Body-worn
KMC-45	Speaker-Microphone	Audio

Notes:

1. Manufacturer's disclosed accessory listing information provided by Kenwood USA Corporation.

## 8.0 SAR MEASUREMENT SUMMARY

### SAR EVALUATION RESULTS



Test Config.	Test Date	Test Freq.	Antenna Part No.	Battery Type	Accessories		Device Distance to Planar Phantom		Cond. Power Before Test Watts	Measured SAR 1g (W/kg)		SAR Drift During Test dB	Scaled SAR with droop 1g (W/kg)		
		MHz			Body	Audio	DUT	ANT.		PTT Duty Cycle			100%	50%	
										100%	50%				
FACE	Oct-7	440.0	T90-0196-05 UHF K	Li-Ion	n/a	n/a	2.5 cm	3.4 cm	4.0	4.67	2.34	-0.464	5.20	2.60	
		453.0			n/a	n/a			4.0	4.76	2.38		5.41	2.71	
		467.0			n/a	n/a			4.0	6.05	3.03		-0.444	6.70	3.35
		480.0			n/a	n/a			4.0	5.90	2.95		-0.499	6.62	3.31
BODY	Oct-7	440.0	T90-0196-05 UHF K	Li-Ion	Belt-Clip	SM	1.8 cm	2.5 cm	4.0	5.71	2.86	-0.314	6.14	3.07	
		Belt-Clip			SM	4.0			6.04	3.02	-0.220		6.35	3.18	
		Belt-Clip			SM	4.0			8.18	4.09	-0.327		8.82	4.41	
		Belt-Clip			SM	4.0			7.87	3.94	-0.463		8.76	4.38	
<b>SAR LIMIT(S)</b>			<b>HEAD &amp; BODY</b>			<b>SPATIAL PEAK</b>			<b>RF EXPOSURE CATEGORY</b>						
FCC 47 CFR 2.1093			8.0 W/kg			averaged over 1 gram			Occupational / Controlled						

#### Notes

1. Device Test Mode = CW (Continuous Wave)
2. Phantom Type = Barski Fiberglass Planar
3. SM = Speaker-Microphone
4. n/a = not applicable

Test Date	Fluid Type	Ambient Temp.	Fluid Temp.	Fluid Depth	Atmospheric Pressure	Relative Humidity	$\rho$ (Kg/m <sup>3</sup> )
October 7	450 Head	23.8 °C	22.6 °C	≥ 15 cm	101.1 kPa	35%	1000
October 7	450 Body	24.0 °C	22.5 °C	≥ 15 cm	101.1 kPa	35%	1000

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	KENWOOD
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 6 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 9.0 SAR SCALING (TUNE-UP TOLERANCE)

SAR scaling is not applicable based on the manufacturer's rated power and tolerance specification is 4 Watts +/- 0 dB.



## 10.0 FLUID DIELECTRIC PARAMETERS

BODY DIELECTRIC PARAMETERS						
Date: October 7, 2010		Tissue: Body		Frequency: 450 MHz		
Frequency (GHz)	Test $\epsilon_r$	Test $\sigma$	450MHz Target	450MHz Target	Deviation Permittivity	Deviation Conductivity
0.44	57.8	0.93	56.7	0.94	1.98%	-1.06%
0.45	58.2	0.96	56.7	0.94	2.57%	2.13%
0.453*	58.2	0.96	56.7	0.94	2.65%	2.13%
0.46	58.3	0.97	56.7	0.94	2.89%	3.19%
0.467*	58.1	0.97	56.7	0.94	2.47%	3.19%
0.47	58.0	0.97	56.7	0.94	2.33%	3.19%
0.48	57.9	0.97	56.7	0.94	2.06%	3.19%

HEAD DIELECTRIC PARAMETERS						
Date: October 7, 2010		Tissue: Body		Frequency: 450 MHz		
Frequency (GHz)	Test $\epsilon_r$	Test $\sigma$	450MHz Target	450MHz Target	Deviation Permittivity	Deviation Conductivity
0.44	44.9	0.88	43.5	0.87	3.31%	1.15%
0.45	45.2	0.89	43.5	0.87	4.00%	2.30%
0.453*	45.1	0.89	43.5	0.87	3.68%	2.30%
0.46	44.8	0.90	43.5	0.87	2.92%	3.45%
0.467*	44.3	0.90	43.5	0.87	1.84%	3.45%
0.47	44.1	0.90	43.5	0.87	1.43%	3.45%
0.48	44.4	0.91	43.5	0.87	2.16%	4.60%

\*Note: Interpolated values using DASY4 Software

Applicant:	Kenwood USA Corporation	FCC ID:	ALH437300	Model(s):	TK-3000-1	KENWOOD
DUT Type:	Portable FM UHF PTT Radio Transceiver	Transmit Frequency Range:		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 7 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 11.0 DETAILS OF SAR EVALUATION



1. The number of test frequencies and the test channels evaluated for SAR were selected in accordance with the procedures described in FCC KDB 447498 Section 6) c) (see reference [5]).
2. The face-held SAR evaluations were performed with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front side of the DUT and the outer surface of the planar phantom.
3. The body-worn SAR evaluations were performed with the belt-clip body-worn accessory attached to the DUT and touching the outer surface of the planar phantom (battery parallel to phantom). The SAR evaluations were performed with the speaker-microphone audio accessory connected to the DUT.
4. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
5. The SAR droop of the DUT was measured by the DASY4 system for the duration of the SAR evaluations. A SAR-versus-Time droop evaluation was performed for the maximum SAR level configuration (see Appendix A for SAR droop evaluation graph).
6. The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within +/-2°C of the fluid temperature reported during the dielectric parameter measurements.
7. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
8. The DUT was tested at the maximum conducted output power level preset by the manufacturer in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.

## 12.0 SAR EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.  
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.  
An area scan was determined as follows:
- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.  
A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>		<b>440.0 - 480.0 MHz</b>		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 8 of 48



	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

### 13.0 SYSTEM PERFORMANCE CHECK


Prior to the SAR evaluations a daily system check was performed with a planar phantom and SPEAG 450 MHz dipole (see Appendix B) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [3]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 398 mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$  from the SAR system manufacturer's dipole calibration target SAR value (see Appendix E for system manufacturer's dipole calibration procedures).

#### SYSTEM PERFORMANCE CHECK EVALUATION

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		SPEAG Target	Meas.	Dev.	SPEAG Target	Meas.	Dev.	SPEAG Target	Meas.	Dev.						
Oct-7	Body 450	1.78 $\pm 10\%$	1.91	+7.3%	56.7 $\pm 5\%$	58.2	+2.6%	0.94 $\pm 5\%$	0.96	+2.1%	1000	24.3	23.0	$\geq 15$	35	101.1

#### Notes

- The target SAR values are the measured values from the SAR system manufacturer's dipole calibration (see Appendix E).
- The target dielectric parameters are the nominal values from the SAR system manufacturer's dipole calibration (see Appendix E).
- The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within  $\pm 2^\circ\text{C}$  of the fluid temperature reported during the dielectric parameter measurements.
- The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).

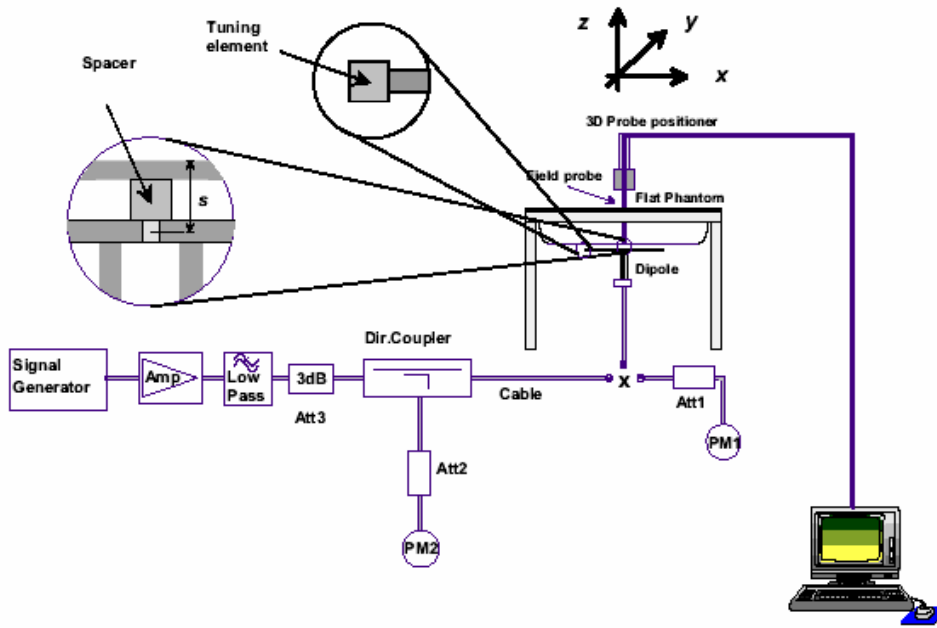



System Performance Check Measurement Setup (IEEE Standard 1528-2003)



SPEAG 450 MHz Validation Dipole Setup

Applicant:	Kenwood USA Corporation	FCC ID:	ALH437300	Model(s):	TK-3000-1	KENWOOD
DUT Type:	Portable FM UHF PTT Radio Transceiver	Transmit Frequency Range:	440.0 - 480.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 14.0 SIMULATED EQUIVALENT TISSUES



The simulated equivalent tissue recipes in the table below are derived from the SAR system manufacturer's suggested recipes in the DASY4 manual (see references [7] and [8]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2003 (see reference [3]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz HEAD	450 MHz BODY
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

## 15.0 SAR LIMITS

SAR RF EXPOSURE LIMITS		
FCC 47 CFR 2.1093	General Population	Occupational
<b>Spatial Average</b> (averaged over the whole body)	0.08 W/kg	0.4 W/kg
<b>Spatial Peak</b> (averaged over any 1 g of tissue)	1.6 W/kg	<b>8.0 W/kg</b>
<b>Spatial Peak</b> (hands/wrists/feet/ankles averaged over 10 g)	4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.		
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.		
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.		



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	KENWOOD
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 10 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


## 16.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
<b>Positioner</b>	Stäubli Unimation Corp. Robot Model: RX60L
<b>Repeatability</b>	0.02 mm
<b>No. of axis</b>	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
<b>Processor</b>	AMD Athlon XP 2400+
<b>Clock Speed</b>	2.0 GHz
<b>Operating System</b>	Windows XP Professional
<u>Data Converter</u>	
<b>Features</b>	Signal Amplifier, multiplexer, A/D converter, and control logic
<b>Software</b>	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
<b>Connecting Lines</b>	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
<b>Function</b>	Real-time data evaluation for field measurements and surface detection
<b>Hardware</b>	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
<b>Connections</b>	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
<b>Model</b>	ET3DV6
<b>Serial No.</b>	1590
<b>Construction</b>	Triangular core fiber optic detection system
<b>Frequency</b>	10 MHz to 6 GHz
<b>Linearity</b>	±0.2 dB (30 MHz to 3 GHz)
<u>Evaluation Phantom</u>	
<b>Type</b>	Side Planar Phantom
<b>Shell Material</b>	Plexiglas
<b>Bottom Thickness</b>	2.0 mm ± 0.1 mm
<b>Inner Dimensions</b>	72.6 cm (L) x 20.3 cm (W) x 20.3 cm (H)
<u>Validation Phantom</u>	
<b>Type</b>	Barski Planar Phantom
<b>Shell Material</b>	Fiberglass
<b>Thickness</b>	2.0 ±0.1 mm
<b>Volume</b>	Approx. 70 liters


<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	KENWOOD
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 11 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


## 17.0 PROBE SPECIFICATION (ET3DV6)

<p><b>Construction:</b> Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)</p> <p><b>Calibration:</b> In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy <math>\pm 8\%</math>)</p> <p><b>Frequency:</b> 10 MHz to &gt; 6 GHz; Linearity: <math>\pm 0.2</math> dB (30 MHz to 3 GHz)</p> <p><b>Directivity:</b> <math>\pm 0.2</math> dB in head tissue (rotation around probe axis) <math>\pm 0.4</math> dB in head tissue (rotation normal to probe axis)</p> <p><b>Dynamic Range:</b> 5 <math>\mu</math>W/g to &gt; 100 mW/g; Linearity: <math>\pm 0.2</math> dB</p> <p><b>Surface Detect:</b> <math>\pm 0.2</math> mm repeatability in air and clear liquids over diffuse reflecting surfaces</p> <p><b>Dimensions:</b> Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm</p> <p><b>Application:</b> General dosimetry up to 3 GHz; Compliance tests of mobile phone</p>	
<b>ET3DV6 E-Field Probe</b>	


## 18.0 SIDE PLANAR PHANTOM
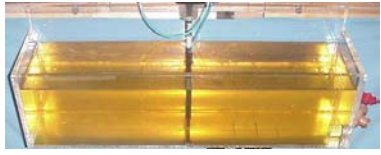
<p>The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.</p>	
<b>Plexiglas Side Planar Phantom</b>	



## 19.0 BARSKI PLANAR PHANTOM

<p>The Barski Planar Phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table. The planar phantom was used for the DUT SAR evaluations and the system performance check evaluations. See Appendix G for dimensions and specifications of the Barski Planar Phantom.</p>	
<b>Barski Planar Phantom</b>	

## 20.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. For evaluations of larger devices a Plexiglas platform is attached to the device holder.</p>	
<b>Device Holder</b>	



<b>Applicant:</b> Kenwood USA Corporation	<b>FCC ID:</b> ALH437300	<b>Model(s):</b> TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b> Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b> 440.0 - 480.0 MHz		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 12 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 21.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	27Apr10	Annual
x	-ET3DV6 E-Field Probe	00017	1590	15Jul10	Annual
x	-SPEAG D450V3 Validation Dipole	00217	1068	18Jan10	Biennial
x	-Barski Planar Phantom	00155	03-01	CNR	CNR
x	Side Planar Phantom	00156	161	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	04May10	Biennial
x	Gigatronics 80701A Power Sensor	00014	1833699	04May10	Biennial
x	HP 8753ET Network Analyzer	00134	US39170292	04May10	Biennial
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	CNR	CNR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>		<b>440.0 - 480.0 MHz</b>		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	



## 22.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION									
Uncertainty Component	IEEE 1528 Section	Uncertainty Value $\pm\%$	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value $\pm\%$ (1g)	Uncertainty Value $\pm\%$ (10g)	$V_i$ or $V_{eff}$
<b>Measurement System</b>									
Probe Calibration (450 MHz)	E.2.1	6.65	Normal	1	1	1	6.65	6.65	$\infty$
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	$\infty$
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	$\infty$
Boundary Effect	E.2.3	1	Rectangular	1.732050808	1	1	0.6	0.6	$\infty$
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	$\infty$
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	$\infty$
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	$\infty$
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	$\infty$
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	$\infty$
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	$\infty$
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	$\infty$
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	$\infty$
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	$\infty$
<b>Test Sample Related</b>									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	$\infty$
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	$\infty$
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	$\infty$
Liquid Conductivity (measured)	E.3.3	4.6	Normal	1	0.64	0.43	2.9	2.0	$\infty$
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	$\infty$
Liquid Permittivity (measured)	E.3.3	3.7	Normal	1	0.6	0.49	2.2	1.8	$\infty$
<b>Combined Standard Uncertainty</b>			<b>RSS</b>				<b>11.60</b>	<b>11.20</b>	
<b>Expanded Uncertainty (95% Confidence Interval)</b>			<b>k=2</b>				<b>23.21</b>	<b>22.40</b>	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 14 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 23.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [3] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [4] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [5] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01 v04: November 2009.
- [6] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.
- [7] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [8] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [9] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."
- [10] Federal Communications Commission - "Measurements Required: RF Power Output"; Rule Part 47 CFR §2.1046.



<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>		<b>440.0 - 480.0 MHz</b>		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 15 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**APPENDIX A - SAR MEASUREMENT DATA**

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>		<b>440.0 - 480.0 MHz</b>		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 16 of 48



	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 10/07/2010

## Face-held SAR - Li-Ion Battery KNB-63L - Whip Antenna T90-0196-05 UHF K - 440.0 MHz

**DUT: Kenwood TK-3000-1; Type: Portable FM UHF PTT Radio Transceiver; Serial: No. 00000028**

Ambient Temp: 23.8°C; Fluid Temp: 22.6°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 440 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 440 \text{ MHz}$ ;  $\sigma = 0.88 \text{ mho/m}$ ;  $\epsilon_r = 44.9$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (7x20x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$

Maximum value of SAR (measured) = 5.15 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 73.1 V/m; Power Drift = -0.464 dB



Peak SAR (extrapolated) = 6.58 W/kg

**SAR(1 g) = 4.67 mW/g; SAR(10 g) 3.39 mW/g**

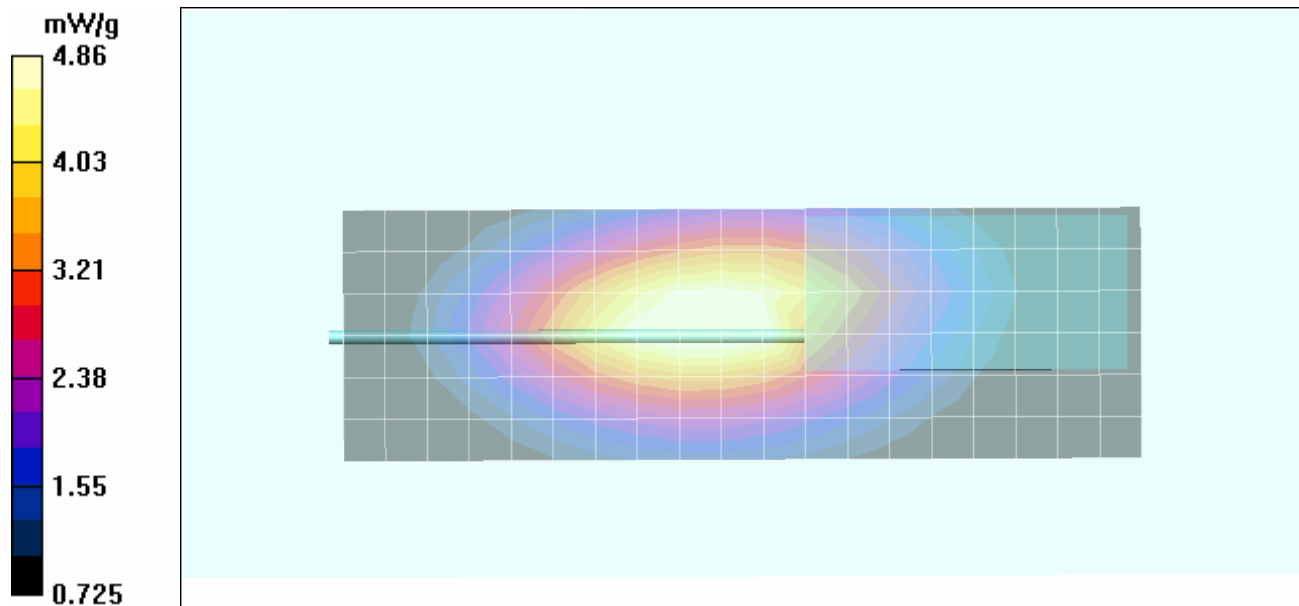Maximum value of SAR (measured) = 4.86 mW/g



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 17 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 10/07/2010

## Face-held SAR - Li-Ion Battery KNB-63L - Whip Antenna T90-0196-05 UHF K - 453.0 MHz

**DUT: Kenwood TK-3000-1; Type: Portable FM UHF PTT Radio Transceiver; Serial: No. 00000028**

Ambient Temp: 23.8°C; Fluid Temp: 22.6°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 453 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated):  $f = 453 \text{ MHz}$ ;  $\sigma = 0.89 \text{ mho/m}$ ;  $\epsilon_r = 45.1$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (7x20x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$

Maximum value of SAR (measured) = 4.59 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 74.6 V/m; Power Drift = -0.553 dB



Peak SAR (extrapolated) = 6.55 W/kg

**SAR(1 g) = 4.76 mW/g; SAR(10 g) 3.52 mW/g**

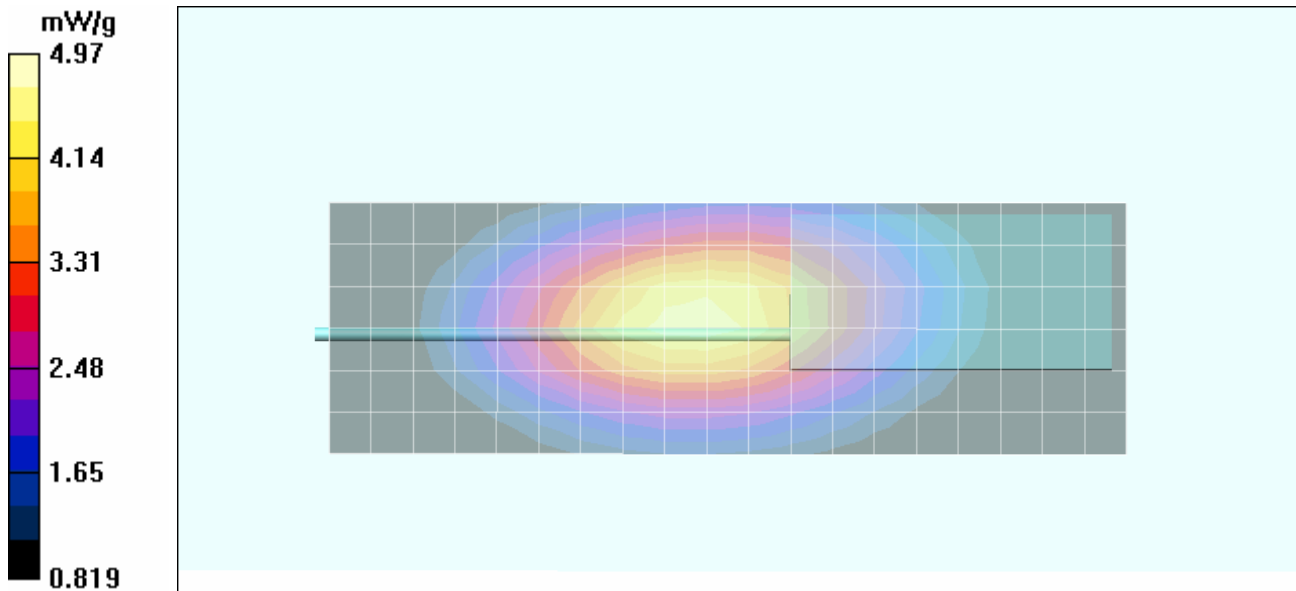Maximum value of SAR (measured) = 4.97 mW/g



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 10/07/2010

## Face-held SAR - Li-Ion Battery KNB-63L - Whip Antenna T90-0196-05 UHF K - 467.0 MHz

**DUT: Kenwood TK-3000-1; Type: Portable FM UHF PTT Radio Transceiver; Serial: No. 00000028**

Ambient Temp: 23.8°C; Fluid Temp: 22.6°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 467 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used (interpolated):  $f = 467 \text{ MHz}$ ;  $\sigma = 0.9 \text{ mho/m}$ ;  $\epsilon_r = 44.3$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (7x20x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$

Maximum value of SAR (measured) = 4.55 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 84.0 V/m; Power Drift = -0.444 dB

Peak SAR (extrapolated) = 8.39 W/kg


**SAR(1 g) = 6.05 mW/g; SAR(10 g) 4.45 mW/g**

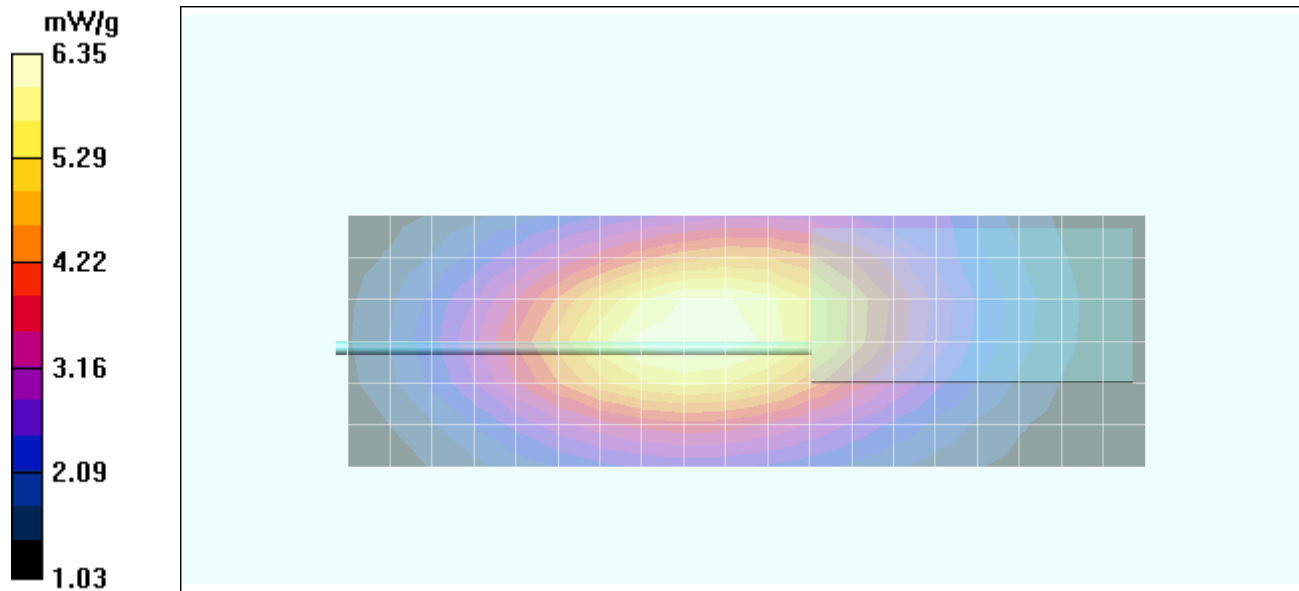

Maximum value of SAR (measured) = 6.35 mW/g



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 48
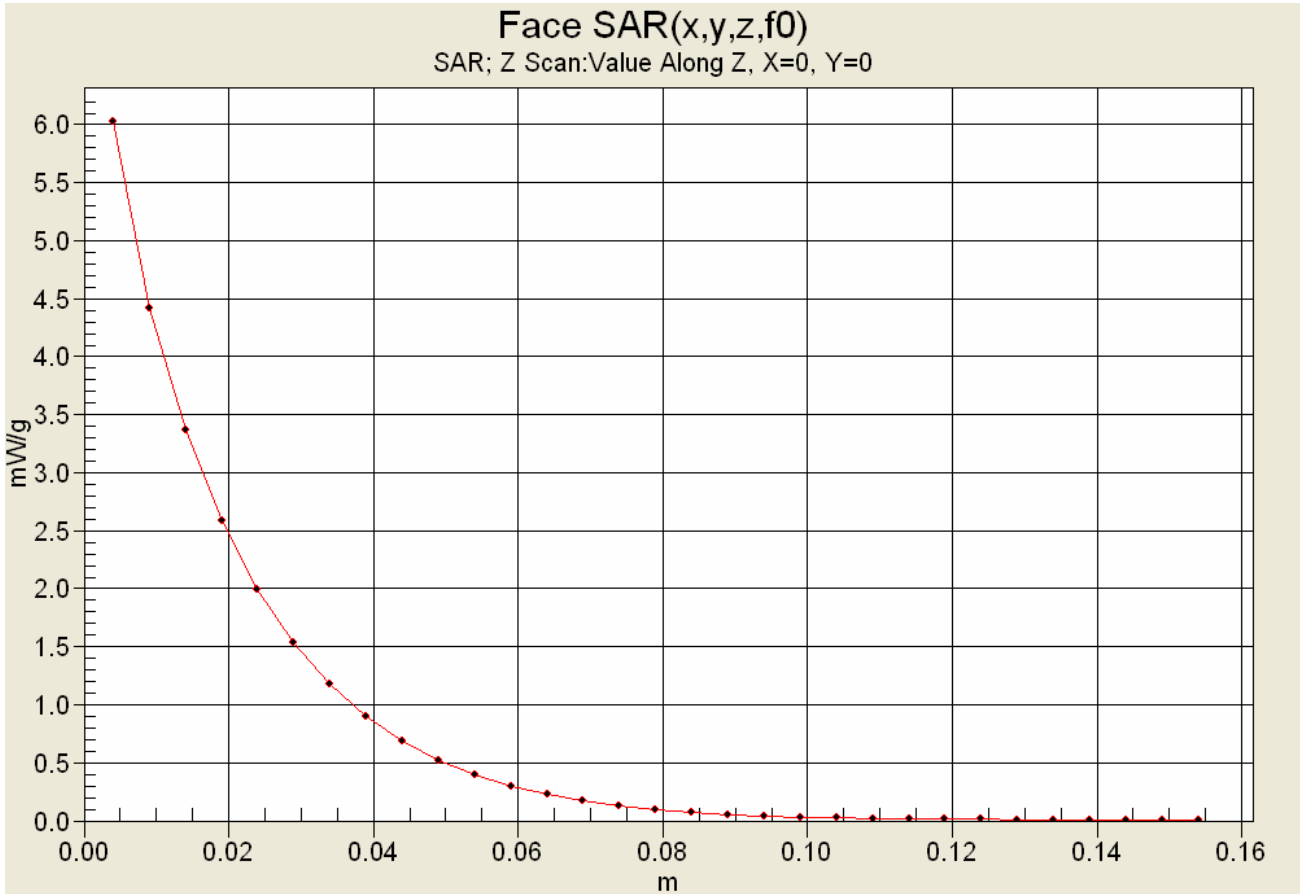
## Z-Axis Scan



	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 10/07/2010

## Face-held SAR - Li-Ion Battery KNB-63L - Whip Antenna T90-0196-05 UHF K - 480.0 MHz

**DUT: Kenwood TK-3000-1; Type: Portable FM UHF PTT Radio Transceiver; Serial: No. 00000028**

Ambient Temp: 23.8°C; Fluid Temp: 22.6°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 480 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 480 \text{ MHz}$ ;  $\sigma = 0.91 \text{ mho/m}$ ;  $\epsilon_r = 44.4$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.25, 7.25, 7.25); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom

**Area Scan (7x20x1):** Measurement grid:  $dx=20\text{mm}$ ,  $dy=20\text{mm}$

Maximum value of SAR (measured) = 6.02 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 83.0 V/m; Power Drift = -0.499 dB



Peak SAR (extrapolated) = 8.19 W/kg

**SAR(1 g) = 5.9 mW/g; SAR(10 g) 4.35 mW/g**

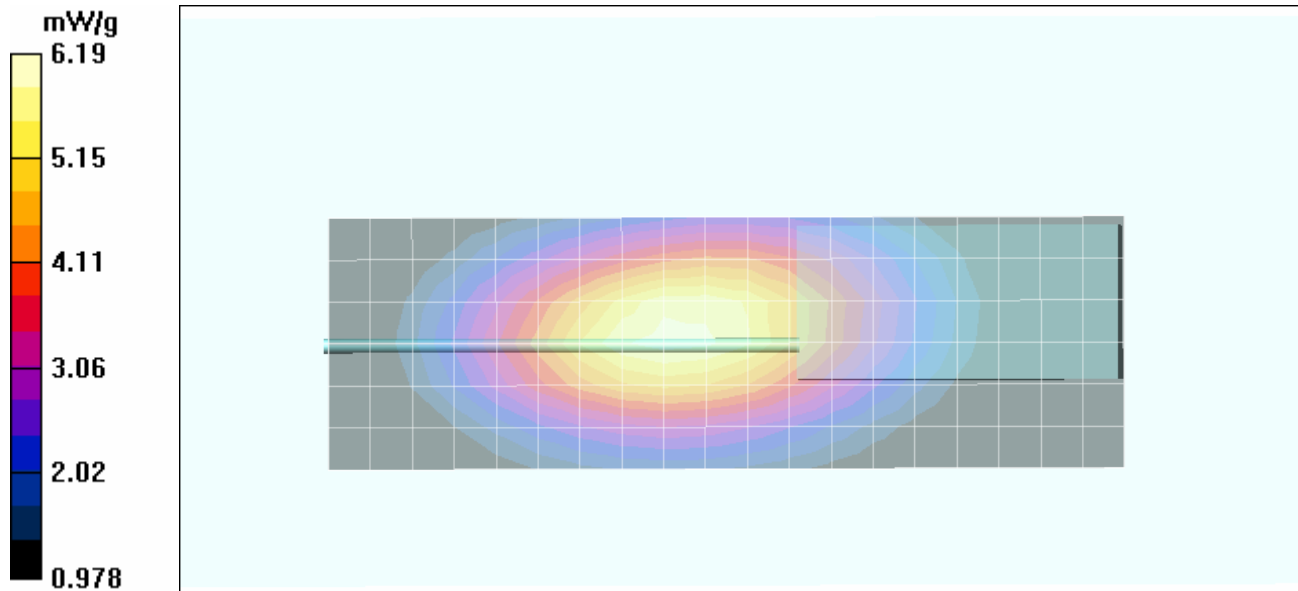Maximum value of SAR (measured) = 6.19 mW/g



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 10/07/2010

**Body-worn SAR - Li-Ion Battery KNB-63L - Whip Antenna T90-0196-05 UHF K - 440.0 MHz**

**DUT: Kenwood TK-3000-1; Type: Portable FM UHF PTT Radio Transceiver; Serial: No. 00000028**

**Body-worn Accessory: Belt-Clip P/N: J29-0751-05; Audio Accessory: Speaker-Microphone P/N: KMC-45**

Ambient Temp: 24.0°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 440 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used:  $f = 440 \text{ MHz}$ ;  $\sigma = 0.93 \text{ mho/m}$ ;  $\epsilon_r = 57.8$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**Body-worn SAR - 1.8 cm Belt-Clip Spacing from Back of DUT to Planar Phantom**

**Area Scan (7x20x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 5.67 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 80.3 V/m; Power Drift = -0.314 dB



Peak SAR (extrapolated) = 8.21 W/kg

**SAR(1 g) = 5.71 mW/g; SAR(10 g) = 4.14 mW/g**

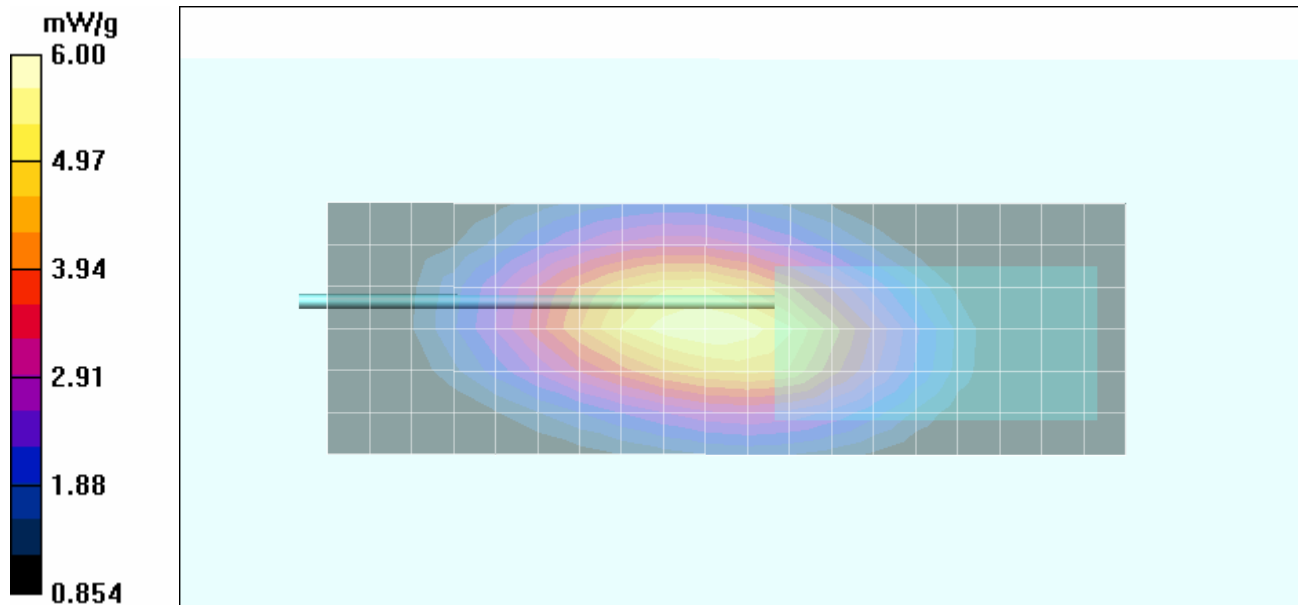Maximum value of SAR (measured) = 6.00 mW/g



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 22 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 10/07/2010

**Body-worn SAR - Li-Ion Battery KNB-63L - Whip Antenna T90-0196-05 UHF K - 453.0 MHz**

**DUT: Kenwood TK-3000-1; Type: Portable FM UHF PTT Radio Transceiver; Serial: No. 00000028 (Pre-production)**

**Body-worn Accessory: Belt-Clip P/N: J29-0751-05; Audio Accessory: Speaker-Microphone P/N: KMC-45**

Ambient Temp: 24.0°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 453 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used (interpolated):  $f = 453 \text{ MHz}$ ;  $\sigma = 0.963 \text{ mho/m}$ ;  $\epsilon_r = 58.2$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**Body-worn SAR - 1.8 cm Belt-Clip Spacing from Back of DUT to Planar Phantom**

**Area Scan (7x20x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 5.76 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 75.4 V/m; Power Drift = -0.220 dB



Peak SAR (extrapolated) = 8.78 W/kg

**SAR(1 g) = 6.04 mW/g; SAR(10 g) = 4.24 mW/g**

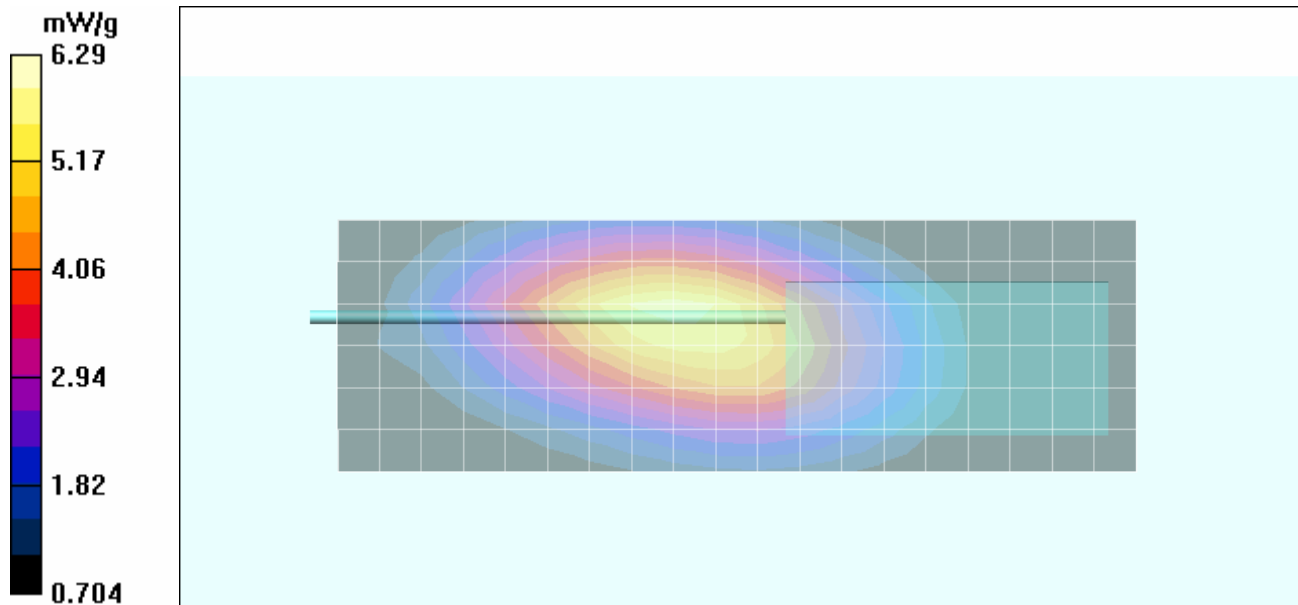Maximum value of SAR (measured) = 6.29 mW/g



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 23 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 10/07/2010

## Body-worn SAR - Li-Ion Battery KNB-63L - Whip Antenna T90-0196-05 UHF K - 467.0 MHz

**DUT: Kenwood TK-3000-1; Type: Portable FM UHF PTT Radio Transceiver; Serial: No. 00000028**

**Body-worn Accessory: Belt-Clip P/N: J29-0751-05; Audio Accessory: Speaker-Microphone P/N: KMC-45**

Ambient Temp: 24.0°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 467 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used (interpolated):  $f = 467 \text{ MHz}$ ;  $\sigma = 0.97 \text{ mho/m}$ ;  $\epsilon_r = 58.1$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### Body-worn SAR - 1.8 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

**Area Scan (7x20x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 8.42 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 95.3 V/m; Power Drift = -0.327 dB

Peak SAR (extrapolated) = 12.1 W/kg



**SAR(1 g) = 8.18 mW/g; SAR(10 g) = 5.85 mW/g**

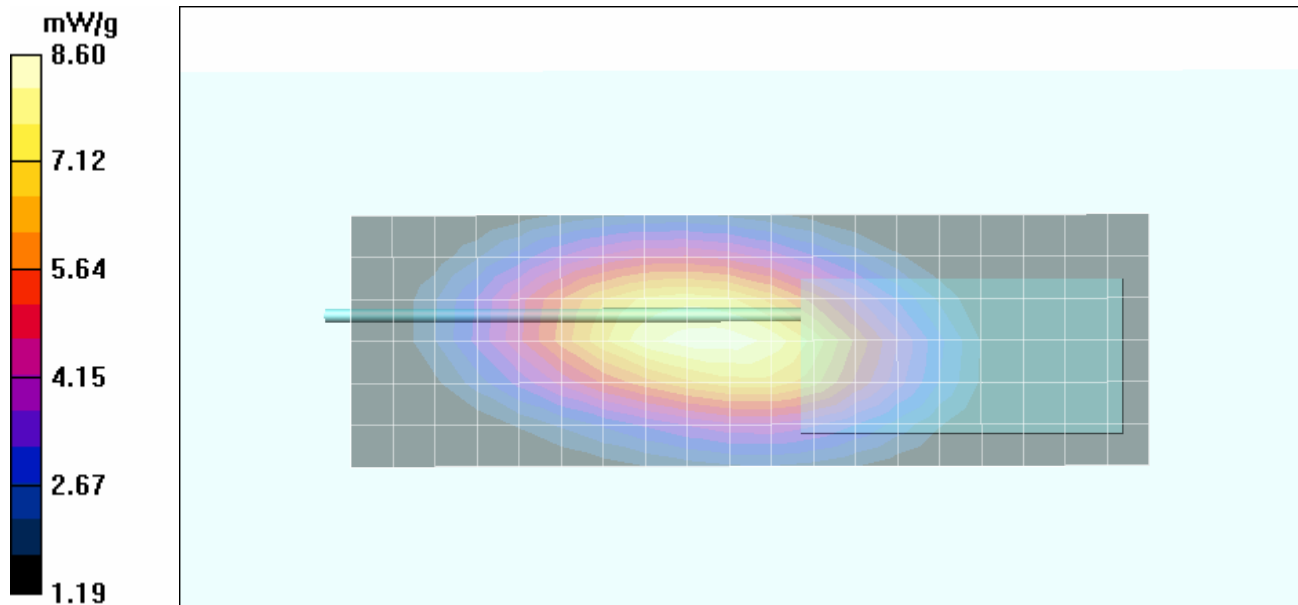Maximum value of SAR (measured) = 8.60 mW/g




<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>	440.0 - 480.0 MHz			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 24 of 48




	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## Z-Axis Scan

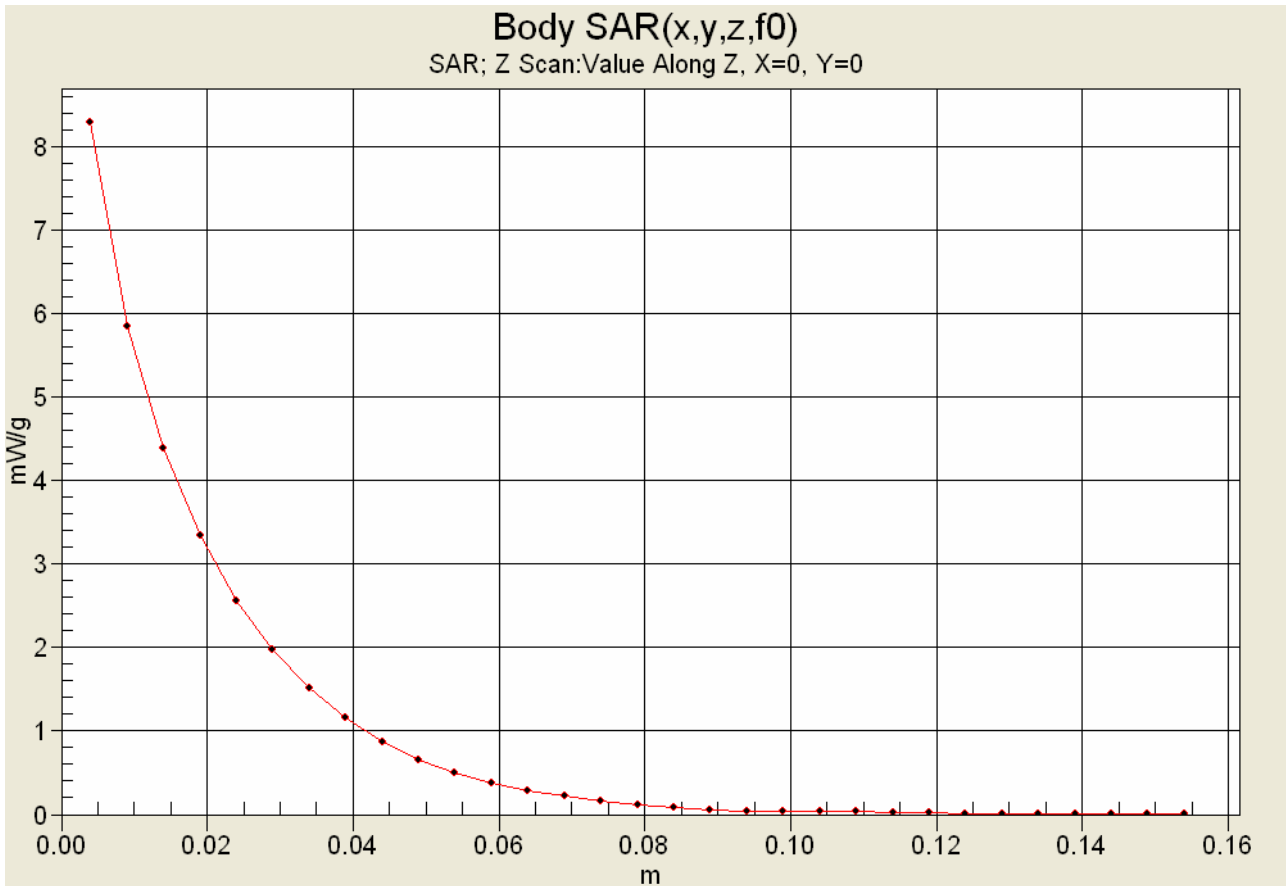



<b>Applicant:</b> Kenwood USA Corporation	<b>FCC ID:</b> ALH437300	<b>Model(s):</b> TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b> Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b> 440.0 - 480.0 MHz		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 25 of 48
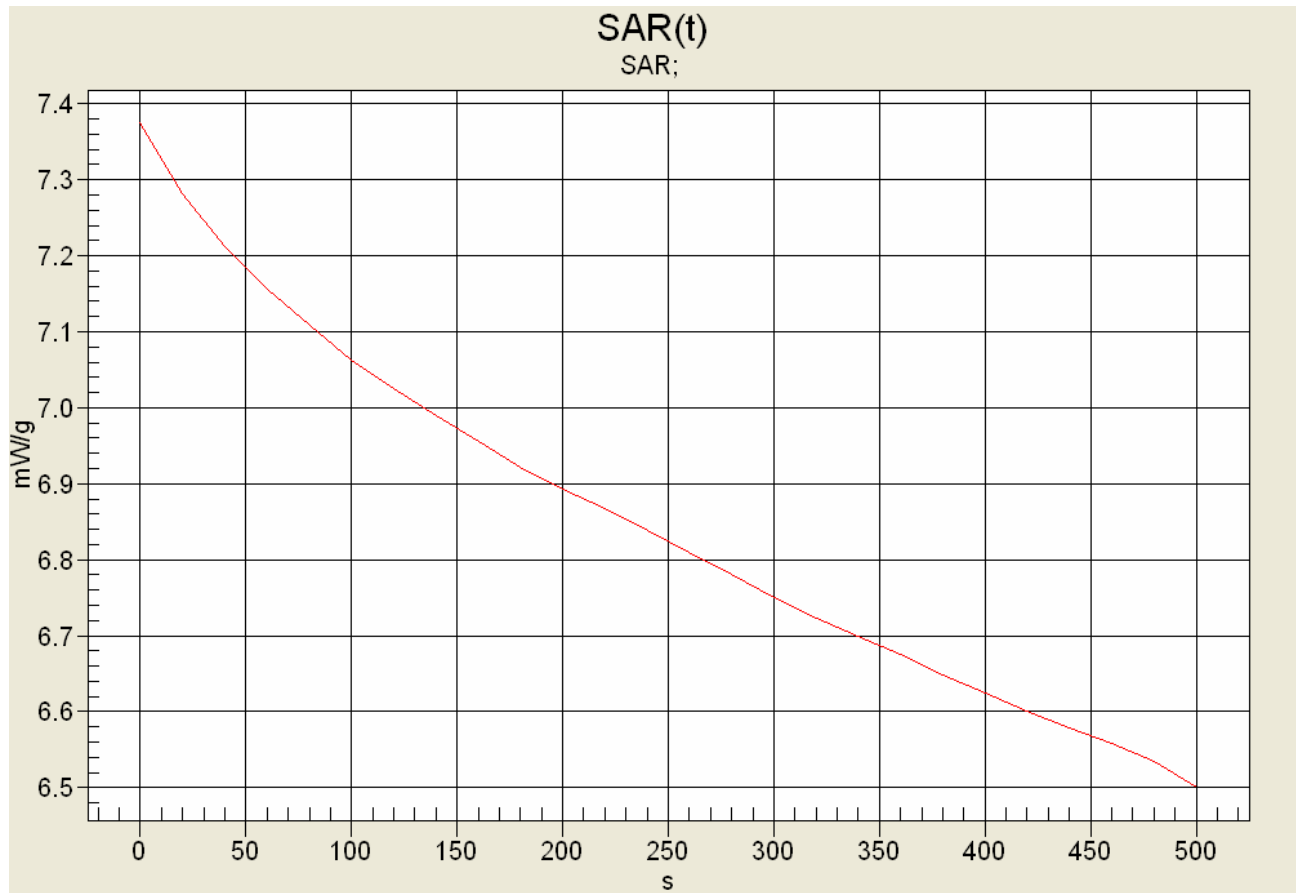
### SAR Droop Evaluation (SAR vs. Time)



**Start SAR: 7.375 mW/g**  
**After 340s: 6.700 mW/g (-0.417 dB)**  
**After 500s: 6.501 mW/g (-0.548 dB)**  
**340s = Zoom Scan**  
**500s = Area Scan**

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 10/07/2010

**Body-worn SAR - Li-Ion Battery KNB-63L - Whip Antenna T90-0196-05 UHF K - 480.0 MHz**

**DUT: Kenwood TK-3000-1; Type: Portable FM UHF PTT Radio Transceiver; Serial: No. 00000028**

**Body-worn Accessory: Belt-Clip P/N: J29-0751-05; Audio Accessory: Speaker-Microphone P/N: KMC-45**

Ambient Temp: 24.0°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 480 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used:  $f = 480 \text{ MHz}$ ;  $\sigma = 0.97 \text{ mho/m}$ ;  $\epsilon_r = 57.9$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**Body-worn SAR - 1.8 cm Belt-Clip Spacing from Back of DUT to Planar Phantom**

**Area Scan (7x20x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 8.41 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 94.1 V/m; Power Drift = -0.463 dB



Peak SAR (extrapolated) = 11.4 W/kg

**SAR(1 g) = 7.87 mW/g; SAR(10 g) = 5.7 mW/g**

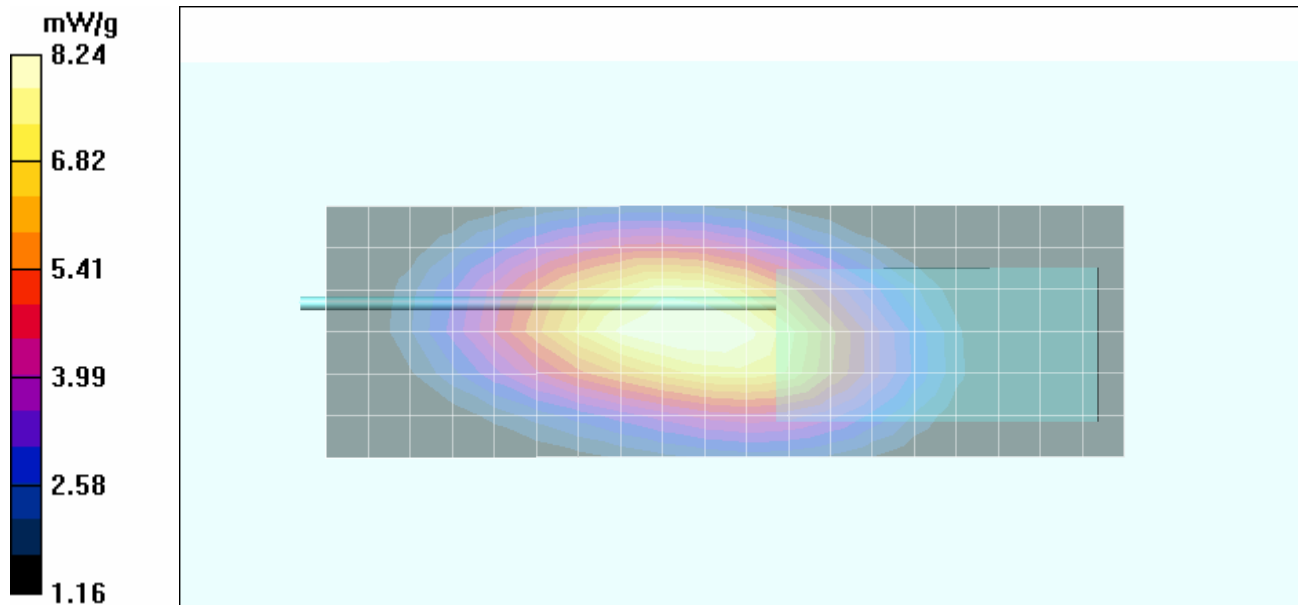Maximum value of SAR (measured) = 8.24 mW/g





<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>		440.0 - 480.0 MHz		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**APPENDIX B - SYSTEM PERFORMANCE CHECK DATA**

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>		<b>440.0 - 480.0 MHz</b>		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 28 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 10/07/2010

## System Performance Check - 450 MHz Dipole - Body

**DUT: Dipole D450V3; Asset: 00217; Serial: 1068; Calibration: 01/18/2010**

Ambient Temp: 24.3°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 398 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.96 \text{ mho/m}$ ;  $\epsilon_r = 58.2$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 27/04/2010

- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01

- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### System Performance Check - 450 MHz Dipole

**Head d=15mm Pin=398mW 2/Area Scan (6x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.97 mW/g


**Head d=15mm Pin=398mW 2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 45.1 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 3.06 W/kg


**SAR(1 g) = 1.91 mW/g; SAR(10 g) = 1.27 mW/g**

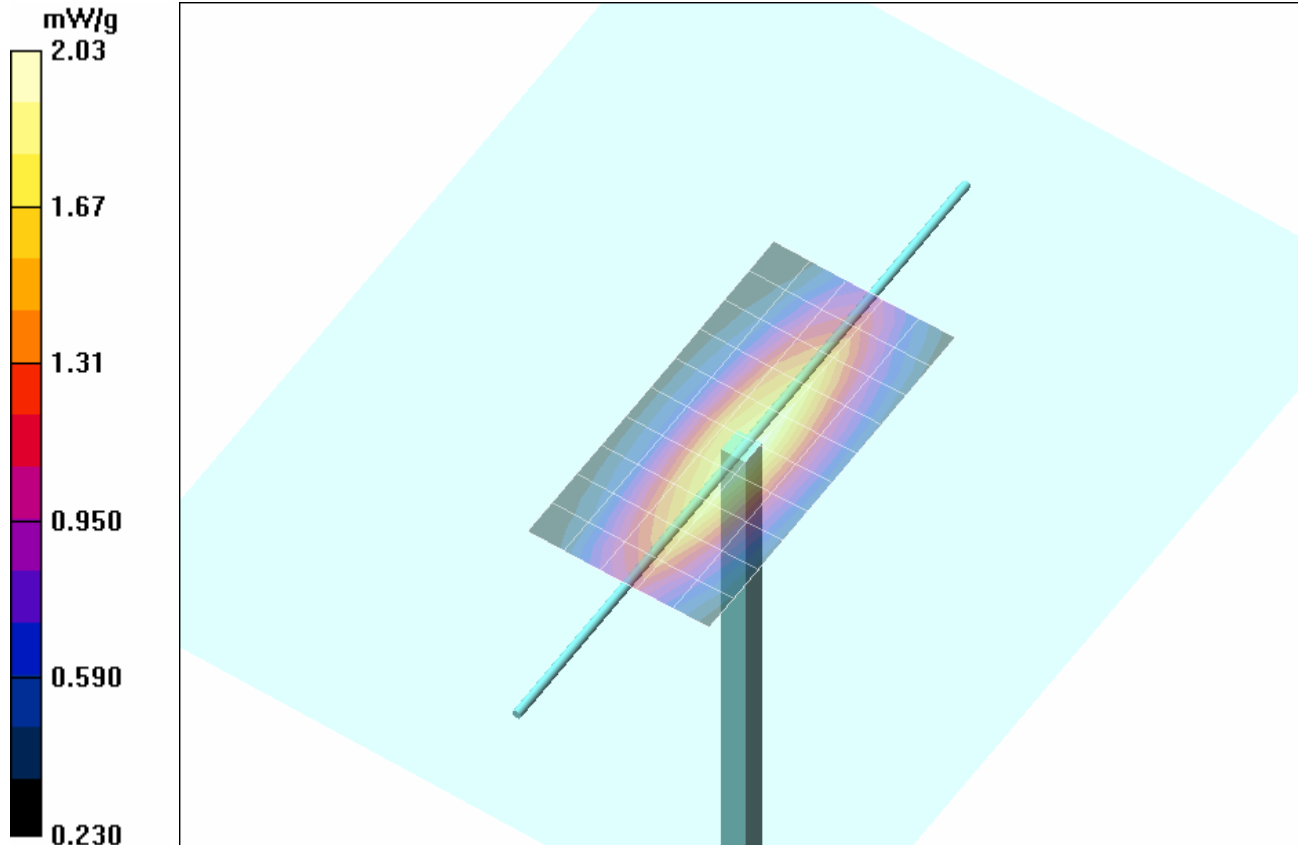

Maximum value of SAR (measured) = 2.03 mW/g



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>	440.0 - 480.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 29 of 48

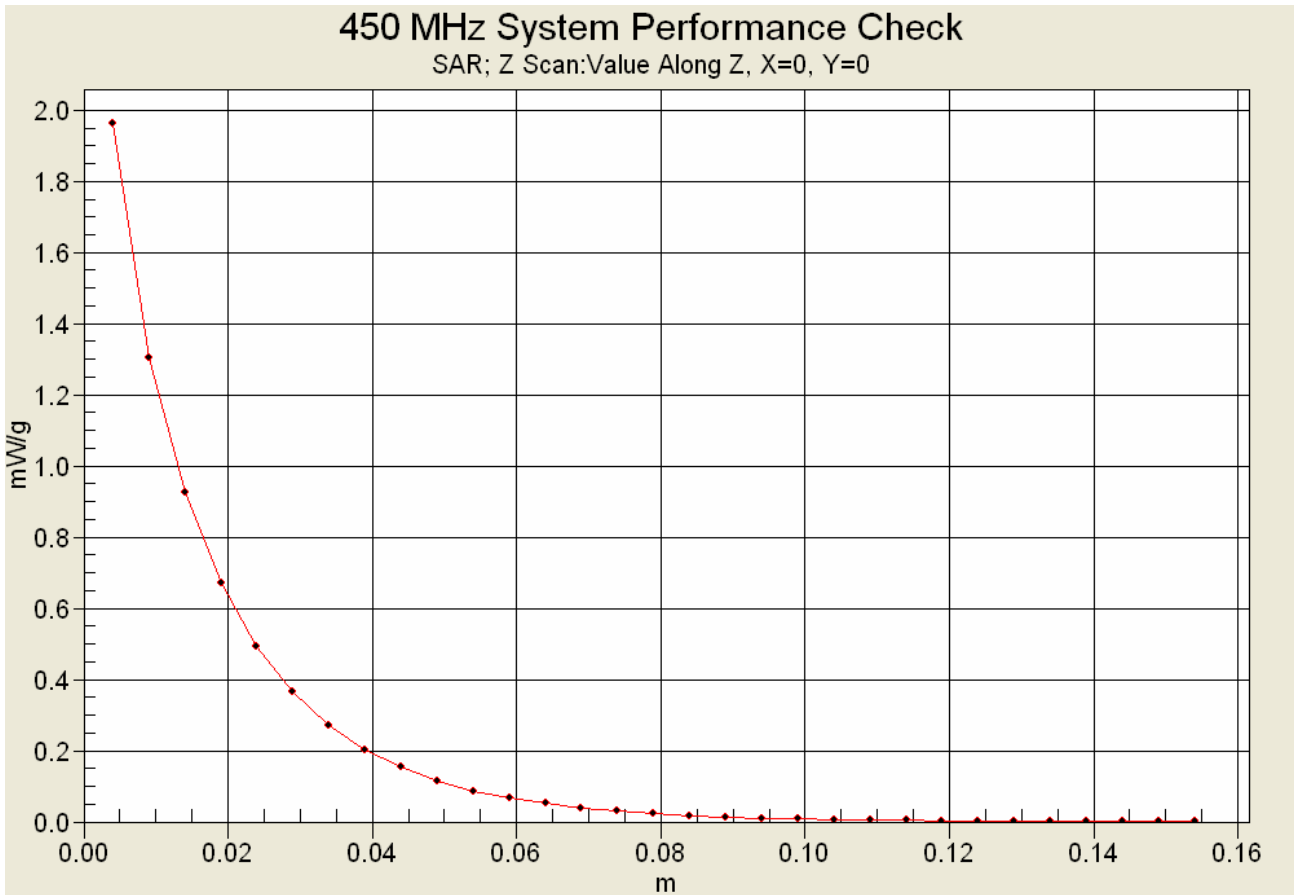

## Z-Axis Scan



	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS**

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>	<b>440.0 - 480.0 MHz</b>			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 31 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

### 450 MHz System Performance Check & DUT Evaluation (Body)

\*\*\*\*\*



Celltech Labs Inc.  
 Test Result for UIM Dielectric Parameter  
 07/Oct/2010  
 Frequency (GHz)  
 FCC\_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma  
 FCC\_eB FCC Limits for Body Epsilon  
 FCC\_sB FCC Limits for Body Sigma  
 Test\_e Epsilon of UIM  
 Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	59.18	0.87
0.3600	57.60	0.93	58.87	0.88
0.3700	57.50	0.93	58.70	0.89
0.3800	57.40	0.93	58.93	0.91
0.3900	57.30	0.93	58.57	0.90
0.4000	57.20	0.93	58.79	0.91
0.4100	57.10	0.93	58.75	0.91
0.4200	57.00	0.94	58.14	0.92
0.4300	56.90	0.94	57.83	0.93
0.4400	56.80	0.94	57.82	0.93
0.4500	56.70	0.94	58.16	0.96
0.4600	56.66	0.94	58.34	0.97
0.4700	56.62	0.94	58.02	0.97
0.4800	56.58	0.94	57.87	0.97
0.4900	56.54	0.94	57.57	0.98
0.5000	56.51	0.94	56.81	0.99
0.5100	56.47	0.94	57.28	0.99
0.5200	56.43	0.95	57.31	1.01
0.5300	56.39	0.95	56.97	1.01
0.5400	56.35	0.95	56.49	1.02
0.5500	56.31	0.95	56.77	1.04

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>		<b>440.0 - 480.0 MHz</b>		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 32 of 48



	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

### 450 MHz DUT Evaluation (Head)



\*\*\*\*\*

Celltech Labs Inc.  
 Test Result for UIM Dielectric Parameter  
 07/Oct/2010  
 Frequency (GHz)  
 FCC\_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma  
 Test\_e Epsilon of UIM  
 Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eHF	FCC_sHF	Test_e	Test_s
0.3500	44.70	0.87	47.25	0.81
0.3600	44.58	0.87	47.18	0.82
0.3700	44.46	0.87	47.07	0.83
0.3800	44.34	0.87	47.14	0.85
0.3900	44.22	0.87	46.22	0.85
0.4000	44.10	0.87	46.62	0.86
0.4100	43.98	0.87	46.04	0.86
0.4200	43.86	0.87	46.07	0.87
0.4300	43.74	0.87	44.92	0.87
0.4400	43.62	0.87	44.94	0.88
0.4500	43.50	0.87	45.24	0.89
0.4600	43.45	0.87	44.77	0.90
0.4700	43.40	0.87	44.12	0.90
0.4800	43.34	0.87	44.44	0.91
0.4900	43.29	0.87	45.09	0.91
0.5000	43.24	0.87	43.94	0.92
0.5100	43.19	0.87	43.92	0.93
0.5200	43.14	0.88	43.42	0.94
0.5300	43.08	0.88	43.12	0.96
0.5400	43.03	0.88	43.62	0.97
0.5500	42.98	0.88	43.22	0.99

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>		<b>440.0 - 480.0 MHz</b>		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS**



<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>		<b>440.0 - 480.0 MHz</b>		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 34 of 48

**FACE-HELD SAR TEST SETUP PHOTOGRAPHS**




**Face-held Test Setup Configuration**

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>	<b>440.0 - 480.0 MHz</b>			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 35 of 48



	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
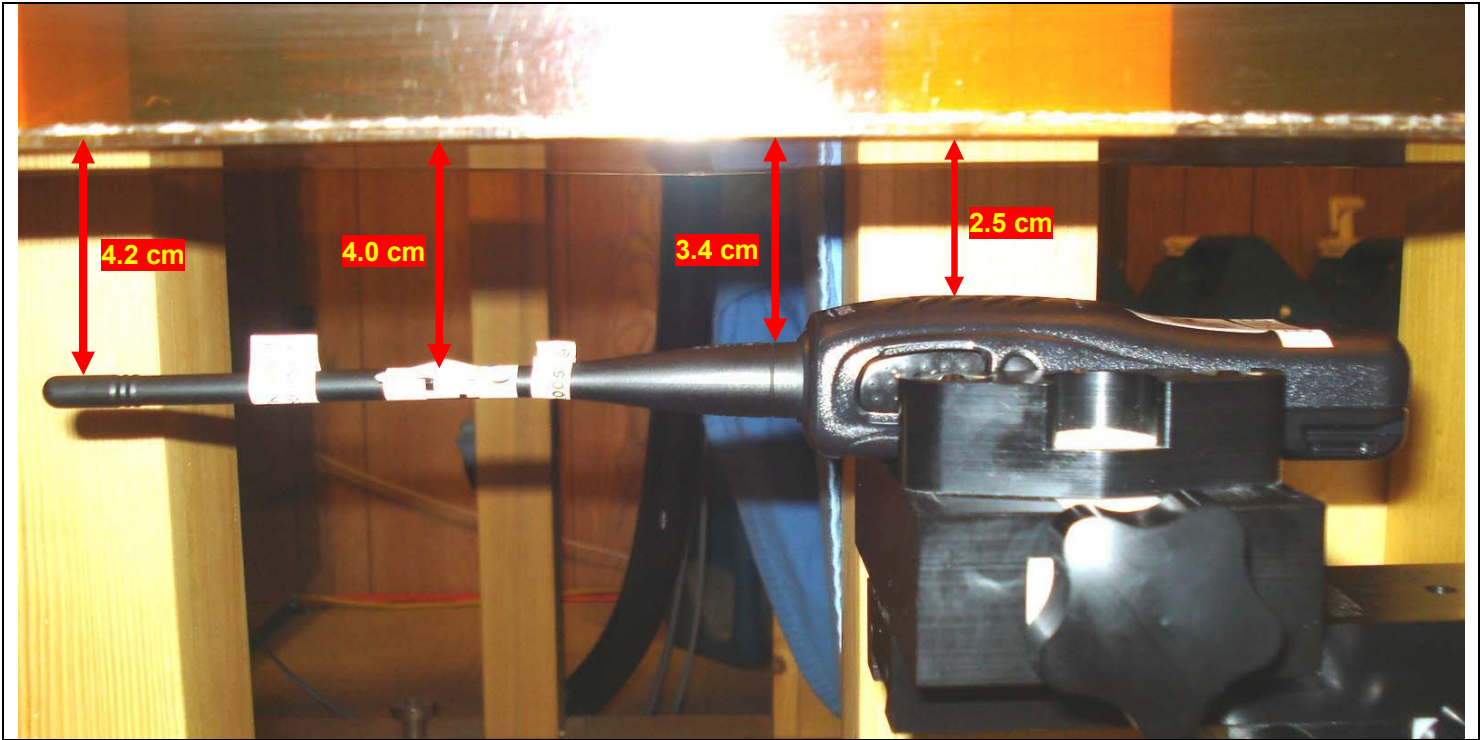
### FACE-HELD CONFIGURATION



DUT with Whip Antenna P/N: T90-0196-05 UHF K - 2.5 cm Air-Gap Spacing from Front of DUT (Mic Section) to Planar Phantom

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>	440.0 - 480.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 36 of 48



	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**BODY-WORN SAR TEST SETUP PHOTOGRAPHS**




**Body-worn Test Setup Configuration  
 DUT with Belt-Clip Body-worn Accessory (P/N: J29-0751-05) & Speaker-Microphone Audio Accessory (P/N: KMC-45)**

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>	<b>440.0 - 480.0 MHz</b>			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 37 of 48



	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
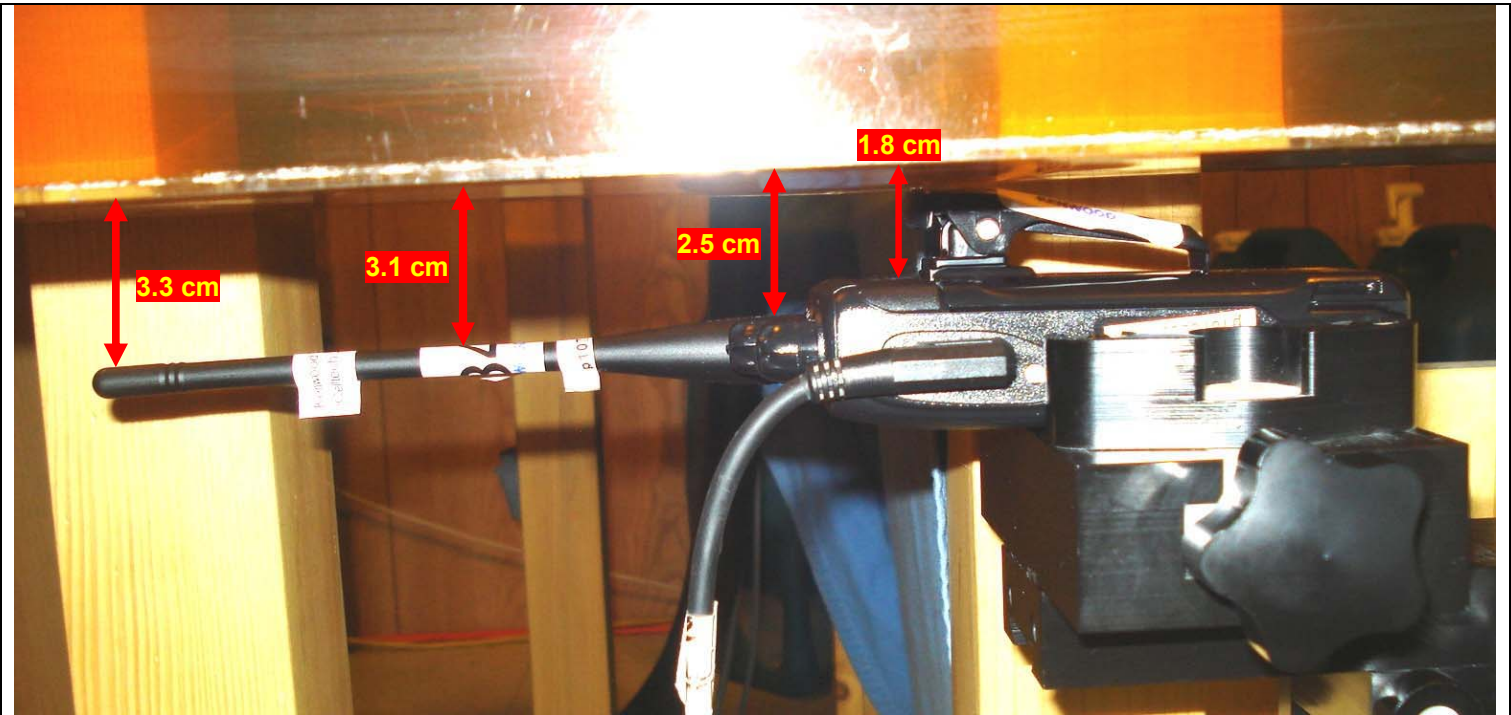
### BODY-WORN CONFIGURATION




DUT with Whip Antenna P/N: T90-0196-05 UHF K, Belt-Clip and Speaker-Mic - 1.8 cm Belt-Clip Spacing - Battery Housing Parallel to Phantom



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	KENWOOD
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>	440.0 - 480.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 38 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
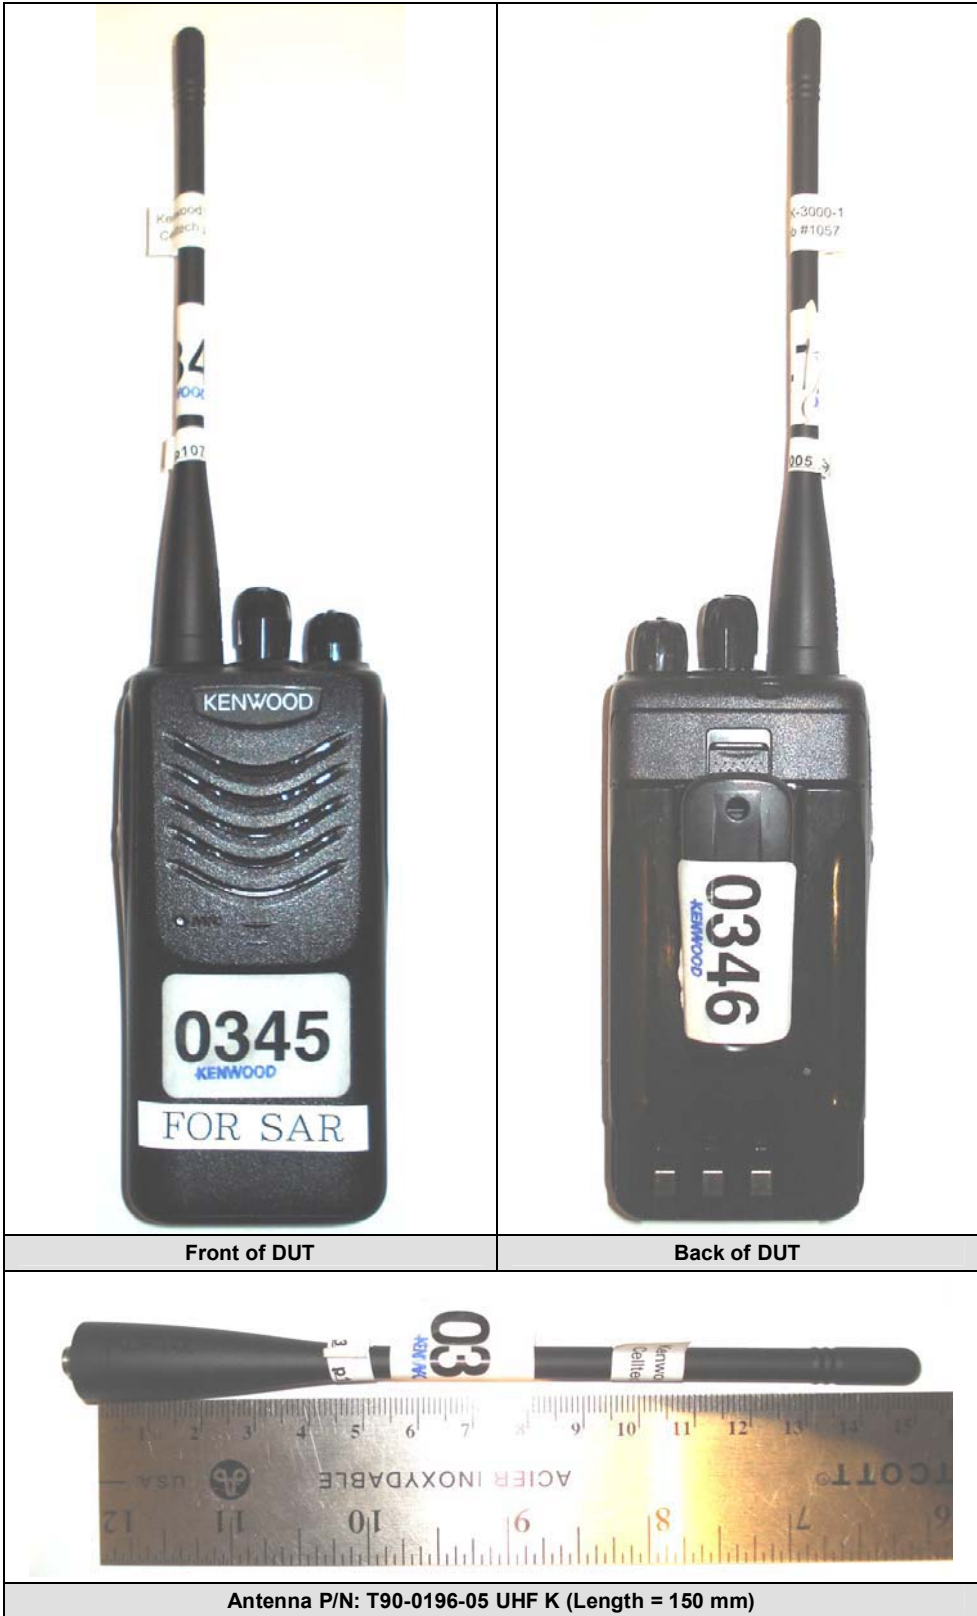
## DUT PHOTOGRAPHS



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>	440.0 - 480.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 39 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**DUT PHOTOGRAPHS**



**Left Side of DUT with Belt-Clip accessory**



**Right Side of DUT with Belt-Clip accessory**





**Bottom end of DUT with Belt-Clip accessory**




**Top end of DUT with Belt-Clip accessory**

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>	440.0 - 480.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 40 of 48



	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**DUT PHOTOGRAPHS**

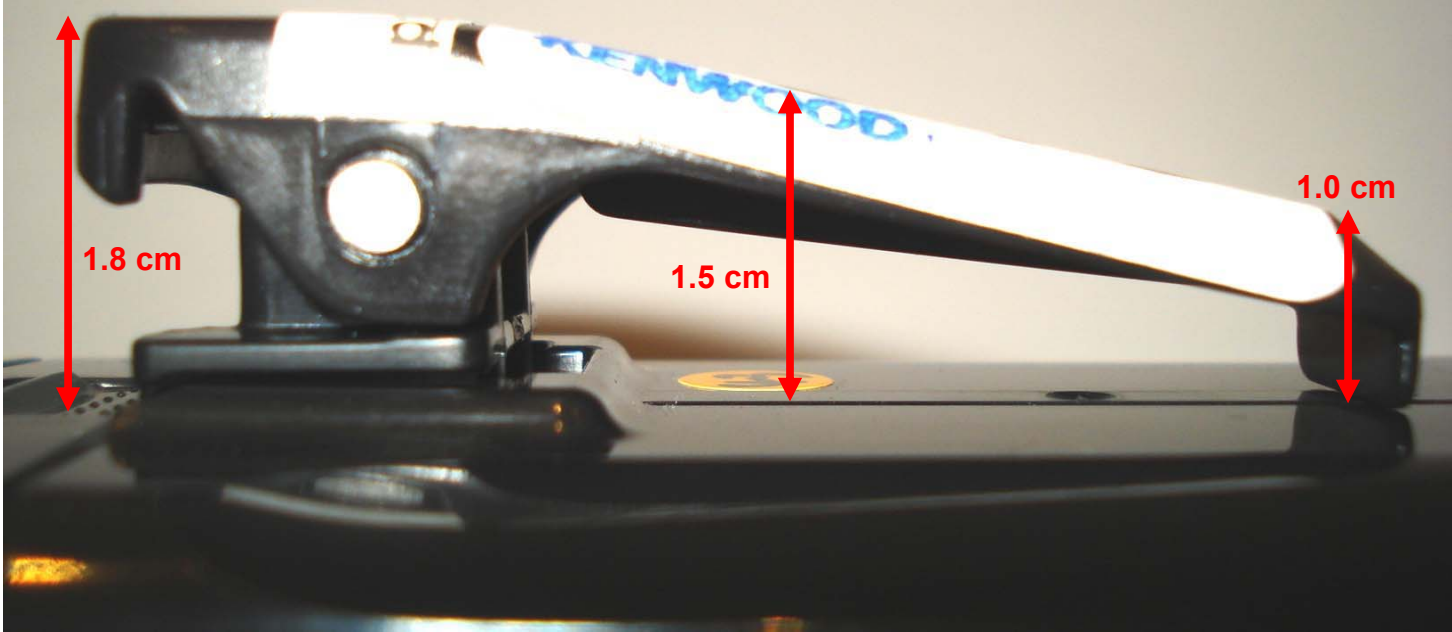



**Belt-Clip Thickness Measurement**



**Side view of DUT with Belt-Clip Accessory**



<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>	440.0 - 480.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 41 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**DUT PHOTOGRAPHS**





<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>	440.0 - 480.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 42 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**DUT PHOTOGRAPHS**



<b>Applicant:</b> Kenwood USA Corporation	<b>FCC ID:</b> ALH437300	<b>Model(s):</b> TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b> Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b> 440.0 - 480.0 MHz		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 43 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**DUT PHOTOGRAPHS**





Front of DUT and Speaker-Microphone (P/N: KMC-45)



Back of DUT and Speaker-Microphone (P/N: KMC-45)

<b>Applicant:</b>	Kenwood USA Corporation	<b>FCC ID:</b>	ALH437300	<b>Model(s):</b>	TK-3000-1	<b>KENWOOD</b>
<b>DUT Type:</b>	Portable FM UHF PTT Radio Transceiver	<b>Transmit Frequency Range:</b>	440.0 - 480.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 44 of 48



	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**DUT PHOTOGRAPHS**



**Speaker-Microphone Audio Accessory P/N: KMC-45**

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>		<b>440.0 - 480.0 MHz</b>		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 45 of 48

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**APPENDIX E - DIPOLE CALIBRATION**

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>		<b>440.0 - 480.0 MHz</b>		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 46 of 48



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **D450V3-1068 Jan10**

## CALIBRATION CERTIFICATE

Object **D450V3 - SN: 1068**

Calibration procedure(s) **QA CAL-15.v5  
Calibration Procedure for dipole validation kits below 800 MHz**

Calibration date: **January 18, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ET3DV6 (LF)	SN: 1507	03-Jul-09 (No. ET3-1507_Jul09)	Jul-10
DAE4	SN: 654	04-May-09 (No. DAE4-654_May09)	May-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

Calibrated by: **Jeton Kastrati**      Function: **Laboratory Technician**      Signature: *i.v. [Signature]*

Approved by: **Katja Pokovic**      Technical Manager      *[Signature]*

Issued: January 20, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
ConF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- d) DASY4 System Handbook

### Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V5.2
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	ELI4 Flat Phantom	Shell thickness: $2 \pm 0.2$ mm
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Area Scan Resolution</b>	dx, dy = 15 mm	
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	450 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	43.5	0.87 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	44.2 $\pm$ 6 %	0.86 mho/m $\pm$ 6 %
<b>Head TSL temperature during test</b>	(22.0 $\pm$ 0.2) °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	condition	
SAR measured	398 mW input power	1.87 mW / g
SAR normalized	normalized to 1W	4.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>4.76 mW / g <math>\pm</math> 18.1 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	398 mW input power	1.25 mW / g
SAR normalized	normalized to 1W	3.14 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>3.17 mW / g <math>\pm</math> 17.6 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Body TSL parameters</b>	22.0 °C	56.7	0.94 mho/m
<b>Measured Body TSL parameters</b>	(22.0 ± 0.2) °C	54.1 ± 6 %	0.90 mho/m ± 6 %
<b>Body TSL temperature during test</b>	(22.0 ± 0.2) °C	----	----

## SAR result with Body TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b>	condition	
SAR measured	398 mW input power	1.78 mW / g
SAR normalized	normalized to 1W	4.47 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>4.58 mW / g ± 18.1 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b>	condition	
SAR measured	398 mW input power	1.19 mW / g
SAR normalized	normalized to 1W	2.99 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>3.06 mW / g ± 17.6 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	57.5 $\Omega$ - 5.9 j $\Omega$
Return Loss	- 21.0 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	54.8 $\Omega$ - 9.3 j $\Omega$
Return Loss	- 20.0 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.350 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 16, 2009

# DASY5 Validation Report for Head TSL

Date/Time: 1/18/2010 10:59:37 AM

**DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068**

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.86$  mho/m;  $\epsilon_r = 44.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(6.66, 6.66, 6.66); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Head/d=15mm, Pin=398mW/Area Scan (41x111x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.99 mW/g


**Head/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.2 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 2.78 W/kg

**SAR(1 g) = 1.87 mW/g; SAR(10 g) = 1.25 mW/g**

Maximum value of SAR (measured) = 2 mW/g

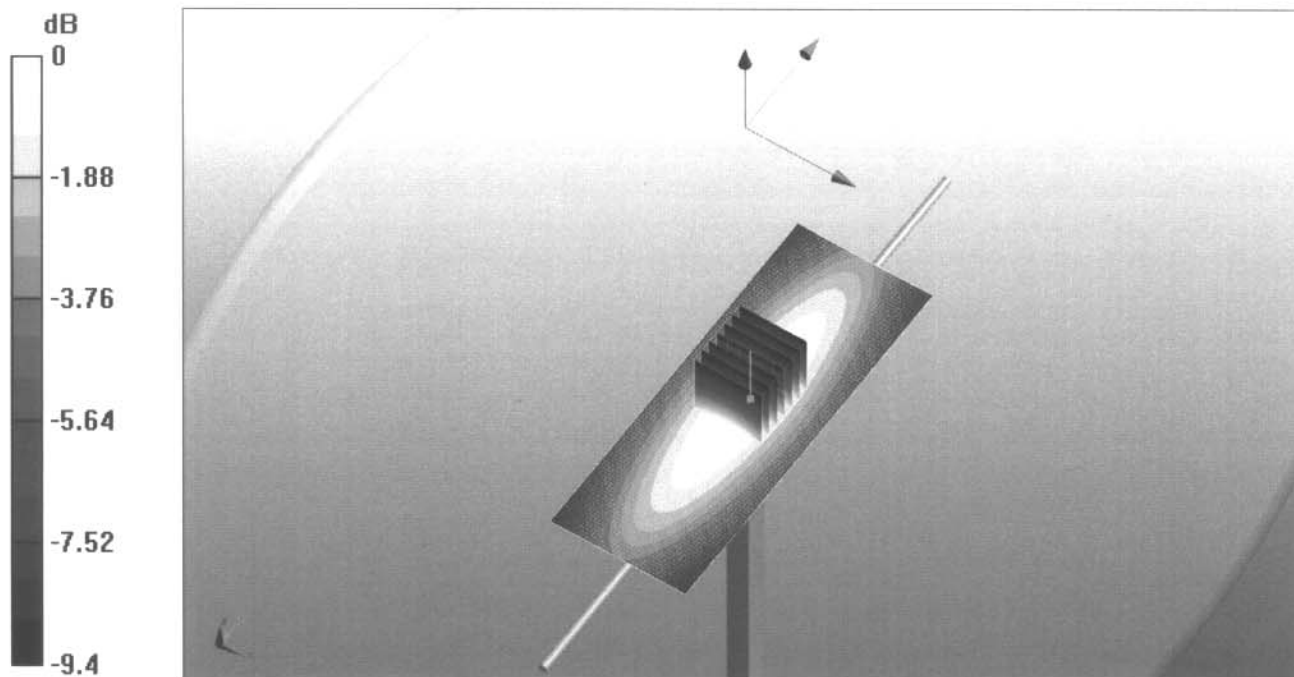

0 dB = 2mW/g

# Impedance Measurement Plot for Head TSL

18 Jan 2010 10:25:40

CH1 S11 1 U FS

1: 57.502  $\Omega$  -5.9180  $\Omega$  59.763 pF


450.000 000 MHz

\*  
Del

Cor

Avg  
16

↑

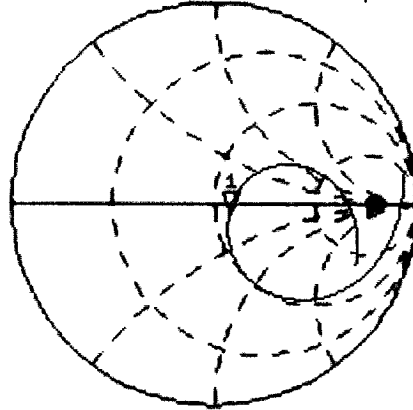

CH2 S11 LOG

5 dB/REF -20 dB


1: -21.035 dB

450.000 000 MHz

Cor

Avg  
16

↑

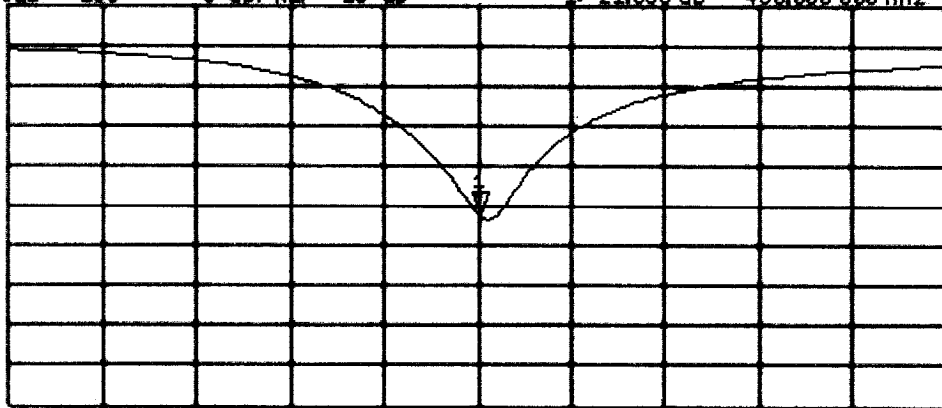

START 250.000 000 MHz

STOP 650.000 000 MHz

# DASY5 Validation Report for Body TSL

Date/Time: 1/18/2010 1:24:11 PM

**DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068**

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450

Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.9 \text{ mho/m}$ ;  $\epsilon_r = 54.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(7.11, 7.11, 7.11); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Body/d=15mm, Pin=398mW/Area Scan (61x201x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.9 mW/g


**Body/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 47.4 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 2.71 W/kg

**SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.19 mW/g**

Maximum value of SAR (measured) = 1.9 mW/g

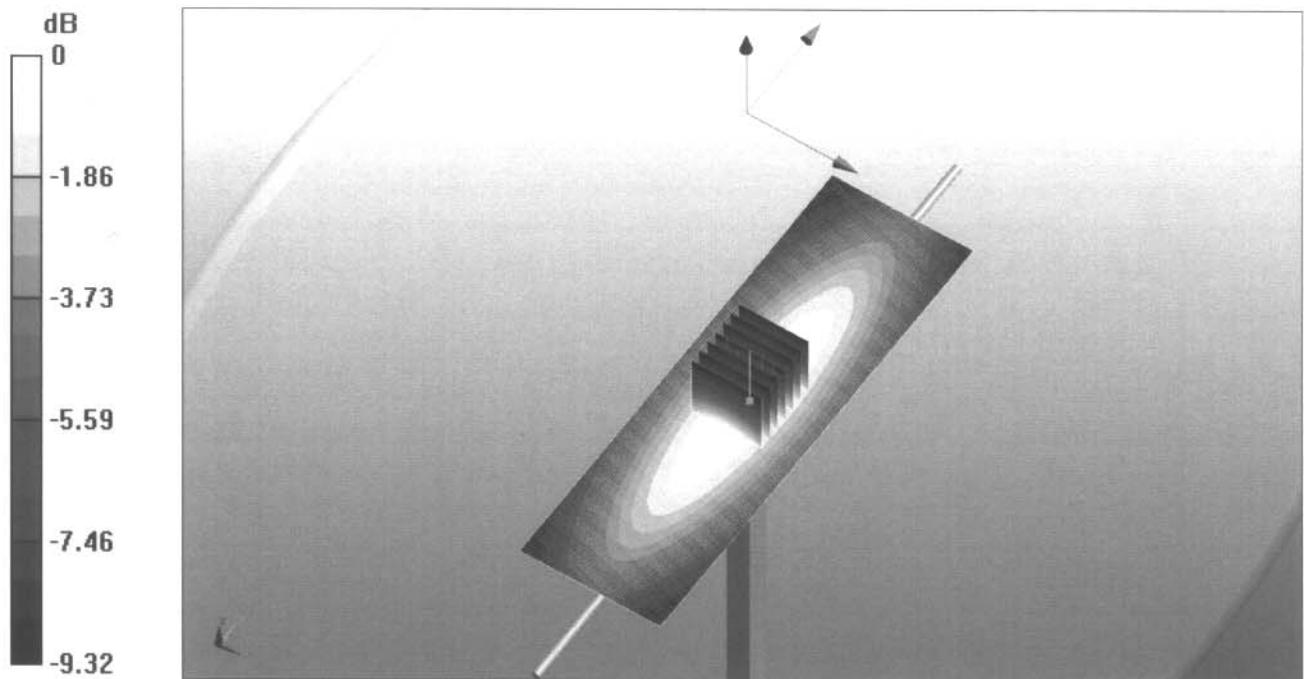

0 dB = 1.9mW/g

# Impedance Measurement Plot for Body TSL


18 Jan 2010 12:18:41

CH1 S11 1 U FS

1: 54.824  $\Omega$  -9.3047  $\Omega$  38.011 pF

450.000 000 MHz

\*  
Del  
Cor

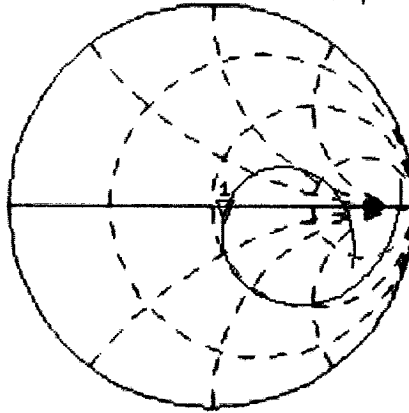

Avg  
16


↑

CH2 S11 L06 5 dB/REF -20 dB 1:-20.034 dB 450.000 000 MHz

Cor



Avg  
16

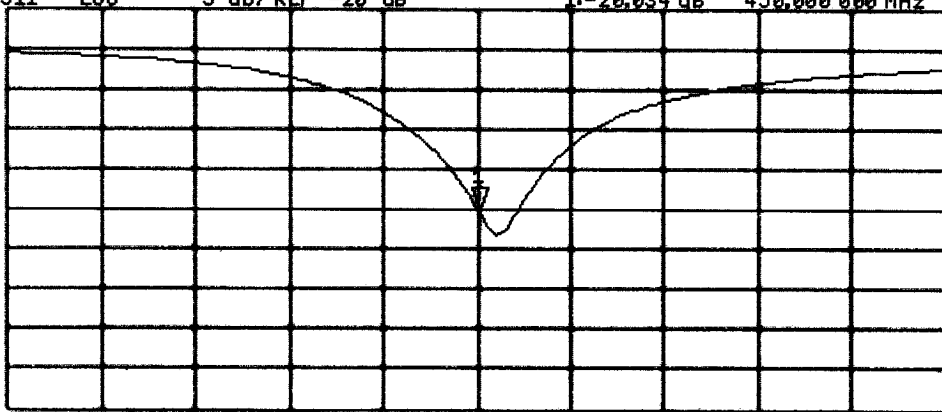↑



START 250.000 000 MHz

STOP 650.000 000 MHz

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**APPENDIX F - PROBE CALIBRATION**

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>		<b>440.0 - 480.0 MHz</b>		
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 47 of 48





Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **ET3-1590\_Jul10**

## CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v6, QA CAL-23.v3 and QA CAL-25.v2  
Calibration procedure for dosimetric E-field probes**

Calibration date: **July 15, 2010**



This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct10

Calibrated by	Name <b>Jeton Kastrati</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Technical Manager	

Issued: July 15, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- **NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- **NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- **DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ET3DV6

## SN:1590

Manufactured:	March 19, 2001
Last calibrated:	July 16, 2009
Recalibrated:	July 15, 2010

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

**DASY/EASY - Parameters of Probe: ET3DV6 SN:1590****Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	1.86	2.06	1.77	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	91.4	92.4	83.5	

**Modulation Calibration Parameters**

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc <sup>E</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	300.0	$\pm 1.5\%$
			Y	0.00	0.00	1.00	300.0	
			Z	0.00	0.00	1.00	300.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6)

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the maximum deviation from linear response applying recatangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ET3DV6 SN:1590

### Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	43.5 ± 5%	0.87 ± 5%	7.25	7.25	7.25	0.20	2.19 ± 13.3%
835	± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	6.27	6.27	6.27	0.32	2.49 ± 11.0%
900	± 50 / ± 100	41.5 ± 5%	0.97 ± 5%	6.12	6.12	6.12	0.27	2.86 ± 11.0%

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

## DASY/EASY - Parameters of Probe: ET3DV6 SN:1590


### Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	56.7 ± 5%	0.94 ± 5%	7.73	7.73	7.73	0.13	2.06 ± 13.3%
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	6.33	6.33	6.33	0.22	3.60 ± 11.0%
900	± 50 / ± 100	55.0 ± 5%	1.05 ± 5%	6.15	6.15	6.15	0.28	2.94 ± 11.0%

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



### Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

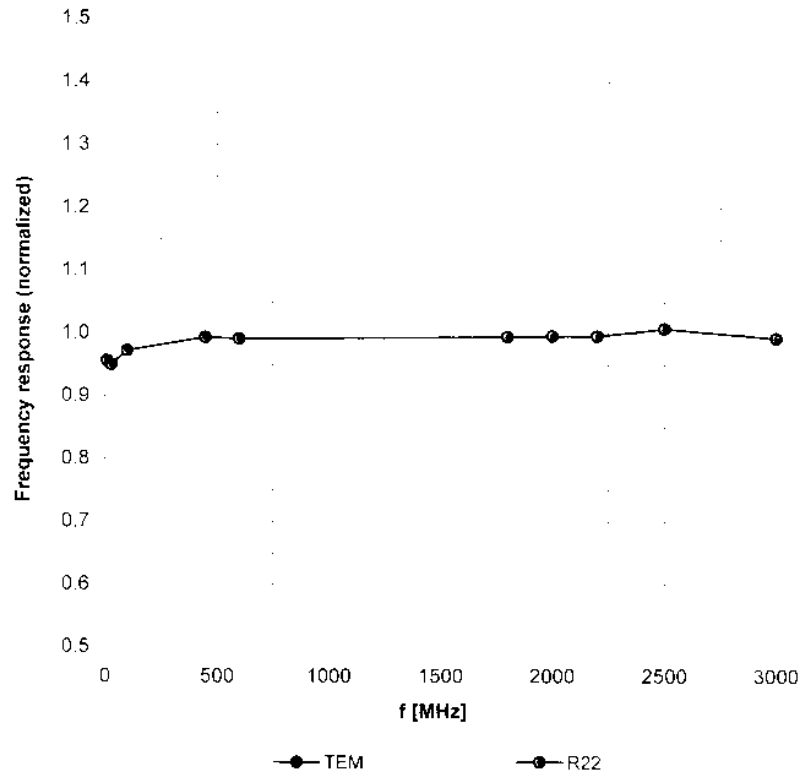

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )



### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

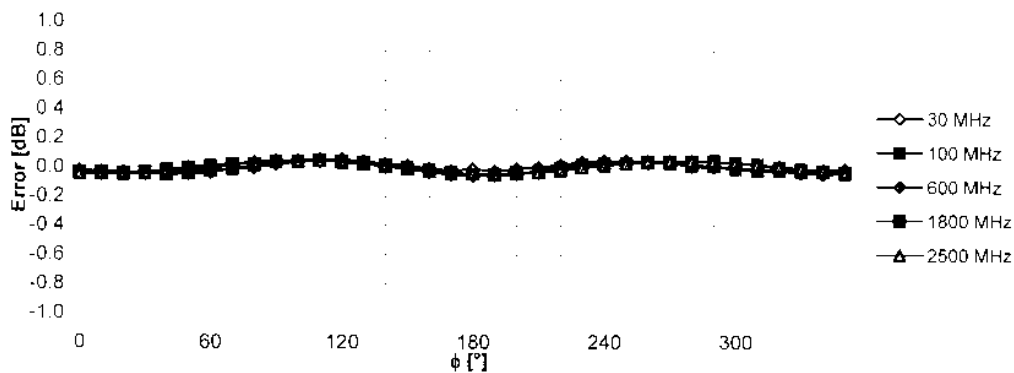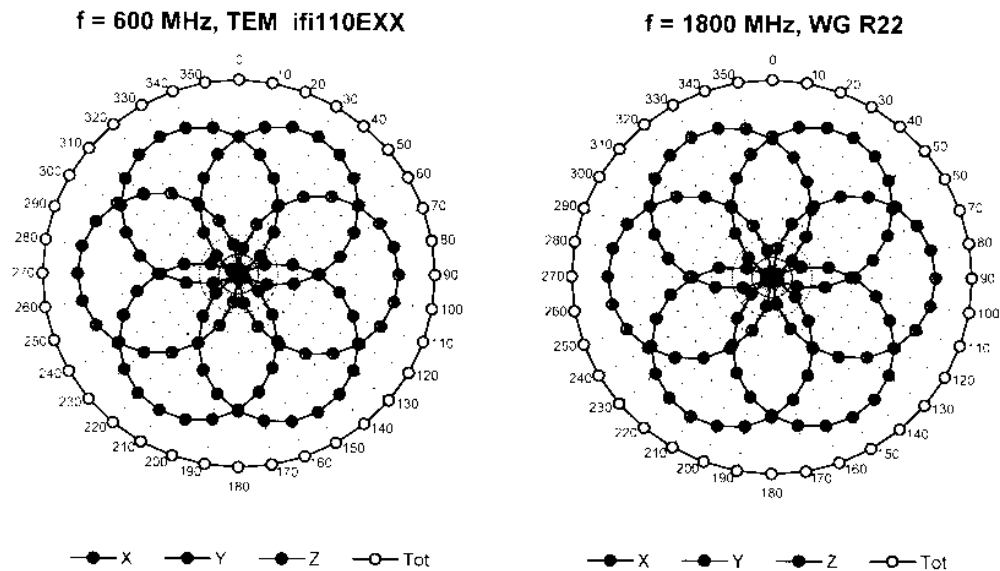

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )




### Dynamic Range f(SAR<sub>head</sub>) (Waveguide R22, f = 1800 MHz)

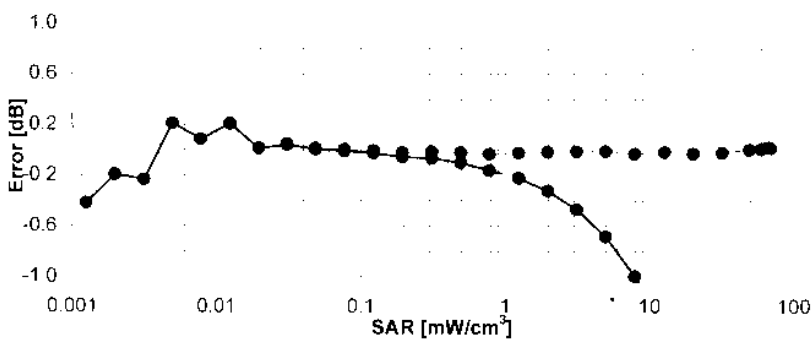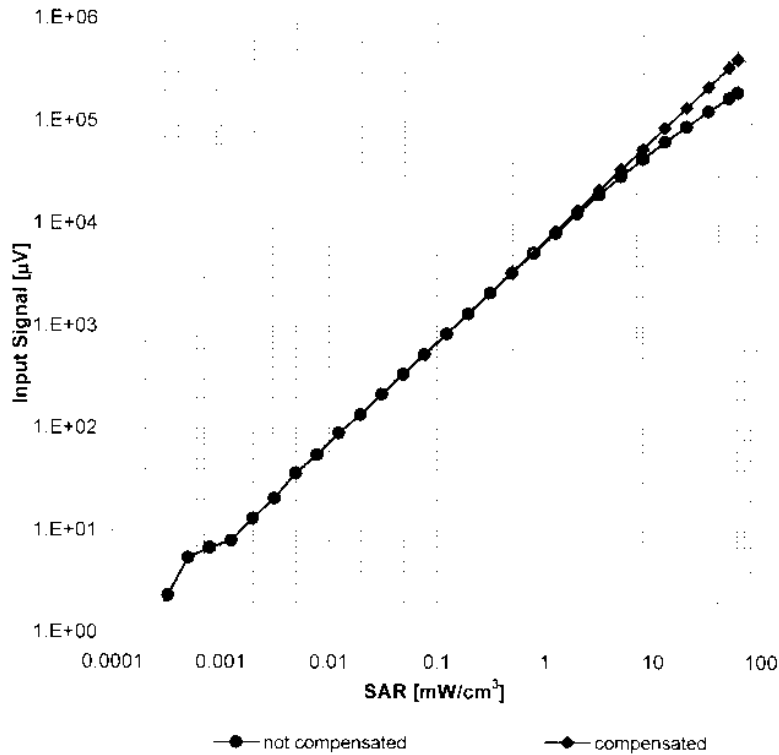



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

### Conversion Factor Assessment

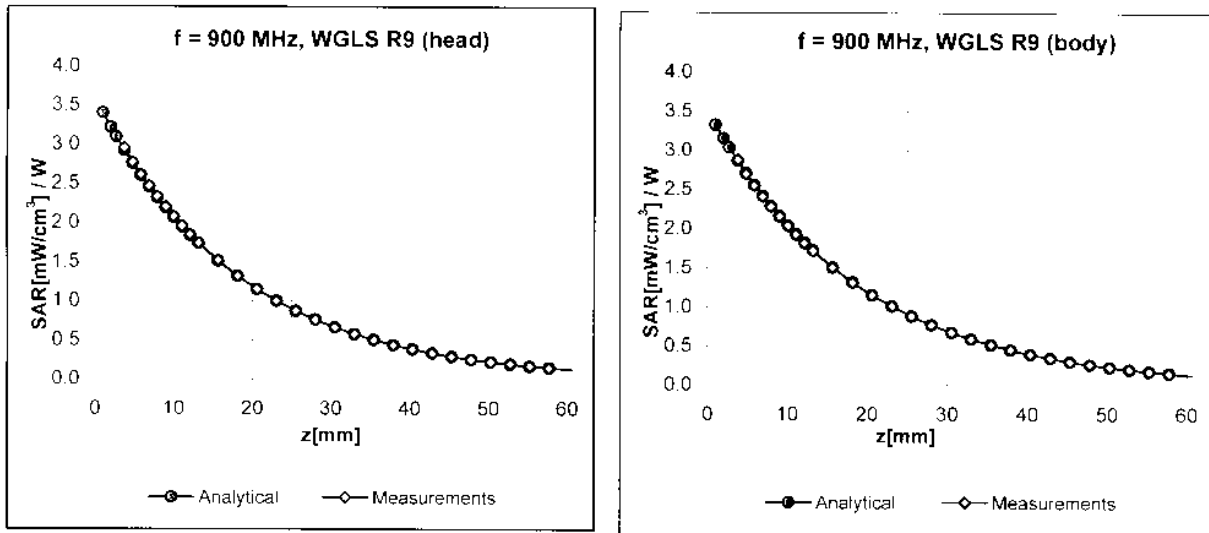

### Deviation from Isotropy in HSL

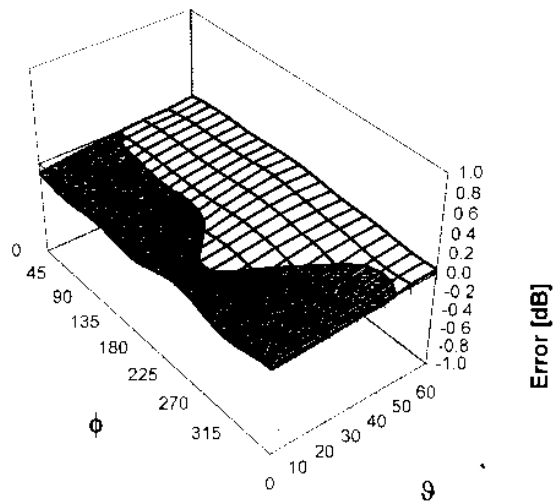

Error ( $\phi, \theta$ ), f = 900 MHz



Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  (k=2)

## Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

	<u>Date(s) of Evaluation</u> October 07, 2010	<u>Test Report Serial No.</u> 100710ALH-T1057-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 15, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**APPENDIX G - BARSKI PHANTOM CERTIFICATE OF CONFORMITY**

<b>Applicant:</b>	<b>Kenwood USA Corporation</b>	<b>FCC ID:</b>	<b>ALH437300</b>	<b>Model(s):</b>	<b>TK-3000-1</b>	<b>KENWOOD</b>
<b>DUT Type:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>Transmit Frequency Range:</b>	<b>440.0 - 480.0 MHz</b>			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 48 of 48

2378 Westlake Road  
Kelowna, B.C. Canada  
V1Z-2V2



Ph. # 250-769-6848  
Fax # 250-769-6334  
E-mail: [barskiind@shaw.ca](mailto:barskiind@shaw.ca)  
Web: [www.bcfiberglass.com](http://www.bcfiberglass.com)

## FIBERGLASS FABRICATORS

### Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01  
Date: June 16, 2003  
Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity < 5 Loss Tangent < 0.05

#### Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: \_\_\_\_\_

A handwritten signature in black ink, appearing to read 'Daniel Chailier', is written over a horizontal line.

Daniel Chailier



**Fiberglass Planar Phantom - Top View**



**Fiberglass Planar Phantom - Front View**




**Fiberglass Planar Phantom - Back View**



**Fiberglass Planar Phantom - Bottom View**

### Dimensions of Fiberglass Planar Phantom (Manufactured by Barski Industries Ltd. - Unit# 03-01)

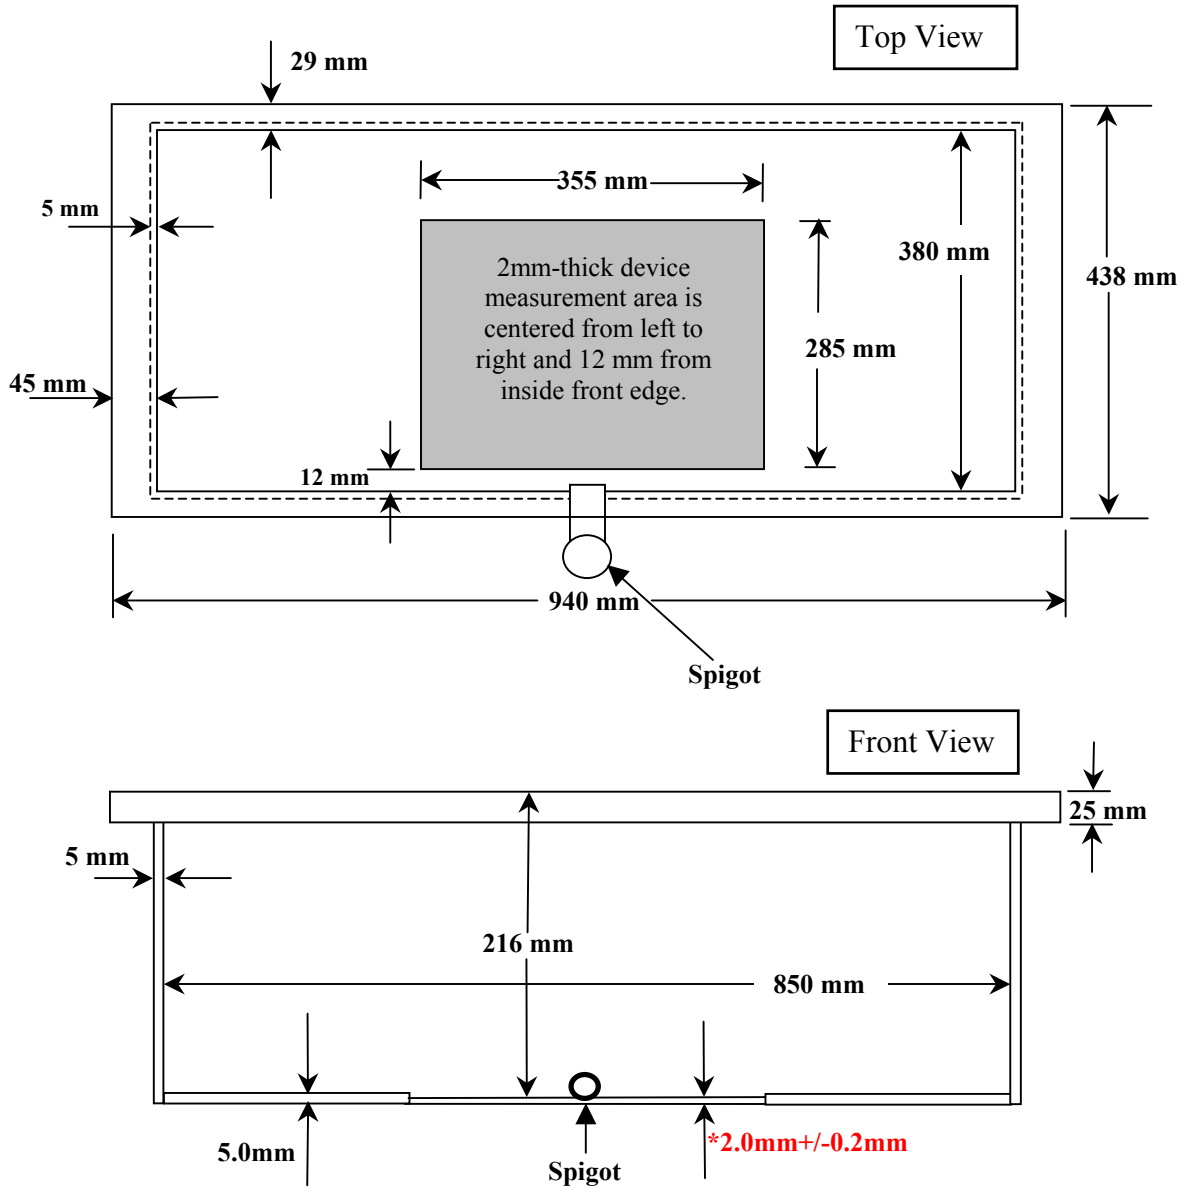

**Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.  
This drawing is not to scale.**