

FCC TEST REPORT
for
BearExtender

BearExtender Outdoor
Model No.: BE010

Prepared for : BearExtender
Address : 1406 Henry Street, Berkeley, California, 94709, United States

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,
Nanshan District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : R011410076E
Date of Test : Oct. 11~ Nov. 12, 2014
Date of Report : Nov. 13, 2014

TABLE OF CONTENT

Description

Page

Test Report

1. GENERAL INFORMATION 4

 1.1. Description of Device (EUT)..... 4

 1.2. Auxiliary Equipment Used during Test 5

 1.3. Description of Test Facility 6

 1.4. Measurement Uncertainty..... 6

2. TEST METHODOLOGY 7

 2.1. Summary of Test Results..... 7

 2.2. Description of Test Modes..... 7

 2.3. List of channels:..... 8

3. CONDUCTED EMISSION TEST..... 9

 3.1. Block Diagram of Test Setup 9

 3.2. Power Line Conducted Emission Measurement Limits (15.207)..... 9

 3.3. Configuration of EUT on Measurement 9

 3.4. Operating Condition of EUT 9

 3.5. Test Procedure 10

 3.6. Test equipment 10

 3.7. Power Line Conducted Emission Measurement Results 10

4. FCC PART 15.247 REQUIREMENTS FOR DSSS & OFDM MODULATION..... 13

 4.1 Test Setup 13

 4.2 6dB Bandwidth..... 13

 4.3. Maximum Output Power Test 29

 4.4. Band Edges Measurement 37

 4.5. Peak Power Spectral Density..... 74

 4.6. Radiated Emissions..... 82

5. PHOTOGRAPH..... 93

 5.1. Photo of Conducted Emission Measurement..... 93

 5.2. Photo of Radiation Emission Test 93

APPENDIX I (EXTERNAL PHOTOS)..... 95

APPENDIX II (INTERNAL PHOTOS) 98

Appendix I (3 Pages)

Appendix II (3 Pages)

TEST REPORT


Applicant : BearExtender
Manufacturer : Shenzhen Tuoshi Technology Co., Ltd.
EUT : BearExtender Outdoor
Model No. : BE010
Serial No. : N.A.
Trade Mark : BearExtender
Rating : DC 5V


Measurement Procedure Used:
FCC Part15 Subpart C, Paragraph 15.247


The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Oct. 11~ Nov. 12, 2014

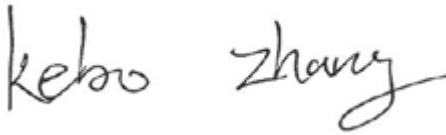Prepared by : 
(Tested Engineer / Kebo Zhang)

Reviewer : 
(Project Manager / Amy Ding)

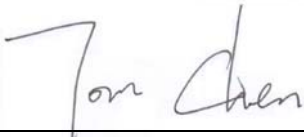Approved & Authorized Signer : 
(Manager / Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : BearExtender Outdoor

Model Number : BE010

Test Power Supply : DC 5V via USB Port

RF Transmission : 2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20))
Frequency : 2422MHz~2452MHz (802.11n(HT40))

Channels : 11 For (802.11b/802.11g/802.11n(HT20))
7 For (802.11n(HT40))

Modulation : 802.11b CCK
802.11g OFDM
802.11n MCS

Antenna Gain: : 10dBi

Applicant : BearExtender
Address : 1406 Henry Street, Berkeley, California, 94709, United States

Manufacturer : Shenzhen Tuoshi Technology Co., Ltd.
Address : 3F, A5 Building, Yinlong Technology Industrial Park, Shenshan Road 292, Longgang District, Shenzhen, China

Factory : Shenzhen Tuoshi Technology Co., Ltd.
Address : 3F, A5 Building, Yinlong Technology Industrial Park, Shenshan Road 292, Longgang District, Shenzhen, China

Date of receipt : Oct. 11, 2014

Date of Test : Oct. 11~ Nov. 12, 2014

1.2. Auxiliary Equipment Used during Test

PC	: Manufacturer: DELL M/N: OPTIPLEX 380 S/N: 1J63X2X CE , FCC: DOC
MONITOR	: Manufacturer: DELL M/N: E170Sc S/N: CN-00V539-64180-055-0UPS CE , FCC: DOC
KEYBOARD	: Manufacturer: DELL M/N: SK-8115 S/N: CN-0DJ313-71616-06C-02XN CE , FCC: DOC Cable: 1m, unshielded
MOUSE	: Manufacturer: DELL M/N: M-UARDEL7 S/N: N/A CE , FCC: DOC Cable: 1m, unshielded
Printer	: Manufacturer: Brother M/N: MFC-3360C S/N: N/A CE, FCC: DOC
Power Line	: Non-Shielded, 1.5m
VGA Cable	: Non-Shielded, 1.5m
Network Cable	: Non-Shielded, 1.5m

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Shenzhen Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 10, 2013.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, February 22, 2013.

Test Location

All Emissions tests were performed at
Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC Part 15, Paragraph 15.247.

2.1. Summary of Test Results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107, 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15, Paragraph 15.247(b)(1)	Maximum Output Power	PASS	Complies
FCC Part 15, Paragraph 15.247(a)(2)	6dB Bandwidth	PASS	Complies
FCC Part 15, Paragraph 15.247(c)	100kHz Bandwidth of Frequency Band Edges	PASS	Complies
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS	Complies
FCC Part 15, Paragraph 15.247(a)(1)	Frequency Separation	-	N/A
FCC Part 15, Paragraph 15.247(a)(1)(iii)	Number of Hopping Frequency	-	N/A
FCC Part 15, Paragraph 15.247(a)(1)(iii)	Time of Occupancy	-	N/A
FCC Part 15, Paragraph 15.247(c)	Peak Power Density	PASS	Complies

2.2. Description of Test Modes

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 1 Mbps lowest data rate (worst case) are chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6 Mbps lowest data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT20): Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with MCS 0 Mbps lowest data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT40): Channel 3(2422MHz), Channel 6(2437MHz) and Channel 9(2452MHz) with MCS 0 Mbps lowest data rate (the worst case) are chosen for the final testing.

2.3. List of channels:

√ - available


X - tested

Number	Frequency(MHz)		802.11 b/g/n (HT20)	802.11 b/g/n (HT40)
1	2412	√	X	
2	2417	√		
3	2422	√		X
4	2427	√		
5	2432	√		
6	2437	√	X	X
7	2442	√		
8	2447	√		
9	2452	√		X
10	2457	√		
11	2462	√	X	

3. Conducted Emission Test

3.1. Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators

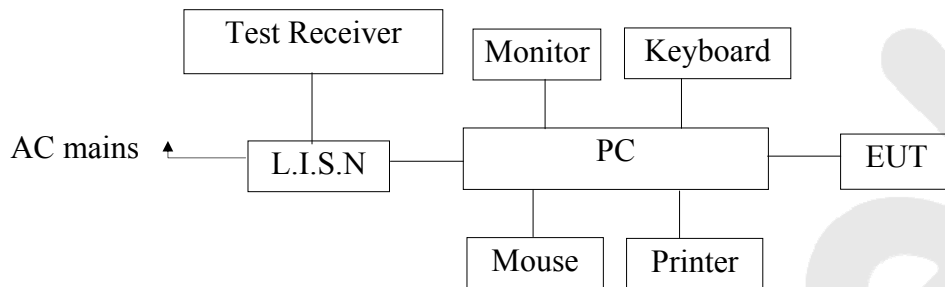

3.2. Power Line Conducted Emission Measurement Limits (15.207)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

- Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

3.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4. Operating Condition of EUT

- 3.4.1. Setup the EUT and simulator as shown as Section 3.1.
- 3.4.2. Turn on the power of all equipment.
- 3.4.3. Let the EUT work in test mode (On) and measure it.

3.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 3.6.

3.6. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Apr. 22, 2014	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 22, 2014	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Apr. 22, 2014	1 Year

3.7. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.


Please refer the following pages.

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
 Operating Condition: On
 Test Specification: DC 5V via USB Port
 Comment: Live Line
 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

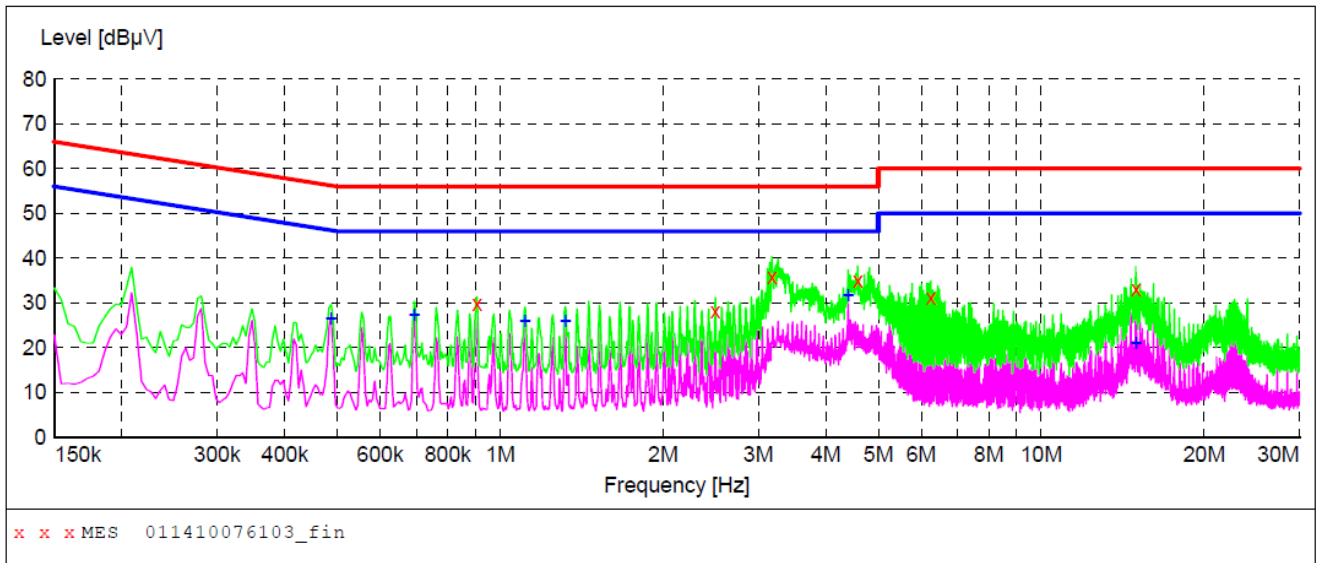

MEASUREMENT RESULT: "011410076103_fin"

10/13/2014 7:35PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.906000	29.90	20.1	56	26.1	QP	L1	GND
2.498500	28.10	20.3	56	27.9	QP	L1	GND
3.178000	35.80	20.4	56	20.2	QP	L1	GND
4.577500	35.00	20.5	56	21.0	QP	L1	GND
6.251500	31.30	20.5	60	28.7	QP	L1	GND
14.954500	33.10	20.7	60	26.9	QP	L1	GND

MEASUREMENT RESULT: "011410076103_fin2"

10/13/2014 7:35PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.487500	26.60	20.1	46	19.6	AV	L1	GND
0.694500	27.30	20.1	46	18.7	AV	L1	GND
1.112500	26.00	20.2	46	20.0	AV	L1	GND
1.319500	26.00	20.2	46	20.0	AV	L1	GND
4.397500	31.70	20.5	46	14.3	AV	L1	GND
14.954500	21.00	20.7	50	29.0	AV	L1	GND

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
 Operating Condition: On
 Test Specification: DC 5V via USB Port
 Comment: Neutral Line
 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

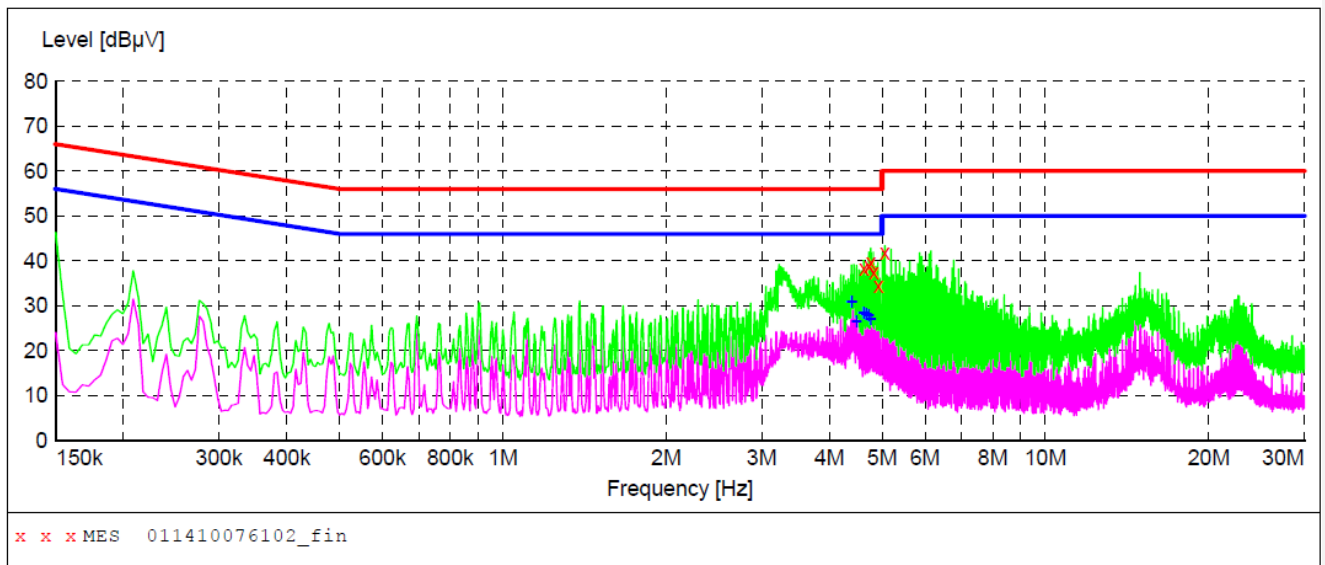

MEASUREMENT RESULT: "011410076102_fin"

10/13/2014 7:32PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
4.627000	38.40	20.5	56	17.6	QP	N	GND
4.726000	38.90	20.5	56	17.1	QP	N	GND
4.771000	39.50	20.5	56	16.5	QP	N	GND
4.820500	37.60	20.5	56	18.4	QP	N	GND
4.915000	34.50	20.5	56	21.5	QP	N	GND
5.059000	41.80	20.5	60	18.2	QP	N	GND

MEASUREMENT RESULT: "011410076102_fin2"

10/13/2014 7:32PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
4.397500	30.90	20.5	46	15.1	AV	N	GND
4.487500	26.40	20.5	46	19.6	AV	N	GND
4.627000	28.40	20.5	46	17.6	AV	N	GND
4.676500	28.20	20.5	46	17.8	AV	N	GND
4.726000	27.80	20.5	46	18.2	AV	N	GND
4.771000	27.00	20.5	46	19.0	AV	N	GND

4. FCC Part 15.247 Requirements for DSSS & OFDM Modulation

4.1 Test Setup



4.2 6dB Bandwidth

a. Limit

For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

b. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 100kHz, VBW $\geq 3 \times$ RBW = 300kHz,
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

20dB Bandwidth:

C63.10

Occupied Bandwidth (OBW=20dB Bandwidth)

1. Set RBW=1%~5% OBW
2. Set the VBW $\geq 3 \times$ RBW
3. Set the span range between 2 times and 5 times of the OBW
4. Sweep Time= Auto
Detector= Peak
Trace= Max hold
5. Once the reference level is established, the equipment is conditioned with typical modulating signals to produce the worst case (i.e. the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the -20dB levels with respect to the reference level.

c. Test Setup See 4.1

d. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Aug. 08, 2014	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Aug. 08, 2014	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 22, 2014	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 04, 2014	1 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 24, 2014	1 Year
6.	Pre-amplifier	SONOMA	310N	186860	Aug. 08, 2014	1 Year
7.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

e. Test Results

Pass.

f. Test Data

6dB Bandwidth

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	11.948		Pass
Mid	2437	12.004	>500	Pass
High	2462	11.948		Pass

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	16.240		Pass
Mid	2437	16.356	>500	Pass
High	2462	16.240		Pass

Test mode: IEEE 802.11n (HT20)

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	17.052		Pass
Mid	2437	16.992	>500	Pass
High	2462	16.936		Pass

Test mode: IEEE 802.11n (HT40)

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2422	36.360		Pass
Mid	2437	36.360	>500	Pass
High	2452	36.360		Pass

Test Plots See the following page.


Test Mode: 802.11b---Low



*RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -0.08 dB
SWT 10 ms 11.948000000 MHz

Ref 30 dBm *Att 45 dB

1 PK
VIEW

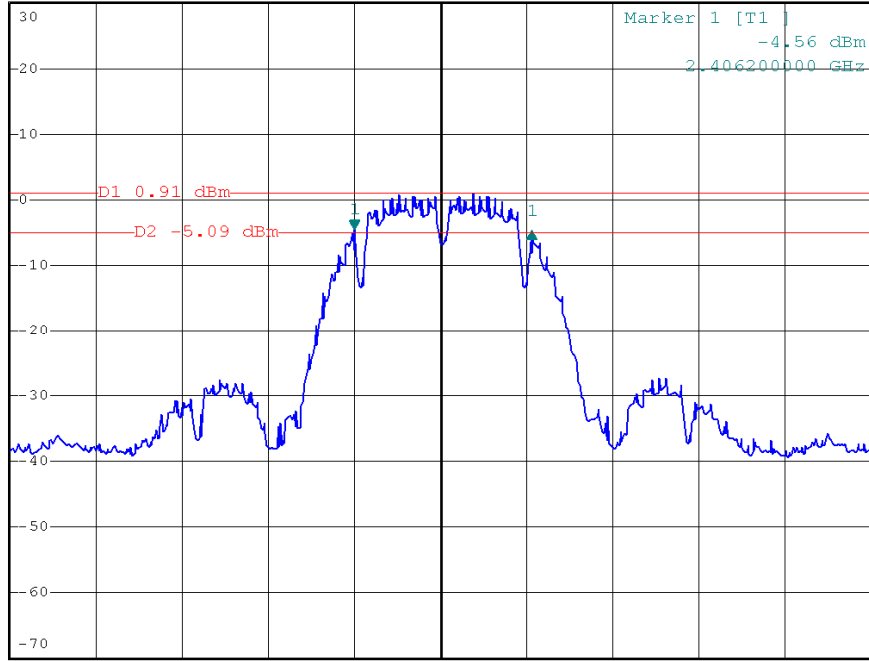


Test Mode: 802.11b---Mid



*RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -0.19 dB
SWT 10 ms 12.004000000 MHz

Ref 30 dBm *Att 45 dB

1 PK
VIEW

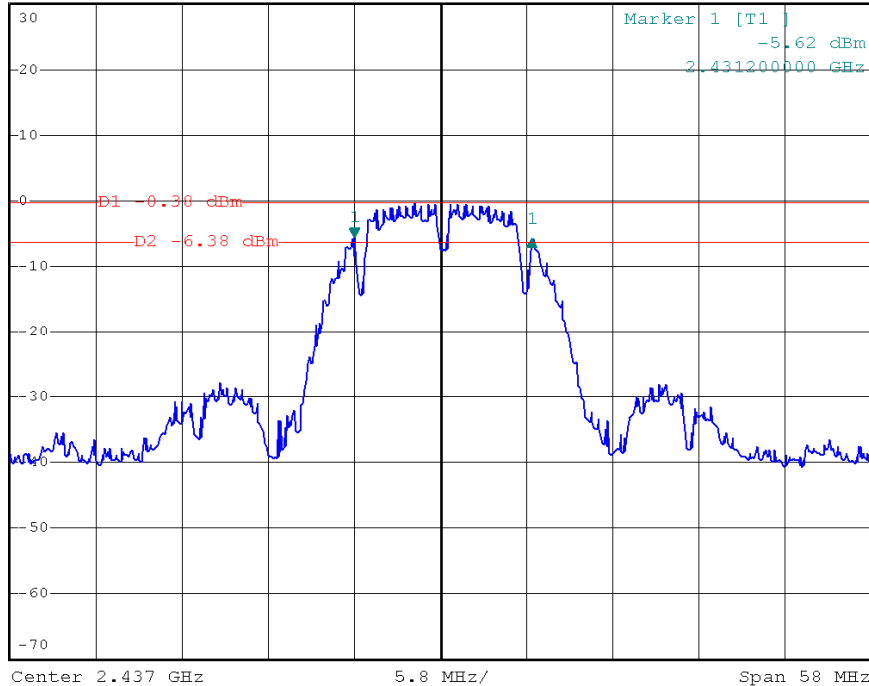


Test Mode: 802.11b---High



*RBW 100 kHz Delta 2 [T1]
*VBW 300 kHz 0.02 dB
SWT 10 ms 11.948000000 MHz

Ref 30 dBm *Att 45 dB

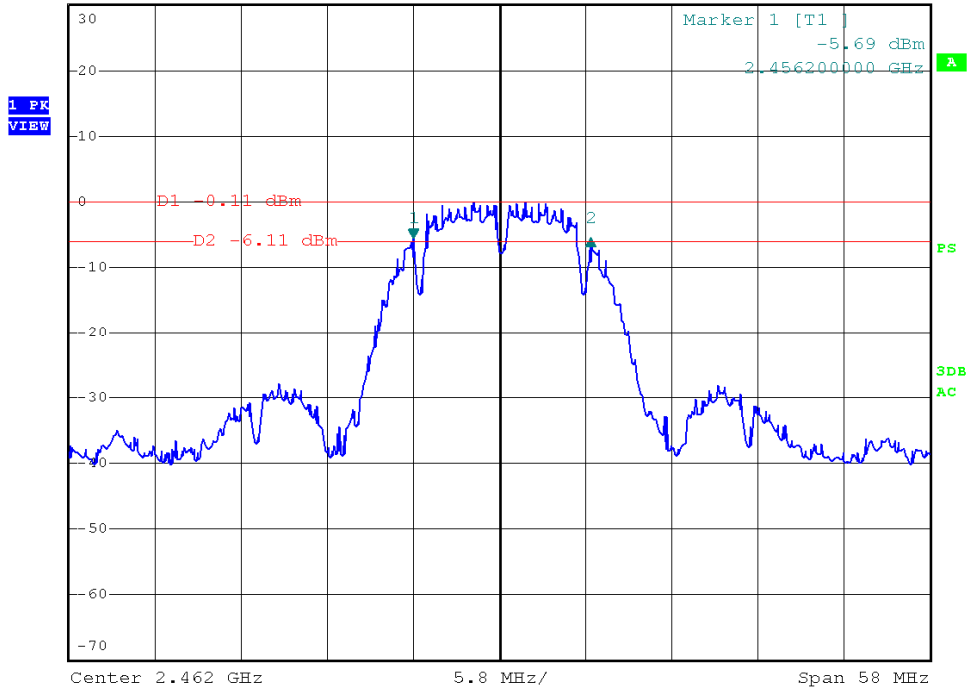


Test Mode: 802.11g---Low



*RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -0.02 dB
SWT 10 ms 16.240000000 MHz

Ref 30 dBm *Att 45 dB

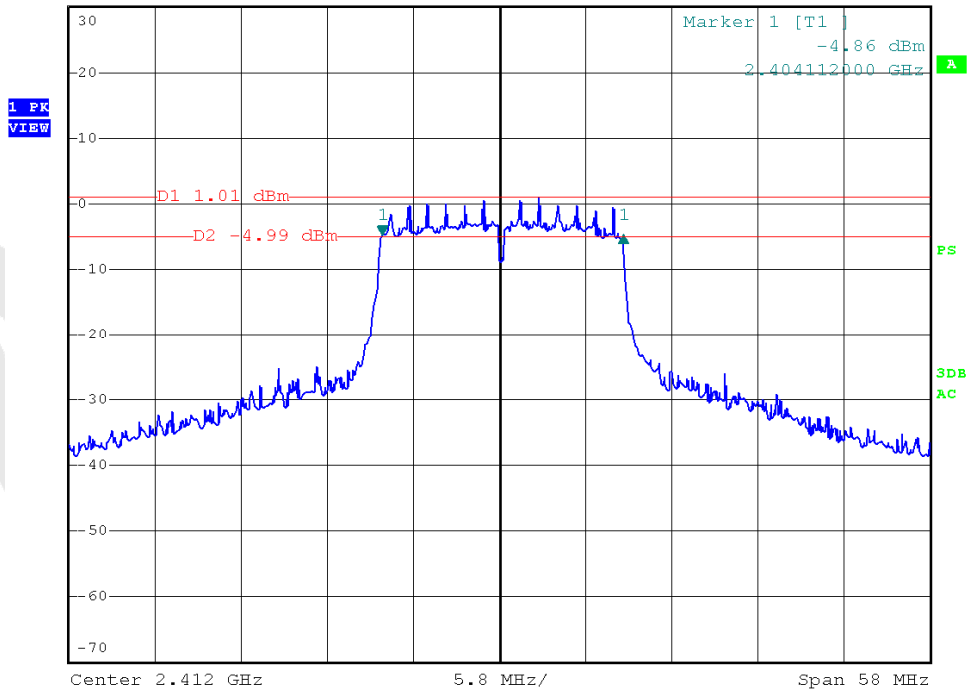


Test Mode: 802.11g---Mid



*RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -0.12 dB
SWT 10 ms 16.356000000 MHz

Ref 30 dBm *Att 45 dB

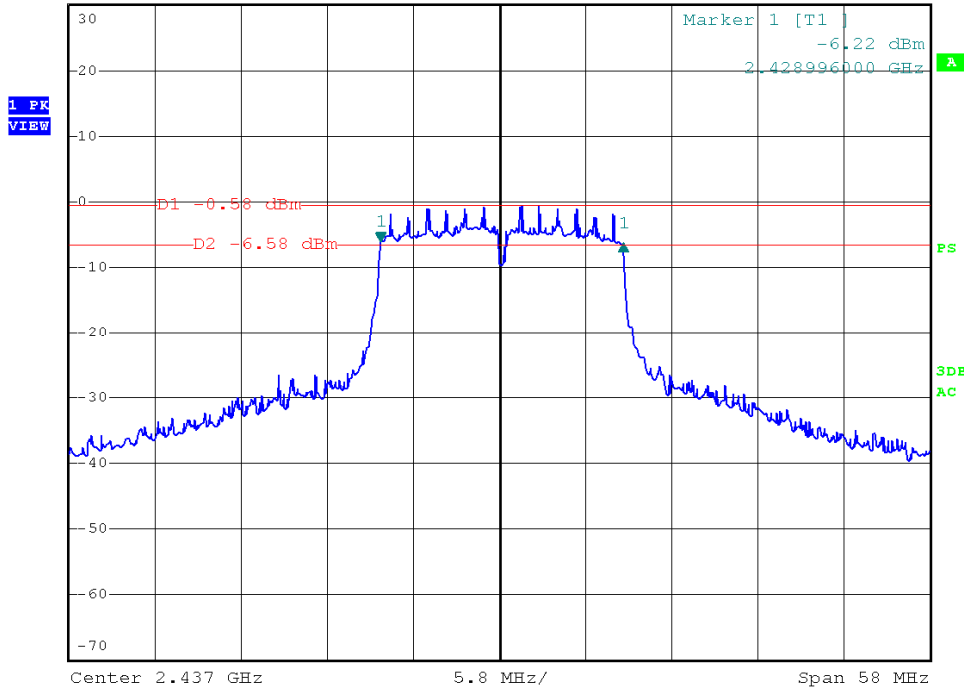


Test Mode: 802.11g---High



*RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -0.32 dB
SWT 10 ms 16.240000000 MHz


Ref 30 dBm *Att 45 dB

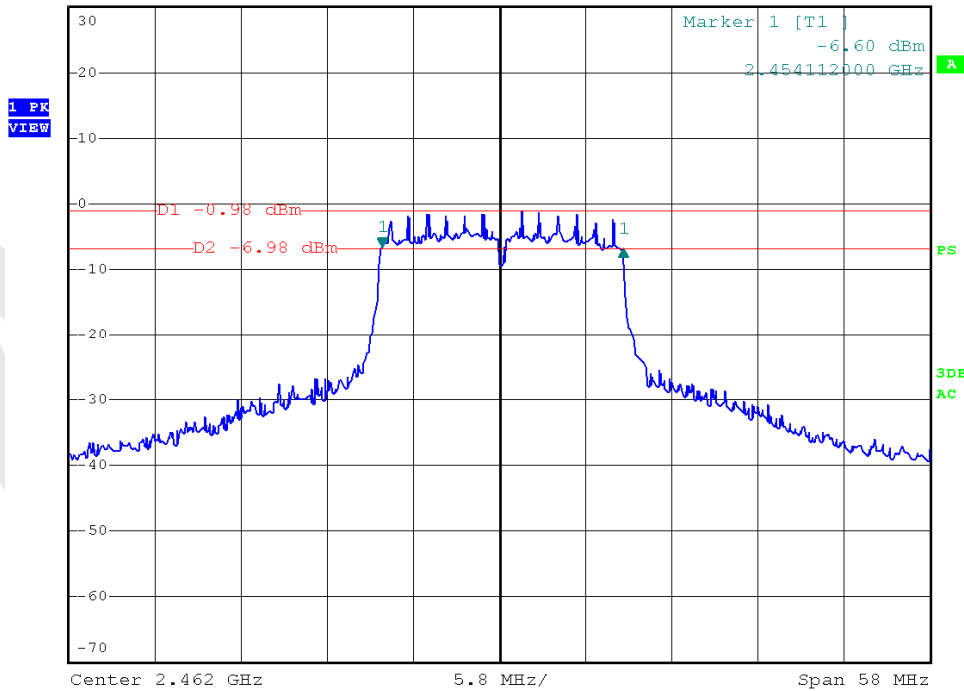

Test Mode: 802.11n (HT20)---Low




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -5.31 dBm
SWT 10 ms 2.403648000 GHz

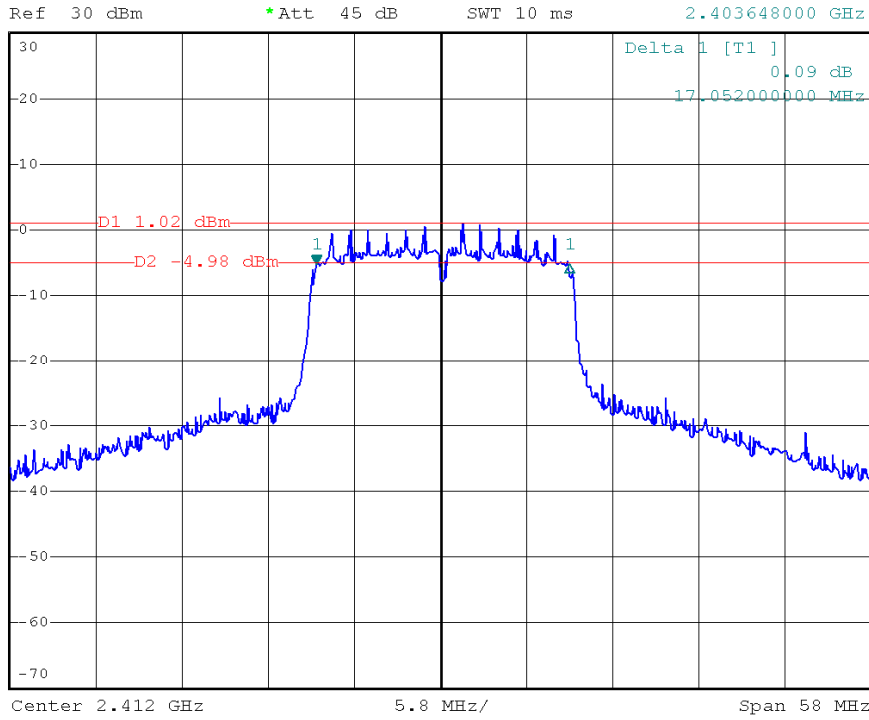

Test Mode: 802.11n (HT20)---Mid



*RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz 0.25 dB
SWT 10 ms 16.992000000 MHz

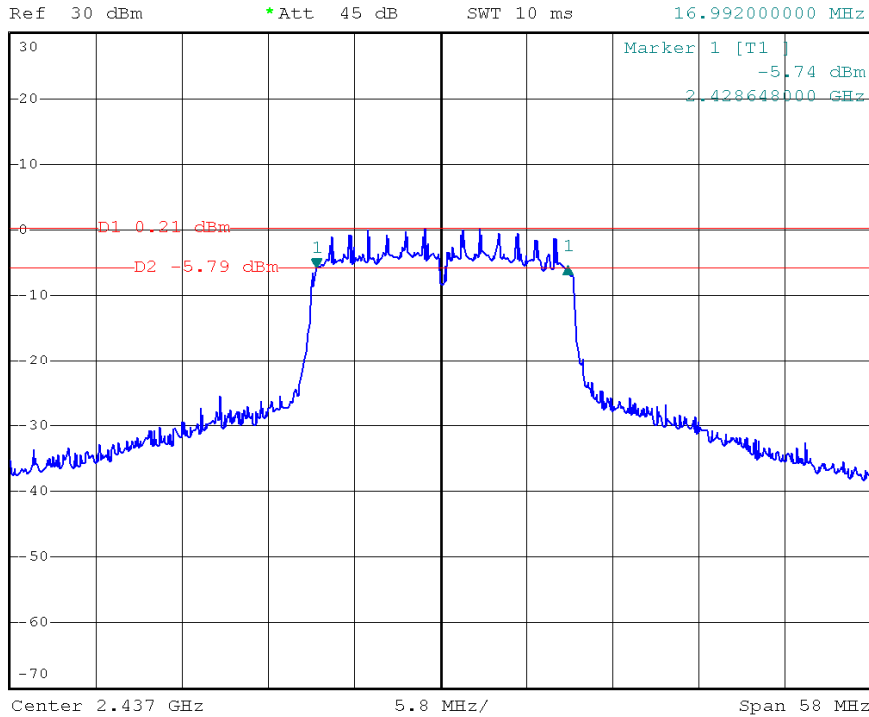


Test Mode: 802.11n (HT20)---High



*RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz 0.05 dB
SWT 10 ms 16.936000000 MHz

Ref 30 dBm *Att 45 dB

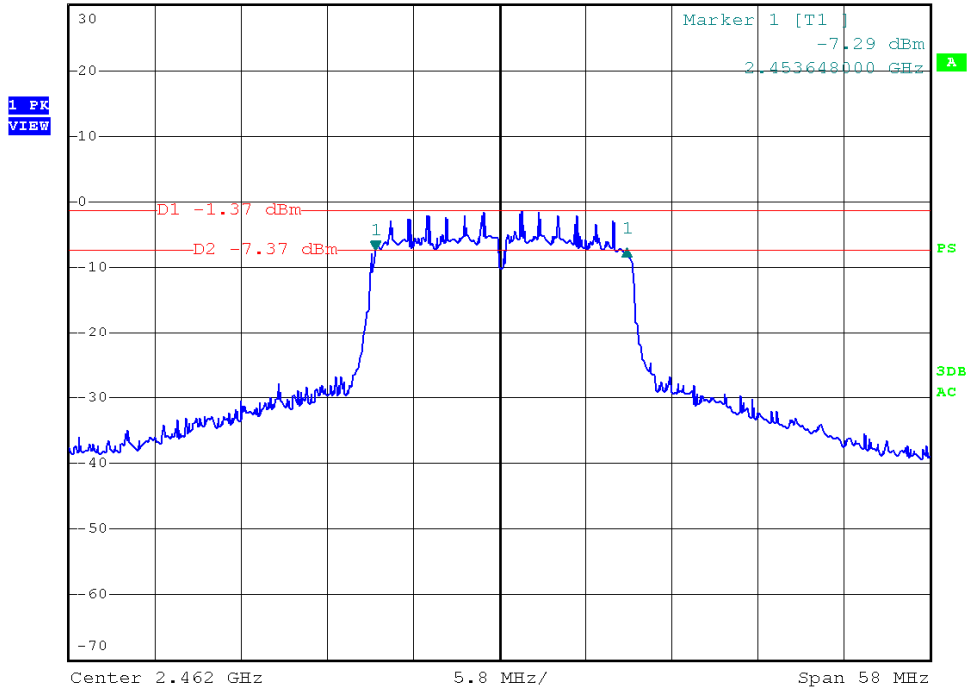


Test Mode: 802.11n (HT40)---Low



*RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -1.17 dB
SWT 10 ms 35.360000000 MHz

Ref 30 dBm *Att 45 dB

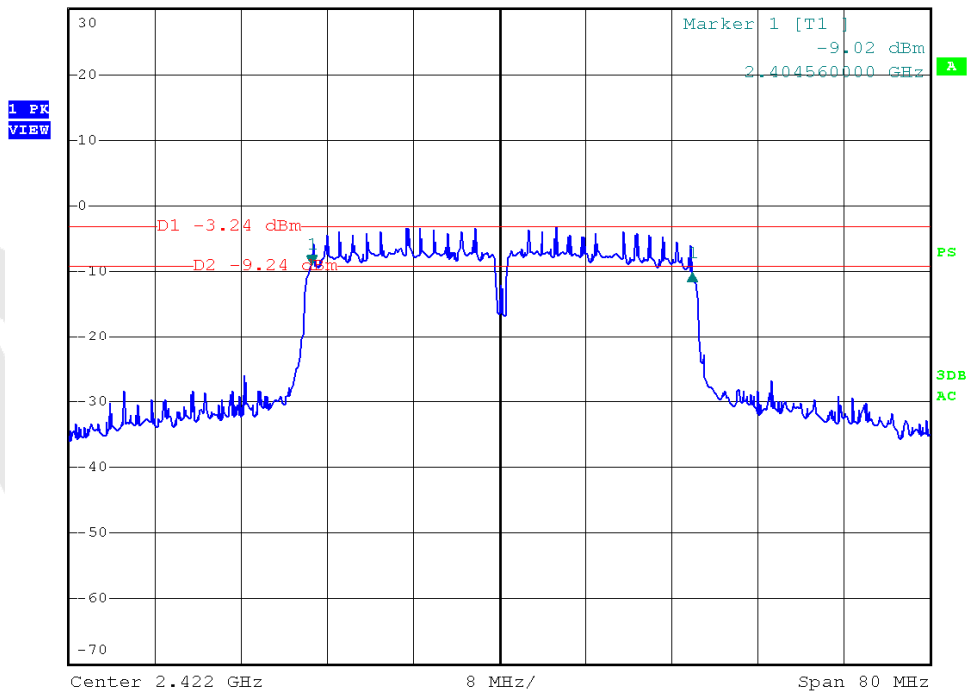


Test Mode: 802.11n (HT40)---Mid



*RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -2.26 dB
SWT 10 ms 35.36000000 MHz

Ref 30 dBm *Att 45 dB

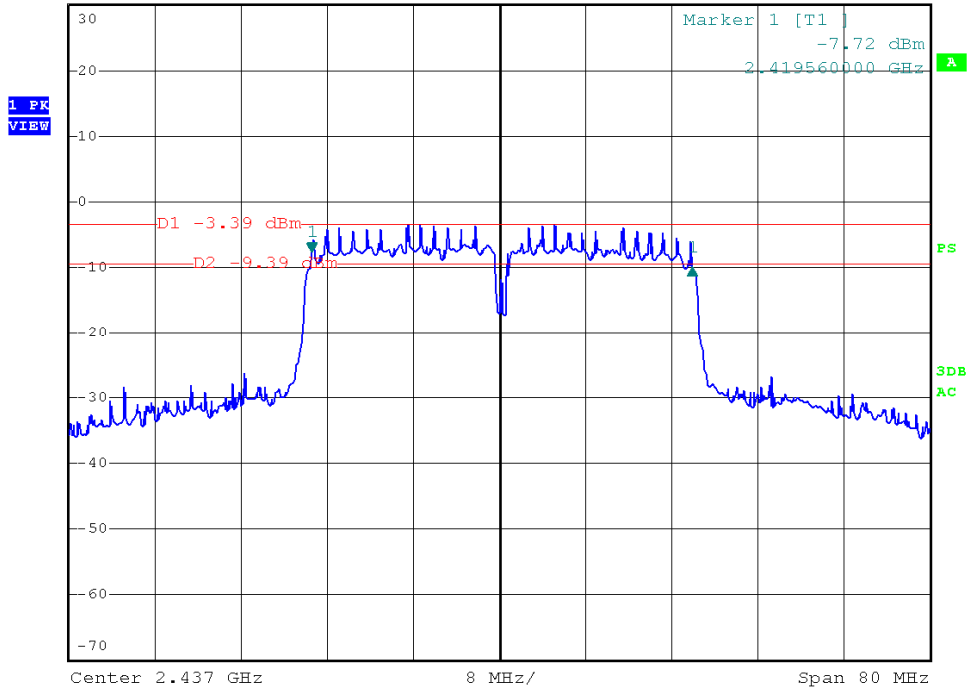


Test Mode: 802.11n (HT40)---High



*RBW 100 kHz Delta 1 [T1]
*VBW 300 kHz -1.41 dB
SWT 10 ms 35.36000000 MHz

Ref 30 dBm *Att 45 dB

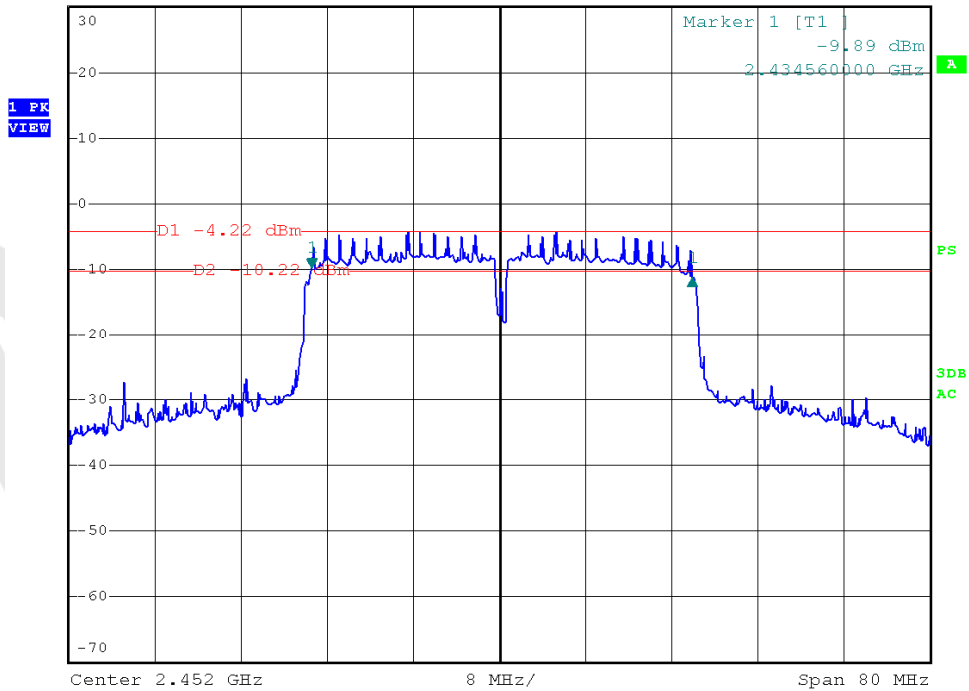

20dB Bandwidth

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (MHz)	Results
Low	2412	16.4325	Pass
Mid	2437	16.3200	Pass
High	2462	16.4400	Pass

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (MHz)	Results
Low	2412	18.6825	Pass
Mid	2437	18.7200	Pass
High	2462	18.7000	Pass

Test mode: IEEE 802.11n (HT20)


Channel	Frequency (MHz)	Bandwidth (MHz)	Results
Low	2412	18.2225	Pass
Mid	2437	18.9700	Pass
High	2462	18.8800	Pass

Test mode: IEEE 802.11n (HT40)


Channel	Frequency (MHz)	Bandwidth (MHz)	Results
Low	2422	39.1825	Pass
Mid	2437	38.9725	Pass
High	2452	39.1400	Pass

Test Plots See the following page.


Test Mode: 802.11b---Low

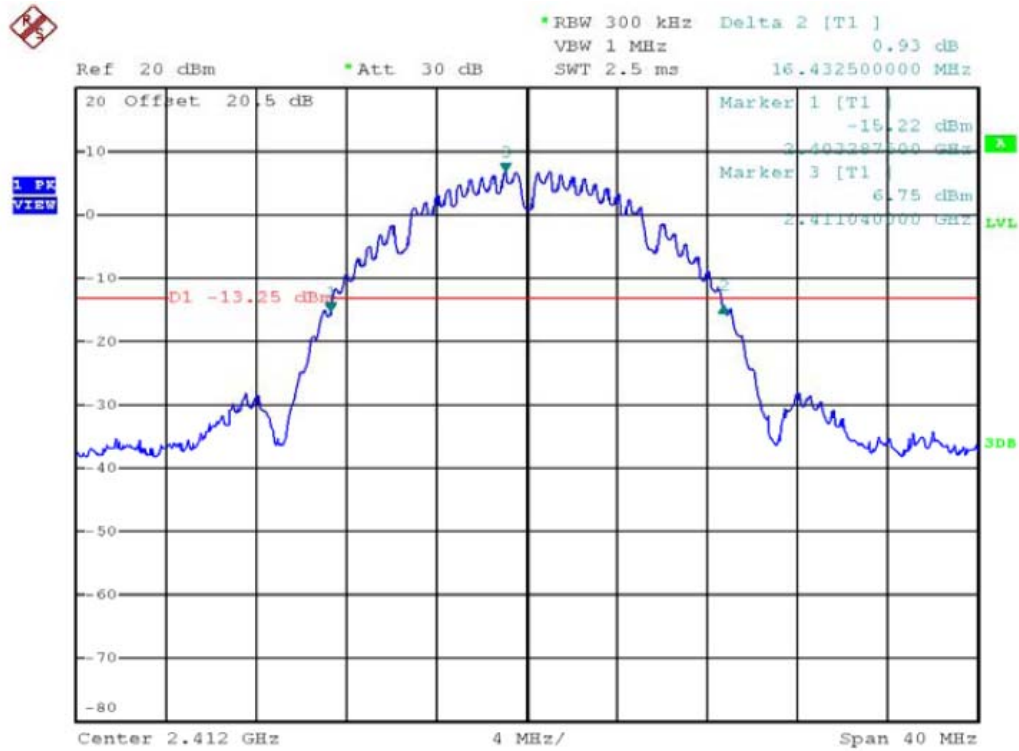


Test Mode: 802.11b---Mid

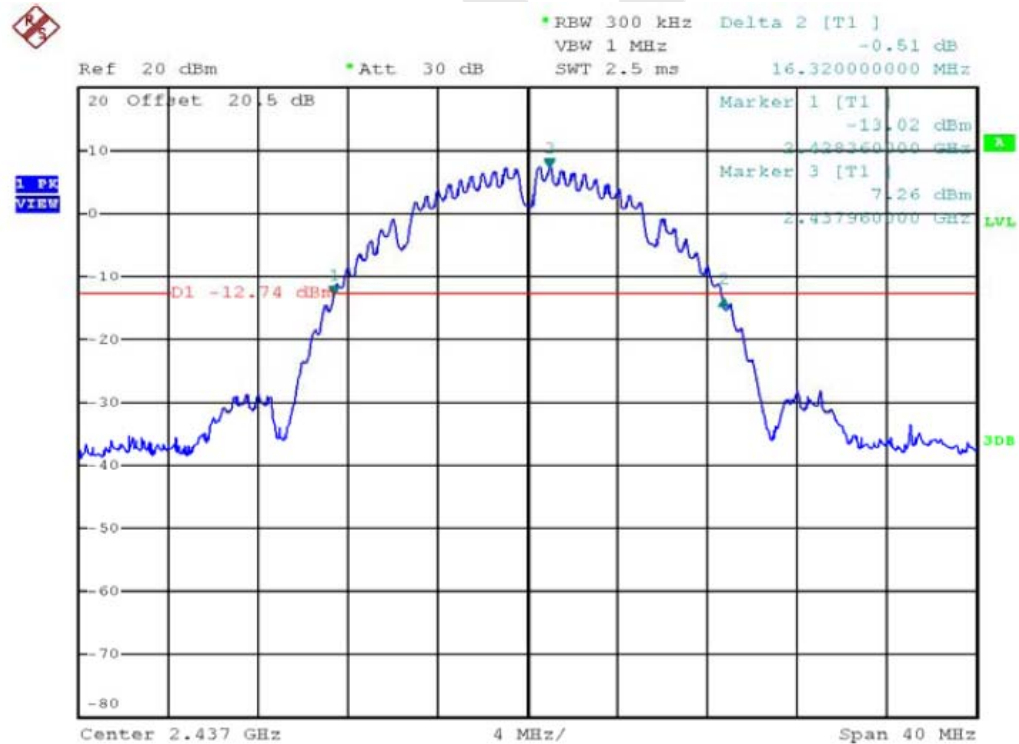


Test Mode: 802.11b---High

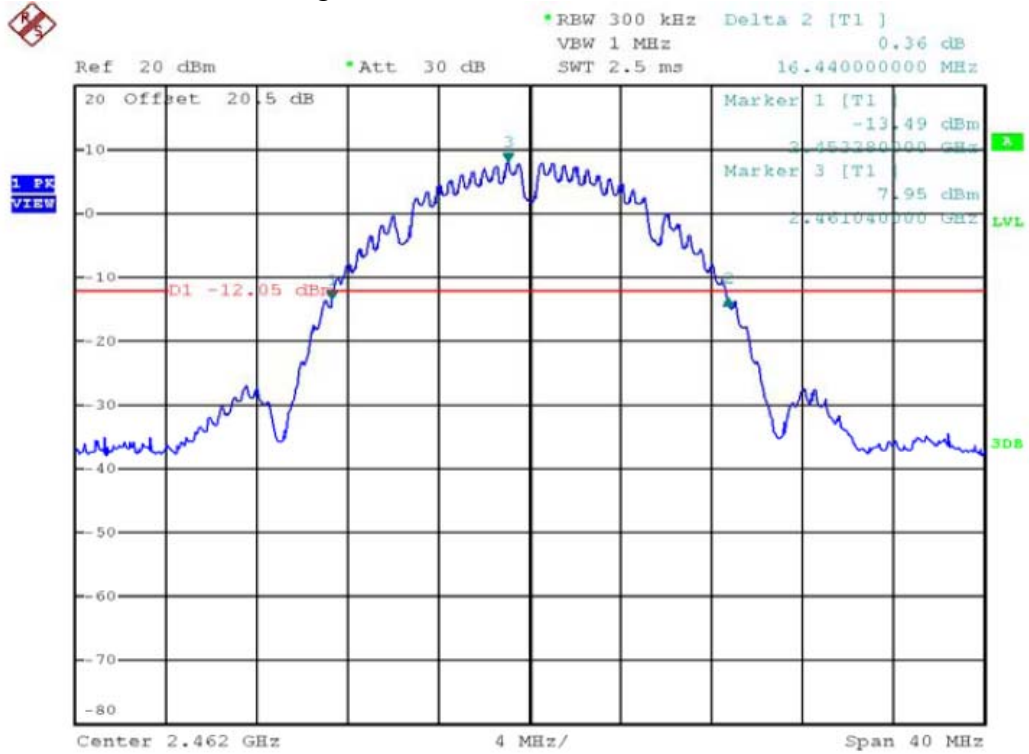


Test Mode: 802.11g---Low

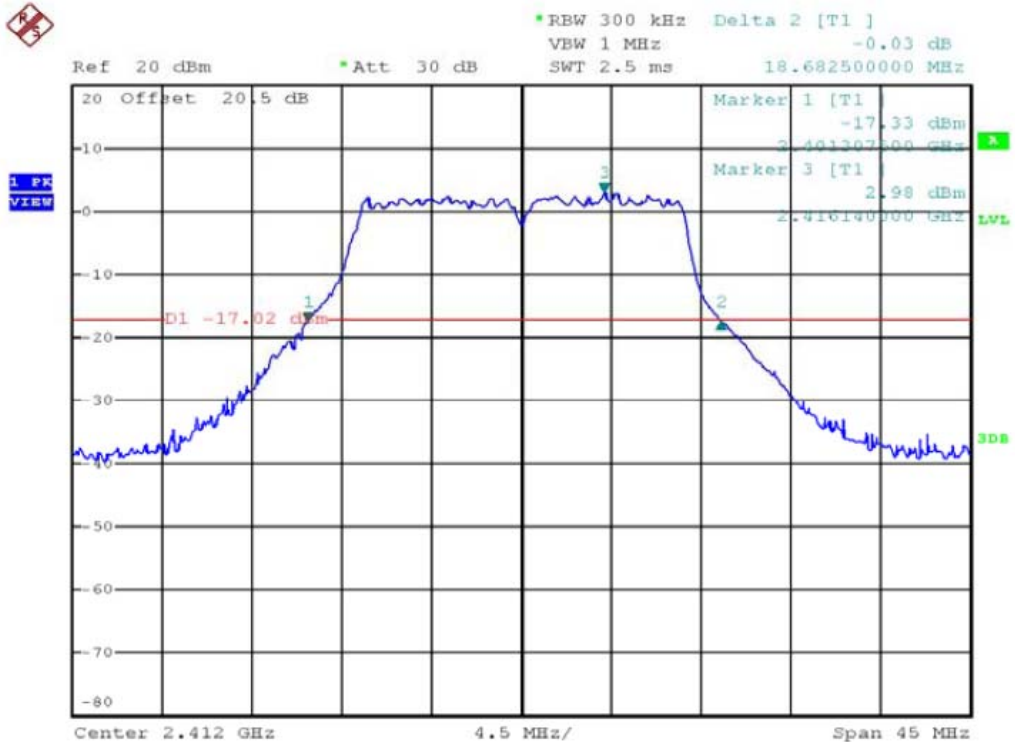


Test Mode: 802.11g---Mid

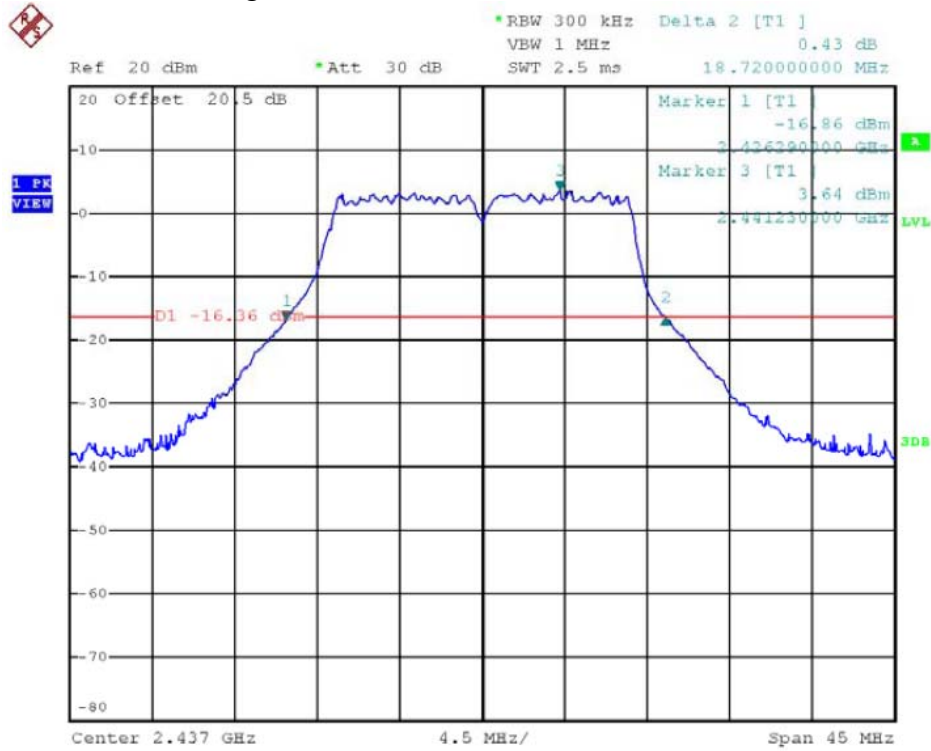


Test Mode: 802.11g---High

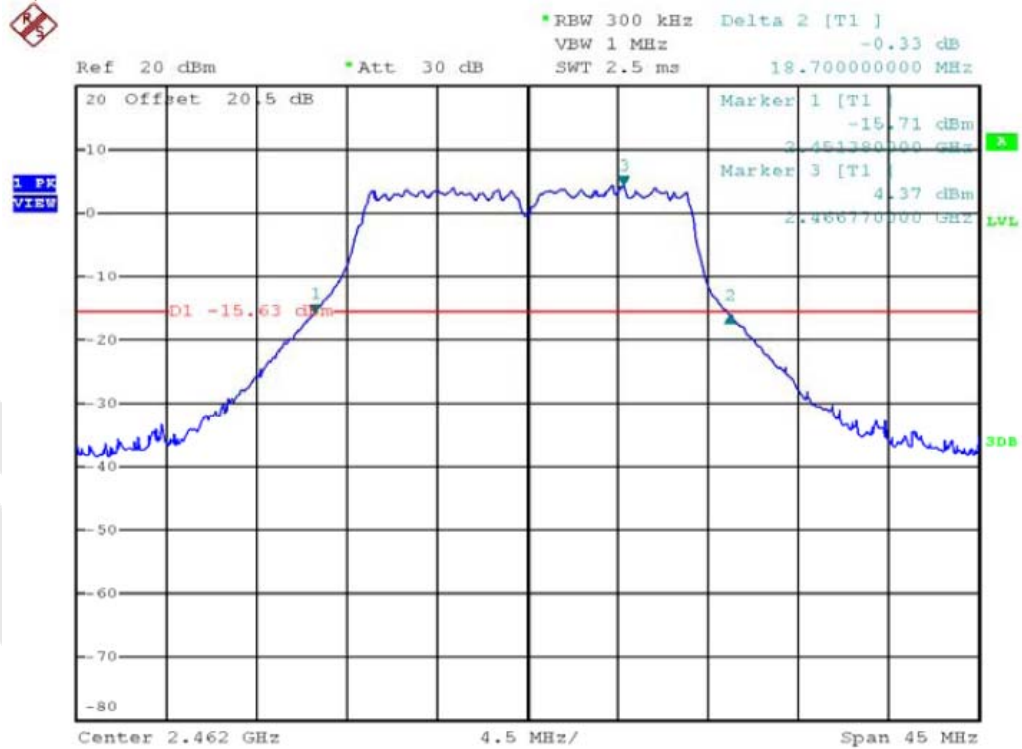


Test Mode: 802.11n (HT20)---Low

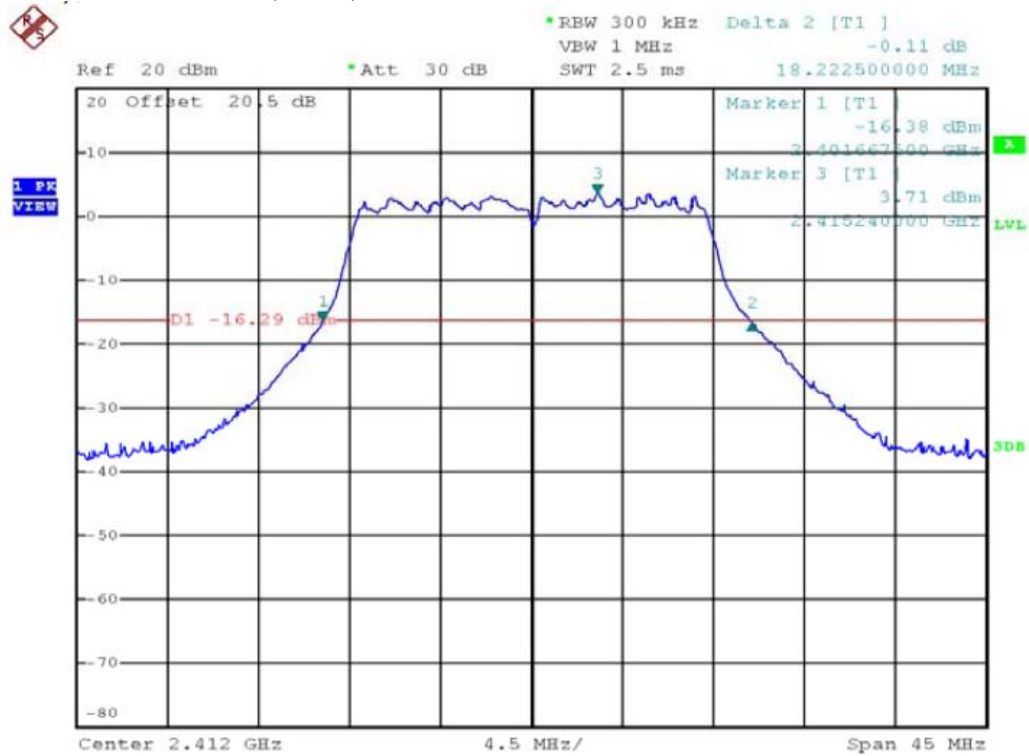


Test Mode: 802.11n (HT20)---Mid

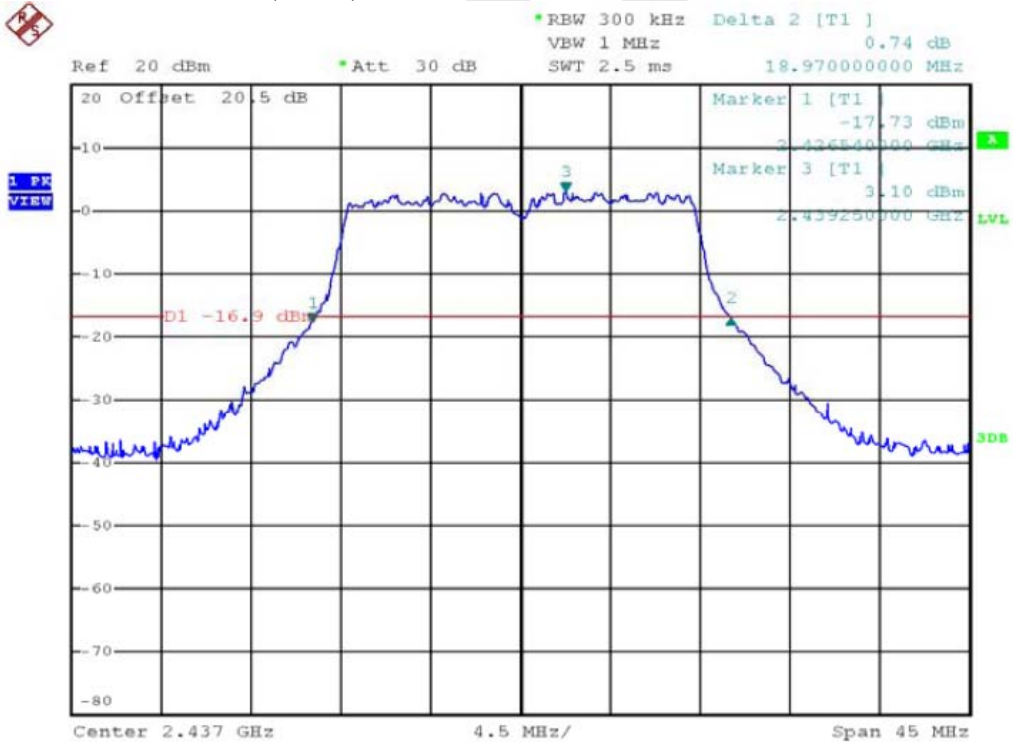


Test Mode: 802.11n (HT20)---High

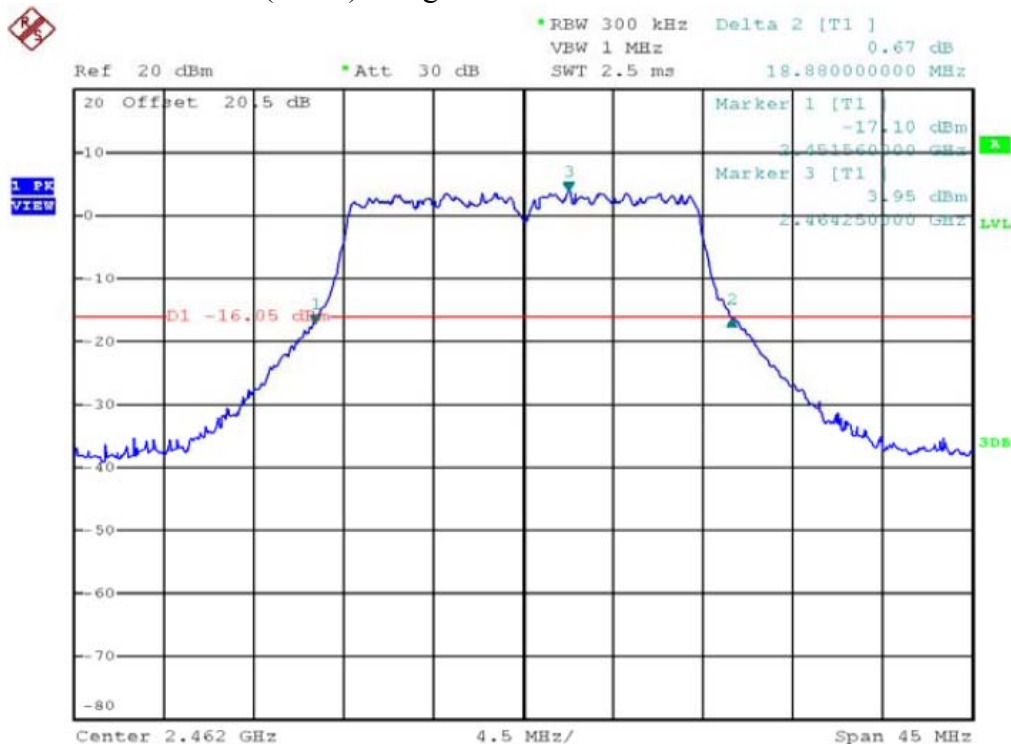


Test Mode: 802.11n (HT40)---Low

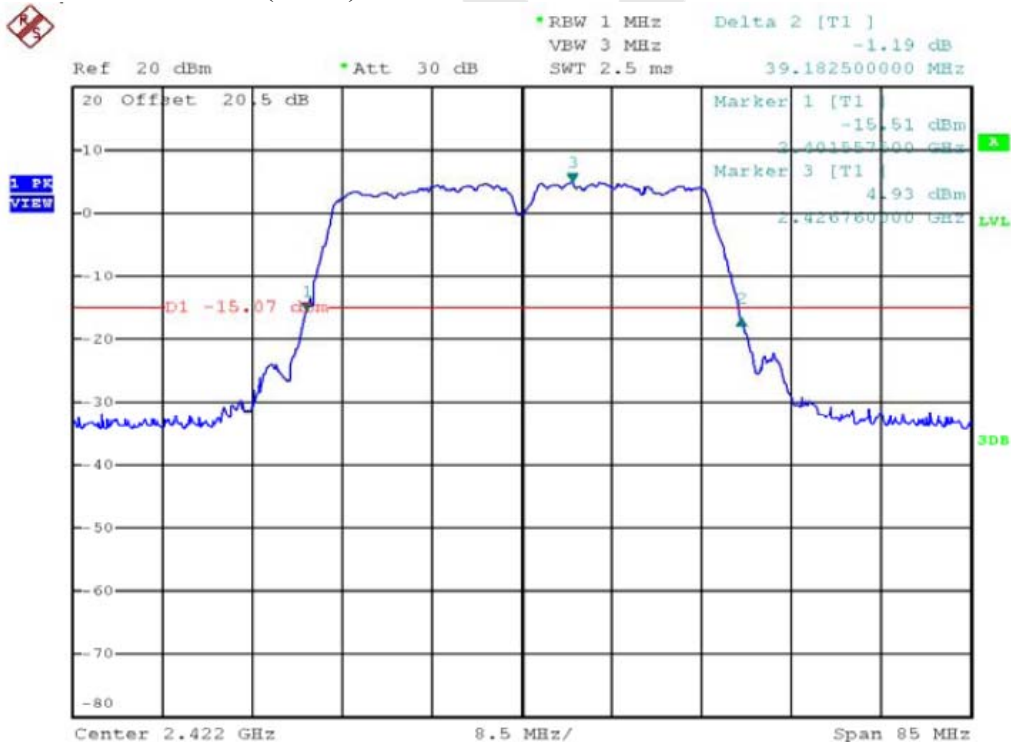

Test Mode: 802.11n (HT40)---Mid

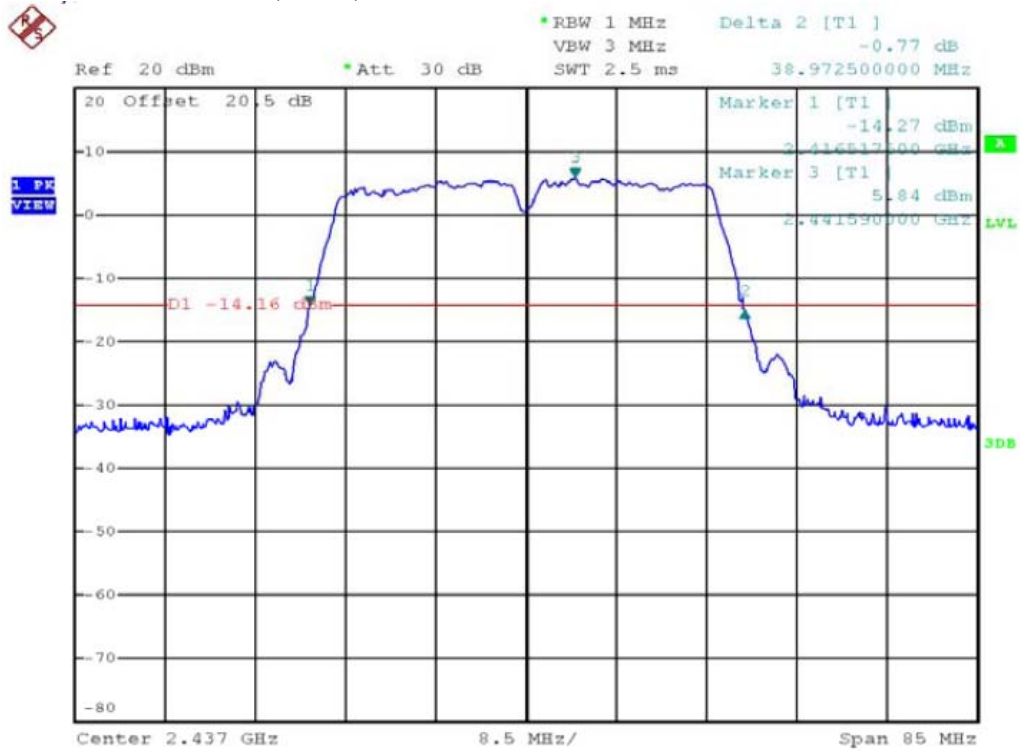

Test Mode: 802.11n (HT40)---High

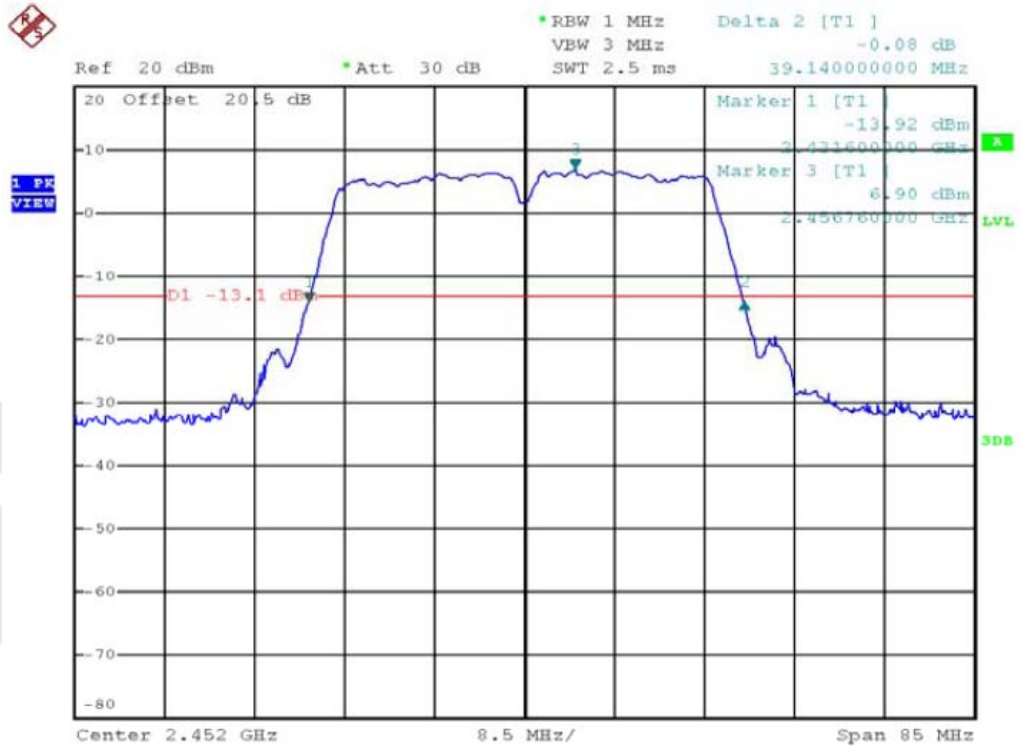


4.3. Maximum Output Power Test

a. Limit

The maximum output power of the intentional radiator shall not exceed the following:

1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt (30dBm).
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antenna of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

b. Configuration of Measurement



c. Data Rates

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 1 Mbps data rate (worst case) are chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6 Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT20: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6.5Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT40: Channel 3(2422MHz), Channel 6(2437MHz) and Channel 9(2452MHz) with 13.5Mbps data rate (the worst case) are chosen for the final testing.

d. Test Procedure

This test was according the kDB 558074 9.2.2:

1. Set span to at least 1.5 times the OBW.
2. Set the RBW =1~5% of the OBW, not to exceed 1MHz.
3. Set VBW $\geq 3 \times$ RBW.
4. Detector = Average.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

e. Test Equipment

Same as the equipment listed in 4.2.

f. Test Results

Pass.

g. Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Maximum transmit power (dBm)	Limit		Result
			(dBm)	(watts)	
Low	2412	14.47	26	0.4	Pass
Mid	2437	14.95			Pass
High	2462	15.62			Pass

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Maximum transmit power (dBm)	Limit		Result
			(dBm)	(watts)	
Low	2412	10.72	26	0.4	Pass
Mid	2437	12.07			Pass
High	2462	12.38			Pass

Test mode: IEEE 802.11n (HT20)

Channel	Frequency (MHz)	Maximum transmit power (dBm)	Limit		Result
			(dBm)	(watts)	
Low	2412	10.92	26	0.4	Pass
Mid	2437	11.43			Pass
High	2462	12.25			Pass

Test mode: IEEE 802.11n (HT40)

Channel	Frequency (MHz)	Maximum transmit power (dBm)	Limit		Result
			(dBm)	(watts)	
Low	2422	10.24	26	0.4	Pass
Mid	2437	10.74			Pass
High	2452	11.40			Pass

Note:


The antenna gain is 10dBi which is greater than 6dBi, according to the FCC rules, the limit reduced as follows:

Antenna Gain:


10dBi- 6dBi= 4dBi

Limit: 30dBm- 4= 26dBm= 0.40W


Test Mode: 802.11b---Low

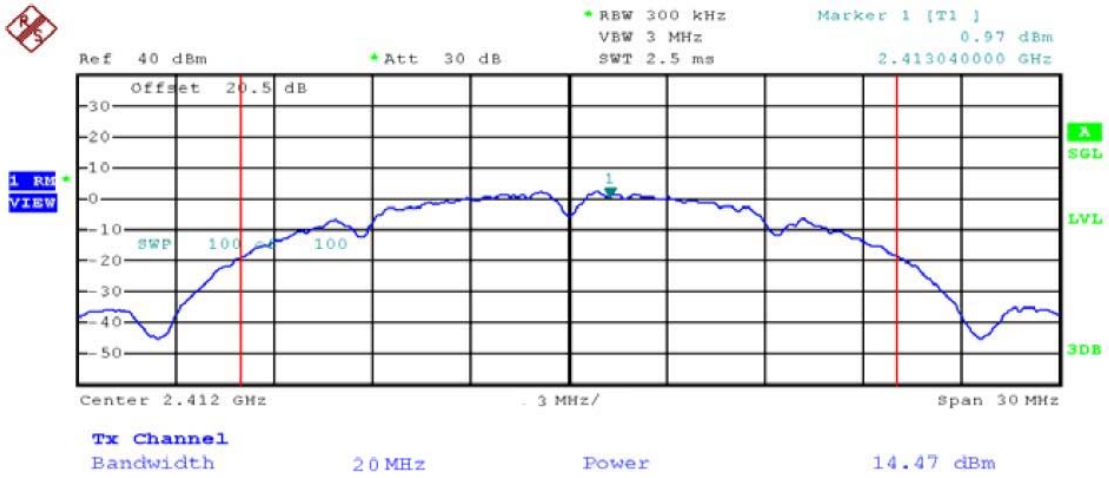


Test Mode: 802.11b---Mid

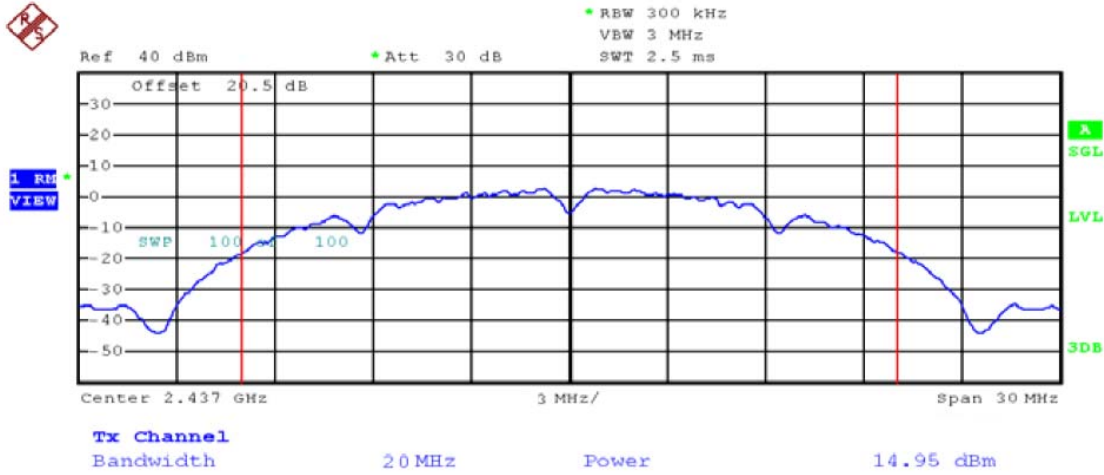


Test Mode: 802.11b---High

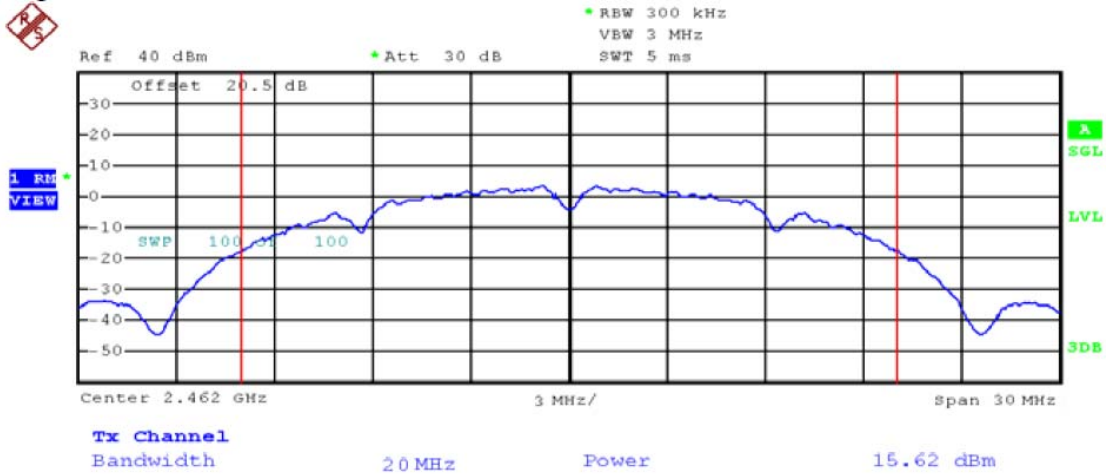


Test Mode: 802.11g---Low

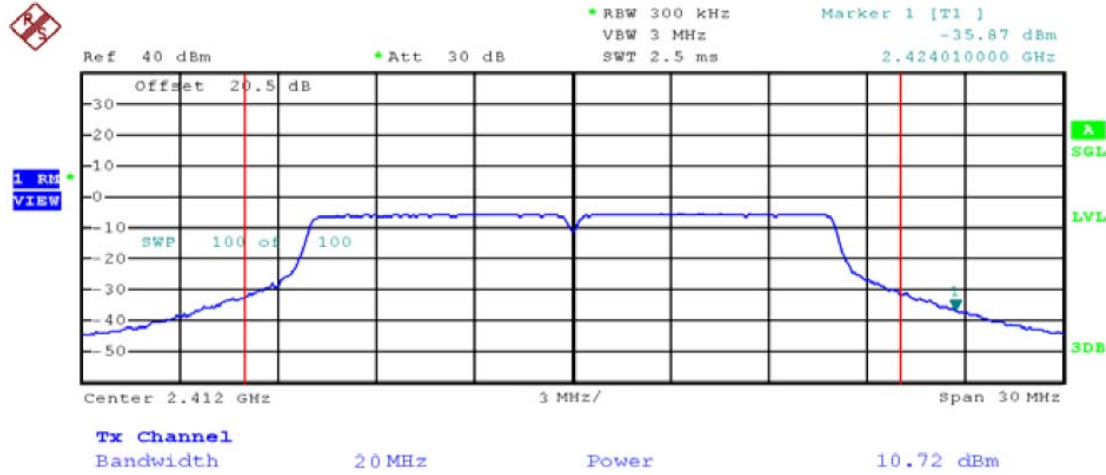


Test Mode: 802.11g---Mid

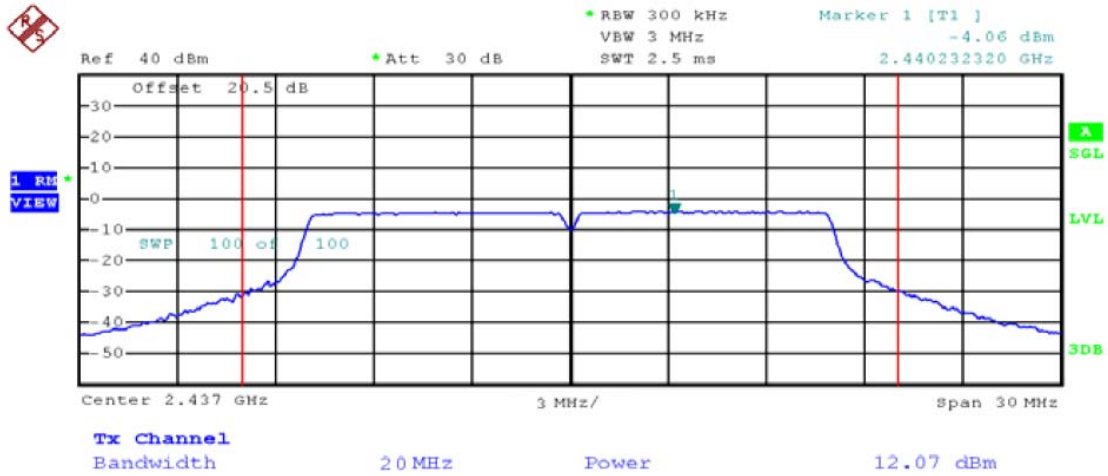


Test Mode: 802.11g---High

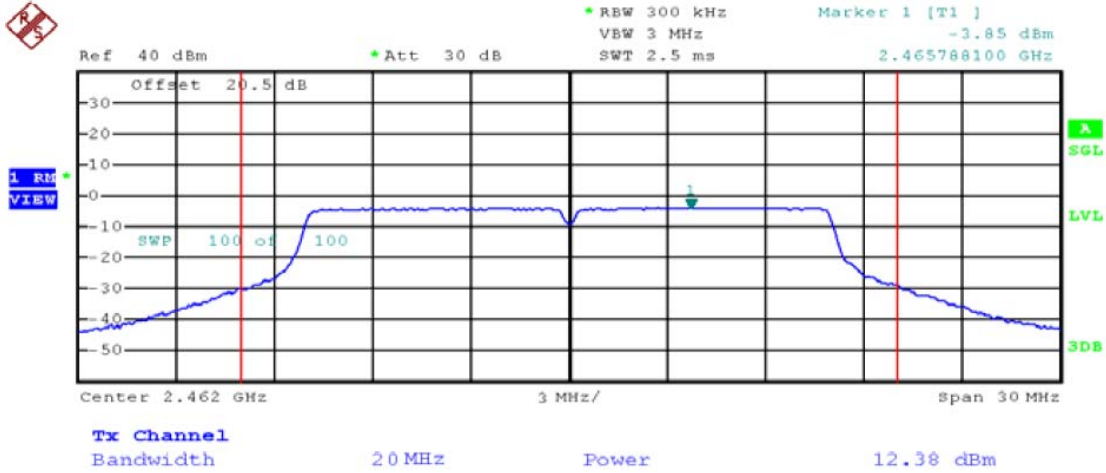


Test Mode: 802.11n(HT20)---Low

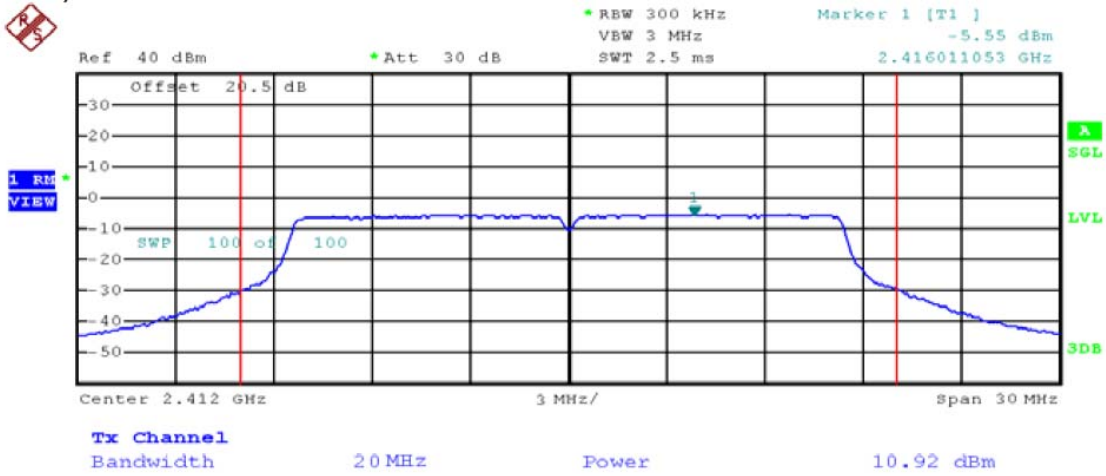


Test Mode: 802.11n(HT20)---Mid

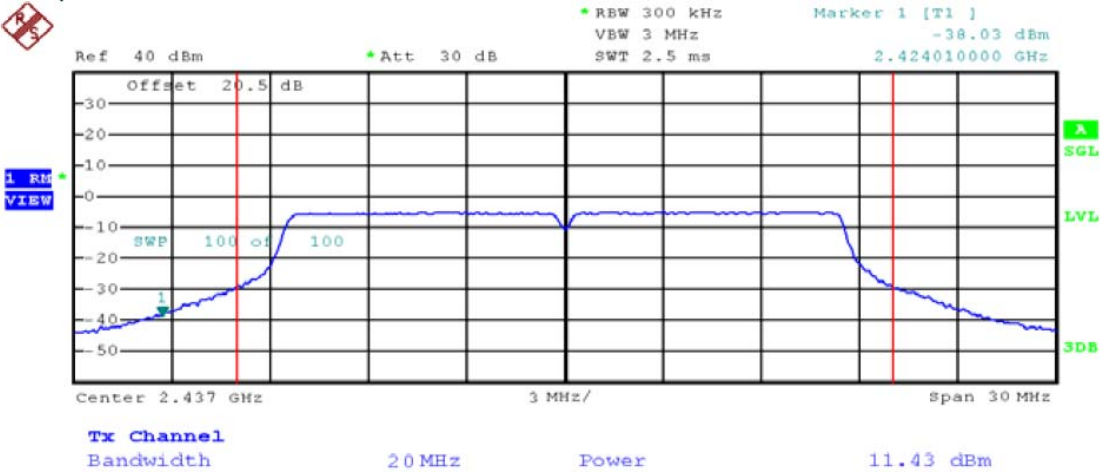


Test Mode: 802.11n(HT20)---High

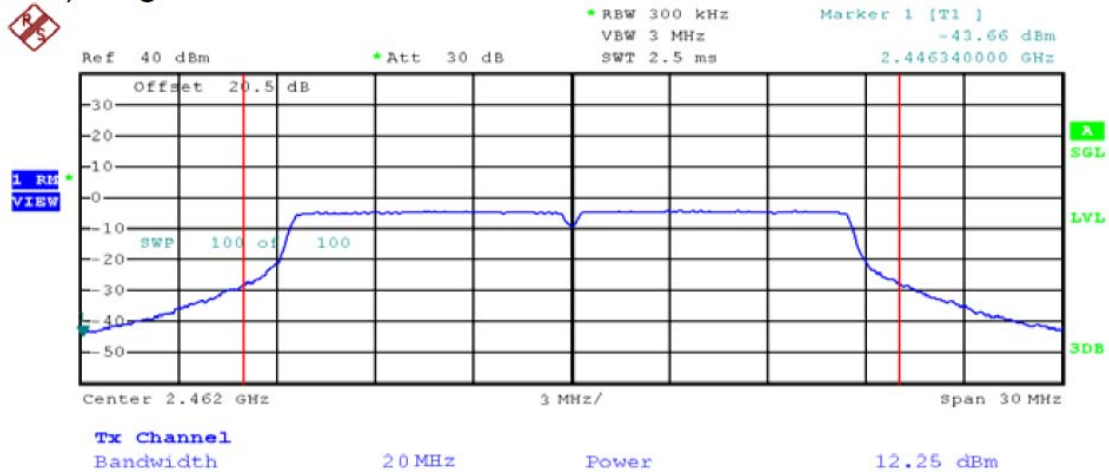


Test Mode: 802.11n(HT40)---Low

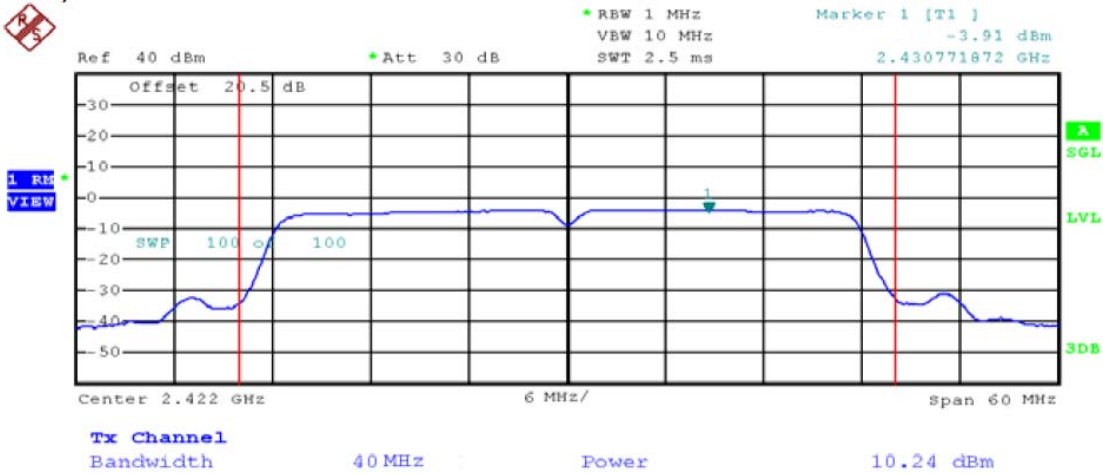

Test Mode: 802.11n(HT40)---Mid

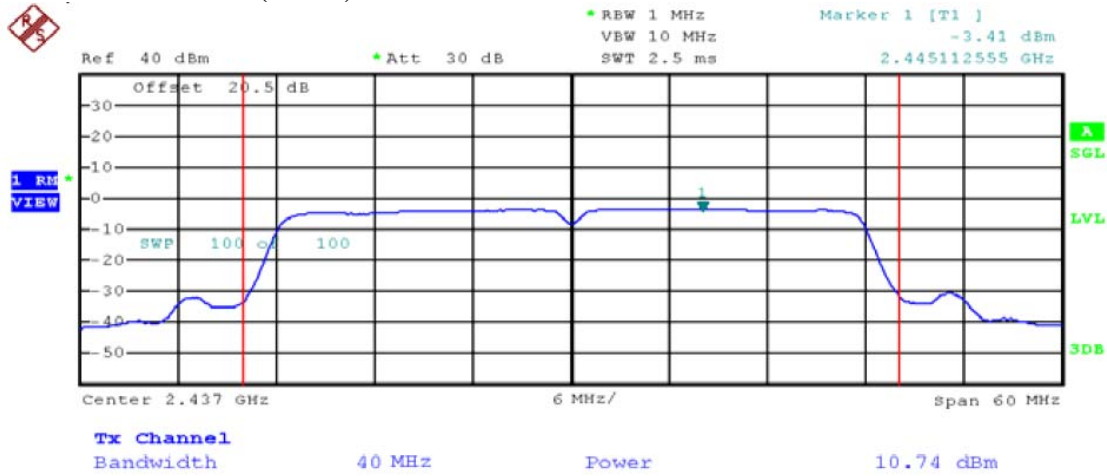

Test Mode: 802.11n(HT40)---High

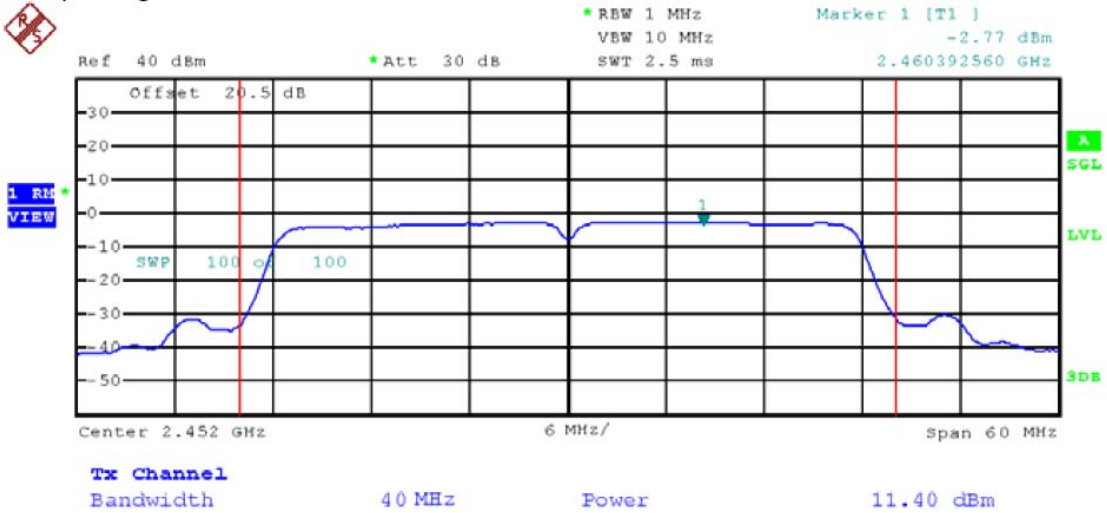

4.4. Band Edges Measurement

a. Limit

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).


b. Test Procedure

1. Conducted Method:

- 1) Set RBW=100KHz, VBW=300KHz
- 2) Detector=peak
- 3) Sweep time= auto
- 4) Trace mode=max hold.

2. Radiated Method:

- 1) The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Peak detector: RBW=1MHz, VBW=3MHz, SWT=AUTO
Average detector: RBW=1MHz, VBW=10Hz, SWT=AUTO
The EUT is tested in 9*6*6 Chamber.
- 5) Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

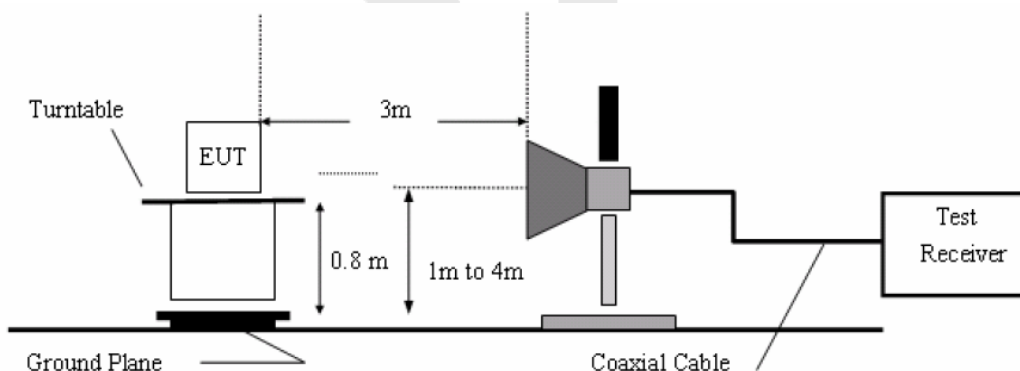

c. Test Equipment

Same as the equipment listed in 4.2.


d. Test Results

Pass.


e. Test Plots

See the following page.

Test Mode: 802.11b ---Low

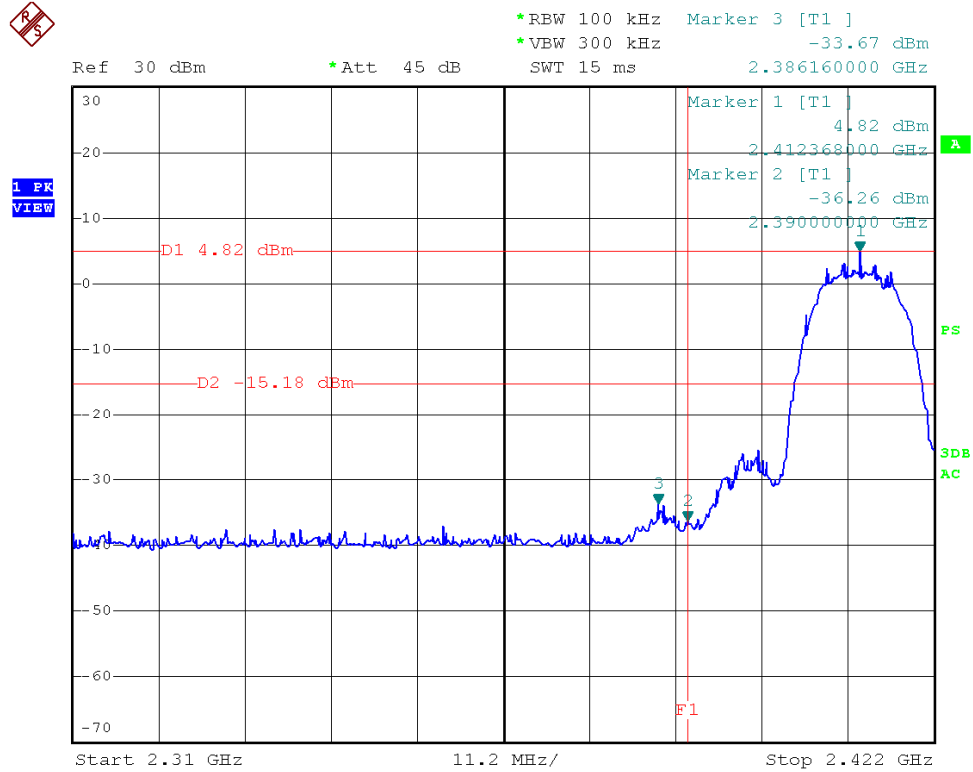


Test Mode: 802.11b ---High

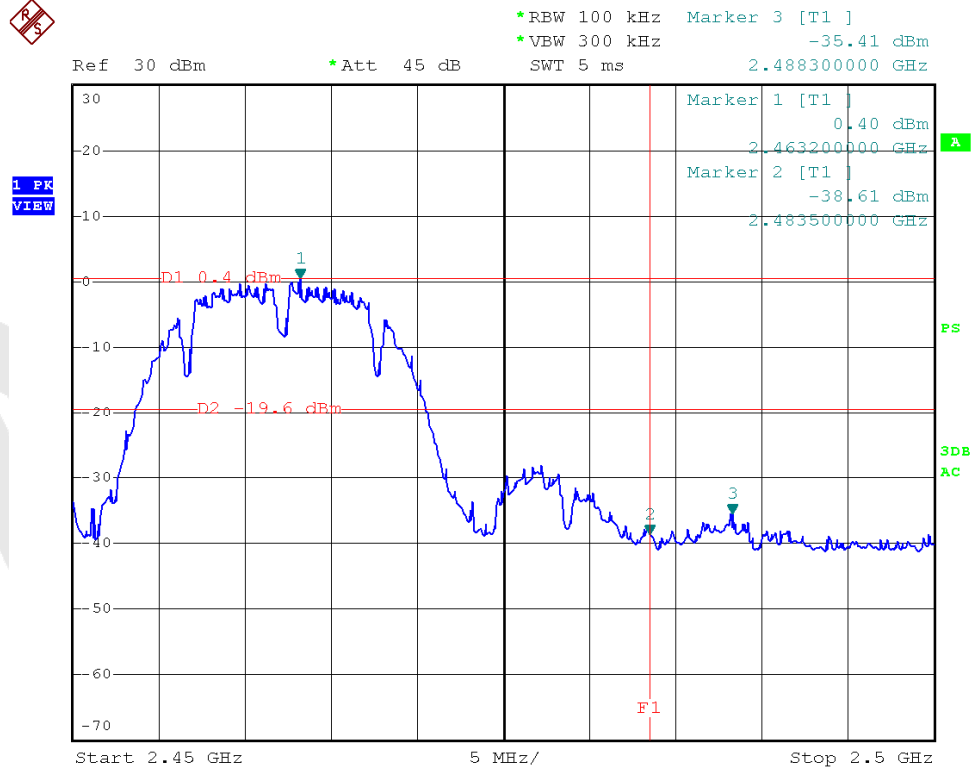

Test Mode: 802.11g ---Low




*RBW 100 kHz Marker 3 [T1]
*VBW 300 kHz -33.77 dBm
SWT 15 ms 2.384816000 GHz

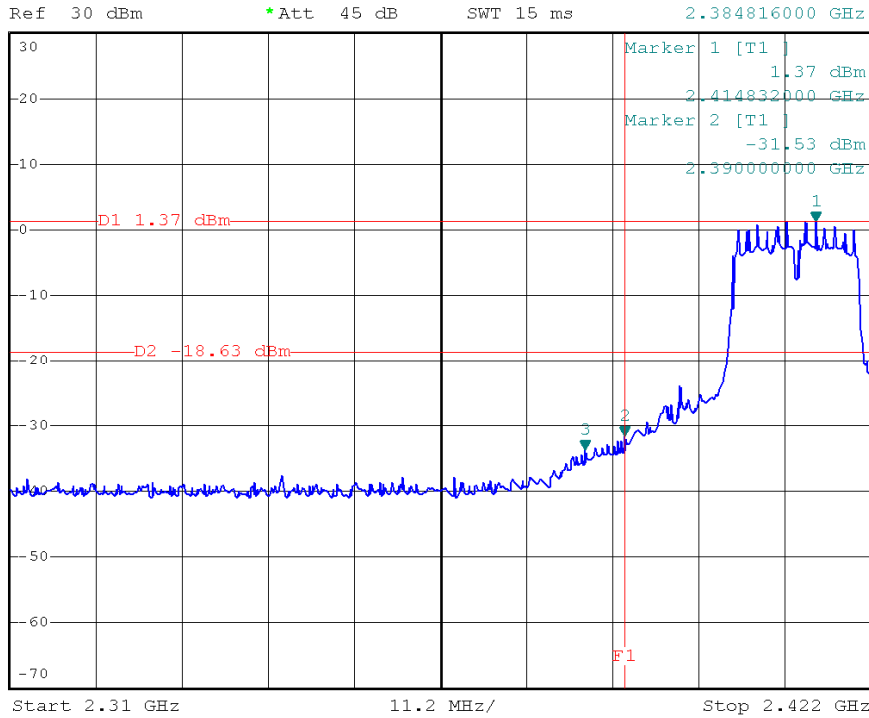

Test Mode: 802.11g ---High




*RBW 100 kHz Marker 3 [T1]
*VBW 300 kHz -35.33 dBm
SWT 5 ms 2.484700000 GHz

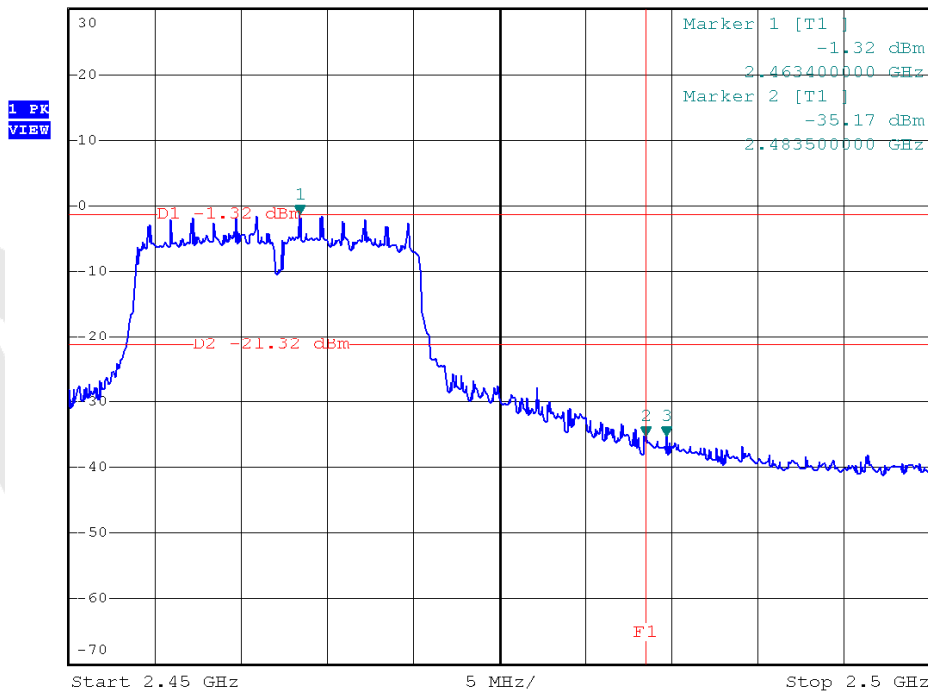

Test Mode: 802.11n (HT20) ---Low




*RBW 100 kHz Marker 3 [T1]
*VBW 300 kHz -30.85 dBm
SWT 15 ms 2.384816000 GHz

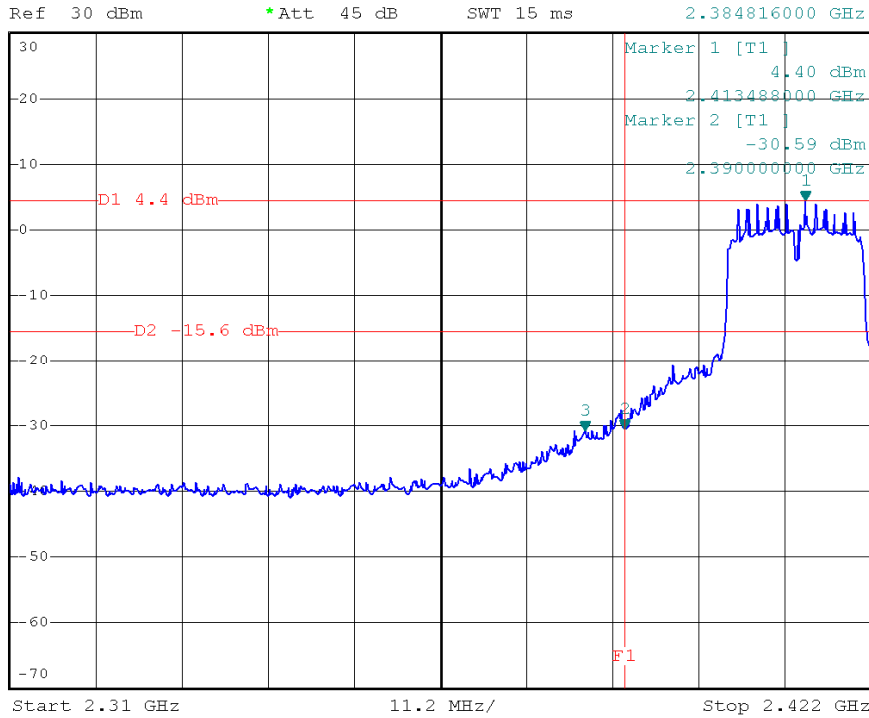

Test Mode: 802.11n (HT20)---High




*RBW 100 kHz Marker 3 [T1]
*VBW 300 kHz -34.14 dBm
SWT 5 ms 2.486600000 GHz

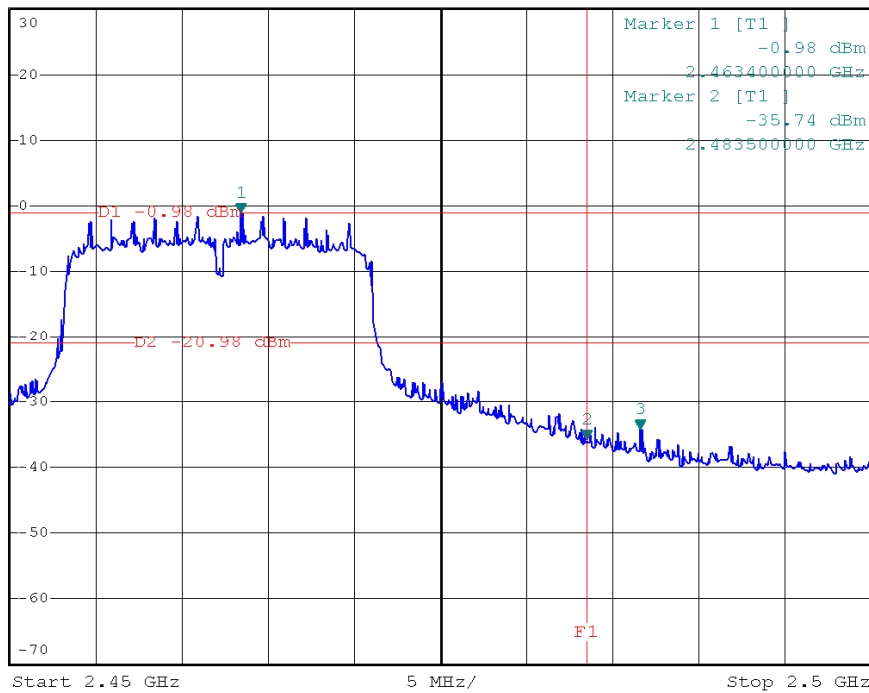

Test Mode: 802.11n (HT40) ---Low




*RBW 100 kHz Marker 3 [T1]
*VBW 300 kHz -27.61 dBm
SWT 15 ms 2.387192000 GHz

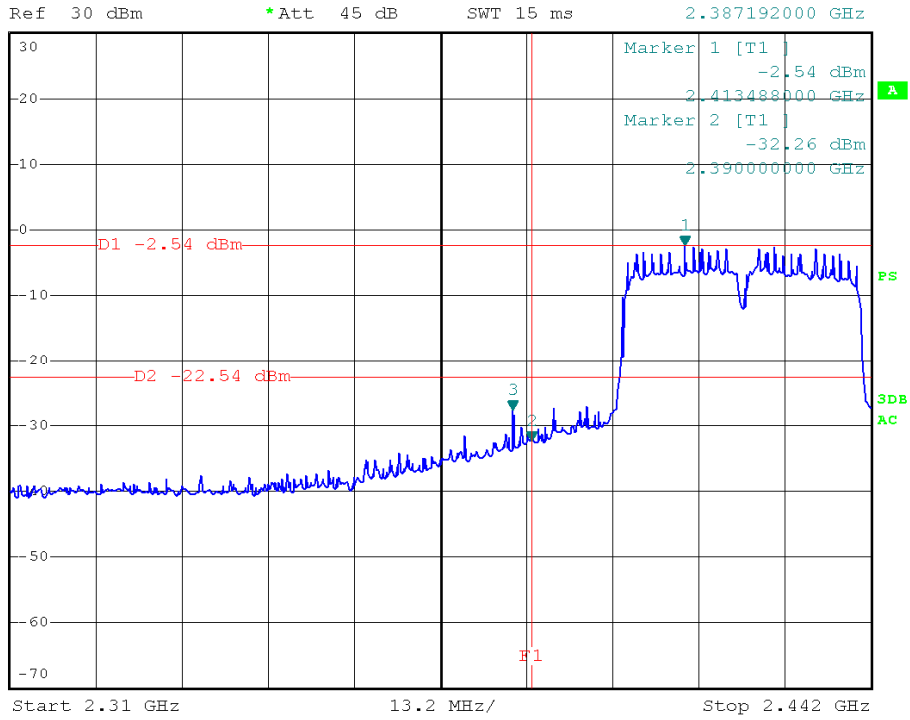


Test Mode: 802.11n (HT40) ---High



*RBW 100 kHz Marker 3 [T1]
*VBW 300 kHz -29.75 dBm
SWT 10 ms 2.484860000 GHz

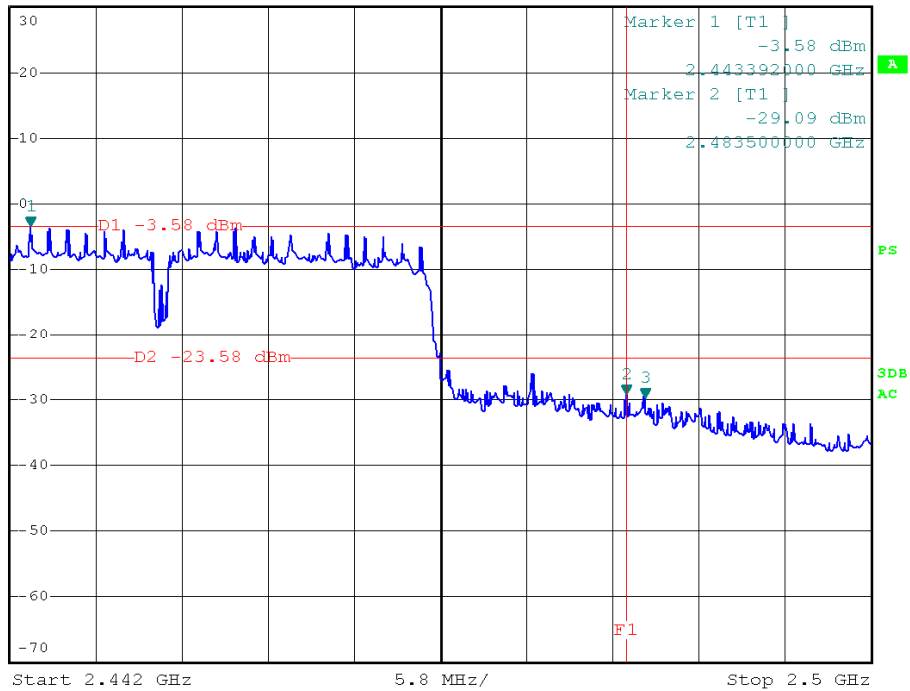


Test Mode: 802.11b
2412MHz
Horizontal-PEAK:

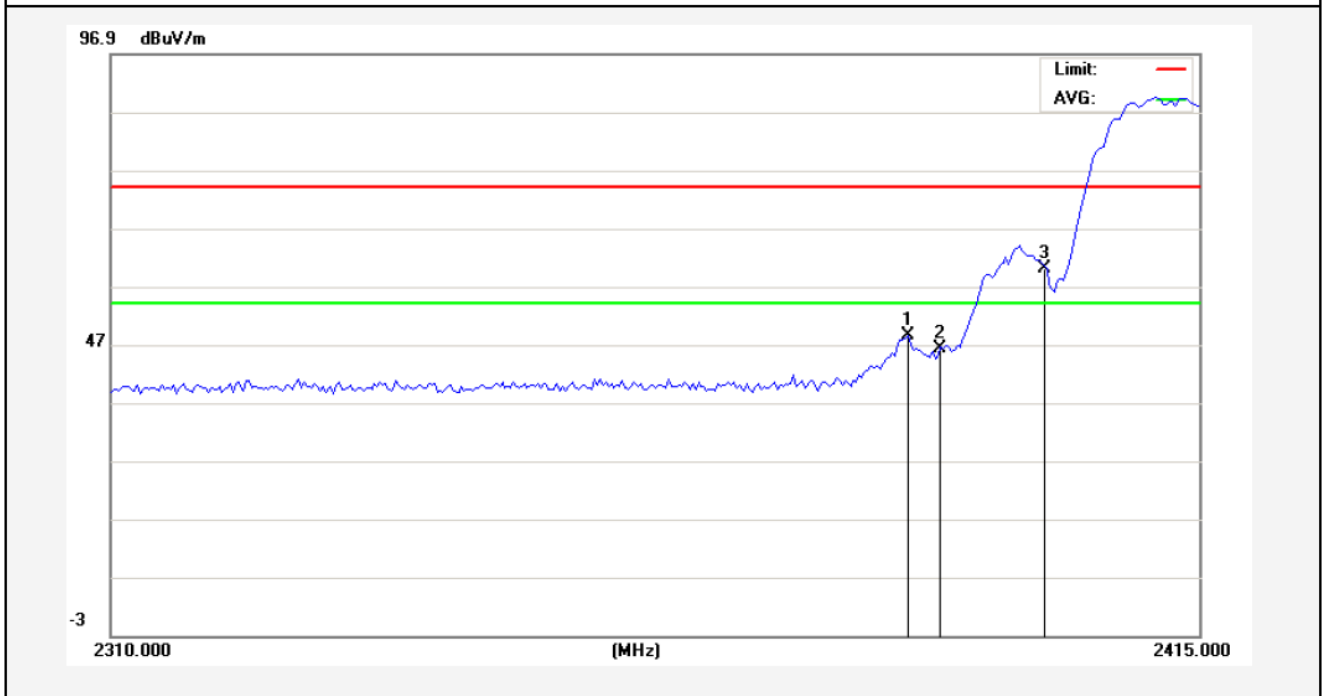

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2386.650	51.01	-2.52	48.49	74.00	-25.51	peak			
2	2390.000	48.83	-2.51	46.32	74.00	-27.68	peak			
3	2400.000	62.51	-2.49	60.02	74.00	-13.98	peak			

AMB


Horizontal-AV:

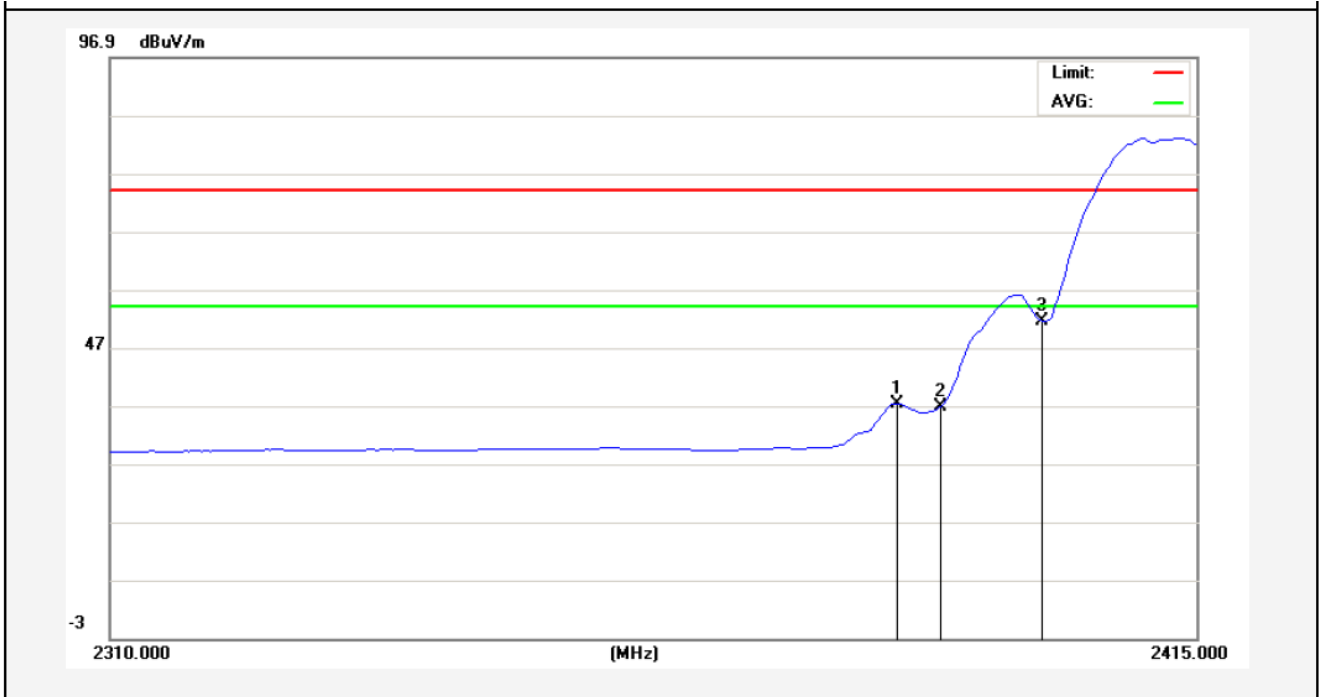

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2385.863	39.90	-2.52	37.38	54.00	-16.62	AVG			
2	2390.000	39.34	-2.51	36.83	54.00	-17.17	AVG			
3	2400.000	53.97	-2.49	51.48	54.00	-2.52	AVG			

Anbotek


Test Mode: 802.11b
2412MHz
Vertical-PEAK:

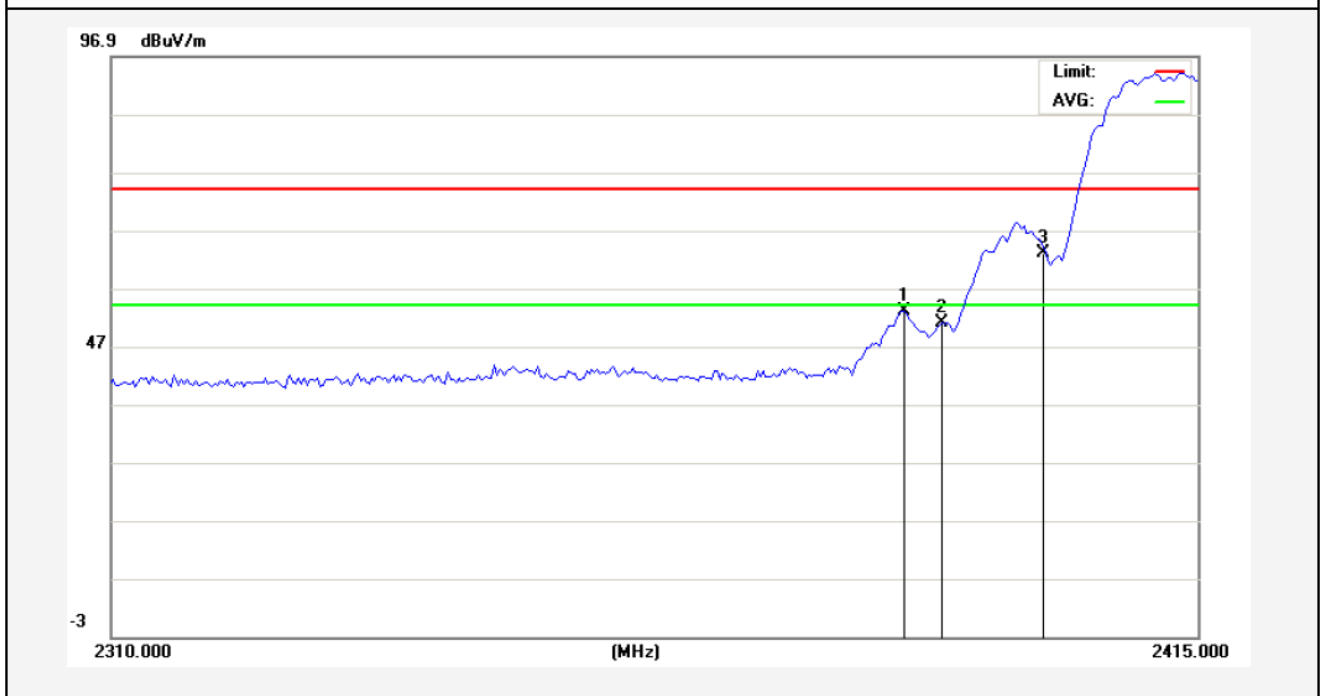

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2386.387	55.48	-2.52	52.96	74.00	-21.04	peak			
2	2390.000	53.56	-2.51	51.05	74.00	-22.95	peak			
3	2400.000	65.51	-2.49	63.02	74.00	-10.98	peak			

AMB

Vertical-AV:

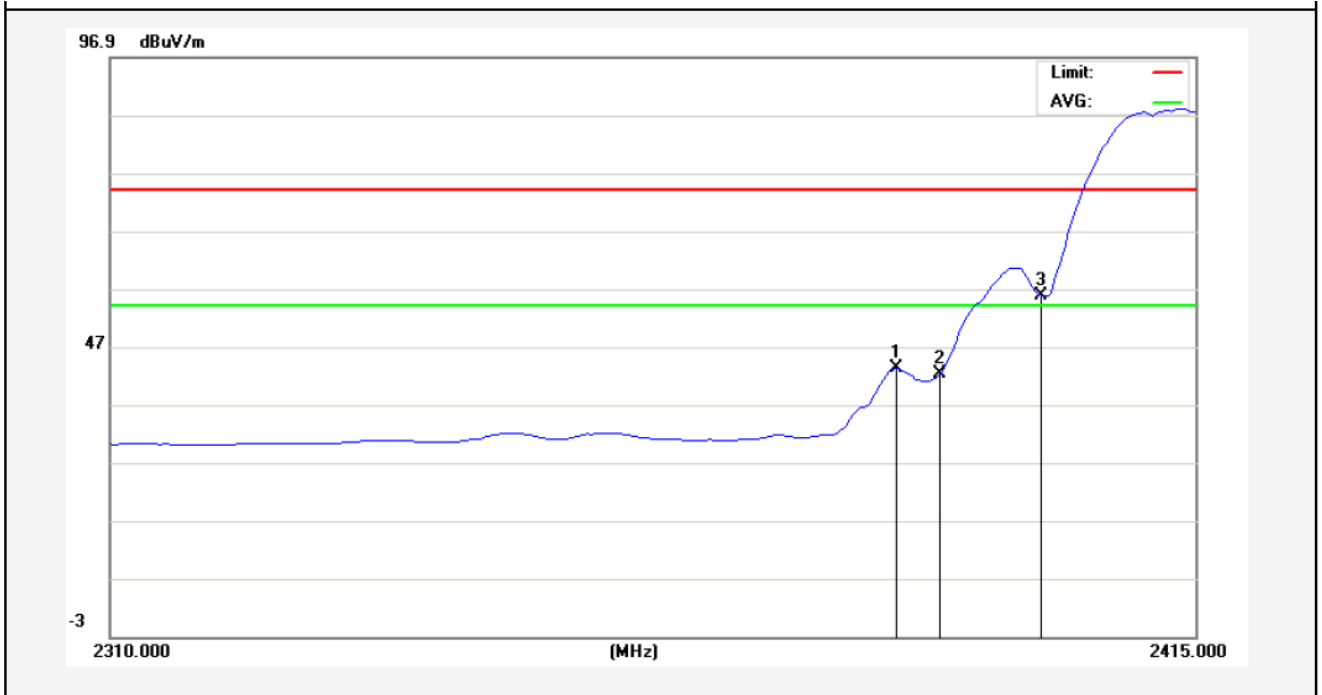


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2385.863	45.69	-2.52	43.17	54.00	-10.83	AVG			
2	2390.000	44.71	-2.51	42.20	54.00	-11.80	AVG			
3	2400.000	58.20	-2.49	55.71	54.00	1.71	AVG			

Anbotek

Test Mode: 802.11b

2462MHz


Horizontal-PEAK:

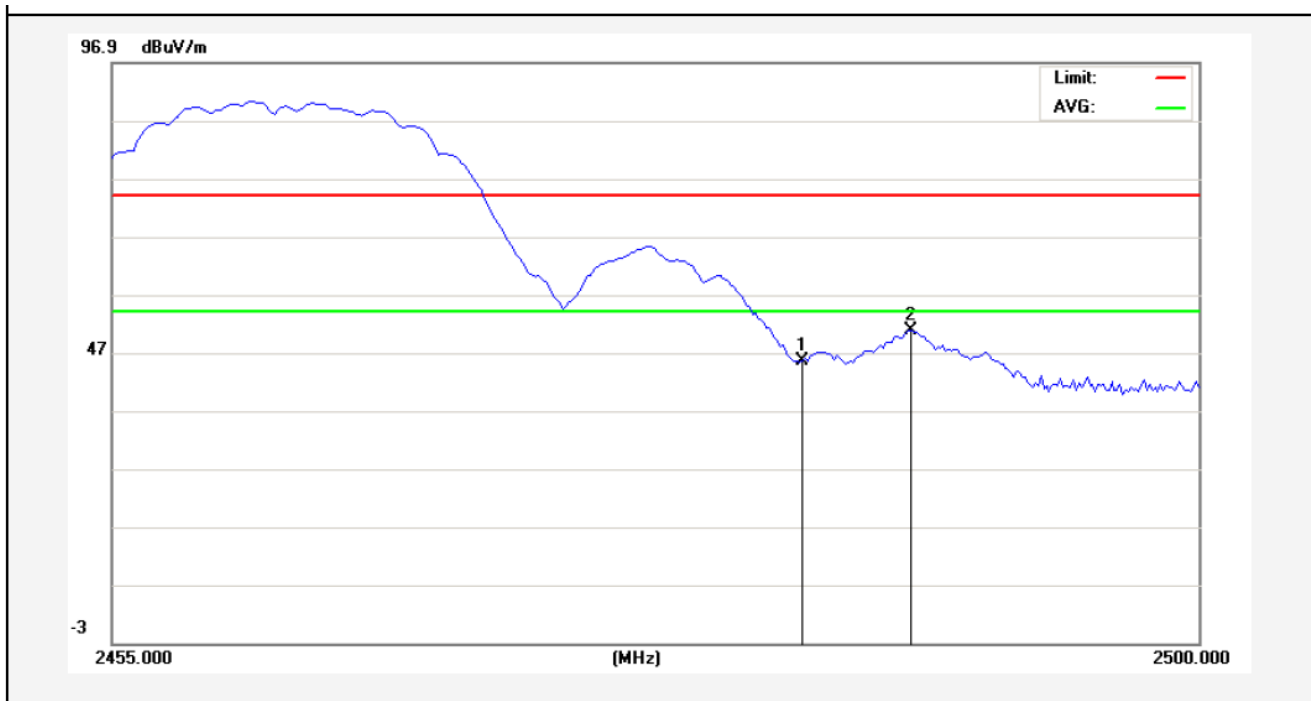

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	47.89	-2.31	45.58	74.00	-28.42	peak			
2	2488.075	53.00	-2.30	50.70	74.00	-23.30	peak			

AMB


Horizontal-AV:

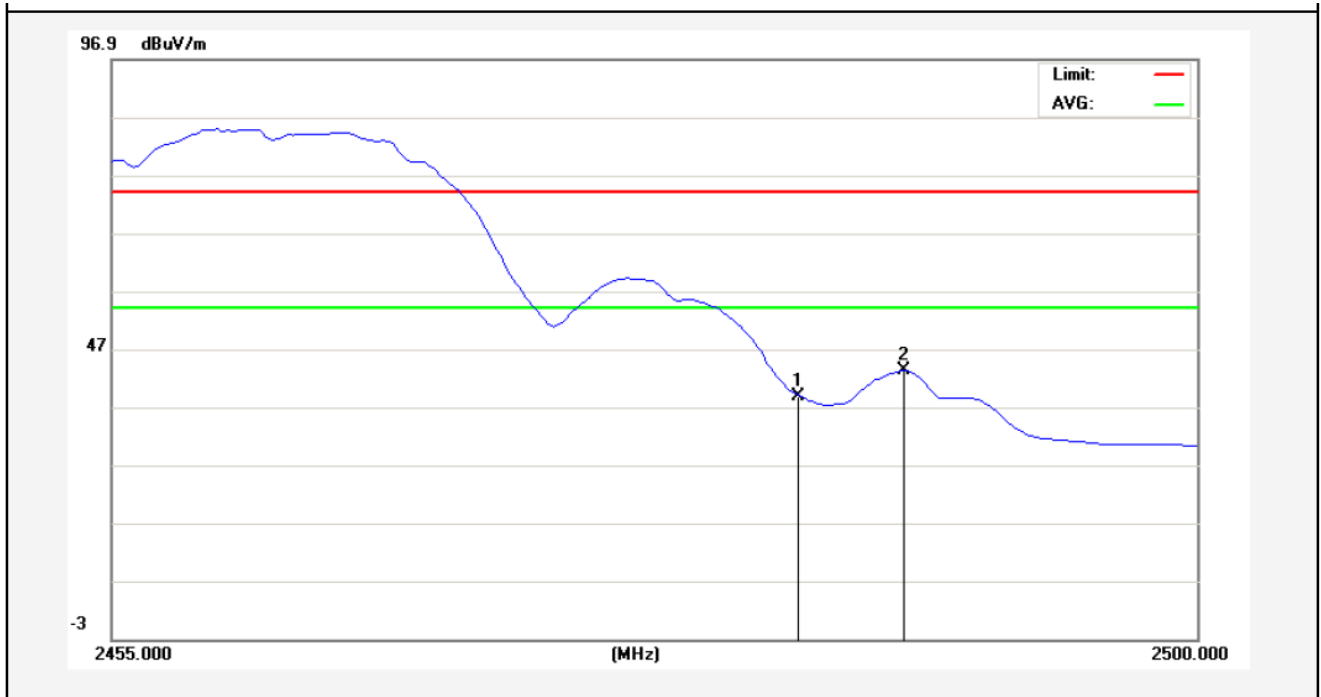

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	40.99	-2.31	38.68	54.00	-15.32	AVG			
2	2487.850	45.53	-2.30	43.23	54.00	-10.77	AVG			

Anbotek


Test Mode: 802.11b
2462MHz
Vertical-PEAK:

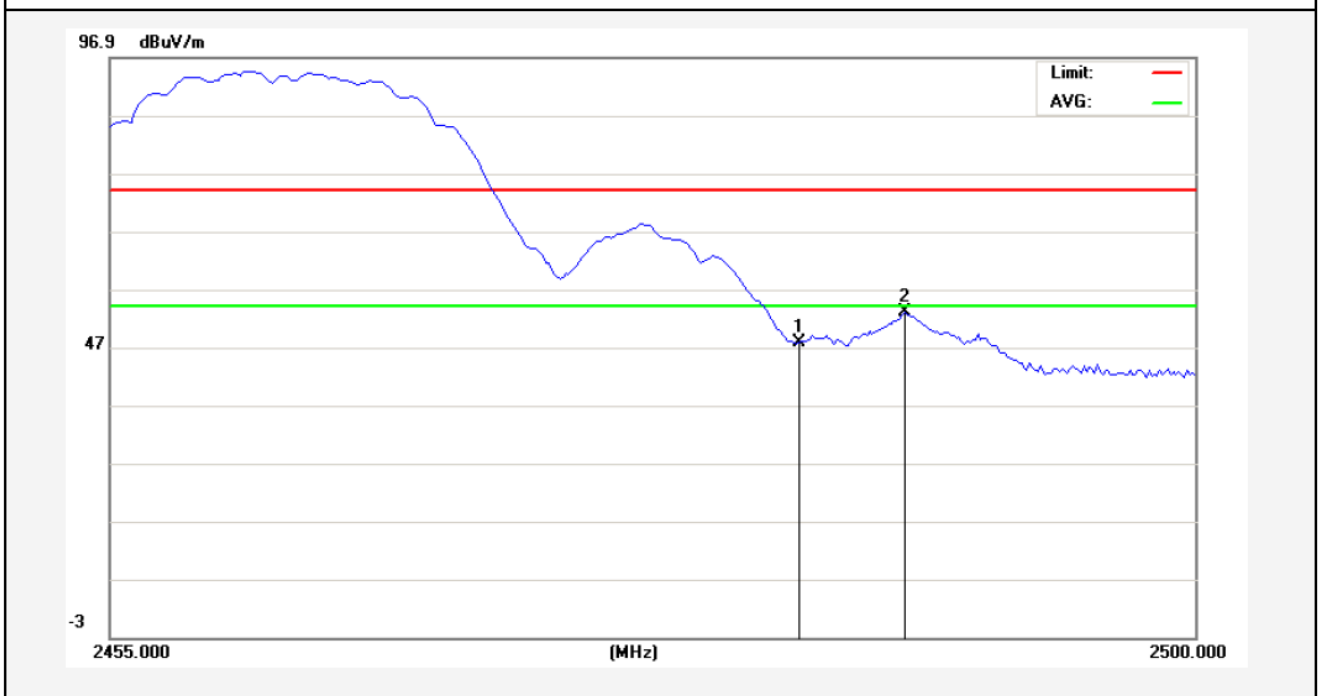

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	50.02	-2.31	47.71	74.00	-26.29	peak			
2	2487.963	55.38	-2.30	53.08	74.00	-20.92	peak			

AMB


Vertical-AV:

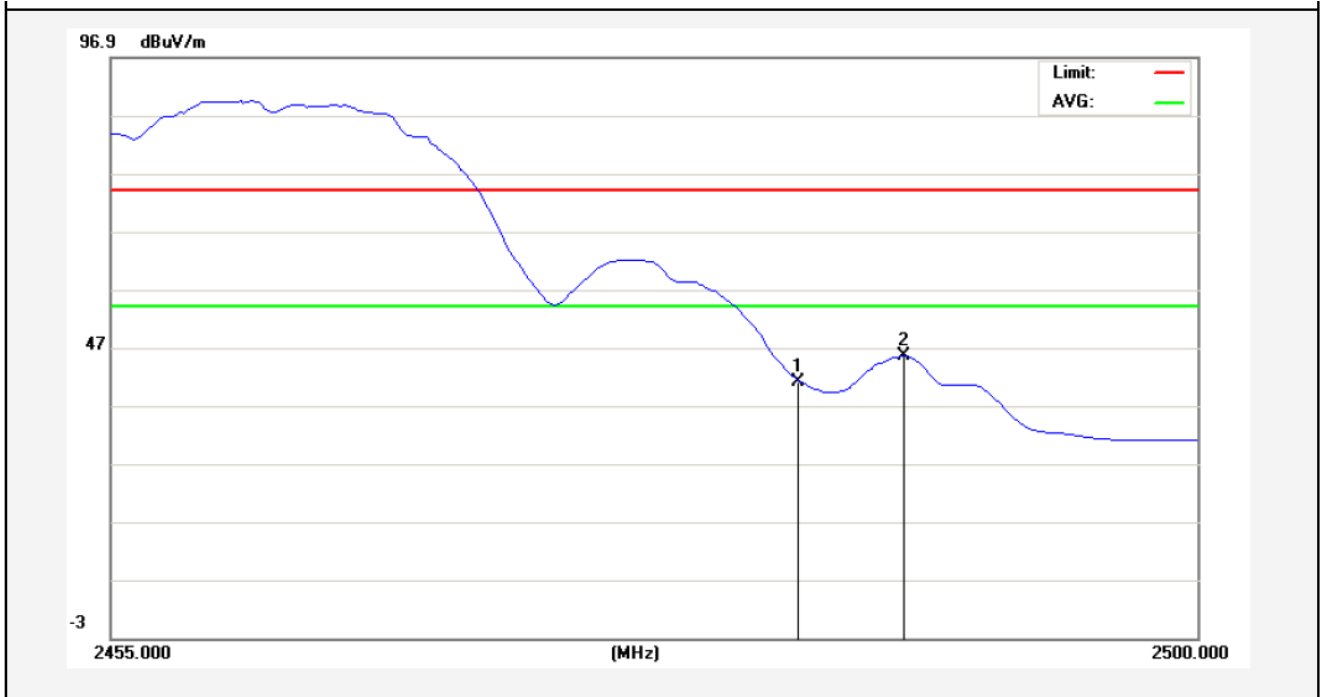

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	43.31	-2.31	41.00	54.00	-13.00	AVG			
2	2487.850	47.77	-2.30	45.47	54.00	-8.53	AVG			

Anbotek


Test Mode: 802.11g
2412MHz
Horizontal-PEAK:

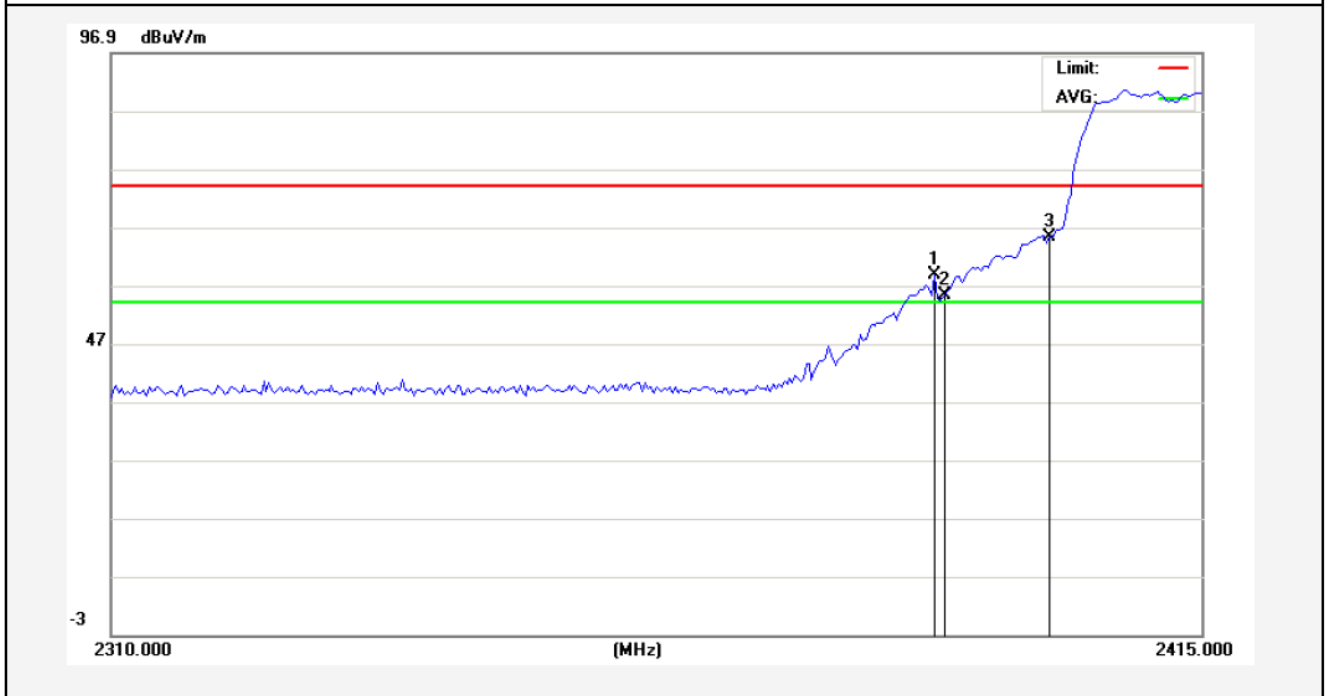

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2389.012	61.22	-2.52	58.70	74.00	-15.30	peak			
2	2390.000	57.76	-2.51	55.25	74.00	-18.75	peak			
3	2400.000	67.73	-2.49	65.24	74.00	-8.76	peak			

AMB


Horizontal-AV:

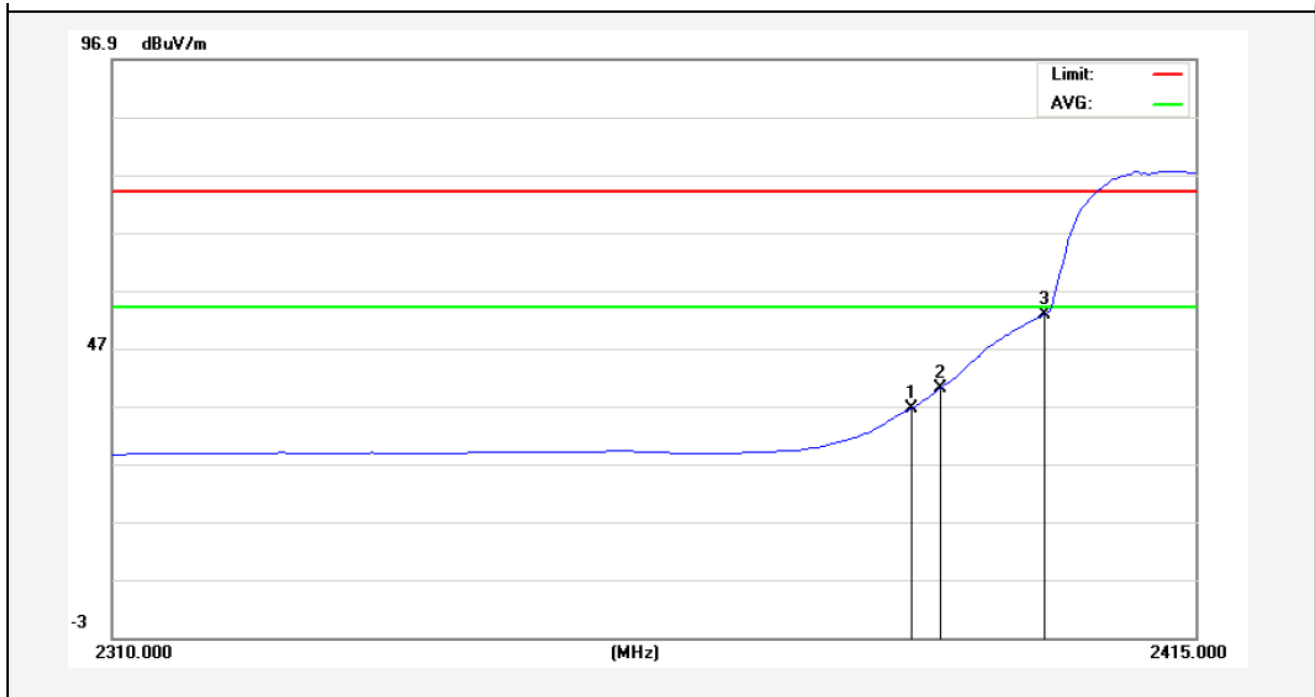

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2387.175	39.05	-2.52	36.53	54.00	-17.47	AVG			
2	2390.000	42.66	-2.51	40.15	54.00	-13.85	AVG			
3	2400.000	55.30	-2.49	52.81	54.00	-1.19	AVG			

Anbotek


Test Mode: 802.11g
2412MHz
Vertical-PEAK:

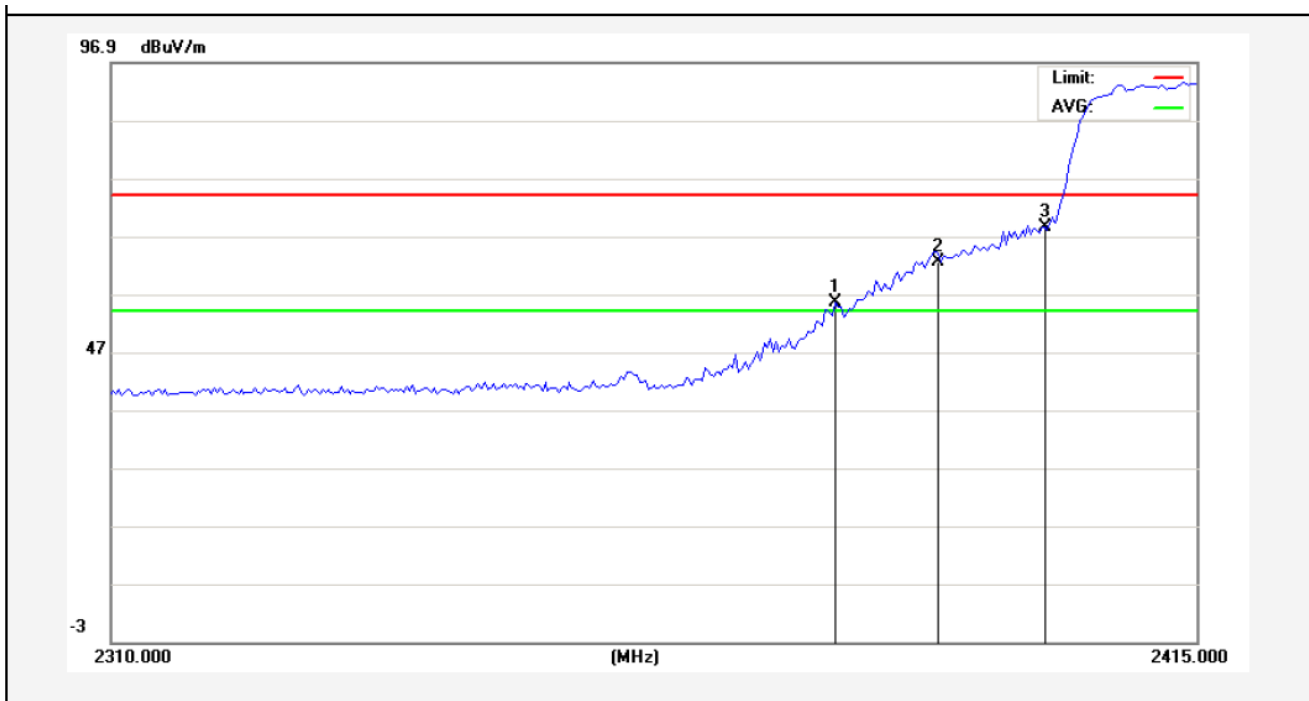

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2379.825	58.09	-2.54	55.55	74.00	-18.45	peak			
2	2390.000	64.97	-2.51	62.46	74.00	-11.54	peak			
3	2400.000	71.08	-2.49	68.59	74.00	-5.41	peak			

AMB


Vertical-AV:

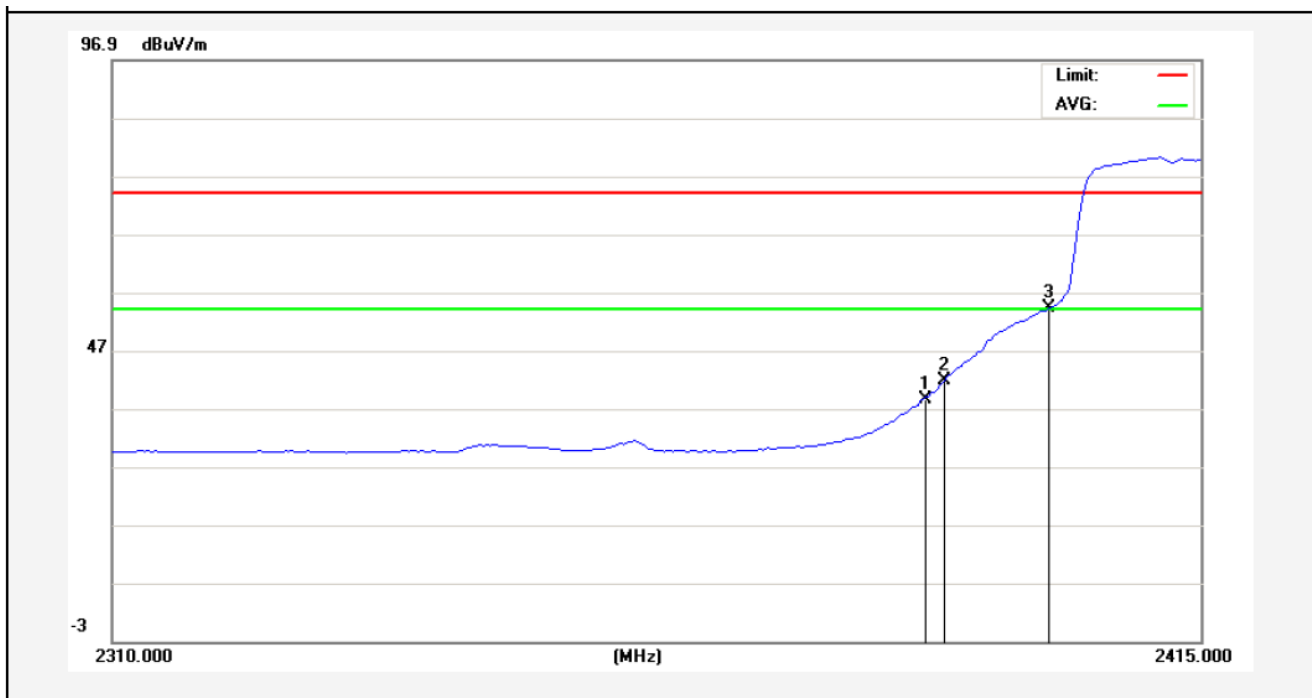

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2387.963	41.00	-2.52	38.48	54.00	-15.52	AVG			
2	2390.000	44.34	-2.51	41.83	54.00	-12.17	AVG			
3	2400.000	56.65	-2.49	54.16	54.00	0.16	AVG			

Anbotek


Test Mode: 802.11g
2462MHz
Horizontal-PEAK:

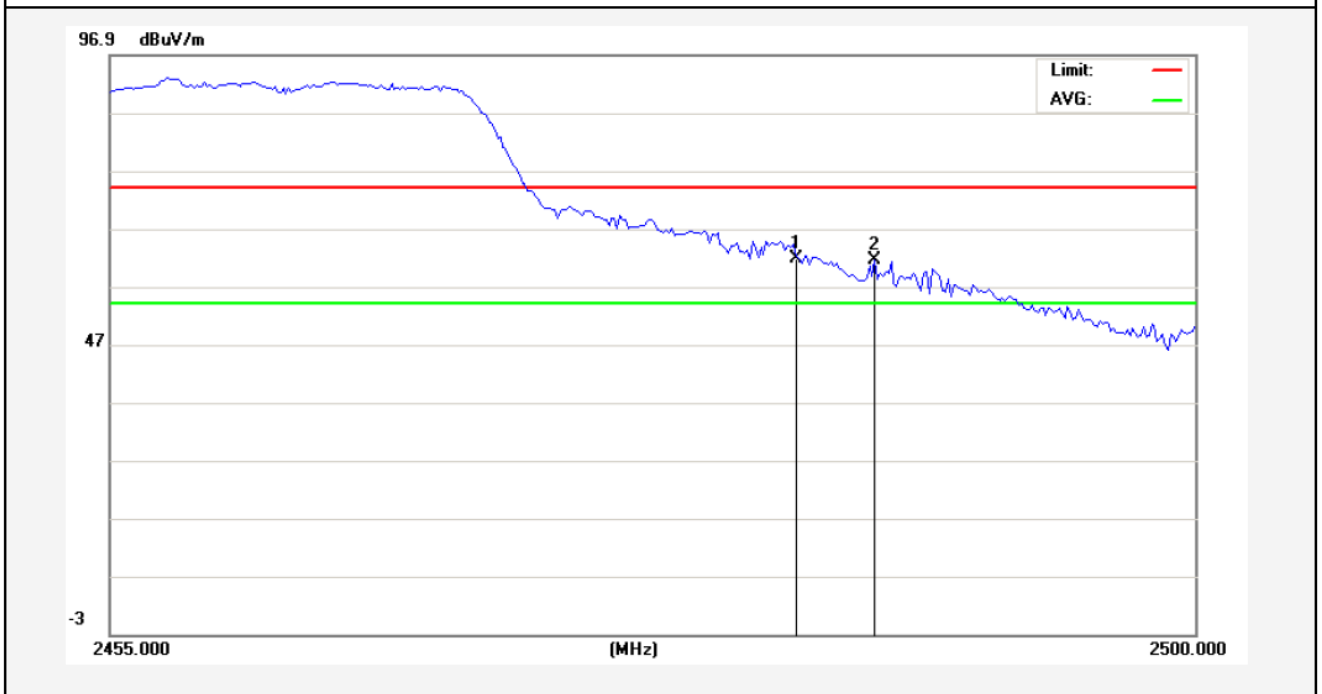

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	64.07	-2.31	61.76	74.00	-12.24	peak			
2	2486.725	63.90	-2.30	61.60	74.00	-12.40	peak			

AMB


Horizontal-AV:

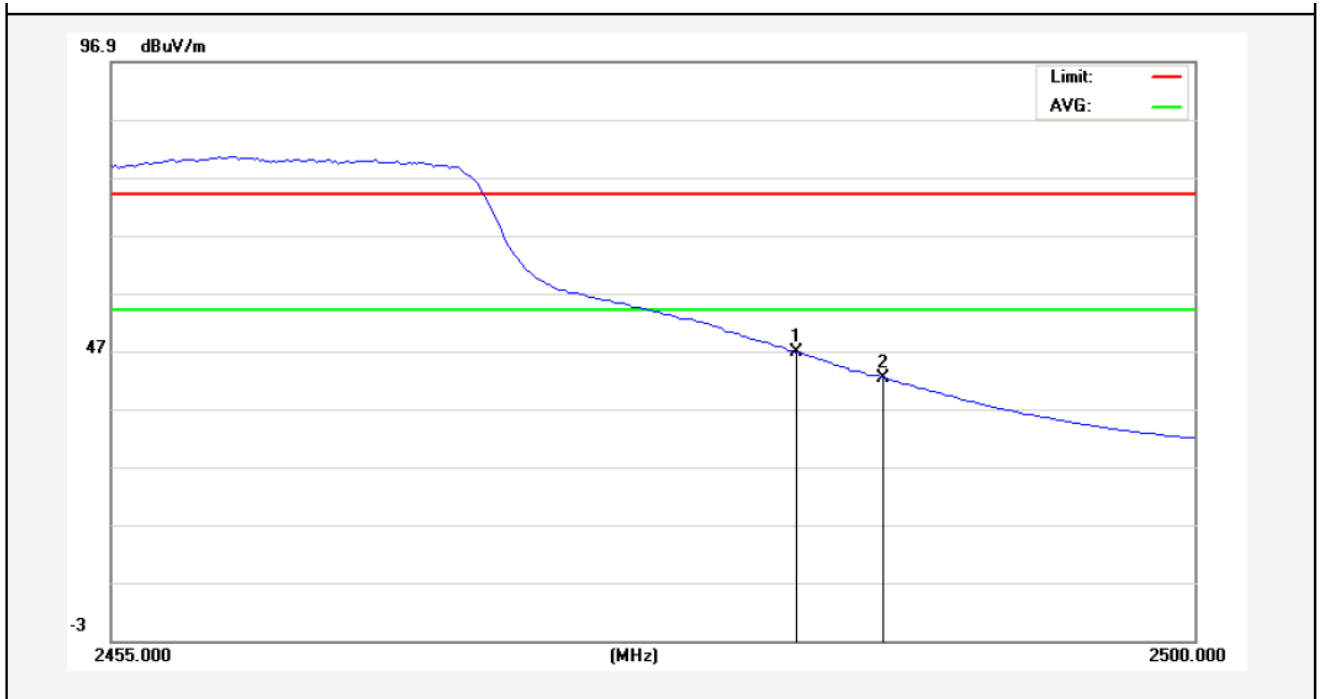

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	48.98	-2.31	46.67	54.00	-7.33	AVG			
2	2487.063	44.58	-2.30	42.28	54.00	-11.72	AVG			

Anbotek


Test Mode: 802.11g
2462MHz
Vertical-PEAK:

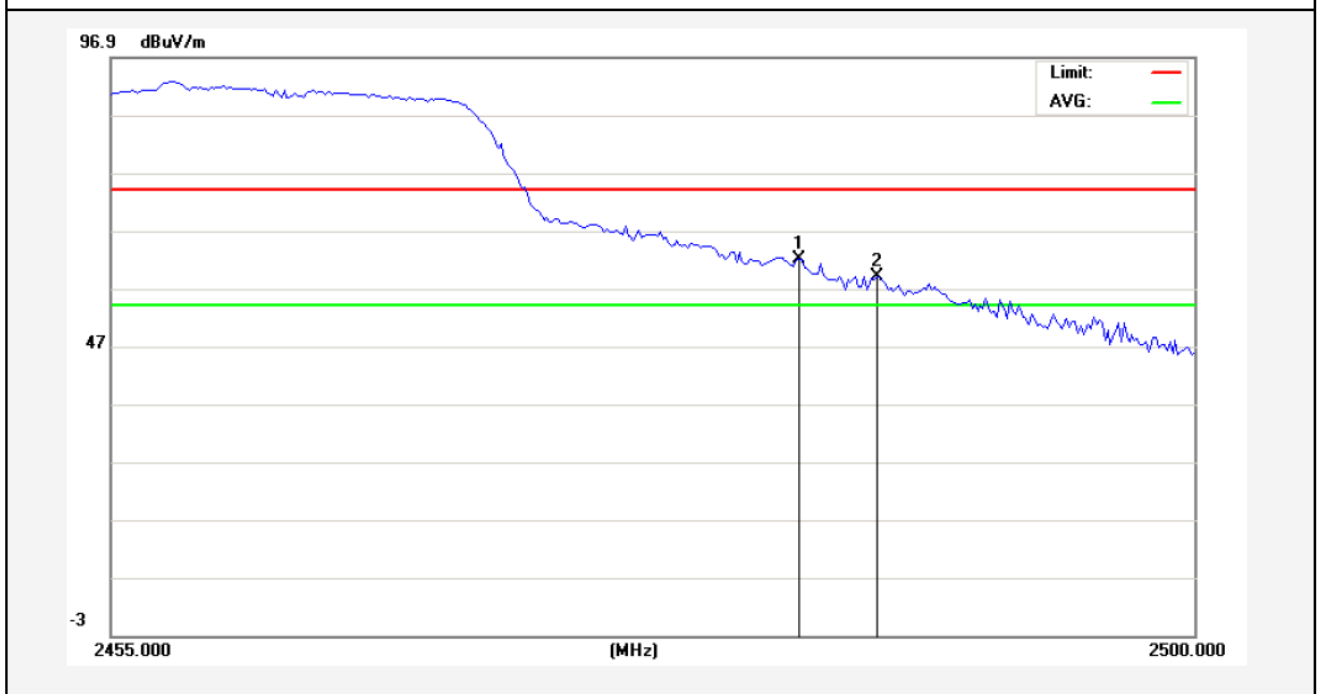

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	64.42	-2.31	62.11	74.00	-11.89	peak			
2	2486.838	61.40	-2.30	59.10	74.00	-14.90	peak			

AMB


Vertical-AV:

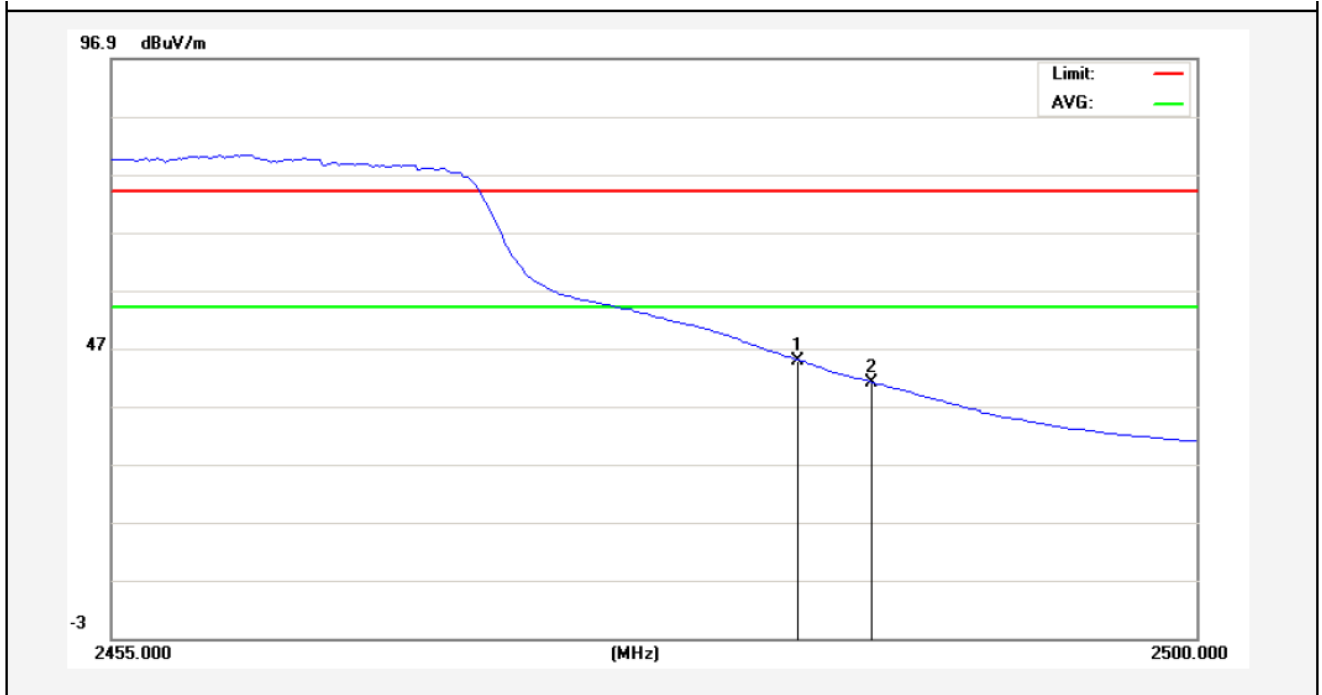

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	47.15	-2.31	44.84	54.00	-9.16	AVG			
2	2486.500	43.37	-2.30	41.07	54.00	-12.93	AVG			

Anbotek


Test Mode: 802.11n (HT20)
2412MHz
Horizontal-PEAK:

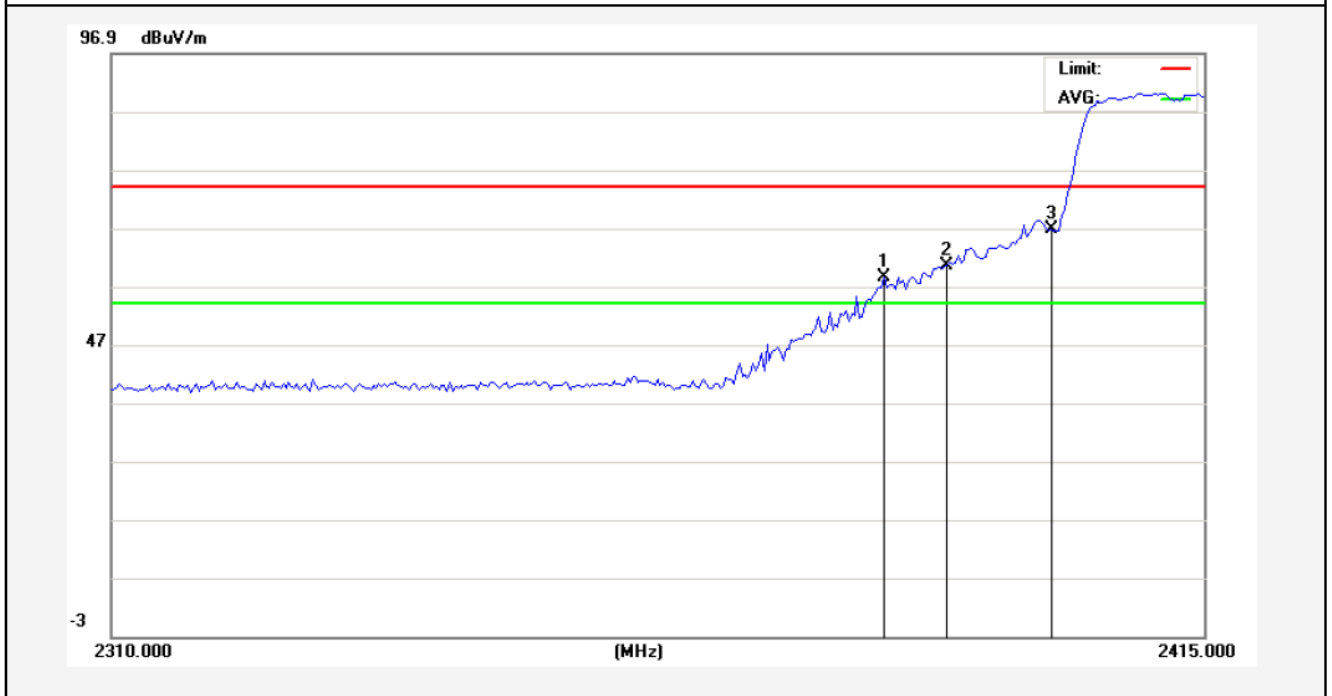

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2384.025	61.13	-2.53	58.60	74.00	-15.40	peak			
2	2390.000	62.95	-2.51	60.44	74.00	-13.56	peak			
3	2400.000	69.24	-2.49	66.75	74.00	-7.25	peak			

AMB


Horizontal-AV:

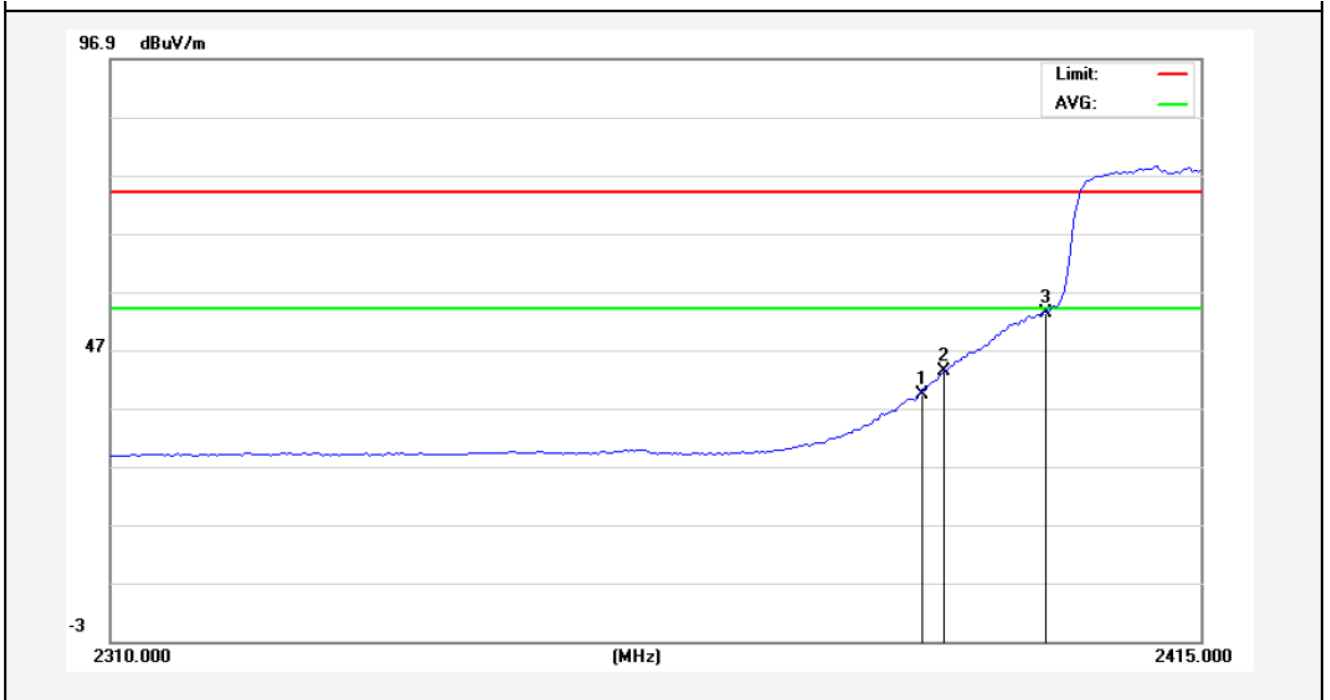

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2387.700	41.82	-2.52	39.30	54.00	-14.70	AVG			
2	2390.000	45.75	-2.51	43.24	54.00	-10.76	AVG			
3	2400.000	55.84	-2.49	53.35	54.00	-0.65	AVG			

Anbotek


Test Mode: 802.11n (HT20)
2412MHz
Vertical-PEAK:

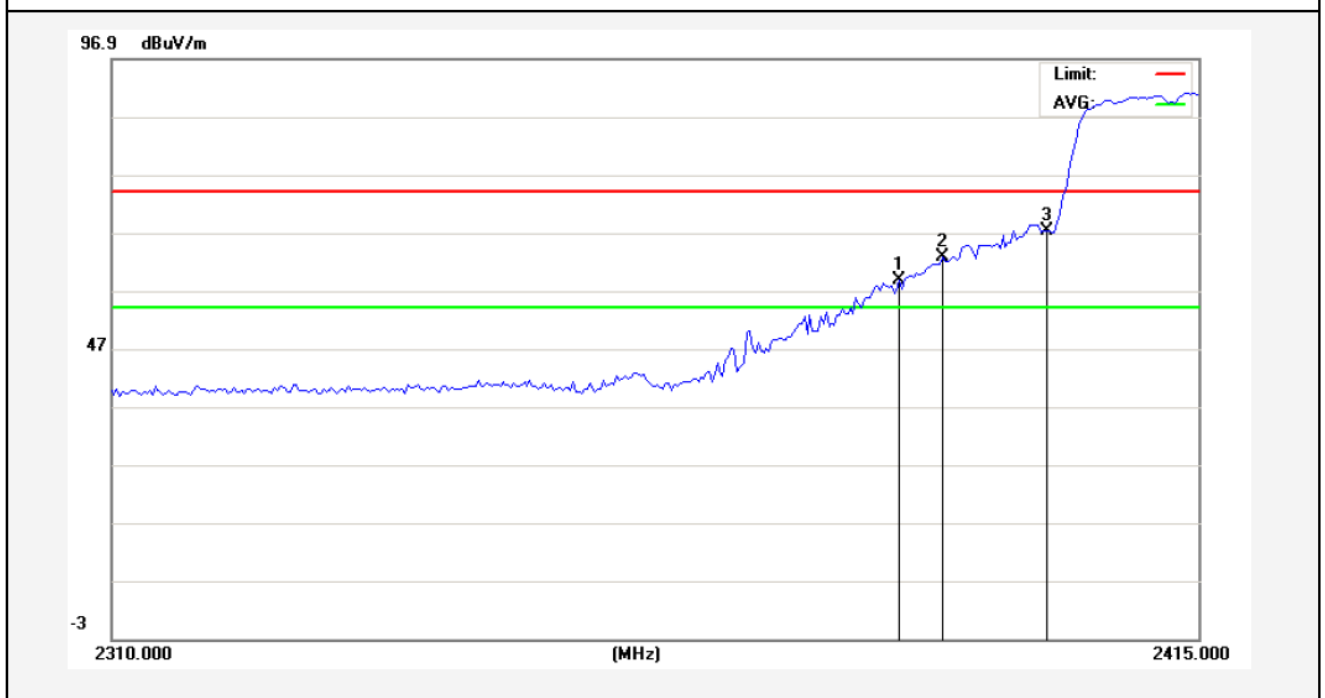

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2385.863	61.29	-2.52	58.77	74.00	-15.23	peak			
2	2390.000	65.27	-2.51	62.76	74.00	-11.24	peak			
3	2400.000	69.88	-2.49	67.39	74.00	-6.61	peak			

AMB


Vertical-AV:

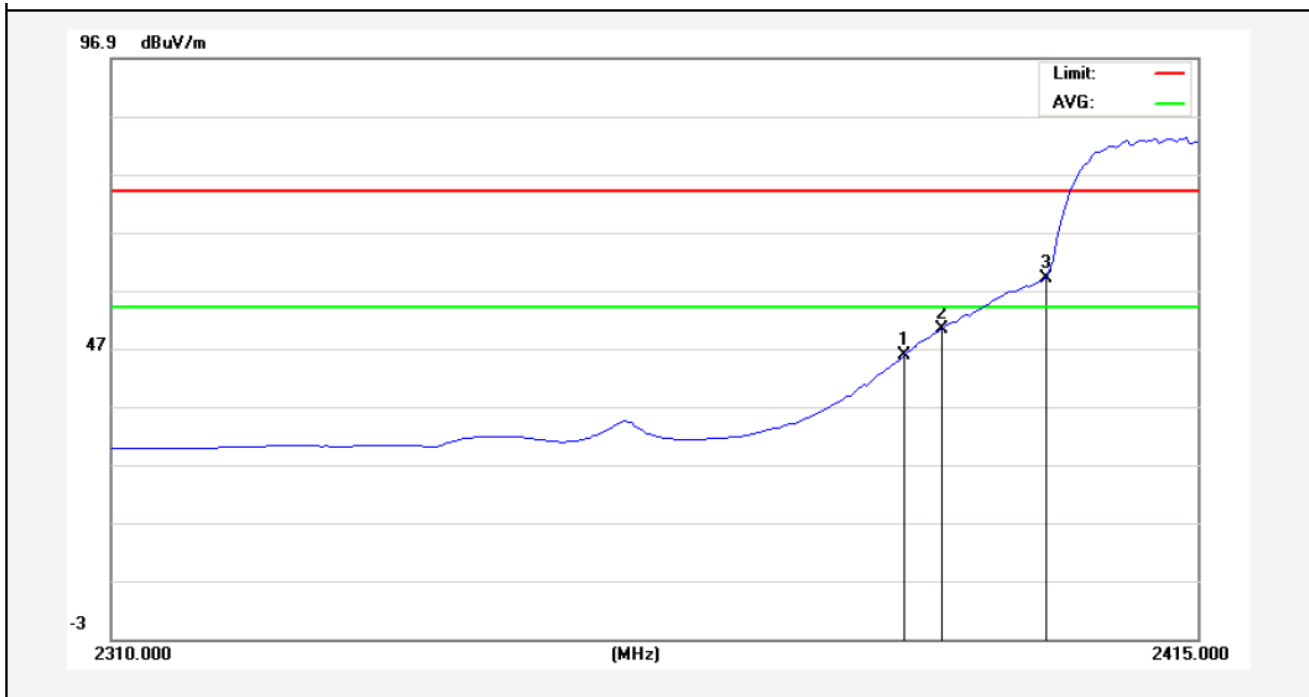

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2386.387	48.25	-2.52	45.73	54.00	-8.27	AVG			
2	2390.000	52.85	-2.51	50.34	54.00	-3.66	AVG			
3	2400.000	61.52	-2.49	59.03	54.00	5.03	AVG			

Anbotek


Test Mode: 802.11n (HT20)
2462MHz
Horizontal-PEAK:

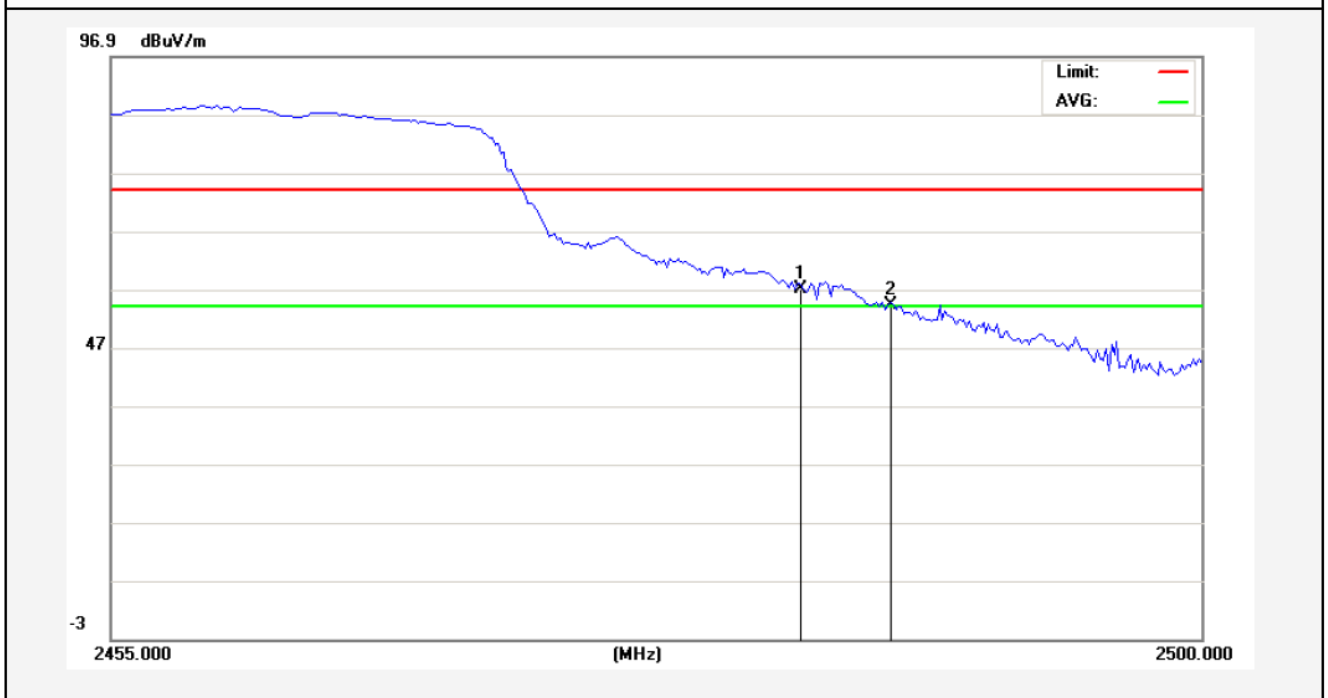

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	59.26	-2.31	56.95	74.00	-17.05	peak			
2	2487.287	56.65	-2.30	54.35	74.00	-19.65	peak			

AMB


Horizontal-AV:

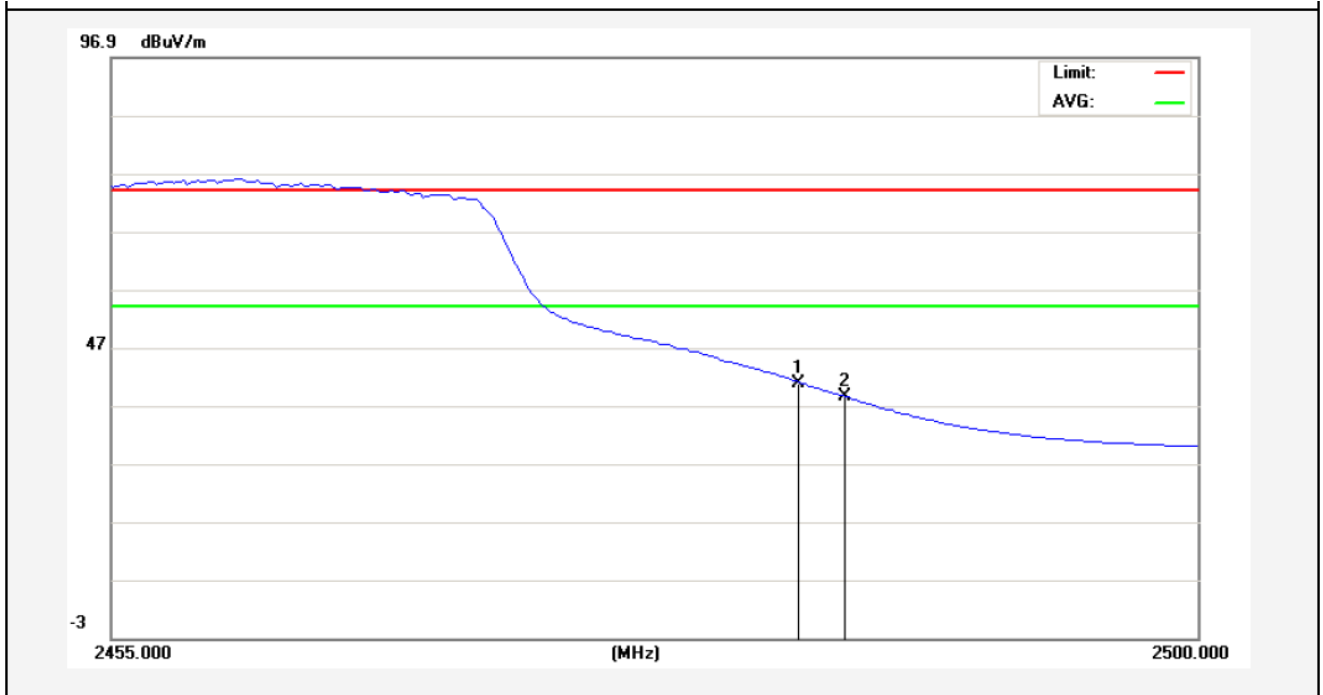

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	43.19	-2.31	40.88	54.00	-13.12	AVG			
2	2485.375	40.86	-2.30	38.56	54.00	-15.44	AVG			

Anbotek


Test Mode: 802.11n (HT20)
2462MHz
Vertical-PEAK:

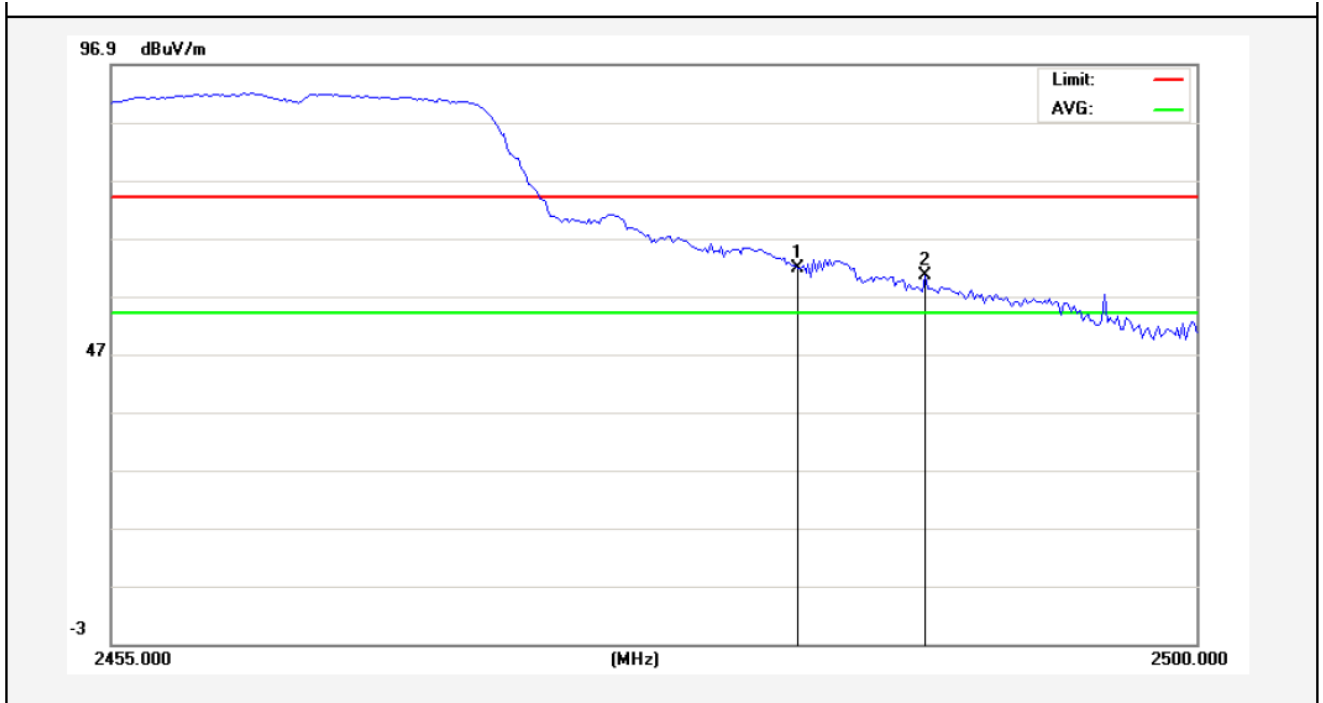

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	63.98	-2.31	61.67	74.00	-12.33	peak			
2	2488.750	62.75	-2.29	60.46	74.00	-13.54	peak			

AMB


Vertical-AV:

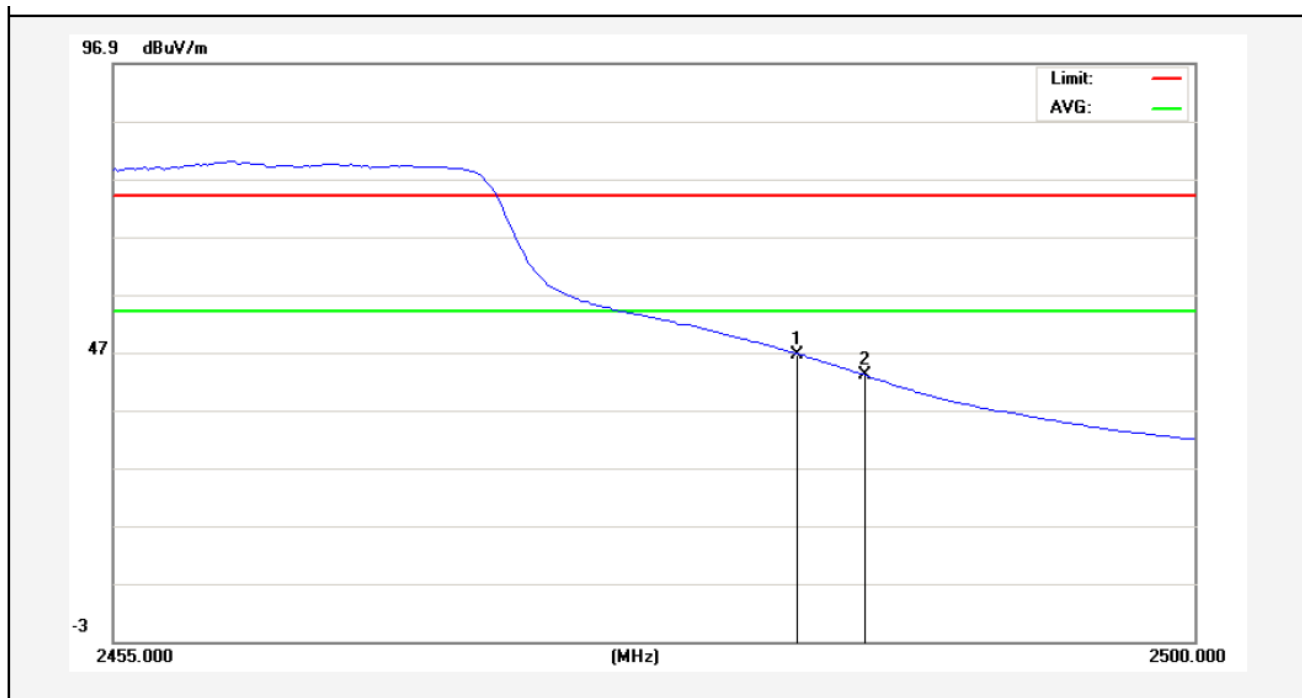

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	48.86	-2.31	46.55	54.00	-7.45	AVG			
2	2486.275	45.36	-2.30	43.06	54.00	-10.94	AVG			

Anbotek


Test Mode: 802.11n (HT40)
2422MHz
Horizontal-PEAK:

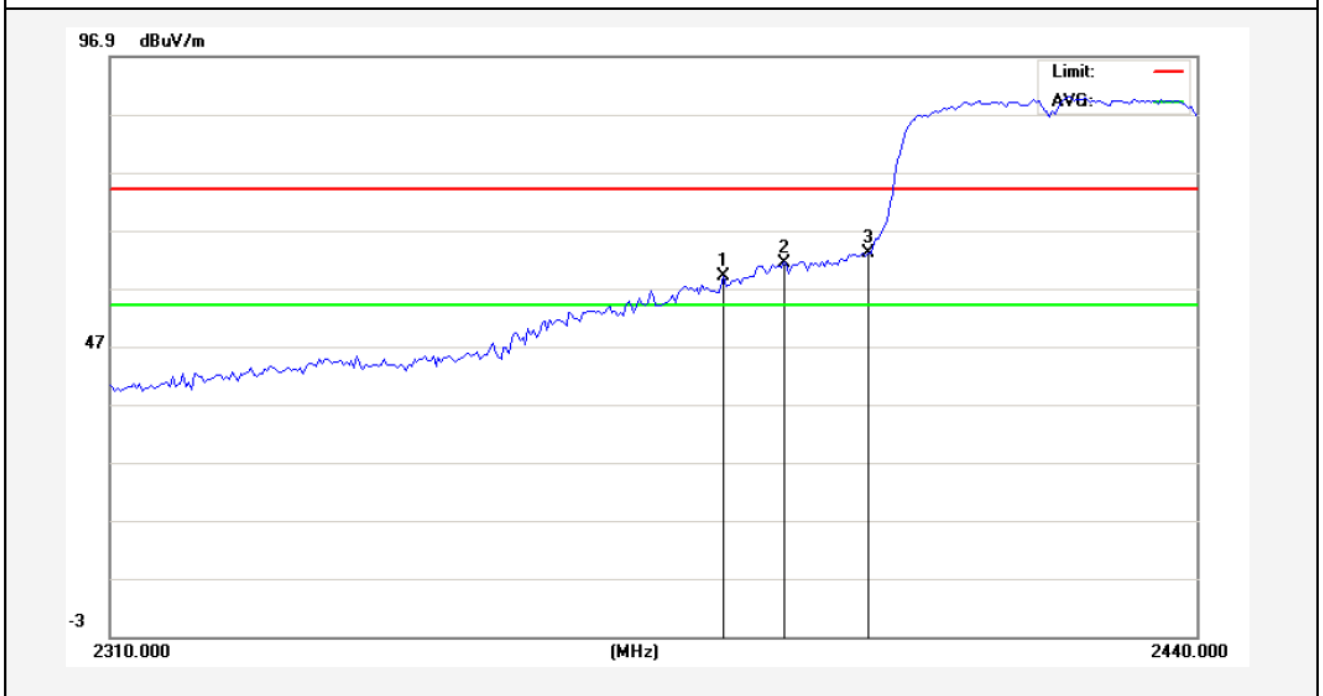

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2382.800	61.45	-2.53	58.92	74.00	-15.08	peak			
2	2390.000	63.73	-2.51	61.22	74.00	-12.78	peak			
3	2400.000	65.56	-2.49	63.07	74.00	-10.93	peak			

AMB

Horizontal-AV:

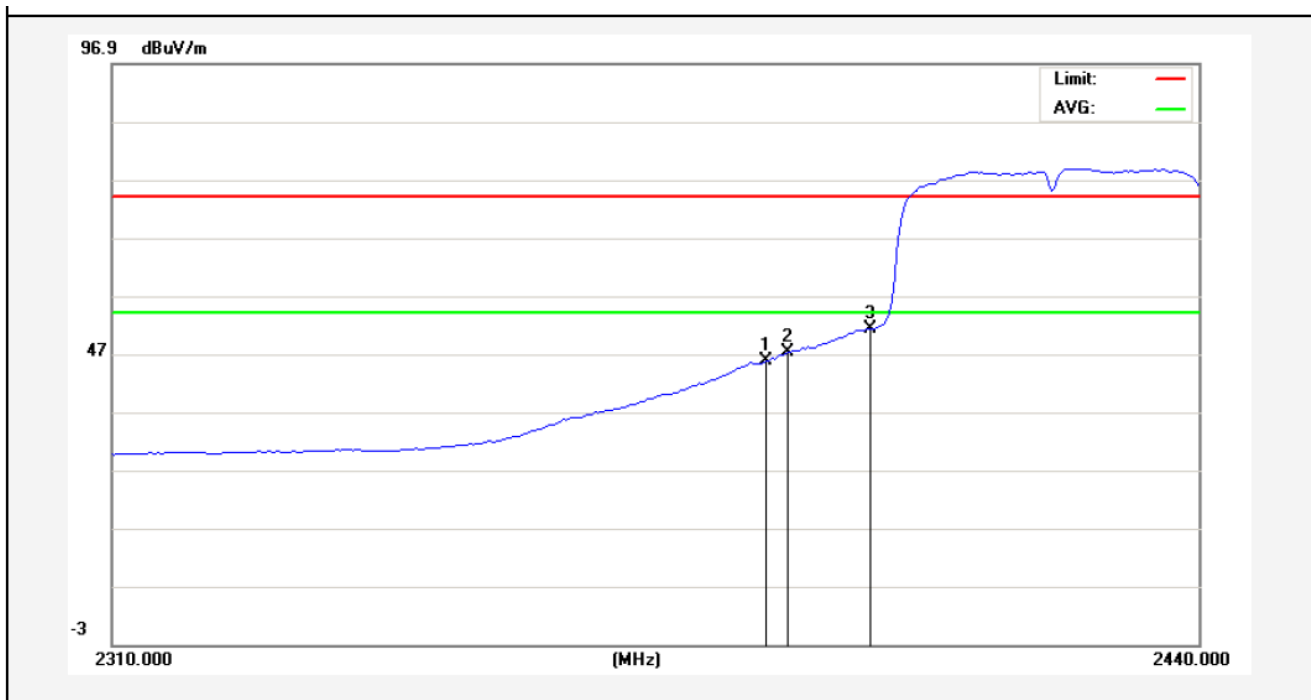


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2387.675	48.40	-2.52	45.88	54.00	-8.12	AVG			
2	2390.000	49.75	-2.51	47.24	54.00	-6.76	AVG			
3	2400.000	53.74	-2.49	51.25	54.00	-2.75	AVG			

Anbotek

Test Mode: 802.11n (HT40)

2422MHz


Vertical-PEAK:

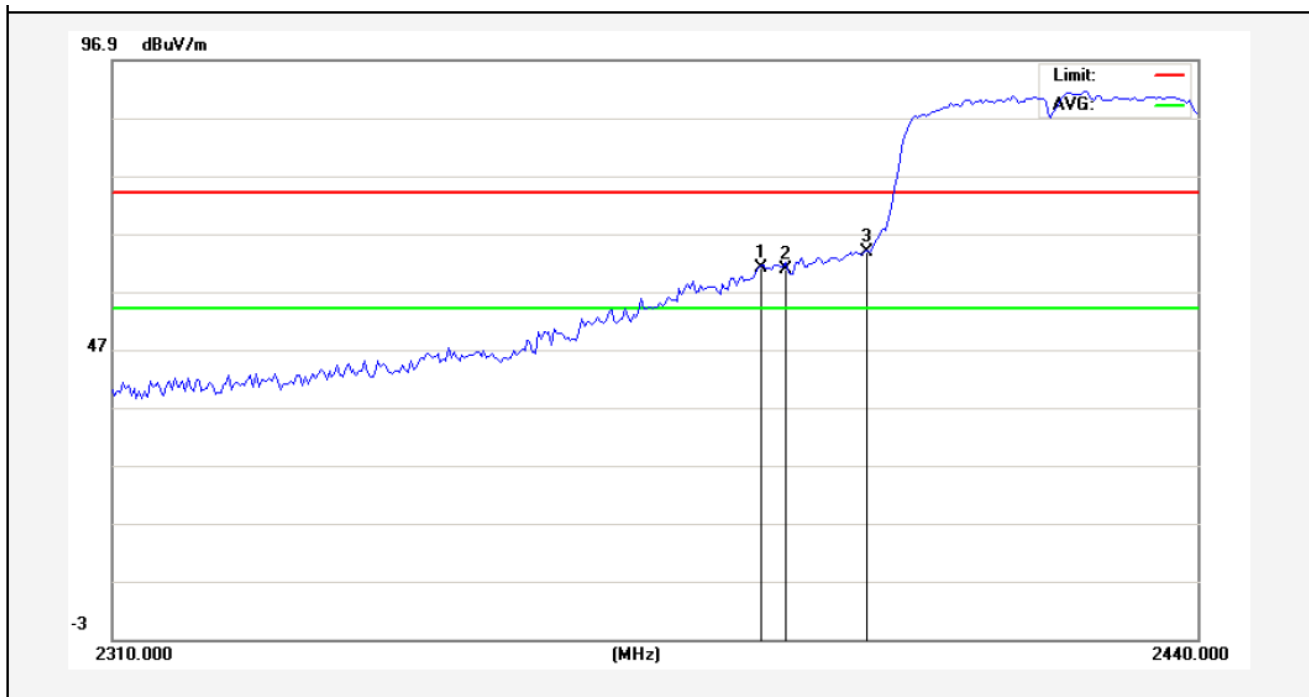

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2386.700	63.56	-2.52	61.04	74.00	-12.96	peak			
2	2390.000	63.34	-2.51	60.83	74.00	-13.17	peak			
3	2400.000	66.16	-2.49	63.67	74.00	-10.33	peak			

AMB

Vertical-AV:

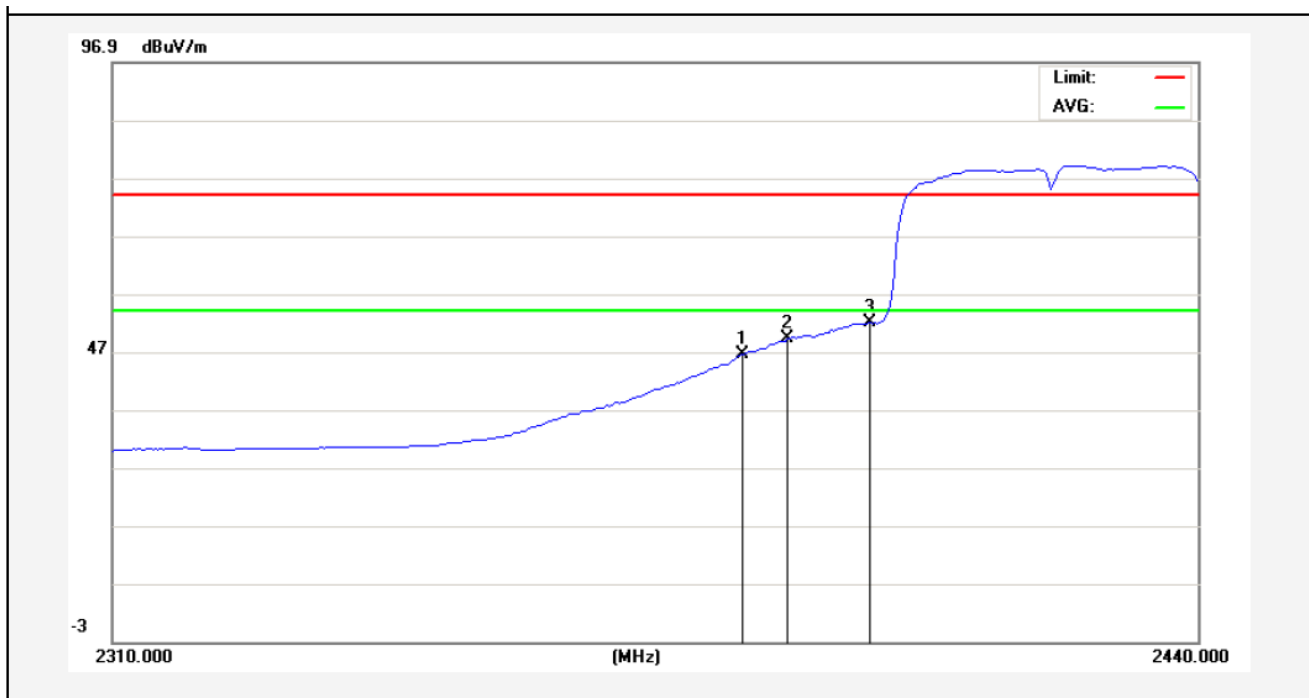


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2384.750	49.08	-2.53	46.55	54.00	-7.45	AVG			
2	2390.000	51.69	-2.51	49.18	54.00	-4.82	AVG			
3	2400.000	54.42	-2.49	51.93	54.00	-2.07	AVG			

AMB

Test Mode: 802.11n (HT40)

2452MHz


Horizontal-PEAK:

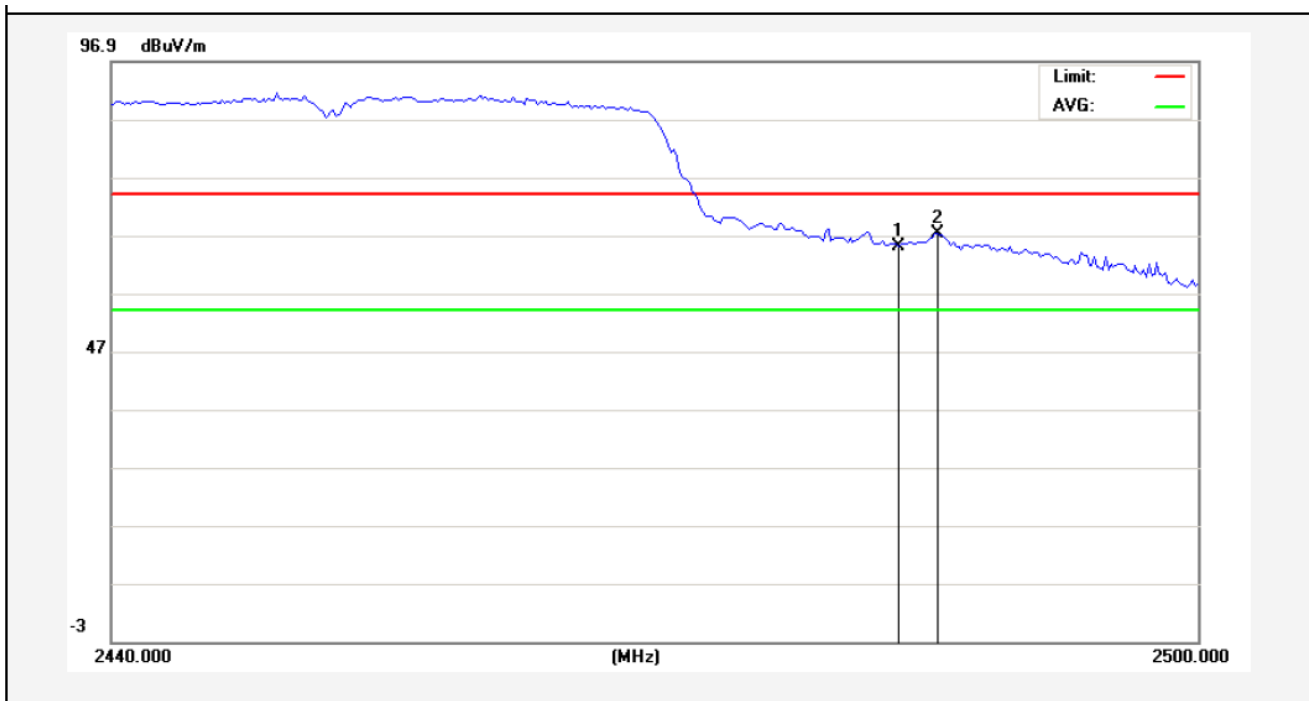

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	67.30	-2.31	64.99	74.00	-9.01	peak			
2	2485.600	69.64	-2.30	67.34	74.00	-6.66	peak			

AMB


Horizontal-AV:

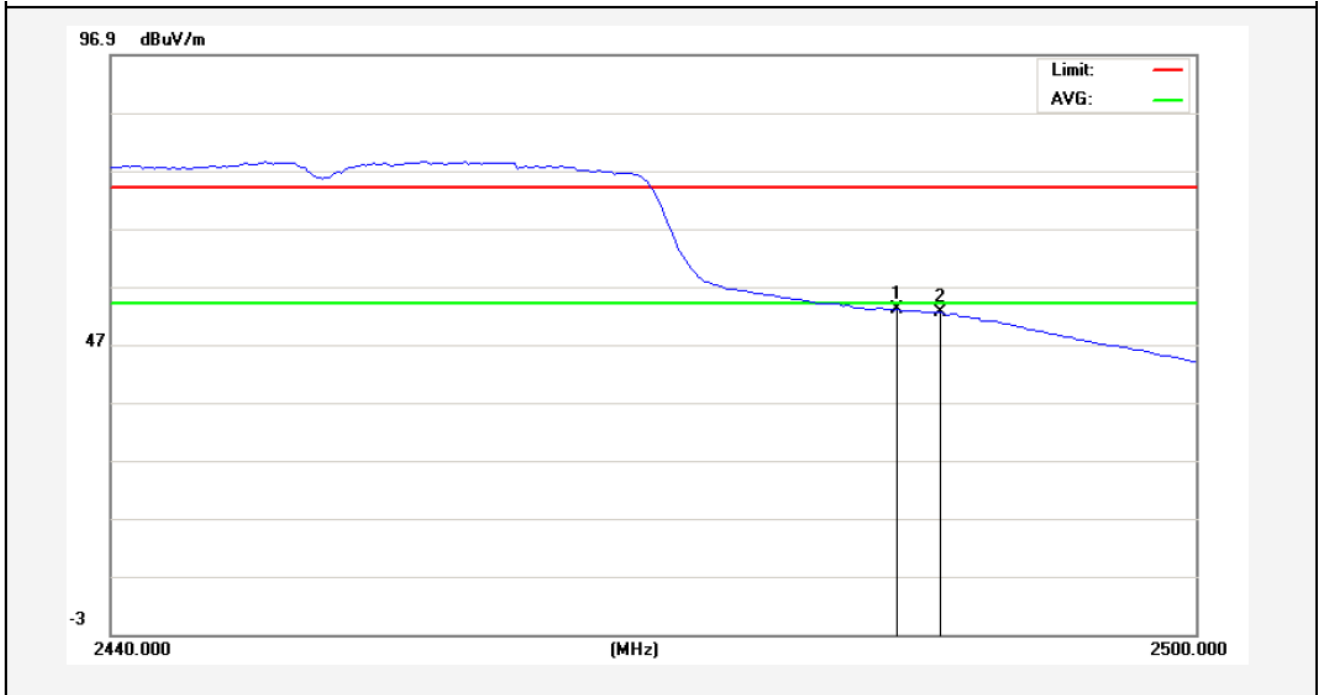

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	55.23	-2.31	52.92	54.00	-1.08	AVG			
2	2485.900	54.73	-2.30	52.43	54.00	-1.57	AVG			

Anbotek


Test Mode: 802.11n (HT40)
2452MHz
Vertical-PEAK:

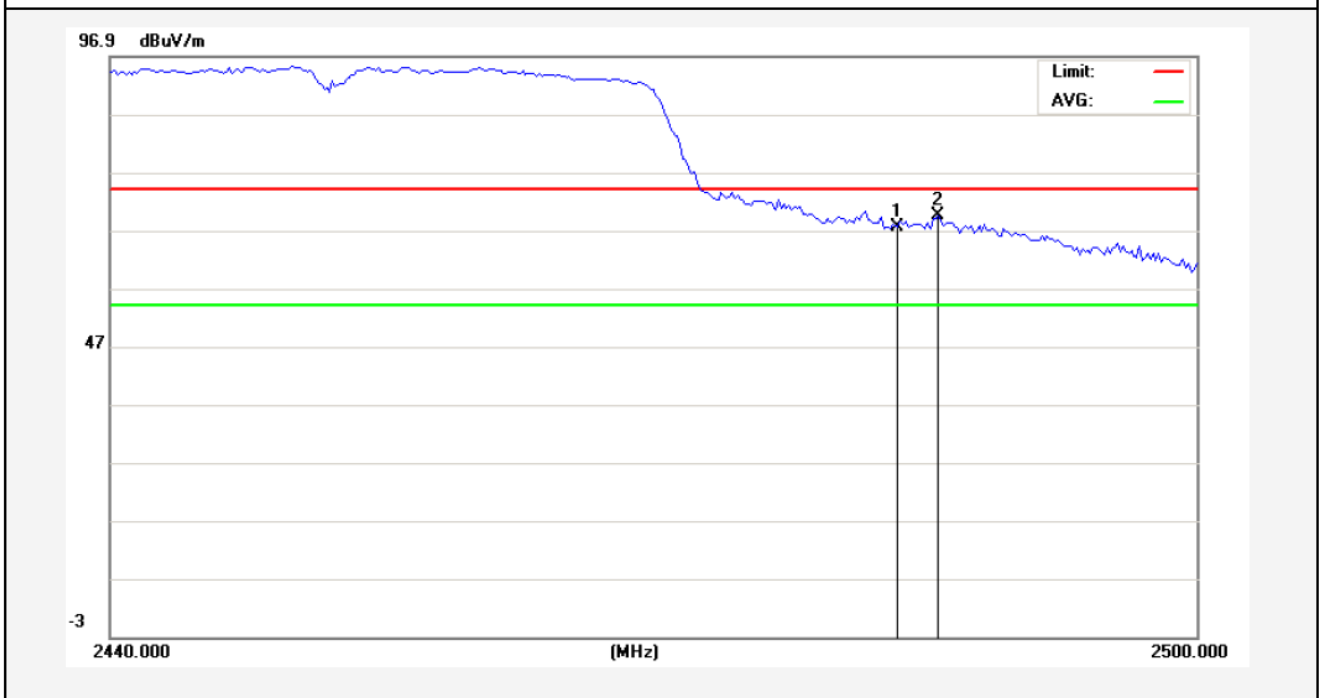

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	69.76	-2.31	67.45	74.00	-6.55	peak			
2	2485.750	71.90	-2.30	69.60	74.00	-4.40	peak			

AMB

Vertical-AV:

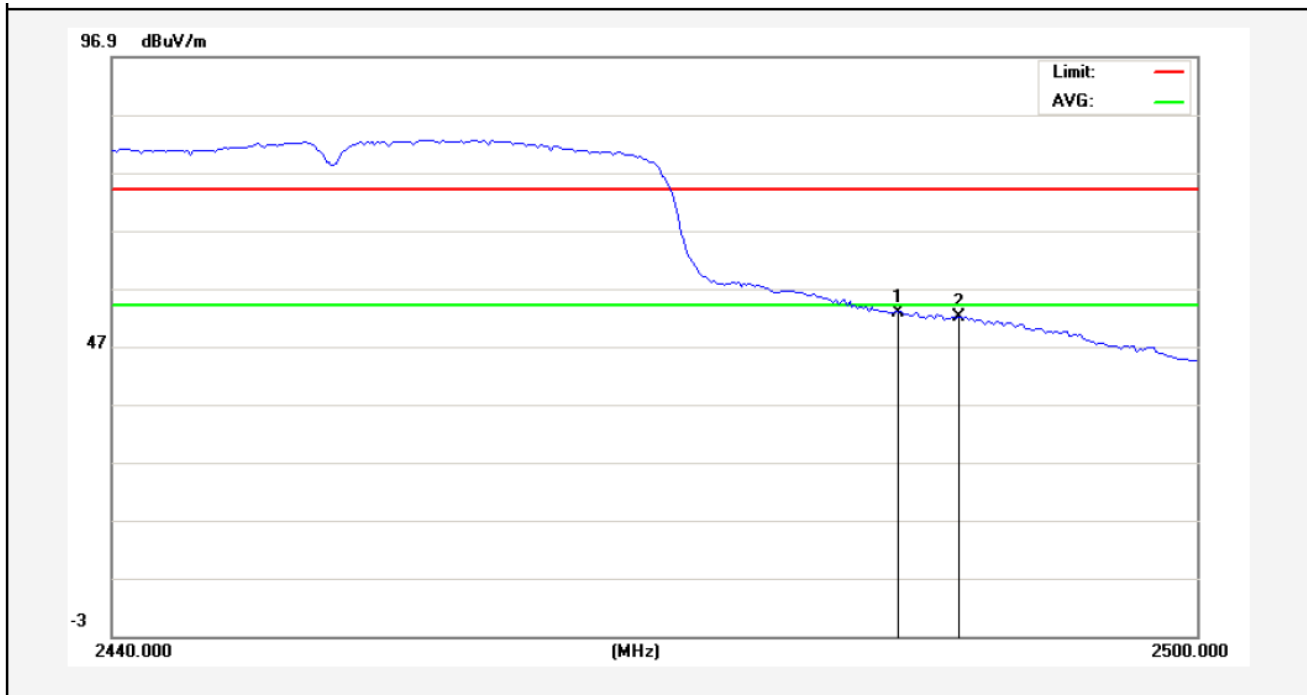

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	2483.500	55.12	-2.31	52.81	54.00	-1.19	AVG			
2	2486.800	54.41	-2.30	52.11	54.00	-1.89	AVG			

Anbotek

4.5. Peak Power Spectral Density

a. Limit

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

b. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5 times DTS BW, Sweep=500s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

c. Test Equipment

Same as the equipment listed in 4.2.

d. Test Setup

See 4.1

e. Test Results

Pass

f. Test Data

Please refer to the following data.

g. Test Plot See the following pages

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm/3KHz)	ΣPPSD (dBm/3KHz)	Limit (dBm)	Result
Low	2412	0.82	-	8.00	Pass
Mid	2437	-0.52	-		Pass
High	2462	-2.54	-		Pass

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	ΣPPSD (dBm)	Limit (dBm)	Result
Low	2412	-15.02	-	8.00	Pass
Mid	2437	-16.06	-		Pass
High	2462	-15.46	-		Pass

Test mode: IEEE 802.11n (HT20)

Channel	Frequency (MHz)	PPSD (dBm/3KHz)	ΣPPSD (dBm/3KHz)	Limit (dBm)	Result
Low	2412	-14.67	-	8.00	Pass
Mid	2437	-14.90	-		Pass
High	2462	-15.69	-		Pass


Test mode: IEEE 802.11n (HT40)

Channel	Frequency (MHz)	PPSD (dBm/3KHz)	ΣPPSD (dBm/3KHz)	Limit (dBm)	Result
Low	2422	-14.07	-	8.00	Pass
Mid	2437	-14.84	-		Pass
High	2452	-15.94	-		Pass

802.11 b CH--Low




*RBW 3 kHz Marker 1 [T1] 0.82 dBm
*VBW 10 kHz
Ref 30 dBm *Att 45 dB SWT 2 s 2.412931944 GHz

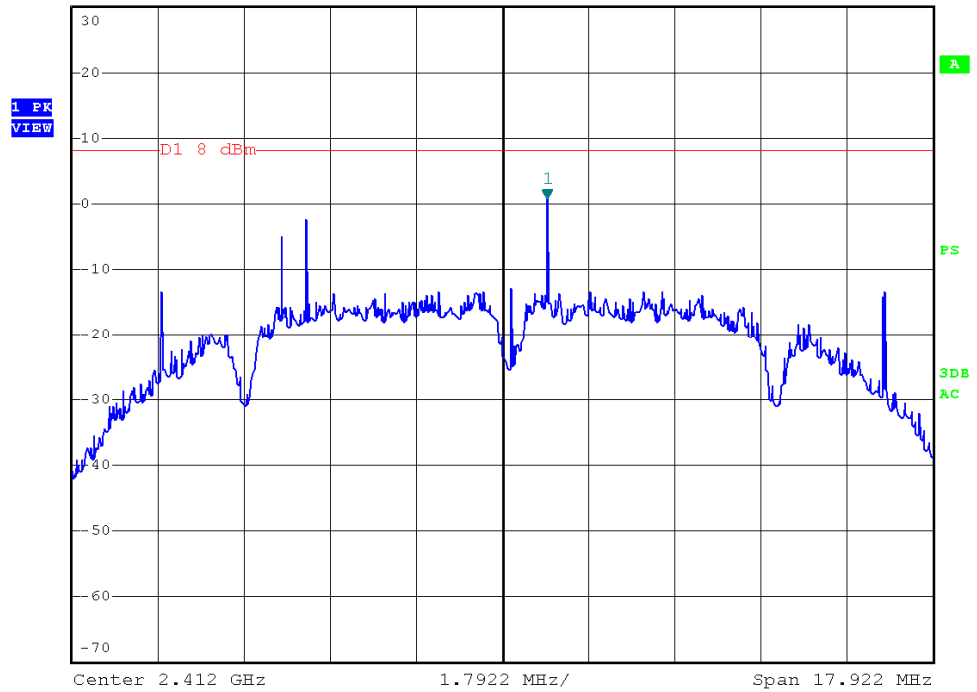


802.11 b CH--Mid




*RBW 3 kHz Marker 1 [T1] -0.52 dBm
*VBW 10 kHz
Ref 30 dBm *Att 45 dB SWT 2.05 s 2.436423808 GHz

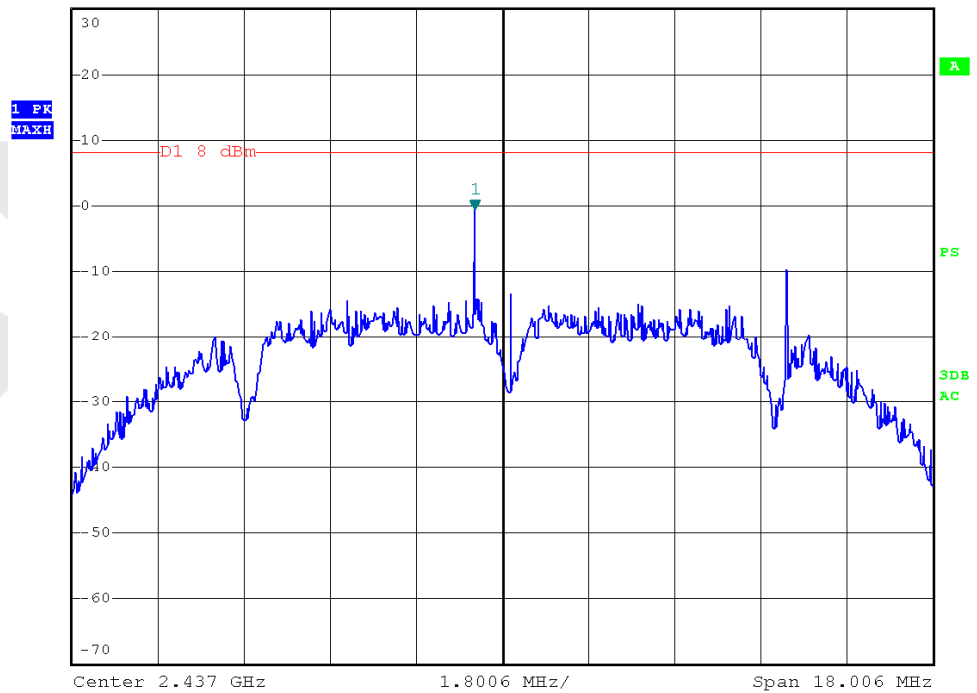

802.11 b CH--High

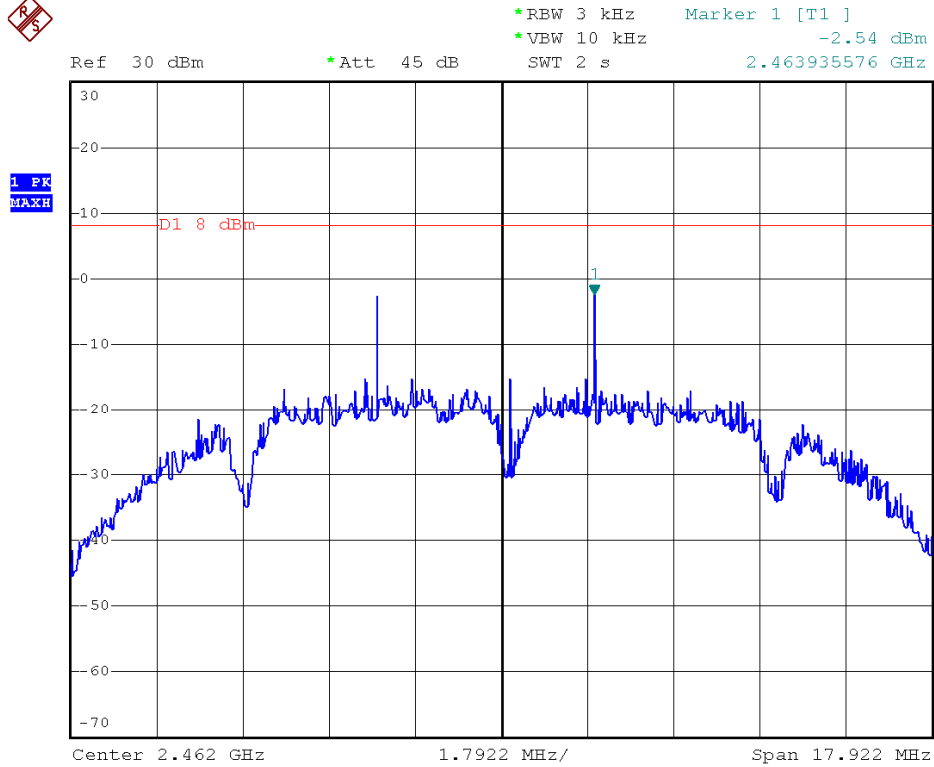


802.11g CH--Low

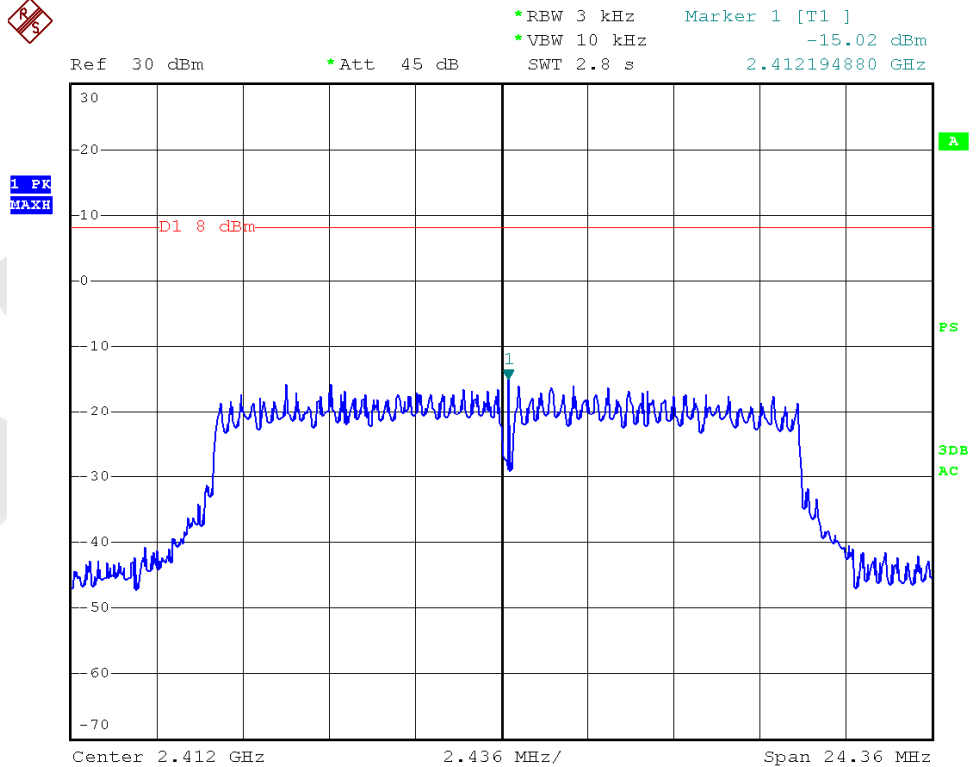

802.11g CH--Mid




*RBW 3 kHz Marker 1 [T1]
*VBW 10 kHz -16.06 dBm
SWT 2.8 s 2.435626096 GHz

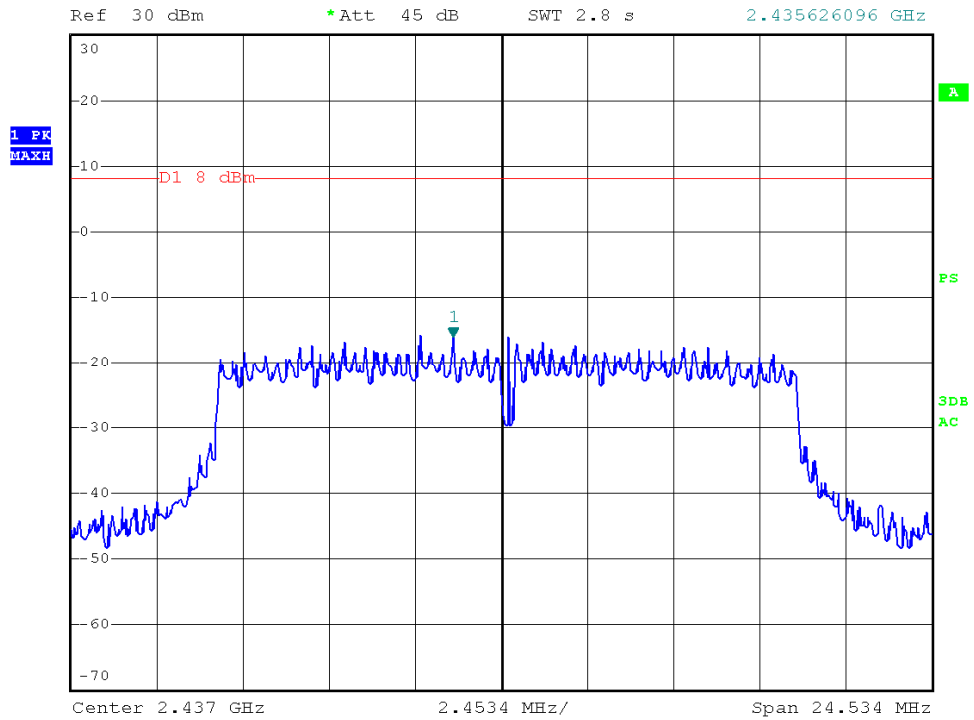


802.11g CH--High




*RBW 3 kHz Marker 1 [T1]
*VBW 10 kHz -15.46 dBm
SWT 2.8 s 2.457517760 GHz

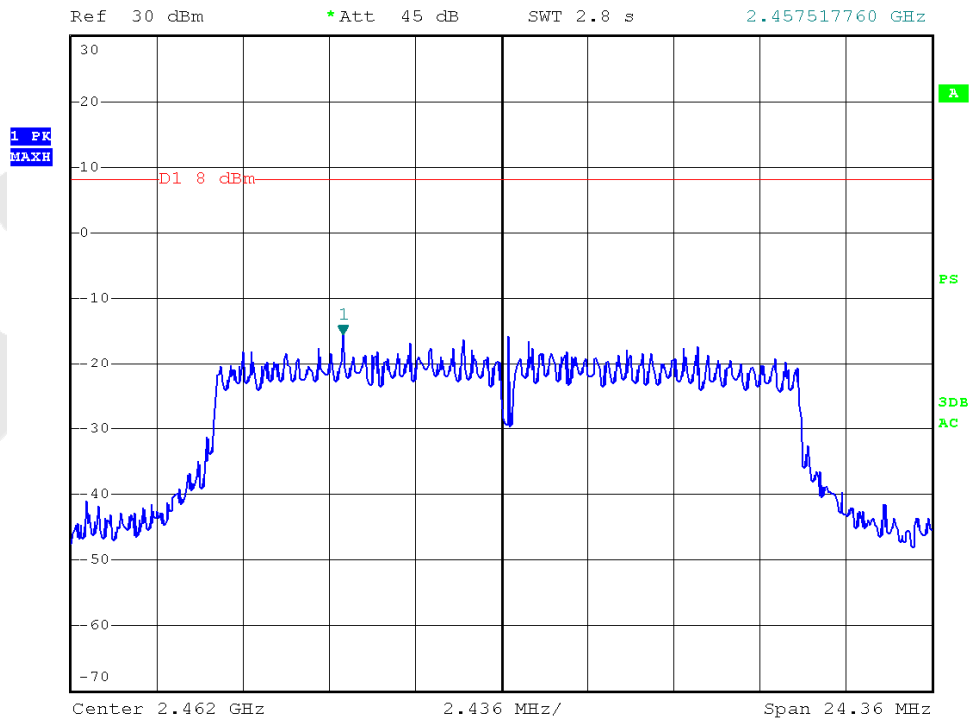


802.11n (HT20) CH—Low

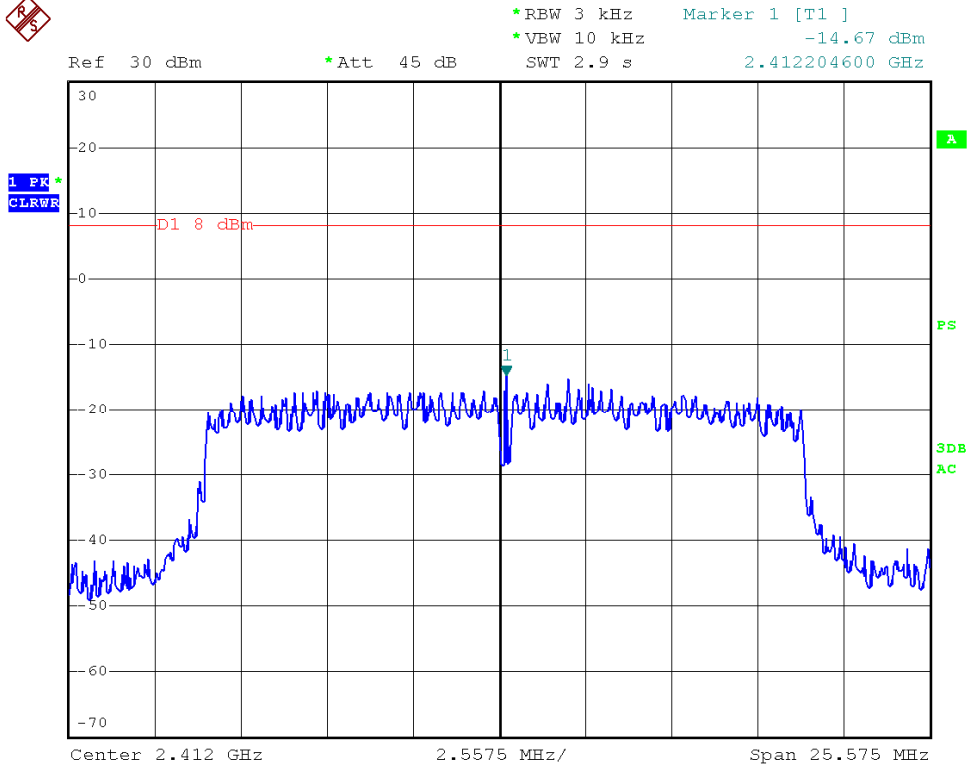


802.11n (HT20) CH—Mid

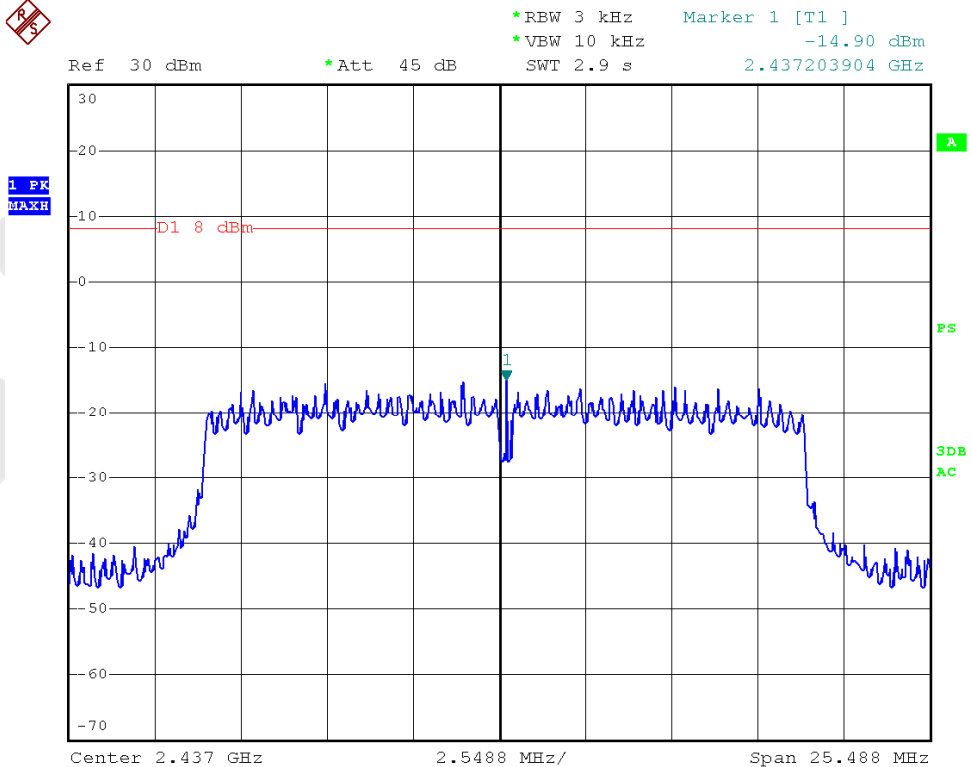


802.11n (HT20) CH—High

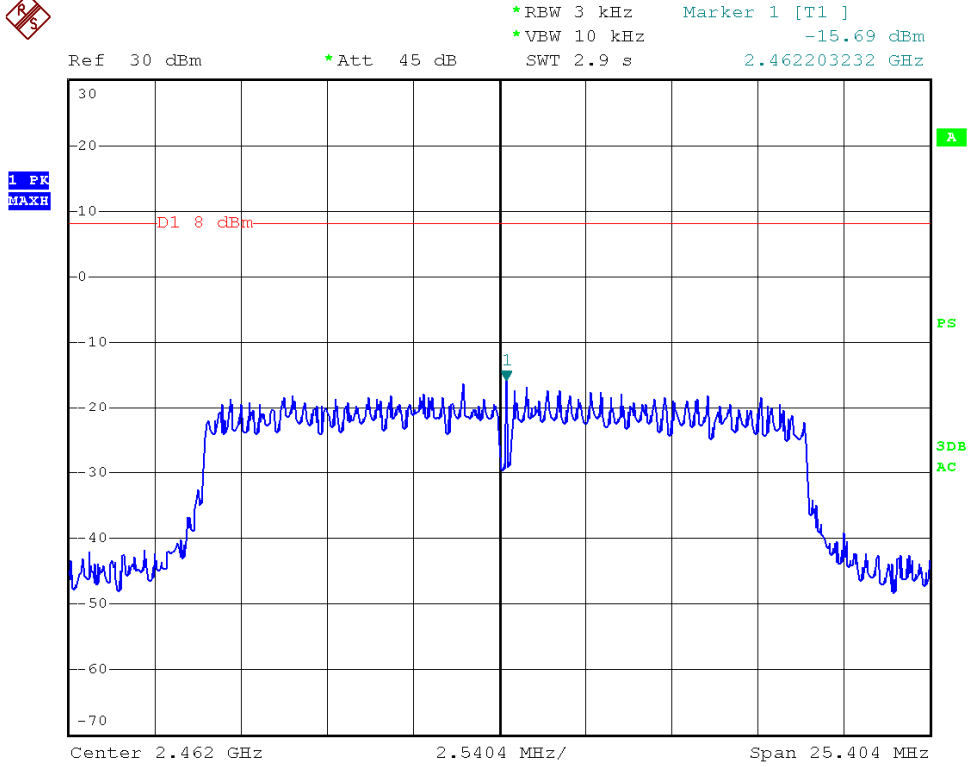


802.11n (HT40) CH—Low

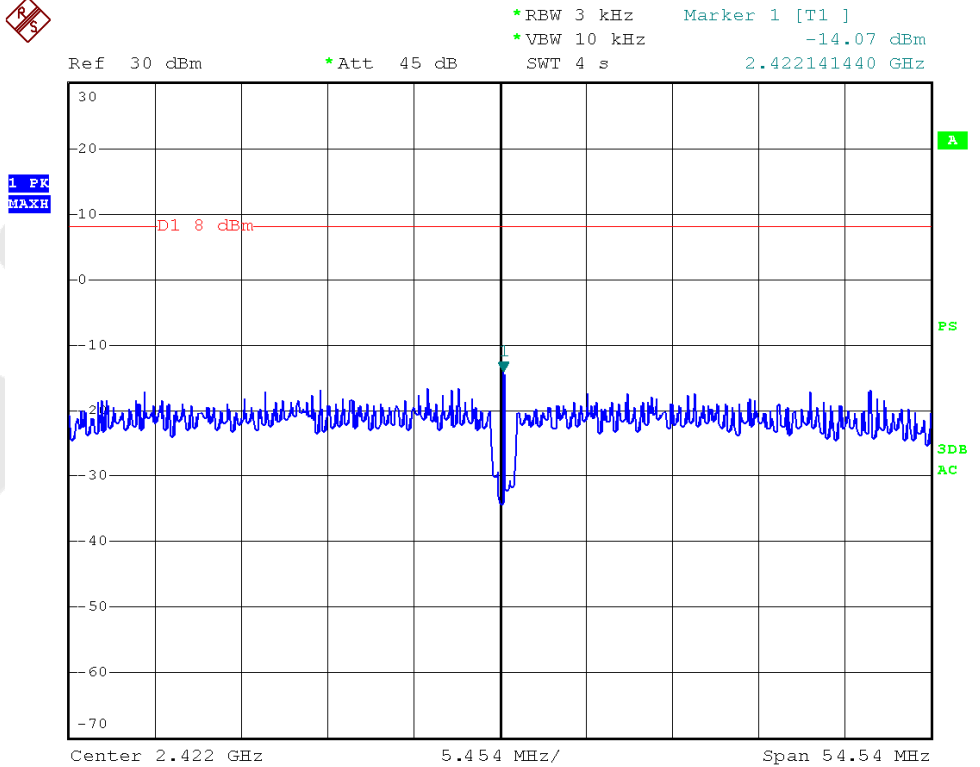

802.11n (HT40) CH—Mid

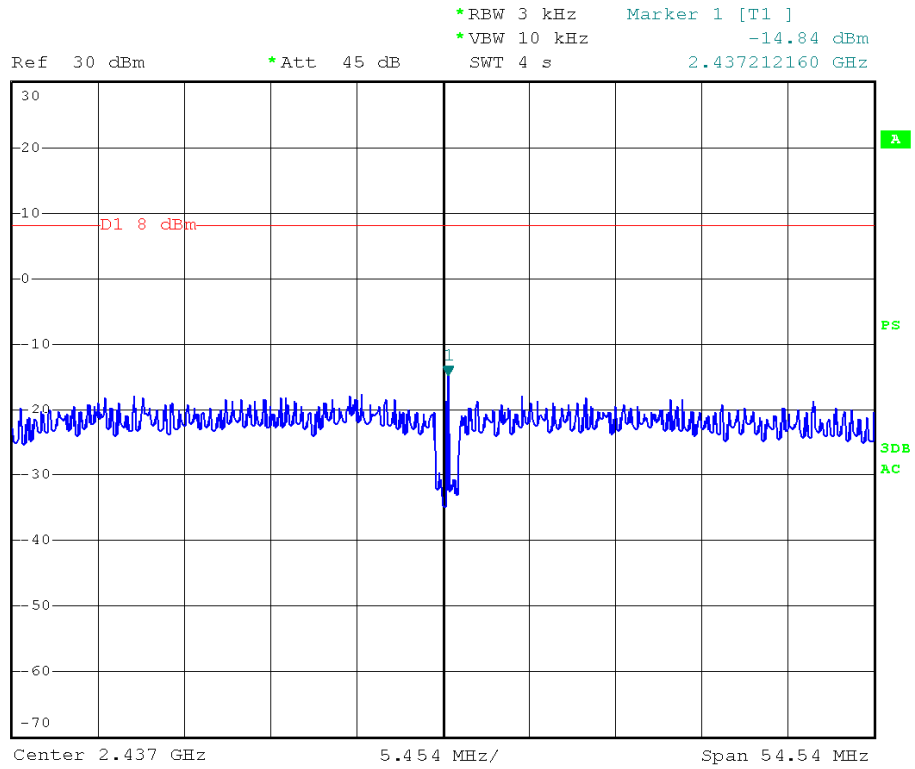

802.11n (HT40) CH—High

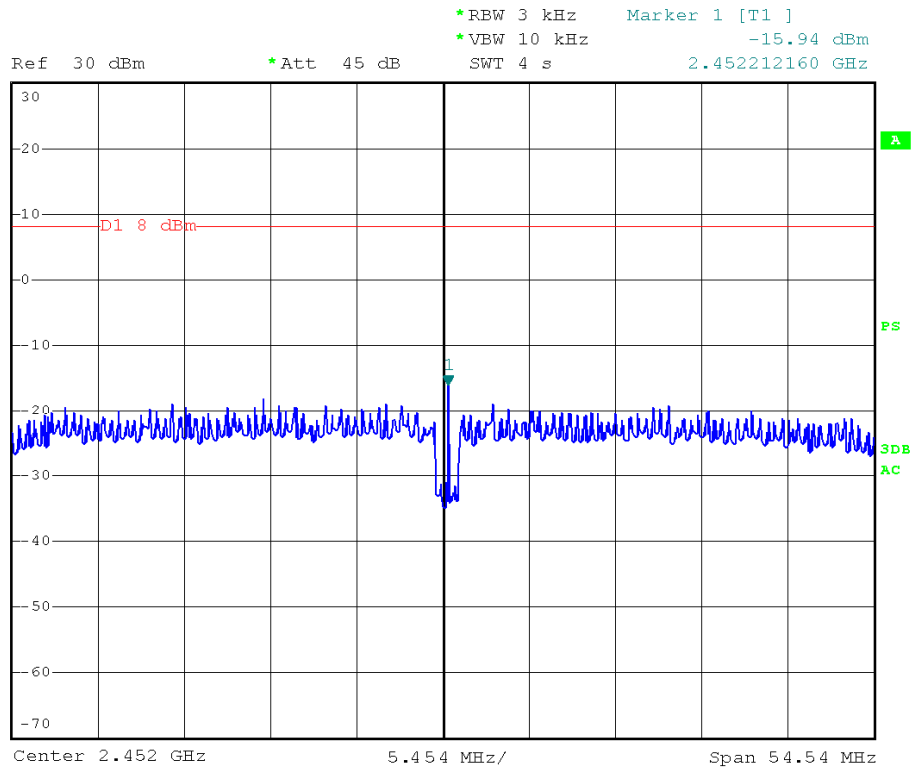

4.6. Radiated Emissions

4.6.1.1. Test Limits (< 30 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

4.6.1.2. Test Limits (\geq 30 MHz)

FIELD STRENGTH of Fundamental: @3M	FIELD STRENGTH of Harmonics	S15.209	
902-928 MHz		30 - 88 MHz	40 dBuV/m
2.4-2.4835 GHz		88 - 216 MHz	43.5
94 dB μ V/m @3m	54 dB μ V/m @3m	216 - 960 MHz	46
		ABOVE 960 MHz	54dBuV/m


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Aug. 08, 2014	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Aug. 08, 2014	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 22, 2014	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 04, 2014	1 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 24, 2014	1 Year
6.	Pre-amplifier	SONOMA	310N	186860	Aug. 08, 2014	1 Year
7.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

4.6.2. Test Configuration:


4.6.2.1. 9k to 30MHz emissions:

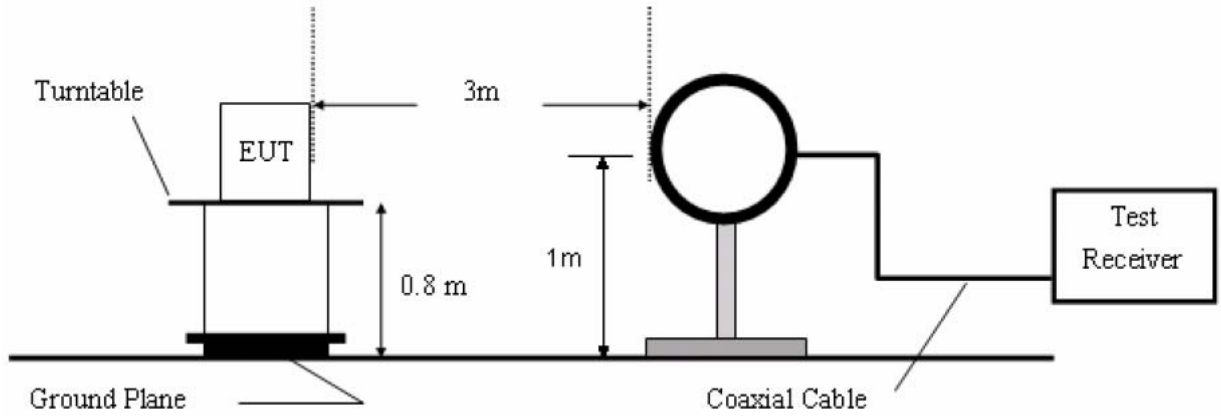

4.6.2.2. 30M to 1G emissions:

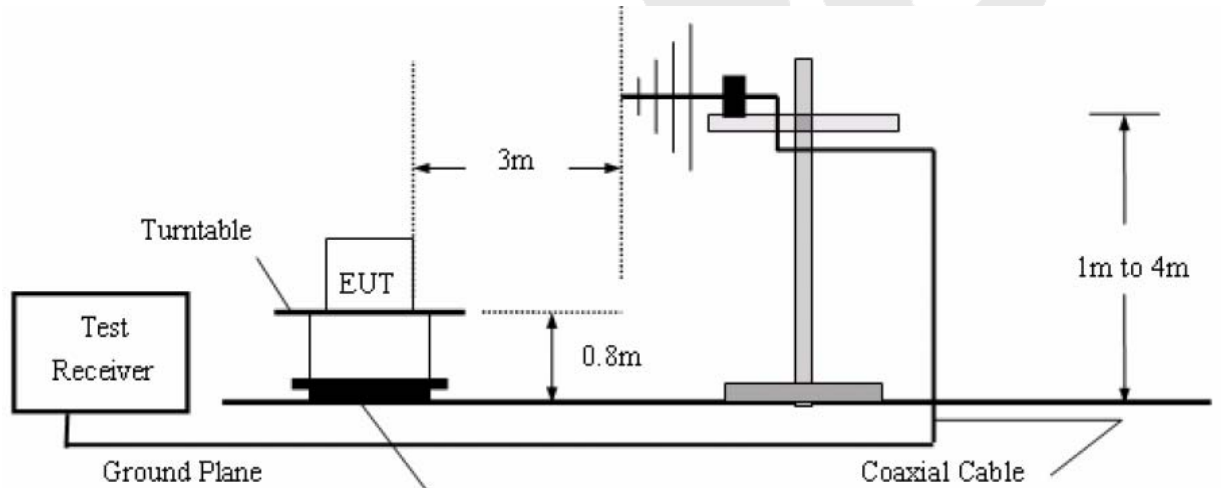

4.6.2.3. 1G to 40G emissions:

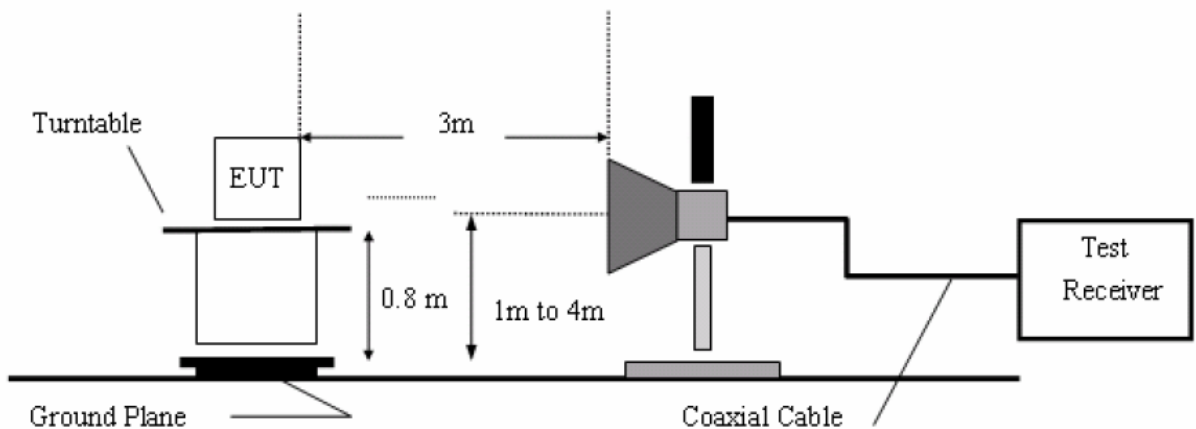

4.6.3. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Measurements are made on 9KHz to 30MHz and 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz.


The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 4.6.4.

4.6.4. Test Results


Please refer to the following pages.

Job No.:	011410076E	Polarization:	Horizontal
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	On	Distance:	3m

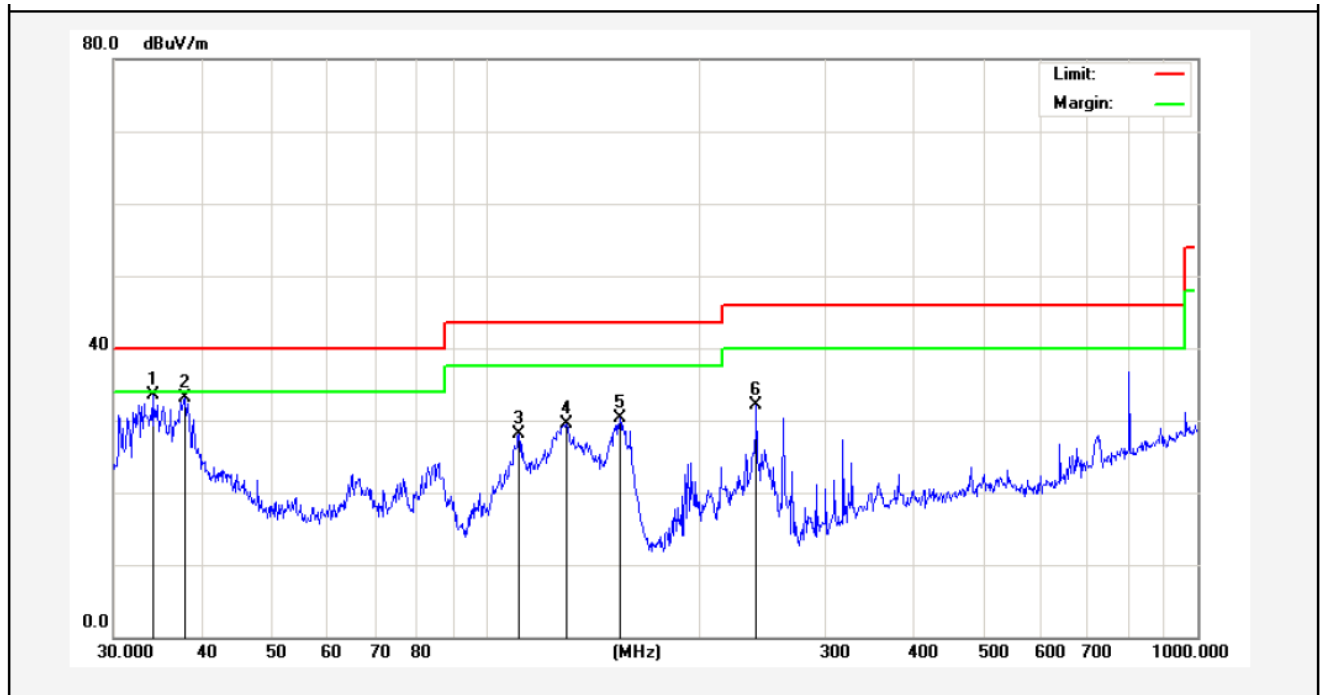


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	34.0365	48.38	-14.80	33.58	40.00	-6.42	peak			
2	37.8121	45.15	-12.09	33.06	40.00	-6.94	peak			
3	111.3468	48.75	-20.72	28.03	43.50	-15.47	peak			
4	129.9226	52.32	-22.80	29.52	43.50	-13.98	peak			
5	154.2786	53.39	-23.14	30.25	43.50	-13.25	peak			
6	239.9874	50.14	-18.09	32.05	46.00	-13.95	peak			

Job No.:	011410076E	Polarization:	Vertical
Standard:	(RE)FCC PART15 C_3m	Power Source:	DC 5V via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Test Mode:	On	Distance:	3m

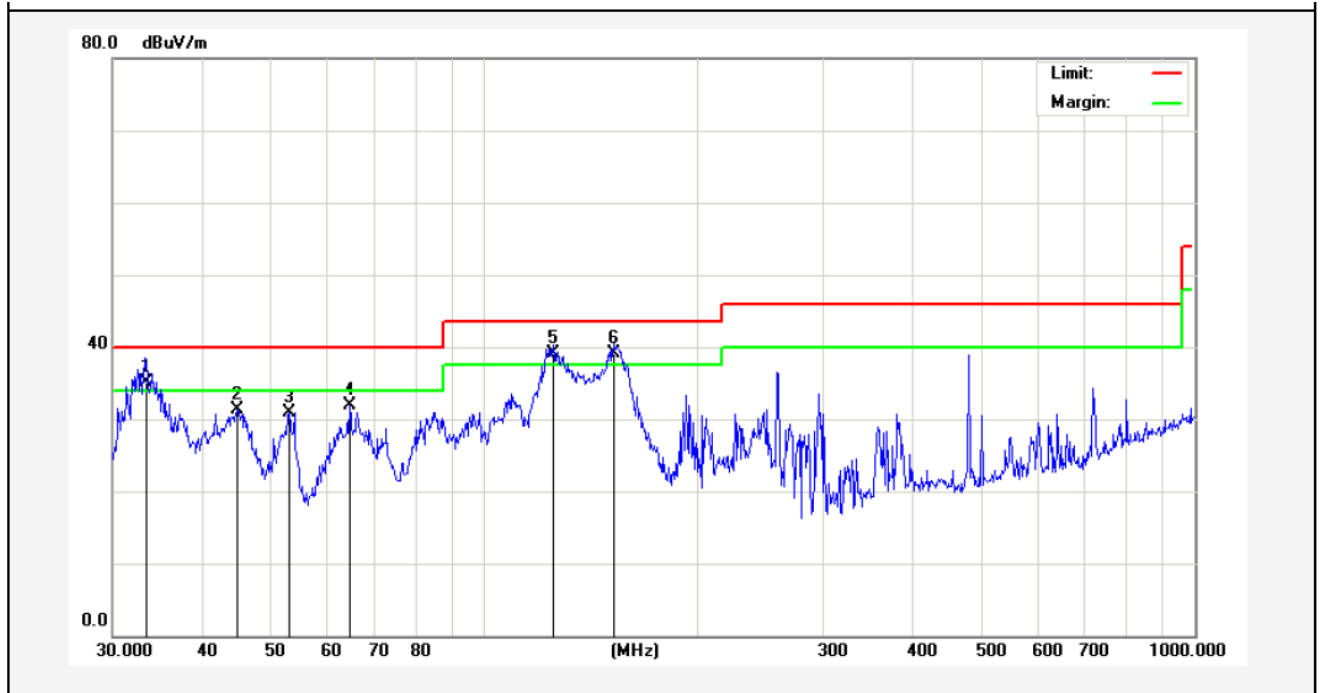

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	33.4579	50.25	-15.11	35.14	40.00	-4.86	QP	100	0	
2	44.9006	43.53	-12.29	31.24	40.00	-8.76	peak			
3	53.1313	45.72	-14.79	30.93	40.00	-9.07	peak			
4	64.6594	49.17	-17.33	31.84	40.00	-8.16	peak			
5	125.0066	56.14	-17.08	39.06	43.50	-4.44	QP	100	360	
6	152.1297	57.40	-18.24	39.16	43.50	-4.34	QP	100	0	


Job No.:	011410076E	Polarization:	Horizontal
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	802.11b(2412MHz)	Distance:	3m

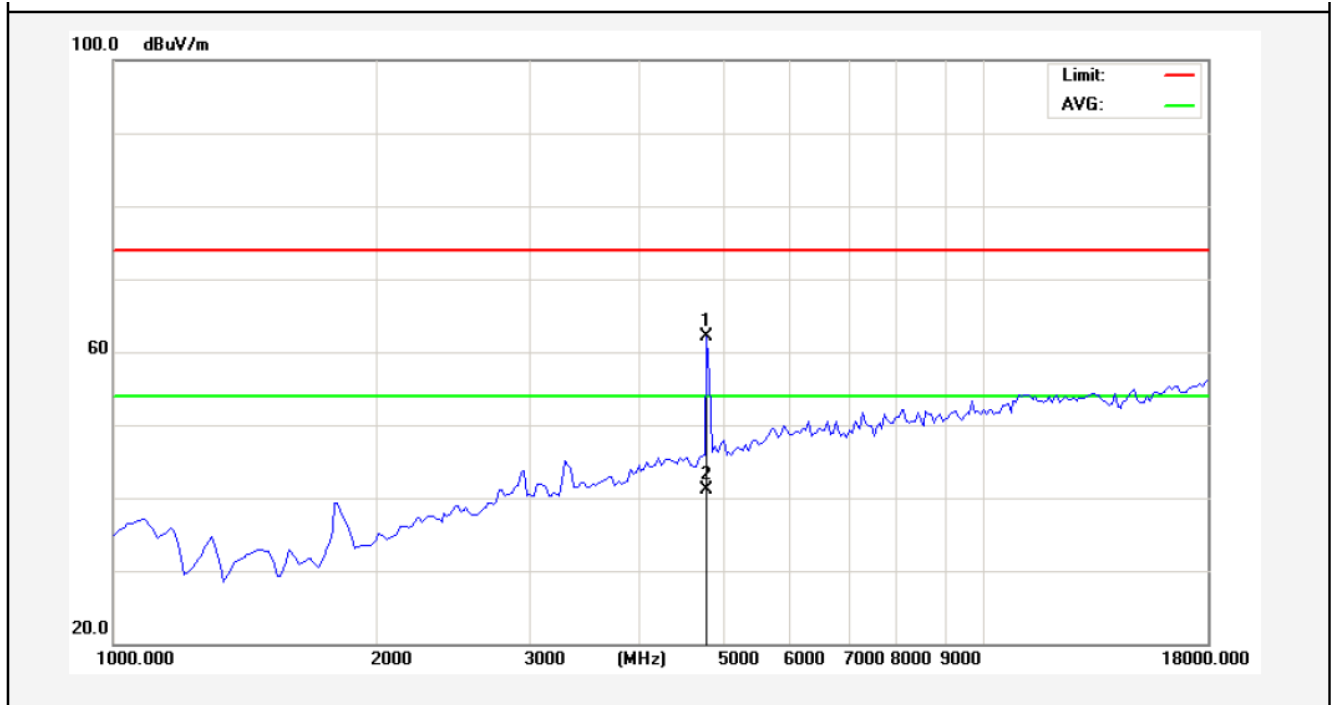

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4825.000	58.67	3.34	62.01	74.00	-11.99	peak			
2	4825.000	37.69	3.34	41.03	54.00	-12.97	AVG			

AMB


Job No.:	011410076E	Polarization:	Vertical
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	802.11b(2412MHz)	Distance:	3m

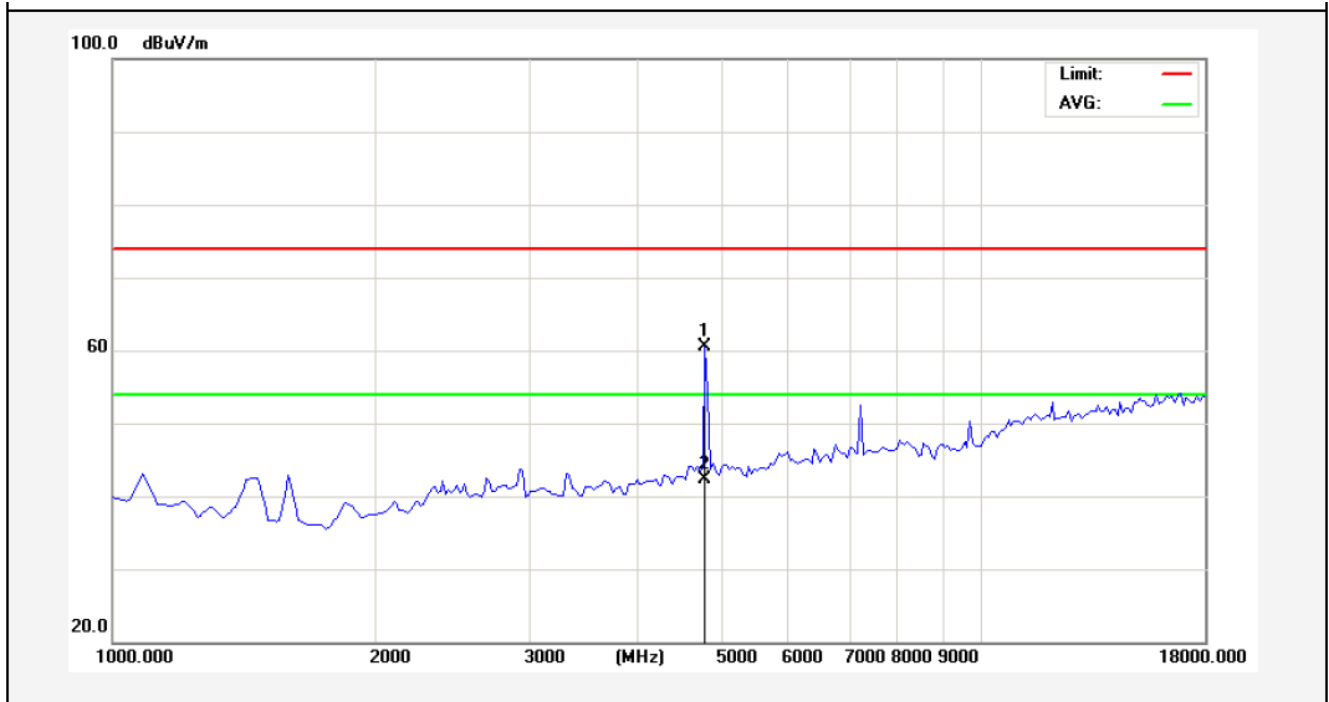

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4825.000	57.10	3.34	60.44	74.00	-13.56	peak			
2	4825.000	38.87	3.34	42.21	54.00	-11.79	AVG			

AMB


Job No.:	011410076E	Polarization:	Horizontal
Standard:	(RE)FCC PART15 C_3m	Power Source:	DC 5V via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	802.11b(2437MHz)	Distance:	3m

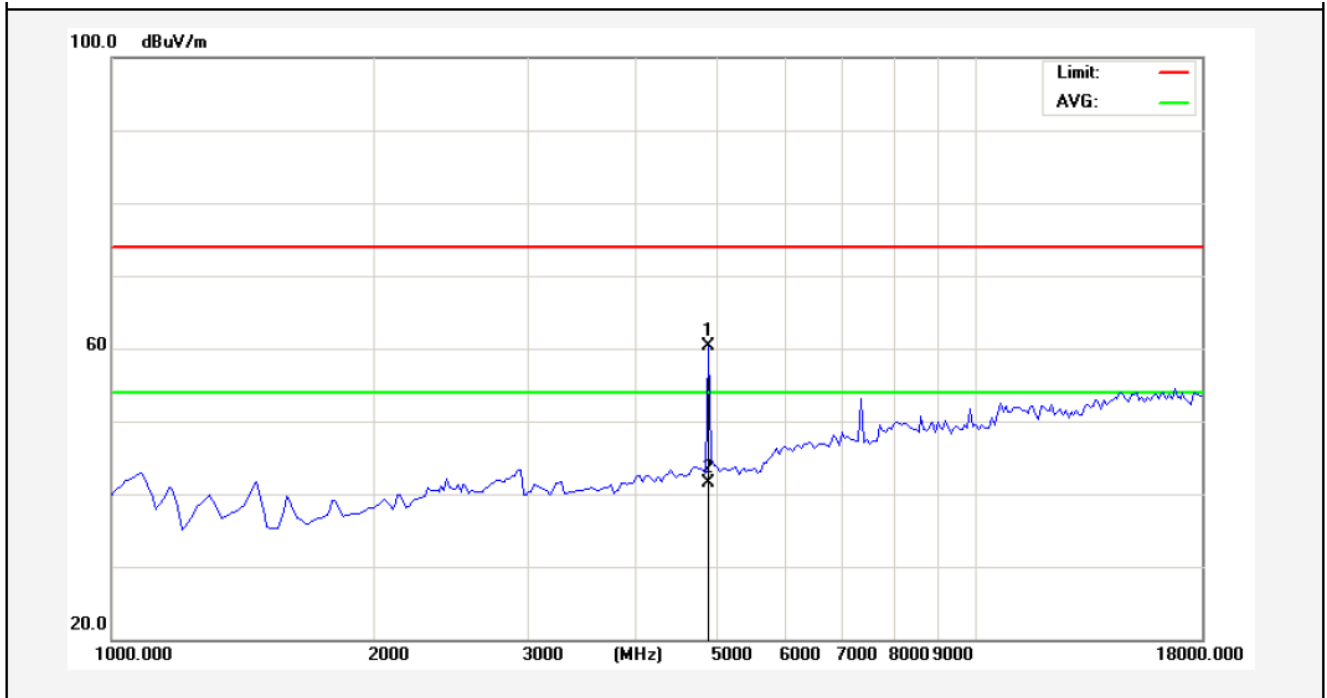

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4867.500	56.90	3.41	60.31	74.00	-13.69	peak			
2	4867.500	38.12	3.41	41.53	54.00	-12.47	AVG			

AMB


Job No.:	011410076E	Polarization:	Vertical
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	802.11b(2437MHz)	Distance:	3m

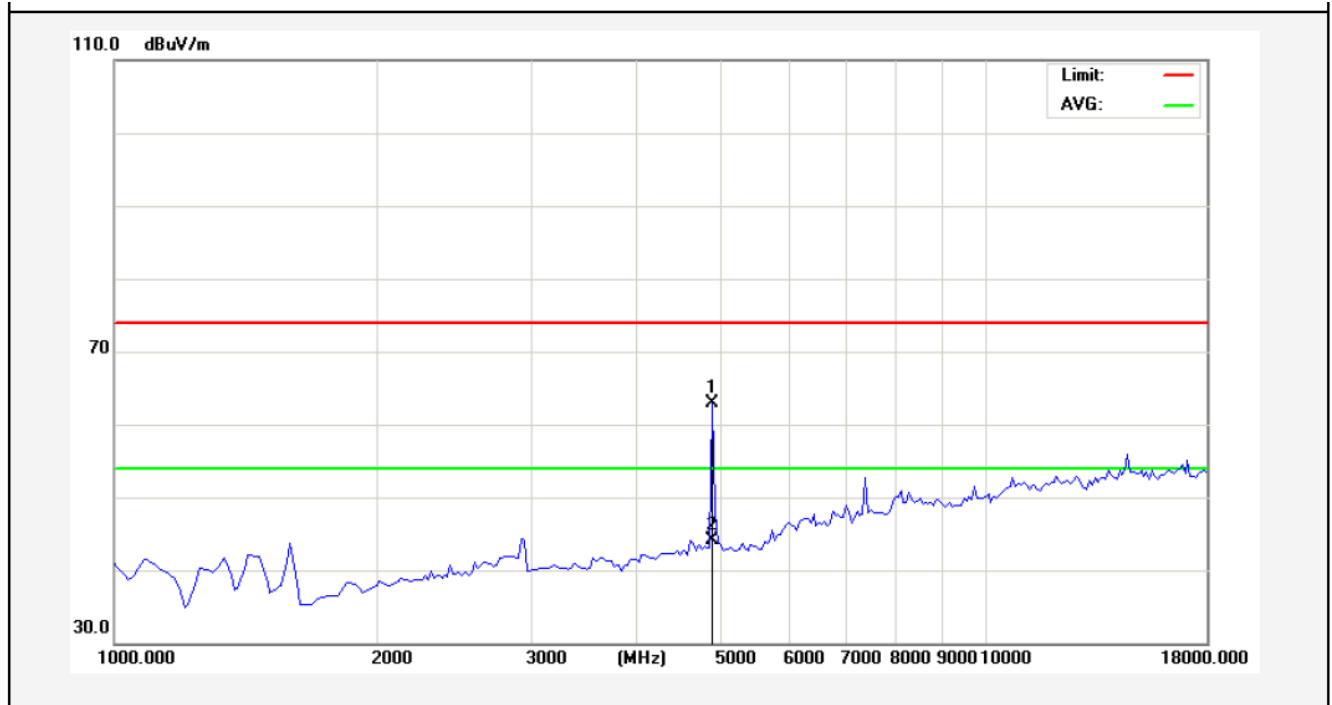

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4867.500	59.59	3.41	63.00	74.00	-11.00	peak			
2	4867.500	40.75	3.41	44.16	54.00	-9.84	AVG			

AMB


Job No.:	011410076E	Polarization:	Horizontal
Standard:	(RE)FCC PART15 C_3m	Power Source:	DC 5V via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	802.11b(2462MHz)	Distance:	3m

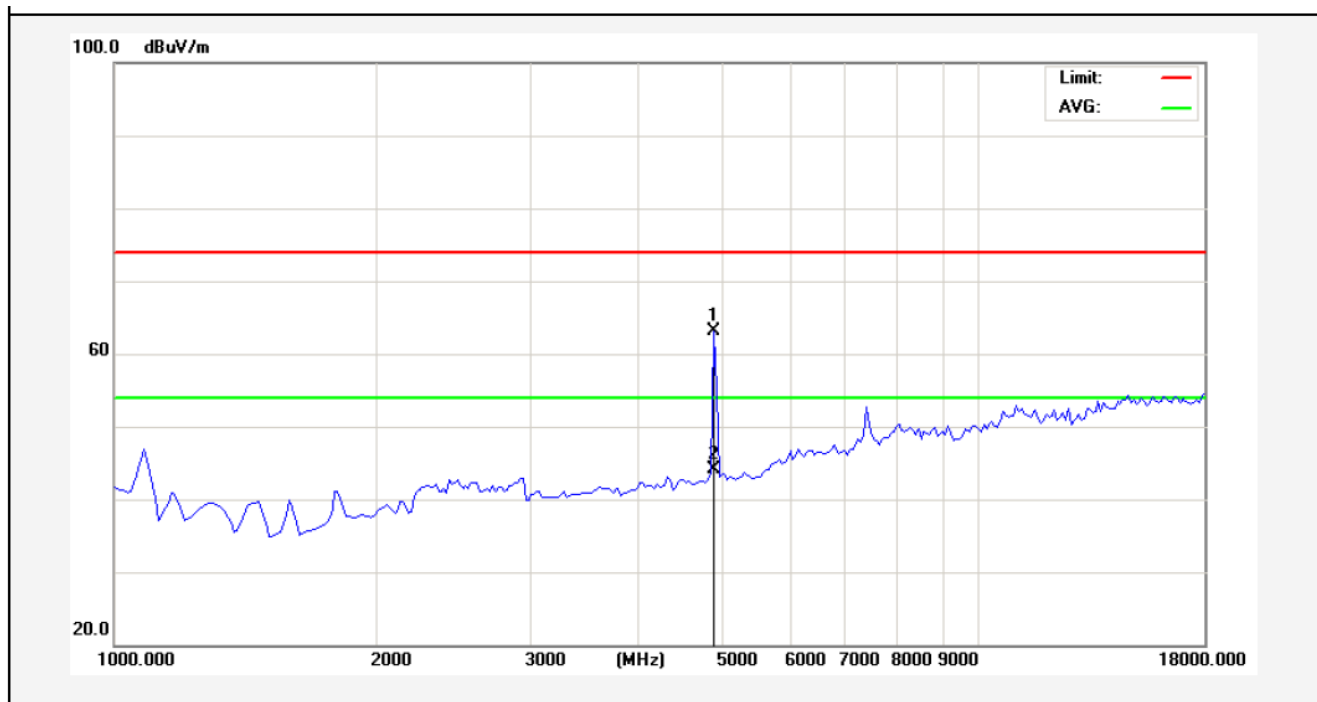

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4910.000	59.54	3.49	63.03	74.00	-10.97	peak			
2	4910.000	40.69	3.49	44.18	54.00	-9.82	AVG			

AMB

Job No.:	011410076E	Polarization:	Vertical
Standard:	(RE)FCC PART15 C _3m	Power Source:	DC 5V via USB Port
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.3(C)/55%RH
Note:	802.11b(2462MHz)	Distance:	3m

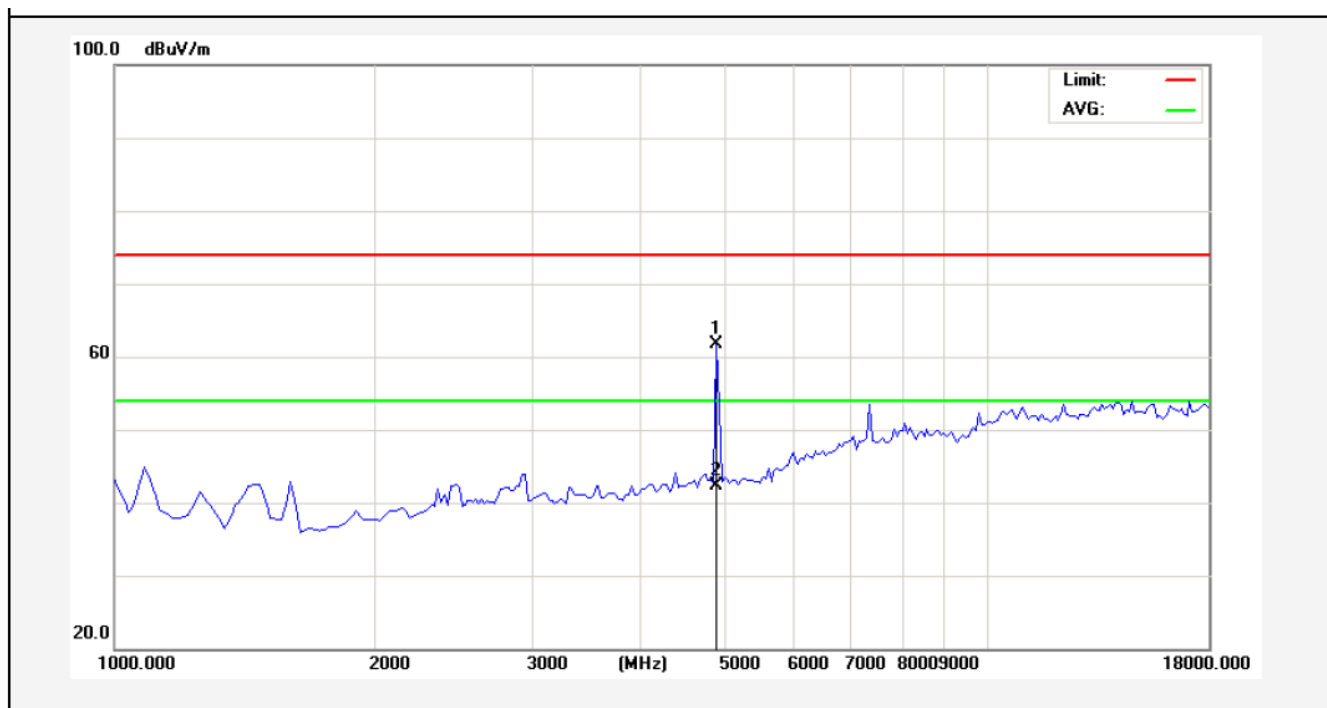

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	4910.000	58.31	3.49	61.80	74.00	-12.20	peak			
2	4910.000	38.89	3.49	42.38	54.00	-11.62	AVG			

AMB

5. PHOTOGRAPH

5.1. Photo of Conducted Emission Measurement



5.2. Photo of Radiation Emission Test





Anbotek

APPENDIX I (EXTERNAL PHOTOS)

Figure 1
The EUT-Front View



Figure 2
The EUT-Back View



Figure 3
The EUT-Top View




Figure 4
The EUT-Bottom View



Figure 5
The EUT-Right View



Figure 6
The EUT-Left View

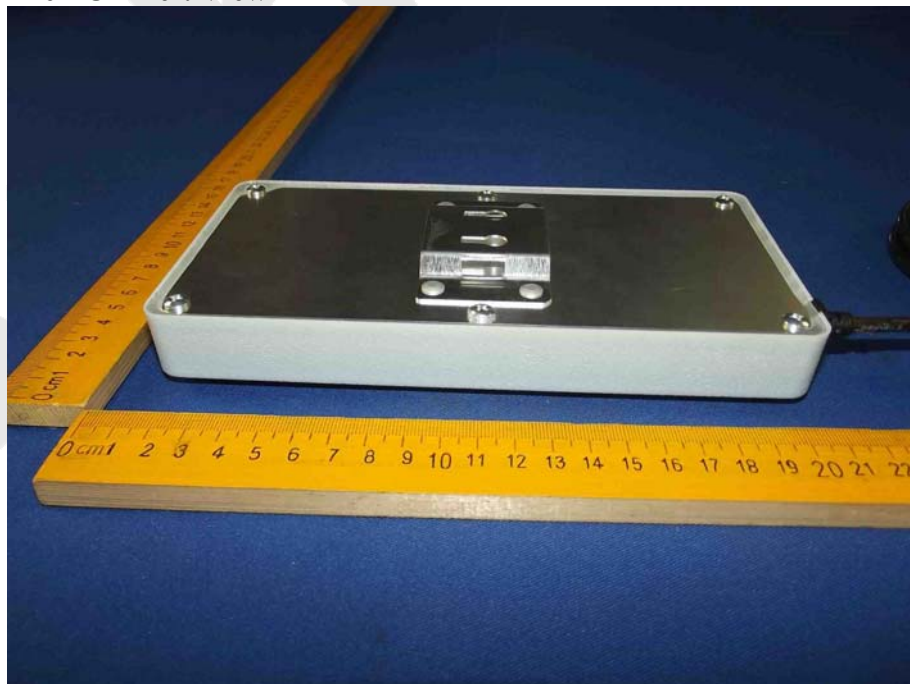

APPENDIX II (INTERNAL PHOTOS)

Figure 7
The EUT-Inside View



Figure 8
PCB of The EUT-Front View (Antenna)

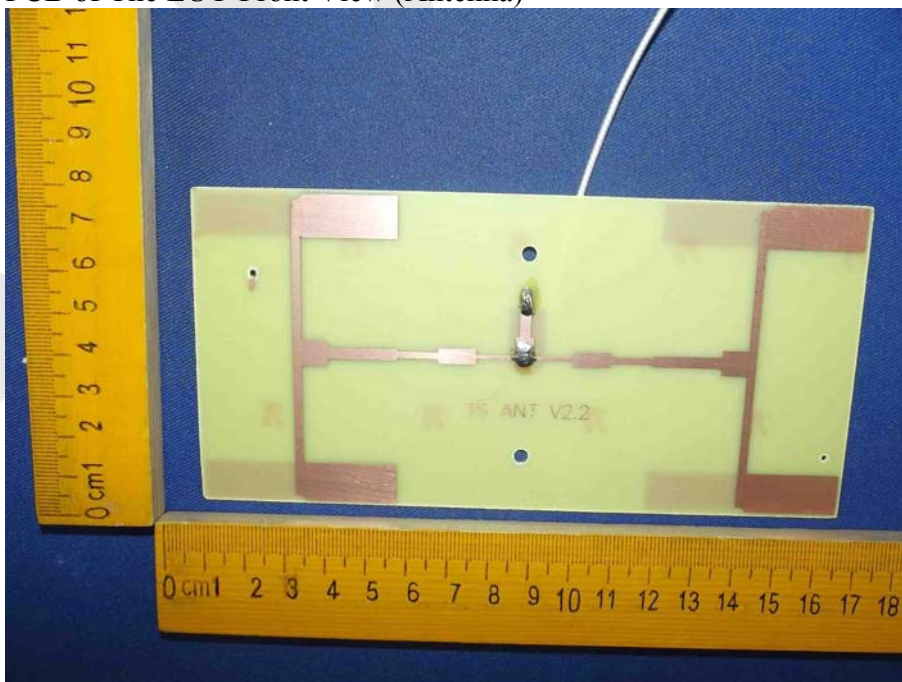


Figure 9
PCB of The EUT-Back View (Antenna)

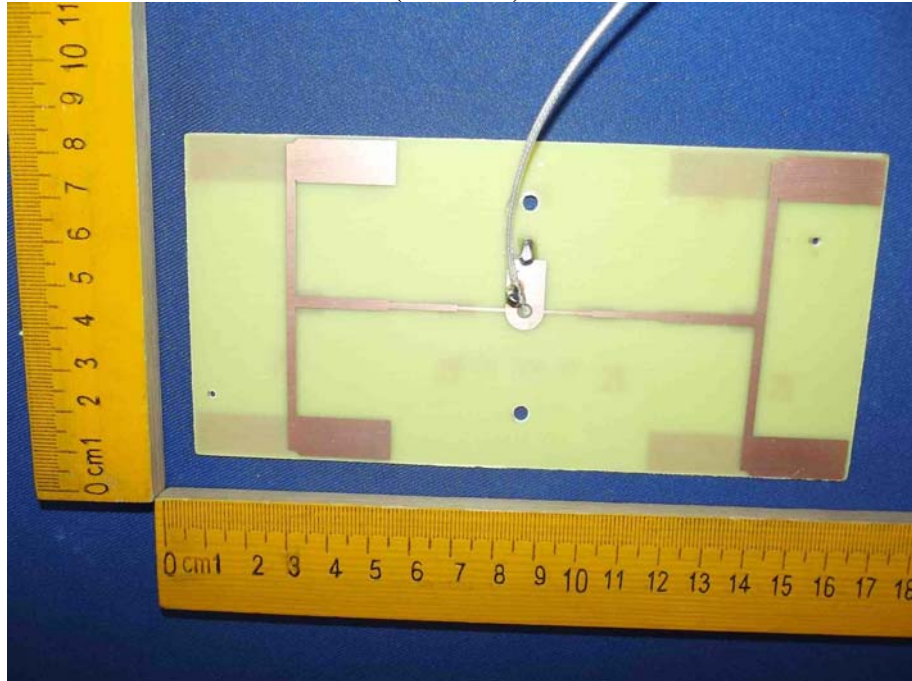


Figure 10
PCB of The EUT-Front View

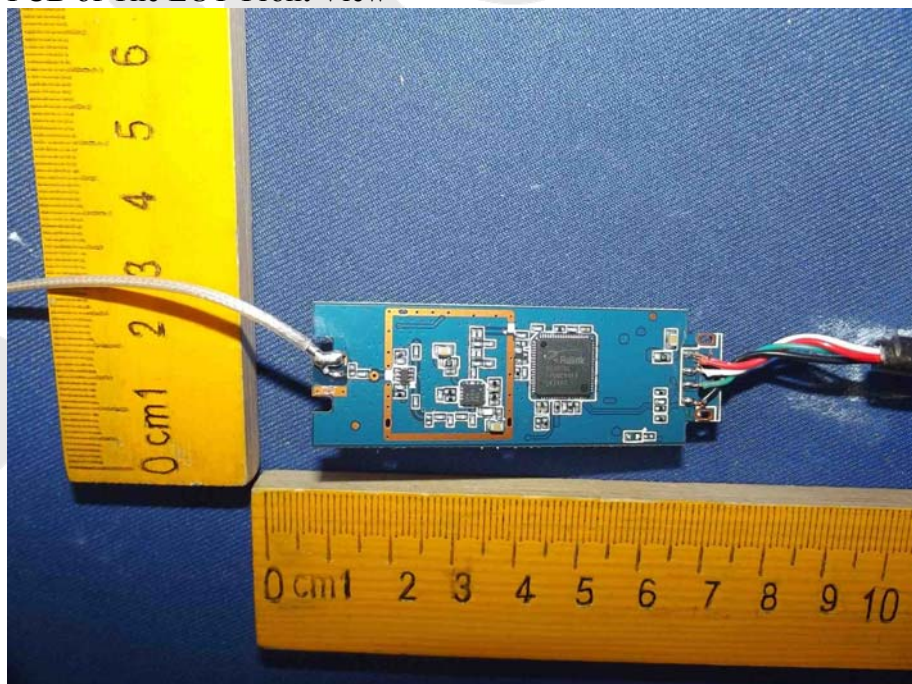


Figure 11
PCB of The EUT-Back View

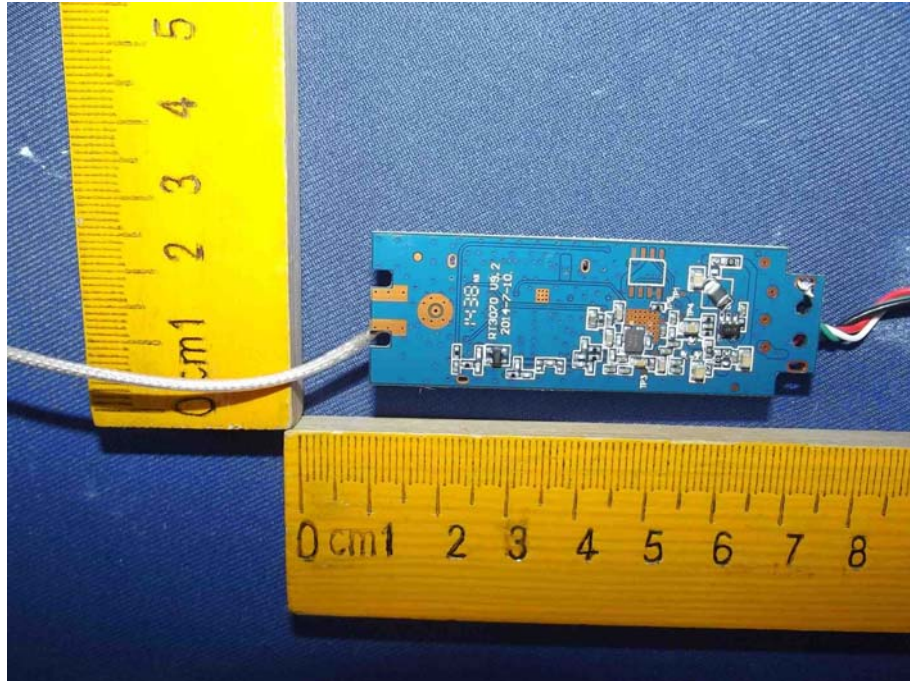


Figure 12
PCB of The Module View

