

7F, 2, Rei Kuang Road, Nei Hu, Taipei, Taiwan, R.O.C.

Tel: (886) 2-8792-1188
Fax: (886) 2-8792-1166

Federal Communications Commission
Authorization and Evaluation Division
7435 Oakland Mills Rd.
Columbia, MD. 21046

Date: Nov. 11, 1999

Attention: Authorization and Evaluation Division

Subject: RFI related modifications incorporated into unit COLOR MONITOR
with - FCC ID: AMPJ71E

Dear Sirs:


This letter serves as our declaration that all modifications listed below were implemented in the sample submitted for testing. We further declare that the same modifications will be implemented into all production units to enhance compliance of the units to FCC limits.

The modifications include the following:

- 1) Added two ferrite cores on the signal cable outside the monitor. (see photo 2)
- 2) Added a metal cover on the rear side of CRT board and it was connected to chassis by nine ground wires. (see photo 4 & 5)
- 3) Added a ferrite core on the double focus wires with one turn. (see photo 7)
- 4) Added a ferrite core on the G2 wire with one turn. (see photo 7)
- 5) Added one bead core on the solder side of the CRT board for EMI. They will be built into component side after circuit re-layout. (see photo 10)

If you have any further questions or comments regarding the above, please don't hesitate to contact Mr. Mike Su of ADT Lab. at fax No.:886-2-2602-2943 or E-mail: mike@mail.adt.com.tw

Sincerely yours,

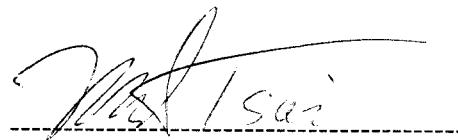

Kent Tsai / Safety Manager
Jean Co., Ltd.

cc. Mr. Harris W. Lai - Advance Data Technology Corporation