

# Test Report

## TEST PROCEDURES AND TEST SITE DESCRIPTION

### MEASUREMENT ITEMS

- 5-1 Field Strength of Spurious Radiated Emission
- 5-2 Power Line Conducted Emissions

### NOTE: Measurements in Scan Mode vs. Non-Scan Mode

-----

The measurement data reported in the original file represented a non-scan mode for both of power line conducted emission and spurious radiated emission because no emission level exceeded that of the levels in the scan mode.

In scan mode, the receiver only stays at a particular frequency for as short as 20 ms in certain channels as the scanning interval may change depending on the number of the memorized channels. This means that true emission levels may change along with the number of the memorized channels in the scanning mode due to changes in the duty cycle of the emission level.

Therefore, we measured the device where each memorized channel was scanned for 3 different points of frequencies in each receiver coverage range as shown in the original file and we confirm that no emission level exceeds the level reported from the ones measured in the non-scan mode.

## 5-1 Field Strength of Spurious Radiated Emission

### Test Procedure:

The measurements were performed in accordance with the ANSI C63.4-1992. Field Strength measurements of radiated spurious emissions were made at the open test site of a 3-meter range maintained by Uniden Corporation in Japan. Complete description and measurement data of this test site have been placed on file with the Commission.

The radio frequency spectrum was scanned in the range of 30 MHz to 6.5 GHz in accordance with the section 15.33(b) of the FCC Rules. The frequency below 1 GHz, the measurement was carried out by using CISPR quasi-peak detector, the Spectrum Analyzer HP E74004A in accordance with the sections 15.33(a) and 15.35(a). The frequency above 1 GHz, using the HP E74004A Spectrum Analyzer in accordance with the section 15.35(b) carried out the measurement.

A bilog antenna CBL6112A was used to cover the range from 30 MHz to 1000 MHz. Narrowband tuned dipole antennas were used over the entire 30 to 1000 MHz ranges for precision measurements of field strength. Above 1000 MHz, a horn antenna was used.

For each spurious or harmonic frequency, the antenna was raised and lowered to obtain a maximum reading on the Spectrum Analyzer with antenna horizontally polarized. Then the turntable, on which the equipment under test was placed, was rotated a minimum of 360 degrees to further increase the reading on the Spectrum Analyzer. This procedure was repeated with the antenna vertically polarized. The unit under test was placed in its normal operating position on a turntable approximately 1 meter in height, with a normal power lead.

In order to convert the measured emission levels into field strength in dBuV/m, the actual field strength ( $E_f$ ) is determined by algebraically adding the measured emission level ( $E_m$ ) and the antenna correction factor (ACF) including the cable loss at the appropriate frequency.

$$E_f \text{ [dBuV/m]} = E_m \text{ [dBuV/m]} + \text{ACF [dB]}$$

FCC Limits:

Frequency	Field Strength at 3 meter
30 - 88 MHz	40 dBuV/m (100 uV/m)
88 - 216 MHz	43.5 dBuV/m (150 uV/m)
216 - 960 MHz	46 dBuV/m (200 uV/m)
Above 960 MHz	54 dBuV/m (500 uV/m)

Test Results: Refer to the attached test reports. All emissions not reported were more than 20 dB below the limits.

5-2 Power Line Conducted Emissions

Test Procedure:

The measurements were performed in accordance with the ANSI C63.4-1992. During the measurements, a standard voltage source is fed into the unit under test through a power line impedance stabilization network.

FCC Limit:

The radio frequency voltage that is conducted back into the AC power line on any frequencies within the band from 450kHz to 30MHz shall not exceed 250uV (48 dBuV).

Test Results: Refer to the attached test reports. All emissions not reported were more than 20 dB below the limits.

## 5-1 Test Result: Field Strength of Radiated Emissions

Tuned Frequency (MHz)	Emission Frequency (MHz)	FSM Reading (dBuV)	Amplifier Gain (dB)	Measured Level (dBuV)	Pol.	ACF (dB)	Field Strength (dBuV/m)	FCC Limit (dBuV/m)	MARGIN (dB)
(1) Test Results (25.000 - 54.000 MHz Band)									
25.005	367.4950	44.5	35.1	9.4	H	19.9	29.3	46.0	16.7
	405.7000	46.4	35.1	11.3	H	20.9	32.2	46.0	13.8
	811.4000	44.8	35.1	9.7	H	27.0	36.7	46.0	9.3
	811.4000	49.3	35.1	14.2	V	27.0	41.2	46.0	4.8
	1469.9800	46.3	35.1	11.2	V	35.2	46.4	54.0	7.6
49.900	367.5000	43.5	35.1	8.4	V	19.9	28.3	46.0	17.7
	430.6000	49.1	35.1	14.0	H	21.5	35.5	46.0	10.5
	430.6000	44.6	35.1	9.5	H	21.5	31.0	46.0	15.0
	861.2000	42.9	35.1	7.8	H	27.4	35.2	46.0	10.8
	1470.0000	45.4	35.1	10.3	H	35.2	45.5	54.0	8.5
(2) Test Results (54.000 - 108.000 MHz Band)									
54.050	369.9500	43.5	35.1	8.4	V	19.9	28.3	46.0	17.7
	434.7000	44.0	35.1	8.9	H	21.8	30.7	46.0	15.3
	869.4000	43.1	35.1	8.0	V	27.4	35.4	46.0	10.6
	1479.8000	44.6	35.1	9.5	V	35.2	44.7	54.0	9.3
72.005	452.7000	44.0	35.1	8.9	H	22.1	31.0	46.0	15.0
	1469.9800	44.5	35.1	9.4	V	35.2	44.6	54.0	9.4
107.900	370.0000	44.2	35.1	9.1	V	19.9	29.0	46.0	17.0
	488.6000	44.5	35.1	9.4	H	23.0	32.4	46.0	13.6
	1480.0000	45.0	35.1	9.9	V	35.2	45.1	54.0	8.9
	1954.4000	42.8	35.1	7.7	H	40.5	48.2	54.0	5.8
	1954.4000	46.0	35.1	10.9	V	40.5	51.4	54.0	2.6
(3) Test Results (108.000 - 137.000 MHz Band)									
118.800	367.5000	43.9	35.1	8.8	H	19.9	28.7	46.0	17.3
	367.5000	45.9	35.1	10.8	V	19.9	30.7	46.0	15.3
	499.5000	45.3	35.1	10.2	H	23.3	33.5	46.0	12.5
	1470.0000	46.2	35.1	11.1	V	35.1	46.2	54.0	7.8
127.175	367.4250	42.7	35.1	7.6	V	19.9	27.5	46.0	18.5
	507.8000	44.8	35.1	9.7	H	23.5	33.2	46.0	12.8
	1469.7000	44.9	35.1	9.8	V	35.1	44.9	54.0	9.1
135.500	367.5000	42.5	35.1	7.4	V	19.9	27.3	46.0	18.7
	516.2000	44.0	35.1	8.9	H	23.8	32.7	46.0	13.3
	516.2000	42.5	35.1	7.4	V	23.8	31.2	46.0	14.8
	1470.0000	45.4	35.1	10.3	V	35.1	45.4	54.0	8.6
(4) Test Results (137.000 - 174.000 MHz Band)									
138.150	367.4500	45.9	35.1	10.8	H	19.9	30.7	46.0	15.3
	367.4500	46.2	35.1	11.1	V	19.9	31.0	46.0	15.0
	518.8000	42.9	35.1	7.8	H	23.8	31.6	46.0	14.4
	518.8000	42.8	35.1	7.7	V	23.8	31.5	46.0	14.5
	1469.8000	45.0	35.1	9.9	V	35.1	45.0	54.0	9.0
162.400	367.5000	46.4	35.1	11.3	H	19.9	31.2	46.0	14.8

	367.5000	46.3	35.1	11.2	V	19.9	31.1	46.0	14.9
	1102.5000	43.4	35.1	8.3	V	32.1	40.4	54.0	13.6
	1470.0000	45.0	35.1	9.9	V	35.1	45.0	54.0	9.0
173.225	367.4750	46.4	35.1	11.3	H	19.9	31.2	46.0	14.8
	367.4750	46.5	35.1	11.4	V	19.9	31.3	46.0	14.7
	734.9500	42.6	35.1	7.5	V	26.2	33.7	46.0	12.3
	1107.8000	42.6	35.1	7.5	V	32.1	39.6	54.0	14.4
	1469.9000	45.2	35.1	10.1	V	35.1	45.2	54.0	8.8
(5) Test Results (174.000 - 311.000 MHz Band)									
197.750	1156.8000	42.6	35.1	7.5	V	32.5	40.0	54.0	14.0
	1479.8000	43.8	35.1	8.7	V	35.2	43.9	54.0	10.1
	1849.7500	42.4	35.1	7.3	V	39.4	46.7	54.0	7.3
216.050	367.4500	43.2	35.1	8.1	V	19.9	28.0	46.0	18.0
	596.7000	43.9	35.1	8.8	H	26.2	35.0	46.0	11.0
	596.7000	43.1	35.1	8.0	V	26.2	34.2	46.0	11.8
	1102.3500	43.2	35.1	8.1	V	32.1	40.2	54.0	13.8
	1193.4000	43.9	35.1	8.8	V	32.8	41.6	54.0	12.4
	1469.8000	45.7	35.1	10.6	V	35.1	45.7	54.0	8.3
310.9500	367.4500	43.5	35.1	8.4	V	19.9	28.3	46.0	17.7
	1469.8000	45.5	35.1	10.4	V	35.1	45.5	54.0	8.5
(6) Test Results (311.000 - 512.000 MHz Band)									
311.0500	565.4000	45.5	35.1	10.4	H	25.3	35.7	46.0	10.3
	565.4000	43.7	35.1	8.6	V	25.3	33.9	46.0	12.1
	802.6500	44.5	35.1	9.4	V	26.8	36.2	46.0	9.8
	1130.8000	43.0	35.1	7.9	V	32.3	40.2	54.0	13.8
	1872.8500	42.3	35.1	7.2	V	39.7	46.9	54.0	7.1
406.875	802.5750	44.8	35.1	9.7	V	26.8	36.5	46.0	9.5
511.9125	766.3000	44.9	35.1	9.8	V	26.4	36.2	46.0	9.8
	802.7625	45.4	35.1	10.3	V	26.8	37.1	46.0	8.9
(7) Test Results (806.000 - 1300.000 MHz Band)									
806.000	425.3000	45.0	35.1	9.9	H	21.4	31.3	46.0	14.7
	850.6000	44.5	35.1	9.4	V	27.3	36.7	46.0	9.3
	1470.000	45.2	35.1	10.1	V	35.1	45.2	54.0	8.8
857.200	476.5000	44.9	35.1	9.8	H	22.8	32.6	46.0	13.4
	476.5000	43.1	35.1	8.0	V	22.8	30.8	46.0	15.2
	1470.0000	45.0	35.1	9.9	V	35.1	45.0	54.0	9.0
	1906.0000	44.3	35.1	9.2	V	40.0	49.2	54.0	4.8
954.9125	1470.0500	46.1	35.1	11.0	V	35.1	46.1	54.0	7.9
1299.9125	919.2000	43.0	35.1	7.9	H	28.6	36.5	46.0	9.5
	1470.0500	46.1	35.1	11.0	V	35.1	46.1	54.0	7.9
	1838.4000	44.5	35.1	9.4	V	39.2	48.6	54.0	5.4


Note: Other emissions not reported were more than 20dB below the FCC limits.

LCE

5-2 Test Result: Power Line Conducted Emissions

Tuned Frequency (MHz)	Emission Frequency (MHz)	Measured Level (dBuV)
49.9000	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
72.0050	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
127.1750	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
162.4000	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
216.0500	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
406.8750	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
857.2000	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
1299.9125	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	

All emissions not reported were more than 20 dB below the limit.  
 (See attached example for 49.90MHz reception.)

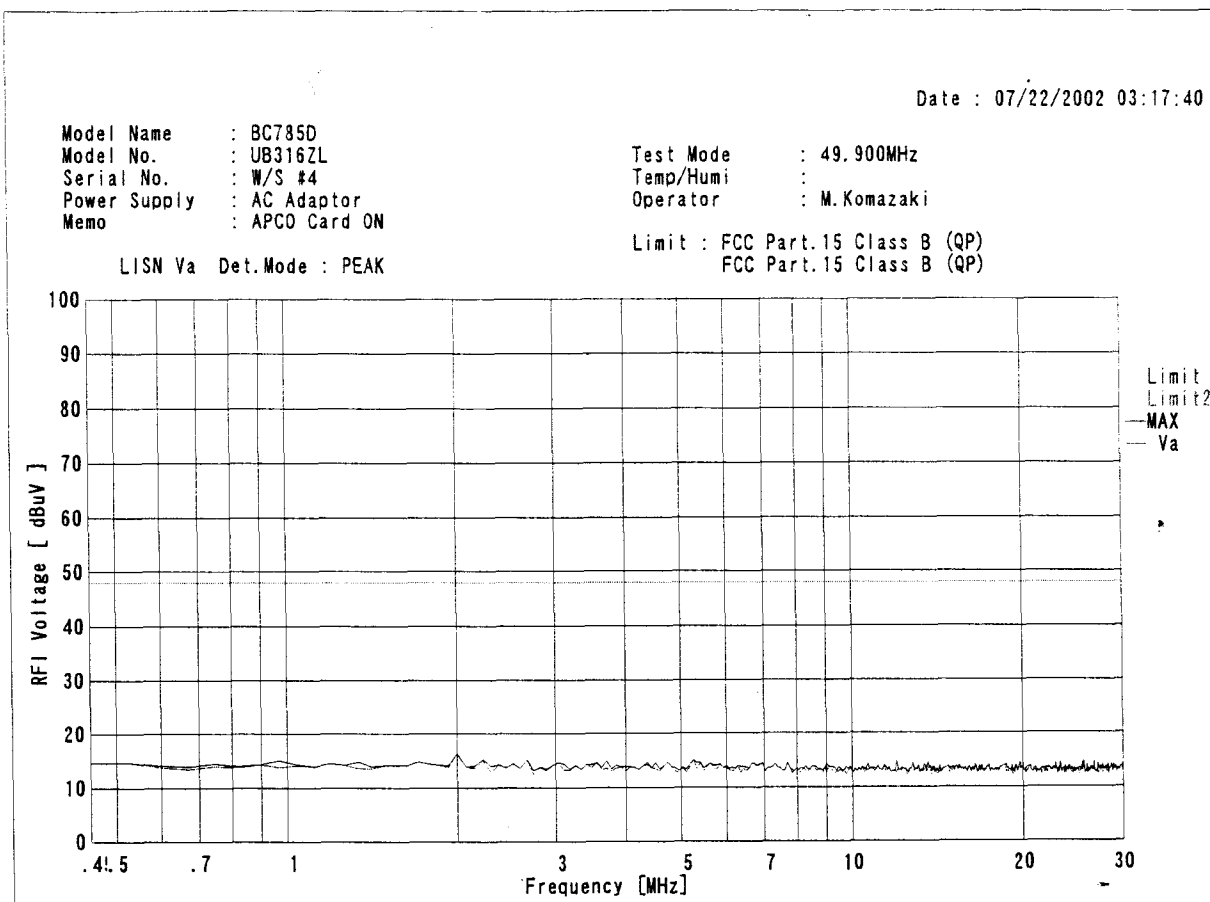


5-3 Test Result: Cellular image rejection

15.121(b)

**Rationale:**

In order for measuring image(spurious) rejection ratio on scanning receiver, use of one SSG method would be suitable rather than two or three SSG method since cellular image reception would be considered as unwanted reception solely at outside of cellular band.

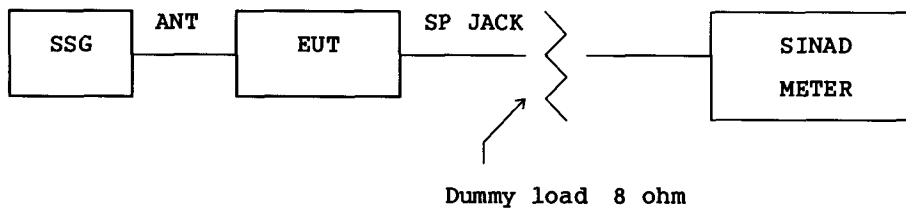**Test set-up:**

Conditions: AF Signal : 1 kHz  
 Deviation : +/- 3kHz (for frequency modulation)  
 Modulation : 60 % (for amplitude modulation)

Test frequencies: 824.01MHz, 836.52MHz, 849.00MHz  
 869.01MHz, 881.52MHz, 894.00MHz

**A) Initial screening**

- A-1) Disable the output signal of SSG. Disconnect dummy load and enable the EUT to confirm the presence of audio noise on speaker.
- A-2) Set the EUT with "Squelched Threshold" to prevent audio signal.
- A-3) Set the frequency of SSG to cellular band, and apply 60dBuV of RF output to EUT. Note that 60dBuV signal level corresponds approx. 66dB above the "Squelched Threshold" sensitivity of -6dBuV (not, receiving sensitivity). This is approx. 28dB (= 66 - 38) above the FCC limit.
- A-4) Enable EUT and search the cellular frequencies on the all of receiving range.
- A-5) List the all of detected frequencies if EUT detects them, and the following steps shall be taken to determine the actual image rejection ratio individually.
- A-6) Repeat the above procedure for remaining frequencies.
- A-7) Go to Part B of the test.

CELL

B) Measuring the image rejection ratio

- B-1) Based on Initial screening, both of EUT and SSG shall be set to the frequency at which obtained in A-5) in the above. Connect the dummy load and set the squelch volume of EUT to unsquelched for obtaining the audio signal.
- B-2) Adjust and record the RF output of SSG to obtain 12dB SINAD on EUT. SSG level at which obtaining the 12dB SINAD is receiving sensitivity of EUT (not, tight squelch sensitivity).
- B-3) Adjust the frequency of SSG to the corresponded cellular frequency associated with A-5. Adjust and record the RF output of SSG to obtain 12dB SINAD on EUT.
- B-4) Image rejection ratio is obtained as differences between B-2) and B-3).

C) Test Data

Spec. : At least 38dB

UB-316Z (BC785D)

Cellular Frequency (MHz)	Image/spurious (Frequency stopped on EUT) (MHz)	Image Rjection Ratio (dB)
824.01	811.2625	43.0
	823.9125	67.0
	849.5125	61.0
	850.4125	42.0
836.52	75.2800	55.0
849.00	340.2000	45.0
869.01	856.2625	47.5
	894.5125	62.2
	895.4125	41.0
881.52	120.2750	43.0
894.00	132.6000	43.0
	385.2000	43.0
	849.8000	60.0
	868.5000	62.0
	894.0625	52.5
	894.1000	67.5
	894.1250	58.0
	894.9000	62.5
	900.6000	64.5
	906.7500	49.0
920.4000	43.0	



LIST OF MEASUREMENT EQUIPMENTS

ENG-NO	TEST EQUIPMENT	TYPE	MFR	SERIAL NO.	Last Calibratation
1287	AMPLIFIER	AFS30010040020	MITEQ	138315	N/A
1294	ANTENNA (BILOG)	CBL6112A	CHASE	2350	N/A
1602	ANTENNA (DIPOLE)	3120-B1	EMCO	0075	16-Jul-00
1603	ANTENNA (DIPOLE)	3120-B2	EMCO	0076	16-Jul-00
1604	ANTENNA (DIPOLE)	3120-B3	EMCO	0076	16-Jul-00
1560	ANTENNA (HORN)	3115	EMCO	2167	N/A
1388	LISN	KNW407	KYOURITSU	8-833-21	N/A
0682	POWER SUPPLY	AA300	TAKASAGO	31783013	N/A
0857	SPECTRUM ANALYZER	E7400A	HP	US40240145	23-Apr-02
0205	SPECTRUM ANALYZER	R3265	ADVANTEST	25060158	N/A