

Test Report

TEST PROCEDURES AND TEST SITE DESCRIPTION

FCC ID: AMWUB326
MODEL: BC246T
DATE: 7-29-04

MEASUREMENT ITEMS

- 5-1 Field Strength of Spurious Radiated Emission
- 5-2 Power Line Conducted Emissions
- 5-3 Cellular image rejection

NOTE: Measurements in Scan Mode vs. Non-Scan Mode

The measurement data reported in the original file represented a non-scan mode for both of power line conducted emission and spurious radiated emission because no emission level exceeded that of the levels in the scan mode.

In scan mode, the receiver only stays at a particular frequency for as short as 20 ms in certain channels as the scanning interval may change depending on the number of the memorized channels. This means that true emission levels may change along with the number of the memorized channels in the scanning mode due to changes in the duty cycle of the emission level.

Therefore, we measured the device where each memorized channel was scanned for 3 different points of frequencies in each receiver coverage range as shown in the original file and we confirm that no emission level exceeds the level reported from the ones measured in the non-scan mode.

5-1 Field Strength of Spurious Radiated Emission

Test procedure:

The measurements were performed in accordance with the ANSI C63.4-1992. Field Strength measurements of radiated spurious emissions were made at the open test site of a 3 meter range maintained by Uniden Corporation in Japan. Complete description and measurement data of this test site have been placed on file with the Commission.

The radio frequency spectrum was scanned in the range of 30 MHz to the 10th harmonic in accordance with the section 15.33(a) of the FCC Rules. The frequency below 1 GHz, the measurement was carried out by using CISPR quasi-peak detector, AGILENT E7400A the Spectrum Analyzer in accordance with the sections 15.33(a) and 15.35(a). The frequency above 1 GHz, using the AGILENT E7400A Spectrum Analyzer in accordance with the section 15.35(b) carried out the measurement.

A bilog antenna CBL6112A was used to cover the range from 30 MHz to 1000 MHz. Narrowband tuned dipole antennas were used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna EMCO 3115 was used.

For each spurious or harmonic frequency, the antenna was raised and lowered to obtain a maximum reading on the Spectrum Analyzer with antenna horizontally polarized. Then the turntable, on which the equipment under test was placed, was rotated a minimum of 360 degrees to further increase the reading on the Spectrum Analyzer.

For testing small and/or handheld product, the measurement was performed in 3 orthogonal planes (X, Y, Z). This procedure was repeated with the antenna vertically polarized. The equipment under test was connected with all of placed in its normal operating position on a turntable approximately 0.8 meter in height.

During the measurement, full-featured accessory cables were connected with the equipment under test.

In order to convert the measured emission levels into field strength in dBuV/m, the actual field strength (E_f) is determined by algebraically adding the measured emission level (E_m) and the antenna correction factor (ACF) including the cable loss at the appropriate frequency. E_f [dBuV/m] = E_m [dBuV/m] + ACF [dB]

$$E_f \text{ [dBuV/m]} = E_m \text{ [dBuV/m]} + \text{ACF [dB]}$$

FCC Limits:

Frequency	Field Strength at 3 meter	
30 - 88 MHz	40 dBuV/m	(100 uV/m)
88 - 216 MHz	43.5 dBuV/m	(150 uV/m)
216 - 960 MHz	46 dBuV/m	(200 uV/m)
Above 960 MHz	54 dBuV/m	(500 uV/m)

Test Results: Refer to the attached test reports. All emissions not reported were more than 20 dB below the limits.

5-2 Power Line Conducted Emissions

Test Procedure:

The measurements were performed in accordance with the ANSI C63.4-1992. During the measurements, a standard voltage source is fed into the unit under test through a power line impedance stabilization network.

FCC Limit:

The radio frequency voltage that is conducted back into the AC power line on any frequencies within the band from 150kHz to 30MHz shall not exceed the following limitation.

REQUIREMENTS:

FREQUENCY(MHz)	LEVEL (dBuV)	
0.150-0.50	66 to 56 QP	56 to 46 Ave
0.50-5.0	56 QP	46 Ave
5.0-30.0	60 QP	50 Ave

Test Results: Refer to the attached test reports. All emissions not reported were more than 20 dB below the limits.

5-3 Cellular image rejection

See test result.

5-1 Test Result: Field Strength of Radiated Emissions

Tuned Frequency (MHz)	Emission Frequency (MHz)	FSM Reading (dBuV)	Amplifier Gain (dB)	Measured Level (dBuV)	Pol.	ACF (dB)	Field Strength (dBuV/m)	FCC Limit (dBuV/m)	MARGIN (dB)
(1) Test Results (25.000 - 54.000 MHz Band)									
25.005	359.3950	46.4	29.2	17.2	V	18.0	35.2	46.0	10.8
	718.7900	43.3	29.1	14.2	H	24.0	38.2	46.0	7.8
40.840	359.3600	46.4	29.2	17.2	V	18.0	35.2	46.0	10.8
	718.7200	43.3	29.1	14.2	H	24.0	38.2	46.0	7.8
	421.5000	40.3	29.2	11.1	V	20.0	31.1	46.0	14.9
49.900	359.4000	46.4	29.2	17.2	V	18.0	35.2	46.0	10.8
	718.8000	38.5	29.1	9.4	H	24.0	33.4	46.0	12.6
(2) Test Results (108.000 - 137.000 MHz Band)									
118.800	359.4000	46.1	29.2	16.9	V	18.0	34.9	46.0	11.1
	718.8000	43.3	29.1	14.2	H	24.0	38.2	46.0	7.8
127.175	359.3250	46.7	29.2	17.5	V	18.0	35.5	46.0	10.5
	718.6500	43.1	29.1	14.0	H	24.0	38.0	46.0	8.0
135.500	359.4000	46.3	29.2	17.1	V	18.0	35.1	46.0	10.9
	718.8000	43.3	29.1	14.2	H	24.0	38.2	46.0	7.8
(3) Test Results (137.000 - 174.000 MHz Band)									
138.150	359.3500	46.6	29.2	17.4	V	18.0	35.4	46.0	10.6
	718.7000	42.7	29.1	13.6	H	24.0	37.6	46.0	8.4
162.400	359.4000	46.4	29.2	17.2	V	18.0	35.2	46.0	10.8
	718.8000	43.2	29.1	14.1	H	24.0	38.1	46.0	7.9
173.225	359.3750	46.8	29.2	17.6	V	18.0	35.6	46.0	10.4
	718.7500	42.8	29.1	13.7	H	24.0	37.7	46.0	8.3
216.050	359.3500	46.9	29.2	17.7	V	18.0	35.7	46.0	10.3
	718.7000	43.1	29.1	14.0	H	24.0	38.0	46.0	8.0
(4) Test Results (406.000 - 512.000 MHz Band)									
406.8750	359.3250	45.9	29.2	16.7	V	18.0	34.7	46.0	11.3
	718.6500	43.3	29.1	14.2	H	24.0	38.2	46.0	7.8
	787.5000	40.6	29.1	11.5	H	25.5	37.0	46.0	9.0
453.2500	359.3500	46.2	29.2	17.0	V	18.0	35.0	46.0	11.0
	718.7000	43.5	29.1	14.4	H	24.0	38.4	46.0	7.6
511.9125	359.3875	46.1	29.2	16.9	V	18.0	34.9	46.0	11.1
	718.7750	43.1	29.1	14.0	H	24.0	38.0	46.0	8.0

(5) Test Results (806.000 - 956.000 MHz Band)									
806.0000	359.4000	45.9	29.2	16.7	V	18.0	34.7	46.0	11.3
	425.3000	41.4	29.2	12.2	V	20.0	32.2	46.0	13.8
	718.8000	41.3	29.1	12.2	H	24.0	36.2	46.0	9.8
857.2000	359.4000	46.2	29.2	17.0	V	18.0	35.0	46.0	11.0
	718.8000	42.3	29.1	13.2	H	24.0	37.2	46.0	8.8
954.9125	359.4125	46.8	29.2	17.6	V	18.0	35.6	46.0	10.4
	718.8250	42.0	29.1	12.9	H	24.0	36.9	46.0	9.1
(6) Test Results (1240.000 - 1300.000 MHz Band)									
1240.000	359.4000	47.1	29.2	17.9	V	18.0	35.9	46.0	10.1
	718.8000	41.7	29.1	12.6	H	24.0	36.6	46.0	9.4
1300.0000	359.4125	46.9	29.2	17.7	V	18.0	35.7	46.0	10.3
	718.8250	41.7	29.1	12.6	H	24.0	36.6	46.0	9.4
	919.2000	42.6	29.0	13.6	V	26.0	39.6	46.0	6.4

Note:

- 1) Other emissions not reported were more than 20dB below the FCC limits.
- 2) During the measurement, full-featured accessory cables (RS232C connector, Earphone and AC adopter) were connected with the equipment under test.


5-3 Test Result: Cellular image rejection

15.121(b)

Rationale:

In order for measuring image(spurious) rejection ratio on scanning receiver, use of one SSG method would be suitable rather than two or three SSG method since cellular image reception would be considered as unwanted reception solely at outside of cellular band.

Test set-up:

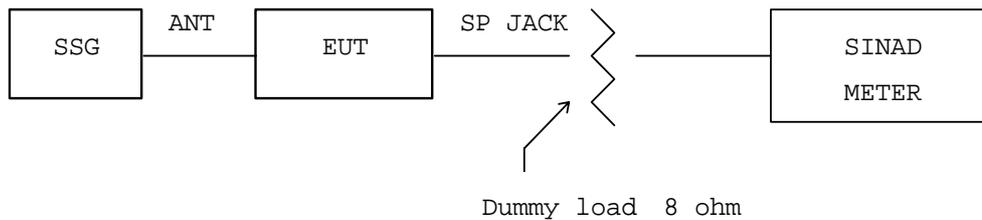

Conditions: AF Signal : 1 kHz
 Deviation : +/- 3kHz (for frequency modulation)
 Modulation : 60 % (for amplitude modulation)

Test frequencies: 824.01MHz, 836.52MHz, 849.00MHz
 869.01MHz, 881.52MHz, 894.00MHz

A) Initial screening

- A-1) Disable the output signal of SSG. Disconnect dummy load and enable the EUT to confirm the presence of audio noise on speaker.
- A-2) Set the EUT with "Squelched Threshold" to prevent audio signal.
- A-3) Set the frequency of SSG to cellular band, and apply 60dBuV of RF output to EUT. Note that 60dBuV signal level corresponds approx. 66dB above the "Squelched Threshold" sensitivity of -6dBuV (not, receiving sensitivity). This is approx. 28dB (= 66 - 38) above the FCC limit.
- A-4) Enable EUT and search the cellular frequencies on the all of receiving range.
- A-5) List the all of detected frequencies if EUT detects them, and the following steps shall be taken to determine the actual image rejection ratio individually.
- A-6) Repeat the above procedure for remaining frequencies.
- A-7) Go to Part B of the test.

CELL

B) Measuring the image rejection ratio

- B-1) Based on Initial screening, both of EUT and SSG shall be set to the frequency at which obtained in A-5) in the above. Connect the dummy load and set the squelch volume of EUT to unsquelched for obtaining the audio signal.
- B-2) Adjust and record the RF output of SSG to obtain 12dB SINAD on EUT. SSG level at which obtaining the 12dB SINAD is receiving sensitivity of EUT (not, tight squelch sensitivity).
- B-3) Adjust the frequency of SSG to the corresponded cellular frequency associated with A-5. Adjust and record the RF output of SSG to obtain 12dB SINAD on EUT.
- B-4) Image rejection ratio is obtained as differences between B-2) and B-3).

C) Test Data

Spec. : At least 38dB

UB326Z (BC246T)


Cellular Frequency (MHz)	Image/spurious (Frequency stopped on EUT) (MHz)	Image Rjection Ratio (dB)
824.01	866.6125	49.0
836.52	Non	
849.00	819.8000	51.0
	929.2000	64.0
	1255.6000	53.0
	1269.8000	53.0
869.01	911.6125	46.0
	1287.7625	41.0
881.52	Non	
894.00	914.2000	64.0
	928.4000	65.0
	936.6000	46.0
	1262.4000	41.0
	1270.6000	58.0
	1284.8000	53.0

5-2 Test Result: Power Line Conducted Emissions

Tuned Frequency (MHz)	Emission Frequency (MHz)	Measured Level (dBuV)
40.8400	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
127.1750	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
162.4000	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
406.8750	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
857.2000	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	

All emissions not reported were more than 20 dB below the limit.

(See attached example for 40.8400MHz reception.)

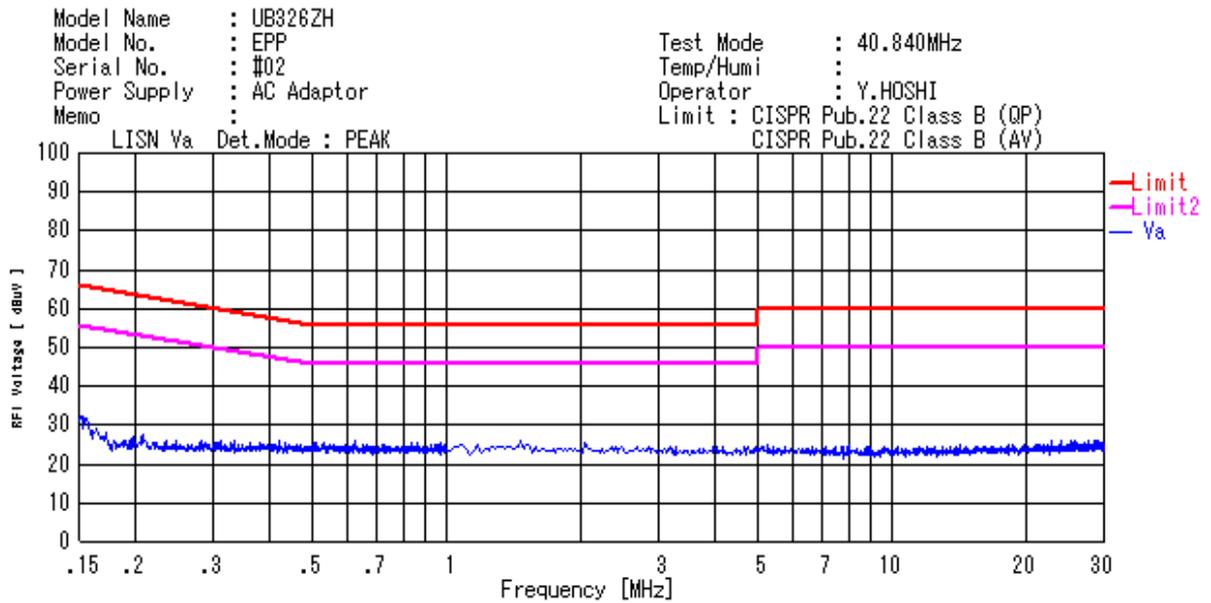

LIST OF MEASUREMENT EQUIPMENTS

ENG-NO	TEST EQUIPMENT	TYPE	MFR	SERIAL NO.	Last Calibratation
1287	AMPLIFIER	AFS30010040020	MITEQ	138315	N/A
2022	MICROWAVE PREAMPLIFIER	8349B	ADVANTEST	3205A04450	N/A
1294	ANTENNA(BILOG)	CBL6112A	CHASE	2350	N/A
1602	ANTENNA(DI POLE)	3120-B1	EMCO	0075	11-Jul-03
1603	ANTENNA(DI POLE)	3120-B2	EMCO	0076	11-Jul-03
1604	ANTENNA(DI POLE)	3120-B3	EMCO	0076	11-Jul-03
1560	ANTENNA(HORN) (18GHz)	3115	EMCO	2167	N/A
N/A	ANTENNA(HORN) (24GHz)	94287.24	NIPPON KOSYUHA	60.1	N/A
1388	LISN	KNW407	KYOURITSU	8-833-21	N/A
0682	POWER SUPPLY	AA300	TAKASAGO	31783013	N/A
0857	SPECTRUM ANALYZER (13GHz)	E7400A	AGILENT	US40240145	27-May-04
0205	SPECTRUM ANALYZER (8.4GHz)	R3265	ADVANTEST	25060158	N/A
1008	SPECTRUM ANALYZER (40GHz)	8564E	ADVANTEST	3425A00182	02-May-04