

# Test Report

## TEST PROCEDURES AND TEST SITE DESCRIPTION

FCC ID: AMWUB354

MODEL: 20-136

DATE: March 7, 2008

Tested by: Mr. Keiichi Kuroki, Uniden Corporation

### MEASUREMENT ITEMS

5-1 Field Strength of Spurious Radiated Emission

5-2 Power Line Conducted Emissions

5-3 Cellular image rejection

NOTE: Measurements in Scan Mode vs. Non-Scan Mode

-----

The measurement data reported in the original file represented a non-scan mode for both of power line conducted emission and spurious radiated emission because no emission level exceeded that of the levels in the scan mode.

In scan mode, the receiver only stays at a particular frequency for as short as 20 ms in certain channels as the scanning interval may change depending on the number of the memorized channels. This means that true emission levels may change along with the number of the memorized channels in the scanning mode due to changes in the duty cycle of the emission level.

Therefore, we measured the device where each memorized channel was scanned for 3 different points of frequencies in each receiver coverage range as shown in the original file and we confirm that no emission level exceeds the level reported from the ones measured in the non-scan mode.

## 5-1 Field Strength of Spurious Radiated Emission

### Test procedure:

The measurements were performed in accordance with the ANSI C63.4-2003. Field Strength measurements of radiated spurious emissions were made at the open test site of a 3 meter range maintained by Uniden Corporation in Japan. Complete description and measurement data of this test site have been placed on file with the Commission.

The radio frequency spectrum was scanned in the range of 30 MHz to the 10th harmonic in accordance with the section 15.33(a) of the FCC Rules. The frequency below 1 GHz, the measurement was carried out by using CISPR quasi-peak detector, AGILENT E7400A the Spectrum Analyzer in accordance with the sections 15.33(a) and 15.35(a). The frequency above 1 GHz, using the AGILENT E7400A Spectrum Analyzer in accordance with the section 15.35(b) carried out the measurement.

A bilog antenna CBL6112A was used to cover the range from 30 MHz to 1000 MHz. Narrowband tuned dipole antennas were used over the entire 30 to 1000 MHz range for precision measurements of field strength. Above 1000 MHz, a horn antenna EMCO 3115 was used.

For each spurious or harmonic frequency, the antenna was raised and lowered to obtain a maximum reading on the Spectrum Analyzer with antenna horizontally polarized. Then the turntable, on which the equipment under test was placed, was rotated a minimum of 360 degrees to further increase the reading on the Spectrum Analyzer.

For testing small and/or handheld product, the measurement was performed in 3 orthogonal planes (X, Y, Z). This procedure was repeated with the antenna vertically polarized. The equipment under test was connected with all of placed in its normal operating position on a turntable approximately 0.8 meter in height.

During the measurement, full-featured accessory cables were connected with the equipment under test.

In order to convert the measured emission levels into field strength in dBuV/m, the actual field strength ( $E_f$ ) is determined by algebraically adding the measured emission level ( $E_m$ ) and the antenna correction factor (ACF) including the cable loss at the appropriate frequency.  $E_f$  [dBuV/m] =  $E_m$  [dBuV/m] + ACF [dB]

$$E_f \text{ [dBuV/m]} = E_m \text{ [dBuV/m]} + \text{ACF [dB]}$$

### FCC Limits:

Frequency	Field Strength at 3 meter
30 - 88 MHz	40 dBuV/m (100 uV/m)

88 - 216 MHz	43.5 dBuV/m	(150 uV/m)
216 - 960 MHz	46 dBuV/m	(200 uV/m)
Above 960 MHz	54 dBuV/m	(500 uV/m)

Test Results: Refer to the attached test reports. All emissions not reported were more than 20 dB below the limits.

## 5-2 Power Line Conducted Emissions

### Test Procedure:

The measurements were performed in accordance with the ANSI C63.4-2003. During the measurements, a standard voltage source is fed into the unit under test through a power line impedance stabilization network.

### FCC Limit:

The radio frequency voltage that is conducted back into the AC power line on any frequencies within the band from 150kHz to 30MHz shall not exceed the following limitation.

### REQUIREMENTS:

FREQUENCY(MHz)	LEVEL (dBuV)	
0.150-0.50	66 to 56 QP	56 to 46 Ave
0.50-5.0	56 QP	46 Ave
5.0-30.0	60 QP	50 Ave

Test Results: Refer to the attached test reports. All emissions not reported were more than 20 dB below the limits.

## 5-3 Cellular image rejection

See test result.

## 5-1 Test Result: Field Strength of Radiated Emissions

Tuned Frequency (MHz)	Emission Frequency (MHz)	FSM Reading (dBuV)	Amplifier Gain (dB)	Measured Level (dBuV)	Pol.	ACF (dB)	Field Strength (dBuV/m)	FCC Limit (dBuV/m)	MARGIN (dB)
(1) Test Results (25.000 - 54.000 MHz Band)									
25.005	507.7250	60.4	35.1	25.3	H	17.3	42.6	46.0	3.4
	507.7250	59.6	35.1	24.5	V	17.3	41.8	46.0	4.2
	763.8250	55.0	35.1	19.9	H	19.3	39.2	46.0	6.8
	763.8250	54.8	35.1	19.7	V	19.3	39.0	46.0	7.0
	1276.0250	55.0	35.1	19.9	H	25.0	44.9	54.0	9.1
40.840	507.7250	58.5	35.1	23.4	H	17.3	40.7	46.0	5.3
	507.7250	59.5	35.1	24.4	V	17.3	41.7	46.0	4.3
	763.8250	55.5	35.1	20.4	H	19.3	39.7	46.0	6.3
	763.8250	54.5	35.1	19.4	V	19.3	38.7	46.0	7.3
	1276.0250	55.5	35.1	20.4	H	25.0	45.4	54.0	8.6
49.900	507.7250	58.3	35.1	23.2	H	17.3	40.5	46.0	5.5
	507.7250	57.3	35.1	22.2	V	17.3	39.5	46.0	6.5
	763.8250	54.7	35.1	19.6	H	19.3	38.9	46.0	7.1
	763.8250	54.2	35.1	19.1	V	19.3	38.4	46.0	7.6
	1276.0250	56.1	35.1	21.0	H	25.0	46.0	54.0	8.0
(2) Test Results (59.000 - 108.000 MHz Band)									
59.750	507.7250	51.2	35.1	16.1	H	24.8	40.9	46.0	5.1
	507.7250	57.3	35.1	22.2	V	18.5	40.7	46.0	5.3
	763.8250	56.6	35.1	21.5	H	18.5	40.0	46.0	6.0
	763.8250	52.1	35.1	17.0	V	21.0	38	46.0	8.0
	1276.0250	58.8	35.1	23.7	H	21.0	44.7	54.0	9.3
81.750	507.7250	58.3	35.1	23.2	H	17.3	40.5	46.0	5.5
	507.7250	58.9	35.1	23.8	V	17.3	41.1	46.0	4.9
	763.8250	55.0	35.1	19.9	H	19.3	39.2	46.0	6.8
	763.8250	53.7	35.1	18.6	V	19.3	37.9	46.0	8.1
	1276.0250	54.7	35.1	19.6	H	25.0	44.6	54.0	9.4
107.900	507.7250	58.0	35.1	22.9	H	17.3	40.2	46.0	5.8
	507.7250	58.9	35.1	23.8	V	17.3	41.1	46.0	4.9
	763.8250	55.3	35.1	20.2	H	19.3	39.5	46.0	6.5
	763.8250	53.7	35.1	18.6	V	19.3	37.9	46.0	8.1
	1276.0250	54.3	35.1	19.2	H	25.0	44.2	54.0	9.8
(3) Test Results (108.000 - 137.000 MHz Band)									
108.500	507.7250	50.8	35.1	15.7	H	24.8	40.5	46.0	5.5
	507.7250	58.0	35.1	22.9	V	18.5	41.4	46.0	4.6
	763.8250	56.6	35.1	21.5	H	18.5	40.0	46.0	6.0
	763.8250	51.5	35.1	16.4	V	21.0	37.4	46.0	8.6
	1276.0250	58.8	35.1	23.7	H	21.0	44.7	54.0	9.3
49.900	507.7250	57.8	35.1	22.7	H	17.3	40.0	46.0	6.0
	507.7250	59.3	35.1	24.2	V	17.3	41.5	46.0	4.5
	763.8250	54.5	35.1	19.4	H	19.3	38.7	46.0	7.3


	763.8250	53.7	35.1	18.6	V	19.3	37.9	46.0	8.1
	1276.0250	54.5	35.1	19.4	H	25.0	44.4	54.0	9.6
49.900	507.7250	57.9	35.1	22.8	H	17.3	40.1	46.0	5.9
	507.7250	59.2	35.1	24.1	V	17.3	41.4	46.0	4.6
	763.8250	55.5	35.1	20.4	H	19.3	39.7	46.0	6.3
	763.8250	53.5	35.1	18.4	V	19.3	37.7	46.0	8.3
	1276.0250	54.6	35.1	19.5	H	25.0	44.5	54.0	9.5
(4) Test Results (137.000 - 216.000 MHz Band)									
138.150	507.7250	50.5	35.1	15.4	H	24.8	40.2	46.0	5.8
	507.7250	57.6	35.1	22.5	V	18.5	41	46.0	5.0
	763.8250	56.0	35.1	20.9	H	18.5	39.4	46.0	6.6
	763.8250	51.8	35.1	16.7	V	21.0	37.7	46.0	8.3
	1276.0250	58.8	35.1	23.7	H	21.0	44.7	54.0	9.3
173.225	507.7250	58.3	35.1	23.2	H	17.3	40.5	46.0	5.5
	507.7250	59.5	35.1	24.4	V	17.3	41.7	46.0	4.3
	763.8250	55.0	35.1	19.9	H	19.3	39.2	46.0	6.8
	763.8250	53.7	35.1	18.6	V	19.3	37.9	46.0	8.1
	1276.0250	55.5	35.1	20.4	H	25.0	45.4	54.0	8.6
215.750	507.7250	58.0	35.1	22.9	H	17.3	40.2	46.0	5.8
	507.7250	59.0	35.1	23.9	V	17.3	41.2	46.0	4.8
	763.8250	55.0	35.1	19.9	H	19.3	39.2	46.0	6.8
	763.8250	53.5	35.1	18.4	V	19.3	37.7	46.0	8.3
	1276.0250	54.6	35.1	19.5	H	25.0	44.5	54.0	9.5
(5) Test Results (380.000 - 512.000 MHz Band)									
380.500	507.7250	50.8	35.1	15.7	H	24.8	40.5	46.0	5.5
	507.7250	57.2	35.1	22.1	V	18.5	40.6	46.0	5.4
	763.8250	56.2	35.1	21.1	H	18.5	39.6	46.0	6.4
	763.8250	52.2	35.1	17.1	V	21.0	38.1	46.0	7.9
	1276.0250	58.8	35.1	23.7	H	21.0	44.7	54.0	9.3
453.250	507.7250	58.5	35.1	23.4	H	17.3	40.7	46.0	5.3
	507.7250	58.8	35.1	23.7	V	17.3	41.0	46.0	5.0
	763.8250	55.7	35.1	20.6	H	19.3	39.9	46.0	6.1
	763.8250	53.8	35.1	18.7	V	19.3	38.0	46.0	8.0
	1276.0250	54.8	35.1	19.7	H	25.0	44.7	54.0	9.3
511.9125	507.7250	58.7	35.1	23.6	H	17.3	40.9	46.0	5.1
	507.7250	58.0	35.1	22.9	V	17.3	40.2	46.0	5.8
	763.8250	55.0	35.1	19.9	H	19.3	39.2	46.0	6.8
	763.8250	53.9	35.1	18.8	V	19.3	38.1	46.0	7.9
	1276.0250	54.8	35.1	19.7	H	25.0	44.7	54.0	9.3

Note: Other emissions not reported were more than 10dB below the FCC limits.

## 5-2 Test Result: Power Line Conducted Emissions

Tuned Frequency (MHz)	Emission Frequency (MHz)	Measured Level (dBuV)
40.8400	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
127.1750	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
162.4000	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
406.8750	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	
857.2000	NO EMISSIONS EXCEED 20dB BELOW THE FCC LIMIT.	

All emissions not reported were more than 20 dB below the limit.  
(See attached example for 40.8400MHz reception.)

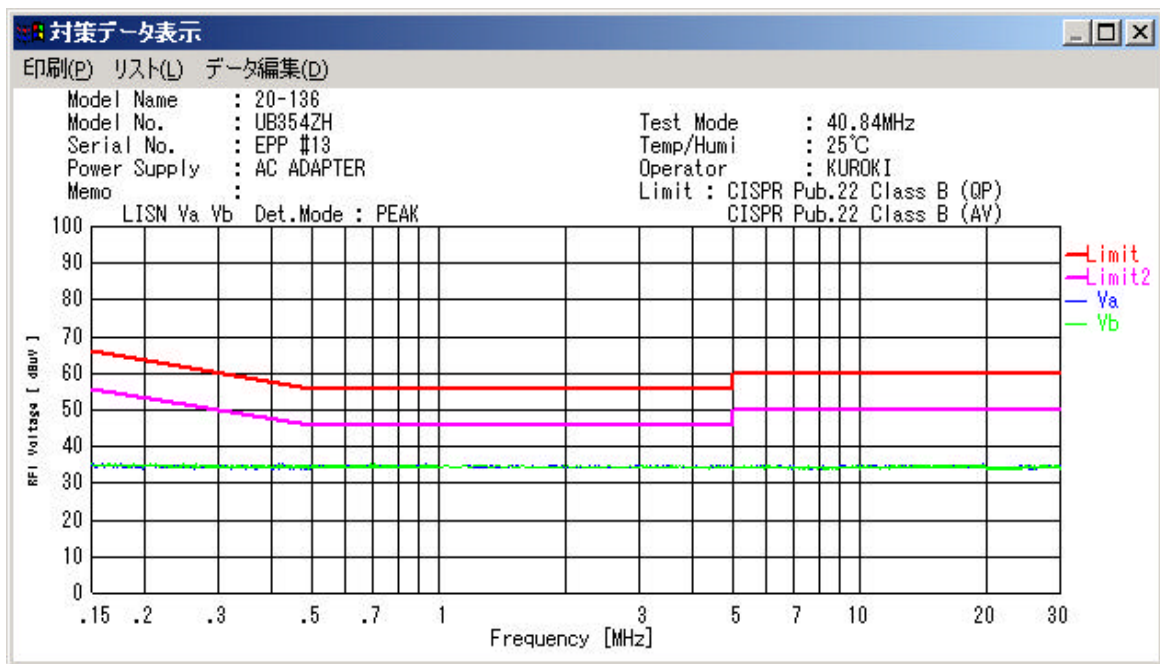


5-3 Test Result: Cellular image rejection

15.121(b)

**Rationale:**

In order for measuring image(spurious) rejection ratio on scanning receiver, use of one SSG method would be suitable rather than two or three SSG method since cellular image reception would be considered as unwanted reception solely at outside of cellular band.

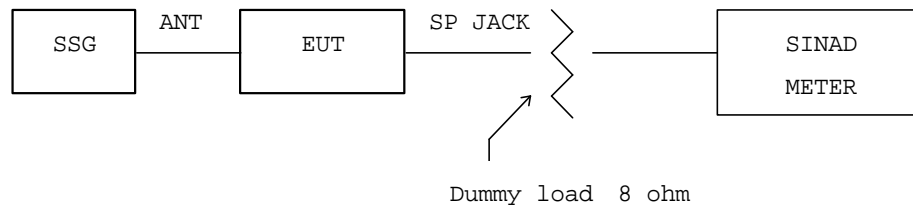**Test set-up:**

Conditions: AF Signal : 1 kHz  
 Deviation : +/- 3kHz (for frequency modulation)  
 Modulation : 60 % (for amplitude modulation)

Test frequencies: 824.01MHz, 836.52MHz, 849.00MHz  
 869.01MHz, 881.52MHz, 894.00MHz

**A) Initial screening**

- A-1) Disable the output signal of SSG. Disconnect dummy load and enable the EUT to confirm the presence of audio noise on speaker.
- A-2) Set the EUT with "Squelched Threshold" to prevent audio signal.
- A-3) Set the frequency of SSG to cellular band, and apply 60dBuV of RF output to EUT. Note that 60dBuV signal level corresponds approx. 66dB above the "Squelched Threshold" sensitivity of -6dBuV (not, receiving sensitivity). This is approx. 28dB (= 66 - 38) above the FCC limit.
- A-4) Enable EUT and search the cellular frequencies on the all of receiving range.
- A-5) List the all of detected frequencies if EUT detects them, and the following steps shall be taken to determine the actual image rejection ratio individually.
- A-6) Repeat the above procedure for remaining frequencies.
- A-7) Go to Part B of the test.

## B) Measuring the image rejection ratio

- B-1) Based on Initial screening, both of EUT and SSG shall be set to the frequency at which obtained in A-5) in the above. Connect the dummy load and set the squelch volume of EUT to unsquelched for obtaining the audio signal.
- B-2) Adjust and record the RF output of SSG to obtain 12dB SINAD on EUT. SSG level at which obtaining the 12dB SINAD is receiving sensitivity of EUT (not, tight squelch sensitivity).
- B-3) Adjust the frequency of SSG to the corresponded cellular frequency associated with A-5. Adjust and record the RF output of SSG to obtain 12dB SINAD on EUT.
- B-4) Image rejection ratio is obtained as differences between B-2) and B-3).

## C) Test Data

Spec. : At least 38dB

UB354Z (20-136)

Cellular Frequency (MHz)	Image/spurious (Frequency stopped on EUT) (MHz)	Image Rjection Ratio (dB)
824.01	Non	
836.52	Non	
849.00	Non	
869.01	Non	
881.52	112.6125	51.0
894.00	Non	



LIST OF MEASUREMENT EQUIPMENTS

ENG-NO	TEST EQUIPMENT	TYPE	MFR	SERIAL NO.	Last Calibratation
1287	AMPLIFIER	AFS30010040020	MITEQ	138315	N/A
2022	MICROWAVE PREAMPLIFIER	8349B	ADVANTEST	3205A04450	N/A
EABF-020	PREAMPLIFIER (45MHz-50GHz)	83051A	AGILENT	MY39500405	N/A
1294	ANTENNA(BILOG)	CBL6112A	CHASE	2350	N/A
1602	ANTENNA(DIPOLE)	3120-B1	EMCO	0075	21-Jun-07
1603	ANTENNA(DIPOLE)	3120-B2	EMCO	0076	21-Jun-07
1604	ANTENNA(DIPOLE)	3120-B3	EMCO	0076	21-Jun-07
1560	ANTENNA(HORN) (1-18GHz)	3115	EMCO	2167	N/A
EABF-012	ANTENNA(HORN) (18-40GHz)	3116	EMCO	00033925	N/A
1388	LISN	KNW407	KYOURITSU	8-833-21	11-Jul-07
0682	POWER SUPPLY	AA300	TAKASAGO	31783013	N/A
0857	SPECTRUM ANALYZER (13GHz)	E7400A	AGILENT	US40240145	03-Jul-07
1008	SPECTRUM ANALYZER (40GHz)	8564E	ADVANTEST	3425A00182	20-May-07