

| | | | | |
|---|-----------------------|------------------------|--------------------------|---|
|  Celltech Testing and Engineering Services Ltd. | Date(s) of Evaluation | Test Report Serial No. | Test Report Revision No. |  IAC-MRA ACCREDITED |
| | December 10, 2007 | 120407AMW-T878-S15T | Revision 1.0 | |
| Test Report Issue Date | December 14, 2007 | Description of Test(s) | RF Exposure Category | Certificate No. 2470.01 |

| SAR TEST REPORT | | | | |
|-----------------------------|---|--------------------------|---------------------------------------|-------------------------|
| RF EXPOSURE EVALUATION | | SPECIFIC ABSORPTION RATE | | |
| APPLICANT | UNIDEN AMERICA CORPORATION | | | |
| PRODUCT | PORTABLE 1.9 GHz UPCS/LE-PCS DECT HANDSET | | | |
| MODEL(S) | DECT3080 | | | |
| IDENTIFIER(S) | FCC ID: | AMWUC518R | IC: | 513C-UC518 |
| APPLICATION TYPE | Certification | | | |
| STANDARD(S) APPLIED | FCC 47 CFR §2.1093 | | | |
| | Health Canada Safety Code 6 | | | |
| PROCEDURE(S) APPLIED | FCC OET Bulletin 65, Supplement C (01-01) | | | |
| | Industry Canada RSS-102 Issue 2 | | | |
| | IEEE 1528-2003 | | | |
| FCC DEVICE CLASSIFICATION | Part 15 Unlicensed PCS Portable Transmitter held to ear (PUE) | | | 47 CFR §15(D) |
| IC DEVICE CLASSIFICATION | 2 GHz Licence Exempt Personal Communications Service Device (PCS) | | | RSS-213 Issue 2 |
| RF EXPOSURE CATEGORY | General Population / Uncontrolled | | | |
| RF EXPOSURE EVALUATION(S) | Ear-held & Body-worn | | | |
| DATE(S) OF EVALUATION(S) | December 10, 2007 | | | |
| TEST REPORT SERIAL NO. | 120407AMW-T878-S15T | | | |
| TEST REPORT REVISION NO.(S) | Revision 1.0 (Initial Release) | | | |
| TEST REPORT ISSUE DATE | December 14, 2007 | | | |
| TEST REPORT SIGNATORIES | Testing Performed By | | Test Report Prepared By | |
| | Sean Johnston Celltech Labs Inc. | | Jonathan Hughes Celltech Labs Inc. | |
| TEST LAB AND LOCATION | Celltech Compliance Testing and Engineering Lab | | | |
| | 21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada | | | |
| TEST LAB CONTACT INFO. | Tel.: 250-765-7650 | | Fax: 250-765-7645 | |
| | info@celltechlabs.com | | www.celltechlabs.com | |
| TEST LAB ACCREDITATION(S) |  IAC-MRA ACCREDITED | | | Certificate No. 2470.01 |

| | | | | | | |
|-------------------------|--|-----------|-----------------------------------|-------------------------|------------|---|
| Company: | Uniden America Corporation | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPCS/LE-PCS DECT Handset | 1921.536 - 1928.448 MHz | | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | Page 1 of 44 | | |



Date(s) of Evaluation

December 10, 2007

Test Report Serial No.

120407AMW-T878-S15T

Test Report Revision No.

Revision 1.0

Test Report Issue Date

December 14, 2007

RF Exposure Category

General Population



ACCREDITED

Certificate No. 2470.01

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

| | | | | | | | |
|------------------------------|---|---|---|--------------------|---------------|--|--|
| Test Lab Information | | Name | CELLTECH LABS INC. | | | | |
| | | Address | 21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada | | | | |
| Applicant Information | | Name | UNIDEN AMERICA CORPORATION | | | | |
| | | Address | Engineering Services Office - 181 N. Country Club Road, Lake City, SC 29560 United States | | | | |
| Standard(s) Applied | | FCC | 47 CFR §2.1093 | | | | |
| | | IC | Health Canada Safety Code 6 | | | | |
| Procedure(s) Applied | | FCC | OET Bulletin 65, Supplement C (01-01) | | | | |
| | | IC | RSS-102 Issue 2 | | | | |
| | | IEEE | 1528-2003 | | | | |
| Device RF Exposure Category | Portable | General Population / Uncontrolled Environment | | | | | |
| Device Classification(s) | FCC | Part 15 Unlicensed PCS portable Tx held to ear (PUE) | | | 47 CFR §15(D) | | |
| | IC | 2 GHz Licence Exempt Personal Communications Service Device (PCS) | | RSS-213 Issue 2 | | | |
| Device Identifier(s) | FCC ID: | | | AMWUC518R | | | |
| | IC: | 513C-UC518 | | | | | |
| | Model(s) | DECT3080 | | | | | |
| | Serial No. | PORT2 (Identical Prototype) | | | | | |
| Device Description | Portable 1.9 GHz UPCS/LE-PCS DECT Handset | | | | | | |
| Application Type | Certification | | | | | | |
| Transmit Frequency Range(s) | 1921.536 - 1928.448 MHz | | | | | | |
| Mode(s) of Operation | TDMA/TDD | | | | | | |
| Modulation Type(s) | FSK (Frequency Shift Keying) | | | | | | |
| Max. RF Output Power Tested | 18.8 dBm | 75.9 mW | EIRP | 1924.992 MHz | | | |
| Source-Based Time-Averaged | 4.82 dBm | 3.04 mW | EIRP | 1924.992 MHz | | | |
| Maximum Duty Cycle Tested | 4 % | Source-Based Time-Averaged | | Crest Factor: 1:25 | | | |
| Antenna Type(s) Tested | Internal | | | | | | |
| Battery Type(s) Tested | Ni-MH | 2.4V | 650mAh | Model: BT-1011 | | | |
| Body-Worn Accessories Tested | Plastic Belt-Clip | | Part No.: n/a (supplied with handset) | | | | |
| Audio Accessories Tested | Generic Ear-Microphone | | Part No.: n/a | | | | |
| Max. SAR Level(s) Evaluated | Head | 0.063 W/kg | 1g average | ANSI/IEEE Limit | 1.6 W/kg | | |
| | Body | 0.024 W/kg | 1g average | ANSI/IEEE Limit | | | |
| | | | 1.6 W/kg | 1g average | | | |

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device was compliant with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the General Population / Uncontrolled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 2 and IEEE Standard 1528-2003. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

Test Report Approved By

Sean Johnston

Celltech Labs Inc.



| | | | | | | | |
|-------------------------|--|--|--------------|-----------------------------------|-----|-------------------------|--|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 | |
| Model(s): | DECT3080 | | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | Page 2 of 44 | | | | |



Date(s) of Evaluation
December 10, 2007

Test Report Serial No.
120407AMW-T878-S15T

Test Report Revision No.
Revision 1.0

Test Report Issue Date
December 14, 2007

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
General Population



Certificate No. 2470.01

TABLE OF CONTENTS

| | |
|--|----|
| 1.0 INTRODUCTION | 4 |
| 2.0 SAR MEASUREMENT SYSTEM | 4 |
| 3.0 MEASUREMENT SUMMARY | 5 |
| MEASUREMENT SUMMARY (CONT.) | 6 |
| 4.0 DETAILS OF SAR EVALUATION | 7 |
| DETAILS OF SAR EVALUATION (CONT.) | 8 |
| 5.0 EVALUATION PROCEDURES | 8 |
| EVALUATION PROCEDURES (CONT.) | 9 |
| 6.0 SYSTEM PERFORMANCE CHECK | 10 |
| 7.0 SIMULATED EQUIVALENT TISSUES | 11 |
| 8.0 SAR SAFETY LIMITS | 11 |
| 9.0 ROBOT SYSTEM SPECIFICATIONS | 12 |
| 10.0 PROBE SPECIFICATION (EX3DV4) | 13 |
| 11.0 SAM PHANTOM V4.0C | 13 |
| 12.0 DEVICE HOLDER | 13 |
| 13.0 TEST EQUIPMENT LIST | 14 |
| 14.0 MEASUREMENT UNCERTAINTIES | 15 |
| MEASUREMENT UNCERTAINTIES (CONT.) | 16 |
| 15.0 REFERENCES | 17 |
| APPENDIX A - SAR MEASUREMENT DATA | 18 |
| APPENDIX B - SYSTEM PERFORMANCE CHECK DATA | 27 |
| APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS | 30 |
| APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS | 33 |
| APPENDIX E - SYSTEM VALIDATION | 42 |
| APPENDIX F - PROBE CALIBRATION | 43 |
| APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY | 44 |

| | | | | | | | |
|-------------------------|--|-----------|------------------------------------|-------------------------|--------------|------------|--|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 | |
| Model(s): | DECT3080 | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | 1921.536 - 1928.448 MHz | | | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 3 of 44 | | |


| | | | | |
|---|--|---|---|---|
|  Celltech Testing and Engineering Services Ltd. | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

1.0 INTRODUCTION

This measurement report demonstrates that the Uniden America Corporation Model(s): DECT3080 Portable 1.9 GHz UPCS/LE-PCS DECT Handset complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]), IC RSS-102 Issue 2 (see reference [4]), and IEEE Standard 1528-2003 (see reference [5]) were employed. A description of the product, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

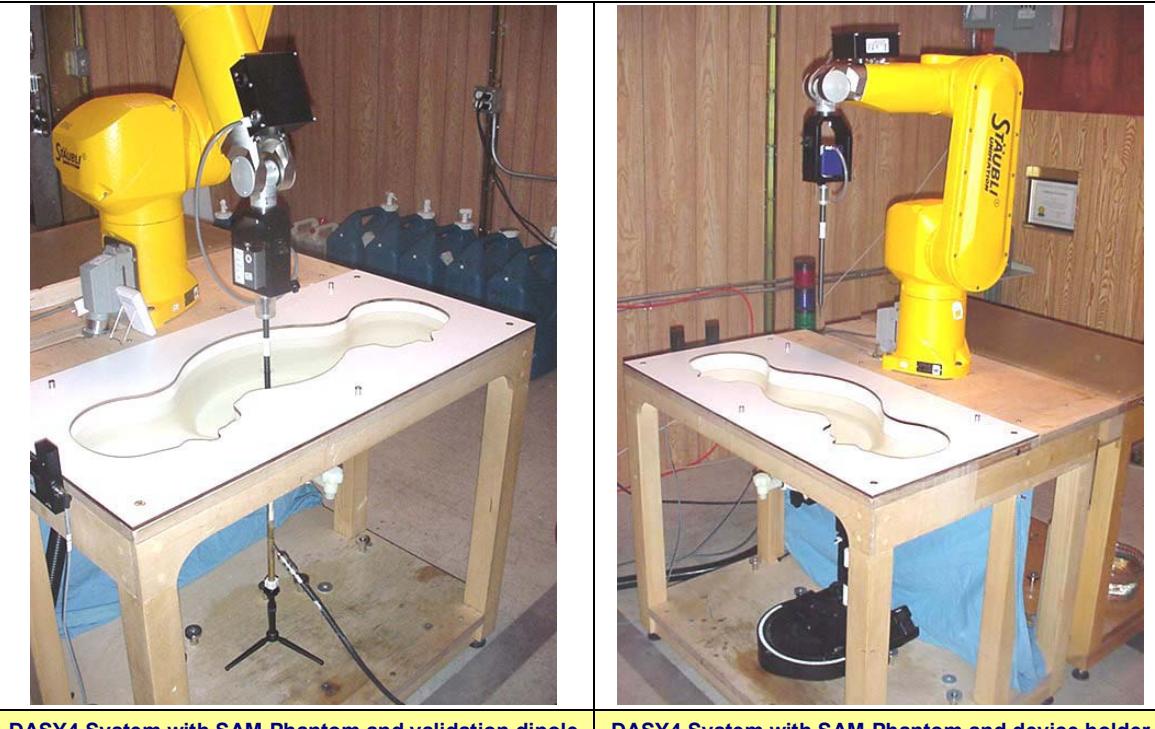

DASY4 System with SAM Phantom and validation dipole

DASY4 System with SAM Phantom and device holder

| | | | | | | | |
|-------------------------|--|--|------------------|--|--------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 4 of 44 | | |

| | | | | |
|---|--------------------------|------------------------|--------------------------|---|
|  Celltech Testing and Engineering Services Ltd. | Date(s) of Evaluation | Test Report Serial No. | Test Report Revision No. |  IAC-MRA ACCREDITED |
| | December 10, 2007 | 120407AMW-T878-S15T | Revision 1.0 | |
| Test Report Issue Date | Description of Test(s) | RF Exposure Category | | |
| December 14, 2007 | Specific Absorption Rate | General Population | | Certificate No. 2470.01 |

3.0 MEASUREMENT SUMMARY

| HEAD SAR EVALUATION RESULTS | | | | | | | | | | | | | | | | | | | | |
|---------------------------------------|-------------|-------------------|---|---|-----------------------------|----------------------|----------------|--|-------|-----------------------|-------------------|--|--|--|--|--|--|--|--|--|
| Freq. MHz | Chan. | Test Mode | Duty Cycle | Crest Factor | Battery Type | Phantom Section | Test Position | Reference RF Output Power (mW) | | SAR Drift During Test | Measured SAR (1g) | | | | | | | | | |
| | | | | | | | | EIRP | SBTA | | | | | | | | | | | |
| 1924.992 | 3 | TDMA/TDD | 4% | 1:25 | Ni-MH | Right Ear | Cheek/Touch | 75.9 | 3.04 | 0.088 | 0.055 | | | | | | | | | |
| 1924.992 | 3 | TDMA/TDD | 4% | 1:25 | Ni-MH | Right Ear | Ear/Tilt (15°) | 75.9 | 3.04 | 0.166 | 0.029 | | | | | | | | | |
| 1924.992 | 3 | TDMA/TDD | 4% | 1:25 | Ni-MH | Left Ear | Cheek/Touch | 75.9 | 3.04 | 0.184 | 0.063 | | | | | | | | | |
| 1924.992 | 3 | TDMA/TDD | 4% | 1:25 | Ni-MH | Left Ear | Ear/Tilt (15°) | 75.9 | 3.04 | 0.193 | 0.040 | | | | | | | | | |
| ANSI / IEEE C95.1:2005 - SAFETY LIMIT | | | | BRAIN: 1.6 W/kg (averaged over 1 gram) | | | | Spatial Peak Uncontrolled Exposure / General Population | | | | | | | | | | | | |
| Date(s) of Evaluation | | December 10, 2007 | | | | Relative Humidity | | | 35 | % | | | | | | | | | | |
| Measured Fluid Type | | 1920 MHz Brain | | | | Atmospheric Pressure | | | 101.1 | kPa | | | | | | | | | | |
| Dielectric Constant ϵ_r | IEEE Target | | Measured | Deviation | Ambient Temperature | | | 24.5 | °C | | | | | | | | | | | |
| | 40.0 | ± 5% | 39.7 | -0.7% | Fluid Temperature | | | 23.3 | °C | | | | | | | | | | | |
| Conductivity σ (mho/m) | IEEE Target | | Measured | Deviation | Fluid Depth | | | ≥ 15 | cm | | | | | | | | | | | |
| | 1.40 | ± 5% | 1.46 | +4.3% | ρ (Kg/m ³) | | | 1000 | | | | | | | | | | | | |
| Notes | | 1. | The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A. | | | | | | | | | | | | | | | | | |
| | | 2. | The transmission band of the DUT is less than 10 MHz; therefore mid channel data only is reported (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]). | | | | | | | | | | | | | | | | | |
| | | 3. | The power drifts of the DUT measured by the DASY4 system during the SAR evaluations were within +/- 5% of the start power. | | | | | | | | | | | | | | | | | |
| | | 4. | The DUT battery was fully charged prior to the SAR evaluations. | | | | | | | | | | | | | | | | | |
| | | 5. | The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within +/- 2°C of the fluid temperature reported during the dielectric parameter measurements. | | | | | | | | | | | | | | | | | |
| | | 6. | The dielectric parameters of the simulated tissue mixture were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C). | | | | | | | | | | | | | | | | | |
| | | 7. | The SAR evaluations were performed within 24 hours of the system performance check. | | | | | | | | | | | | | | | | | |

| | | | | | | | |
|-------------------------|--|-----------|-----------------------------------|-------------------------|--------------|------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPCS/LE-PCS DECT Handset | 1921.536 - 1928.448 MHz | | | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 5 of 44 | | |



Date(s) of Evaluation
December 10, 2007

Test Report Serial No.
120407AMW-T878-S15T

Test Report Revision No.
Revision 1.0

Test Report Issue Date
December 14, 2007

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
General Population



Certificate No. 2470.01

MEASUREMENT SUMMARY (CONT.)

BODY SAR EVALUATION RESULTS

| Freq. MHz | Chan. | Test Mode | Duty Cycle | Crest Factor | Battery Type | Phantom Section | Accessories | | | Reference RF Output Power (mW) | | SAR Drift During Test | Measured SAR (1g) | | | | | |
|--|--------------------|---|----------------------|--|---|--------------------|-----------------------------|---------|--|--------------------------------------|-----------|--------------------------------|----------------------|--|--|--|--|--|
| | | | | | | | Body-Wom | Spacing | Audio | EIRP | SBTA | | | | | | | |
| 1924.992 | 3 | TDMA/TDD | 4% | 1:25 | Ni-MH | Planar | Belt-Clip | 0.7 cm | Ear-Mic | 75.9 | 3.04 | 0.190 | 0.024 | | | | | |
| ANSI/IEEE C95.1: 2005 - SAFETY LIMIT | | | | BODY: 1.6 W/kg (averaged over 1 gram) | | | | | Spatial Peak Uncontrolled Exposure / General Population | | | | | | | | | |
| Test Date(s) | | | December 10, 2007 | | | | Relative Humidity | | | 35 | | % | | | | | | |
| Measured Fluid Type | | | 1920 MHz Body | | | | Atmospheric Pressure | | | 101.1 | | kPa | | | | | | |
| Dielectric Constant ϵ_r | IEEE Target | | Measured | Deviation | Ambient Temperature | | | 24.0 | | | °C | | | | | | | |
| | 53.3 | $\pm 5\%$ | 51.6 | -3.2% | Fluid Temperature | | | 23.1 | | | °C | | | | | | | |
| Conductivity σ (mho/m) | IEEE Target | | Measured | Deviation | Fluid Depth | | | > 15 | | | cm | | | | | | | |
| | 1.52 | $\pm 5\%$ | 1.57 | +3.3% | ρ (Kg/m³) | | | 1000 | | | | | | | | | | |
| Note(s) | 1. | The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A. | | | | | | | | | | | | | | | | |
| | 2. | The transmission band of the DUT is less than 10 MHz; therefore mid channel data only is reported (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]). | | | | | | | | | | | | | | | | |
| | 3. | The power drift of the DUT measured by the DASY4 system during the SAR evaluation was within +/- 5% of the start power. | | | | | | | | | | | | | | | | |
| | 4. | The DUT battery was fully charged prior to the SAR evaluation. | | | | | | | | | | | | | | | | |
| | 5. | The fluid temperature was measured prior to and after the SAR evaluation to ensure the temperature remained within +/- 2°C of the fluid temperature reported during the dielectric parameter measurements. | | | | | | | | | | | | | | | | |
| | 6. | The dielectric parameters of the simulated tissue mixture were measured prior to the SAR evaluation using a Dielectric Probe Kit and a Network Analyzer (see Appendix C). | | | | | | | | | | | | | | | | |
| | 7. | The SAR evaluation was performed within 24 hours of the system performance check. | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | |
|-------------------------|--|--|------------------|--|------------------|--|--------------------------------|-------------------|--|--|--|
| Company: | Uniden America Corporation | | | FCC ID: | AMWUC518R | | IC: | 513C-UC518 | | | |
| Model(s): | DECT3080 | | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | | 1921.536 - 1928.448 MHz | | | | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | | | Page 6 of 44 | | | |

4.0 DETAILS OF SAR EVALUATION

The Uniden America Corporation Model(s): DECT3080 Portable 1.9 GHz UPCS/LE-PCS DECT Handset was compliant for localized Specific Absorption Rate (Uncontrolled Exposure) based on the test provisions and conditions described below. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A. The detailed test setup photographs are shown in Appendix D.

Ear-held Configuration(s)

- 1) The DUT was tested in an ear-held configuration on both the left and right sections of the SAM phantom at the mid channel of the operating band. If the transmission band of the DUT is less than 10 MHz then mid channel data only was reported (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).
- a) The handset was placed in the device holder in a normal operating position with the test device reference point located along the vertical centerline on the front of the device aligned to the ear reference point, with the center of the earpiece touching the center of the ear spacer of the SAM phantom.
- b) With the handset positioned parallel to the cheek, the test device reference point was aligned to the ear reference point on the head phantom, and the vertical centerline was aligned to the phantom reference plane (initial ear position).
- c) While maintaining the three alignments, the body of the handset was gradually adjusted to each of the following test positions:
 - Cheek/Touch Position: the handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom.

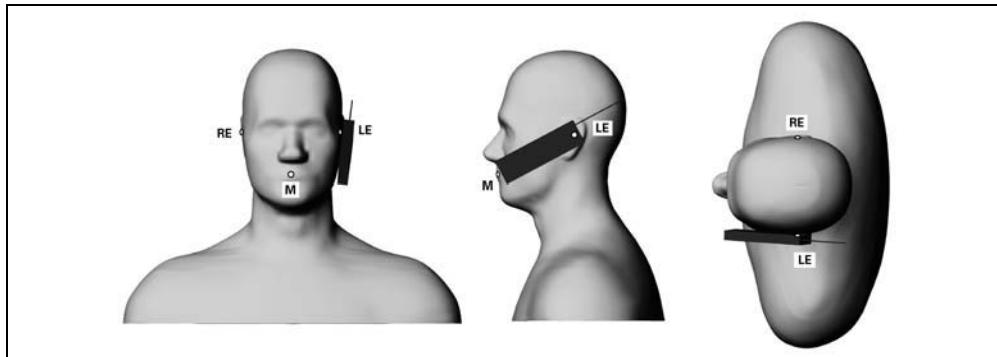


Figure 1. Position 1, "cheek" or "touch" position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for device positioning, are indicated (Shoulders are shown for illustration only).

- Ear/Tilt Position: With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees.

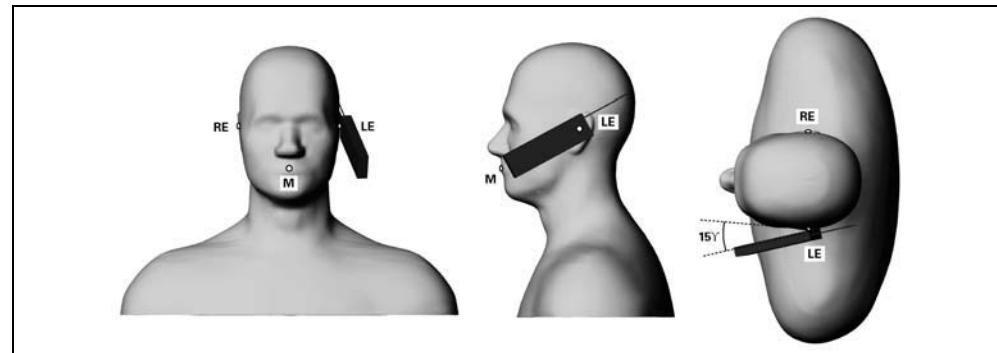


Figure 2. Position 2, "tilted position." The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for device positioning, are indicated (Shoulders are shown for illustration only).

| | | | | | | | |
|-------------------------|--|-----------|-----------------------------------|-----------|-------------------------|------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 7 of 44 | | |

| | | | | |
|--|--|---|---|---|
|  Celltech Testing and Engineering Services Lab | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

DETAILS OF SAR EVALUATION (Cont.)

Body-worn Configuration(s)

- 2) The DUT was tested in a body-worn configuration with the back of the handset placed parallel to the outer surface of the SAM phantom (planar section). The attached belt-clip accessory was touching the outer surface of the SAM phantom (planar section) and provided a 0.7 cm spacing from the back of the handset to the SAM phantom (planar section). A generic ear-microphone audio accessory was connected to the DUT for the duration of the SAR evaluation.

Test Mode(s) & Power Level(s)

- 3) The DUT was placed in test mode using internal test software provided by the handset manufacturer and programmed via the handset keypad.
- 4) The DUT was tested at maximum power and source-based time-averaged duty cycle (4%) with a modulated TDMA signal (crest factor = 1:25).
- 5) The RF conducted output power of the DUT could not be measured due to an internal antenna. The DUT was evaluated for SAR at the maximum RF conducted output power level preset by the manufacturer.
- 6) The output power (EIRP) of the DUT referenced in this report was measured at Celltech Labs' 3-meter Open Area Test Site using the signal substitution method in accordance with ANSI/TIA-603-C-2004 (see reference [7]).
- 7) The DUT battery was fully charged prior to the SAR evaluations.
- 8) The power drift of the DUT during the SAR evaluations was measured by the DASY4 system.

Test Conditions

- 9) The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within +/-2°C of the fluid temperature reported during the dielectric parameter measurements.
- 10) The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
- 11) The SAR measurements were performed within 24 hours of the system performance check.

5.0 EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to determine the values between the dipole center of the probe and the surface of the phantom. This data cannot be measured because the center of the dipole sensors is 1.0 mm away from the probe tip and the distance between the probe and the boundary must be larger than 25% of the probe diameter. The probe diameter is 2.4 mm. In the DASY4 software, the distance between the sensor center and phantom surface is set to 2.0 mm. This provides a distance of 1.0 mm between the probe tip and the surface. The extrapolation of the values between the dipole center and the surface of the phantom was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5x5x7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7x7x7 points) to ensure complete capture of the peak spatial-average SAR.

| | | | | | | | |
|-------------------------|--|--|------------------|---|------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | Page 8 of 44 | | | | |

EVALUATION PROCEDURES (Cont.)

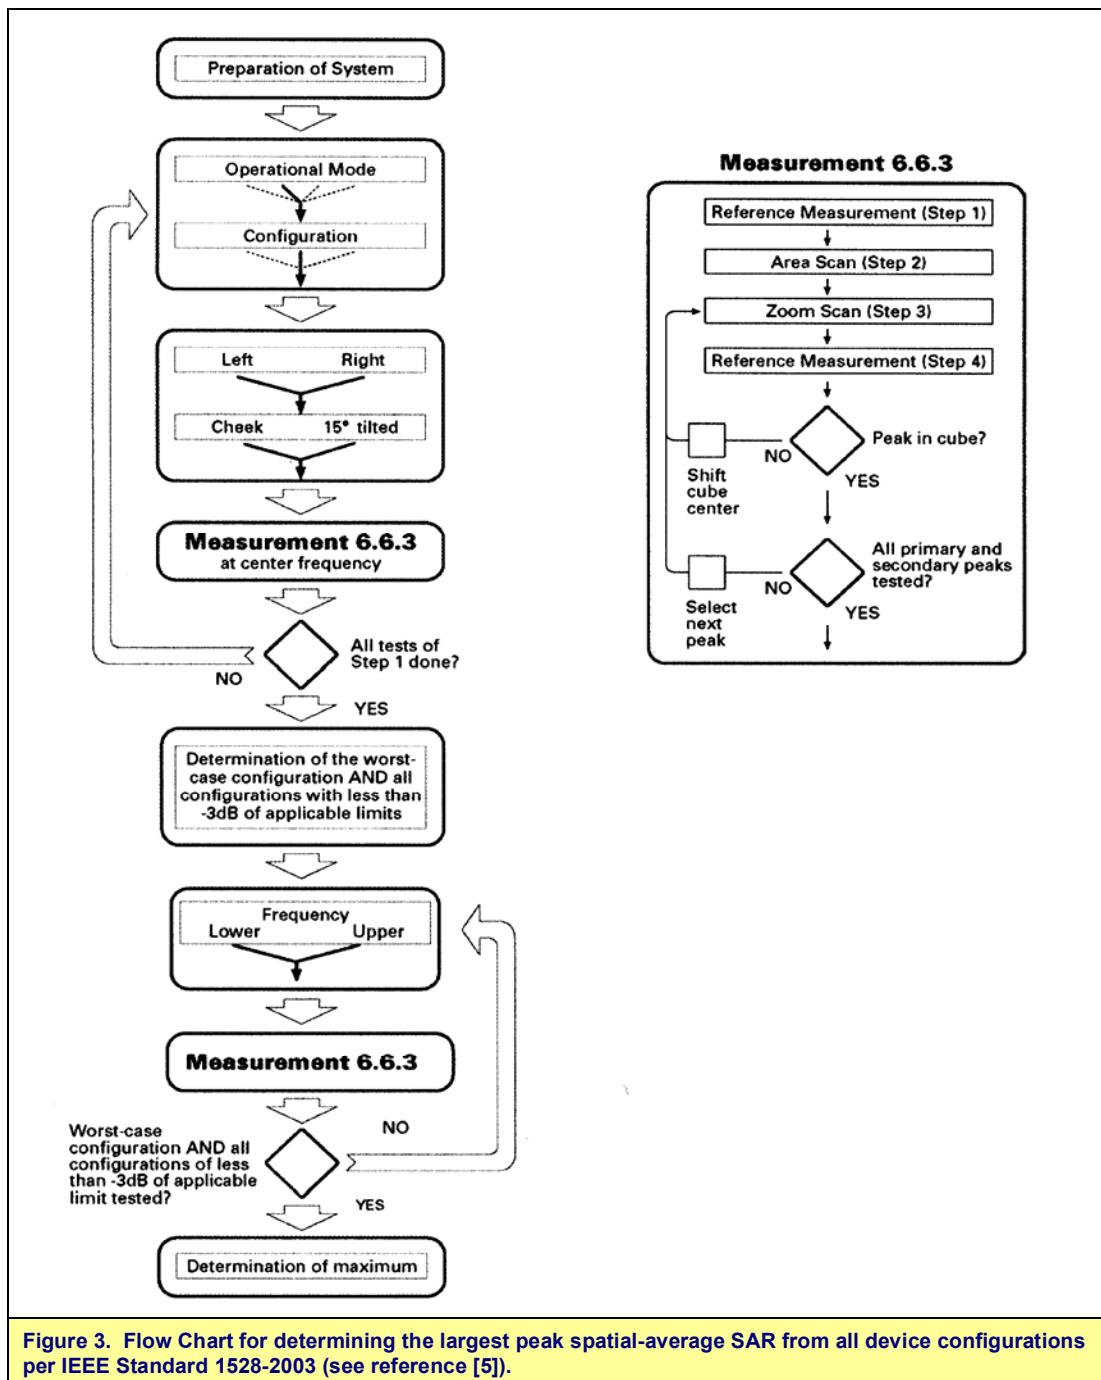



Figure 3. Flow Chart for determining the largest peak spatial-average SAR from all device configurations per IEEE Standard 1528-2003 (see reference [5]).

6.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a system check was performed at the planar section of the SAM phantom with a 1900MHz dipole (see Appendix B for system performance check test plot). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the system validation target SAR value (see Appendix E for system validation procedures).

SYSTEM PERFORMANCE CHECK EVALUATION

| Test Date | Equiv. Tissue | SAR 1g (W/kg) | | | Dielectric Constant ϵ_r | | | Conductivity σ (mho/m) | | | ρ (Kg/m ³) | Amb. Temp. (°C) | Fluid Temp. (°C) | Fluid Depth (cm) | Humid. (%) | Barom. Press. (kPa) |
|--|---------------|----------------|------------------|-------|----------------------------------|------------------|-------|-------------------------------|------------------|-------|-----------------------------|-----------------|------------------|------------------|------------|---------------------|
| | | Freq. (MHz) | Sys. Val. Target | Meas. | Dev. | Sys. Val. Target | Meas. | Dev. | Sys. Val. Target | Meas. | Dev. | | | | | |
| Dec 10 | Brain 1900 | 10.8 \pm 10% | 10.1 | -6.5% | 38.4 \pm 5% | 39.7 | +3.4% | 1.41 \pm 5% | 1.43 | +1.5% | 1000 | 24.5 | 23.3 | ≥ 15 | 35 | 101.1 |
| Note(s) | | | | | | | | | | | | | | | | |
| <ol style="list-style-type: none"> 1. The target SAR value is referenced from the System Validation procedure performed by Celltech Labs Inc. (see Appendix E). 2. The target dielectric parameters are referenced from the System Validation procedure performed by Celltech Labs Inc. (see Appendix E). 3. The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within $+/-2^{\circ}\text{C}$ of the fluid temperature reported during the dielectric parameter measurements. 4. The SAR evaluations were performed within 24 hours of the system performance check. | | | | | | | | | | | | | | | | |

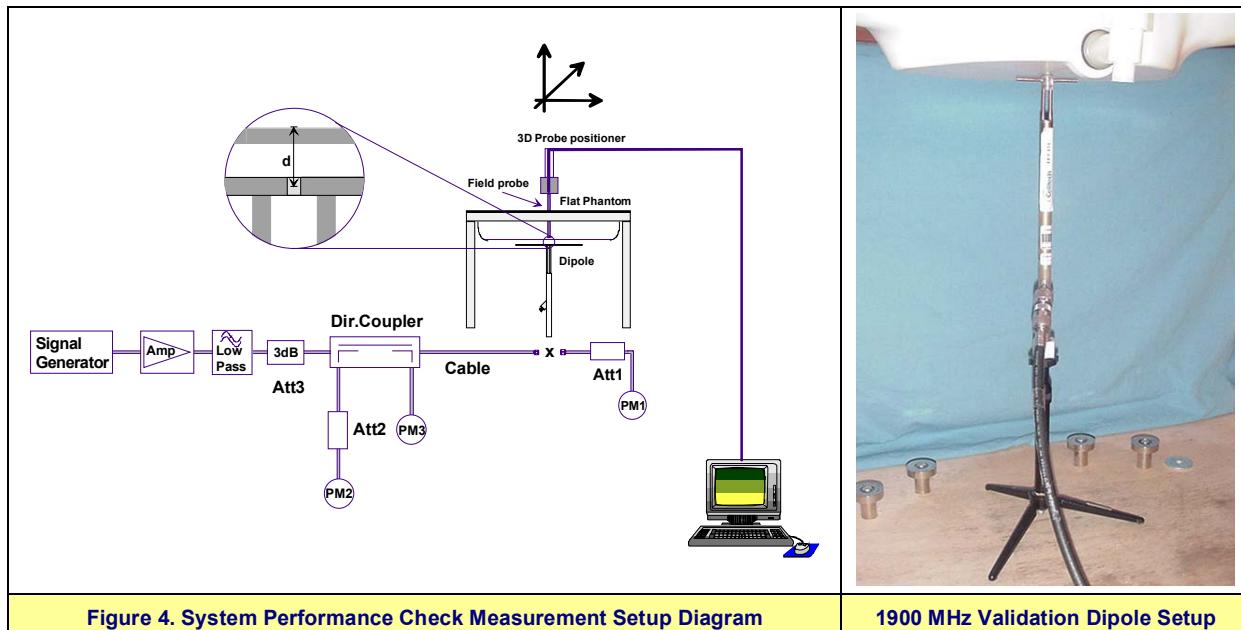

| | | | | | | | | | |
|-------------------------|----------------------------|--|--|-----------|-----------------------------------|--|-------------------------|------------|--|
| Company: | Uniden America Corporation | | | FCC ID: | AMWUC518R | | IC: | 513C-UC518 | |
| Model(s): | DECT3080 | | | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | | |
| 2007 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | | | |

| | | | | |
|--|--|---|---|---|
|  Celltech <small>Testing and Engineering Services Ltd.</small> | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA <small>ACCREDITED</small> |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

7.0 SIMULATED EQUIVALENT TISSUES

The 1900/1920MHz simulated equivalent tissue mixture consisted of Glycol-monobutyl, water and salt. The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

| 1900/1920 MHz SIMULATED TISSUE MIXTURES | | | |
|---|--------------------------|----------------|----------------|
| INGREDIENT | 1900 MHz Brain | 1920 MHz Brain | 1920 MHz Body |
| | System Performance Check | DUT Evaluation | DUT Evaluation |
| Water | 55.85 % | 55.85 % | 69.85 % |
| Glycol Monobutyl | 44.00 % | 44.00 % | 29.89 % |
| Salt | 0.15 % | 0.15 % | 0.26 % |

8.0 SAR SAFETY LIMITS

| EXPOSURE LIMITS | SAR (W/kg) | |
|--|--|--|
| | (General Population / Uncontrolled Exposure Environment) | (Occupational / Controlled Exposure Environment) |
| Spatial Average (averaged over the whole body) | 0.08 | 0.4 |
| Spatial Peak (averaged over any 1 g of tissue) | 1.6 | 8.0 |
| Spatial Peak (hands/wrists/feet/ankles averaged over 10 g) | 4.0 | 20.0 |
| The Spatial Average value of the SAR averaged over the whole body. | | |
| The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time. | | |
| The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time. | | |
| Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure. | | |
| Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure. | | |

| | | | | | | | |
|-------------------------|--|--|---------------|-----------------------------------|-----|-------------------------|--|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  Uniden |
| Model(s): | DECT3080 | | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | Page 11 of 44 | | | | |

| | | | | |
|--|-----------------------|------------------------|--------------------------|---|
|  Celltech Testing and Engineering Services Lab | Date(s) of Evaluation | Test Report Serial No. | Test Report Revision No. |  IAC-MRA ACCREDITED |
| | December 10, 2007 | 120407AMW-T878-S15T | Revision 1.0 | |
| Test Report Issue Date | December 14, 2007 | Description of Test(s) | RF Exposure Category | Certificate No. 2470.01 |

9.0 ROBOT SYSTEM SPECIFICATIONS

| <u>Specifications</u> | |
|---|---|
| Positioner | Stäubli Unimation Corp. Robot Model: RX60L |
| Repeatability | 0.02 mm |
| No. of axis | 6 |
| <u>Data Acquisition Electronic (DAE) System</u> | |
| <u>Cell Controller</u> | |
| Processor | AMD Athlon XP 2400+ |
| Clock Speed | 2.0 GHz |
| Operating System | Windows XP Professional |
| <u>Data Converter</u> | |
| Features | Signal Amplifier, multiplexer, A/D converter, and control logic |
| Software | Measurement Software: DASY4, V4.7 Build 44 |
| | Postprocessing Software: SEMCAD, V1.8 Build 171 |
| Connecting Lines | Optical downlink for data and status info.; Optical uplink for commands and clock |
| <u>DASY4 Measurement Server</u> | |
| Function | Real-time data evaluation for field measurements and surface detection |
| Hardware | PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM |
| Connections | COM1, COM2, DAE, Robot, Ethernet, Service Interface |
| <u>E-Field Probe</u> | |
| Model | EX3DV4 |
| Serial No. | 3600 |
| Construction | Symmetrical design with triangular core |
| Frequency | 10 MHz to 6 GHz |
| Linearity | ±0.2 dB (30 MHz to 3 GHz) |
| <u>Phantom(s)</u> | |
| Type | SAM V4.0C |
| Shell Material | Fiberglass |
| Thickness | 2.0 ±0.1 mm |
| Volume | Approx. 25 liters |

| | | | | | | | |
|-------------------------|--|--|---------------|------------------------------------|-----|-------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | Page 12 of 44 | | | | |

| | | | | |
|---|-----------------------|------------------------|--------------------------|---|
|  Celltech Testing and Engineering Services Ltd. | Date(s) of Evaluation | Test Report Serial No. | Test Report Revision No. |  IAC-MRA ACCREDITED |
| | December 10, 2007 | 120407AMW-T878-S15T | Revision 1.0 | |
| Test Report Issue Date | December 14, 2007 | Description of Test(s) | RF Exposure Category | Certificate No. 2470.01 |

10.0 PROBE SPECIFICATION (EX3DV4)


| | |
|----------------|--|
| Construction: | Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. DGBE) |
| Calibration: | Basic Broadband Calibration in air: 10-3000 MHz Conversion Factors (CF) for HSL 900 and HSL 1750 |
| Frequency: | 10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz) |
| Directivity: | ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis) |
| Dynamic Range: | 10 μ W/g to >100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 \square W/g) |
| Dimensions: | Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) |
| Application: | Typical distance from probe tip to dipole centers: 1.0 mm High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better than 30%. |



EX3DV4 E-Field Probe

11.0 SAM PHANTOM V4.0C

The SAM phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (+/-0.2 mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections (see Appendix G for specifications of the SAM phantom V4.0C).



SAM Phantom V4.0C

12.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

| | | | | | | | |
|-----------|----------------------------|-----------|------------------------------------|-------------------------|-----|------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | 1921.536 - 1928.448 MHz | | | |

| | | | | |
|---|------------------------|--------------------------|--------------------------|---|
|  Celltech Testing and Engineering Services Ltd. | Date(s) of Evaluation | Test Report Serial No. | Test Report Revision No. |  IAC-MRA ACCREDITED |
| | December 10, 2007 | 120407AMW-T878-S15T | Revision 1.0 | |
| | Test Report Issue Date | Description of Test(s) | RF Exposure Category | |
| | December 14, 2007 | Specific Absorption Rate | General Population | Certificate No. 2470.01 |

13.0 TEST EQUIPMENT LIST

| TEST EQUIPMENT | | ASSET NO. | SERIAL NO. | DATE CALIBRATED | CALIBRATION DUE DATE |
|----------------|---|-----------|------------|-----------------|----------------------|
| USED | DESCRIPTION | | | | |
| x | Schmid & Partner DASY4 System | - | - | - | - |
| x | -DASY4 Measurement Server | 00158 | 1078 | N/A | N/A |
| x | -Robot | 00046 | 599396-01 | N/A | N/A |
| | -DAE4 | 00019 | 353 | 10Jul07 | 10Jul08 |
| x | -DAE3 | 00018 | 370 | 13Mar07 | 13Mar08 |
| | -ET3DV6 E-Field Probe | 00016 | 1387 | 16Mar07 | 16Mar08 |
| x | -EX3DV4 E-Field Probe | 00213 | 3600 | 24Jan07 | 24Jan08 |
| | -300 MHz Validation Dipole | 00023 | 135 | 08Jun07 | 08Jun08 |
| | -450 MHz Validation Dipole | 00024 | 136 | 30Jul07 | 30Jul08 |
| | -835 MHz Validation Dipole | 00022 | 411 | Brain 07Jun07 | 07Jun08 |
| | | | | Body 07Jun07 | 07Jun08 |
| | -900 MHz Validation Dipole | 00020 | 054 | Brain 07Jun07 | 07Jun08 |
| | | | | Body 07Jun07 | 07Jun08 |
| | -1800 MHz Validation Dipole | 00021 | 247 | Brain 06Jun07 | 06Jun08 |
| | | | | Body 06Jun07 | 06Jun08 |
| x | -1900 MHz Validation Dipole | 00032 | 151 | Brain 06Jun07 | 06Jun08 |
| | | | | Body 06Jun07 | 06Jun08 |
| | -2450 MHz Validation Dipole | 00025 | 150 | Brain 16Jul07 | 16Jul08 |
| | | | | Body 08Jun07 | 08Jun08 |
| | 5GHz Validation Dipole | -5200 MHz | 1031 | Body 18May07 | 18May08 |
| | | -5500 MHz | | Body 22May07 | 22May08 |
| | | -5800 MHz | | Brain 09May07 | 09May08 |
| x | -SAM Phantom V4.0C | 00154 | 1033 | Body 10May07 | 10May08 |
| | -Barski Planar Phantom | 00155 | 03-01 | N/A | N/A |
| | -Plexiglas Side Planar Phantom | 00156 | 161 | N/A | N/A |
| | -Plexiglas Validation Planar Phantom | 00157 | 137 | N/A | N/A |
| | ALS-PR-DIEL Dielectric Probe Kit | 00160 | 260-00953 | N/A | N/A |
| x | HP 85070C Dielectric Probe Kit | 00033 | US39240170 | N/A | N/A |
| x | Gigatronics 8652A Power Meter | 00007 | 1835272 | 26Mar07 | 26Mar08 |
| | Gigatronics 8652A Power Meter | 00008 | 1835267 | 22Jan07 | 22Jan08 |
| x | Gigatronics 80701A Power Sensor | 00012 | 1834350 | 22Jan07 | 22Jan08 |
| x | Gigatronics 80701A Power Sensor | 00014 | 1833699 | 22Jan07 | 22Jan08 |
| | Gigatronics 80701A Power Sensor | 00109 | 1834366 | 26Mar07 | 26Mar08 |
| x | HP 8753ET Network Analyzer | 00134 | US39170292 | 20Apr07 | 20Apr08 |
| | HP 8648D Signal Generator | 00005 | 3847A00611 | NCR | NCR |
| x | Rohde & Schwarz SMR20 Signal Generator | 00006 | 100104 | NCR | NCR |
| x | Amplifier Research 5S1G4 Power Amplifier | 00106 | 26235 | NCR | NCR |
| | Amplifier Research 10W1000C Power Amplifier | 00041 | 27887 | NCR | NCR |
| | Nextec NB00383 Microwave Amplifier | 00151 | 0535 | NCR | NCR |
| | HP E4408B Spectrum Analyzer | 00015 | US39240170 | 05Feb07 | 05Feb08 |

| | | | | | | | |
|-------------------------|----------------------------|--|-----------------------------------|-------------------------|-----|---------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPCS/LE-PCS DECT Handset | 1921.536 - 1928.448 MHz | | | |
| 2007 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 14 of 44 | |

| | | | | |
|---|--------------------------|------------------------|--------------------------|---|
|  Celltech Testing and Engineering Services Ltd. | Date(s) of Evaluation | Test Report Serial No. | Test Report Revision No. |  IAC-MRA ACCREDITED |
| | December 10, 2007 | 120407AMW-T878-S15T | Revision 1.0 | |
| Test Report Issue Date | Description of Test(s) | RF Exposure Category | | |
| December 14, 2007 | Specific Absorption Rate | General Population | | Certificate No. 2470.01 |

14.0 MEASUREMENT UNCERTAINTIES

| UNCERTAINTY BUDGET FOR DEVICE EVALUATION | | | | | | |
|--|---------------------------|--------------------------|-------------|-------|--------------------------------|--------------------|
| Error Description | Uncertainty Value $\pm\%$ | Probability Distribution | Divisor | ci 1g | Uncertainty Value $\pm\%$ (1g) | V_i or V_{eff} |
| Measurement System | | | | | | |
| Probe calibration (1950 MHz) | 5.5 | Normal | 1 | 1 | 5.5 | ∞ |
| Axial isotropy of the probe | 4.7 | Rectangular | 1.732050808 | 0.7 | 1.9 | ∞ |
| Spherical isotropy of the probe | 9.6 | Rectangular | 1.732050808 | 0.7 | 3.9 | ∞ |
| Spatial resolution | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| Boundary effects | 0.2 | Rectangular | 1.732050808 | 1 | 0.1 | ∞ |
| Probe linearity | 4.7 | Rectangular | 1.732050808 | 1 | 2.7 | ∞ |
| Detection limit | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Readout electronics | 0.3 | Normal | 1 | 1 | 0.3 | ∞ |
| Response time | 0.8 | Rectangular | 1.732050808 | 1 | 0.5 | ∞ |
| Integration time | 2.6 | Rectangular | 1.732050808 | 1 | 1.5 | ∞ |
| RF ambient conditions | 3 | Rectangular | 1.732050808 | 1 | 1.7 | ∞ |
| Mech. constraints of robot | 0.4 | Rectangular | 1.732050808 | 1 | 0.2 | ∞ |
| Probe positioning | 2.9 | Rectangular | 1.732050808 | 1 | 1.7 | ∞ |
| Extrapolation & integration | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Test Sample Related | | | | | | |
| Device positioning | 2.9 | Normal | 1 | 1 | 2.9 | 12 |
| Device holder uncertainty | 3.6 | Normal | 1 | 1 | 3.6 | 8 |
| Power drift | 5 | Rectangular | 1.732050808 | 1 | 2.9 | ∞ |
| Phantom and Setup | | | | | | |
| Phantom uncertainty | 4 | Rectangular | 1.732050808 | 1 | 2.3 | ∞ |
| Liquid conductivity (target) | 5 | Rectangular | 1.732050808 | 0.64 | 1.8 | ∞ |
| Liquid conductivity (measured) | 4.3 | Normal | 1 | 0.64 | 2.8 | ∞ |
| Liquid permittivity (target) | 5 | Rectangular | 1.732050808 | 0.6 | 1.7 | ∞ |
| Liquid permittivity (measured) | 3.2 | Normal | 1 | 0.6 | 1.9 | ∞ |
| Combined Standard Uncertainty | | | | | 10.87 | |
| Expanded Uncertainty (k=2) | | | | | 21.73 | |
| Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5]) | | | | | | |

| | | | | | | | |
|-------------------------|--|-----------|-----------------------------------|-----------|-------------------------|---------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPSC/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | Page 15 of 44 | |

| | | | | |
|---|--------------------------|------------------------|--------------------------|--|
|  Celltech Testing and Engineering Services Ltd. | Date(s) of Evaluation | Test Report Serial No. | Test Report Revision No. |  ILAC-MRA ACCREDITED |
| | December 10, 2007 | 120407AMW-T878-S15T | Revision 1.0 | |
| Test Report Issue Date | Description of Test(s) | RF Exposure Category | | |
| December 14, 2007 | Specific Absorption Rate | General Population | | Certificate No. 2470.01 |

MEASUREMENT UNCERTAINTIES (CONT.)

| UNCERTAINTY BUDGET FOR SYSTEM VALIDATION | | | | | | |
|--|---------------------------|--------------------------|-------------|------------|--------------------------------|--------------------|
| Error Description | Uncertainty Value $\pm\%$ | Probability Distribution | Divisor | ci 1g | Uncertainty Value $\pm\%$ (1g) | V_i or V_{eff} |
| Measurement System | | | | | | |
| Probe calibration (1950 MHz) | 5.5 | Normal | 1 | 1 | 5.5 | ∞ |
| Axial isotropy of the probe | 4.7 | Rectangular | 1.732050808 | 1 | 2.7 | ∞ |
| Spherical isotropy of the probe | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| Spatial resolution | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| Boundary effects | 0.2 | Rectangular | 1.732050808 | 1 | 0.1 | ∞ |
| Probe linearity | 4.7 | Rectangular | 1.732050808 | 1 | 2.7 | ∞ |
| Detection limit | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Readout electronics | 0.3 | Normal | 1 | 1 | 0.3 | ∞ |
| Response time | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| Integration time | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| RF ambient conditions | 3 | Rectangular | 1.732050808 | 1 | 1.7 | ∞ |
| Mech. constraints of robot | 0.4 | Rectangular | 1.732050808 | 1 | 0.2 | ∞ |
| Probe positioning | 2.9 | Rectangular | 1.732050808 | 1 | 1.7 | ∞ |
| Extrapolation & integration | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Dipole | | | | | | |
| Dipole Positioning | 2 | Normal | 1.732050808 | 1 | 1.2 | ∞ |
| Power & Power Drift | 4.7 | Normal | 1.732050808 | 1 | 2.7 | ∞ |
| Phantom and Setup | | | | | | |
| Phantom uncertainty | 4 | Rectangular | 1.732050808 | 1 | 2.3 | ∞ |
| Liquid conductivity (target) | 5 | Rectangular | 1.732050808 | 0.64 | 1.8 | ∞ |
| Liquid conductivity (measured) | 1.5 | Normal | 1 | 0.64 | 1.0 | ∞ |
| Liquid permittivity (target) | 5 | Rectangular | 1.732050808 | 0.6 | 1.7 | ∞ |
| Liquid permittivity (measured) | 3.4 | Normal | 1 | 0.6 | 2.0 | ∞ |
| Combined Standard Uncertainty | | | | | 8.78 | |
| Expanded Uncertainty (k=2) | | | | | 17.56 | |
| Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5]) | | | | | | |

| | | | | | | | |
|-------------------------|--|-----------|------------------------------------|-----------|-------------------------|---------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | Page 16 of 44 | |

| | | | | |
|---|--|---|---|---|
|  Celltech Testing and Engineering Services Ltd. | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

15.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] ANSI/IEEE C95.1:2005 - "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz", New York: IEEE, April 2006.
- [7] ANSI/TIA-603-C - "Land Mobile FM or PM Communications Equipment - Measurement and Performance Standards": December 2004.

| | | | | | | | |
|-------------------------|--|--|------------------|---|------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | Page 17 of 44 | | | | |

| | | | | |
|--|--|---|---|---|
|  Celltech Testing and Engineering Services Lab | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

APPENDIX A - SAR MEASUREMENT DATA

| | | | | | | | |
|-------------------------|--|--|------------------|---|------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | | Page 18 of 44 |

| | | | | |
|--|--|---|---|---|
|  Testing and Engineering Services Lab | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  ACCREDITED Certificate No. 2470.01 |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

Date Tested: 12/10/2007

Head SAR - Right Ear - Cheek/Touch Position - 1924.992 MHz - Channel 3

DUT: Uniden Model: DECT3080; Type: 1.9GHz DECT UPCS Cordless Handset; Serial: PORT2

Ambient Temp: 24.5°C; Fluid Temp: 23.3°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

RF Output Power: 75.9 mW (EIRP)

Communication System: TDMA/TDD 1900

Frequency: 1924.99 MHz; Duty Cycle: 1:25

2.4V, 650mAh Ni-MH Battery (Model: BT-1011)

Medium: HSL1900 Medium parameters used: $f = 1924.99$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.59, 6.59, 6.59); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Right Ear - Cheek/Touch Position - Mid Channel

Area Scan (8x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.075 mW/g

Head SAR - Right Ear - Cheek/Touch Position - Mid Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.05 V/m; Power Drift = 0.088 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.059 mW/g

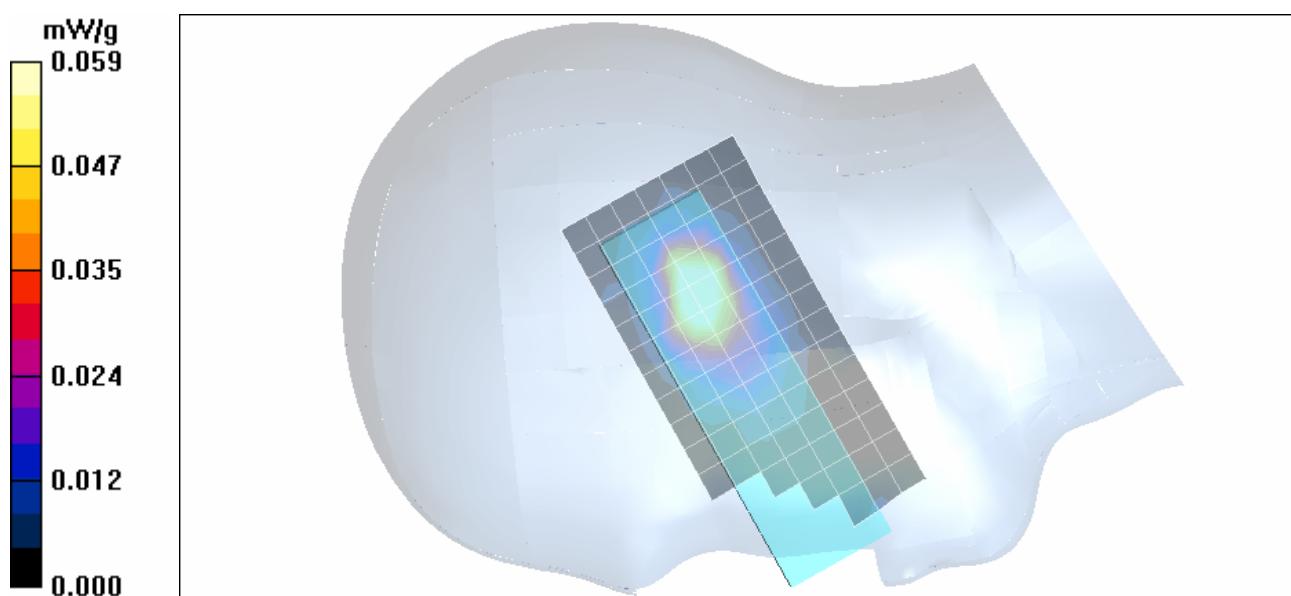

| | | | | | | | | |
|-------------------------|-----------------------------------|--|--|----------------|--------------------------------|---------------|-------------------|---|
| Company: | Uniden America Corporation | | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | | | |
| 2007 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 19 of 44 | | |

| | | | | |
|--|--|---|---|---|
|  Testing and Engineering Services Lab | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

Date Tested: 12/10/2007

Head SAR - Right Ear - Tilt Position (15°) - 1924.992 MHz - Channel 3

DUT: Uniden Model: DECT3080; Type: 1.9GHz DECT UPCS Cordless Handset; Serial: PORT2

Ambient Temp: 24.5°C; Fluid Temp: 23.3°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

RF Output Power: 75.9 mW (EIRP)

Communication System: TDMA/TDD 1900

Frequency: 1924.99 MHz; Duty Cycle: 1:25

2.4V, 650mAh Ni-MH Battery (Model: BT-1011)

Medium: HSL1900 Medium parameters used: $f = 1924.99$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.59, 6.59, 6.59); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Right Ear - Tilt Position (15°) - Mid Channel

Area Scan (8x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.040 mW/g

Head SAR - Right Ear - Tilt Position (15°) - Mid Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.67 V/m; Power Drift = 0.166 dB

Peak SAR (extrapolated) = 0.062 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.030 mW/g

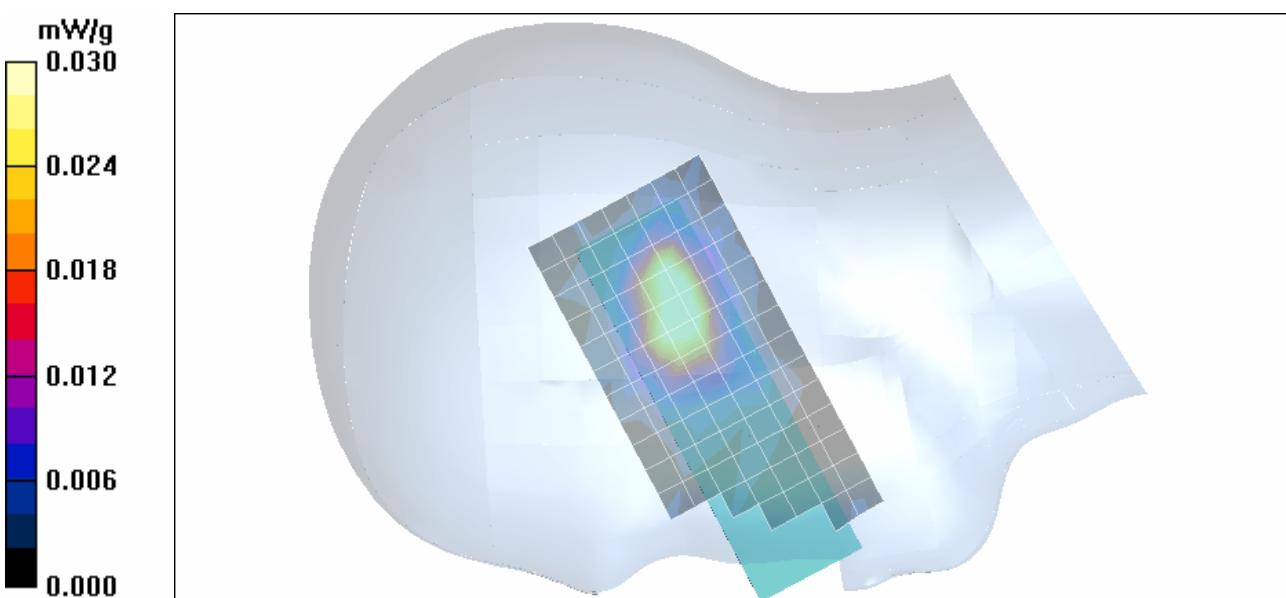

| | | | | | | | | |
|-------------------------|-----------------------------------|--|--|----------------|--------------------------------|---------------|-------------------|---|
| Company: | Uniden America Corporation | | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | | | |
| 2007 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 20 of 44 | | |

| | | | | |
|--|--|---|---|---|
|  Testing and Engineering Services Lab | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  ACCREDITED Certificate No. 2470.01 |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

Date Tested: 12/10/2007

Head SAR - Left Ear - Cheek/Touch Position - 1924.992 MHz - Channel 3

DUT: Uniden Model: DECT3080; Type: 1.9GHz DECT UPCS Cordless Handset; Serial: PORT2

Ambient Temp: 24.5°C; Fluid Temp: 23.3°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

RF Output Power: 75.9 mW (EIRP)

Communication System: TDMA/TDD 1900

Frequency: 1924.99 MHz; Duty Cycle: 1:25

2.4V, 650mAh Ni-MH Battery (Model: BT-1011)

Medium: HSL1900 Medium parameters used: $f = 1924.99$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.59, 6.59, 6.59); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Left Ear - Cheek/Touch Position - Mid Channel

Area Scan (8x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.082 mW/g

Head SAR - Left Ear - Cheek/Touch Position - Mid Channel


Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.68 V/m; Power Drift = 0.184 dB


Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.030 mW/g


Maximum value of SAR (measured) = 0.094 mW/g

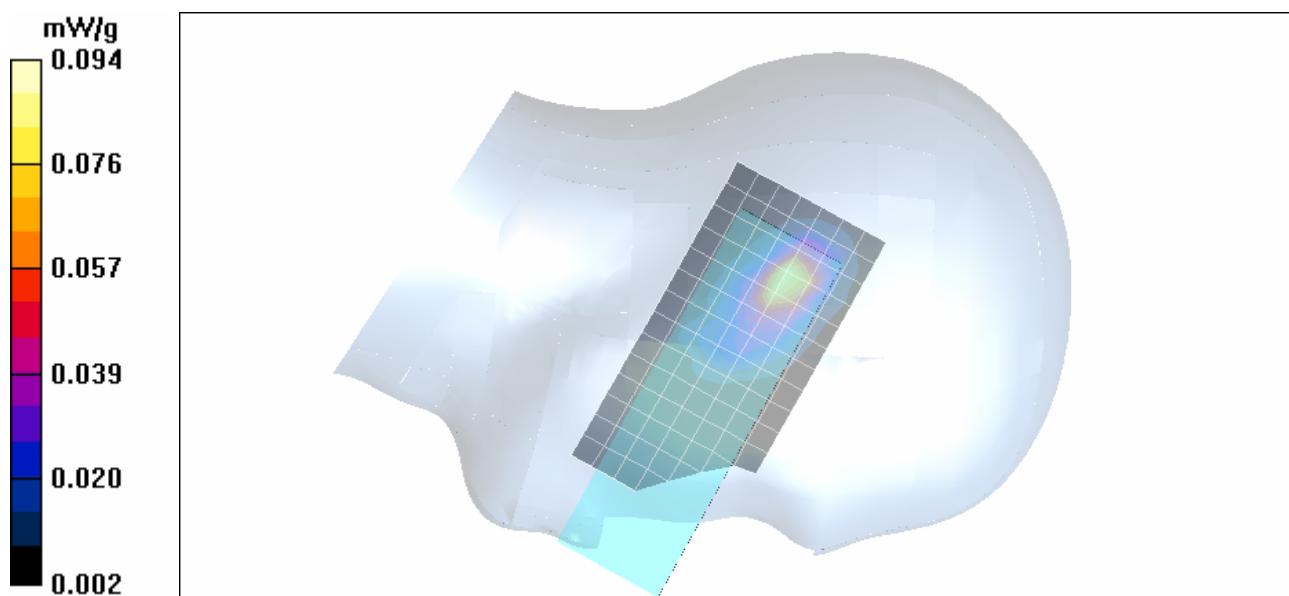

| | | | | | | | | |
|-------------------------|-----------------------------------|--|--|----------------|--------------------------------|---------------|-------------------|---|
| Company: | Uniden America Corporation | | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | | | |
| 2007 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 21 of 44 | | |

| | | | | |
|--|--|---|---|--|
|  Celltech <small>Testing and Engineering Services Ltd.</small> | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  ILAC-MRA  ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

Z-Axis Scan

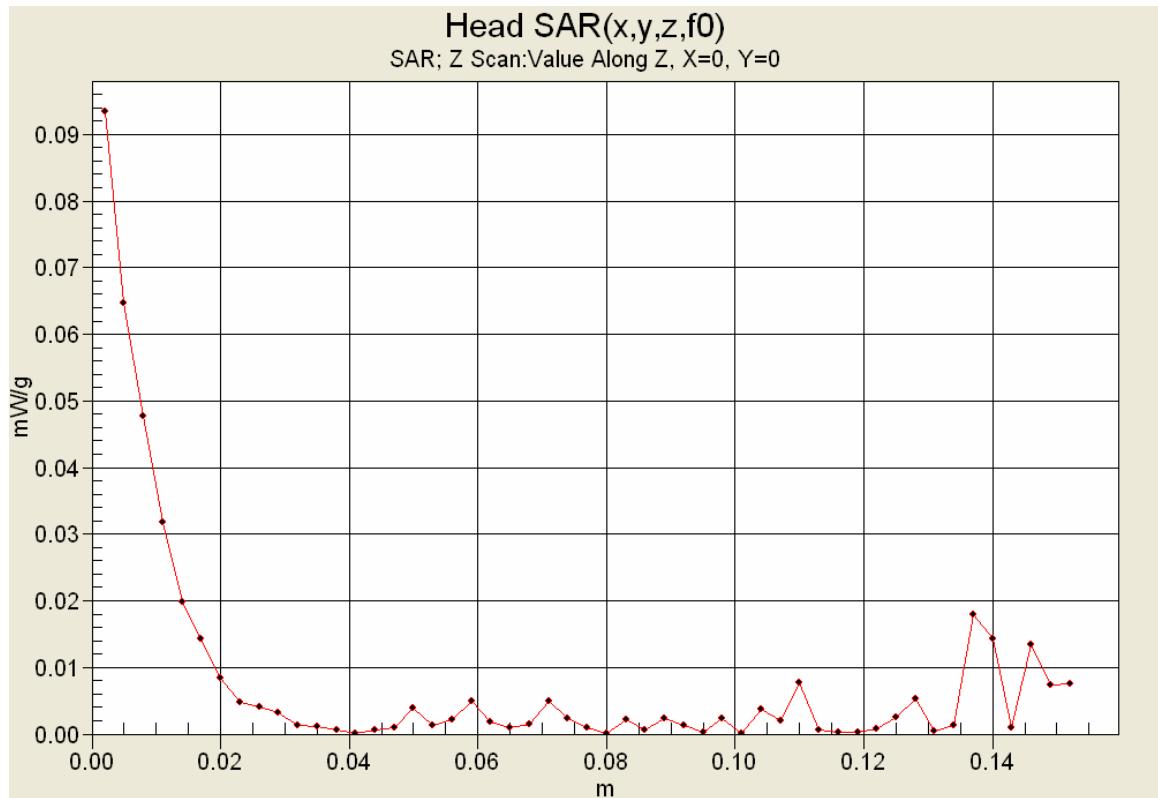

Due to the very low SAR level measured, the Z-axis scan is only reporting noise. The DASY4 software adjusts the scale according to the measured SAR level, which for this evaluation is close to the measurement noise floor.

| | | | | | | | |
|-------------------------|--|--|------------------|--|---------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 22 of 44 | | |

| | | | | |
|--|--------------------------|------------------------|--------------------------|---|
|  Celltech Testing and Engineering Services Lab | Date(s) of Evaluation | Test Report Serial No. | Test Report Revision No. |  IAC-MRA ACCREDITED |
| | December 10, 2007 | 120407AMW-T878-S15T | Revision 1.0 | |
| Test Report Issue Date | Description of Test(s) | RF Exposure Category | | Certificate No. 2470.01 |
| December 14, 2007 | Specific Absorption Rate | General Population | | |

Fluid Depth (>15cm)




Left Head Section



Right Head Section

| | | | | | | | |
|-------------------------|--|--|---------------|------------------------------------|-----|-------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | Page 24 of 44 | | | | |

| | | | | |
|---|--|---|---|--|
|  Celltech <small>Testing and Engineering Services Lab</small> | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  ILAC-MRA  ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

Date Tested: 12/10/2007

Body-Worn SAR - Back Side of DUT - Channel 3 - 1924.992 MHz

DUT: Uniden Model: DECT3080; Type: 1.9GHz DECT UPCS Cordless Handset; Serial: PORT2

Body-worn Accessory: Plastic Belt-Clip; Audio Accessory: Generic Ear-Microphone

Ambient Temp: 24.0°C; Fluid Temp: 23.1°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

RF Output Power: 75.9 mW (EIRP)

RF Output Power: 75.9 mW (EIRP)
Communication System: TDMA/TDD 1900
Frequency: 1924.99 MHz; Duty Cycle: 1:25
2.4V, 650mAh Ni-MH Battery (Model: BT-1011)
Medium: M1900 Medium parameters used: $f = 1924.99 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.54, 6.54, 6.54); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-Worn SAR - 0.7 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - Mid Channel

Area Scan (8x17x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.026 mW/g

Body-Worn SAR - 0.7 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - Mid Channel


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 3.78 V/m; Power Drift = 0.190 dB

Peak SAR (extrapolated) = 0.047 W/kg

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.012 mW/g


Maximum value of SAR (measured) = 0.025 mW/g

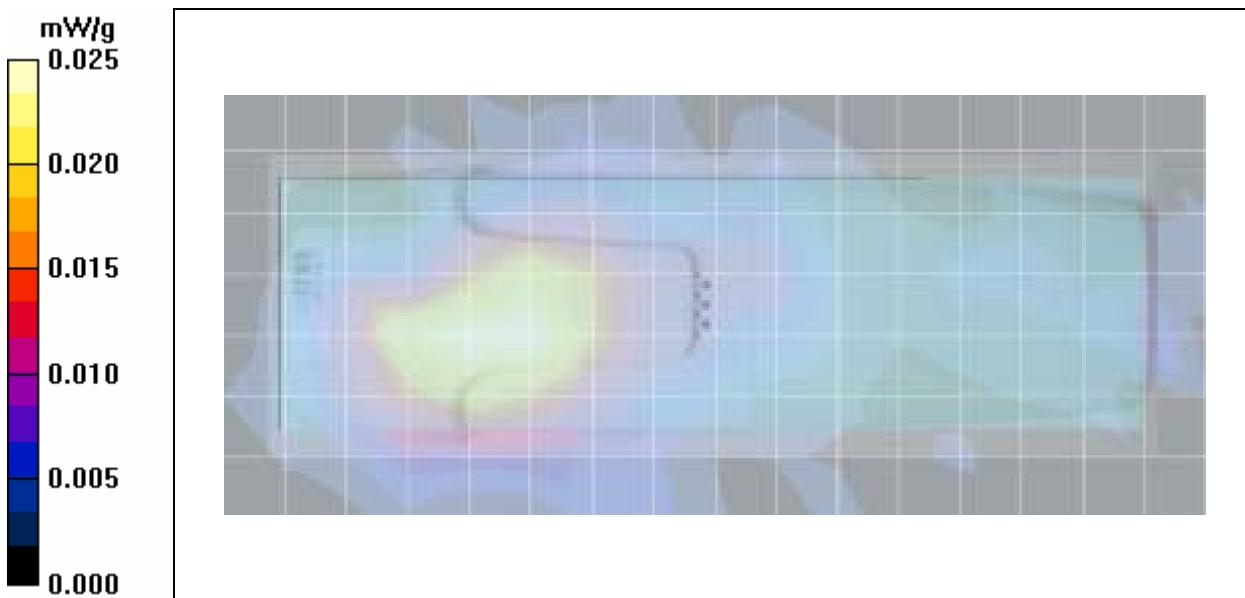

| | | | | | | | |
|-------------------------|--|--|------------------|--|---------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSC/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 25 of 44 | | |

| | | | | |
|--|--|---|---|---|
|  Testing and Engineering Services Lab | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

Z-Axis Scan

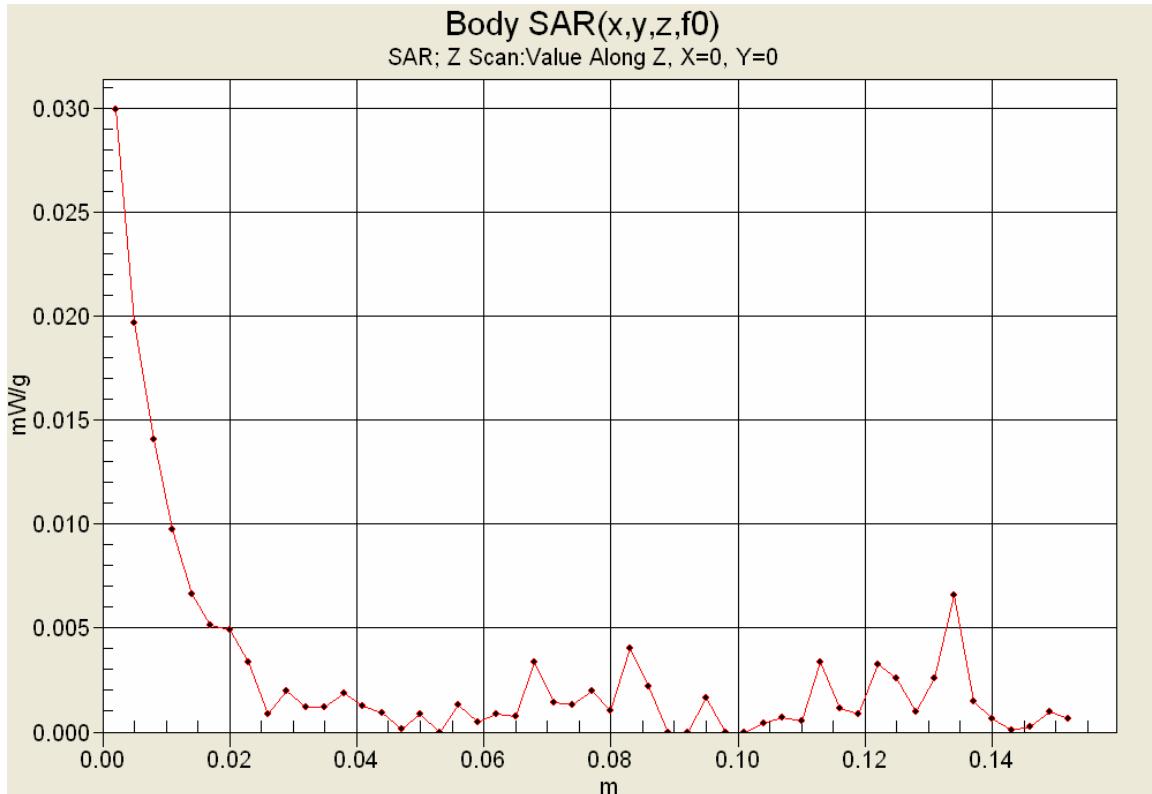

Due to the very low SAR level measured, the Z-axis scan is only reporting noise. The DASY4 software adjusts the scale according to the measured SAR level, which for this evaluation is close to the measurement noise floor.

Fluid Depth (>15cm)



Planar Section

| | | | | | | | |
|-------------------------|----------------------------|--|------------------------------------|-------------------------|-----|---------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | 1921.536 - 1928.448 MHz | | | |
| 2007 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 26 of 44 | |

| | | | | |
|--|--|---|---|---|
|  Celltech Testing and Engineering Services Lab | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

| | | | | | | | |
|-------------------------|--|--|------------------|---|---------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 27 of 44 | | |

| | | | | |
|---|--|---|---|--|
|  Celltech <small>Testing and Engineering Services Lab</small> | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  ILAC-MRA  ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

Date Tested: 12/10/2007

System Performance Check - 1900 MHz Dipole - HSL

DUT: Dipole 1900 MHz; Asset: 00032; Serial: 151; Validation: 06/06/2007

Ambient Temp: 24.5°C; Fluid Temp: 23.3°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.59, 6.59, 6.59); Calibrated: 24/01/2007
- Sensor-Surface: 2 mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn370; Calibrated: 13/03/2007
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

1900 MHz Dipole - System Performance Check/Area Scan (5x8x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 13.5 mW/g

1900 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 104.3 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 19.1 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.12 mW/g


Maximum value of SAR (measured) = 14.8 mW/kg

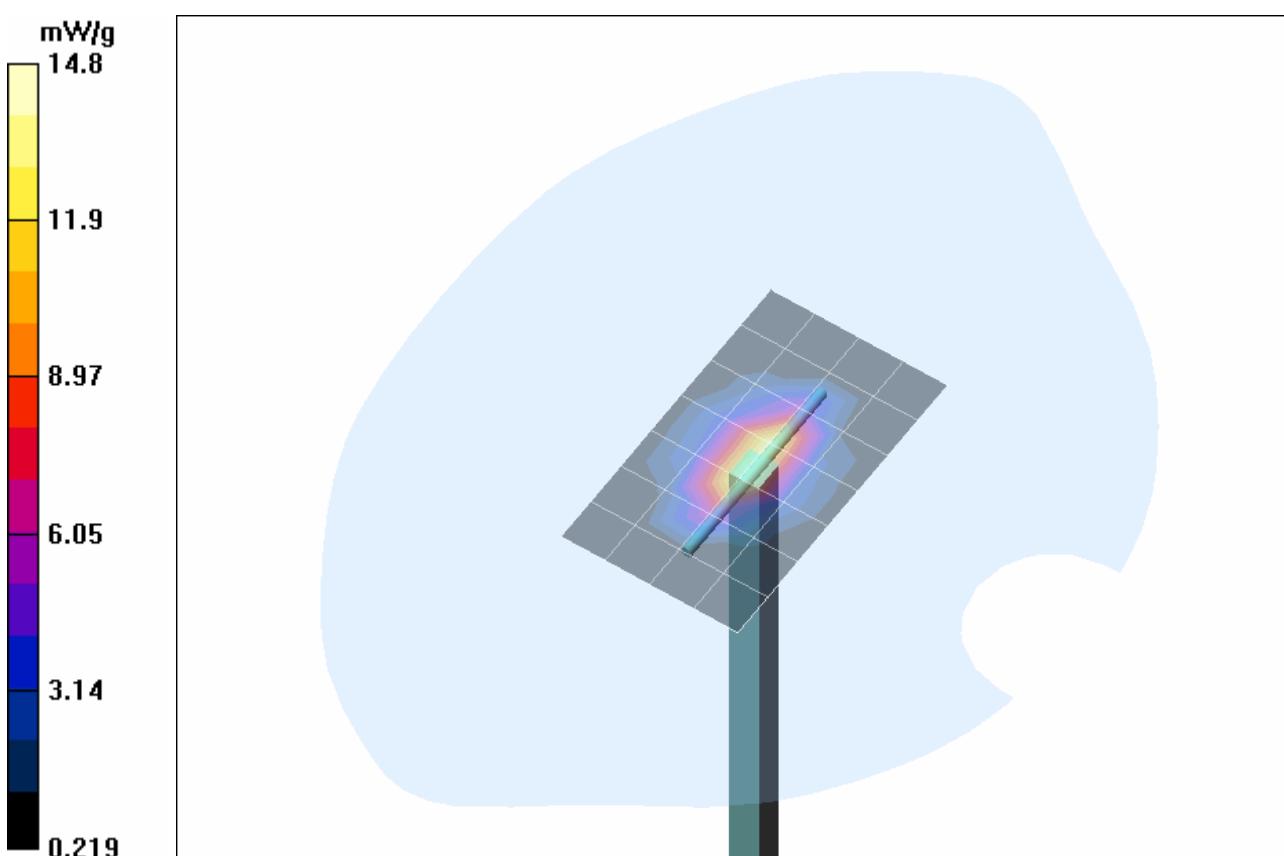

| | | | | | | | |
|-------------------------|--|------------------|--|------------------|--------------------------------|-------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 28 of 44 | | |

| | | | | |
|--|--|---|---|--|
|  Celltech <small>Testing and Engineering Services Ltd.</small> | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  ILAC-MRA  ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

Z-Axis Scan

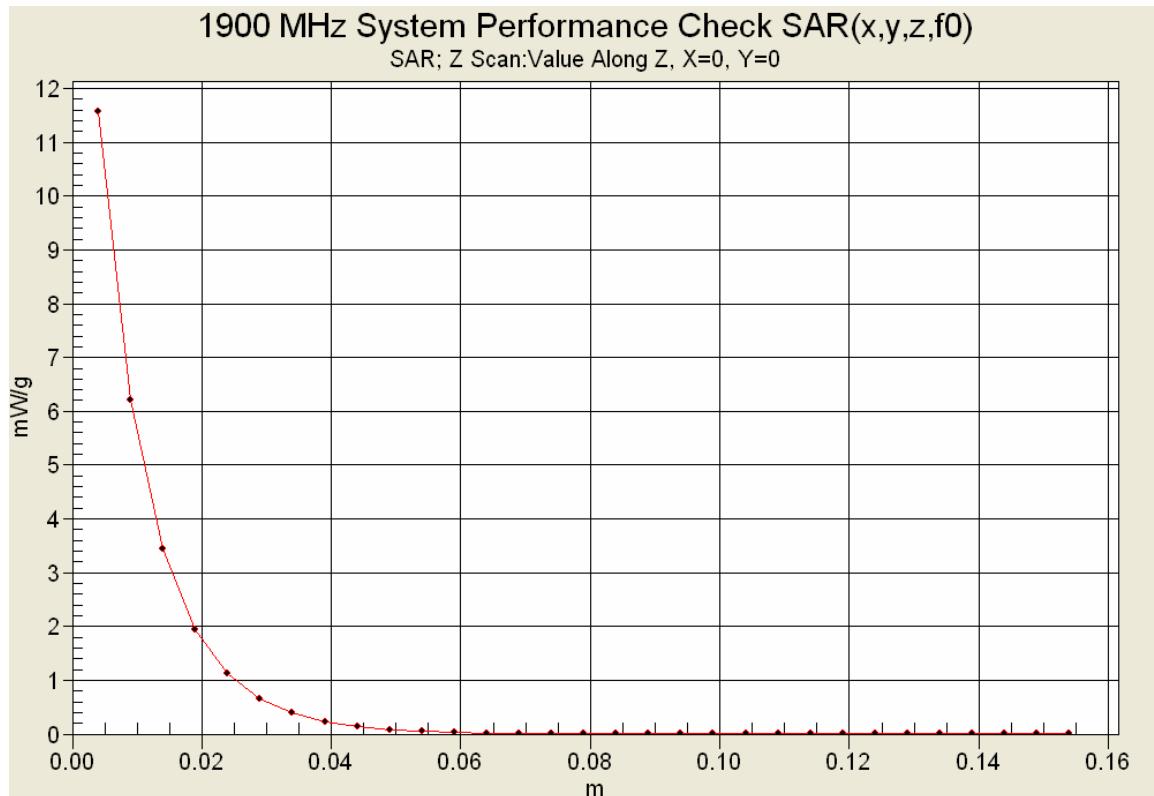

| | | | | | | | |
|------------------------|---|-----------|-----------------------------------|-----------|-------------------------|------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPSC/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | | |
| 2007 Celtech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc. | | | | Page 29 of 44 | | |

| | | | | |
|--|--|---|---|---|
|  Celltech Testing and Engineering Services Lab | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

| | | | | | | | |
|-------------------------|--|--|------------------|---|---------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 30 of 44 | | |

| | | | | |
|--|------------------------|--------------------------|--------------------------|--|
|  Celltech Testing and Engineering Services Lab | Date(s) of Evaluation | Test Report Serial No. | Test Report Revision No. |  IAC-MRA ACCREDITED Certificate No. 2470.01 |
| | December 10, 2007 | 120407AMW-T878-S15T | Revision 1.0 | |
| | Test Report Issue Date | Description of Test(s) | RF Exposure Category | |
| | December 14, 2007 | Specific Absorption Rate | General Population | |

1900 MHz System Performance Check & 1920 MHz DUT Evaluation (Brain)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Mon 10/Dec/2007

Frequency (GHz)

FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eHFCC_sH | Test_e | Test_s |
|--------|--------------|--------|--------|
| 1.8000 | 40.00 | 1.40 | 40.12 |
| 1.8100 | 40.00 | 1.40 | 40.00 |
| 1.8200 | 40.00 | 1.40 | 39.93 |
| 1.8300 | 40.00 | 1.40 | 39.82 |
| 1.8400 | 40.00 | 1.40 | 39.84 |
| 1.8500 | 40.00 | 1.40 | 39.74 |
| 1.8600 | 40.00 | 1.40 | 39.75 |
| 1.8700 | 40.00 | 1.40 | 39.73 |
| 1.8800 | 40.00 | 1.40 | 39.77 |
| 1.8900 | 40.00 | 1.40 | 39.75 |
| 1.9000 | 40.00 | 1.40 | 39.70 |
| 1.9100 | 40.00 | 1.40 | 39.67 |
| 1.9200 | 40.00 | 1.40 | 39.70 |
| 1.9300 | 40.00 | 1.40 | 39.64 |
| 1.9400 | 40.00 | 1.40 | 39.60 |
| 1.9500 | 40.00 | 1.40 | 39.52 |
| 1.9600 | 40.00 | 1.40 | 39.49 |
| 1.9700 | 40.00 | 1.40 | 39.47 |
| 1.9800 | 40.00 | 1.40 | 39.40 |
| 1.9900 | 40.00 | 1.40 | 39.30 |
| 2.0000 | 40.00 | 1.40 | 39.32 |

| | | | | | | | |
|-------------------------|--|--|-----------|------------------------------------|-----|-------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | | Page 31 of 44 |

| | | | | |
|--|--|---|---|--|
|  Celltech Testing and Engineering Services Ltd | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA ACCREDITED Certificate No. 2470.01 |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

1920 MHz DUT Evaluation (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Mon 10/Dec/2007

Frequency (GHz)

FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

| Freq | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 1.8000 | 53.30 | 1.52 | 51.95 | 1.44 |
| 1.8100 | 53.30 | 1.52 | 51.92 | 1.45 |
| 1.8200 | 53.30 | 1.52 | 52.03 | 1.46 |
| 1.8300 | 53.30 | 1.52 | 51.91 | 1.48 |
| 1.8400 | 53.30 | 1.52 | 51.82 | 1.47 |
| 1.8500 | 53.30 | 1.52 | 51.82 | 1.49 |
| 1.8600 | 53.30 | 1.52 | 51.78 | 1.50 |
| 1.8700 | 53.30 | 1.52 | 51.84 | 1.51 |
| 1.8800 | 53.30 | 1.52 | 51.66 | 1.52 |
| 1.8900 | 53.30 | 1.52 | 51.64 | 1.54 |
| 1.9000 | 53.30 | 1.52 | 51.58 | 1.55 |
| 1.9100 | 53.30 | 1.52 | 51.63 | 1.56 |
| 1.9200 | 53.30 | 1.52 | 51.57 | 1.57 |
| 1.9300 | 53.30 | 1.52 | 51.61 | 1.58 |
| 1.9400 | 53.30 | 1.52 | 51.56 | 1.59 |
| 1.9500 | 53.30 | 1.52 | 51.46 | 1.60 |
| 1.9600 | 53.30 | 1.52 | 51.33 | 1.60 |
| 1.9700 | 53.30 | 1.52 | 51.40 | 1.62 |
| 1.9800 | 53.30 | 1.52 | 51.36 | 1.64 |
| 1.9900 | 53.30 | 1.52 | 51.34 | 1.66 |
| 2.0000 | 53.30 | 1.52 | 51.27 | 1.67 |

| | | | | | | | |
|-------------------------|--|--|------------------|---|------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | | Page 32 of 44 |

| | | | | |
|--|--|---|---|---|
|  Celltech Testing and Engineering Services Lab | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

| | | | | | | | |
|-------------------------|--|--|------------------|---|---------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 33 of 44 | | |



Date(s) of Evaluation
December 10, 2007

Test Report Serial No.
120407AMW-T878-S15T

Test Report Revision No.
Revision 1.0

Test Report Issue Date
December 14, 2007

Description of Test(s)
Specific Absorption Rate


RF Exposure Category
General Population





Certificate No. 2470.01

HEAD SAR TEST SETUP PHOTOGRAPHS

Right Head Section / Cheek-Touch Position

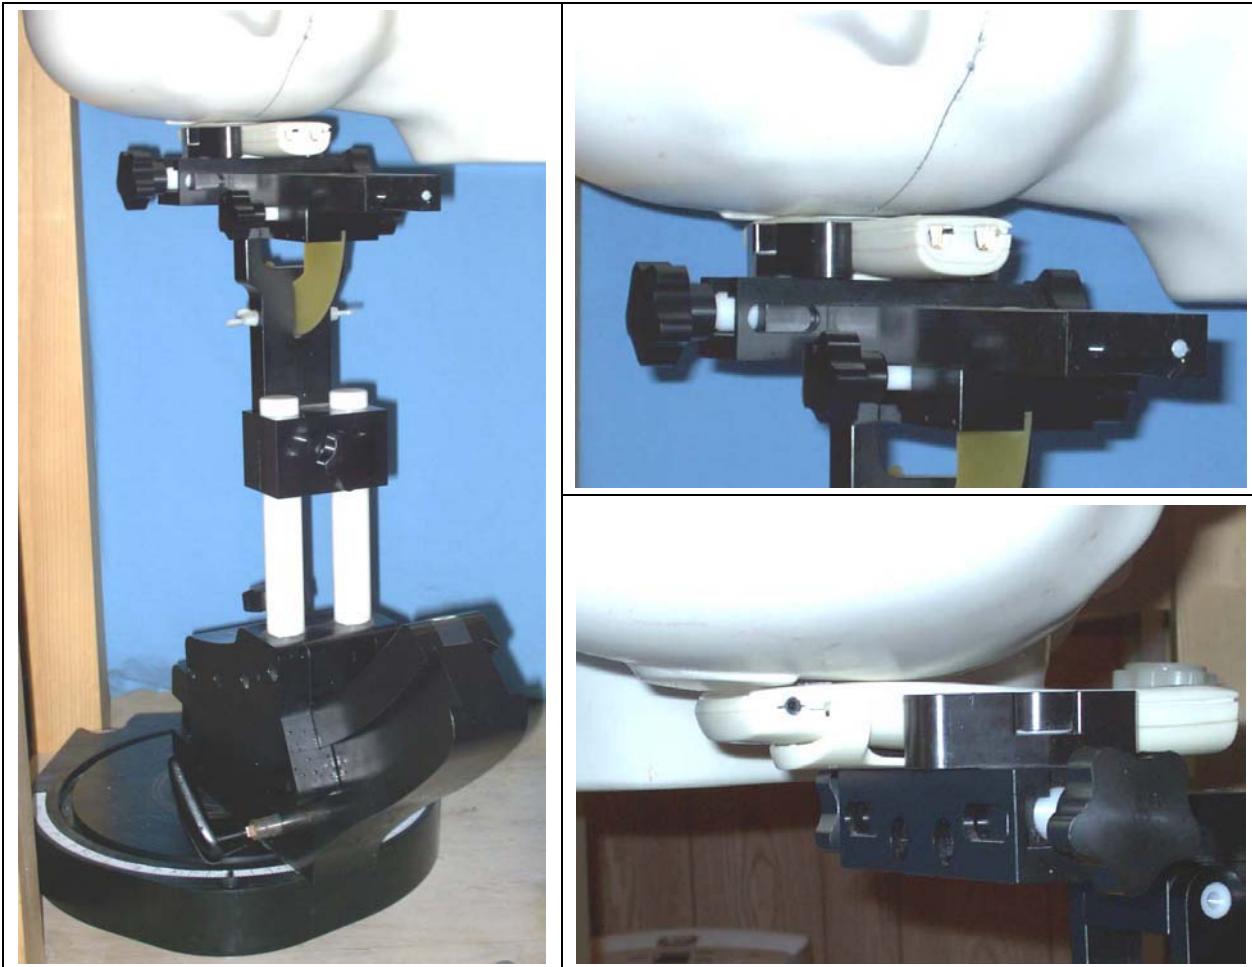

| | | | | | | | | |
|-------------------------|----------------------------|--|------------------------------------|---------|-------------------------|-----|------------|---------------|
| Company: | Uniden America Corporation | | | FCC ID: | AMWUC518R | IC: | 513C-UC518 | |
| Model(s): | DECT3080 | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | | | |
| 2007 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | | Page 34 of 44 |

| | | | | |
|--|--|---|---|--|
|  Celltech <small>Testing and Engineering Services Ltd.</small> | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  ILAC-MRA  ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

HEAD SAR TEST SETUP PHOTOGRAPHS

Right Head Section / Ear-Tilt Position (15°)




| | | | | | | | |
|-------------------------|-----------------------------------|--|------------------|--|------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 35 of 44 | |

| | | | | |
|--|--|---|---|--|
|  Celltech <small>Testing and Engineering Services Ltd.</small> | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  ILAC-MRA  ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

HEAD SAR TEST SETUP PHOTOGRAPHS

Left Head Section / Cheek-Touch Position

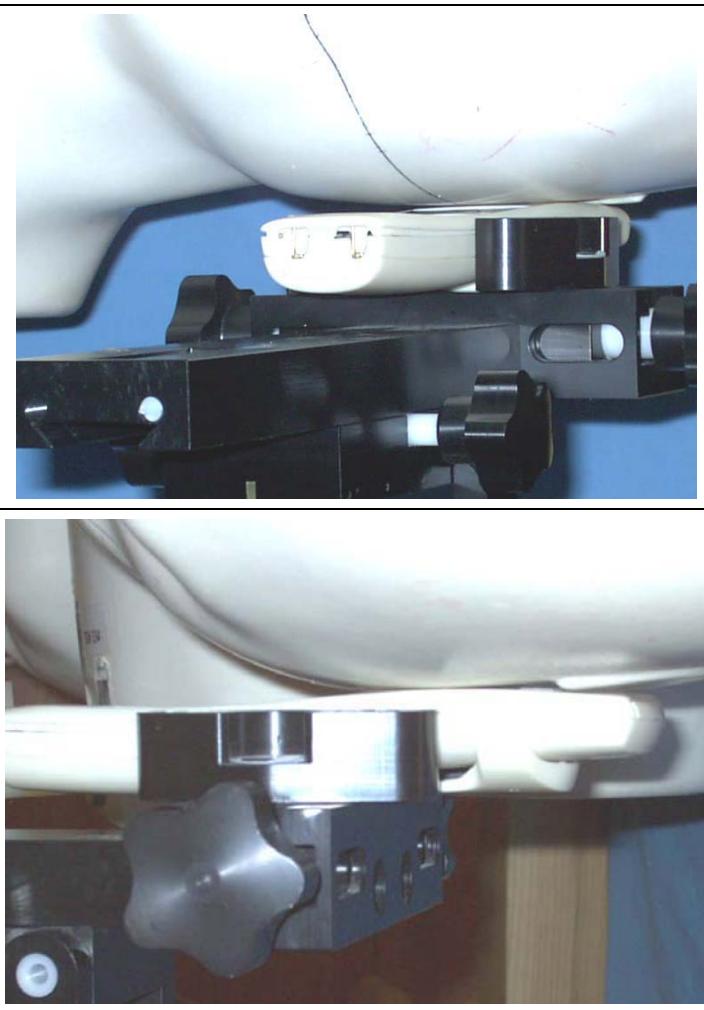

| | | | | | | | |
|------------------------|---|-----------|-----------------------------------|-----------|---------------|-------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | DUT Type: | Portable UPSC/LE-PCS DECT Handset | | | 1921.536 - 1928.448 MHz | |
| 2007 Celtech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc. | | | | Page 36 of 44 | | |



Date(s) of Evaluation
December 10, 2007

Test Report Serial No.
120407AMW-T878-S15T

Test Report Revision No.
Revision 1.0

Test Report Issue Date
December 14, 2007

Description of Test(s)
Specific Absorption Rate



Certificate No. 2470.01

HEAD SAR TEST SETUP PHOTOGRAPHS

Left Head Section / Ear-Tilt Position (15°)



| | | | | | | | | |
|-------------------------|----------------------------|--|------------------------------------|---------|-------------------------|-----|------------|---------------|
| Company: | Uniden America Corporation | | | FCC ID: | AMWUC518R | IC: | 513C-UC518 | |
| Model(s): | DECT3080 | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | | | |
| 2007 Celltech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | | Page 37 of 44 |



Date(s) of Evaluation
December 10, 2007

Test Report Serial No.
120407AMW-T878-S15T

Test Report Revision No.
Revision 1.0

Test Report Issue Date
December 14, 2007

Description of Test(s)
Specific Absorption Rate




RF Exposure Category
General Population

Certificate No. 2470.01

BODY-WORN SAR TEST SETUP PHOTOGRAPHS

0.7 cm Belt-Clip Spacing from Back of DUT to Planar Phantom
(DUT with Belt-Clip and Generic Ear-Microphone accessories)

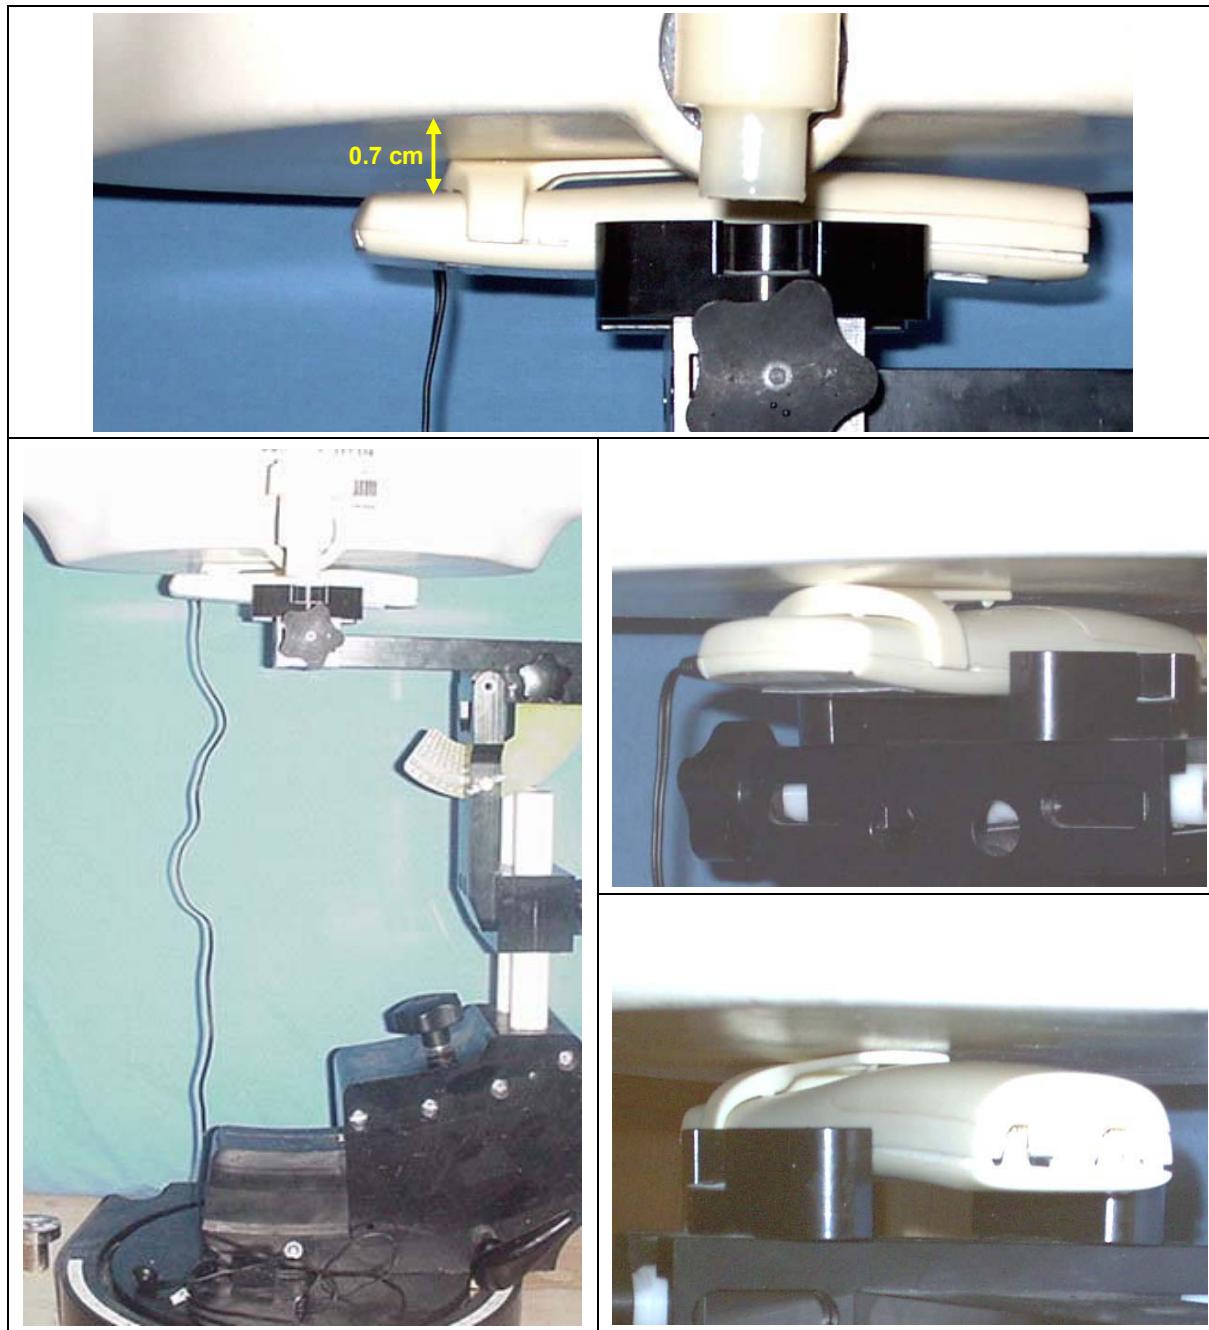

| | | | | | | | |
|-------------------------|--|-----------|------------------------------------|-------------------------|---------------|------------|--|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 | |
| Model(s): | DECT3080 | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | 1921.536 - 1928.448 MHz | | | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 38 of 44 | | |



Date(s) of Evaluation
December 10, 2007

Test Report Serial No.
120407AMW-T878-S15T

Test Report Revision No.
Revision 1.0

Test Report Issue Date
December 14, 2007

Description of Test(s)
Specific Absorption Rate

RF Exposure Category
General Population

IAAC-MRA
ACCREDITED
Certificate No. 2470.01

DUT PHOTOGRAPHS



Front Side of DUT

Back Side of DUT

Back Side of DUT with Belt-Clip

| | | | | | | | |
|-------------------------|--|-----------|-----------------------------------|-------------------------|-----|------------|---------------|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 | |
| Model(s): | DECT3080 | DUT Type: | Portable UPCS/LE-PCS DECT Handset | 1921.536 - 1928.448 MHz | | | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | | Page 39 of 44 |



Date(s) of Evaluation
December 10, 2007

Test Report Serial No.
120407AMW-T878-S15T

Test Report Revision No.
Revision 1.0

Test Report Issue Date
December 14, 2007

Description of Test(s)
Specific Absorption Rate


RF Exposure Category
General Population

IAAC-MRA
ACCREDITED
Certificate No. 2470.01


DUT PHOTOGRAPHS



Left Side of DUT with Belt-Clip

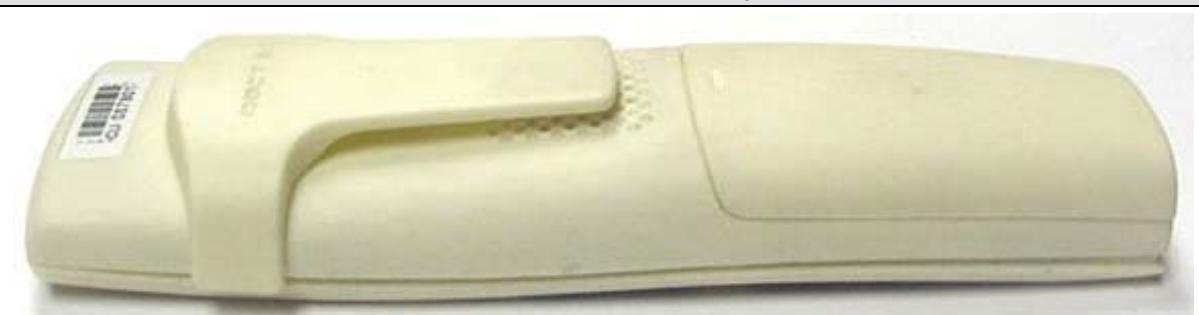

Right Side of DUT with Belt-Clip

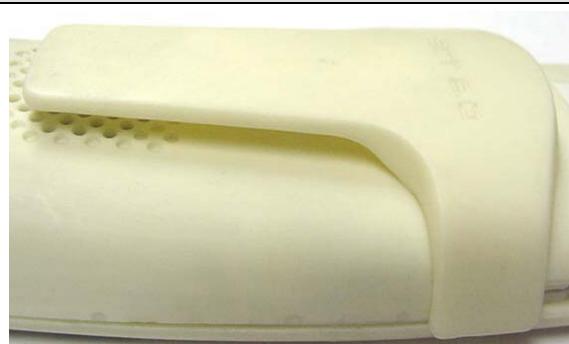

Left Side of Belt-Clip



Right Side of Belt-Clip



Back Side of Belt-Clip



Front Side of Belt-Clip

| | | | | | | | |
|-------------------------|--|--|-----------|-----------------------------------|-----|-------------------------|---------------|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 | |
| Model(s): | DECT3080 | | DUT Type: | Portable UPCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | | | Page 40 of 44 |



Date(s) of Evaluation
December 10, 2007

Test Report Serial No.
120407AMW-T878-S15T

Test Report Revision No.
Revision 1.0

Test Report Issue Date
December 14, 2007


Description of Test(s)
Specific Absorption Rate

RF Exposure Category
General Population



Certificate No. 2470.01


DUT PHOTOGRAPHS

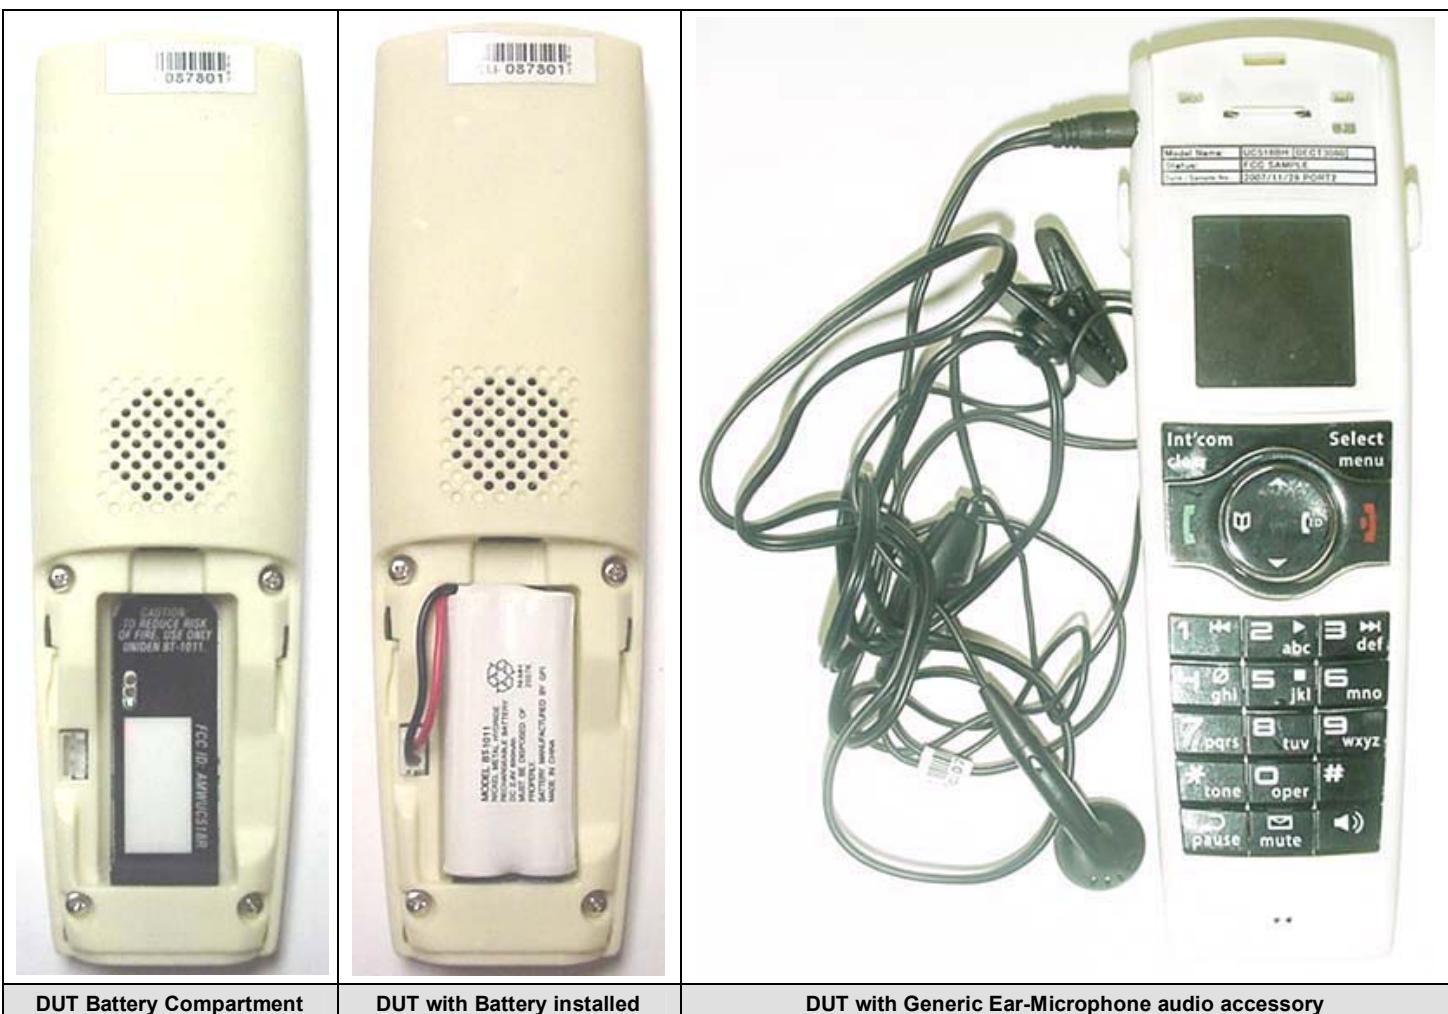

DUT Battery Compartment

DUT with Battery installed

DUT with Generic Ear-Microphone audio accessory

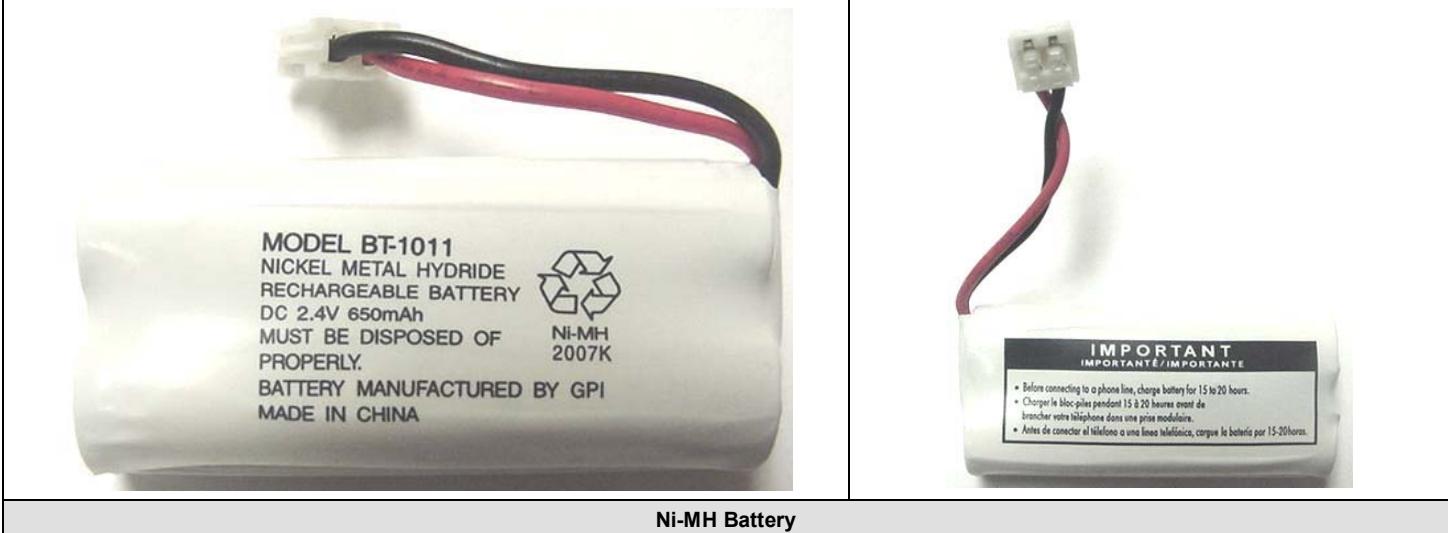

Ni-MH Battery

| | | | | | | | |
|-----------|----------------------------|-----------|-----------------------------------|-------------------------|-----|------------|--|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 | |
| Model(s): | DECT3080 | DUT Type: | Portable UPCS/LE-PCS DECT Handset | 1921.536 - 1928.448 MHz | | | |

| | | | | |
|--|--|---|---|---|
|  Celltech Testing and Engineering Services Lab | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

APPENDIX E - SYSTEM VALIDATION

| | | | | | | | |
|-------------------------|--|--|------------------|---|---------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 42 of 44 | | |

| | | | | | | |
|---|---------------------|-------------------|----------------------|---------------------|-------------|-------|
|  | Date of Evaluation: | June 06, 2007 | Document Serial No.: | SV1900B-060607-R1.1 | | |
| | Evaluation Type: | System Validation | Validation Dipole: | 1900 MHz | Fluid Type: | Brain |

1900 MHz SYSTEM VALIDATION

Type:

1900 MHz Validation Dipole

Asset Number:

00032

Serial Number:

151

Place of Validation:

Celltech Labs Inc.

Date of Validation:

June 06, 2007

Celltech Labs Inc. certifies that the 1900 MHz System Validation was performed on the date indicated above.

Performed by:

Cheri Frangiadakis

Approved by:


Jon Hughes

1. Dipole Construction & Electrical Characteristics



The validation dipole was constructed in accordance with the requirements specified in IEEE Standard 1528-2003 and International Standard IEC 62209-1:2005. The electrical properties were measured using an HP 8753ET Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 10.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

Feed point impedance at 1900 MHz $\text{Re}\{Z\} = 49.469\Omega$
 $\text{Im}\{Z\} = 9.7441\Omega$

Return Loss at 1900 MHz -20.247dB

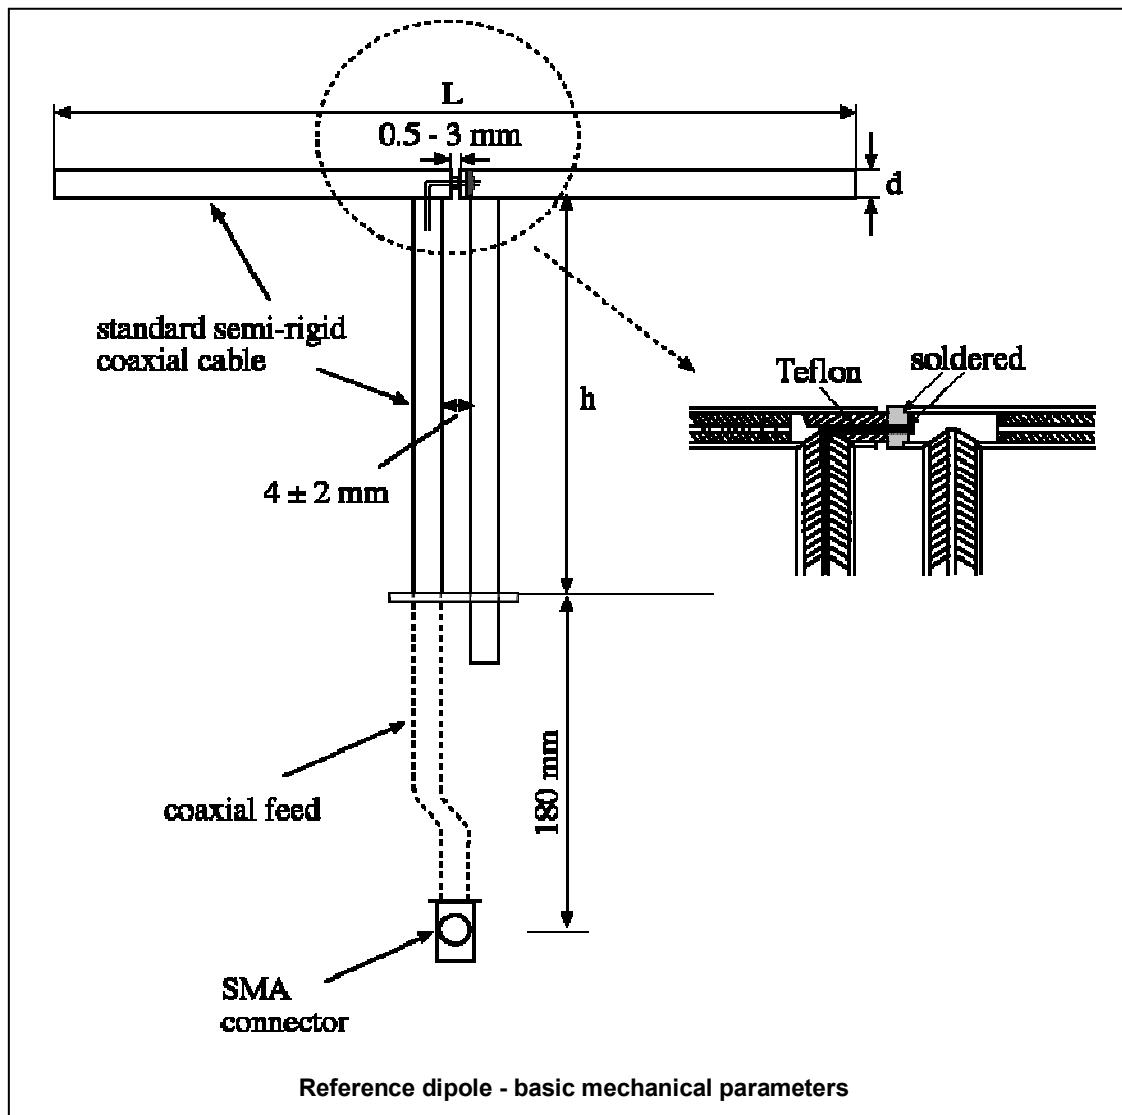

2. Validation Dipole VSWR Data

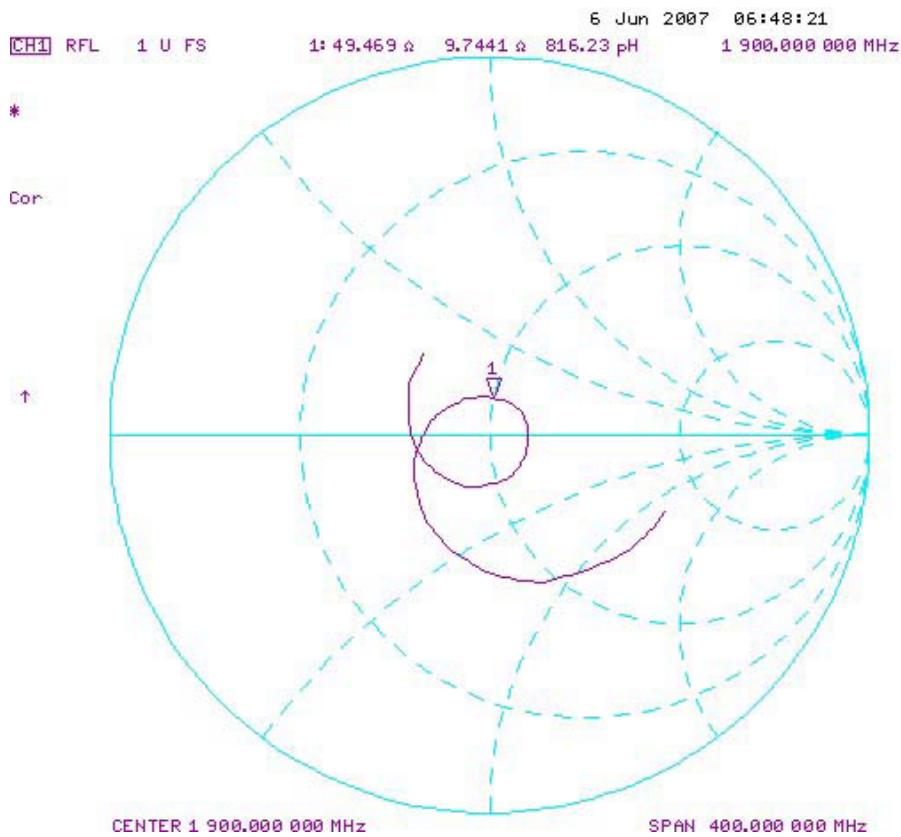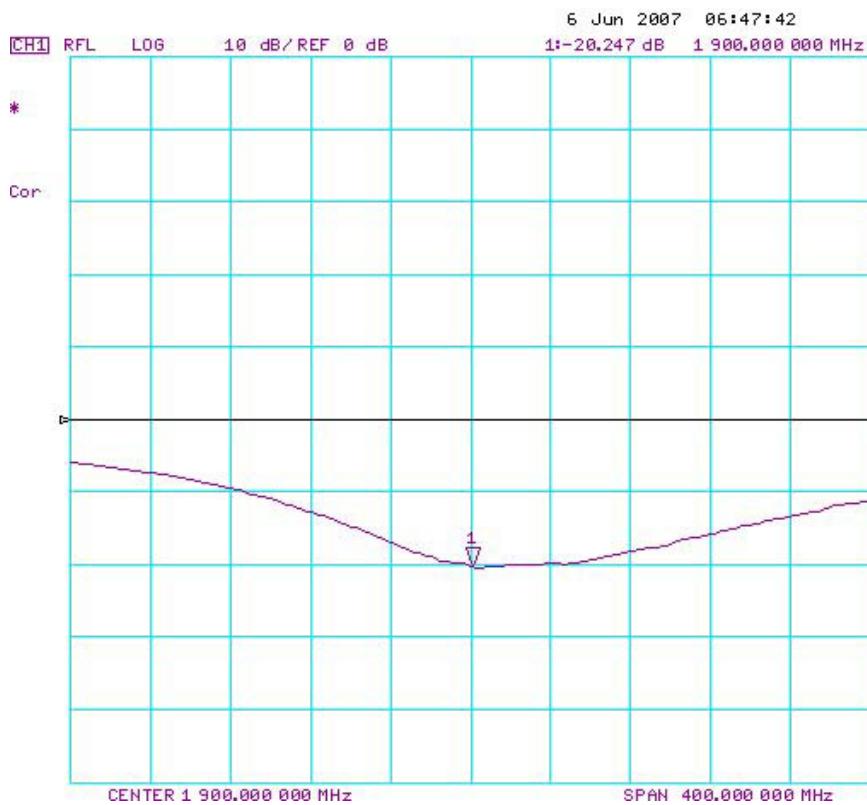

| | | | | | | |
|---|---------------------|-------------------|----------------------|---------------------|-------------|-------|
|  Celltech <small>Testing and Engineering Services Ltd.</small> | Date of Evaluation: | June 06, 2007 | Document Serial No.: | SV1900B-060607-R1.1 | | |
| | Evaluation Type: | System Validation | Validation Dipole: | 1900 MHz | Fluid Type: | Brain |


3. Validation Dipole Dimensions

| Frequency (MHz) | L (mm) | h (mm) | d (mm) |
|-----------------|-------------|-------------|------------|
| 300 | 396.0 | 250.0 | 6.0 |
| 450 | 270.0 | 167.0 | 6.0 |
| 835 | 161.0 | 89.8 | 3.6 |
| 900 | 149.0 | 83.3 | 3.6 |
| 1450 | 89.1 | 51.7 | 3.6 |
| 1800 | 72.0 | 41.7 | 3.6 |
| 1900 | 68.0 | 39.5 | 3.6 |
| 2000 | 64.5 | 37.5 | 3.6 |
| 2450 | 51.5 | 30.4 | 3.6 |
| 3000 | 41.5 | 25.0 | 3.6 |

4. Validation Phantom

The validation phantom is the SAM (Specific Anthropomorphic Mannequin) phantom manufactured by Schmid & Partner Engineering AG. The SAM phantom is a Fiberglass shell integrated in a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness: 2.0 ± 0.1 mm
Filling Volume: Approx. 25 liters
Dimensions: 50 cm (W) x 100 cm (L)

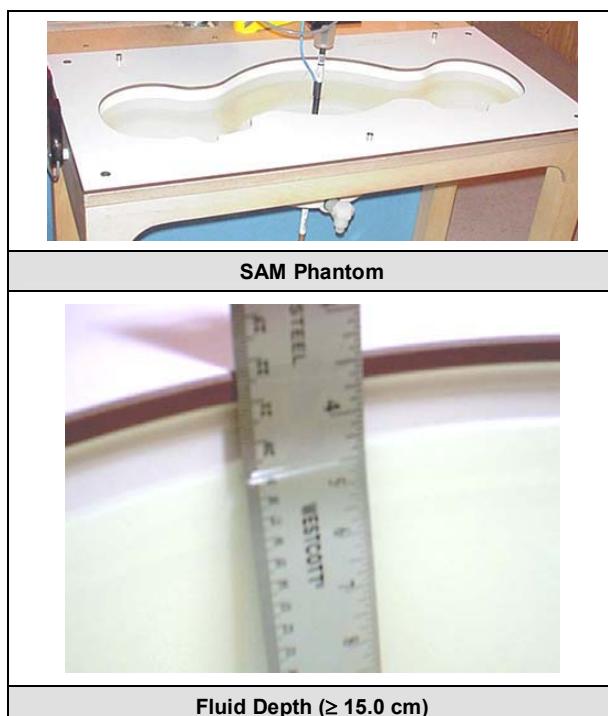

| | | | | | | |
|--|---------------------|-------------------|----------------------|---------------------|-------------|-------|
| Celltech Testing and Engineering Services Ltd. | Date of Evaluation: | June 06, 2007 | Document Serial No.: | SV1900B-060607-R1.1 | | |
| | Evaluation Type: | System Validation | Validation Dipole: | 1900 MHz | Fluid Type: | Brain |

5. 1900 MHz System Validation Setup



| | | | | | | |
|--|---------------------|-------------------|----------------------|---------------------|-------------|-------|
|  Celltech Testing and Engineering Services Ltd. | Date of Evaluation: | June 06, 2007 | Document Serial No.: | SV1900B-060607-R1.1 | | |
| | Evaluation Type: | System Validation | Validation Dipole: | 1900 MHz | Fluid Type: | Brain |


6. 1900 MHz Validation Dipole Setup



7. SAR Measurement

Measurements were made using a dosimetric E-field probe EX3DV4 (S/N: 3600, Conversion Factor 6.59). The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the procedures described below.

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 50dB below the forward power.

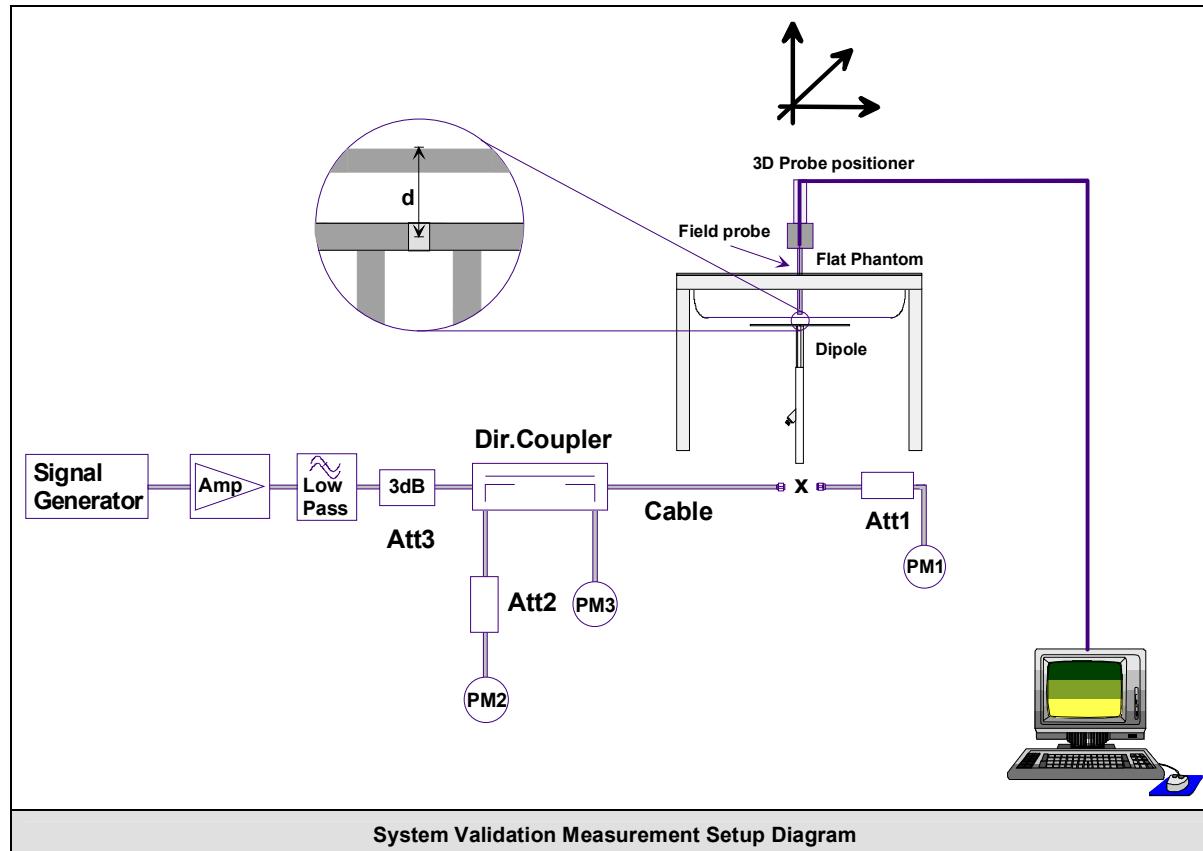

| | | | | | | |
|---|---------------------|-------------------|----------------------|---------------------|-------------|-------|
|  | Date of Evaluation: | June 06, 2007 | Document Serial No.: | SV1900B-060607-R1.1 | | |
| | Evaluation Type: | System Validation | Validation Dipole: | 1900 MHz | Fluid Type: | Brain |

8. Measurement Conditions

The SAM phantom was filled with 1900 MHz Brain tissue simulant.

Relative Permittivity: 38.4 (-4.0% deviation from target)

Conductivity: 1.41 mho/m (+0.8% deviation from target)

Fluid Temperature: 21.2 °C (Start of Test) / 21.2 °C (End of Test)

Fluid Depth: ≥ 15.0 cm

Environmental Conditions:

Ambient Temperature: 21.2 °C

Barometric Pressure: 95.9 kPa

Humidity: 40%

The 1900 MHz Brain tissue simulant consisted of the following ingredients:

| Ingredient | Percentage by weight |
|------------------------------------|-----------------------------|
| Water | 55.85% |
| Glycol | 44.00% |
| Salt | 0.15% |
| IEEE Target Dielectric Parameters: | $\epsilon_r = 40.0$ (+/-5%) |
| | $\sigma = 1.40$ S/m (+/-5%) |

9. System Validation SAR Results

| SAR @ 0.25W Input averaged over 1g (W/kg) | | | SAR @ 1W Input averaged over 1g (W/kg) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|----------|-----------|---|---|-----------------|---------|----------|---|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|------|-----|------|------|------|------|-----|------|------|------|------|-----|------|------|------|------|-----|------|------|------|------|-----|------|------|------|-------|-----|------|------|------|-------|-----|
| IEEE/IEC Target | Measured | Deviation | IEEE/IEC Target | Measured | Deviation | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9.93 | +/- 10% | 10.8 | +8.8% | 39.7 | +/- 10% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SAR @ 0.25W Input averaged over 10g (W/kg) | | | SAR @ 1W Input averaged over 10g (W/kg) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| IEEE/IEC Target | Measured | Deviation | IEEE/IEC Target | Measured | Deviation | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5.13 | +/- 10% | 5.45 | +6.3% | 20.5 | +/- 10% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1" data-bbox="323 1436 1232 1932"> <thead> <tr> <th>Frequency (MHz)</th> <th>1 g SAR</th> <th>10 g SAR</th> <th>Local SAR at surface (above feed-point)</th> <th>Local SAR at surface (y = 2 cm offset from feed-point)^a</th> </tr> </thead> <tbody> <tr> <td>300</td><td>3.0</td><td>2.0</td><td>4.4</td><td>2.1</td></tr> <tr> <td>450</td><td>4.9</td><td>3.3</td><td>7.2</td><td>3.2</td></tr> <tr> <td>835</td><td>9.5</td><td>6.2</td><td>4.1</td><td>4.9</td></tr> <tr> <td>900</td><td>10.8</td><td>6.9</td><td>16.4</td><td>5.4</td></tr> <tr> <td>1450</td><td>29.0</td><td>16.0</td><td>50.2</td><td>6.5</td></tr> <tr> <td>1800</td><td>38.1</td><td>19.8</td><td>69.5</td><td>6.8</td></tr> <tr> <td>1900</td><td>39.7</td><td>20.5</td><td>72.1</td><td>6.6</td></tr> <tr> <td>2000</td><td>41.1</td><td>21.1</td><td>74.6</td><td>6.5</td></tr> <tr> <td>2450</td><td>52.4</td><td>24.0</td><td>104.2</td><td>7.7</td></tr> <tr> <td>3000</td><td>63.8</td><td>25.7</td><td>140.2</td><td>9.5</td></tr> </tbody> </table> | | | | | Frequency (MHz) | 1 g SAR | 10 g SAR | Local SAR at surface (above feed-point) | Local SAR at surface (y = 2 cm offset from feed-point) ^a | 300 | 3.0 | 2.0 | 4.4 | 2.1 | 450 | 4.9 | 3.3 | 7.2 | 3.2 | 835 | 9.5 | 6.2 | 4.1 | 4.9 | 900 | 10.8 | 6.9 | 16.4 | 5.4 | 1450 | 29.0 | 16.0 | 50.2 | 6.5 | 1800 | 38.1 | 19.8 | 69.5 | 6.8 | 1900 | 39.7 | 20.5 | 72.1 | 6.6 | 2000 | 41.1 | 21.1 | 74.6 | 6.5 | 2450 | 52.4 | 24.0 | 104.2 | 7.7 | 3000 | 63.8 | 25.7 | 140.2 | 9.5 |
| Frequency (MHz) | 1 g SAR | 10 g SAR | Local SAR at surface (above feed-point) | Local SAR at surface (y = 2 cm offset from feed-point) ^a | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 300 | 3.0 | 2.0 | 4.4 | 2.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 450 | 4.9 | 3.3 | 7.2 | 3.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 835 | 9.5 | 6.2 | 4.1 | 4.9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 900 | 10.8 | 6.9 | 16.4 | 5.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1450 | 29.0 | 16.0 | 50.2 | 6.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1800 | 38.1 | 19.8 | 69.5 | 6.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1900 | 39.7 | 20.5 | 72.1 | 6.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2000 | 41.1 | 21.1 | 74.6 | 6.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2450 | 52.4 | 24.0 | 104.2 | 7.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3000 | 63.8 | 25.7 | 140.2 | 9.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Numerical reference SAR values for reference dipole and flat phantom normalized to 1 W (IEEE 1528-2003; IEC 62209-1:2005) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

System Validation - 1900 MHz Dipole - June 6, 2007

DUT: Dipole 1900 MHz; Asset: 00032; Serial: 151

Ambient Temp: 21.2°C; Fluid Temp: 21.2°C; Barometric Pressure: 95.9 kPa; Humidity: 40%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.59, 6.59, 6.59); Calibrated: 24/01/2007
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

1900 MHz System Validation/Area Scan (5x8x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.7 mW/g

1900 MHz System Validation/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 94.0 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 21.0 W/kg

SAR(1 g) = 10.8 mW/g; SAR(10 g) = 5.45 mW/g

Maximum value of SAR (measured) = 12.1 mW/g

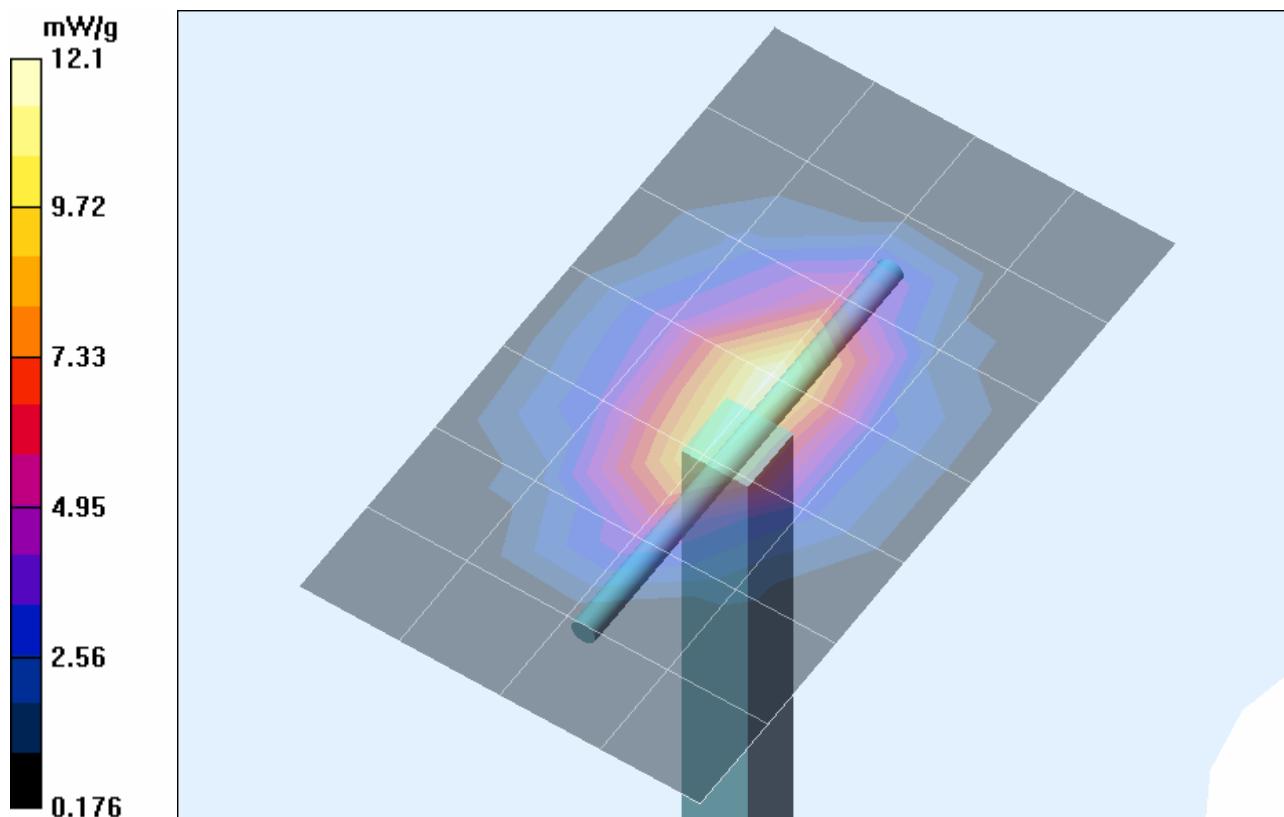

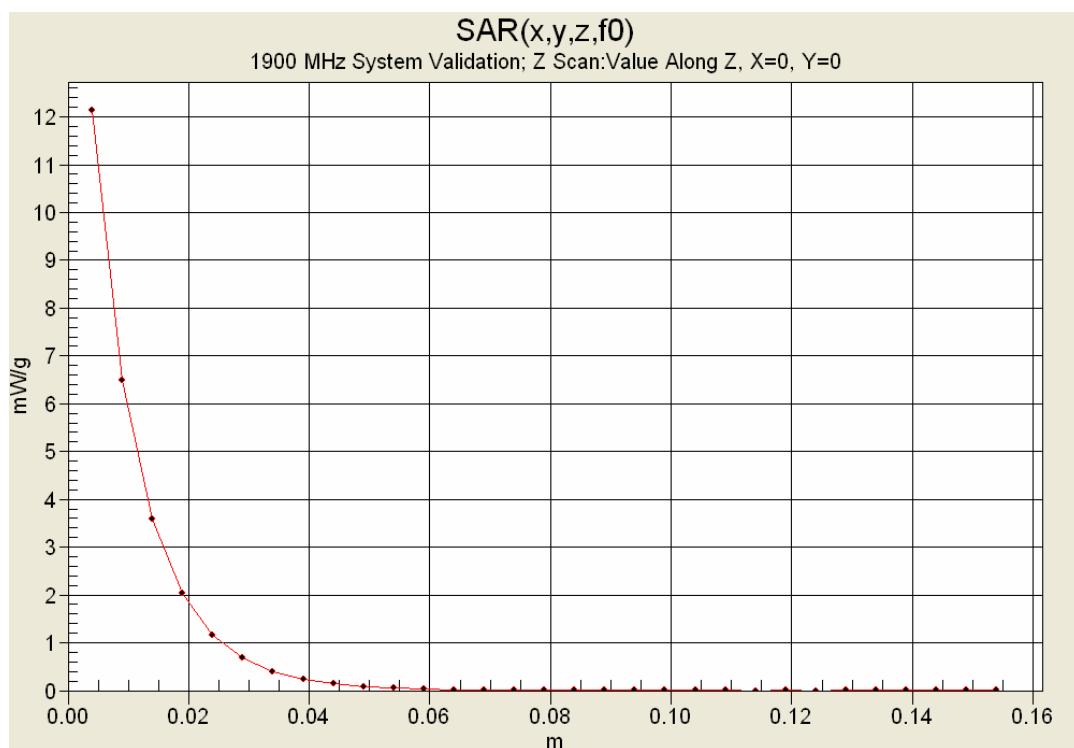

10. Measured Fluid Dielectric Parameters

System Validation - 1900 MHz (Brain)

 Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 Wed 06/Jun/2007
 Frequency (GHz)
 FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

| Freq | FCC_eH | FCC_sH | Test_e | Test_s |
|---------------|--------------|-------------|--------------|-------------|
| 1.8000 | 40.00 | 1.40 | 38.49 | 1.30 |
| 1.8100 | 40.00 | 1.40 | 38.70 | 1.31 |
| 1.8200 | 40.00 | 1.40 | 38.62 | 1.32 |
| 1.8300 | 40.00 | 1.40 | 38.57 | 1.33 |
| 1.8400 | 40.00 | 1.40 | 38.57 | 1.34 |
| 1.8500 | 40.00 | 1.40 | 38.46 | 1.35 |
| 1.8600 | 40.00 | 1.40 | 38.51 | 1.37 |
| 1.8700 | 40.00 | 1.40 | 38.51 | 1.38 |
| 1.8800 | 40.00 | 1.40 | 38.38 | 1.38 |
| 1.8900 | 40.00 | 1.40 | 38.42 | 1.39 |
| 1.9000 | 40.00 | 1.40 | 38.38 | 1.41 |
| 1.9100 | 40.00 | 1.40 | 38.33 | 1.42 |
| 1.9200 | 40.00 | 1.40 | 38.27 | 1.43 |
| 1.9300 | 40.00 | 1.40 | 38.23 | 1.44 |
| 1.9400 | 40.00 | 1.40 | 38.17 | 1.45 |
| 1.9500 | 40.00 | 1.40 | 38.16 | 1.47 |
| 1.9600 | 40.00 | 1.40 | 38.17 | 1.47 |
| 1.9700 | 40.00 | 1.40 | 38.04 | 1.48 |
| 1.9800 | 40.00 | 1.40 | 38.02 | 1.49 |
| 1.9900 | 40.00 | 1.40 | 37.98 | 1.50 |
| 2.0000 | 40.00 | 1.40 | 37.90 | 1.51 |

11. Measurement Uncertainties

| UNCERTAINTY BUDGET FOR SYSTEM VALIDATION | | | | | | |
|--|--|--------------------------|-------------|-------|---------------------------|--------------------|
| Error Description | Uncertainty Value ±% | Probability Distribution | Divisor | ci 1g | Uncertainty Value ±% (1g) | V_i or V_{eff} |
| Measurement System | | | | | | |
| Probe calibration (1950 MHz) | 5.5 | Normal | 1 | 1 | 5.5 | ∞ |
| Axial isotropy of the probe | 4.7 | Rectangular | 1.732050808 | 1 | 2.7 | ∞ |
| Spherical isotropy of the probe | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| Spatial resolution | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| Boundary effects | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Probe linearity | 4.7 | Rectangular | 1.732050808 | 1 | 2.7 | ∞ |
| Detection limit | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Readout electronics | 0.3 | Normal | 1 | 1 | 0.3 | ∞ |
| Response time | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| Integration time | 0 | Rectangular | 1.732050808 | 1 | 0.0 | ∞ |
| RF ambient conditions | 3 | Rectangular | 1.732050808 | 1 | 1.7 | ∞ |
| Mech. constraints of robot | 0.4 | Rectangular | 1.732050808 | 1 | 0.2 | ∞ |
| Probe positioning | 2.9 | Rectangular | 1.732050808 | 1 | 1.7 | ∞ |
| Extrapolation & integration | 1 | Rectangular | 1.732050808 | 1 | 0.6 | ∞ |
| Dipole | | | | | | |
| Dipole Positioning | 2 | Normal | 1.732050808 | 1 | 1.2 | ∞ |
| Power & Power Drift | 4.7 | Normal | 1.732050808 | 1 | 2.7 | ∞ |
| Phantom and Setup | | | | | | |
| Phantom uncertainty | 4 | Rectangular | 1.732050808 | 1 | 2.3 | ∞ |
| Liquid conductivity (target) | 5 | Rectangular | 1.732050808 | 0.64 | 1.8 | ∞ |
| Liquid conductivity (measured) | 5 | Normal | 1 | 0.64 | 3.2 | ∞ |
| Liquid permittivity (target) | 5 | Rectangular | 1.732050808 | 0.6 | 1.7 | ∞ |
| Liquid permittivity (measured) | 5 | Normal | 1 | 0.6 | 3.0 | ∞ |
| Combined Standard Uncertainty | | | | | 9.57 | |
| Expanded Uncertainty (k=2) | | | | | 19.14 | |
| Note(s) | 1. Measurement Uncertainty Table in accordance with IEEE 1528-2003 and IEC 62209-1:2005. | | | | | |

12. Test Equipment List

| TEST EQUIPMENT | ASSET NO. | SERIAL NO. | DATE OF CAL. | CAL. DUE DATE |
|--|-----------|------------|--------------|---------------|
| SPEAG DASY4 Measurement Server | 00158 | 1078 | N/A | N/A |
| SPEAG Robot | 00046 | 599396-01 | N/A | N/A |
| SPEAG DAE4 | 00019 | 353 | 21Jun06 | 21Jun07 |
| SPEAG EX3DV4 E-Field Probe | 00213 | 3600 | 24Jan07 | 24Jan08 |
| 1900 MHz Validation Dipole | 00032 | 151 | 06Jun07 | 06Jun08 |
| SPEAG SAM Phantom V4.0C | 00154 | 1033 | N/A | N/A |
| ALS-PR-DIEL Dielectric Probe Kit | 00160 | 260-00953 | N/A | N/A |
| Gigatronics 8652A Power Meter | 00007 | 1835272 | 26Mar07 | 26Mar08 |
| Gigatronics 80701A Power Sensor | 00014 | 1833699 | 22Jan07 | 22Jan08 |
| Gigatronics 80701A Power Sensor | 00109 | 1834366 | 26Mar07 | 26Mar08 |
| HP 8753ET Network Analyzer | 00134 | US39170292 | 20Apr07 | 20Apr08 |
| HP 8648D Signal Generator | 00005 | 3847A00611 | NCR | NCR |
| Amplifier Research 5S1G4 Power Amplifier | 00106 | 26235 | NCR | NCR |

| | | | | |
|--|--|---|---|---|
|  Celltech Testing and Engineering Services Lab | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  IAC-MRA ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

APPENDIX F - PROBE CALIBRATION

| | | | | | | | |
|-------------------------|--|--|------------------|---|---------------|--------------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSCS/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. | | | | Page 43 of 44 | | |

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Celltech**

Certificate No: EX3-3600_Jan07

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3600**

Calibration procedure(s) **QA CAL-01.v5 and QA CAL-14.v3**
Calibration procedure for dosimetric E-field probes

Calibration date: **January 24, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|---|-----------------------|
| Power meter E4419B | GB41293874 | 5-Apr-06 (METAS, No. 251-00557) | Apr-07 |
| Power sensor E4412A | MY41495277 | 5-Apr-06 (METAS, No. 251-00557) | Apr-07 |
| Power sensor E4412A | MY41498087 | 5-Apr-06 (METAS, No. 251-00557) | Apr-07 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 10-Aug-06 (METAS, No. 217-00592) | Aug-07 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 4-Apr-06 (METAS, No. 251-00558) | Apr-07 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 10-Aug-06 (METAS, No. 217-00593) | Aug-07 |
| Reference Probe ES3DV2 | SN: 3013 | 4-Jan-07 (SPEAG, No. ES3-3013_Jan07) | Jan-08 |
| DAE4 | SN: 654 | 21-Jun-06 (SPEAG, No. DAE4-654_Jun06) | Jun-07 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------|--------------|--|------------------------|
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (SPEAG, in house check Nov-05) | In house check: Nov-07 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (SPEAG, in house check Oct-06) | In house check: Oct-07 |

| Calibrated by: | Name | Function | Signature |
|----------------|---------------|-------------------|-----------|
| | Katja Pokovic | Technical Manager | |

| Approved by: | Name | Function | Signature |
|--------------|--------------|-----------------|-----------|
| | Niels Kuster | Quality Manager | |

Issued: January 24, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|--|--|
| TSL | tissue simulating liquid |
| NORMx,y,z | sensitivity in free space |
| ConF | sensitivity in TSL / NORM x,y,z |
| DCP | diode compression point |
| Polarization ϕ | ϕ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz)", July 2001

Methods Applied and Interpretation of Parameters:

- NORM x,y,z :** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM x,y,z are only intermediate values, i.e., the uncertainties of NORM x,y,z does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f) x,y,z = NORM x,y,z * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCPx,y,z:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM x,y,z * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe EX3DV4

SN:3600

Manufactured: January 10, 2007
Calibrated: January 24, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: EX3DV4 SN:3600

Sensitivity in Free Space^A

| | | |
|-------|--------------------------|-------------------------------------|
| NormX | 0.460 \pm 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ |
| NormY | 0.470 \pm 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ |
| NormZ | 0.380 \pm 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ |

Diode Compression^B

| | |
|-------|--------------|
| DCP X | 90 mV |
| DCP Y | 88 mV |
| DCP Z | 89 mV |

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL **1810 MHz** **Typical SAR gradient: 10 % per mm**

| | | |
|---|---------------|---------------|
| Sensor Center to Phantom Surface Distance | 2.0 mm | 3.0 mm |
| SAR _{be} [%] Without Correction Algorithm | 4.5 | 3.5 |
| SAR _{be} [%] With Correction Algorithm | 0.2 | 0.4 |

TSL **5800 MHz** **Typical SAR gradient: 30 % per mm**

| | | |
|---|---------------|---------------|
| Sensor Center to Phantom Surface Distance | 2.0 mm | 3.0 mm |
| SAR _{be} [%] Without Correction Algorithm | 3.5 | 2.0 |
| SAR _{be} [%] With Correction Algorithm | 0.1 | 0.3 |

Sensor Offset

Probe Tip to Sensor Center **1.0 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

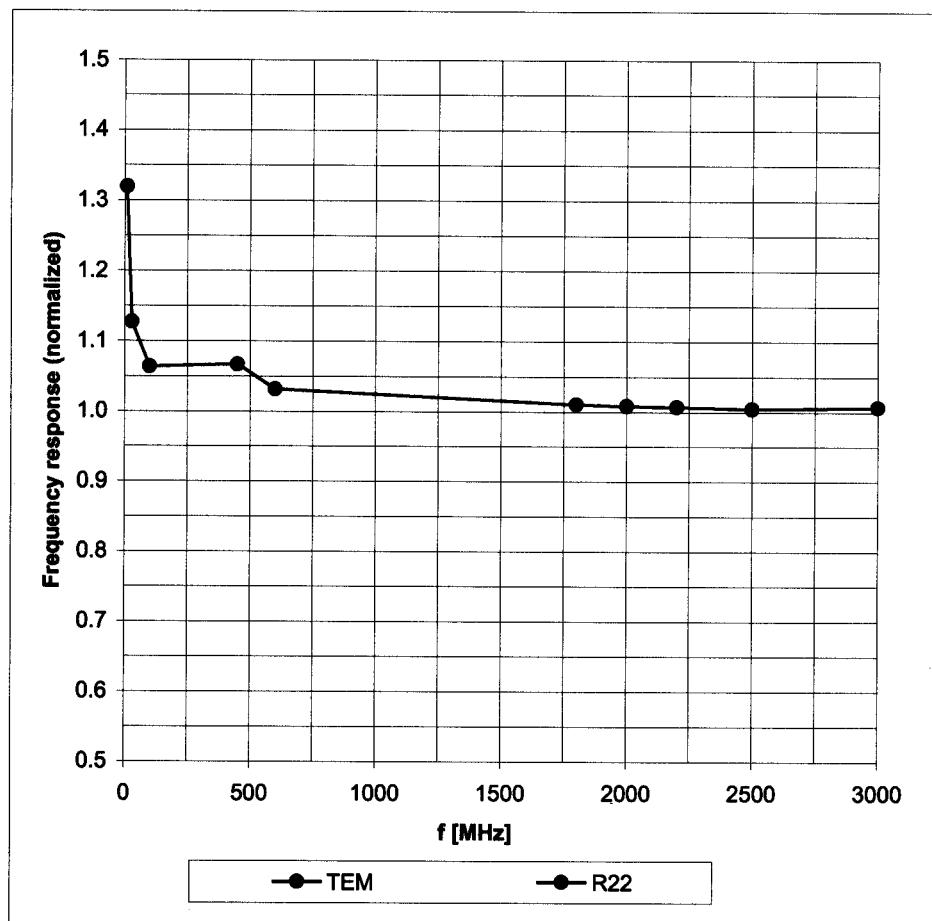


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

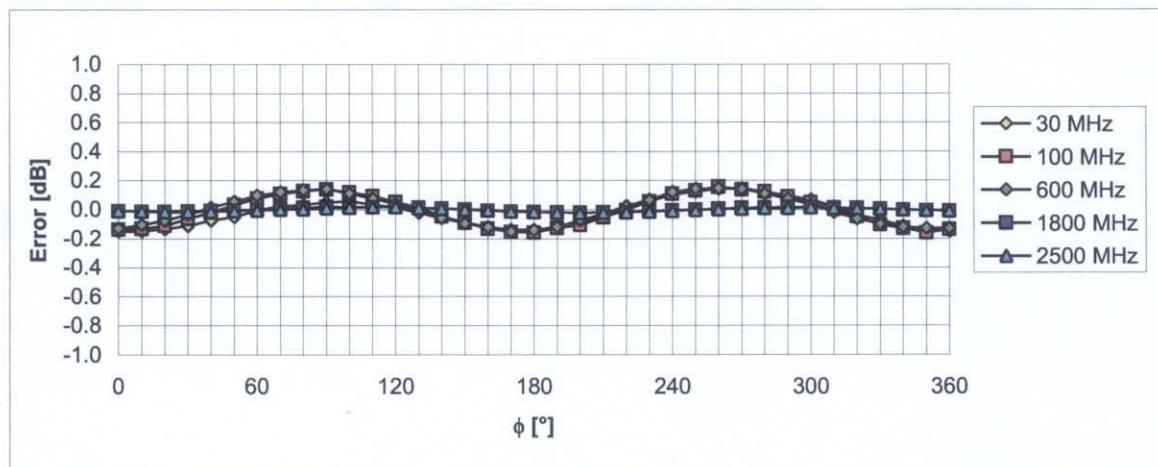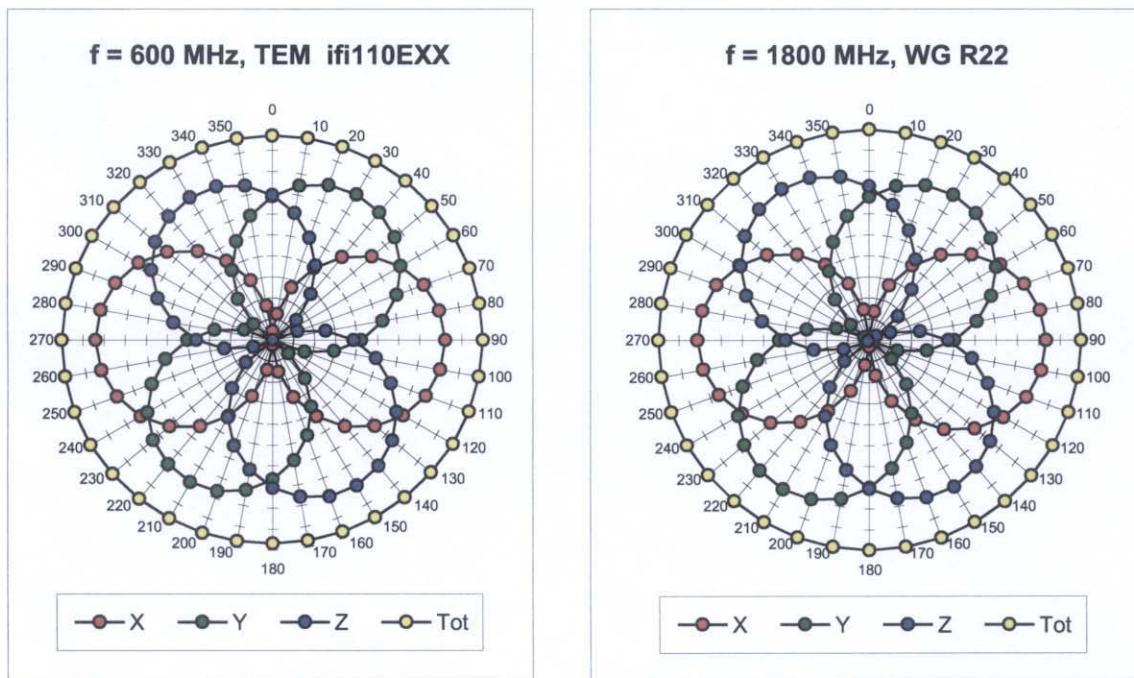


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800$ MHz)

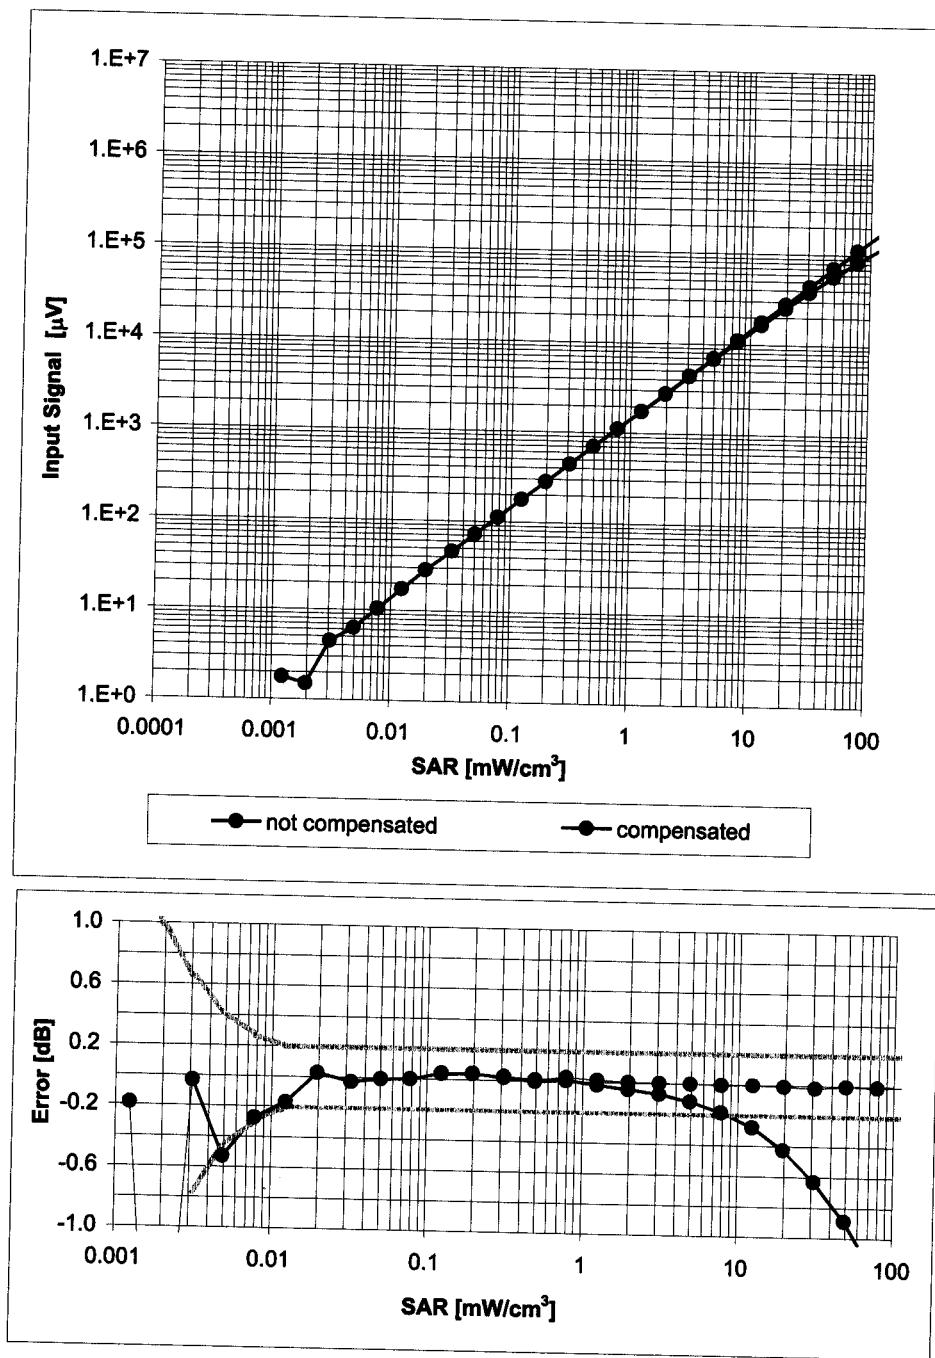

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

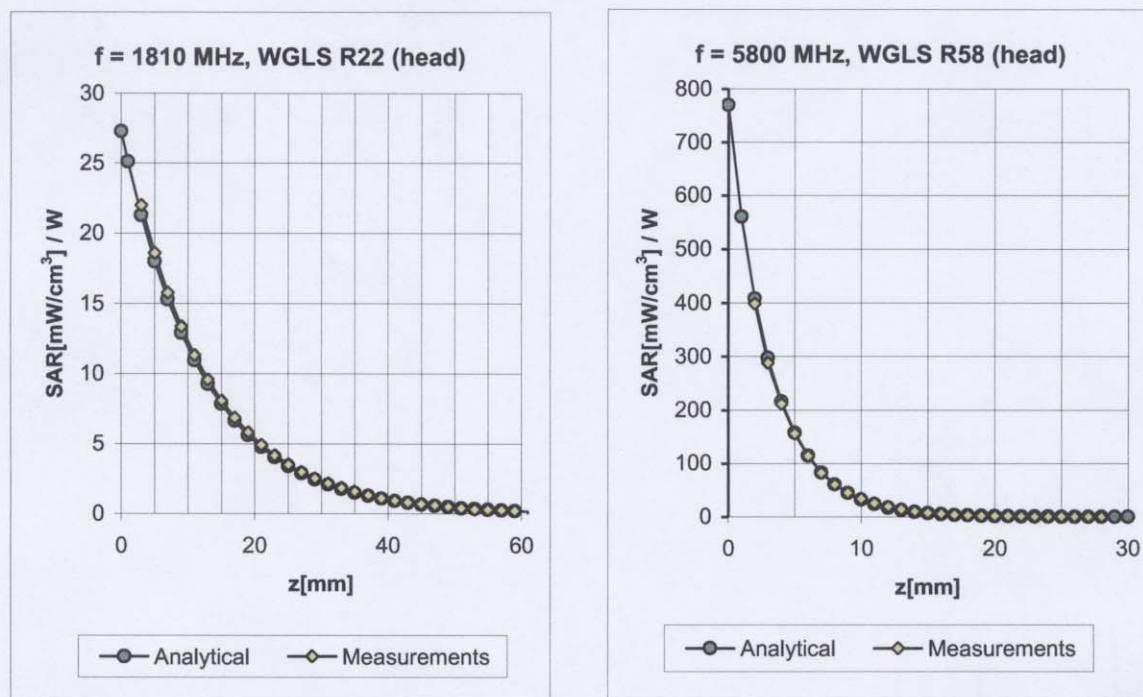


| f [MHz] | Validity [MHz] ^c | TSL | Permittivity | Conductivity | Alpha | Depth | ConvF | Uncertainty |
|---------|-----------------------------|------|----------------|----------------|-------|-------|-------|----------------------------|
| 1810 | $\pm 50 / \pm 100$ | Head | $40.0 \pm 5\%$ | $1.40 \pm 5\%$ | 0.20 | 1.01 | 7.02 | $\pm 11.0\% \text{ (k=2)}$ |
| 1950 | $\pm 50 / \pm 100$ | Head | $40.0 \pm 5\%$ | $1.40 \pm 5\%$ | 0.26 | 1.05 | 6.59 | $\pm 11.0\% \text{ (k=2)}$ |
| 2450 | $\pm 50 / \pm 100$ | Head | $39.2 \pm 5\%$ | $1.80 \pm 5\%$ | 0.44 | 1.00 | 6.37 | $\pm 11.8\% \text{ (k=2)}$ |
| 5800 | $\pm 50 / \pm 100$ | Head | $35.3 \pm 5\%$ | $5.27 \pm 5\%$ | 0.37 | 1.65 | 4.34 | $\pm 13.1\% \text{ (k=2)}$ |

| | | | | | | | | |
|------|--------------------|------|----------------|----------------|------|------|------|----------------------------|
| 1810 | $\pm 50 / \pm 100$ | Body | $53.3 \pm 5\%$ | $1.52 \pm 5\%$ | 0.24 | 1.06 | 6.85 | $\pm 11.0\% \text{ (k=2)}$ |
| 1950 | $\pm 50 / \pm 100$ | Body | $53.3 \pm 5\%$ | $1.52 \pm 5\%$ | 0.16 | 1.35 | 6.54 | $\pm 11.0\% \text{ (k=2)}$ |
| 2450 | $\pm 50 / \pm 100$ | Body | $52.7 \pm 5\%$ | $1.95 \pm 5\%$ | 0.42 | 1.00 | 6.31 | $\pm 11.8\% \text{ (k=2)}$ |
| 5200 | $\pm 50 / \pm 100$ | Body | $49.0 \pm 5\%$ | $5.30 \pm 5\%$ | 0.35 | 1.70 | 4.10 | $\pm 13.1\% \text{ (k=2)}$ |
| 5500 | $\pm 50 / \pm 100$ | Body | $48.6 \pm 5\%$ | $5.65 \pm 5\%$ | 0.32 | 1.70 | 3.95 | $\pm 13.1\% \text{ (k=2)}$ |
| 5800 | $\pm 50 / \pm 100$ | Body | $48.2 \pm 5\%$ | $6.00 \pm 5\%$ | 0.33 | 1.70 | 4.14 | $\pm 13.1\% \text{ (k=2)}$ |

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ, θ), $f = 900$ MHz

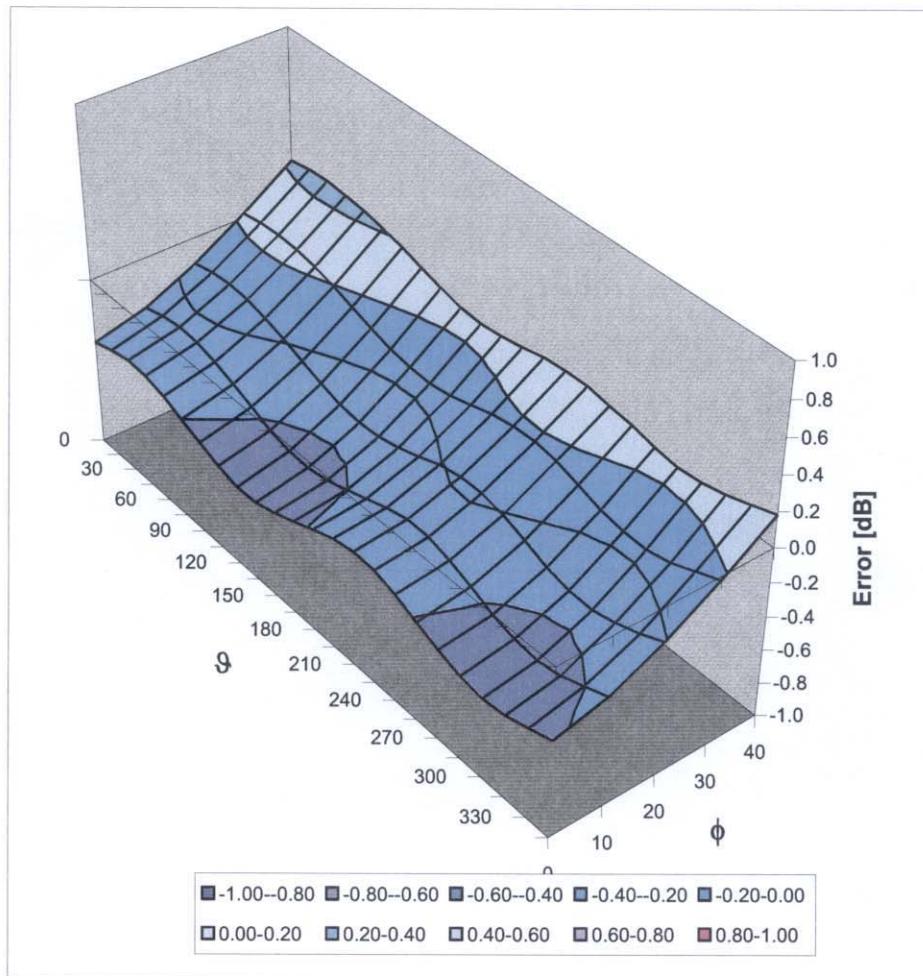

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

| | | | | |
|--|--|---|---|--|
|  Celltech <small>Testing and Engineering Services Ltd.</small> | <u>Date(s) of Evaluation</u> December 10, 2007 | <u>Test Report Serial No.</u> 120407AMW-T878-S15T | <u>Test Report Revision No.</u> Revision 1.0 |  ILAC-MRA  JAI ACCREDITED |
| | <u>Test Report Issue Date</u> December 14, 2007 | <u>Description of Test(s)</u> Specific Absorption Rate | <u>RF Exposure Category</u> General Population | |

APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY

| | | | | | | | |
|------------------------|----------------------------|---|------------------|-----------------------------------|------------|-------------------------|---|
| Company: | Uniden America Corporation | | FCC ID: | AMWUC518R | IC: | 513C-UC518 |  |
| Model(s): | DECT3080 | | DUT Type: | Portable UPSC/LE-PCS DECT Handset | | 1921.536 - 1928.448 MHz | |
| 2007 Celtech Labs Inc. | | This document is not to be reproduced in whole or in part without the prior written permission of Celtech Labs Inc. | | | | Page 44 of 44 | |

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

| | |
|-----------------------|--|
| Item | SAM Twin Phantom V4.0 |
| Type No | QD 000 P40 BA |
| Series No | TP-1002 and higher |
| Manufacturer / Origin | Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland |

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

| Test | Requirement | Details | Units tested |
|----------------------|---|--|-----------------------------|
| Shape | Compliance with the geometry according to the CAD model. | IT'IS CAD File (*) | First article, Samples |
| Material thickness | Compliant with the requirements according to the standards | 2mm +/- 0.2mm in specific areas | First article, Samples |
| Material parameters | Dielectric parameters for required frequencies | 200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05. | Material sample TP 104-5 |
| Material resistivity | The material has been tested to be compatible with the liquids defined in the standards | Liquid type HSL 1800 and others according to the standard. | Pre-series, First article |

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9

(*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date

18.11.2001

Signature / Stamp

Schmid & Partner
Engineering AG

Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79