

EXHIBIT - 5

MEASUREMENT PROCEDURE AND TEST RESULTS



GRN 5/5/98

COMPATIBLE ELECTRONICS
REPORT NO. B80418D1
DATE: APRIL 9, 1998

*FCC PART 15 SUBPART C
TEST REPORT*
for
**900 MHZ SPREAD SPECTRUM
CORDLESS TELEPHONE
Model: EXS9110**

Prepared for
UNIDEN AMERICA CORPORATION
ENGINEERING SERVICES OFFICE
216 JOHN STREET
PO BOX 580, LAKE CITY, SOUTH CAROLINA 29560

Prepared by
COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500

DATES OF TEST: APRIL 13, 14, 15, AND 17, 1998

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	20	79	11	8	3	2	123

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

Report Number: B80418D1



TABLE OF CONTENTS

DESCRIPTION	PAGE
SUMMARY OF TEST REPORT	1
1. PURPOSE	2
2. DESCRIPTION OF TEST SAMPLE	3
3. PROCESSING GAIN	4
4. TRANSMITTER	4
5. TRANSMITTER POWER	5
6. CHANNEL NUMBER AND FREQUENCIES	5
7. CHIPPING RATE	5
8. SPREADING GAIN	6
9. ANTENNA GAIN	6
10. TEST EQUIPMENT	6
Table 1 List of Test Equipment	7
11. TEST PROCEDURE	8
Conducted Test	8
Radiated Test	10
Processing Gain	11
Transceiver Requirements Per Section 15.247.	12
12. TEST RESULTS	13
Table 2 Conducted Emission Results - Base	13
Table 3 Radiated Emission Results (Spurious) - Base	13
Table 4 Radiated Emission Results (Spurious)- Handset	14
Table 5 Radiated Emission Results (Harmonics)- Base	14
Table 6 Radiated Emission Results (Harmonics) - Handset	15
13. SAMPLE CALCULATIONS	16
14. CONCLUSION	17



LIST OF FIGURES

FIGURE 1 - Conducted Test Setup

FIGURE 1a - Processing Gain Setup

FIGURE 2 - Radiated Test Site Layout

APPENDICES

- APPENDIX A - DATA SHEETS
- APPENDIX B - EUT CONFIGURATION AND CABLE INFORMATION
- APPENDIX C - ANTENNA FACTORS AND EFFECTIVE GAIN FACTORS
- APPENDIX D MODIFICATIONS TO THE EUT
- APPENDIX E ADDITIONAL MODELS COVERED UNDER THIS REPORT



REPORT NO. B80418D1
DATE: APRIL 24, 1998

SUMMARY OF TEST REPORT

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent consulting firm. The test report is based on the emission data measured by Compatible Electronics personnel according to the ANSI C63.4 1992 measurement procedure. The site attenuation measurement data for the firm's open field test site is filed with FCC, according to the ANSI C63.4 1992. The test results, provided with this report, indicate that the electromagnetic emissions from the equipment tested are within the specification limits defined by FCC Title 47, Part 15, Subpart C. Section 15.247.

Device Tested: 900 MHz Spread Spectrum Cordless Phone
Model: EXS9110

Manufacturer: Uniden America Corporation
Engineering Service Office, 216 John Street,
PO Box 580 Lake City, South Carolina, 29560

Frequency Ranges of the Test: Conducted: 450 kHz to 30 MHz
Radiated: 10 kHz to 9.28 GHz

Test Location: 114 Olinda Drive, Brea, California 92823

Test Dates: April 13, 14, 15, and 17, 1998

The measurement data and conclusions are a true and accurate representation of the electromagnetic emissions characteristics of the test sample described in this report.

Report prepared by:

Kyle Fujimoto
Test Engineer
Compatible Electronics, Inc.

Approved by:

Scott McCutchan
Lab Manager
Compatible Electronics, Inc.



1. PURPOSE

This test report describes the electromagnetic emissions tests performed and the results obtained on the equipment described herein, based on the emission data measured by Compatible Electronics personnel. The measurements were performed according to the ANSI C63.4 1992 measurement procedure to determine whether the electromagnetic emissions from the equipment tested are within the specification limits defined by FCC Title 47, Part 15, Subpart C., Section 15.247.



2. DESCRIPTION OF TEST SAMPLE

The components of the EUT were tested separately.

Specifics of the EUT and Peripherals Tested

Handset being tested: The 900 MHz Spread Spectrum Cordless Phone-Handset Model: EXS9110 (EUT) was placed on the wooden table and tested in three orthogonal axis. The low (channel 1), medium (channel 10), and high (channel 20) channels were tested. The handset was transmitting to and receiving from the 900 MHz Spread Spectrum Cordless Phone base. The EUT was investigated for emissions while off hook. The radiated data was taken in this mode of operation. All initial investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in Appendix B.

Base being tested: The 900 MHz Spread Spectrum Cordless Phone - Base Model: EXS9110 (EUT) was placed on the wooden table. The low (channel 1), medium (channel 10), and high (channel 20) channels were tested. The base was connected to a line simulator and AC adapter via its RJ-11 and power ports, respectively. The line simulator was connected to the Comdial telephone. The base was transmitting and receiving from the 900 MHz Spread Spectrum Cordless Phone handset. The 900 MHz Spread Spectrum Cordless Phone handset was also used to dial out a number on the simulator that caused the Comdial telephone to ring. The conducted as well as radiated data was taken in this mode of operation. All initial investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in Appendix B.



3. PROCESSING GAIN

The Processing Gain was measured using the CW jamming margin method. Figure 1a shows the test configuration. The test consists of stepping a signal generator in 50 kHz increments across the passband of the system (up to 750 kHz away from the center frequency). The passband of the system is 1.4 MHz (± 700 kHz). At each point, the generator level required to produce the recommended Bit Error Rate (BER) (Set at BER=10 to the negative third power) is recorded. This level is the jamming level. The output power of the transmitter unit is measured at the same point. The Jammer to Signal (J/S) ratio is then calculated. Discard the worst 20% of the J/S data point. The lowest remaining J/S ratio is used to calculate the processing gain. The maximum implementation loss a system can claim in calculating processing gain is 2 dB. The equation to calculate the processing gain (Gp) is the following:

$$G_p = (S/N)_o + M_j + L_{sys}$$

Where L_{sys} = system implementation loss = 2dB

M_j = jamming margin (J/S) in dB,

$(S/N)_o$ = signal to noise ratio required for a DBPSK system with BER of 10 to the negative third power.

The theoretical GP is 11 dB

4. TRANSMITTER

The transmitter takes baseband data, high pass filters it to remove any DC contributed by bias networks, then lowpass filters it to provide spectral shaping. After filtering, the resultant signal is modulated to the synthesized RF carrier. The modulated signal is then amplified to one of the three transmit power levels. The harmonics of the amplified signal are removed with a 1.2 GHz lowpass filter. Finally, the signal is routed through the T/R switch for transmission by the antenna.



5. TRANSMITTER POWER

Transmit power is herein defined as the power delivered to a 50 Ohm load at the antenna port of the T/R switch.

Power Level	Power	Accuracy
high	18 dBm	+2/ -2 dB
medium	9 dBm	+3/ -3 dB
low	-1 dBm	+3/ -3 dB

6. CHANNEL NUMBER AND FREQUENCIES

The RF channels occupy the frequency band 904.2-925.8 MHz and are numbered 1 to 20.

Channel Number	Channel center Frequency (MHz)
1	904.2
2	904.8
3	906.0
4	907.2
5	908.4
6	909.6
7	910.8
8	912.0
9	913.2
10	914.4
11	915.6
12	916.8
13	918.0
14	919.2
15	920.4
16	921.6
17	922.8
18	924.0
19	925.2
20	925.8

7. CHIPPING RATE

A 12-chip spreading code is used. The spreading code cyclic duration is 12 times that of the encoded data. The code starts and stops on encoded bit boundaries.



8. SPREADING GAIN

The spreading gain is 11 dB.

9. ANTENNA GAIN

The antenna gain is +3.34 dBi for the base, and +1.74 dBi for the handset.

10. TEST EQUIPMENT

The test equipment used during the test described in this report are listed in Table 1.

Test Equipment Modes and Settings

Conducted Test

The HP 8566B spectrum analyzer was used as a measuring meter along with the HP 85650A quasi-peak adapter. The data was collected by the spectrum analyzer in peak detect mode with the "Max Hold" feature activated. The quasi-peak detection was used only where indicated in the data sheets. A 10 dB attenuation pad was used for the spectrum analyzer input stage protection and the program settings were adjusted accordingly to indicate the actual reading in the program output. One LISN output was read by the HP 8566B spectrum analyzer at a time while the output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for the conducted emissions test was 9 kHz.

Radiated Test

The HP 8566B spectrum analyzer was used as a measuring meter along with the HP 85650A quasi-peak adapter.

The spectrum analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. The quasi-peak detection was used only for those readings which are marked accordingly in the data sheet. The effective measurement bandwidth used for the radiated emissions test was 200 Hz from 10 kHz to 150 kHz, 9 kHz from 150 kHz to 30 MHz, 120 kHz from 30 MHz to 1 GHz, and 1 MHz from 1 GHz to 9.28 GHz.

Broadband loop, biconical, log periodic, and horn antennas were used as transducers during the measurement. The frequency spans were wide (10 - 150 kHz, 150 - 540 kHz, 540 kHz - 1.6 MHz, 1.6 - 5 MHz, 5 - 10 MHz, 10 - 30 MHz, 30 - 88 MHz, 88 - 216 MHz, 216 - 300 MHz, 300 MHz - 1 GHz, and 1 GHz - 9.8 GHz) during preliminary investigations. However, the final data was taken with a frequency span of 1 MHz. Furthermore, the frequency span was reduced during the preliminary investigations as deemed necessary.



TABLE 1 LIST OF TEST EQUIPMENT

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
Spectrum Analyzer	Hewlett Packard	8566B	2729A04566	July 2, 1997	1 Year
Preamplifier	Com Power	PA-102	1017	February 16, 1998	1 Year
Quasi-Peak Adapter	Hewlett Packard	85650A	2521A00924	June 16, 1997	1 Year
RF Attenuator	Com-Power	A-410	1602	November 25, 1997	1 Year
LISN	Com Power	LI-200	1764	January 3, 1998	1 Year
LISN	Com Power	LI-200	1771	January 3, 1998	1 Year
LISN	Com Power	LI-200	1775	January 3, 1998	1 Year
LISN	Com Power	LI-200	1780	January 3, 1998	1 Year
Biconical Antenna	Com Power	AB-100	1548	March 24, 1998	1 Year
Log Periodic Antenna	Com Power	AL-100	1012	February 13, 1998	1 Year
Computer	Hewlett Packard	HP98561A	2522A05178	N/A	N/A
Microwave Amplifier	Com-Power	8349B	2548A00432	February 18, 1998	N/A
Horn Antenna	Antenna Research	DRG-118/A	1053	December 8, 1995	N/A
Loop Antenna	Com-Power	AL-130	25309	February 5, 1998	N/A
Computer	Sony	PCV-240	5104422	N/A	N/A
Plotter	Hewlett Packard	7440A	8726K38417	N/A	N/A
Signal Generator	Giga-Tronics	6062A	9620906	June 16, 1997	1 Year
Microwave Amplifier	Com-Power	PA-122	001	March 31, 1998	N/A

Report No: B80418D1



11. TEST PROCEDURE

Conducted Test

Test Setup

The EUT was set up as a table top equipment as shown in Figure 1. The test data was collected using the Hewlett Packard spectrum analyzer Model: 8566B and the Hewlett-Packard quasi-peak adapter Model: 85650A.

The conducted test for the table top EUT was performed on a 1.0 by 1.5 meter wooden test table. (see Figure 1). The test bench has its top surface 0.8 meter above the ground plane. The EUT is powered through the Line Impedance Stabilization Network (LISN) bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up on the rear of the wooden test bench 40 cm away from the vertical conductive surface and at least 80 cm away from the LISNs as specified in ANSI C63.4 1992. The excess power cord was wrapped in a figure 8 pattern to form a bundle approximately 8 cms in length.

Preliminary Conducted Test

The initial test data was taken in manual mode to investigate the worst emission configuration. While scanning the frequencies in the ranges of 0.45 MHz to 1.6 MHz, 1.6 MHz to 5 MHz and 5 MHz to 30 MHz, the conducted emissions from the EUT were investigated for maximizing operating mode as well as cable placement. Once a predominant frequency (within 12 dB of the limit) was found, it was more closely examined with the spectrum analyzer span adjusted to 1 MHz.



Final Conducted Data

The EUT configuration was set for the highest emission frequency and data was collected under program control by the HP 9153B controller for the conducted test. The data was collected by the HP controller in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave.

The spectrum analyzer collected the maximum peak readings over each spectrum. The six highest emission levels and corresponding frequencies were sorted by the computer and are listed in Table 2.0.



Radiated Test

The open field test site of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is set up according to the ANSI C63.4 1992 and the site attenuation data has been filed with the FCC. Figure 2 shows the layout of the open field test site. The turntable is remote controlled using a motor. The turn table supporting the EUT permits EUT rotation over 360 degrees to determine the highest emission levels. The antenna mast allows height variation of the antenna from 1 meter to 4 meters.

Preliminary Testing and Monitoring

Preliminary testing was done at a distance of 3 meters to determine the predominant frequencies from the system and to investigate the EUT configuration that produced the maximum levels of emissions. An open field test site was used for the preliminary investigations. Broad band antennas were used to scan large frequency bands while manipulating cables. All significant frequencies were further examined carefully at a reduced frequency span on the spectrum analyzer, while optimizing the cables, and changing the antenna height and EUT orientation. The EUT was tested at a 3 meter test distance to obtain final test data as described below.

Final Radiated Test

The receiving antenna was mounted on the antenna positioning mast, which is motor controlled and allows antenna height variation from 1 meter to 4 meters above the ground plane. The antenna height was varied to find the highest level of radiated emission at each frequency found during the preliminary test described above. The six highest emission readings and the corresponding frequencies for non-harmonic spurious emissions (excluding the fundamental) are listed in Table 3.0 for the base and Table 4.0 for the handset. The six highest emission readings and the corresponding frequencies for the fundamental and harmonics are listed in Table 5.0 for the base, Table 6.0 for the handset.



Processing Gain - base station output to handset input

The base was connected by its test connector (an internal serial port) to the communications analyzer (computer) via com port 1. 43.3 dB of attenuation was placed on the output of the base. The output of the base was combined with the output of the signal generator through a combiner. The handset was connected by its test connector (an internal serial port) to the communications analyzer (computer) via com port 2. The signal generator was stepped in 50 kHz increments across the passband (\pm of the fundamental transmit frequency). The Bit Error Rate used was 0.1%. When this error rate was achieved (displayed on the computer), the reading of the signal generator was taken. This reading was then subtracted from the signal level of the base station (while adding in the combiner loss and signal generator calibration factor) to obtain the J/S ratio. The J/S ratio was then combined with the system loss (2 dB) and signal to noise ratio (8 dB) of the unit to obtain the processing gain.

Processing Gain - handset output to base station input

The handset was connected by its test connector (an internal serial port) to the communications analyzer (computer) via com port 1. 43.3 dB of attenuation was placed on the output of the handset. The output of the handset was combined with the output of the signal generator through a combiner. The base was connected by its test connector (an internal serial port) to the communications analyzer (computer) via com port 2. The signal generator was stepped in 50 kHz increments across the passband of the fundamental transmit frequency. The Bit Error Rate used was 0.1%. When this error rate was achieved (displayed on the computer), the reading of the signal generator was taken. This reading was then subtracted from the signal level of the base station (while adding in the combiner loss and signal generator calibration factor) to obtain the J/S ratio. The J/S ratio was then combined with the system loss (2 dB) and signal to noise ratio (8 dB) of the unit to obtain the processing gain.



Transceiver Requirements Per Section 15.247 (FCC- Subpart C).

Both the handset and the base have a bandwidth of at least 500 kHz. The bandwidth is measured at the -6dB points. (Please see data sheets located in Appendix A). [section 15.247 (a)(2)]

Both the handset and the base have a peak output power of less than 1 Watt (30 dBm) [section 15.247 (b)]

No radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency is within 20 dB of the limit or exceeds the general radiated emission limits specified in section 15.209(a) while using a 100 kHz bandwidth. (Please see the data sheets located in Appendix A.) [section 15.247 (c)].

The spectral density output averaged over any 1 second interval using a resolution bandwidth of 3 kHz is not greater than 8dBm for both the handset and the base. (Please see data sheets located in Appendix A.) [section 15.247 (d)].

The processing gain of a direct sequence system is at least 10 dB. (Please see data sheets located in Appendix A) [section 15.247 (e)]



12. TEST RESULTS

Table 2.0 CONDUCTED EMISSION RESULTS
900 MHz Spread Spectrum Cordless Phone
BASE - MODEL: EXS9110

Frequency MHz	Emission Level* dBuV	Specification Limit dBuV	Delta dB
.4576	40.2	48.0	-7.2
.4732	41.1	48.0	-6.9
.5082	40.2	48.0	-7.8
.5367	40.3	48.0	-7.7
.5692	40.6	48.0	-7.4
.5812	41.1	48.0	-6.9

Table 3.0 RADIATED EMISSION RESULTS (SPURIOUS)
900 MHz Spread Spectrum Cordless Phone
BASE - MODEL: EXS9110

Freq. MHz	Meter Reading dBuV	Effective Gain dB	Ant. Factor dB	Corr'd Reading dBuV	Spec Limit dBuV	Delta dB
201.64	60.10	37.58	15.84	38.36	43.50	-5.14
220.84	62.20	37.35	16.30	41.15	46.00	-4.85
364.85	61.10	36.79	15.89	40.20	46.00	-5.80
384.04	59.90	36.59	18.08	41.39	46.00	-4.62
403.24	55.80	36.47	19.61	38.94	46.00	-7.06
921.63	50.20	33.09	23.17	40.27	46.00	-5.73

* Complete emissions data are given in Appendix A of this report.

** The effective gain factor includes the cable loss. The correction factors for the antenna and effective gain are attached in Appendix C of this report.



Table 4.0

RADIATED EMISSION RESULTS (SPURIOUS)
 900 MHz Spread Spectrum Cordless Phone
 HANDSET – MODEL: EXS9110

Freq. MHz	Meter Reading dBuV	Effective Gain dB	Ant. Factor dB	Corr'd Reading dBuV	Spec Limit dBuV	Delta DB
403.23	52.80	36.47	19.61	35.94	46.00	-10.06
441.63	56.30	36.08	16.15	36.37	46.00	-9.63
489.63	56.20	36.16	16.35	36.39	46.00	-9.61
508.84	55.30	36.02	16.49	35.77	46.00	-10.23
528.03	55.50	35.64	16.26	36.12	46.00	-9.88
812.69	47.70	33.60	21.98	36.08	46.00	-9.92

Table 5.0

RADIATED EMISSION RESULTS (HARMONICS)
 900 MHz Spread Spectrum Cordless Phone
 BASE – MODEL: EXS9110

Freq. MHz	Meter Reading dBuV	Effective Gain dB	Ant. Factor dB	Corr'd Reading dBuV	Spec Limit dBuV	Delta dB
3616	38.0#	17.0	29.6	50.6	54.0	-3.4
3658	38.9#	17.0	29.6	51.5	54.0	-2.5
3703	38.9#	17.0	29.6	51.5	54.0	-2.5
4629	32.4#	13.5	30.9	49.8	54.0	-4.2
7315	34.8#	20.6	36.8	51.0	54.0	-3.0
8332	31.3#	18.0	37.1	50.4	54.0	-3.6

- * Complete emissions data are given in Appendix A of this report.
- ** The effective gain factor includes the cable loss. The correction factors for the antenna and effective gain are attached in Appendix C of this report.
- # Average Measurement.



Table 6.0

RADIATED EMISSION RESULTS (HARMONICS)
900 MHz Spread Spectrum Cordless Phone
HANDSET - MODEL: EXS9110

Freq. MHz	Meter Reading dBuV	Effective Gain dB	Ant. Factor dB	Corr'd Reading dBuV	Spec Limit dBuV	Delta dB
3616	38.7#	17.0	29.6	51.3	54.0	-2.7
3704	38.6#	17.0	29.6	51.2	54.0	-2.8
4521	33.0#	13.5	30.9	50.4	54.0	-3.6
7315	34.2#	20.6	36.8	50.4	54.0	-3.6
8138	31.3#	18.0	37.1	50.4	54.0	-3.6
8219	31.1#	18.0	37.1	50.2	54.0	-3.8

- * Complete emissions data are given in Appendix A of this report.
- ** The effective gain factor includes the cable loss. The correction factors for the antenna and effective gain are attached in Appendix C of this report.
- # Average Measurement.



13. SAMPLE CALCULATIONS

The use of the Com-Power Preamplifier Model: PA-102, the Hewlett-Packard Microwave Amplifier Model: 8349B, and the Com-Power Microwave Amplifier Model: PA-122 during the radiated emissions test requires that the effective gain must be subtracted from the spectrum analyzer (meter) reading. In addition, a correction factor for the antenna, amplifier, cable loss, and a distance factor, if any, must be applied to the meter reading before a true field strength reading can be obtained.

The equation can be derived in the following manner:

$$\frac{\text{Corrected}}{\text{meter reading}} = \text{meter reading} + F - G$$

where, F = antenna factor
 G = effective gain =
 (amplifier gain-cable loss)

The correction factors for the antenna and the effective gain are attached in Appendix C of this report. The data sheets are attached in Appendix A.

There is no correction factor for the distance because the final data is always taken at 3 meters which is the FCC specification test distance.



14.

CONCLUSION

The 900 MHz Spread Spectrum Cordless Phone Model: EXS9110 meets all of the specification limits defined in FCC Title 47, Part 15, Subpart C Section 15.247.


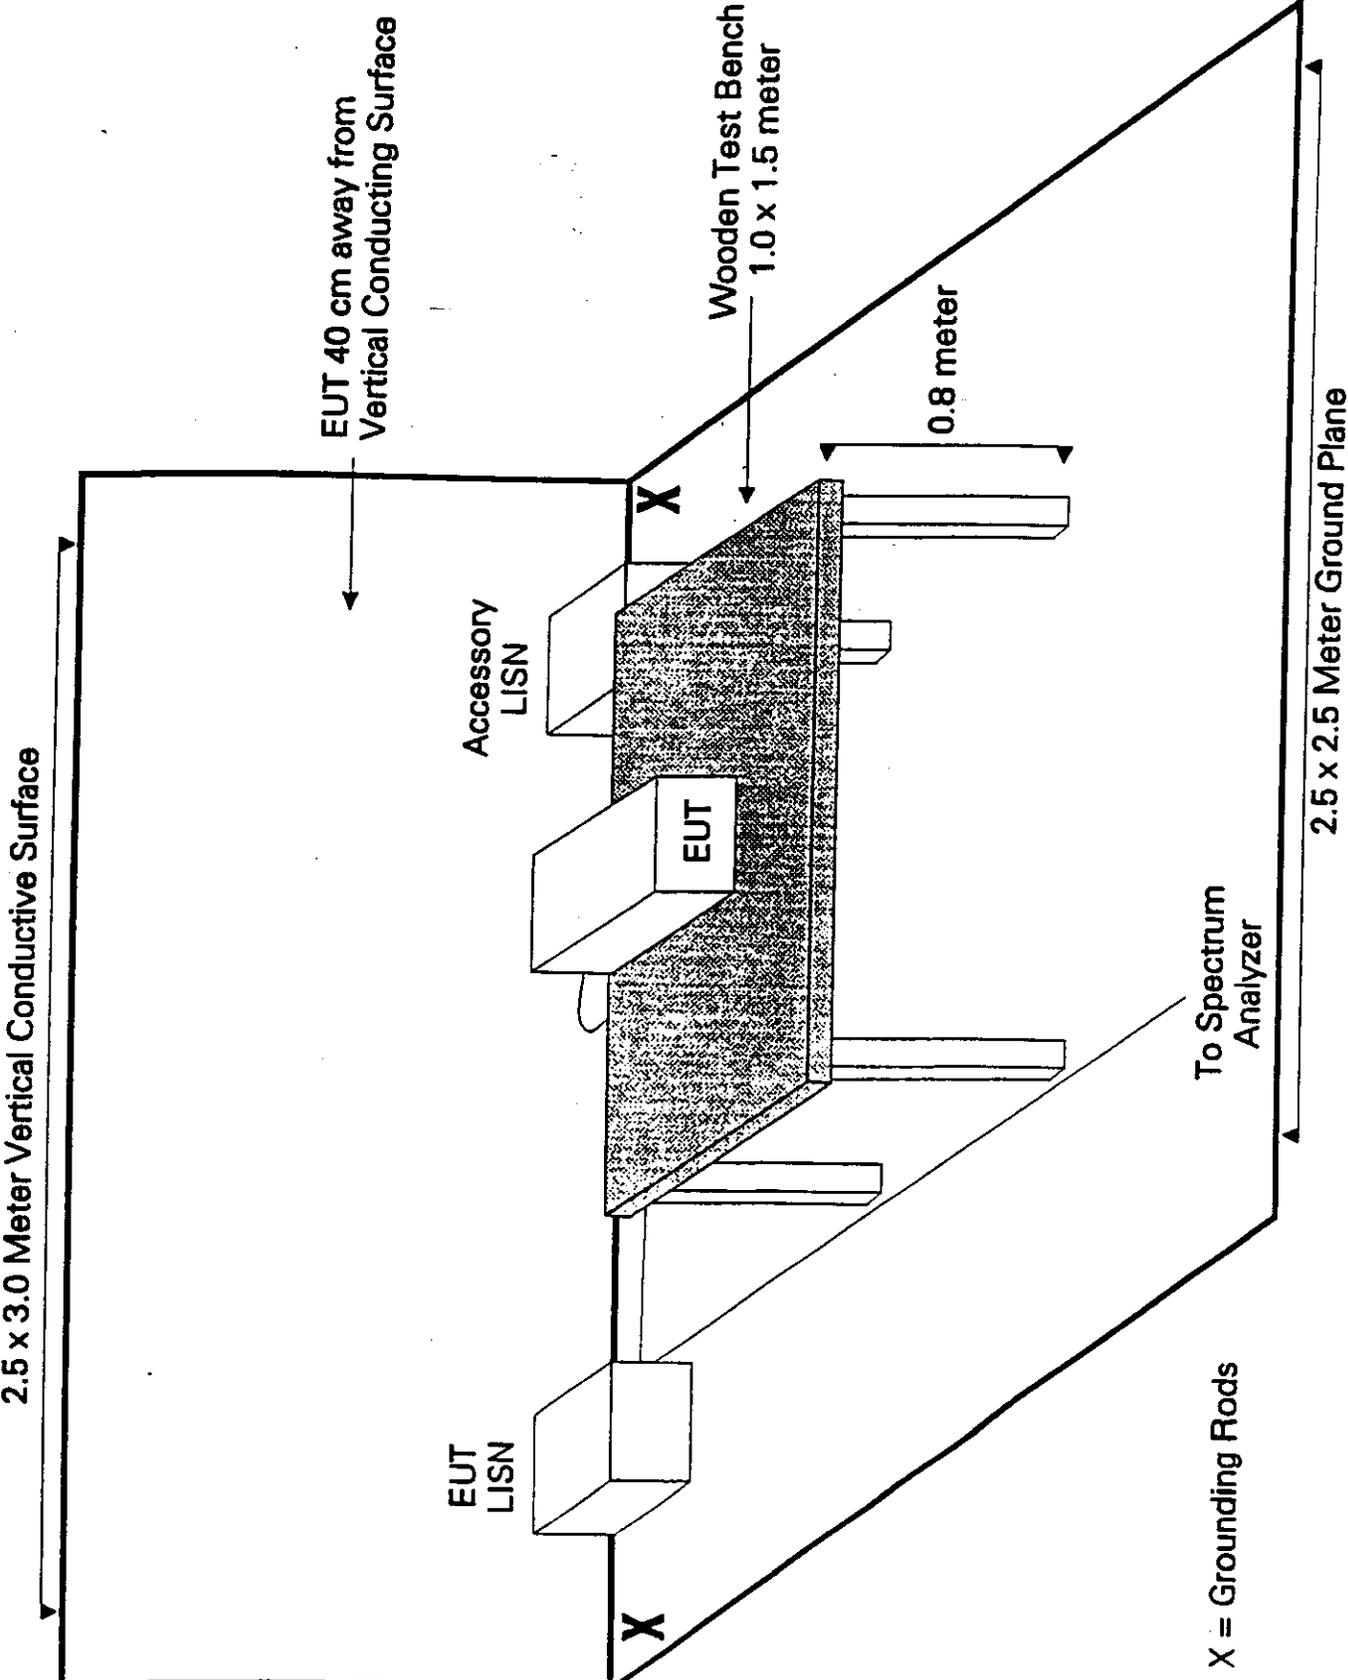


FIGURE 1 - CONDUCTED EMISSIONS TEST SETUP SITE D



X = COPPER RODS USED FOR GROUNDING
D = DISTANCE

Figure 2: Plot Map and Layout of Test Site "D"

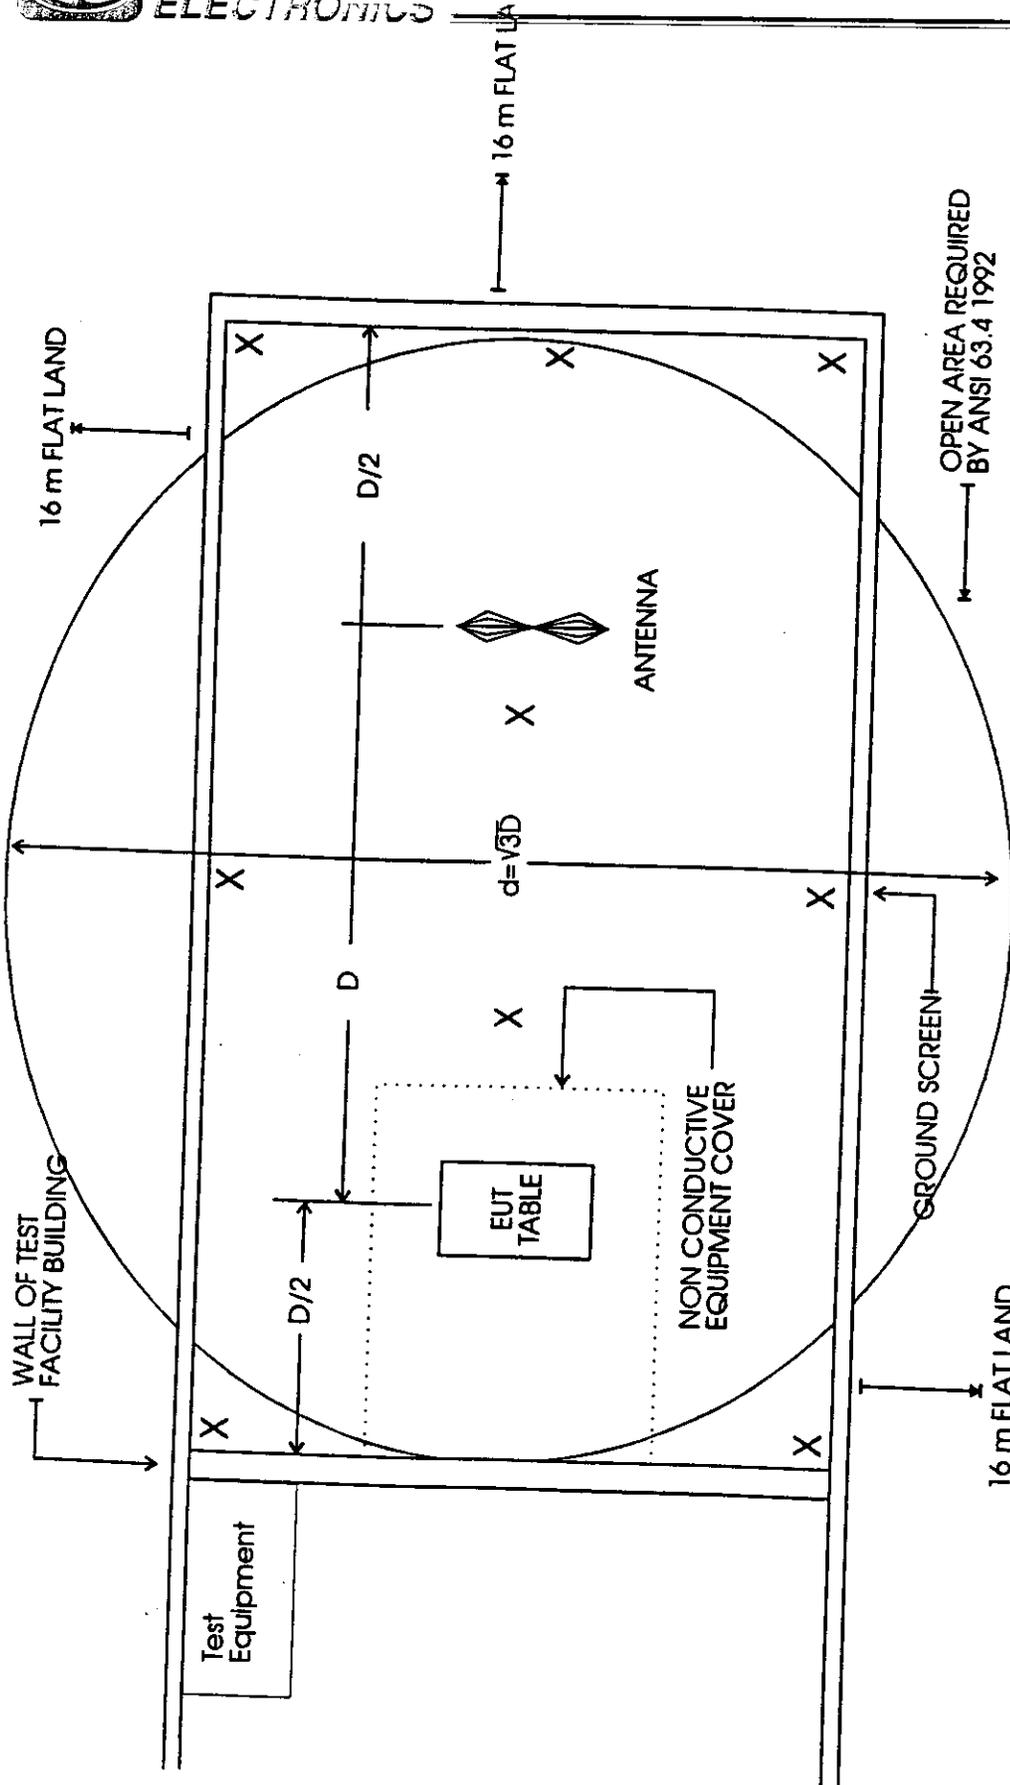

APPENDIX A

DATA SHEETS



SECTION 15.247 (a)(2)

***BANDWIDTH AT -6dB POINTS
FOR HANDSET***


PAGE A3 - CHANNEL 1

PAGE A4 - CHANNEL 10

PAGE A5 - CHANNEL 20

4-14-98
MKR Δ 1.385 MHz
-0.20 dB

BANDWIDTH OF HANDSET CH. 1
REF 30.0 dBm ATTN 40 dB

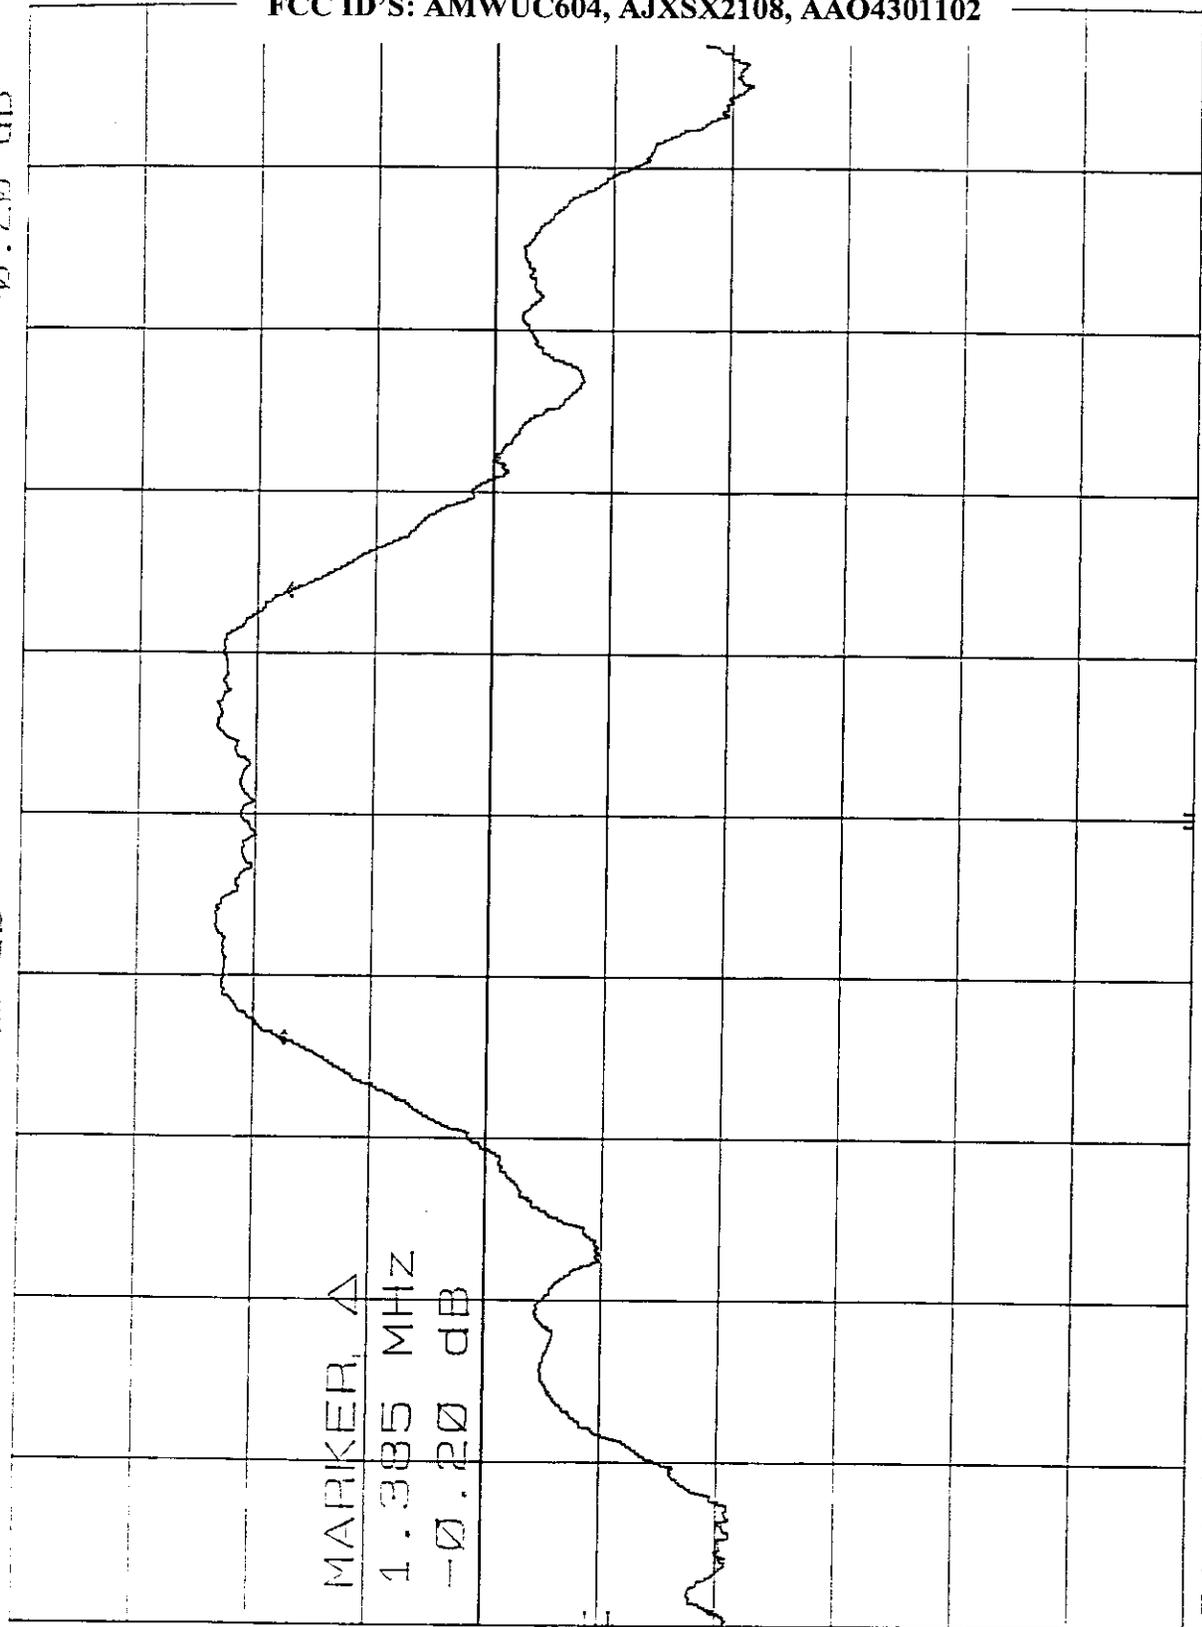

MARKER, Δ
1.385 MHz
-0.20 dB

DL
-10.0
dBm


CORR'D

CENTER 904.20 MHz
RES BW 100 KHZ
VSW 300 KHZ
SPAN 5.00 MHz
SWP 20.0 msec

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

4-14-98

BANDWIDTH OF HANDSET CH. 10
REF 20.0 dBm ATTEN 30 dB
MKR Δ 1.395 MHz
0.20 dB

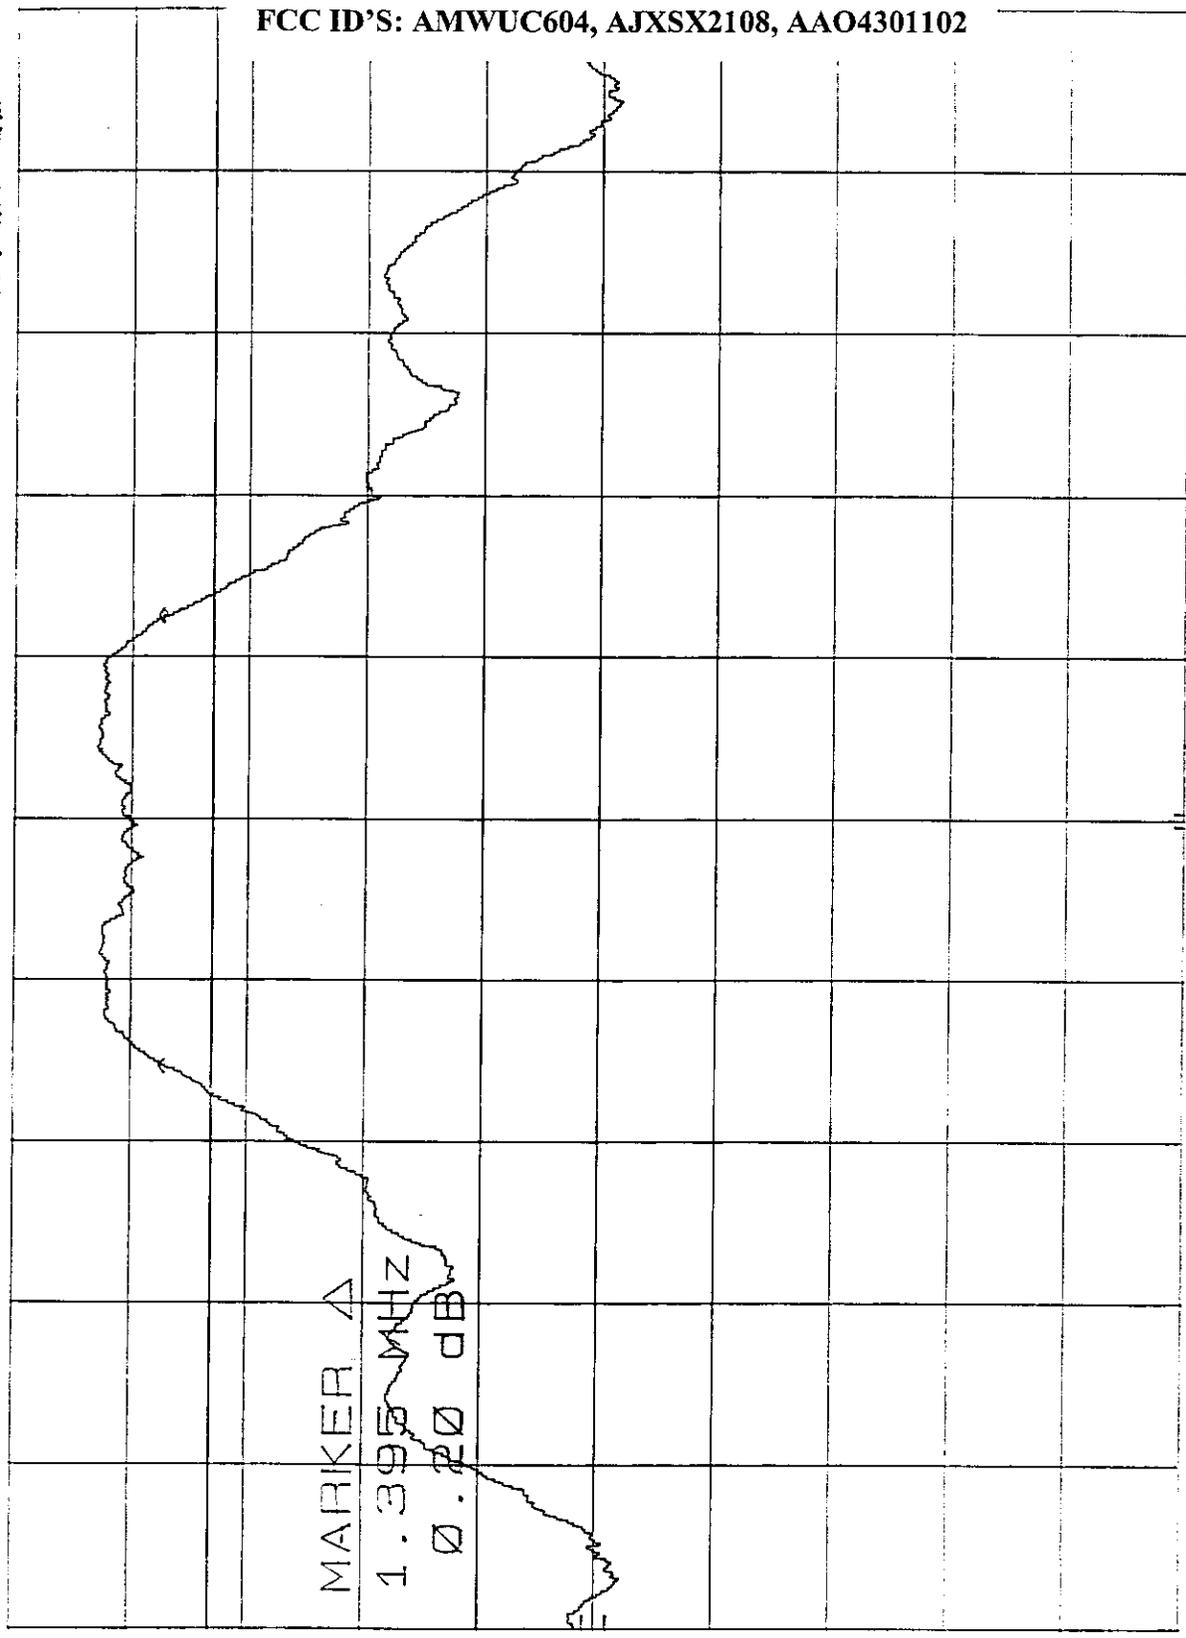

SPAN 51.00 MHz
SWP 20.0 msec

VBW 300 KHz

CENTRE 944.46 MHz
RES BW 100 KHz

DL 3.0 dBm


CORRECT

10 dB

FCC ID'S: AMWUC604, AJXSX2198, AAO4301102

4-14-98

147
BANDWIDTH OF HANDSET CH. 20
REF: 20.0 dBm ATTEN 30 dB
MKR Δ 1.395 MHz
0.10 dB

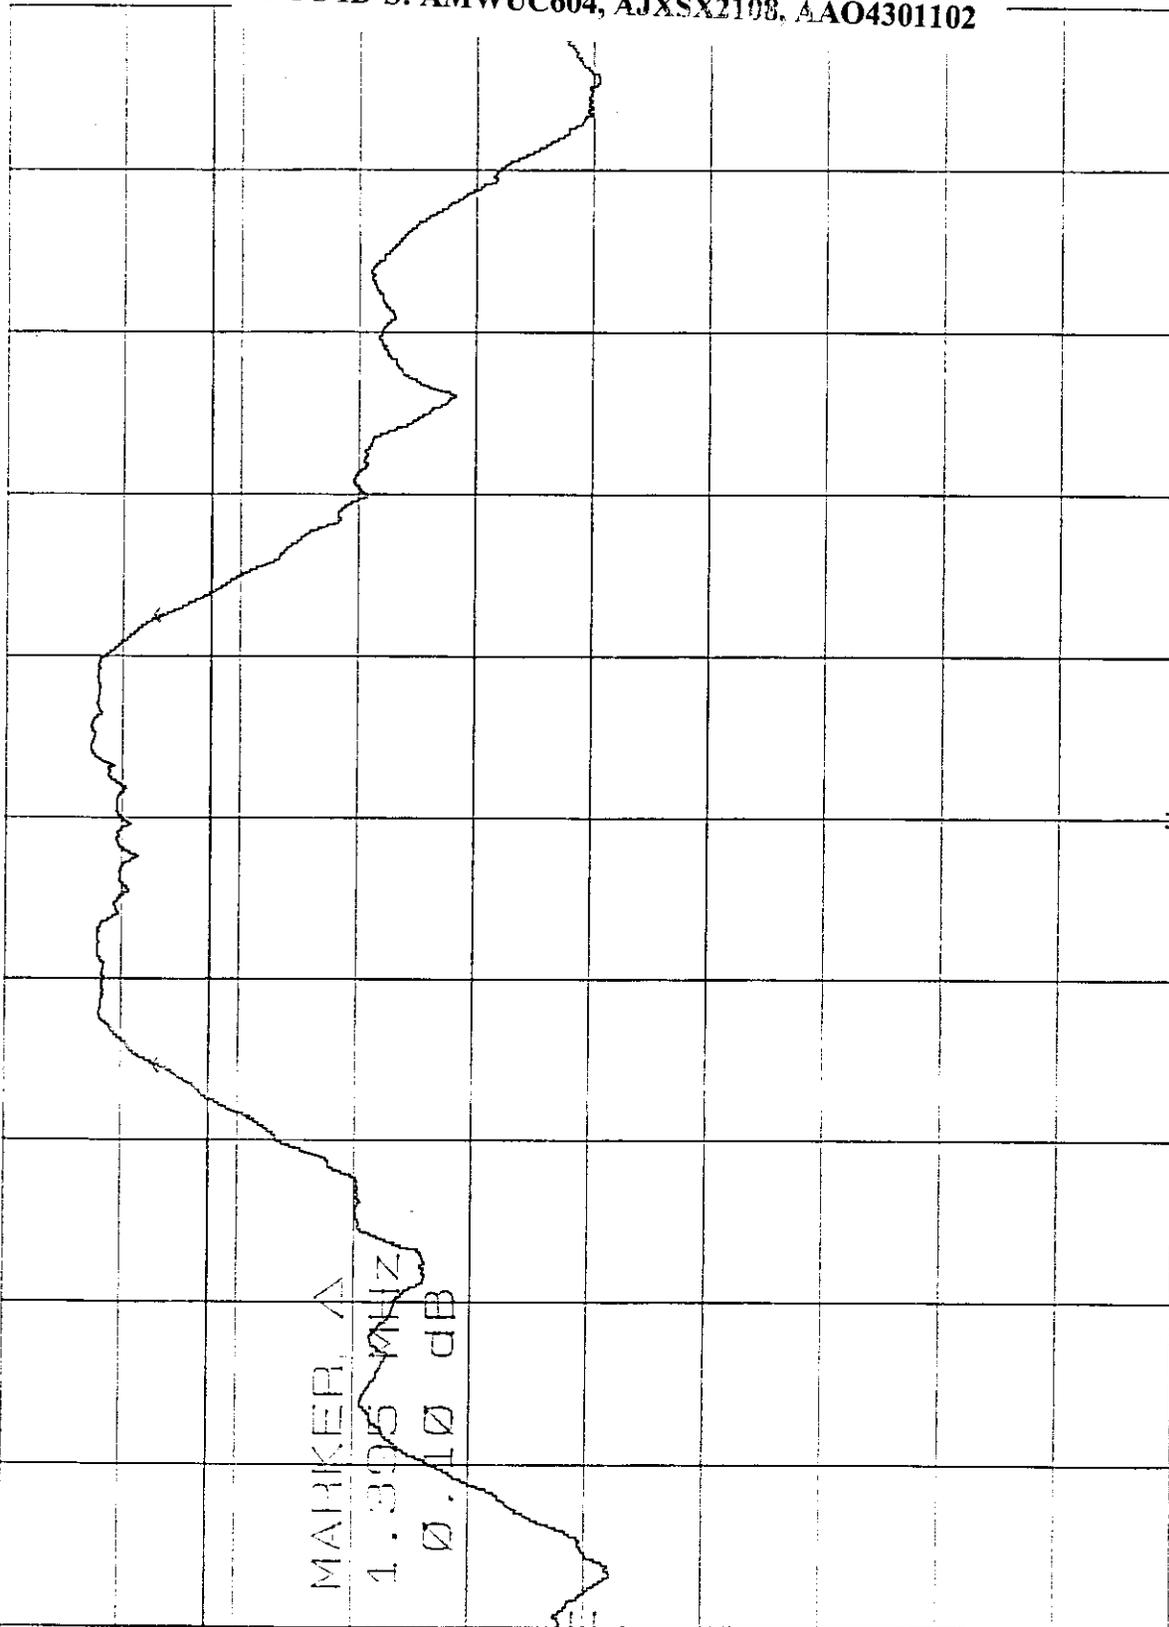

1.00 dBm

DL
2.4
dBm

CORR'D

CENTRE 925.86 MHz
RES BW 100 kHz
VBW 300 kHz
SPAN 5.00 MHz
SWP 20.0 msec



SECTION 15.247 (b)

POWER OUTPUT OF HANDSET

PAGE A7 - CHANNEL 1

PAGE A8 - CHANNEL 10


PAGE A9 - CHANNEL 20

4-14-98

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

POWER OUTPUT OF HANDSET CH. 1
REF 30.0 dBm ATTEN 40 dB

MIKR 904.000 MHz
19.90 dBm

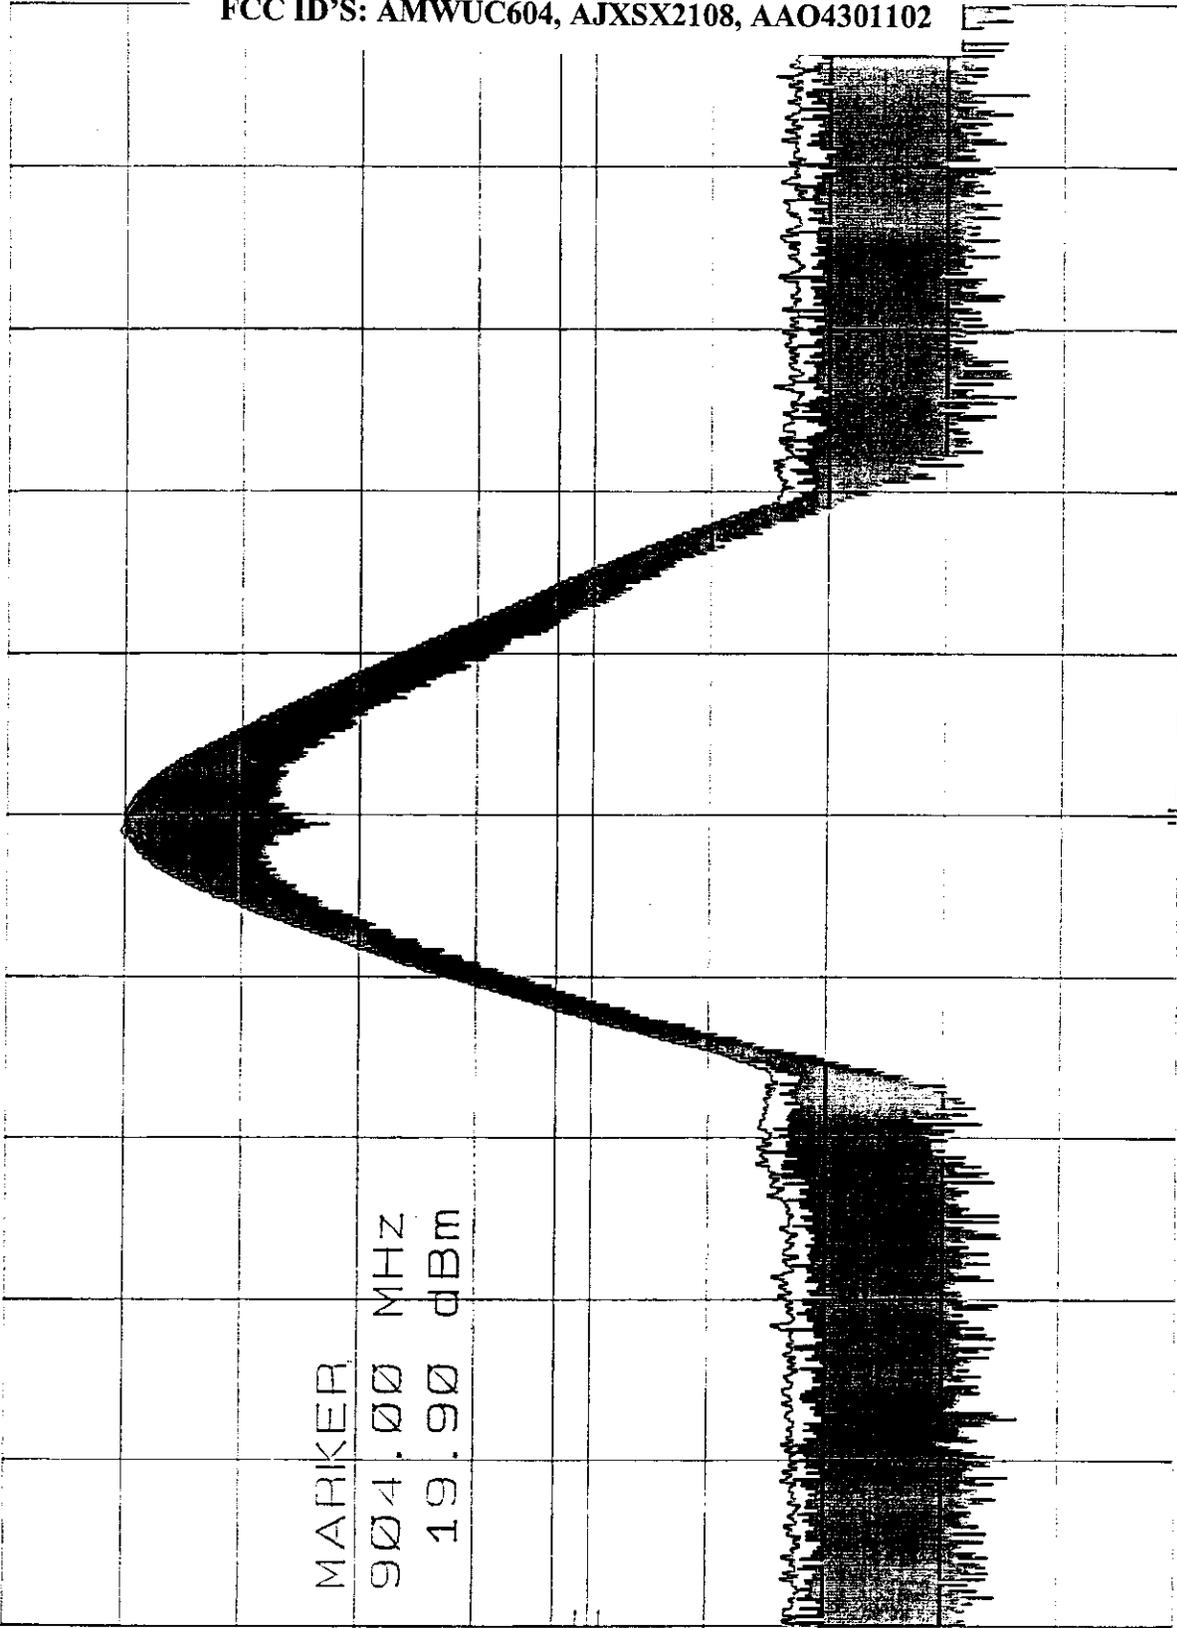

10 dB

DL
-17.0
dBm

CORR'D

904.000 MHz
30.0 MHz
20.0 ms
1 MHz
3 MHz

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

4-14-98

POWER OUTPUT OF HANDSET CH. 10

REF 307.0 dBm

ATTEN 40 dB

1.67 dBm

MARKER

014.60 MHz


-47.00 dBm

DL

-47.0

dBm

CORRECT

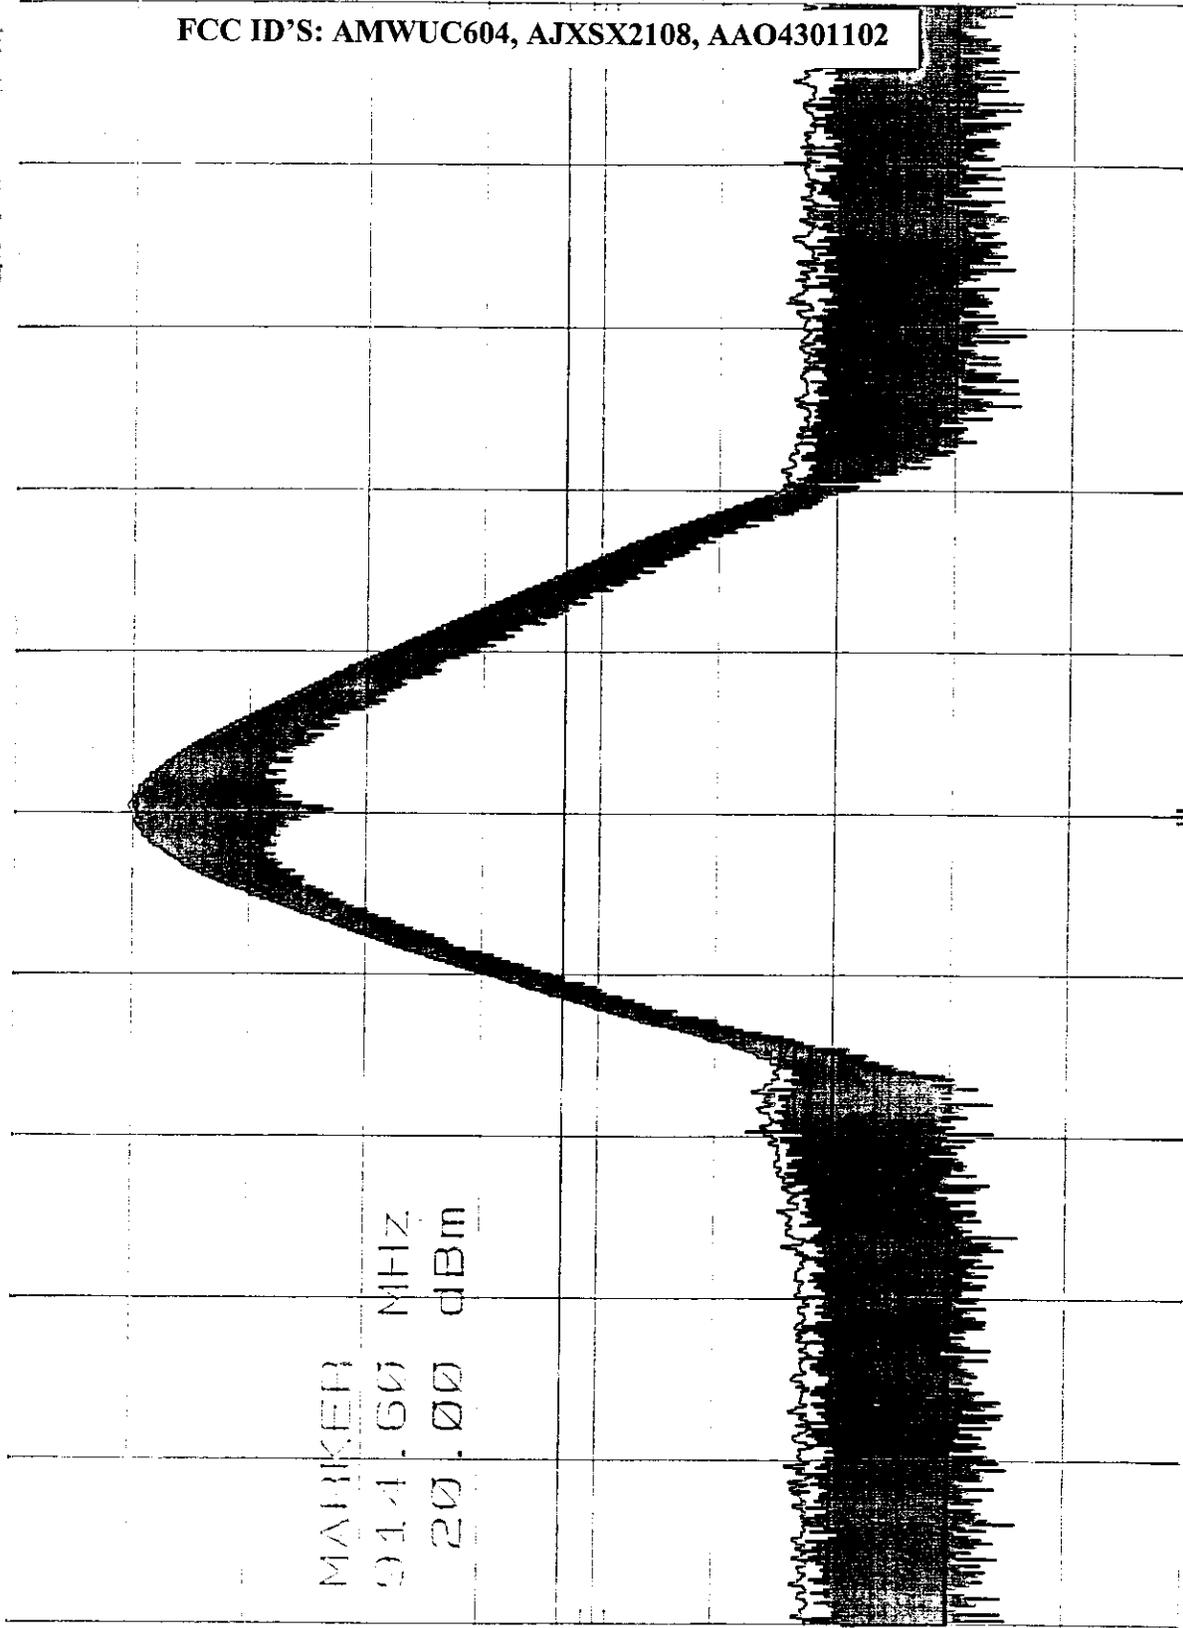

CORRECT 144.4 MHz

RES BW 3 MHz


VBW 1 MHz

SPAN 60.0 MHz
SWP 20.0 MHz

4-14-98

POWER OUTPUT OF HANDSET CH. 20
REF 30.0 dBm ATTEN 10 dB

MARK 925.70 MHz
19.90 dBm

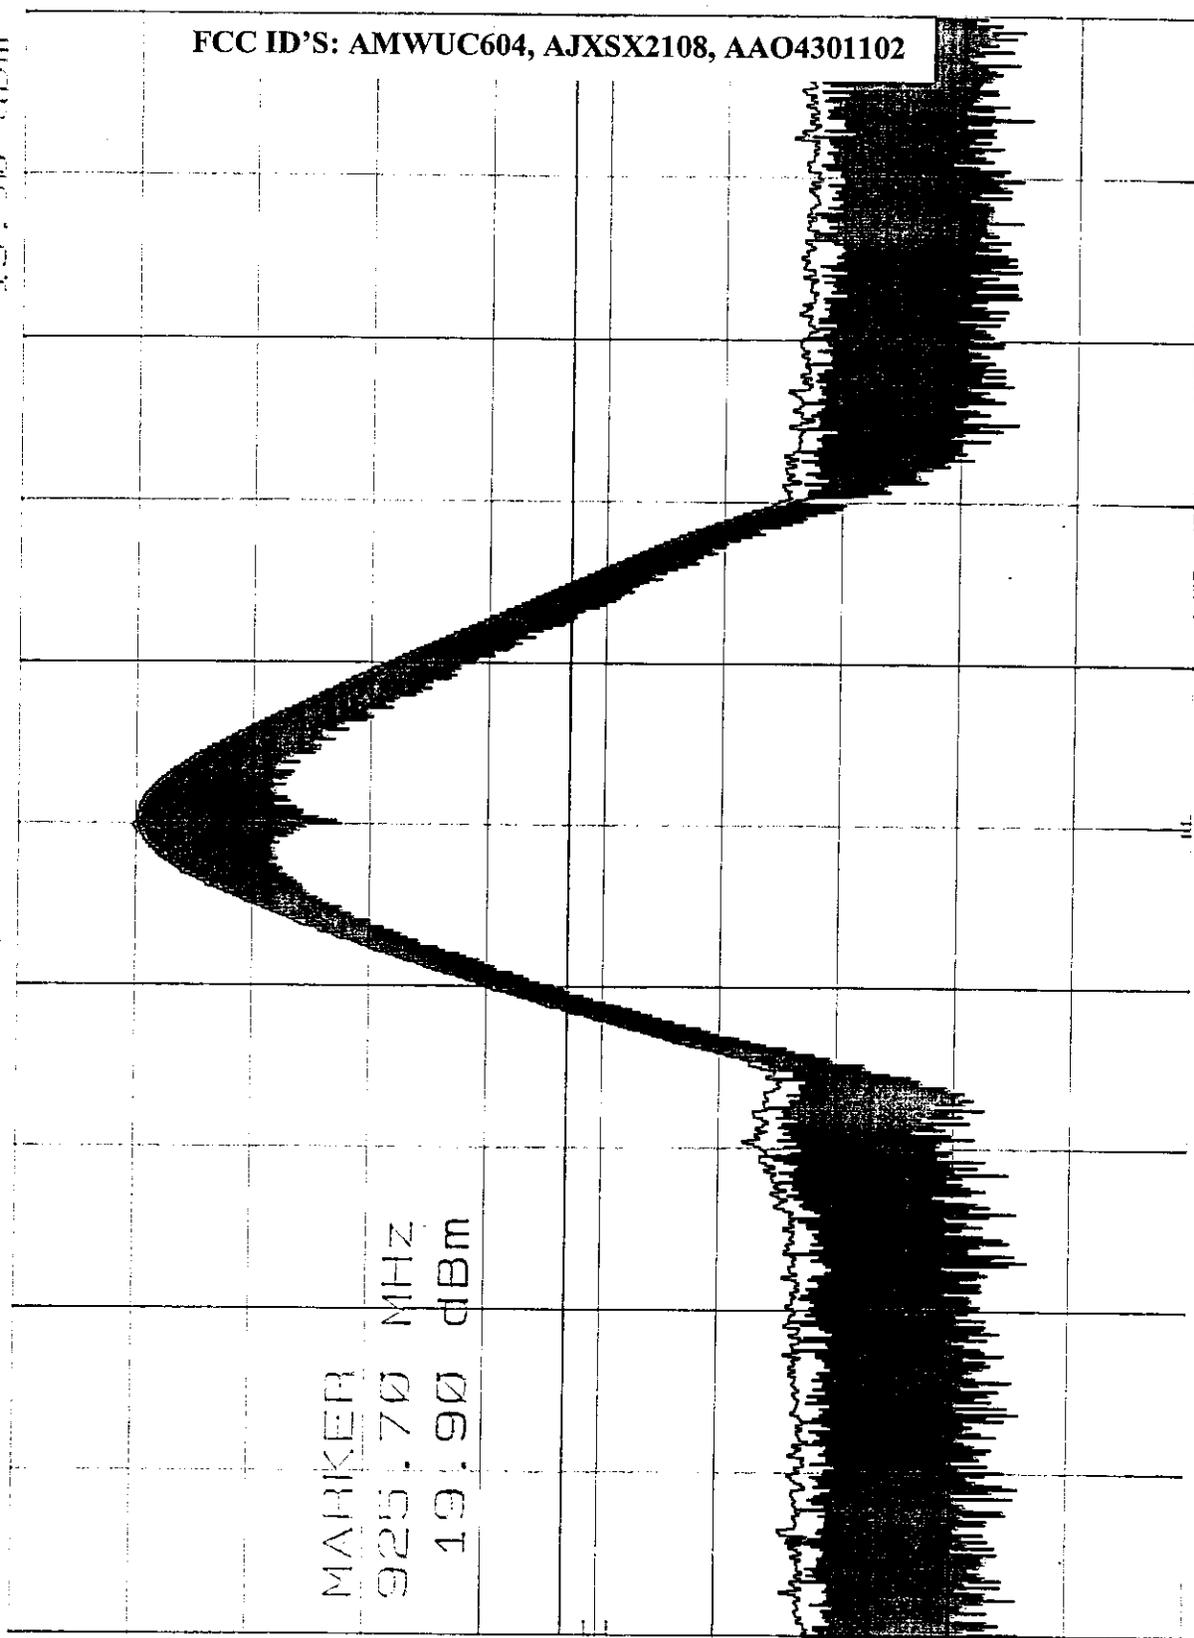

10 dB

DL
-17.0
dBm

CORR'D

CENT FREQ 925.0 MHz
RES BW 3 MHz

SPAN 50.0 MHz
SWP 20.0 MHz

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

SECTION 15.247 (d)

SPECTRAL DENSITY OUTPUT OF HANDSET


PAGE A11 - CHANNEL 1

PAGE A12 - CHANNEL 10

PAGE A13 - CHANNEL 20

4-14-98

SPECTRAL DENSITY OUTPUT OF HANDSET CH. 1 MKR 904.4500 6 MHz
REF 20.0 dBm ATTEN 30 dB
6.10 dBm

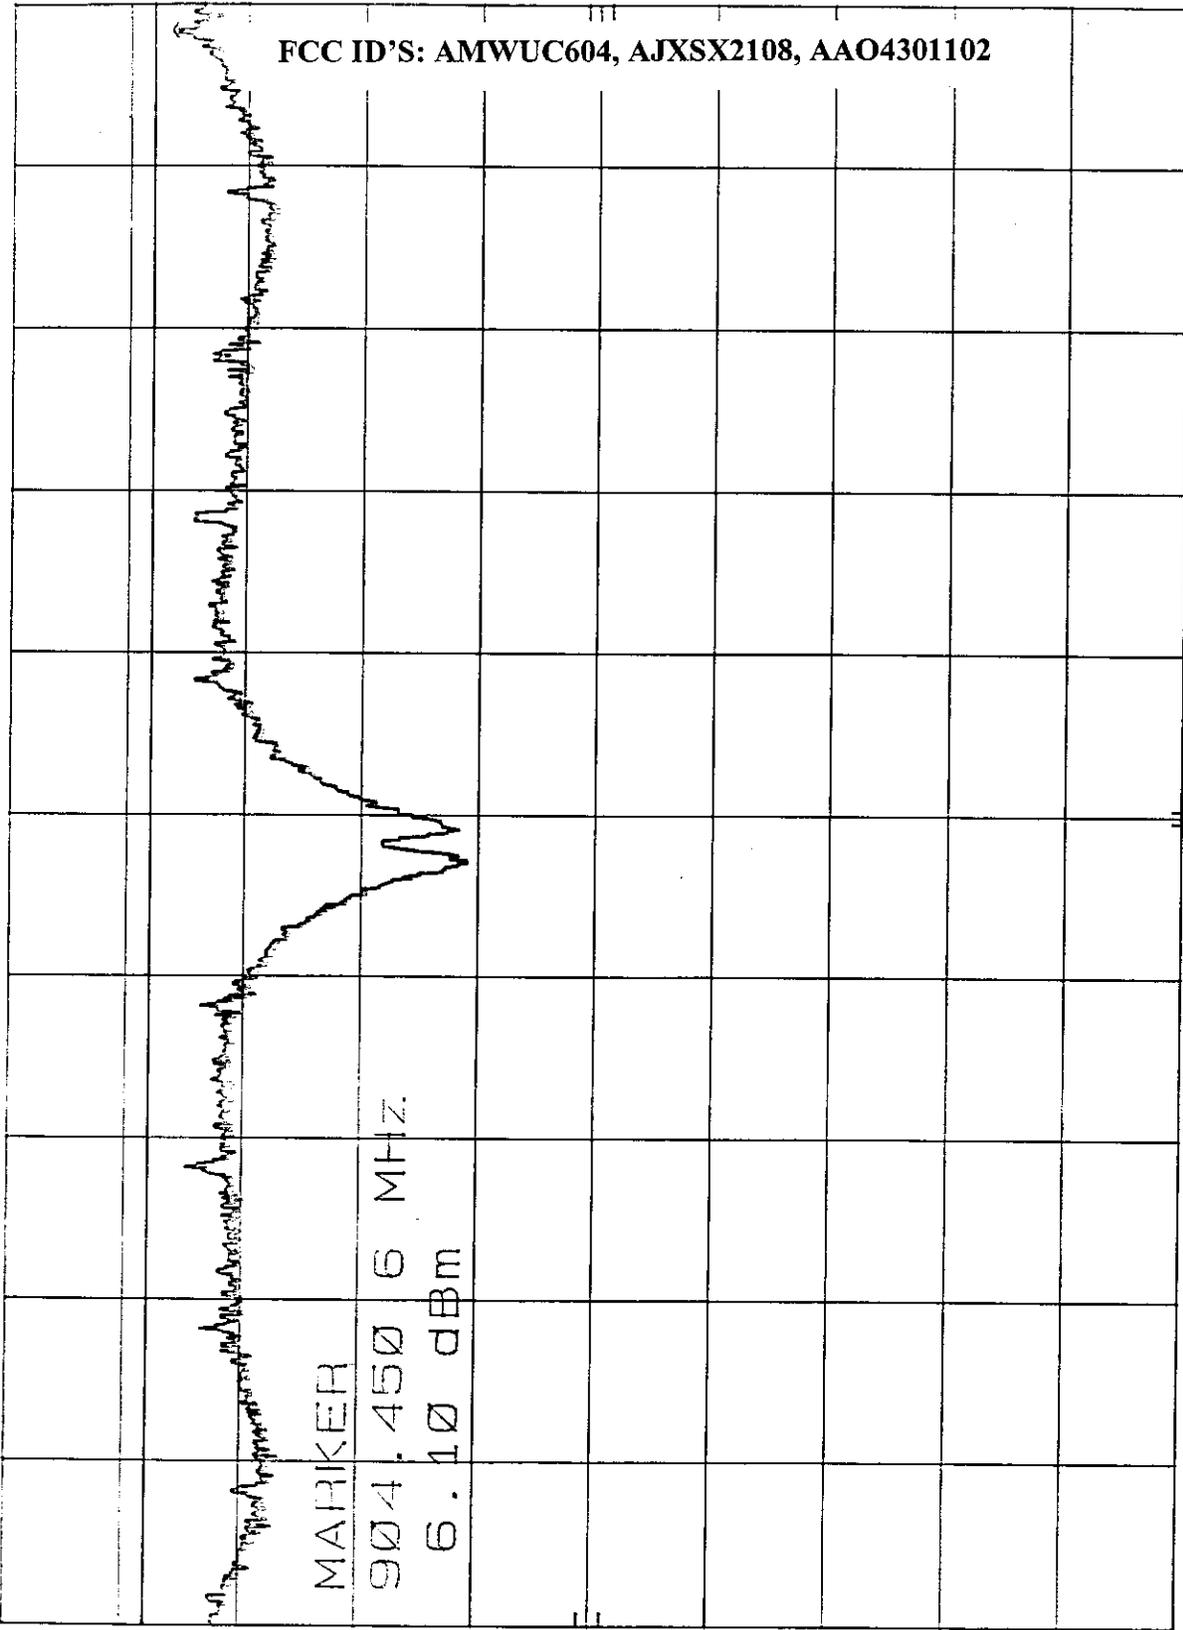

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

MARKER

904.4500 6 MHz.

6.10 dBm

DL
8.0
dBm

CORR'D

CENTER 904.200 MHz
RES BW 3 KHz

VBW 10 KHz

SPAN 500 KHz
SWP 167 sec

100 dB


4-14-98

SPECTRAL DENSITY OUTPUT - HANDSET CH. 10 MKR 914.649 5 MHz
REF 30.0 dBm ATTEN 40 dB
6.30 dBm

177
100 dBm

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

PAGE 1/2

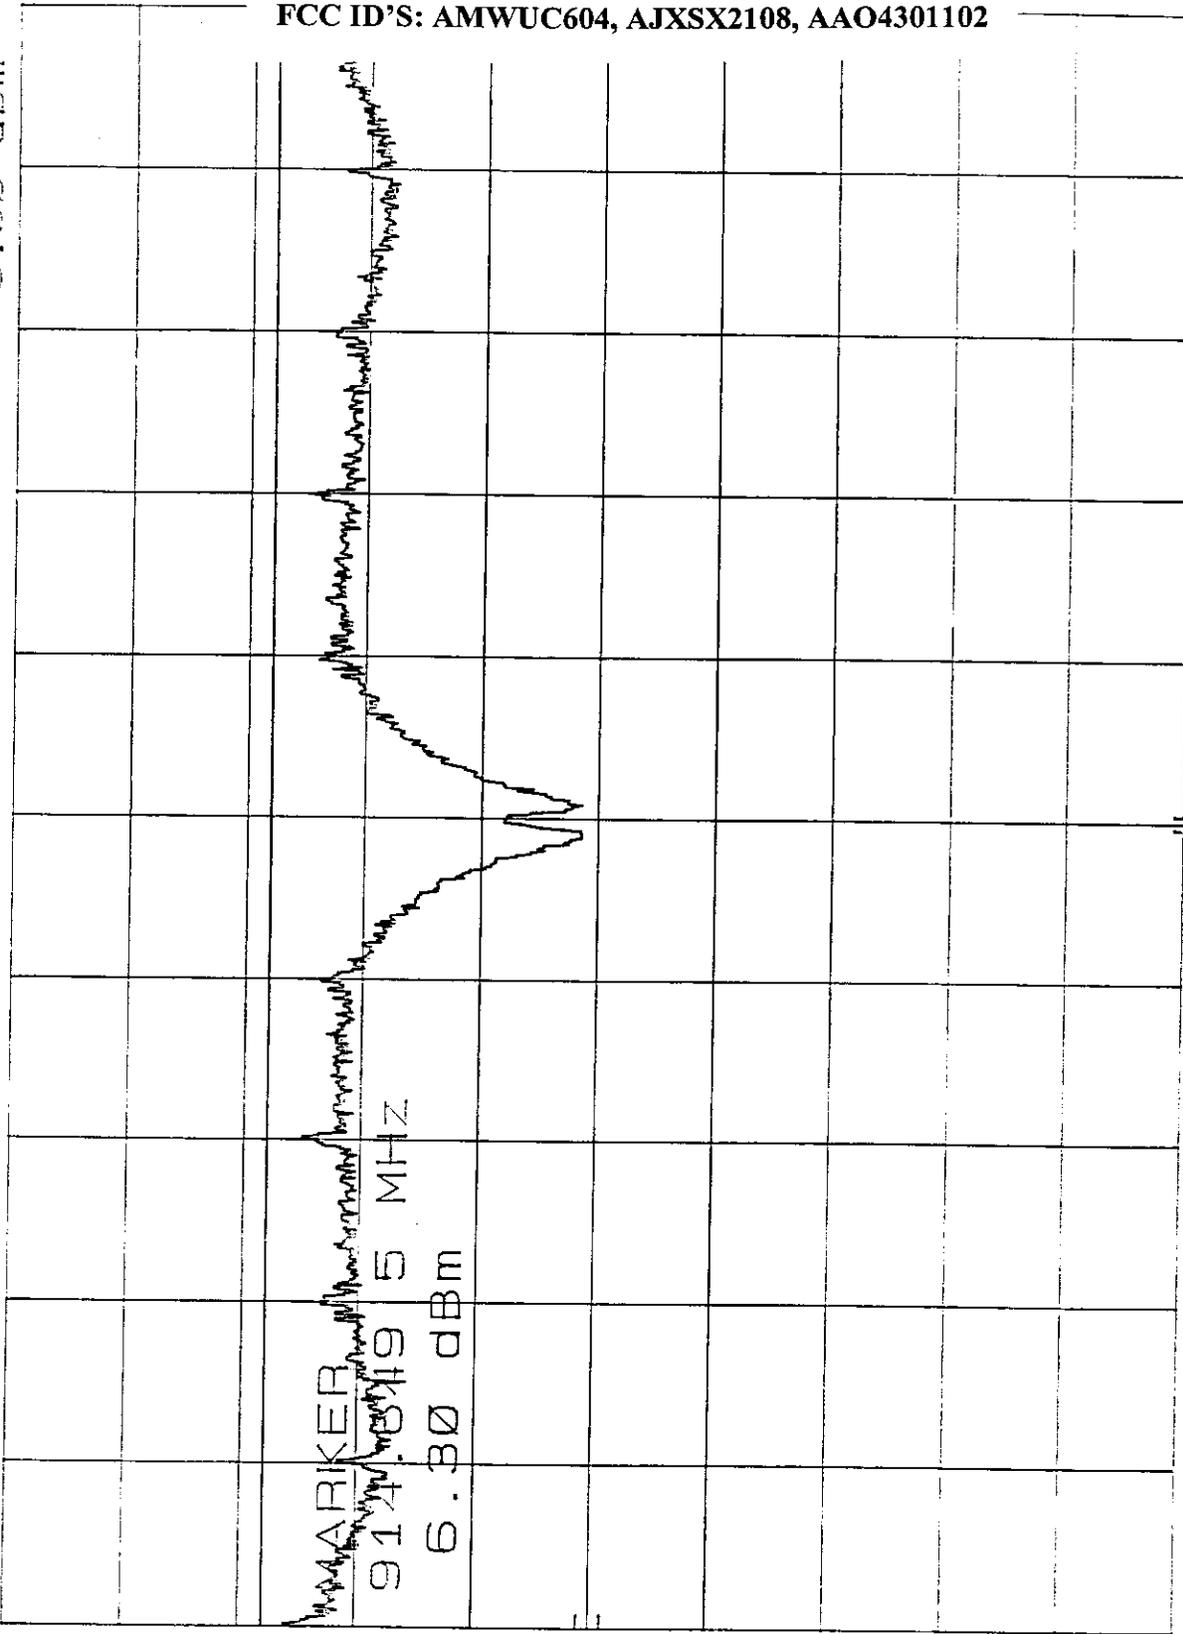

MARKER
914.649 5 MHz
6.30 dBm

DL
8.0
dBm

CORR * P

CENTRE 914.399 MHz
RES BW 3 KHZ


VBW 10 KHZ

SPAN 500 KHZ
SMP 167 300

4-14-98

SPECTRAL DENSITY OUTPUT HANDSET CH. 20 MKR 925.550 5 MHz
REF 30.0 dBm ATTEN 40 dB 5.20 dBm

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

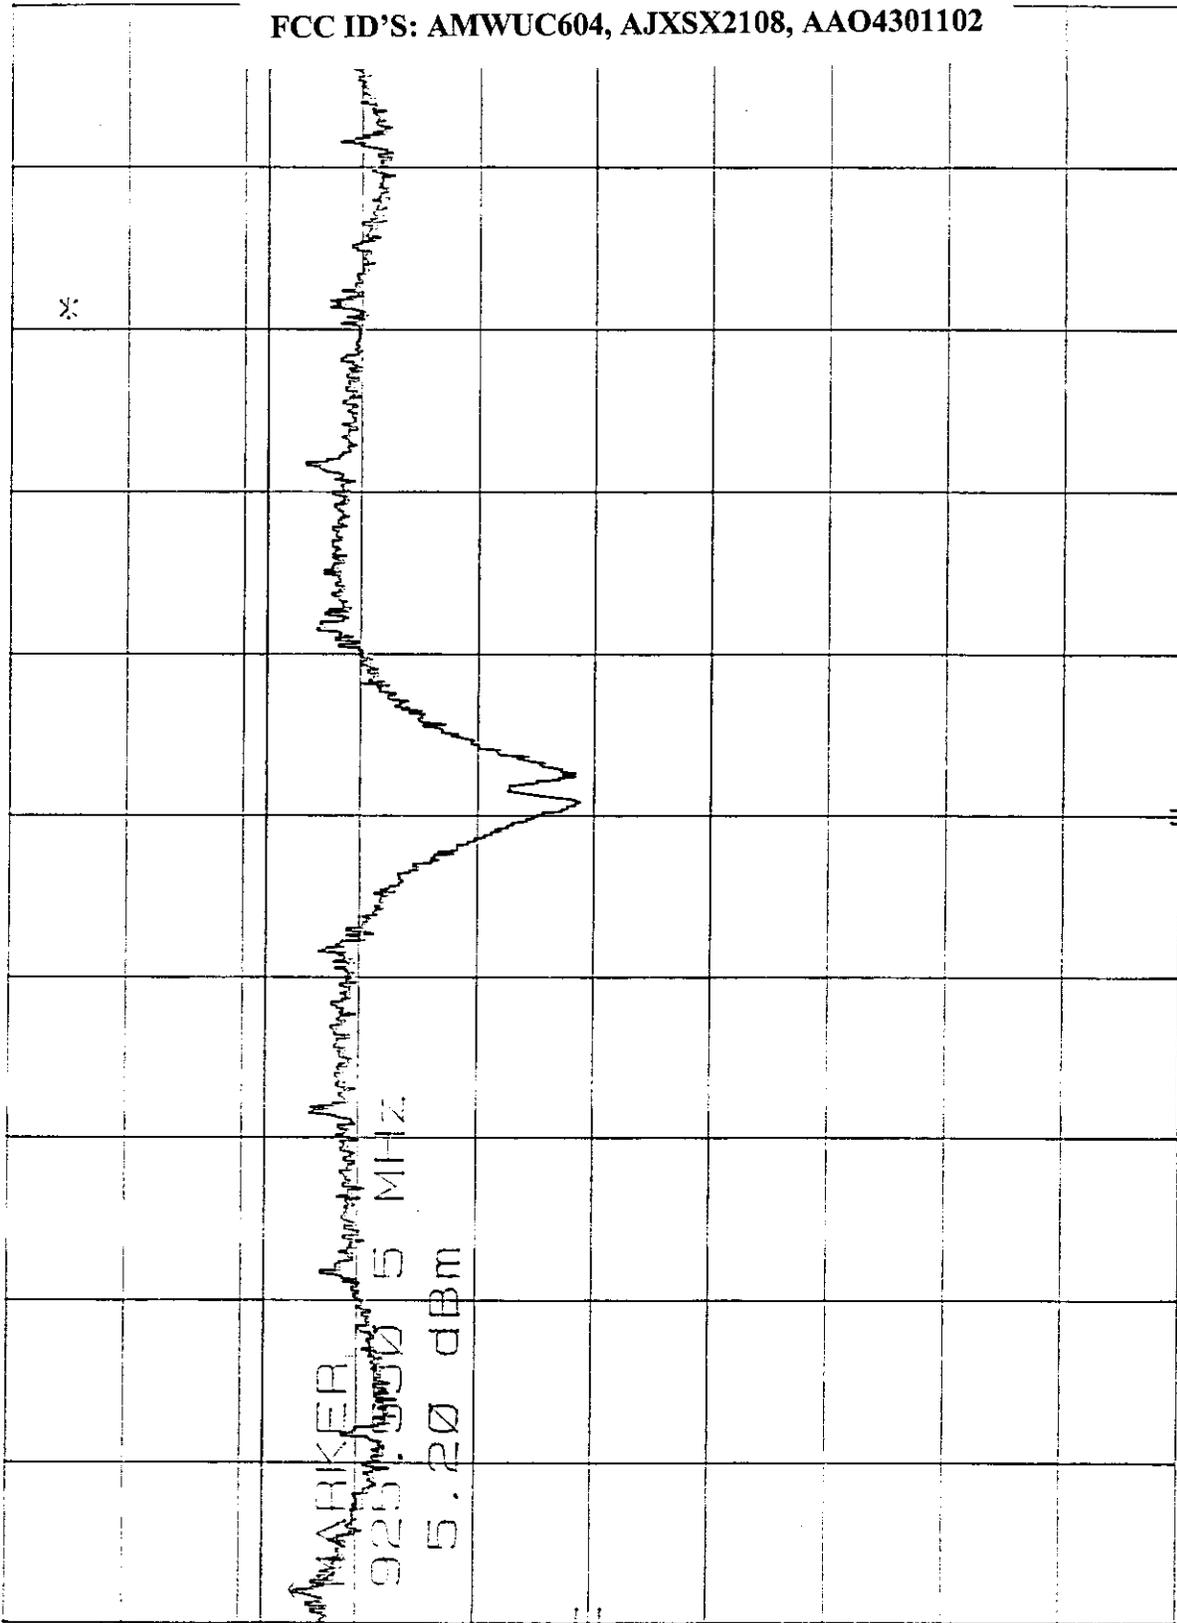

1/17

1.0 dB/

DL
8.0
dBm

CORR'D

CENTER 925.700 MHz SPAN 500 KHZ
RES BW 3 KHZ SWP 167 SEC
VBW 10 KHZ




SECTION 15.247 (c)

***RF ANTENNA CONDUCTED EMISSIONS TEST
FOR HANDSET***

***PAGES A15-A18 - CHANNEL 1
PAGES A19-A21 - CHANNEL 10
PAGES A22-A25 - CHANNEL 20***

4-14-98

REF ANT. COND. TEST HANDSET CH. 1 2MHZ-1GHZ MKR 90.3 MHz
REF 30.0 dBm ATTEN 40 dB 13.00 dBm

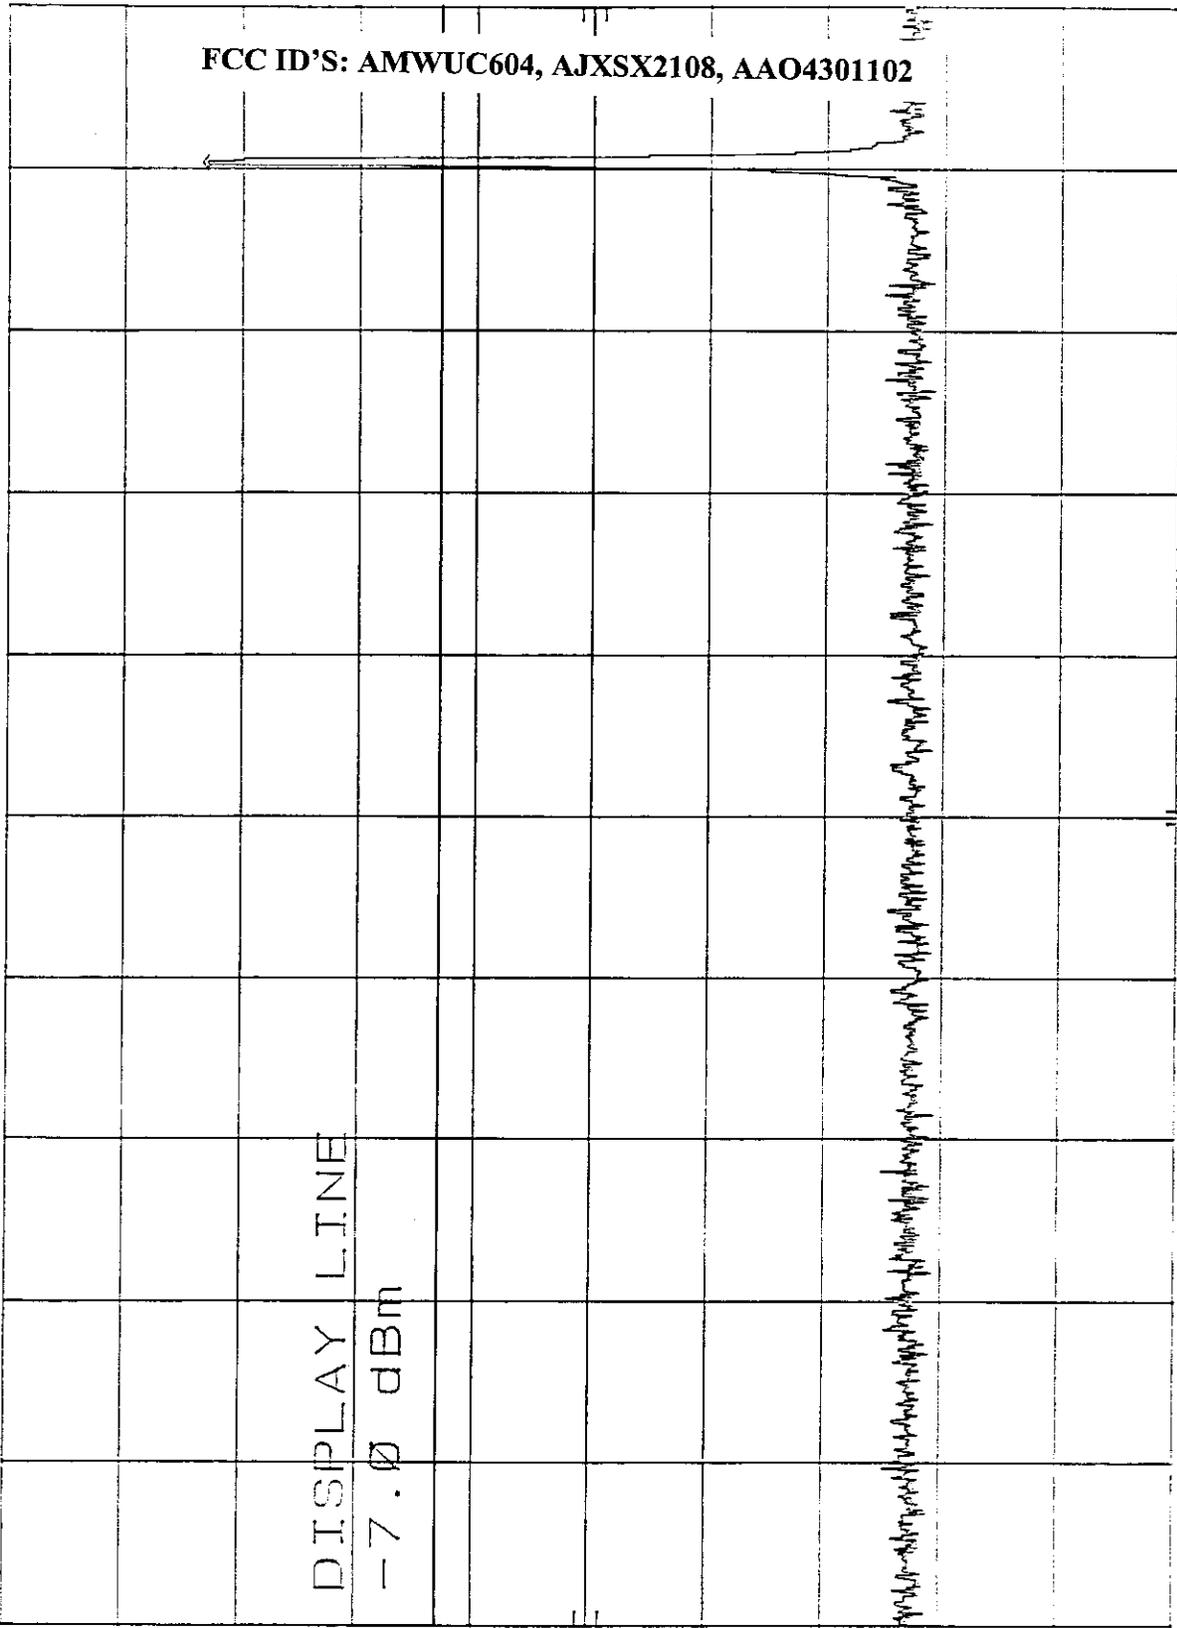

1.00 dB/

DL
-7.0
dBm


CORR'D

START 0 MHz STOP 1.00 GHz
RES BW 400 kHz VBW 300 kHz SWP 299 msec

4-14-98

HP ANT. COND. TEST HANDSET 2GHZ-10GHZ MKR 9.016 GHz
REF: 10.0 dBm ATTEN 20 dB -55.60 dBm

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

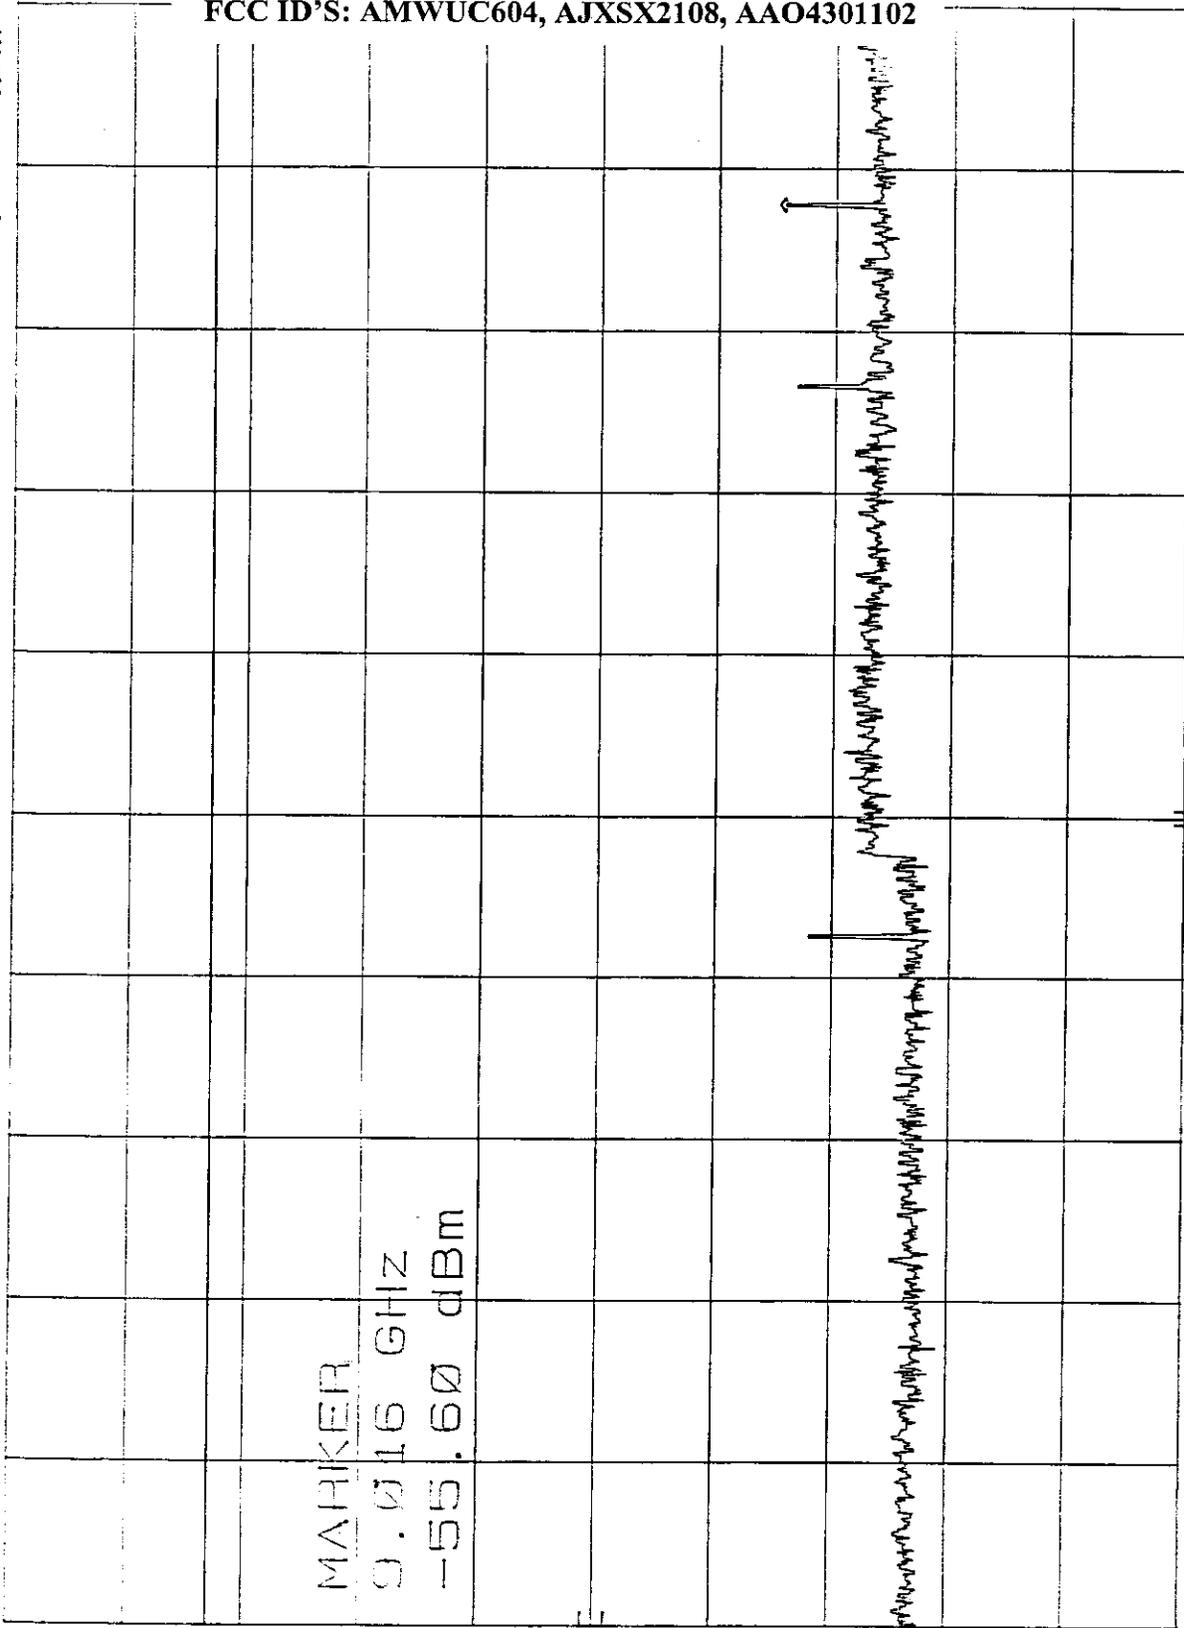

1.00 dB

DL
-7.0
dBm

CORR'D

START 2.00 GHz RES BW 100 KHZ VBW 300 KHZ STOP 10.00 GHz
SWP 2.40 sec

4-14-98


RF ANT. COND. TEST HANDSET 1GHZ - 2GHZ CH. 1 MKR 1.808 GHZ
REF 10.0 dBm ATTEN 20 dB -32.50 dBm

1.67 dBm

MARKER
1.808 GHZ
-32.50 dBm

DI.
-7.6
dBm

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

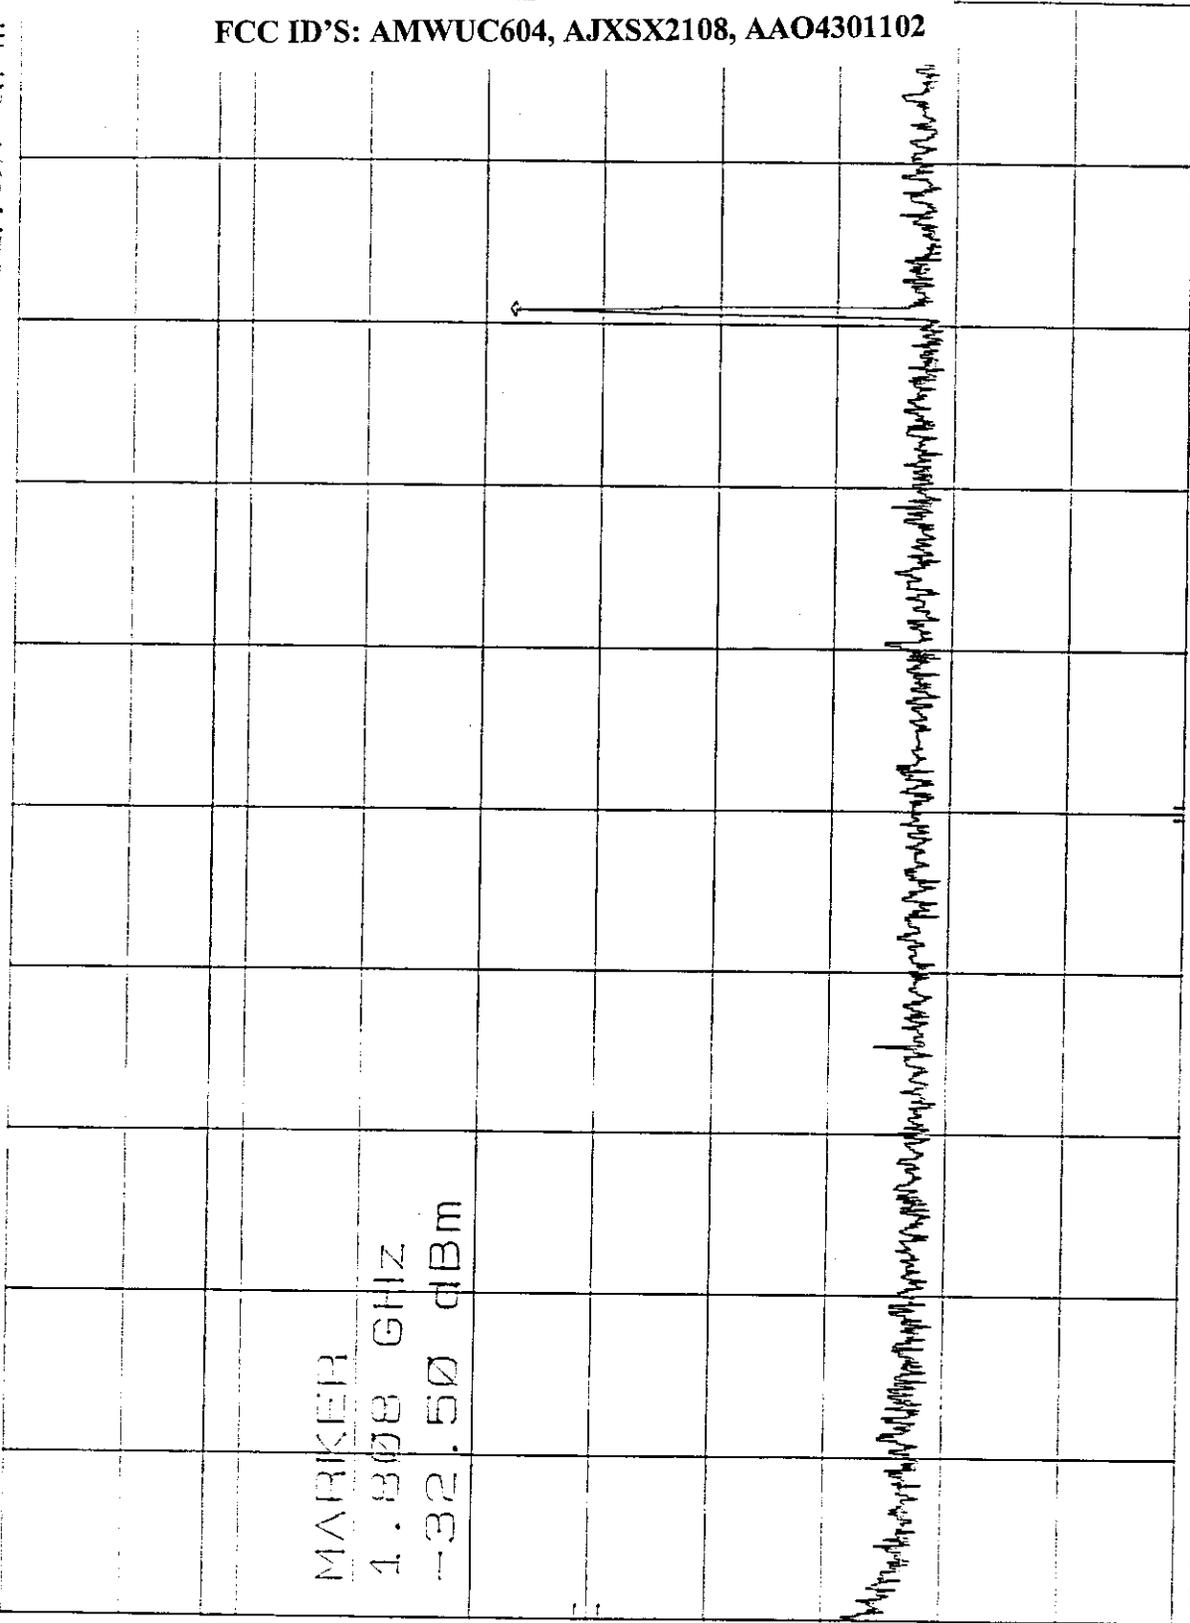

COHER'D

START 1.00 GHZ RES BW 100 KHZ VBW 300 KHZ STOP 2.00 GHZ
SWP 300 msec


4-14-98

MKR 902.000 MHz
-30.80 dBm

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

BAND EDGE OF CH. 1 OF HANDSET
REF 30.0 dBm ATTEN 40 dB

SPAN 5.00 MHz
SWP 20.0 msec

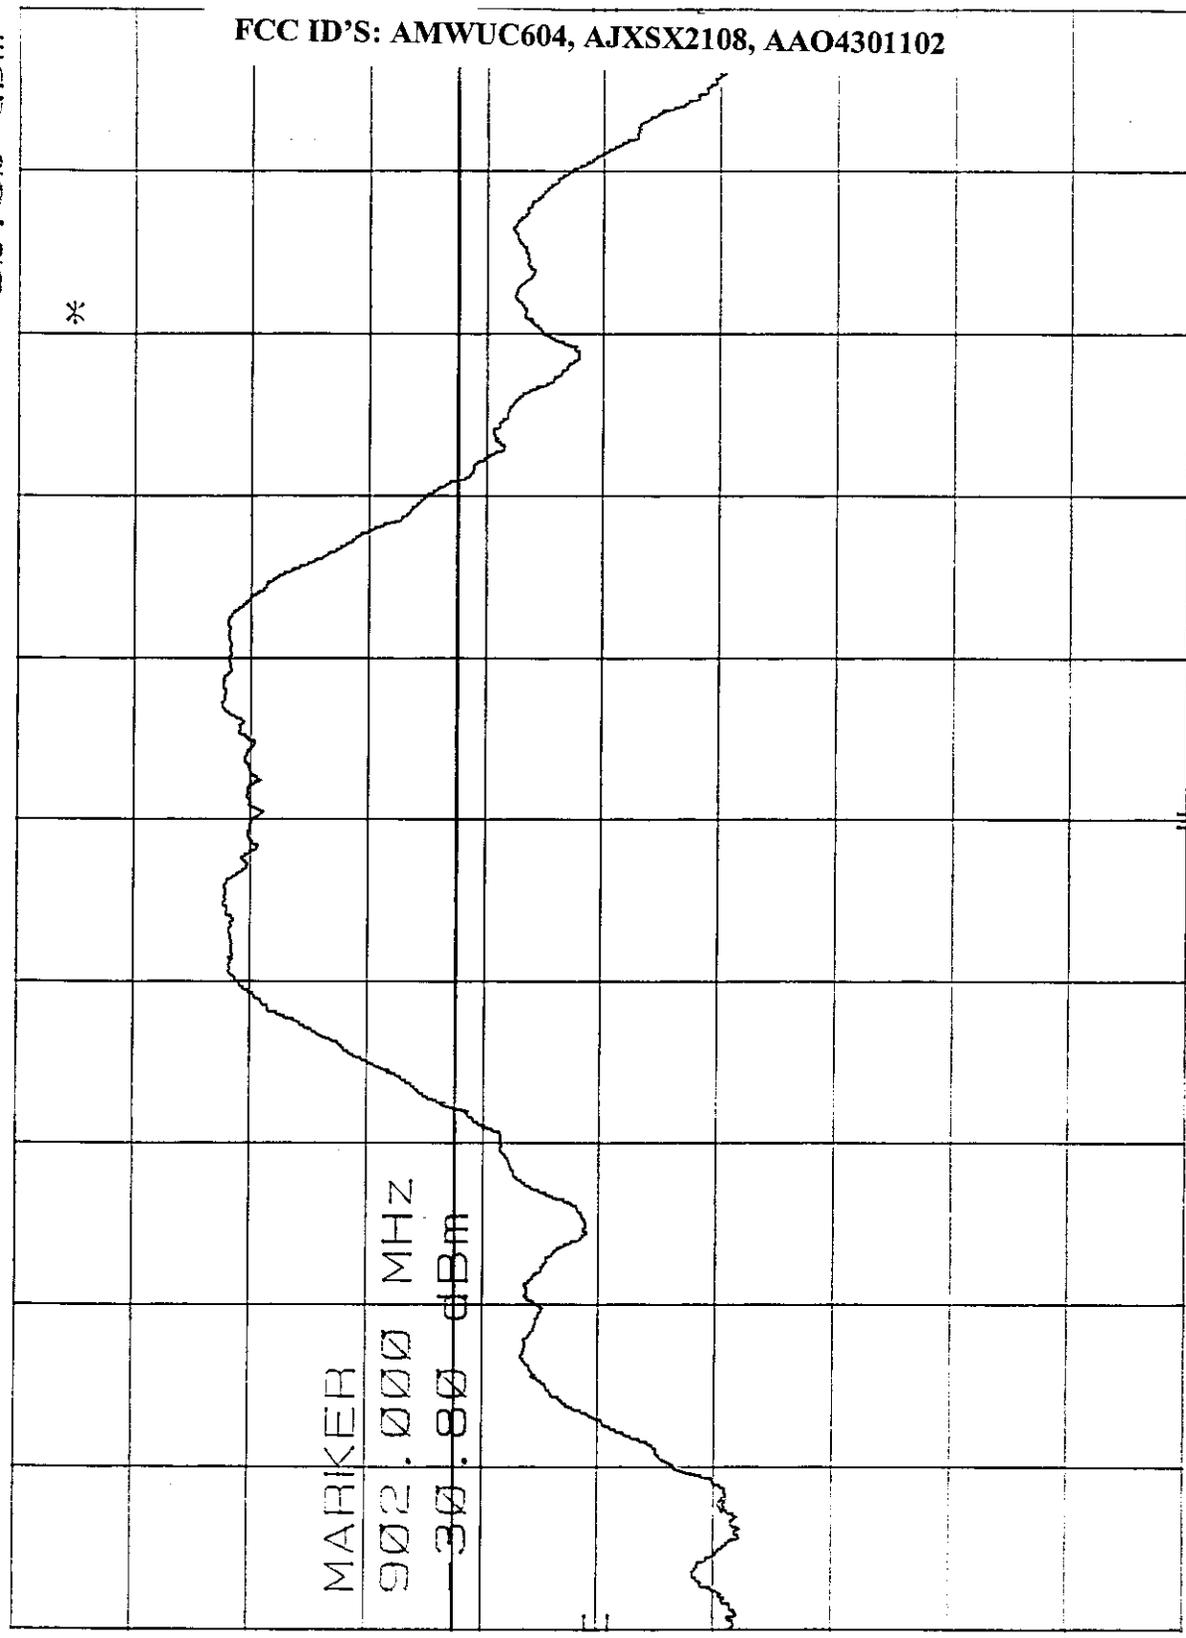

VBW 300 KHZ

CENTER 904.12 MHz
RES BW 100 KHZ

hp

10 dB/

-20 dB DOWN

DL
-7.6
dBm

CORR'D

4-14-98

REF ANT. COND. TEST - HANDSET CH. 10 2MHZ-1GHZ MKR 914 MHz
RES 300.0 dBm ATTEH 10 dB 12.40 dBm

40 dB


MARKER

914 MHz

12.40 dBm

DI.
-7.6
dBm

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

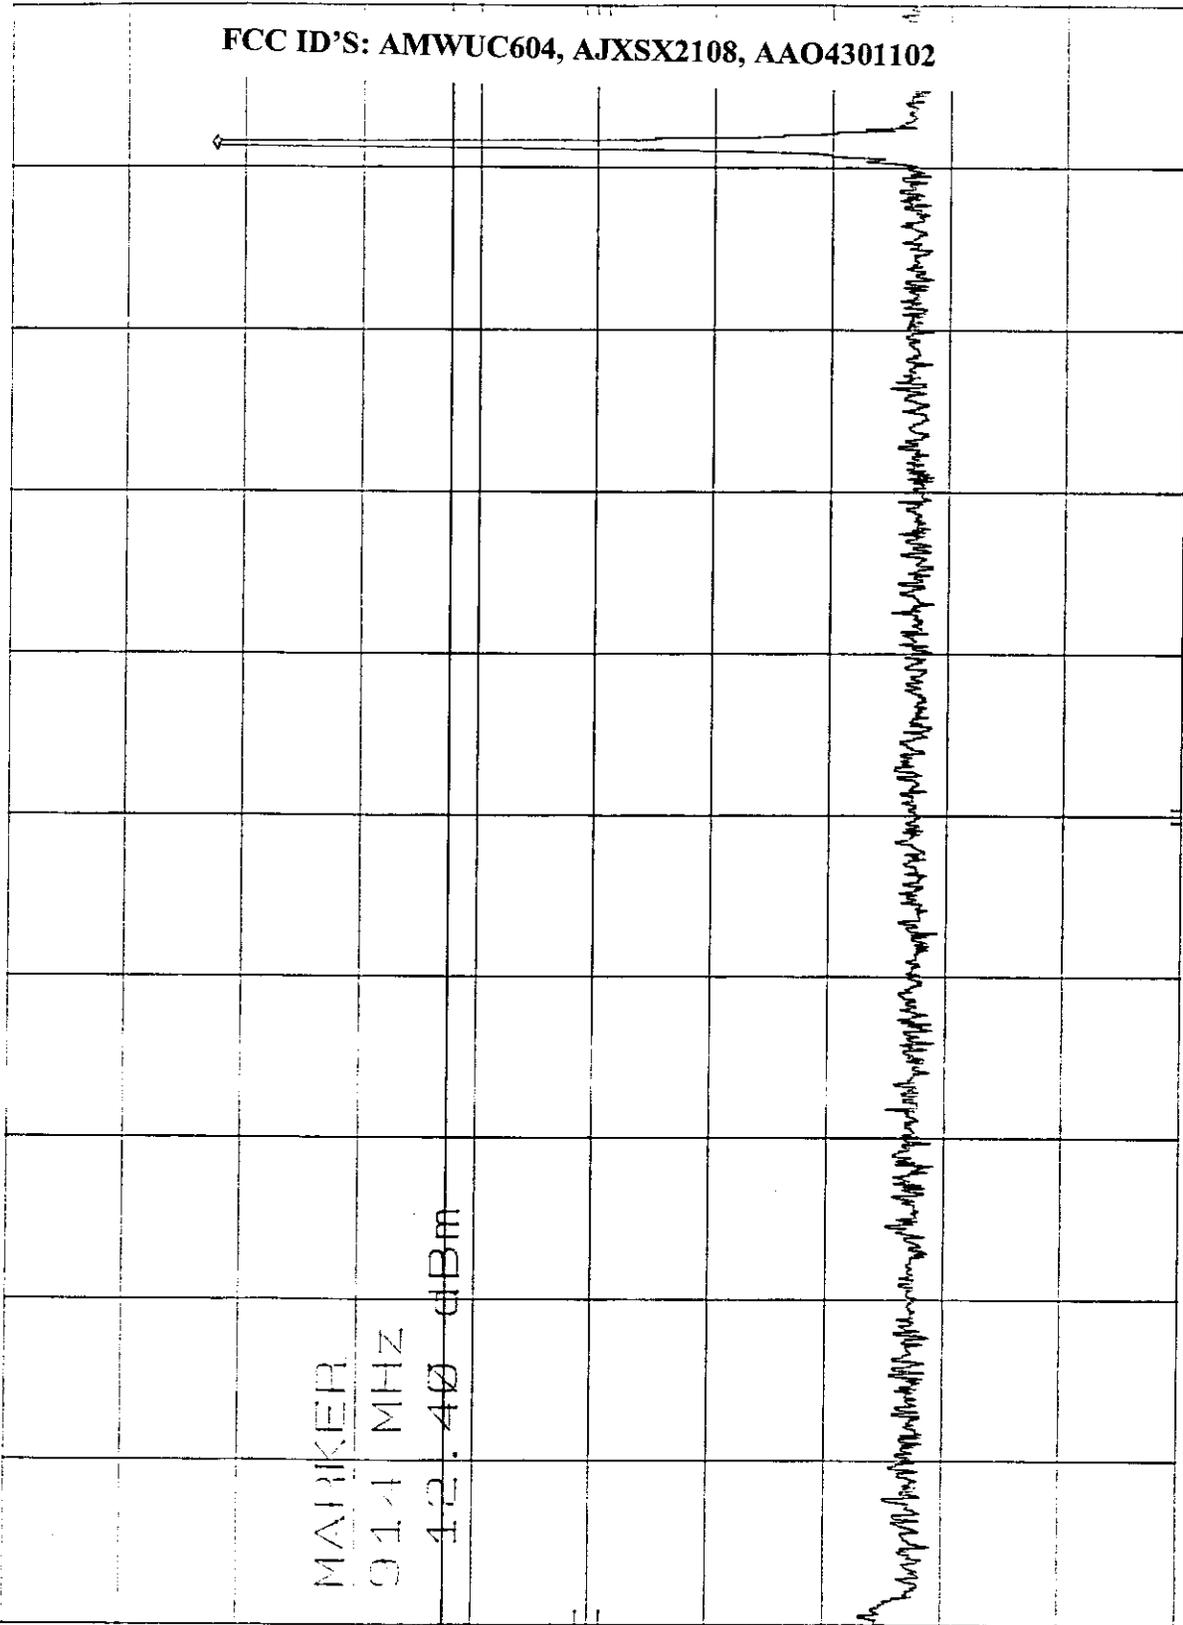

CORR'D

START 2 MHz RES BW 100 KHZ VBW 300 KHZ STOP 1.00 GHz
SWP 299 msec

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

4-14-98

REF ANT. COND. TEST HANDSET CH. 10 1GHZ-2GHZ MKR 1.828 GHZ
REF 40.0 dBm ATTEM 20 dB -32.80 dBm

1/1


107 dBm

MARKER

1.828 GHZ
-32.80 dBm

DL
-7.6
dBm

COHER'D

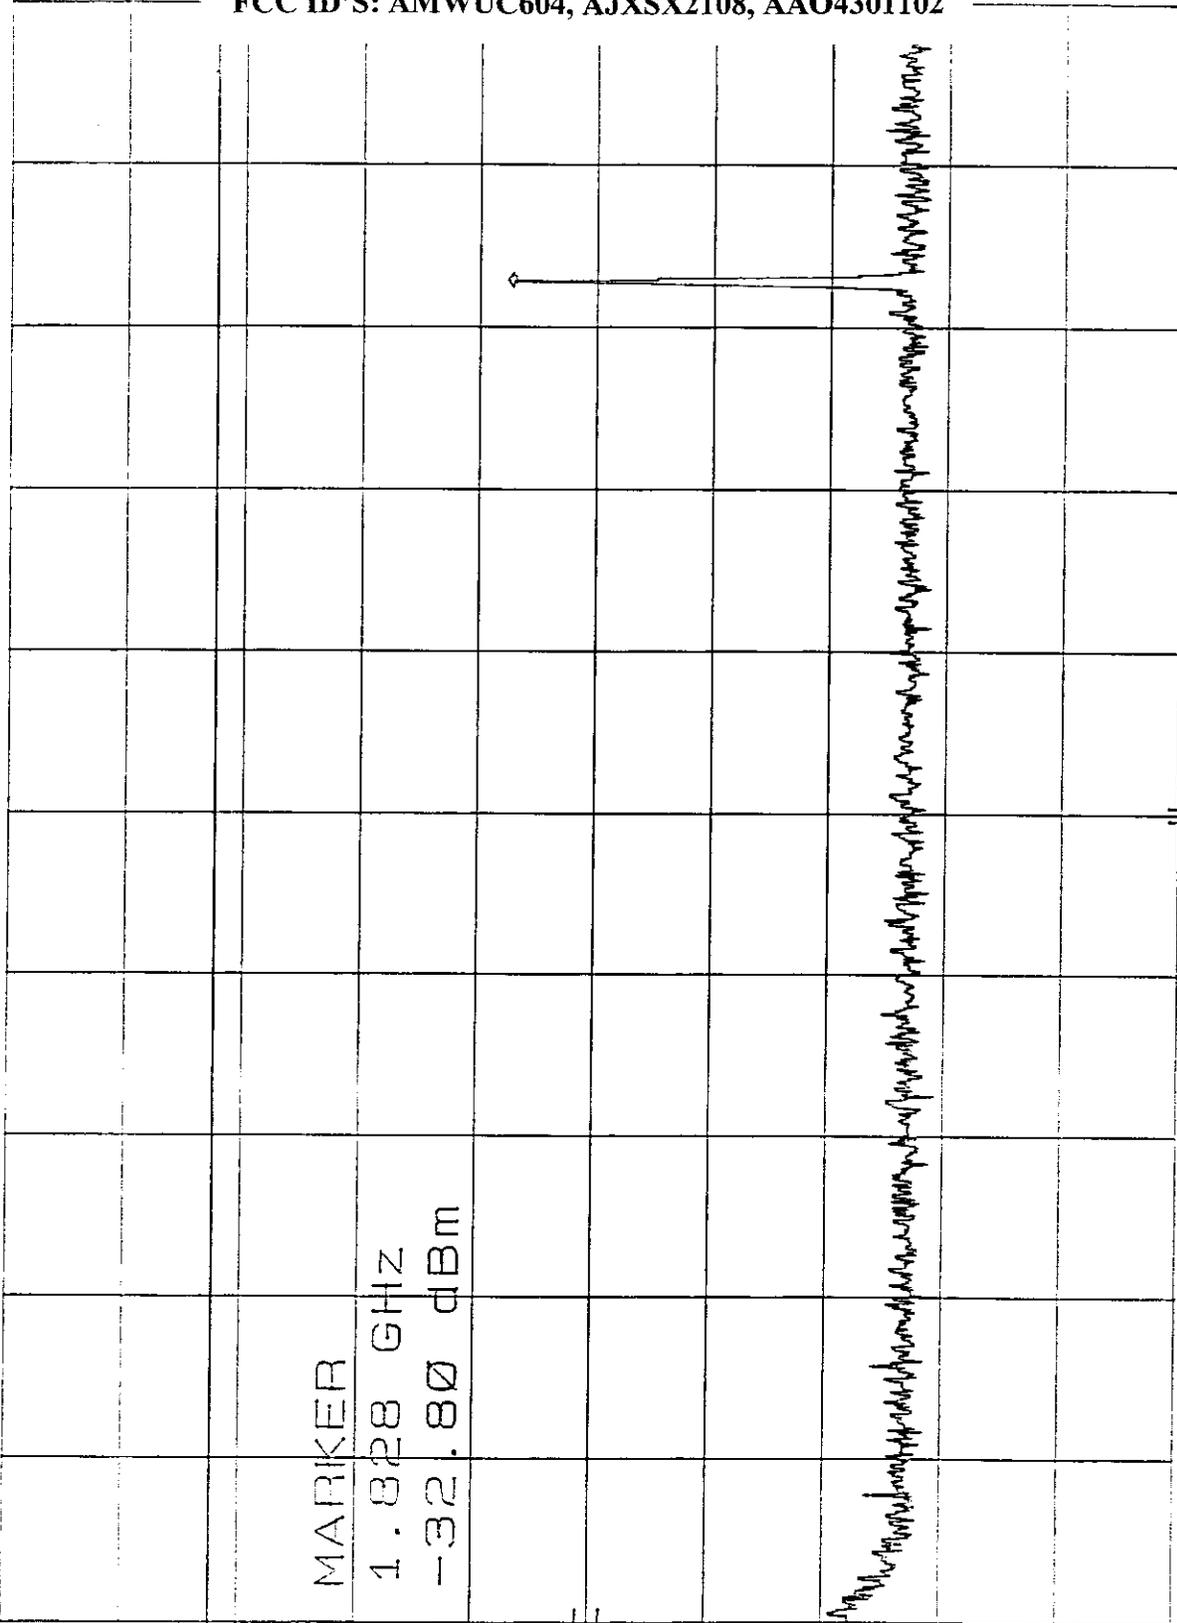

START 1.00 GHZ RES BW 100 KHZ VBW 300 KHZ STOP 2.00 GHZ
SWP 300 msoc

4-14-98

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102


RF ANT. COND. TEST HANDSET CH. 10 2-10GHZ MKR 8.208 GHz
REF 10.0 dBm ATTEN 20 dB -57.80 dBm

100 dB

MARKER
8.208 GHz
-57.80 dBm

DL
-7.6
dBm

COHERENT

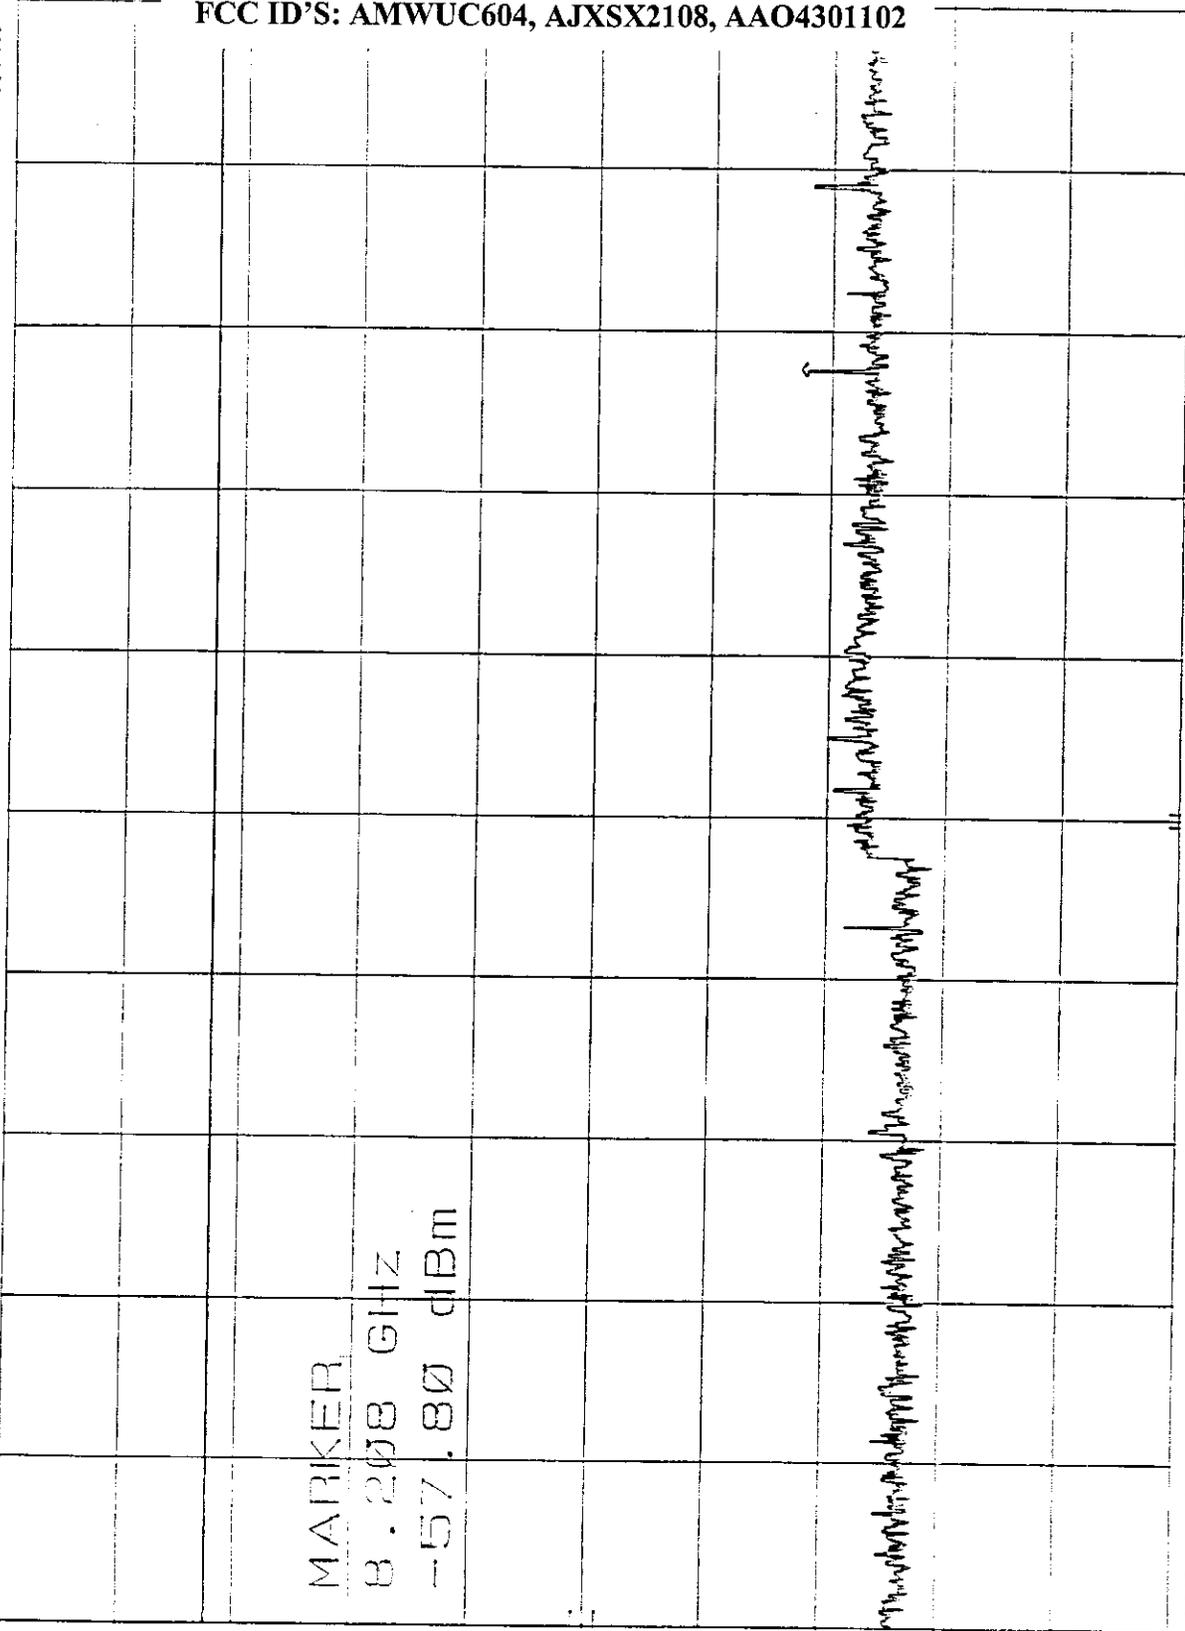


START 2.00 GHz RES BW 100 KHZ VBW 300 KHZ STOP 10.00 GHz
SWP 2.40 sec

4-14-98

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

REF ANT. COND. TEST HANDSET 2MHZ-10HZ - CH, 20
REF 20.0 dBm ATTEEN 40 dB
MKR 925 MHz
12.00 dBm

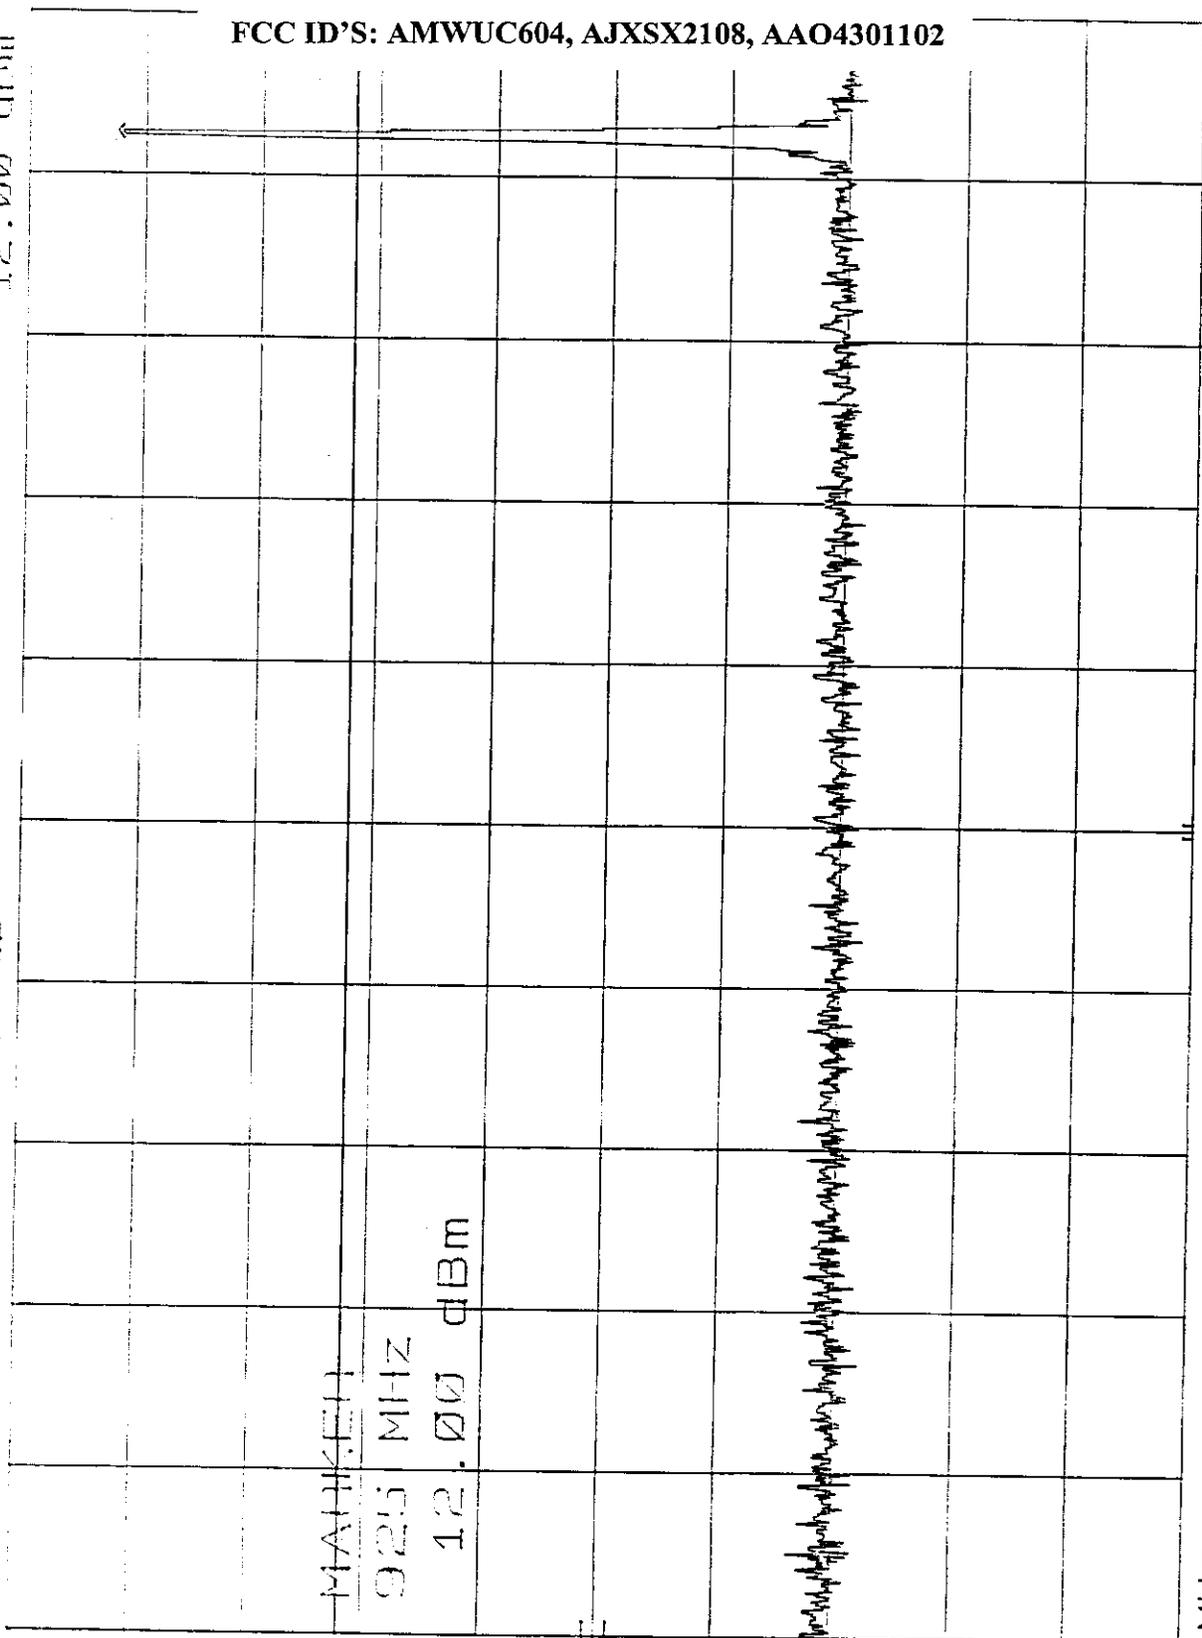

1/41

10 dB

DI.
-8.0
dBm

CORRECTION


START 2 MHz RES BW 100 KHZ VBW 300 KHZ STOP 1.00 GHz SWP 299 msec

4-14-98

RF ANT. COND. TEST HANDSET 1GHZ-2GHZ CH. 20 MKR 1.851 GHz
REF 10.0 dBm ATTEU 20 dB -33.80 dBm

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

PAGE 223

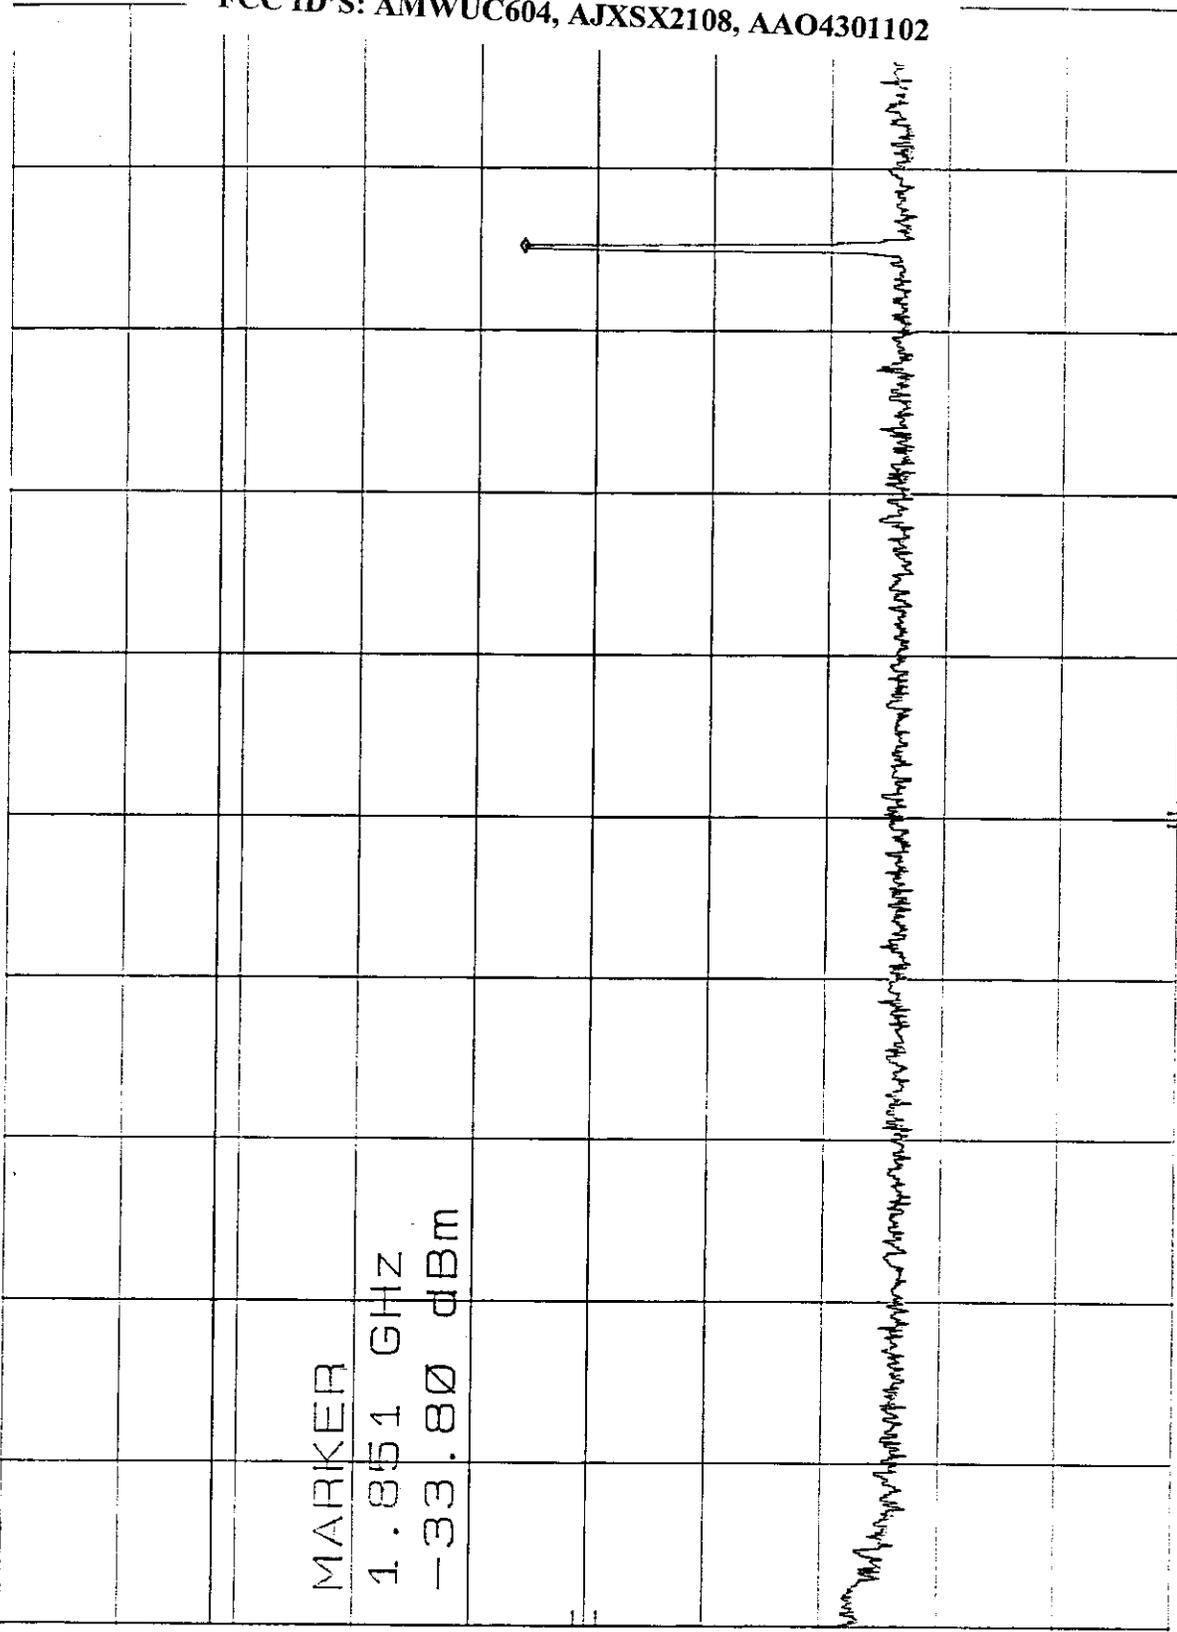

MARKER

1.851 GHz
-33.80 dBm

DL
-8.0
dBm

CORRECT

START 1.00 GHz STOP 2.00 GHz
RES BW 100 KHZ SWP 300 msec
VBW 300 KHZ

4-14-98


REF ANT. COND. TEST OF HANDSET 2GHZ-10GHZ MKR 8.312 GHz
REF 10.0 dBm ATTN 20 dB -55.70 dBm

1.5 dB

MARKER
8.312 GHz
-55.70 dBm

PL
-8.0
dBm

COIN'D

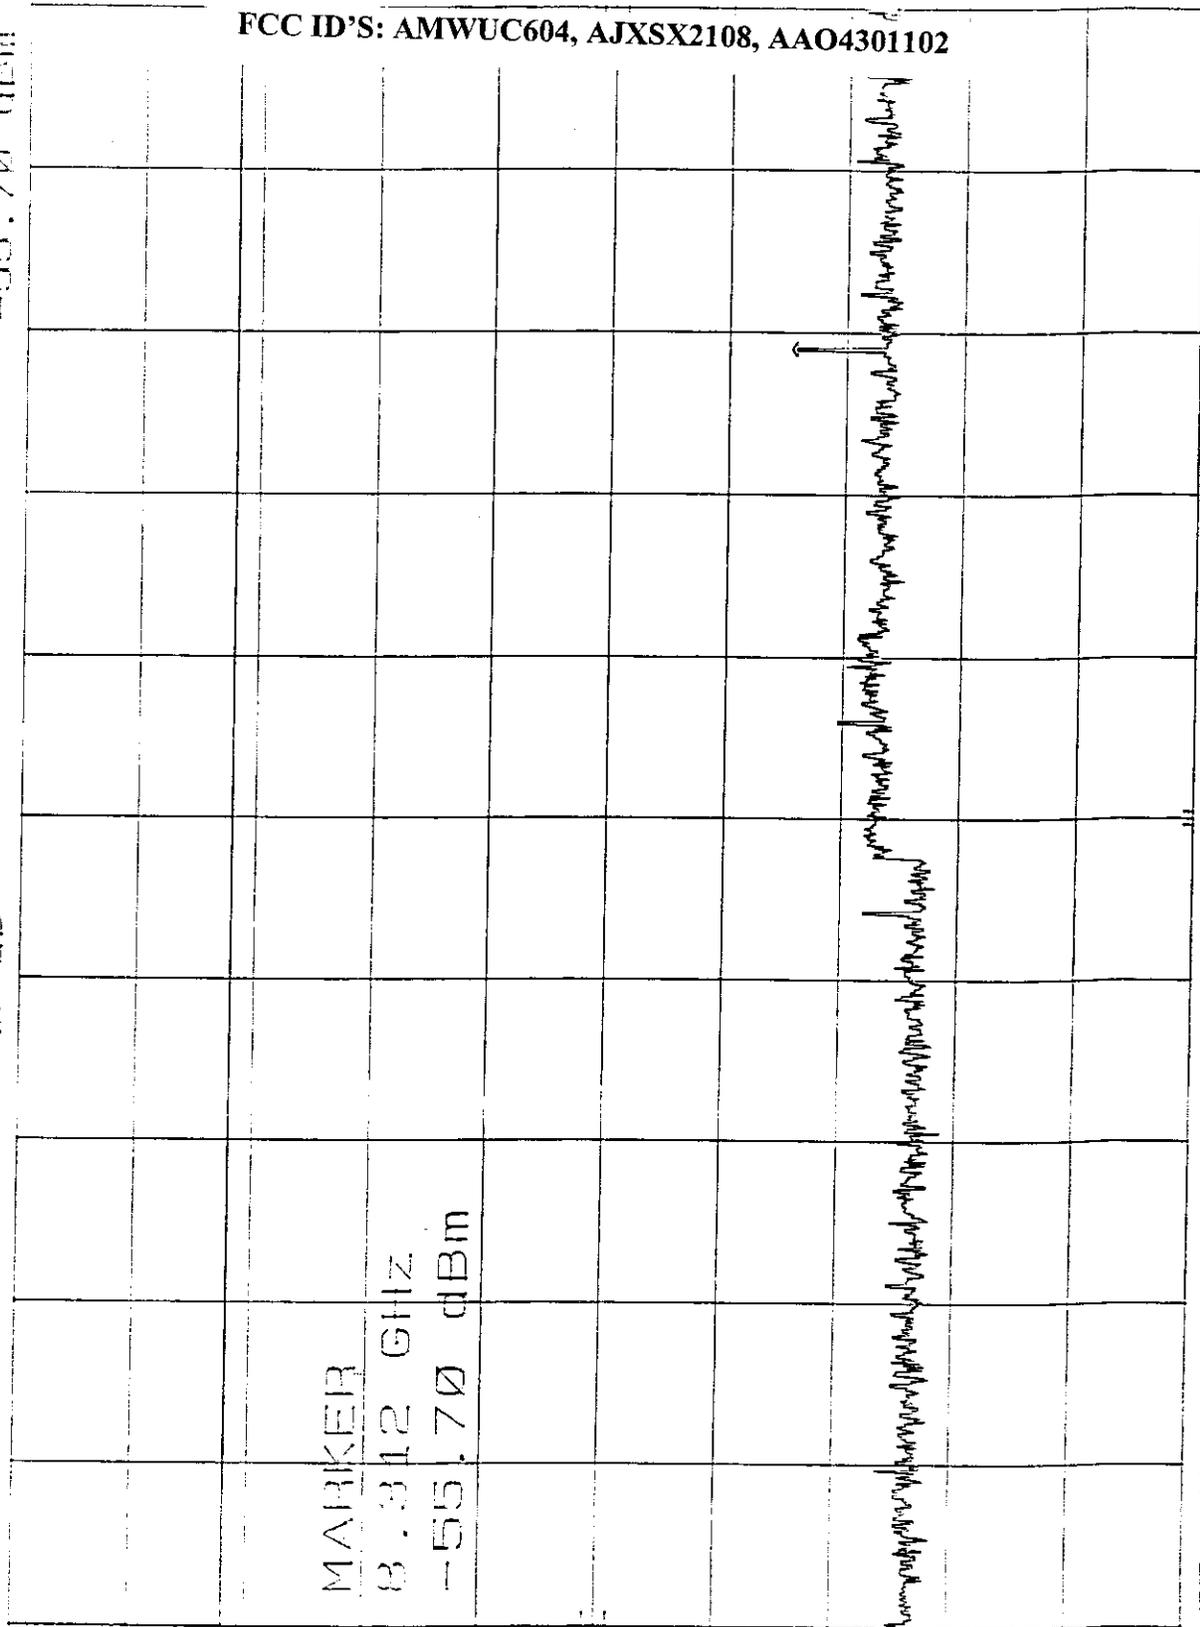


FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

START 2.00 GHz RES BW 100 KHZ VBW 300 KHZ STOP 10.00 GHz
1.5 dB SFP 2.40 sec

4-18-98

BAND EDGE OF HANDSET CH. 20
REF 20.0 dBm ATTEN 30 dB
MKR 928.000 MHz
-29.00 dBm

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

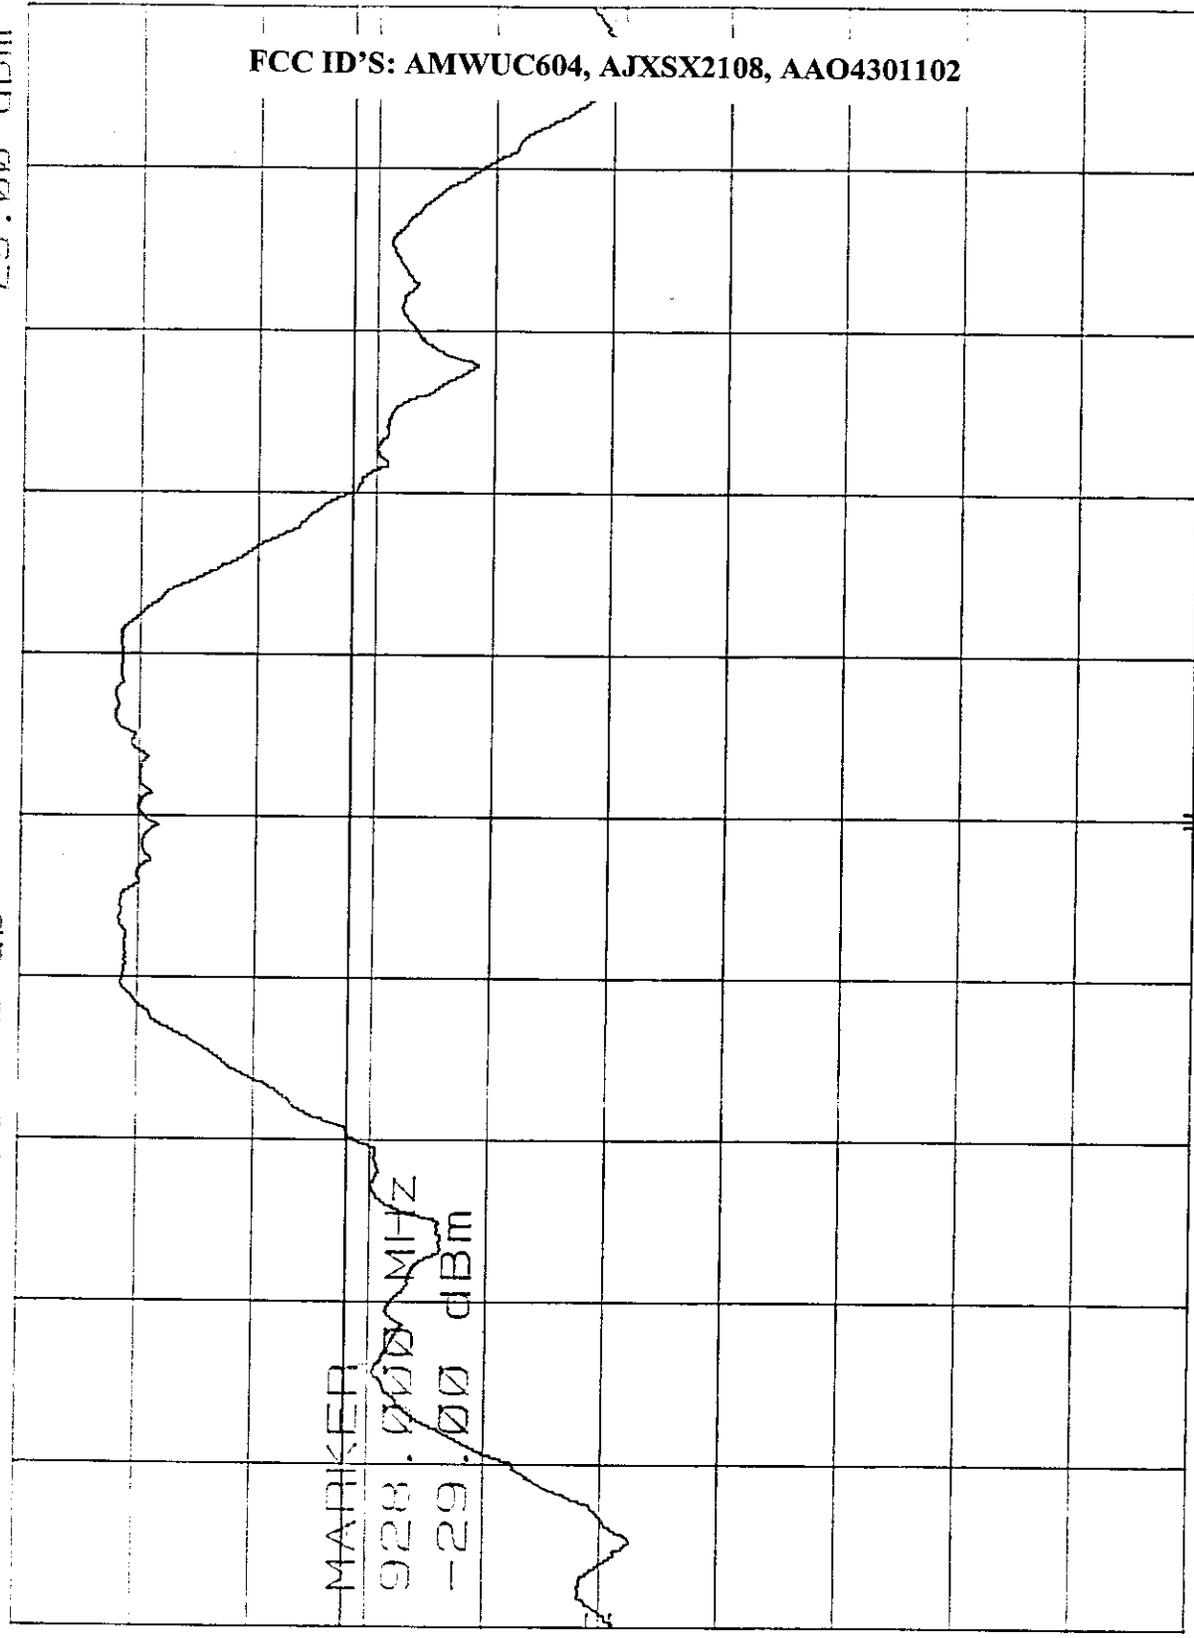

SPAN 5.00 MHz
SWP 20.0 msec

VBW 300 KHZ

CENTER 925.77 MHz
RES BW 100 KHZ

141
30 dBm

DL
-8.0
dBm

CORR'D



**COMPATIBLE
ELECTRONICS**

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

PAGE 226

SECTION 15.247 (c)

RADIATED EMISSIONS FOR THE HANDSET



COMPATIBLE ELECTRONICS

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

RADIATED EMISSIONS

COMPANY NAME: UNIDEN CORPORATION DATE: 4-13-98

EUT: 900 MHz SPACE SPECTRUM Cordless Phone EUT SN: PROTOTYPE

EUT MODEL: EXS 911D LOCATION: [X] BREA [] SILVERADO [] AGOURA

SPECIFICATION: FCC 15.247 CLASS: TEST DISTANCE: 3M LAB: D

ANTENNA: [X] LOOP [] BICONICAL [] LOG [] HORN POLARIZATION: [] VERT [] HORIZ

[X] QUALIFICATION [] ENGINEERING [] MFG. AUDIT [] ENGINEER: KYLE F.

NOTES: HANDSET

Frequency (kHz)	Peak Reading (dBuV)	Avg. <input type="checkbox"/> Q.P. <input type="checkbox"/> (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Distance Factor (dB)	Antenna Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
			NO EMISSIONS FOUND						
			BETWEEN 10 KHZ AND 30 MHz						
			FOR THE HANDSET.						

* CORRECTED READING = METER READING - DISTANCE FACTOR - ANTENNA GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT

BREA (714) 579-0500

SILVERADO (714) 589-0700

AGOURA (818) 597-0600

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

Page: 1 of 3

Test location: Compatible Electronics
 Customer : UNIDEN CORPORATION Date : 4/13/1998
 Manufacturer : UNIDEN CORPORATION Time : 13.41
 EUT name : 900 MHZ SPREAD SPECTRUM CORDLESS PHONE Model: EXS9110
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor(20*log(test/spec)) : 0.00
 Test Mode :
 HANDSET - SPURIOUS EMISSIONS
 TEMPERATURE 60 DEGREES F.
 RELATIVE HUMIDITY 55%

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1V	36.05	55.20	0.50	12.17	38.96	28.91	40.00	-11.09
2V	48.05	53.40	0.58	11.50	39.00	26.48	40.00	-13.52
3V	80.89	53.60	0.71	8.78	38.31	24.78	40.00	-15.22
4V	120.03	50.90	0.98	10.90	38.90	23.88	43.50	-19.62
5V	161.61	38.40	1.29	14.17	38.60	15.26	43.50	-28.24
6V	182.43	42.30	1.40	14.96	38.72	19.94	43.50	-23.56
7V	201.63	43.90	1.40	15.84	38.98	22.16	43.50	-21.34
8V	220.83	49.90	1.40	16.30	38.75	28.85	46.00	-17.15
9V	240.04	49.10	1.52	16.82	38.64	28.80	46.00	-17.20
10V	259.24	49.70	1.64	17.91	38.64	30.61	46.00	-15.39
11V	302.45	44.30	1.80	14.01	38.61	21.50	46.00	-24.50
12V	316.85	44.60	1.83	14.07	38.70	21.80	46.00	-24.20
13V	336.04	47.80	1.87	14.14	38.82	25.00	46.00	-21.00
14V	350.45	44.00	1.90	14.25	38.89	21.26	46.00	-24.74
15V	355.25	48.70	1.91	14.80	38.84	26.57	46.00	-19.43
16V	364.84	47.90	1.93	15.89	38.72	27.00	46.00	-19.00
17V	369.64	45.70	1.94	16.44	38.66	25.41	46.00	-20.59
18V	384.04	49.70	1.97	18.08	38.56	31.19	46.00	-14.81
19V	393.63	44.90	1.99	19.17	38.53	27.54	46.00	-18.46
20V	398.43	49.60	2.00	19.72	38.51	32.81	46.00	-13.19
21V	403.23	52.80	2.01	19.61	38.48	35.94	46.00	-10.06
22V	412.83	46.90	2.05	18.74	38.42	29.27	46.00	-16.73
23V	422.44	52.00	2.09	17.88	38.37	33.61	46.00	-12.39
24V	427.23	50.70	2.11	17.45	38.34	31.92	46.00	-14.08
25V	432.03	49.40	2.13	17.02	38.31	30.24	46.00	-15.76
26V	436.83	51.80	2.15	16.59	38.28	32.25	46.00	-13.75
27V	441.63	56.30	2.17	16.15	38.25	36.37	46.00	-9.63
28V	446.43	52.60	2.19	15.72	38.22	32.29	46.00	-13.71
29V	451.23	53.20	2.21	15.43	38.21	32.62	46.00	-13.38
30V	456.04	52.70	2.24	15.54	38.26	32.22	46.00	-13.78

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

Test location: Compatible Electronics
 Customer : UNIDEN CORPORATION Date : 4/13/1998
 Manufacturer : UNIDEN CORPORATION Time : 13.41
 EUT name : 900 MHZ SPREAD SPECTRUM CORDLESS PHONE Model: EXS9110
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor(20*log(test/spec)) : 0.00
 Test Mode :
 HANDSET - SPURIOUS EMISSIONS
 TEMPERATURE 60 DEGREES F.
 RELATIVE HUMIDITY 55%

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
31V	460.84	54.60	2.27	15.66	38.31	34.22	46.00	-11.78
32V	465.64	52.20	2.29	15.78	38.36	31.91	46.00	-14.09
33V	470.44	54.40	2.32	15.89	38.40	34.21	46.00	-11.79
34V	489.63	56.20	2.44	16.35	38.60	36.39	46.00	-9.61
35V	494.44	54.10	2.47	16.47	38.64	34.39	46.00	-11.61
36V	508.84	55.30	2.57	16.49	38.59	35.77	46.00	-10.23
37V	513.64	55.00	2.61	16.44	38.54	35.51	46.00	-10.49
38V	518.11	50.00	2.64	16.38	38.48	30.54	46.00	-15.46
39V	528.03	55.50	2.72	16.26	38.36	36.12	46.00	-9.88
40V	547.24	53.00	2.88	16.03	38.13	33.78	46.00	-12.22
41V	604.84	42.50	3.04	18.78	38.51	25.81	46.00	-20.19
42V	812.69	47.70	4.20	21.98	37.80	36.08	46.00	-9.92
43V	996.75	44.60	4.21	22.44	37.65	33.59	54.00	-20.41

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

Test location: Compatible Electronics
 Customer : UNIDEN CORPORATION Date : 4/13/1998
 Manufacturer : UNIDEN CORPORATION Time : 14.30
 EUT name : 900 MHZ SPREAD SPECTRUM CORDLESS PHONE Model: EXS9110
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor(20*log(test/spec)) : 0.00
 Test Mode :
 HANDSET - SPURIOUS EMISSIONS
 TEMPERATURE 60 DEGREES F.
 RELATIVE HUMIDITY 55%

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1H	74.27	53.30	0.70	9.37	38.47	24.90	40.00	-15.10
2H	115.31	41.60	0.96	10.62	38.81	14.37	43.50	-29.13
3H	185.79	51.90	1.40	15.12	38.77	29.65	43.50	-13.85
4H	336.04	51.70	1.87	14.14	38.82	28.90	46.00	-17.10
5H	355.24	53.20	1.91	14.80	38.84	31.07	46.00	-14.93
6H	374.44	54.50	1.95	16.99	38.61	34.83	46.00	-11.17
7H	403.23	47.10	2.01	19.61	38.48	30.24	46.00	-15.76
8H	412.83	49.10	2.05	18.74	38.42	31.47	46.00	-14.53
9H	432.04	46.80	2.13	17.02	38.31	27.64	46.00	-18.36
10H	441.64	50.60	2.17	16.15	38.25	30.67	46.00	-15.33
11H	460.84	50.80	2.27	15.66	38.31	30.42	46.00	-15.58
12H	528.04	49.10	2.72	16.26	38.36	29.72	46.00	-16.28
13H	604.83	44.50	3.04	18.78	38.51	27.81	46.00	-18.19



COMP/ELECTRONICS
 FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

E 1 of 12

RADIATED EMISSIONS

COMPANY NAME: UNIDEM CORPORATION DATE: 4-17-98

EUT: 900 MHz Stereo Spectrum Phone EUT S/N: PROTOTYPE

EUT MODEL: EXS9110 LOCATION: BREA SILVERADO AGOURA

SPECIFICATION: FCC 15.247 CLASS: _____ TEST DISTANCE: 3m LAB: D

ANTENNA: LOOP BICONICAL LOG HORN POLARIZATION: VERT HORIZ

QUALIFICATION ENGINEERING MFG. AUDIT ENGINEER: KYLE F

NOTES: HANDSET - CH 1

Frequency (GHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
0.904	110.0	104.0	1.5	90	23.3	-	33.3	94.0	-	-
1.809	68.6	62.6	3.0	0	24.5	5.9	29.0	64.0	-10.0	74.0
2.712	44.0	38.0	1.0	90	28.2	5.5	26.8	44.9	-9.1	54.0
3.616	43.1	37.1	1.0	90	29.6	6.9	23.9	49.7	-4.3	54.0
4.521	39.0	33.0	1.0	180	30.9	8.6	22.1	50.4	-3.6	54.0
5.425	41.2	35.2	1.0	90	32.4	9.2	32.0	44.8	-9.2	54.0
6.329	40.3	34.3	1.0	90	34.3	10.3	32.0	46.9	-27.1	74.0
7.233	38.4	32.4	1.0	90	36.8	11.4	32.0	48.6	-5.4	54.0
8.138	37.3	31.3	1.0	90	37.1	12.5	30.5	50.4	-3.6	54.0

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT

BREA (714) 579-0500

SILVERADO (714) 589-0700

AGOURA (818) 597-0600



COMPACT ELECTRONICS

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

2 of 12

RADIATED EMISSIONS

COMPANY NAME: UNIBEN CORPORATION DATE: 4-17-98

EUT: 900 Mhz Stereo Section Phones EUT S/N: PROTOTYPE

EUT MODEL: EX29110 LOCATION: BREA SILVERADO AGOURA

SPECIFICATION: FCC 15.247 CLASS: _____ TEST DISTANCE: 3M LAB: D

ANTENNA: LOOP BICONICAL LOG HORN POLARIZATION: VERT HORIZ

QUALIFICATION ENGINEERING MFG. AUDIT ENGINEER: Kyle F.

NOTES: Harvest - Ch. 1

Frequency (GHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
0.904	102.2	102.2	1.0	0	23.3	-	33.3	92.2	-	-
1.808	53.0	47.0	1.0	0	24.5	5.9	29.0	48.4	-25.6	74.0
2.712	42.8	36.6	1.0	0	28.2	5.5	26.8	43.7	-10.3	54.0
3.616	44.7	38.7	1.0	0	29.6	6.9	23.9	51.3	-2.7	54.0
4.520	38.7	32.7	1.0	0	30.9	8.6	22.1	50.1	-3.9	54.0
5.425	37.3	31.3	1.0	0	32.4	9.2	32.0	40.9	-13.1	54.0
6.330	45.0	39.0	1.0	180	34.3	10.3	32.0	51.6	-22.4	74.0
7.233	39.4	33.4	1.0	180	36.8	11.4	32.0	49.6	-4.4	54.0
8.137	36.1	30.1	1.5	180	37.1	12.5	30.5	49.2	-4.8	54.0

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT



FCC ID'S: AMWUC604, AJXSX2108, AAO4301102 3 of 12

RADIATED EMISSIONS

COMPANY NAME: UNIDEN CORPORATION DATE: 4-14-98

EUT: 900 MHz SPREAD SPECTRUM PHONE EUT S/N: PROTOTYPE

EUT MODEL: EXS9110 LOCATION: BREA SILVERADO AGOURA

SPECIFICATION: FCC 15.247 CLASS: _____ TEST DISTANCE: 3m LAB: D

ANTENNA: LOOP BICONICAL LOG HORN POLARIZATION: VERT HORIZ

QUALIFICATION ENGINEERING MFG. AUDIT ENGINEER: Kyle F.

NOTES: HANDSET ~ CHILD

Frequency (GHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
0.914	110.10	104.1	1.0	0	23.2	-	33.2	94.1	-	-
1.828	70.1	64.1	1.0	0	24.5	5.9	29.0	65.5	-8.6	74.1
2.742	43.3	37.3	1.0	0	28.2	5.5	26.8	44.2	-9.8	54.0
3.657	43.6	37.6	1.5	90	29.6	6.9	23.9	50.2	-3.8	54.0
4.571	38.7	32.7	1.0	0	30.9	8.6	22.1	50.1	-3.9	54.0
5.486	40.5	34.5	1.0	90	32.4	9.2	32.0	44.1	-9.9	54.0
6.400	45.6	39.6	1.0	0	34.3	10.3	32.0	52.2	-21.9	74.1
7.316	40.0	34.0	1.0	0	36.8	11.4	32.0	50.2	-3.8	54.0
8.228	36.5	30.5	1.0	0	37.1	12.5	30.5	49.6	-4.4	54.0

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT



COMP ELECTRONICS

RADIATED EMISSIONS

COMPANY NAME: UNIDEN CORPORATION DATE: 4-17-98

EUT: 900 MHz SPREAD SPECTRUM PHONE EUT S/N: PROTOTYPE

EUT MODEL: EX59110 LOCATION: BREA SILVERADO AGOURA

SPECIFICATION: FCC 15.247 CLASS: _____ TEST DISTANCE: 3M LAB: D

ANTENNA: LOOP BICONICAL LOG HORN POLARIZATION: VERT HORIZ

QUALIFICATION ENGINEERING MFG. AUDIT ENGINEER: KYLE F.

NOTES: HANDSET - CH. 10

Frequency (GHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
0.914	108.1	102.1	1.0	0	23.2	-	33.2	92.1	-	-
1.1828	56.8	50.8	3.0	0	24.5	5.9	29.0	52.2	-21.9	74.1
2.743	42.4	36.4	1.0	0	28.2	5.5	26.8	43.3	-10.7	54.0
3.1657	42.9	36.9	2.0	0	29.6	6.9	23.9	49.5	-4.5	54.0
4.571	36.3	30.3	1.0	0	30.9	8.6	22.1	47.7	-6.3	54.0
5.486	37.3	31.3	1.0	90	32.4	9.2	32.0	40.9	-13.1	54.0
6.400	43.2	37.2	1.5	90	34.3	10.3	32.0	49.8	-24.3	74.1
7.315	40.2	34.2	2.0	90	36.8	11.4	32.0	50.4	-3.6	54.0
8.229	37.1	31.1	1.0	90	37.1	12.5	30.5	50.2	-3.8	54.0

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT



COMPACT ELECTRONICS

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

PAGE 5 of 12

RADIATED EMISSIONS

COMPANY NAME: UNIBEN CORPORATION DATE: 4-17-98
 EUT: 900 MHz SPREAD SPECTRUM PHONE EUT S/N: PROTOTYPE
 EUT MODEL: EXS9110 LOCATION: BREA SILVERADO AGOURA
 SPECIFICATION: FCC 15.247 CLASS: _____ TEST DISTANCE: 3M LAB: D
 ANTENNA: LOOP BICONICAL LOG HORN POLARIZATION: VERT HORIZ
 QUALIFICATION ENGINEERING MFG. AUDIT ENGINEER: KYLE F.
 NOTES: HANDSET - CH. 20

Frequency (GHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
.926	110.2	104.2	2.0	0	23.2	-	33.1	94.3	-	-
1.851	68.7	62.7	1.0	0	24.5	5.7	29.1	63.8	-11.5	75.3
2.777	47.6	41.6	2.0	0	29.7	6.4	28.2	49.5	-4.5	54.0
3.703	44.5	38.5	3.0	0	29.6	6.9	23.9	51.1	-2.9	54.0
4.628	38.5	32.5	1.0	90	30.9	8.6	22.1	49.9	-4.1	54.0
5.554	38.9	32.9	1.5	270	32.4	9.2	32.0	42.5	-11.5	54.0
6.480	45.0	39.0	1.0	0	34.3	10.3	32.0	51.6	-23.7	75.3
7.406	36.9	30.9	1.0	0	36.8	11.4	32.0	47.1	-6.9	54.0
8.332	36.4	30.4	1.0	0	37.1	12.5	30.5	49.5	-4.5	54.0

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT

BREA (714) 579-0500

SILVERADO (714) 589-0700

AGOURA (818) 597-0600



RADIATED EMISSIONS

COMPANY NAME: UNIDEN CORPORATION DATE: 4-17-98

EUT: 900 MHz SARAO SPECTRUM PHONE EUT S/N: PROTOTYPE

EUT MODEL: EX59110 LOCATION: BREA SILVERADO AGOURA

SPECIFICATION: FCC 15.247 CLASS: _____ TEST DISTANCE: 3M LAB: D

ANTENNA: LOOP BICONICAL LOG HORN POLARIZATION: VERT HORIZ

QUALIFICATION ENGINEERING MFG. AUDIT ENGINEER: KYLE F.

NOTES: HANDSET - CH. 20

Frequency (GHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
0.926	111.2	105.2	1.0	0	23.2	-	33.1	95.3	-	-
1.852	54.7	48.4	3.0	180	24.5	5.7	29.1	49.5	-25.8	75.3
2.777	45.3	39.3	1.0	180	29.7	6.4	28.2	47.2	-6.8	54.0
3.704	44.6	38.6	1.5	180	29.6	6.9	23.9	51.2	-2.8	54.0
4.629	38.6	32.6	1.0	180	30.9	8.6	22.1	50.0	-4.0	54.0
5.554	36.3	30.3	1.0	90	32.4	9.2	32.0	39.9	-14.1	54.0
6.480	45.3	39.3	3.0	90	34.3	10.3	32.0	51.9	-23.4	75.3
7.407	39.0	33.0	2.0	90	36.8	11.4	32.0	49.2	-4.8	54.0
8.332	36.4	30.4	3.0	90	37.1	12.5	30.5	49.5	-4.5	54.0

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT



SECTION 15.247 (a)(2)

***BANDWIDTH AT -6dB POINTS
FOR BASE***

PAGE A38 - CHANNEL 1

PAGE A39 - CHANNEL 10


PAGE A40 - CHANNEL 20

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

4-14-98

MKR Δ 1.400 MHz
-0.30 dB

BANDWIDTH OF BASE CH. 1
REF 30.0 dBm ATTN 40 dB

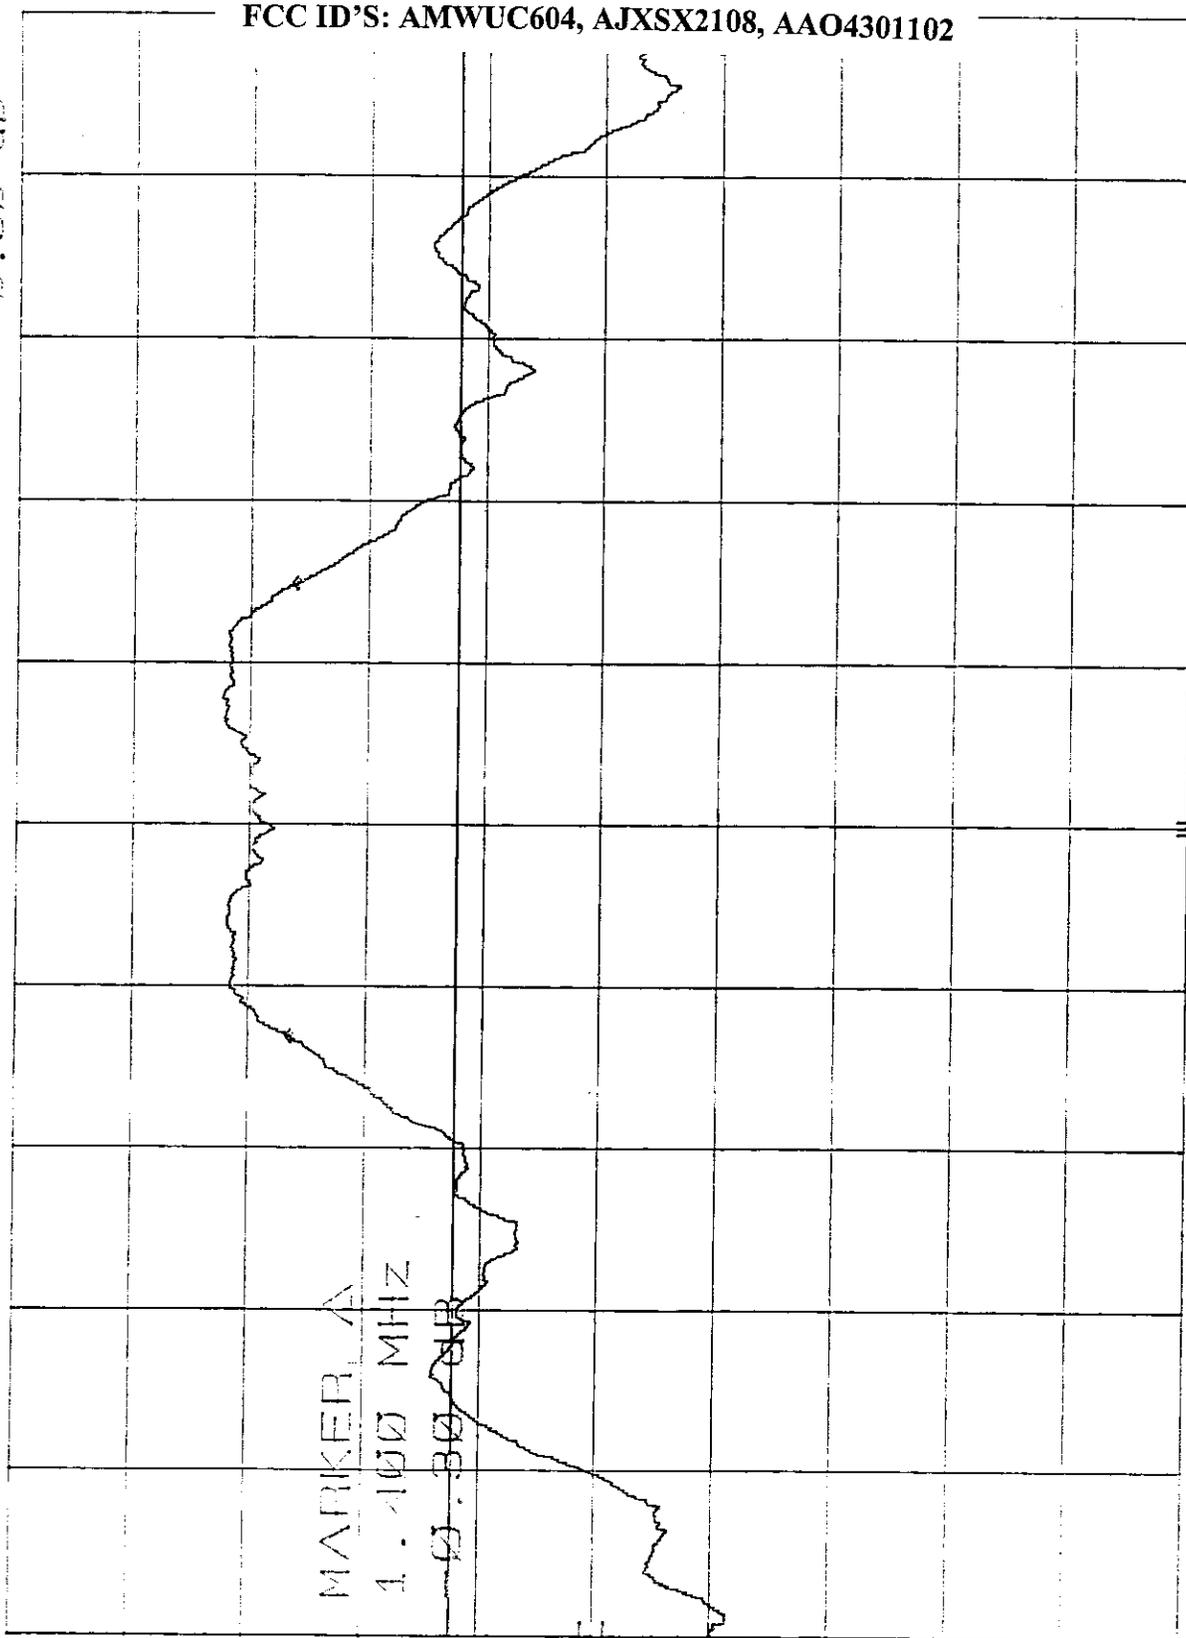

SPAN 5.00 MHz
SWP 20.0 msec

VBW 300 KHz

CENTER 904.45 MHz
RES BW 100 KHz

CORRUPT


4/1

10 dB

DB
-77.7
dBm

4-14-78

BANDWIDTH OF BASE CH. 10
REF 30.0 dBm ATTEN 40 dB
MKR Δ 1.405 MHz
-0.20 dB

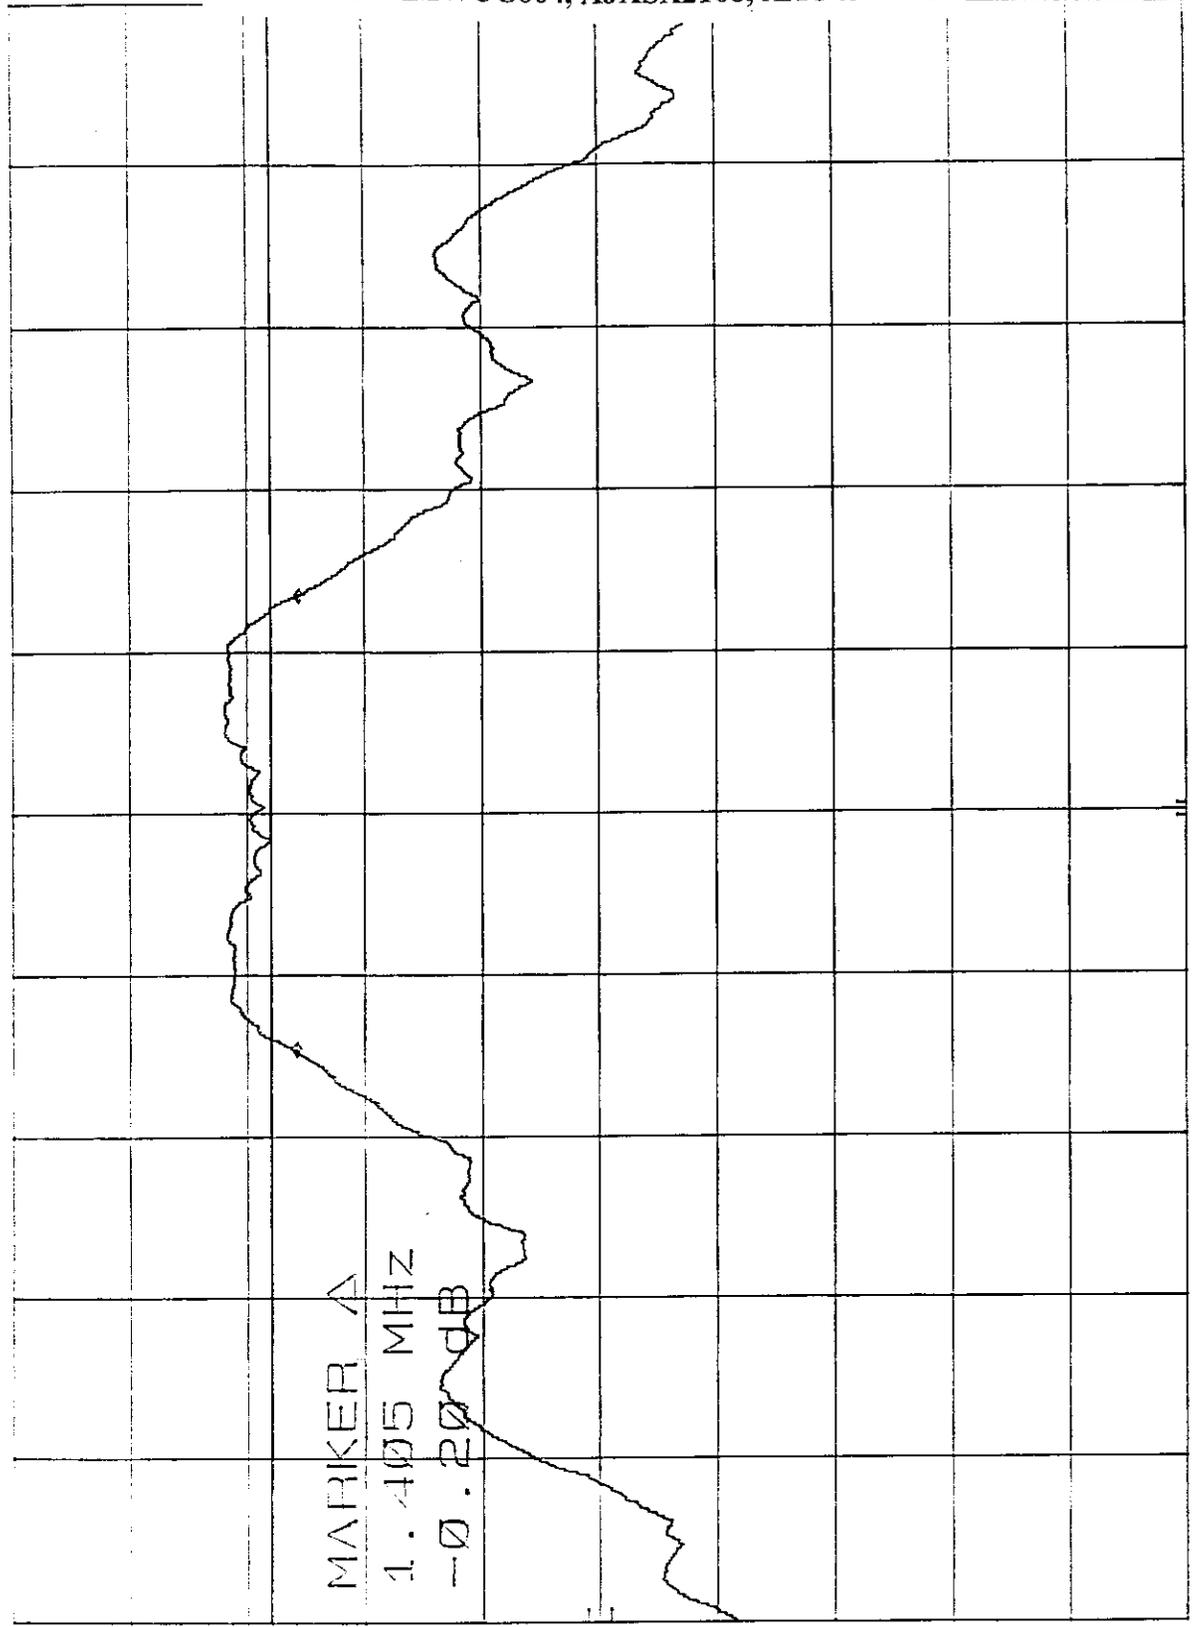

141

10 dBm

DL
8.0
dBm

CORR'D

CENTER 914.42 MHz
RES BW 100 KHZ
V BW 300 KHZ
SPAN 5.00 MHz
SWP 20.0 msec

4-14-98

MKR Δ 1.410 MHz
-0.10 dB

BANDWIDTH OF BASE CH. 20
REF 20.0 dBm ATTEN 30 dB

147

100 dBm


MARKER Δ

1.410 MHz

-0.10 dB

01.
1.6
dBm

COBR'D

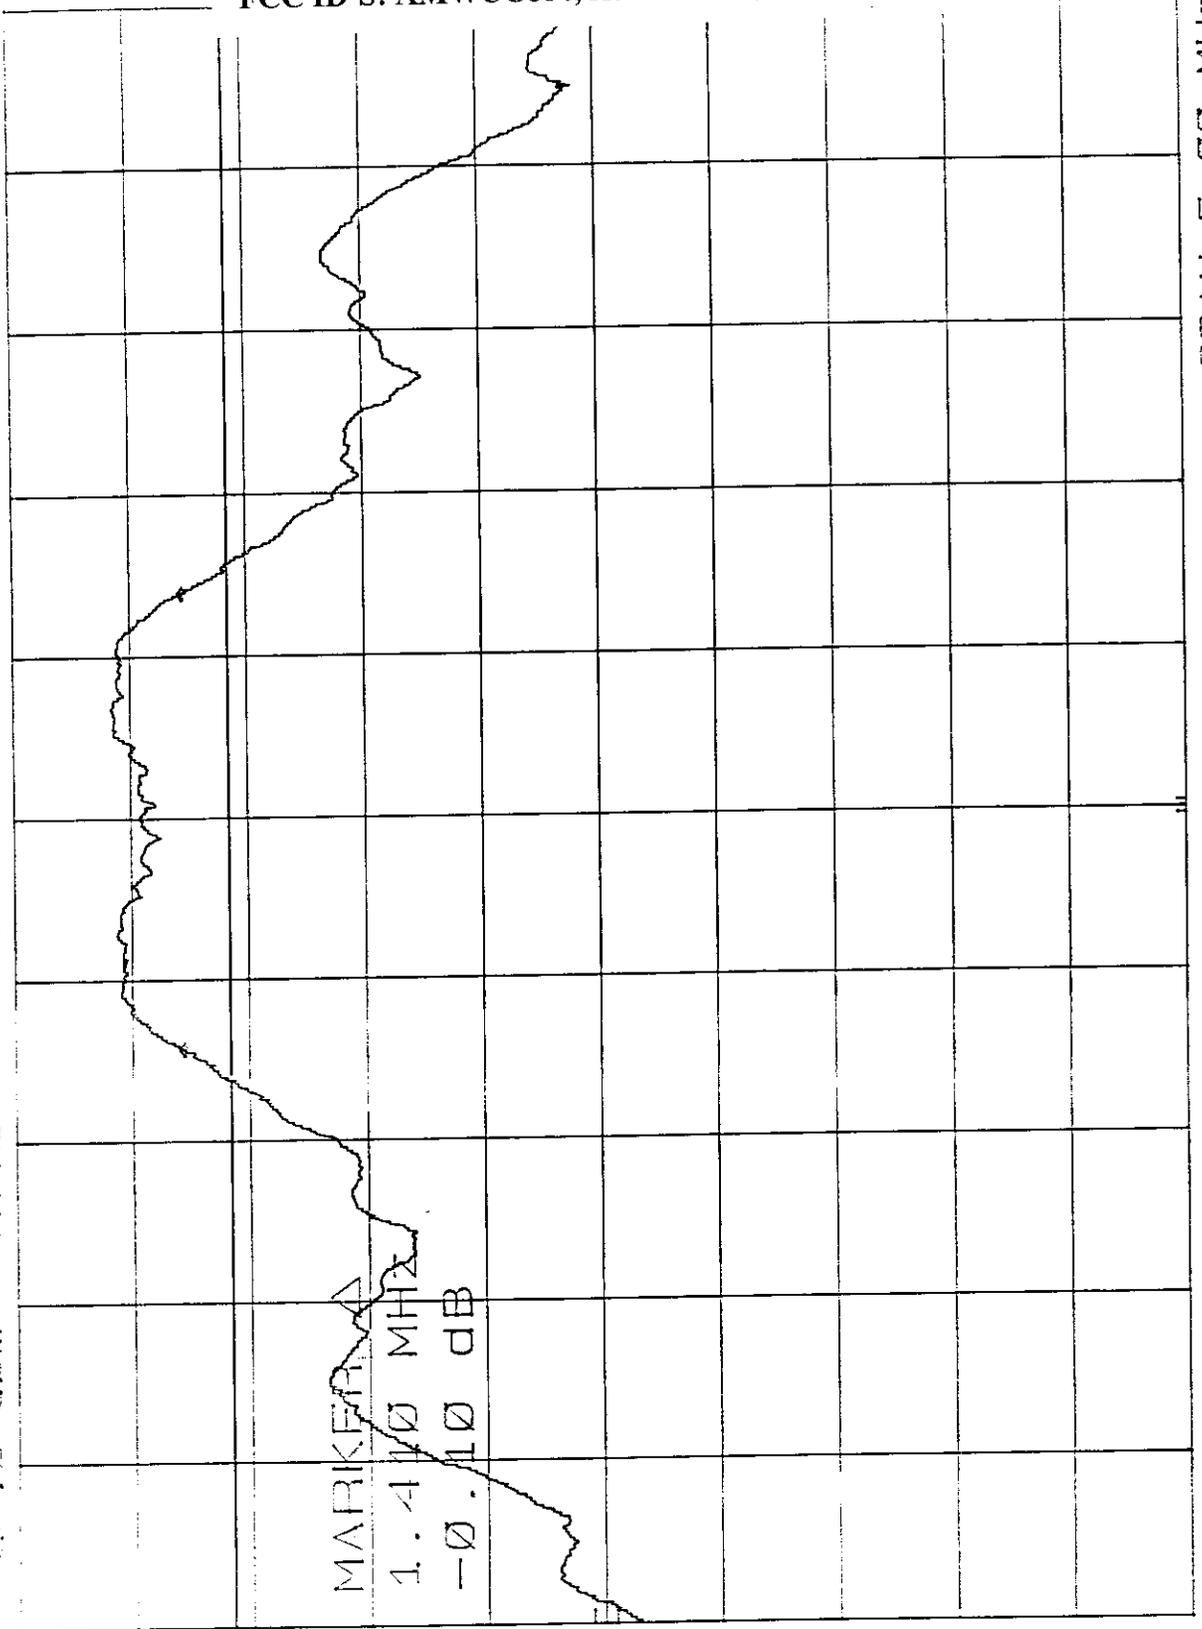

CENTER 925.00 MHz
RES BW 100 KHz

VBW 300 KHz

SPAN 5.00 MHz
SWP 20.0 msec



SECTION 15.247 (b)

POWER OUTPUT OF BASE

PAGE A42 - CHANNEL 1


PAGE A43 - CHANNEL 10

PAGE A44 - CHANNEL 20

4-14-98

MKR 904.22 MHz
19.50 dBm

POWER OUTPUT OF BASE CH. 1
REF 30.0 dBm ATTN 40 dB

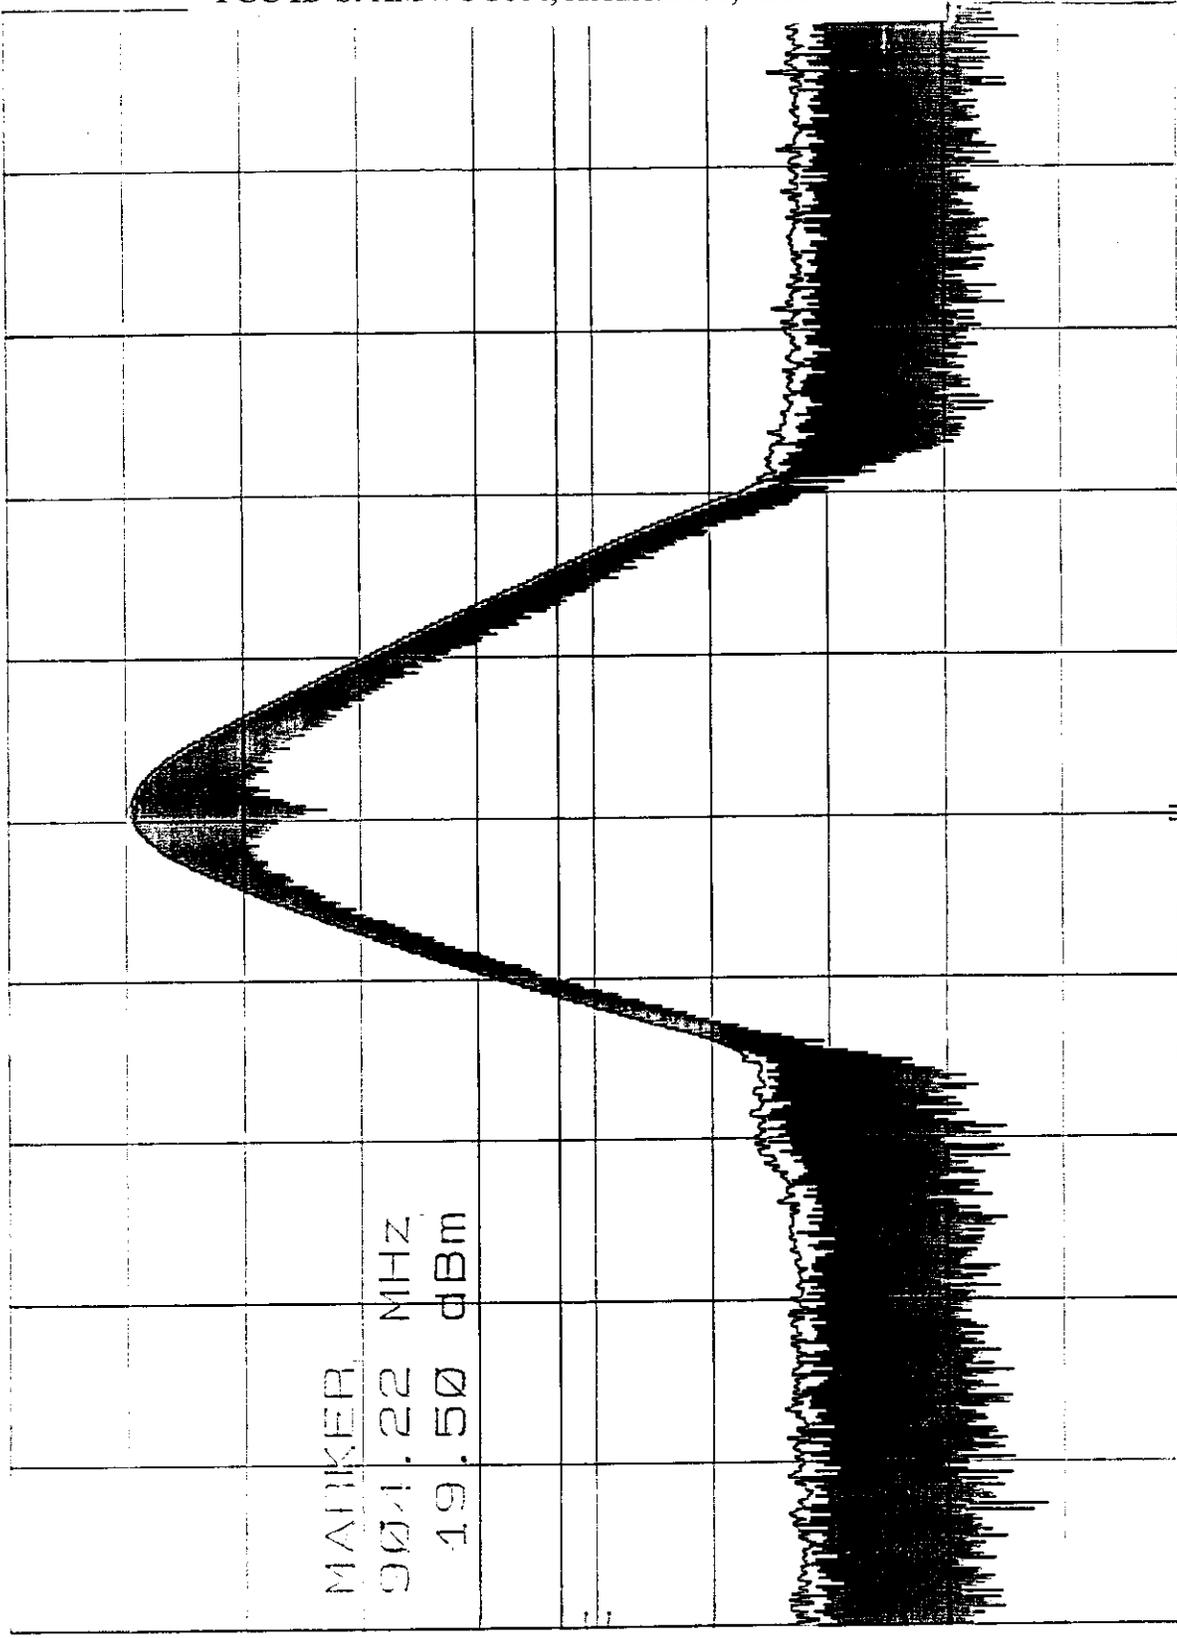

MARKER
904.22 MHz
19.50 dBm

PL
-17.0
dBm

COH110

SPAN 50.0 MHz
SMP 20.0 msec
VBW 1 MHz
RBW 3 MHz

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

4-14-98

COUPLED OUTPUT OF BASE ANT. 10
100 dBm 207.0 dBm ATTEN 40 dB


MKII 014.40 MHz
18.20 dBm

100 dBm

MALIKEN
014.40 MHz
18.20 dBm

100 dBm

COUPLED

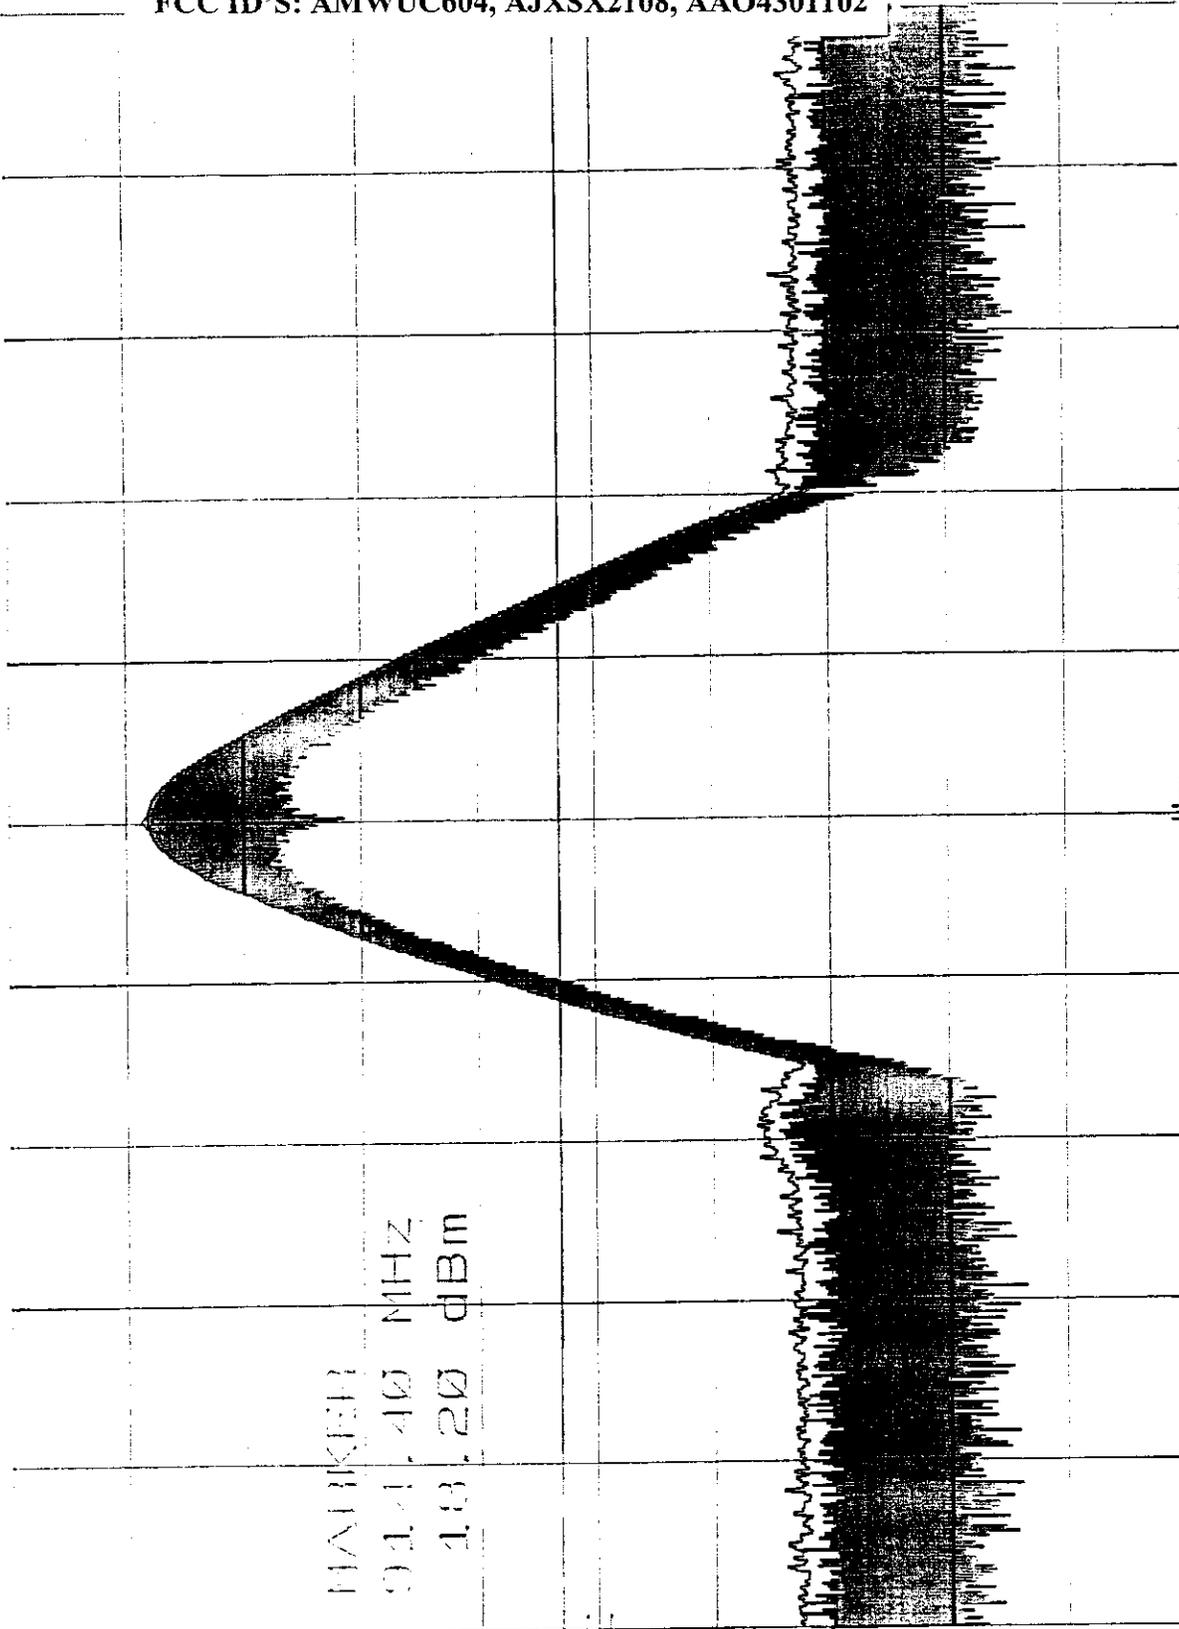

CENTRE 014.4 MHz
RES BW 3 MHz

VBW 1 MHz

SPAN 50.0 MHz
SWP 20.0 msec

4-14-98

MKR 925.60 MHz
18.10 dBm


POWER OUTPUT OF BASE CH. 20
REF 37.0 dBm ATTEN 40 dB

177

40 dBm

MARKER
925.60 MHz
18.10 dBm

177
40 dBm

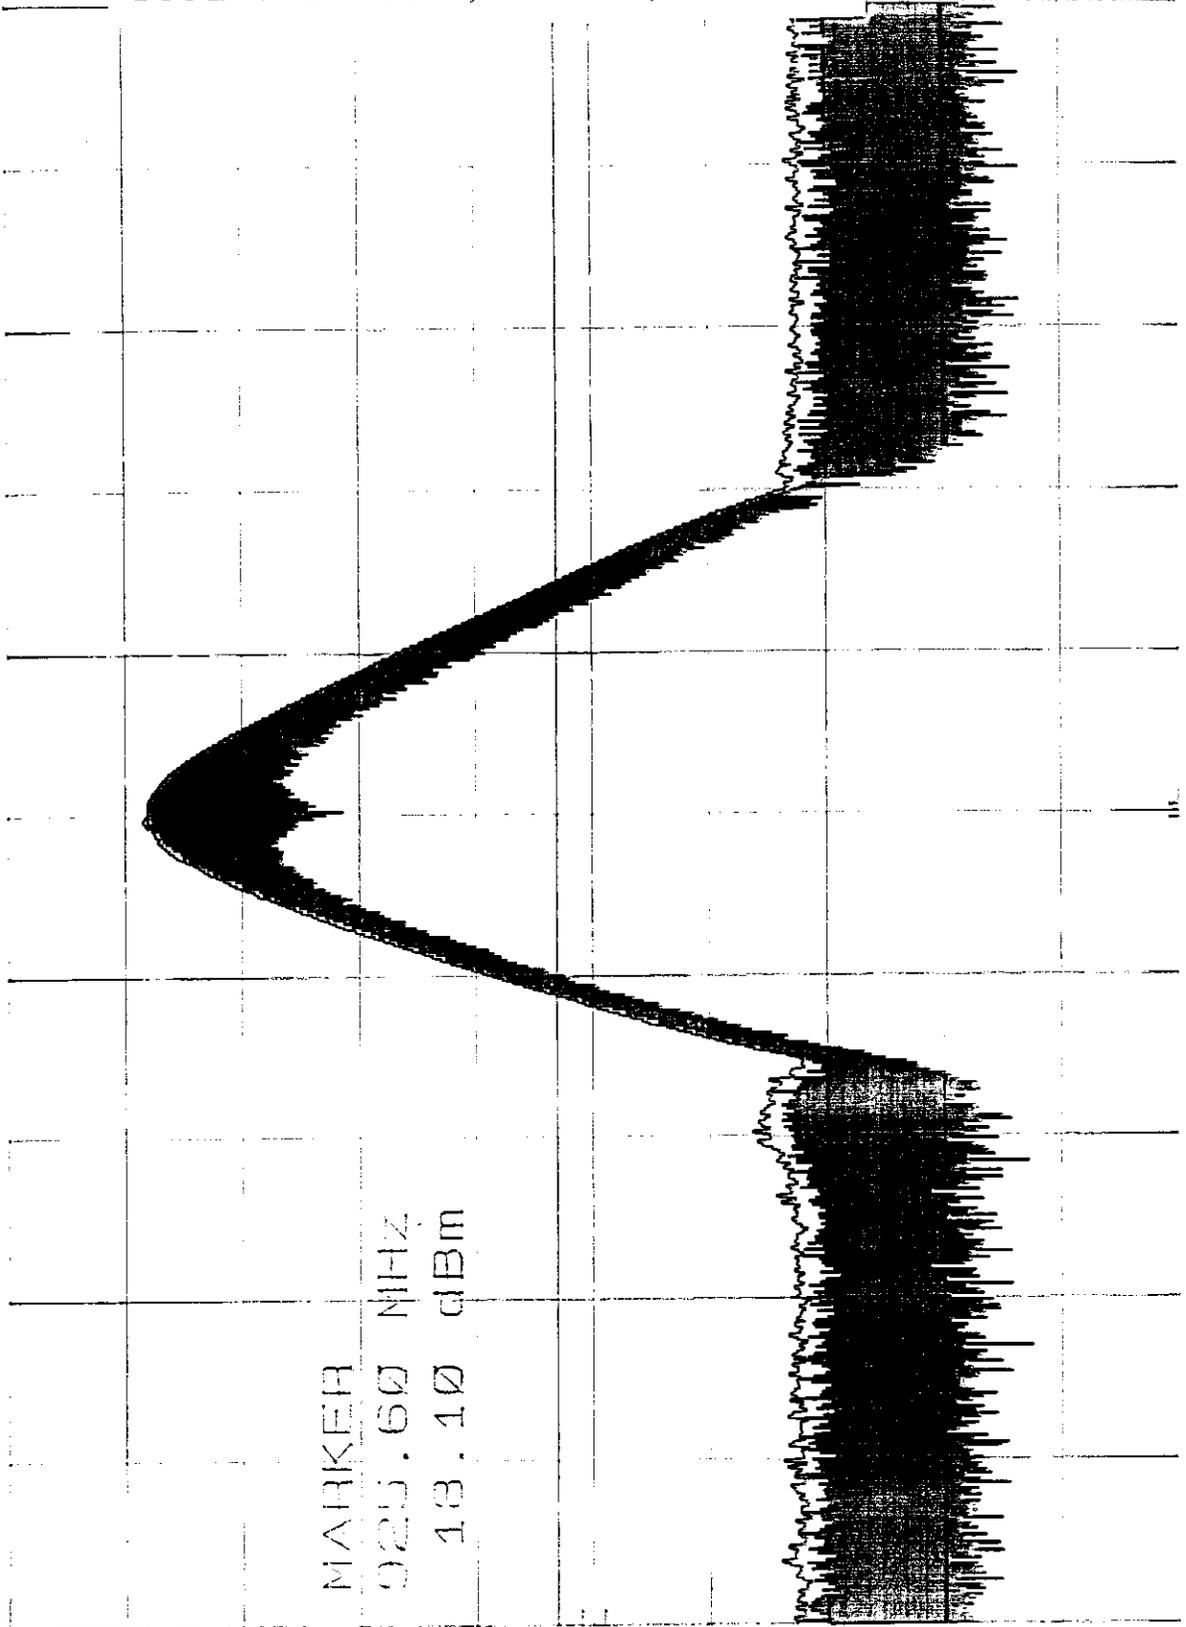

SPAN 50.0 MHz
SWP 20.0 MHz

VBW 1 MHz

RES BW 3 MHz

177
40 dBm



SECTION 15.247 (d)

SPECTRAL DENSITY OUTPUT OF BASE

PAGE A46 - CHANNEL 1

PAGE A47 - CHANNEL 10


PAGE A48 - CHANNEL 20

4-14-98

SPECTRAL DENSITY OUTPUT OF BASE CH. 1 MKR 903.948 4 MHz
REF 30.0 dBm ATTEM 10 dB

147

10 dB

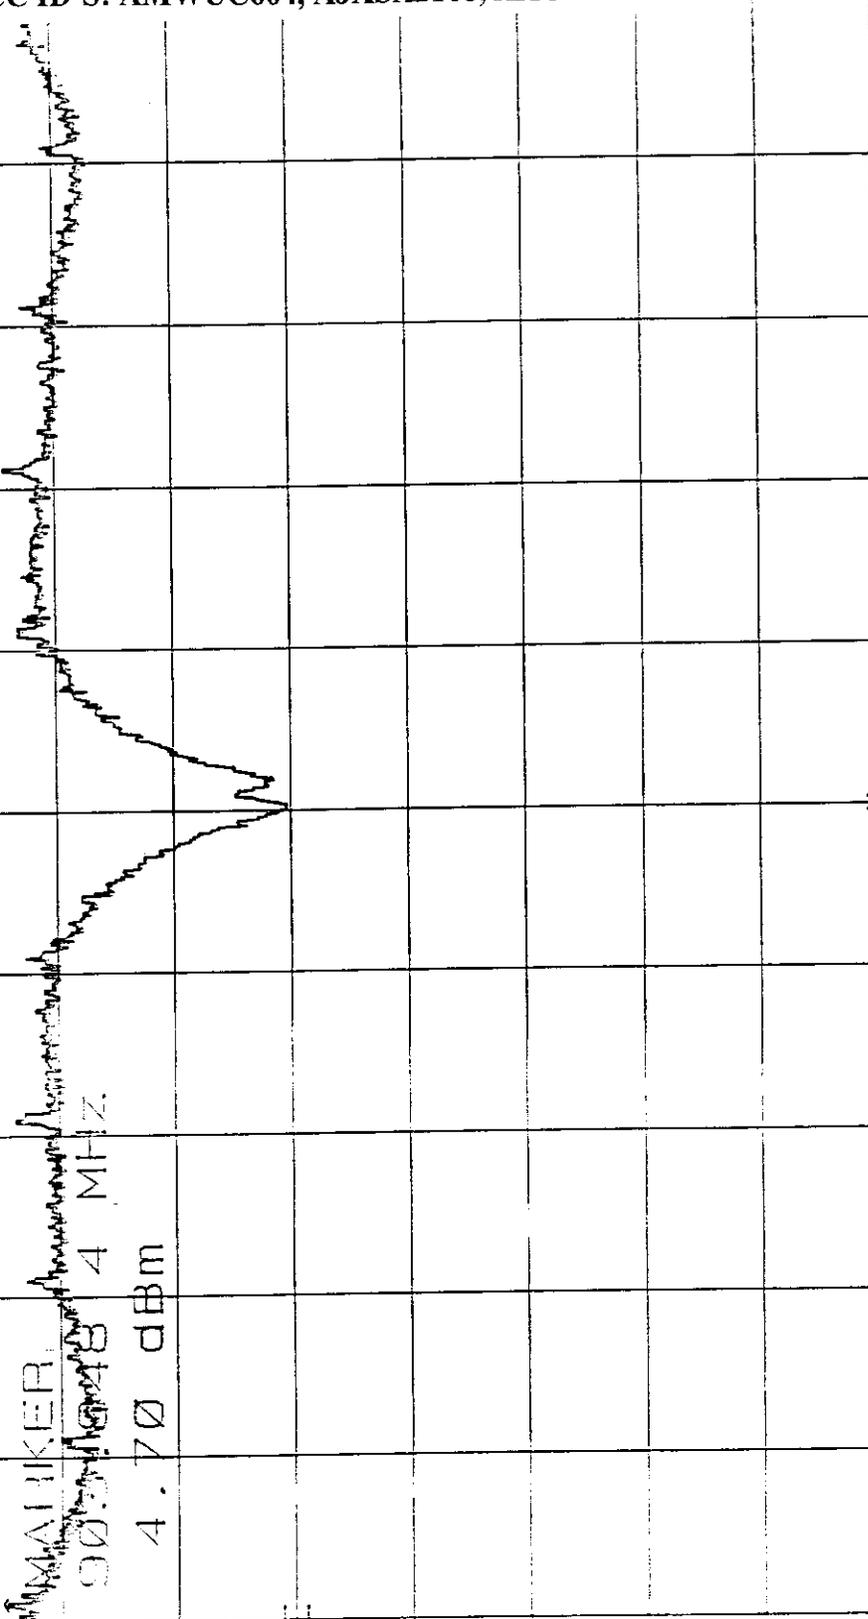

DL
3.0
dBm

CORRECTED

CENTRE 904.103 MHz
RES BW 3 KHZ


SPAN 500 KHZ
SWP 167 sec
VBW 10 KHZ

4-14-98

SPECTRAL DENSITY OUTPUT OF BASE CH. 10 MKR 914.647 8 MHz
REF 30.0 dBm ATTEN 40 dB

1/4

10 dBZ

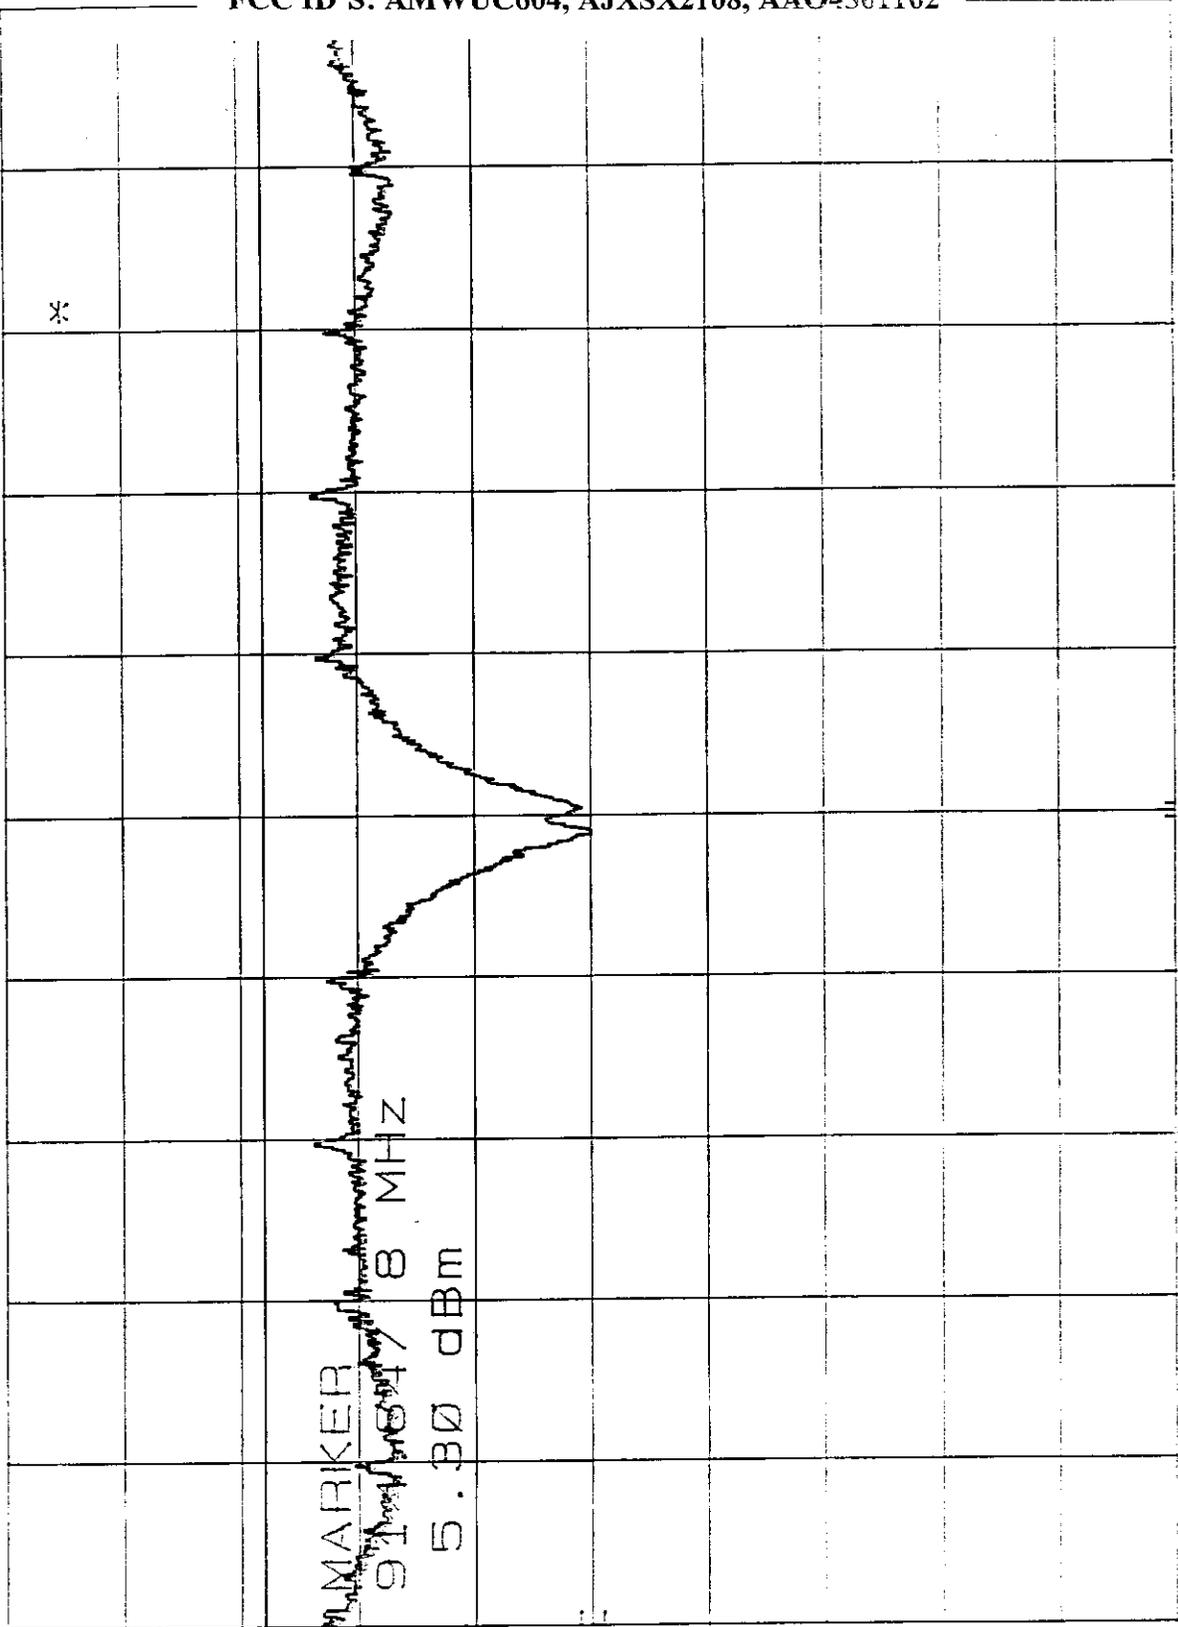

MARKER
914.647 8 MHz
5.30 dBm

DL
8.0
dBm

COH11D

CENTER 914.647 MHz
RES BW 3 KHZ

VBW 10 KHZ


SWP 167

SPAN 500 KHZ

SEC

4-14-98

SPECTRAL DENSITY OUTPUT OF BASE CH. 20 MKR 926.049 1. MHz
REF 20.0 dBm ATTEN 30 dB 5.10 dBm

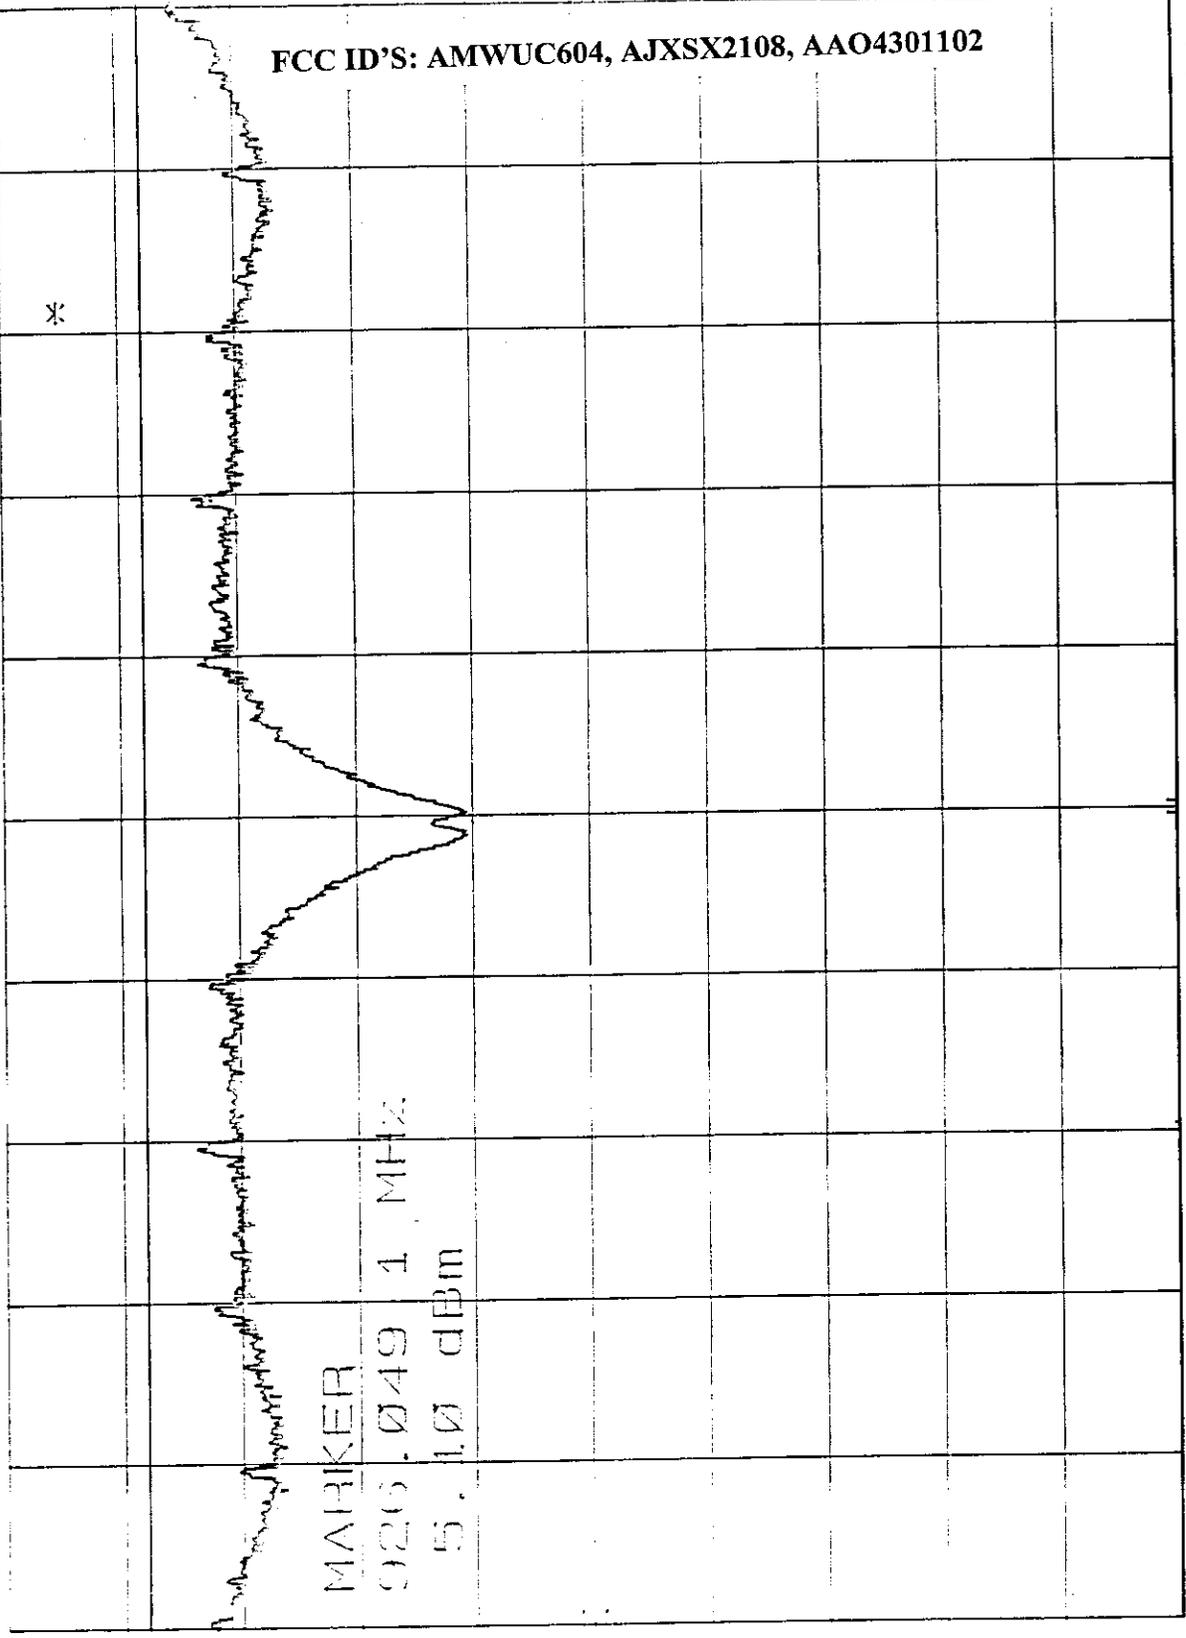

141

1.0 dBm

1.0
dBm

COH'D

CENTER 925.800 MHz
RES BW 3 KHz

VBW 10 KHz

SWP 167 sec

SPAN 500 KHz

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102




SECTION 15.247 (c)

***RF ANTENNA CONDUCTED EMISSIONS TEST
FOR BASE***

***PAGES A50-A53 - CHANNEL 1
PAGES A54-A56 - CHANNEL 10
PAGES A57-A60 - CHANNEL 20***

4-14-98

RF ANT. COND. TEST BASE 2MHZ-4GH CH. 1 MKR 903 MHz
REF 307.0 dBm ATTEN 40 dB 11.70 dBm

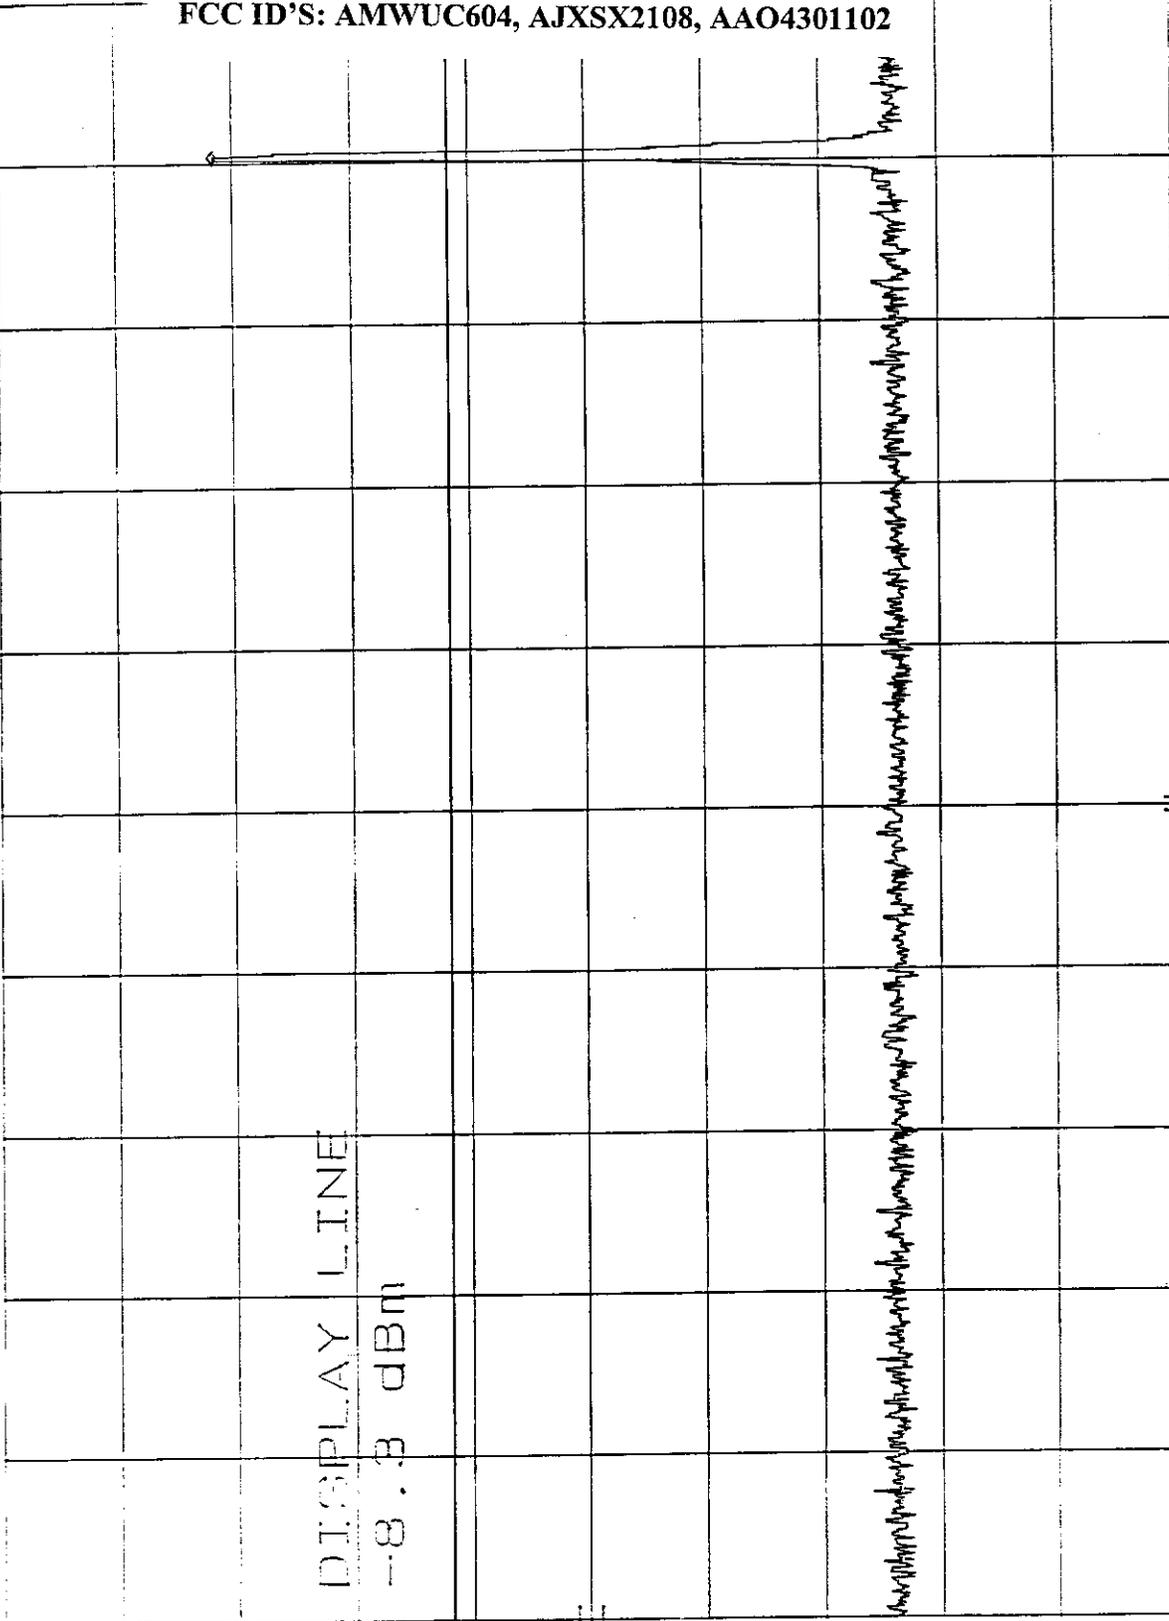

10 dB

DL
-8.3
dBm

CORP'D

START 2 MHz RES BW 100 KHZ VBW 300 KHZ SWP 299 mseg STOP 4.00 GHz

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

4-14-98

RF ANT. COND. TEST BASE 10HZ-20HZ CH. 1 MKR 1.808 GHz
REF 10.0 dBm ATTEN 20 dB -34.40 dBm


10 dB/

10 dB/

MARKER
1.808 GHz
-34.40 dBm

DL
-34.3
dBm

COIN'D

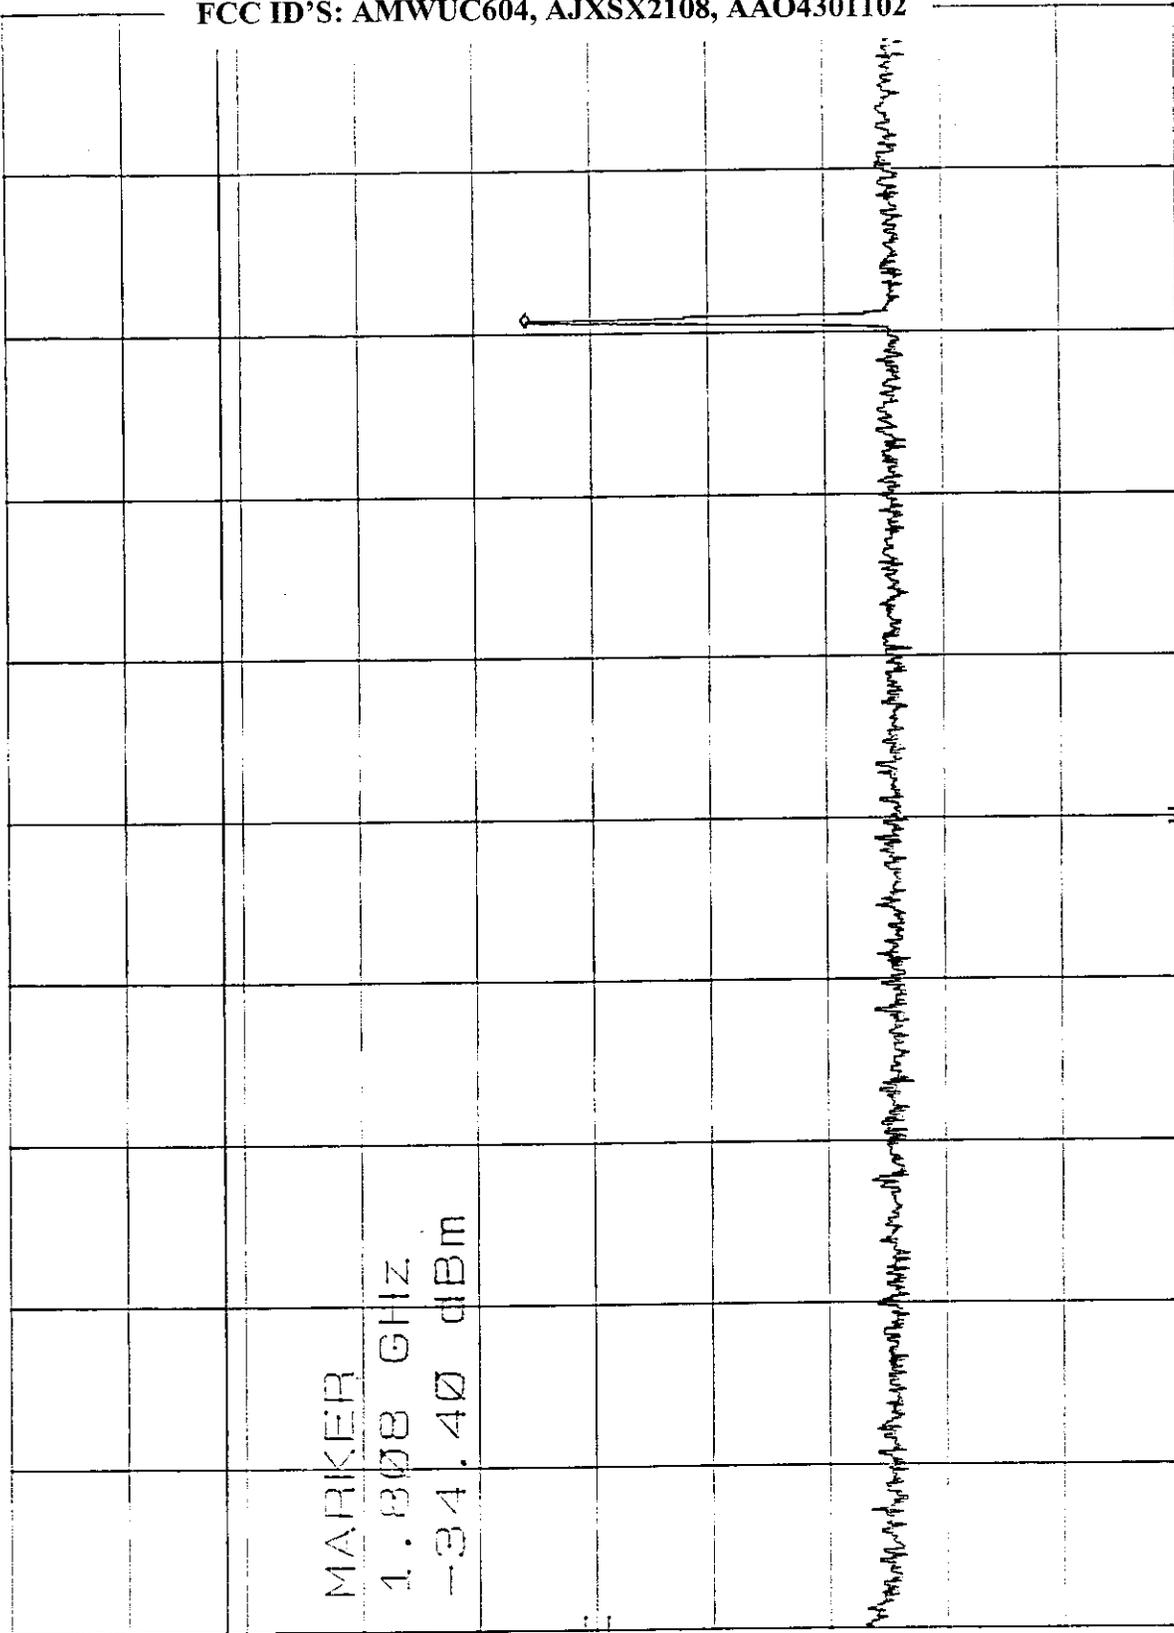

START 1.00 GHz

RES BW 100 KHz

VBW 300 KHz

STOP 2.00 GHz

SWP 300 msec

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

RF ATT. COND. TEST BAND 2GHz 40GHz CH. 4 MKR 9.016 GHz
REF 10.0 dBm ATTEN 20 dB -55.50 dBm


1/1

40 GHz

MARKER
9.016 GHz
-55.50 dBm

DL
-8.3
dBm

COHER'D

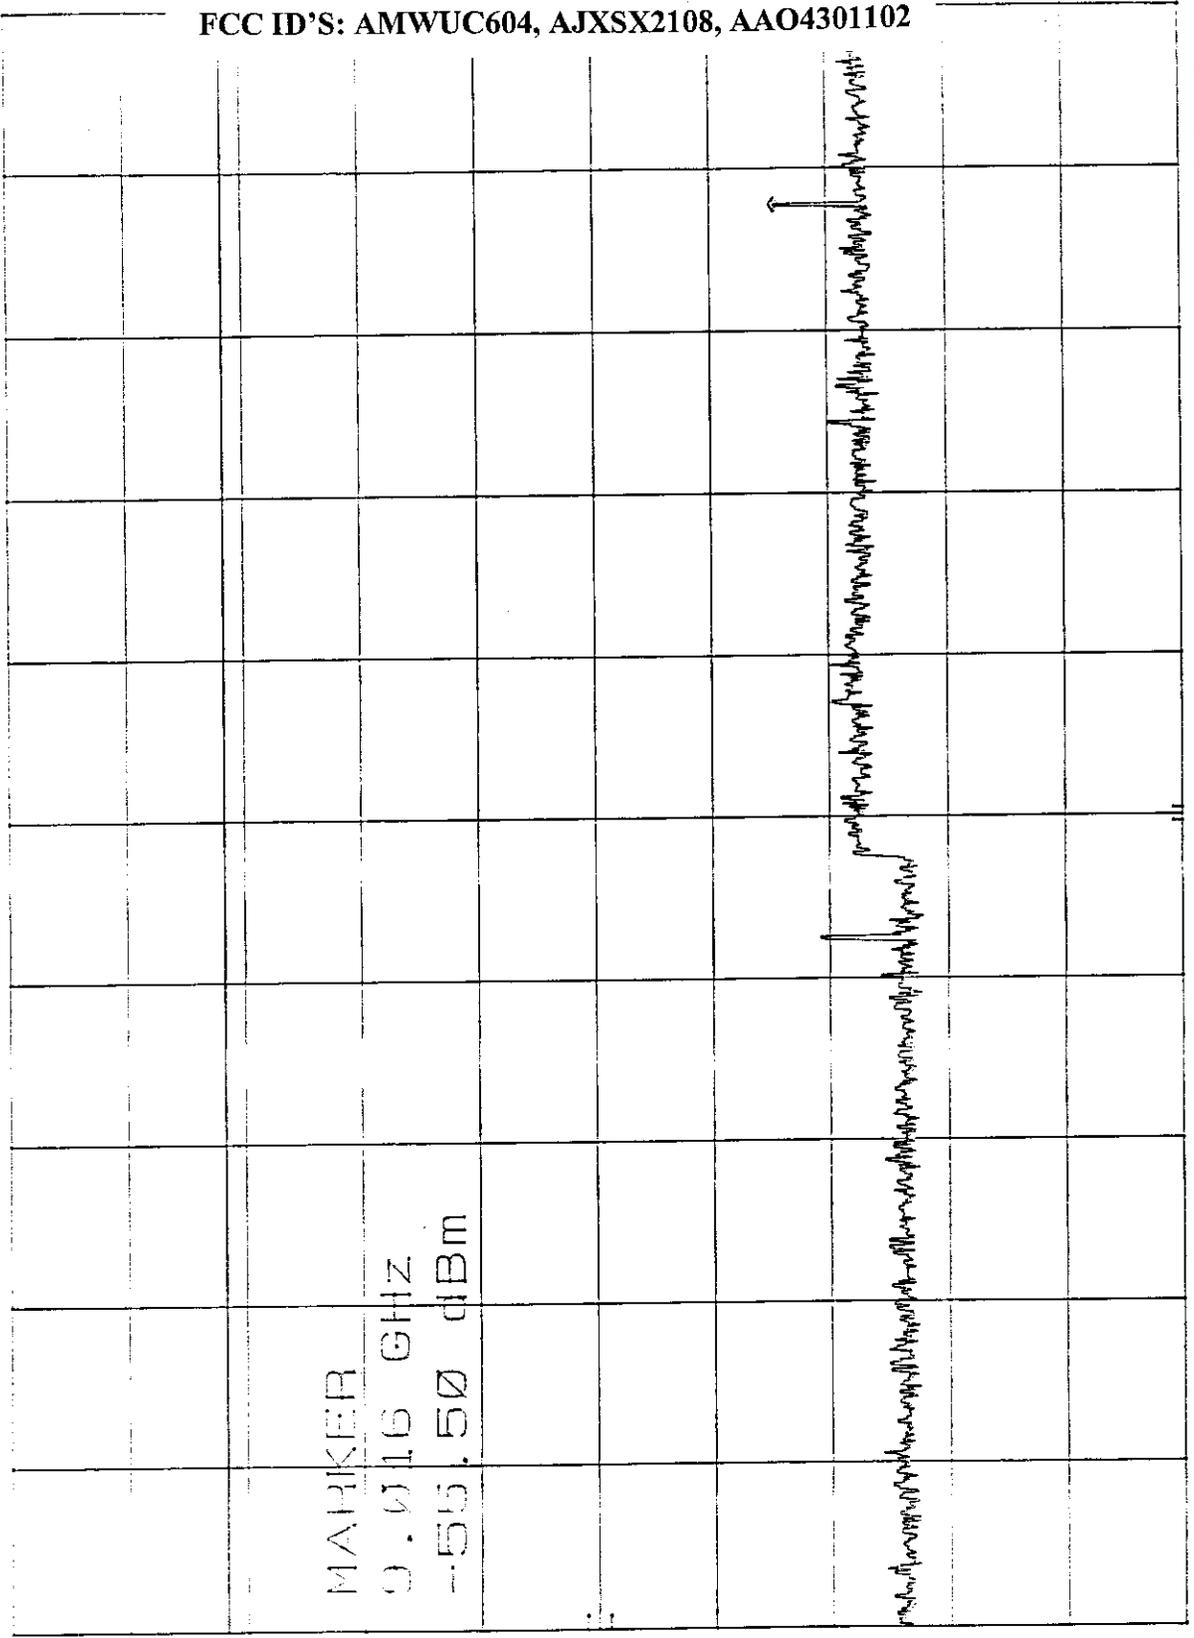

START 2.00 GHz RES BW 100 KHz VBW 300 KHz STOP 10.00 GHz
SWP 2.40 sec

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

4-14-98

MARKER 902.00 MHz
-23.90 dBm

BAND EDGE OF CH. 4 BASE
REF 307.0 dBm ATTN 40 dB


1/1

40 dB

MARKER
902.00 MHz
-23.90 dBm

DL
-7.7
dBm

CORR'D

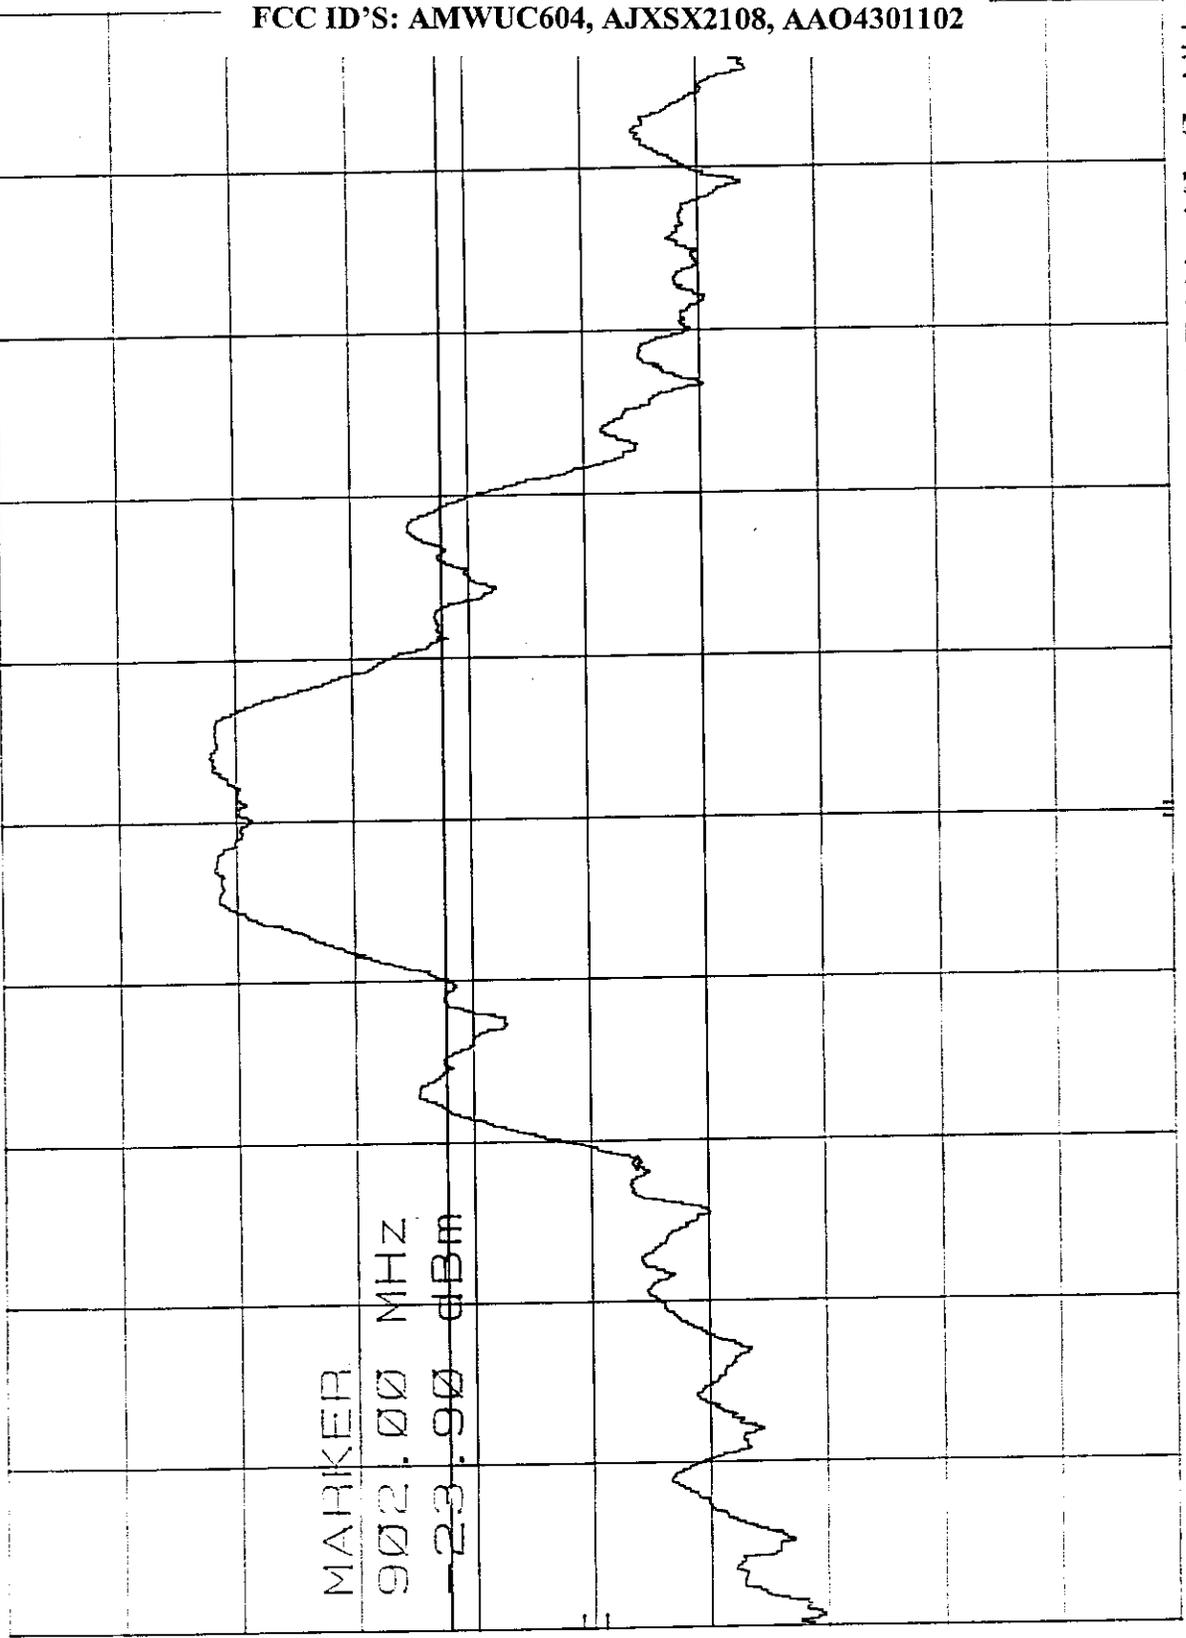


CENTRAL 902.0 MHz
RES BW 100 KHZ
VBW 300 KHZ
SPAN 10.0 MHz
SWP 20.0 msec

4-14-98

RF ANT. COND. TEST OF BASE CH. 10 2MHZ-1GHZ MKR 914 MHZ
REF 30.0 dBm ATTN 10 dB 11.60 dBm

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

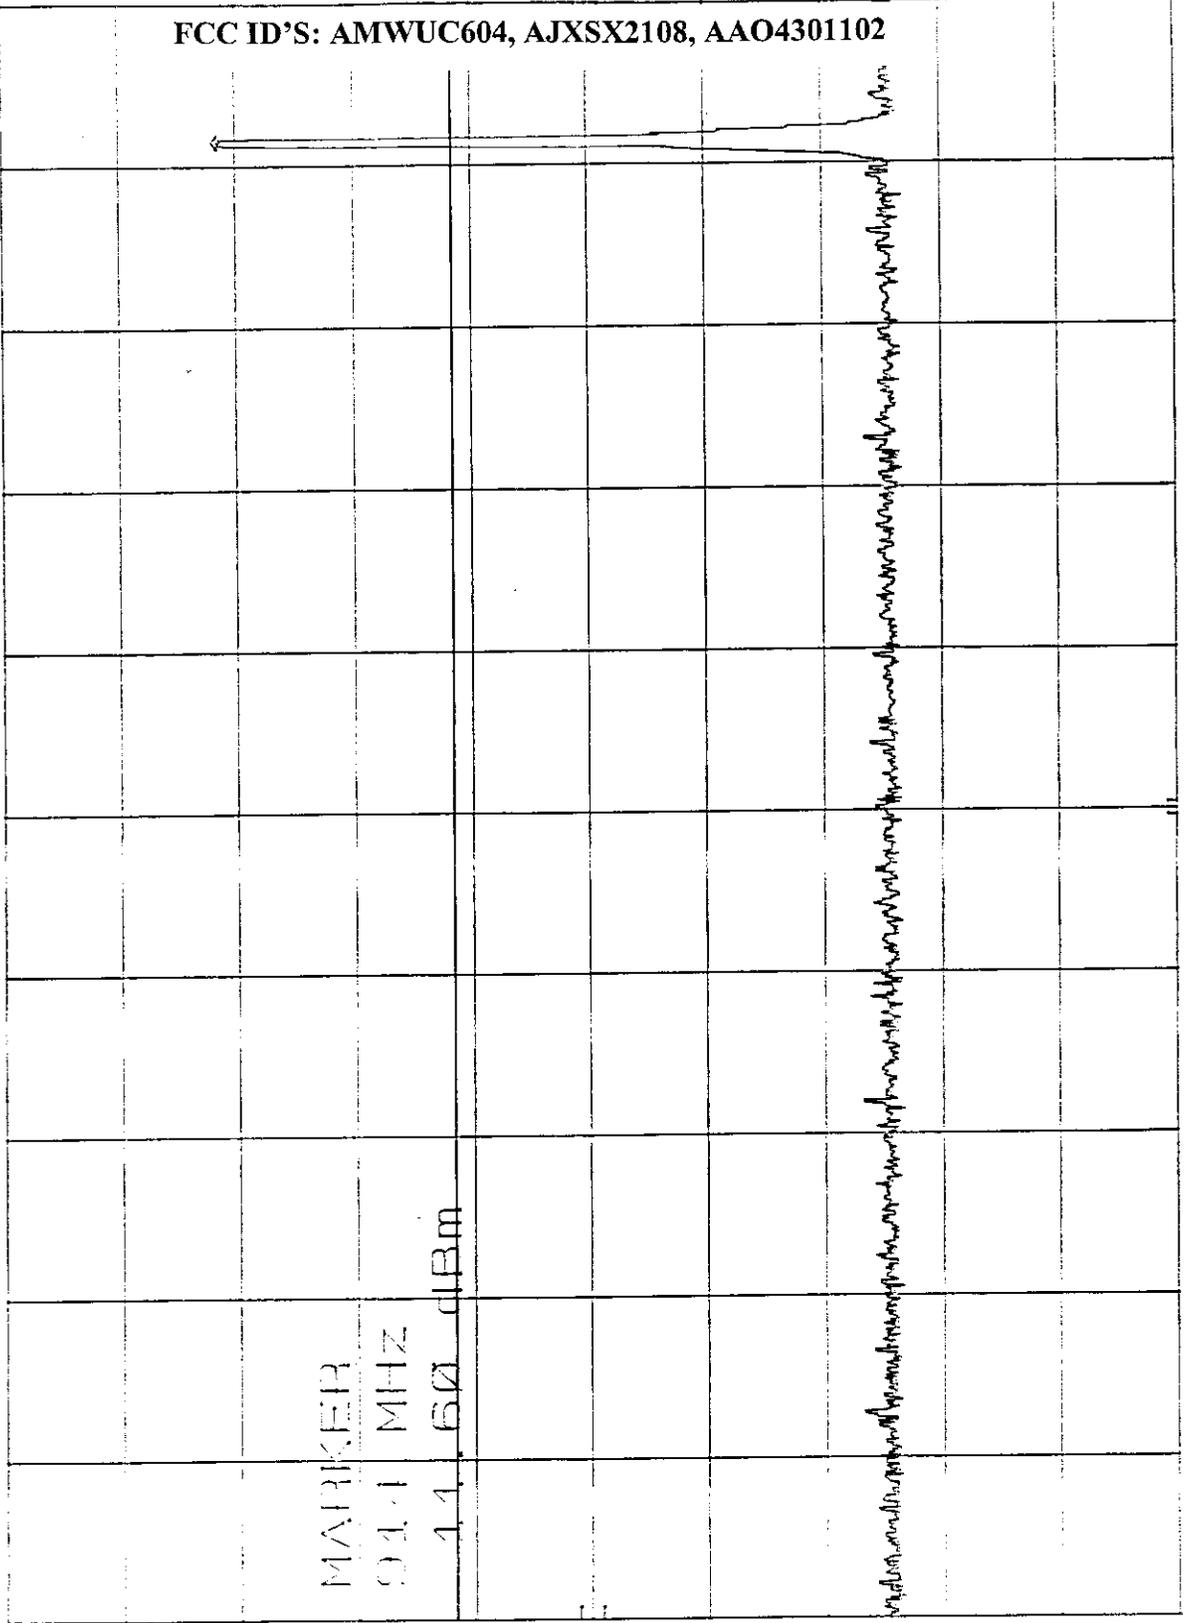

10 dB

01.
-8.4
dBm


(CORRECT)

START 2 MHz RES BW 100 KHZ VBW 300 KHZ STOP 1.00 GHz SWP 299 msec

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

4-14-98

RF ATT. COID. TEST OF BASE CH. 10 1GHZ-2GHZ MKR 1.828 GHz
REF 10.0 dBm ATTEH 10 dB

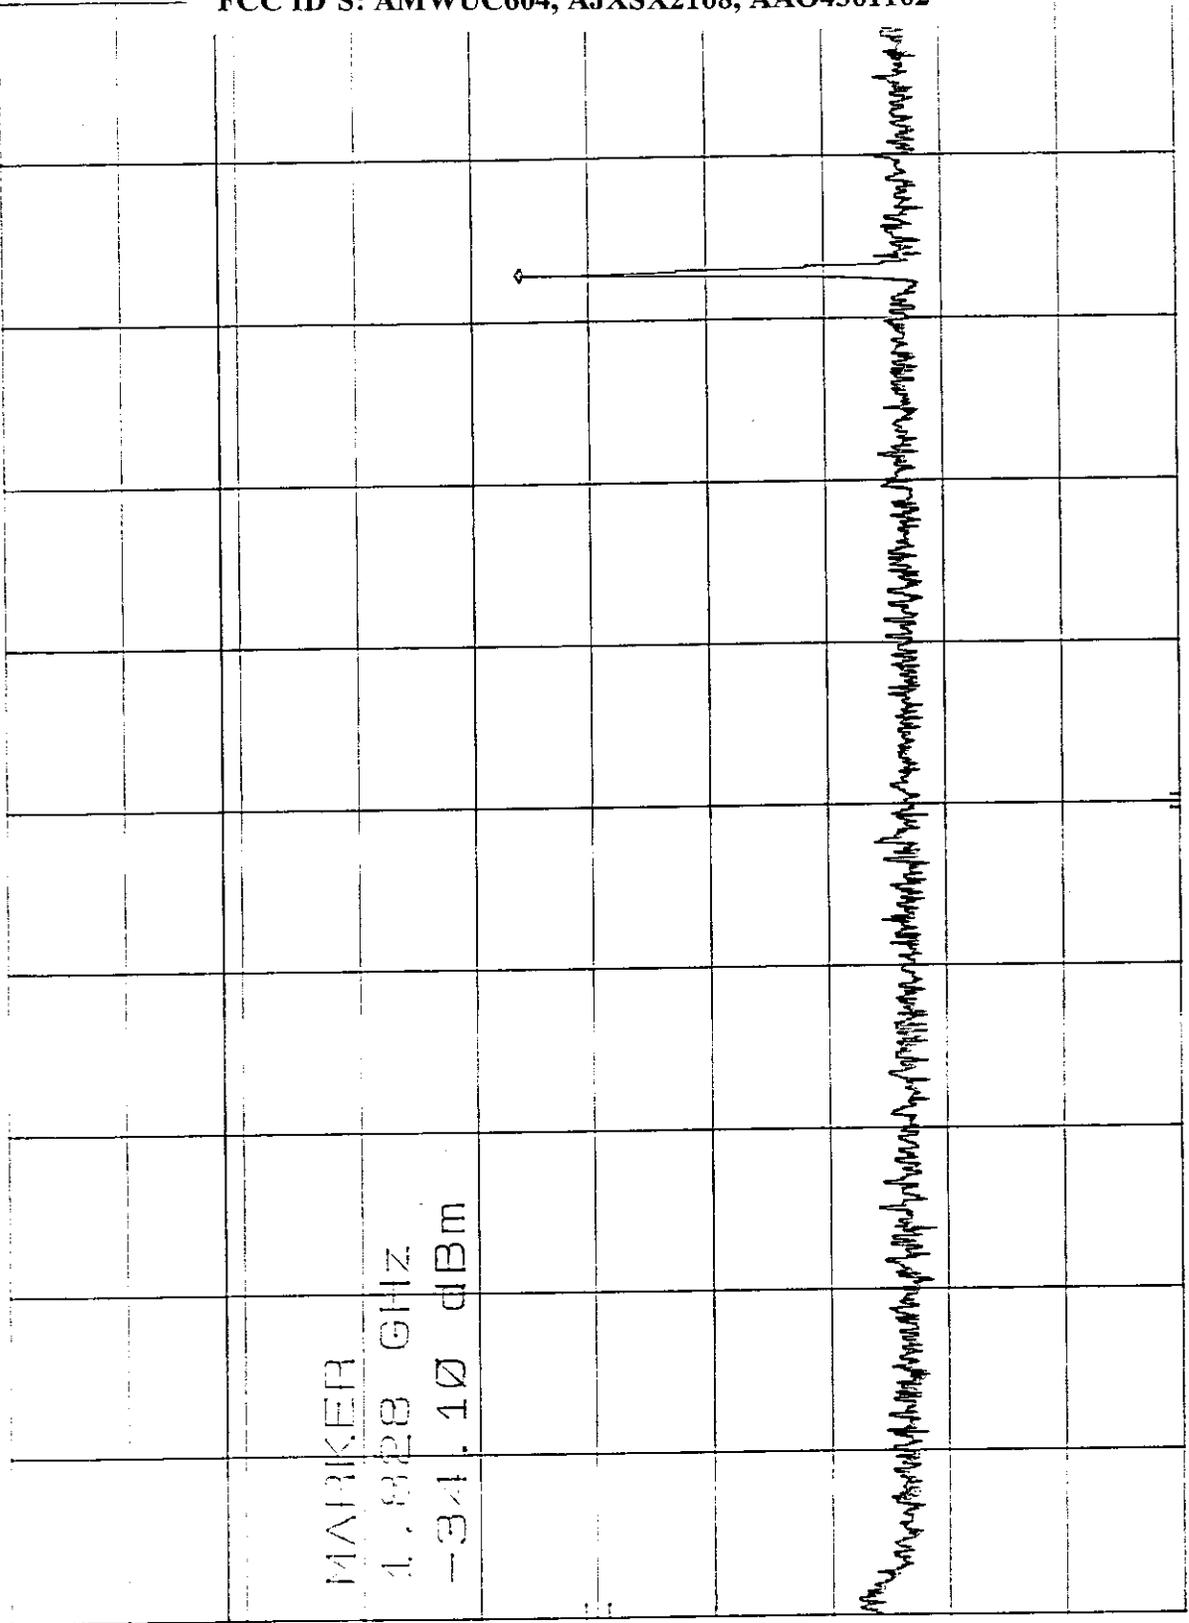

MARKER
1.828 GHz
-34.10 dBm

10 dB

DL
-8.4
dBm

COH'D

START 1.00 GHz
RES BW 100 KHZ

VBW 300 KHZ

STOP 2.00 GHz

SWP 300 msec

4-14-98


HP ANT. COND. TEST BASE CH. 10 2-10GHZ MKR 9.136 GHz
REF 10.0 dBm ATTN 20 dB -55.30 dBm

1/41

30 dB/

MARKER
9.136 GHz
-55.30 dBm

DL
-8.4
dBm



COHERENT

START 9.00 GHz
RES BW 100 kHz


VBW 300 kHz

STOP 10.00 GHz
SWP 2.40 sec

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

4-14-98

RF AMP, COND. TEST BAGIE CH. 20 2MHZ-1GHZ MKR 0255 MHz
REF 30.0 dBm ATTEM 30 dB 11.10 GHz

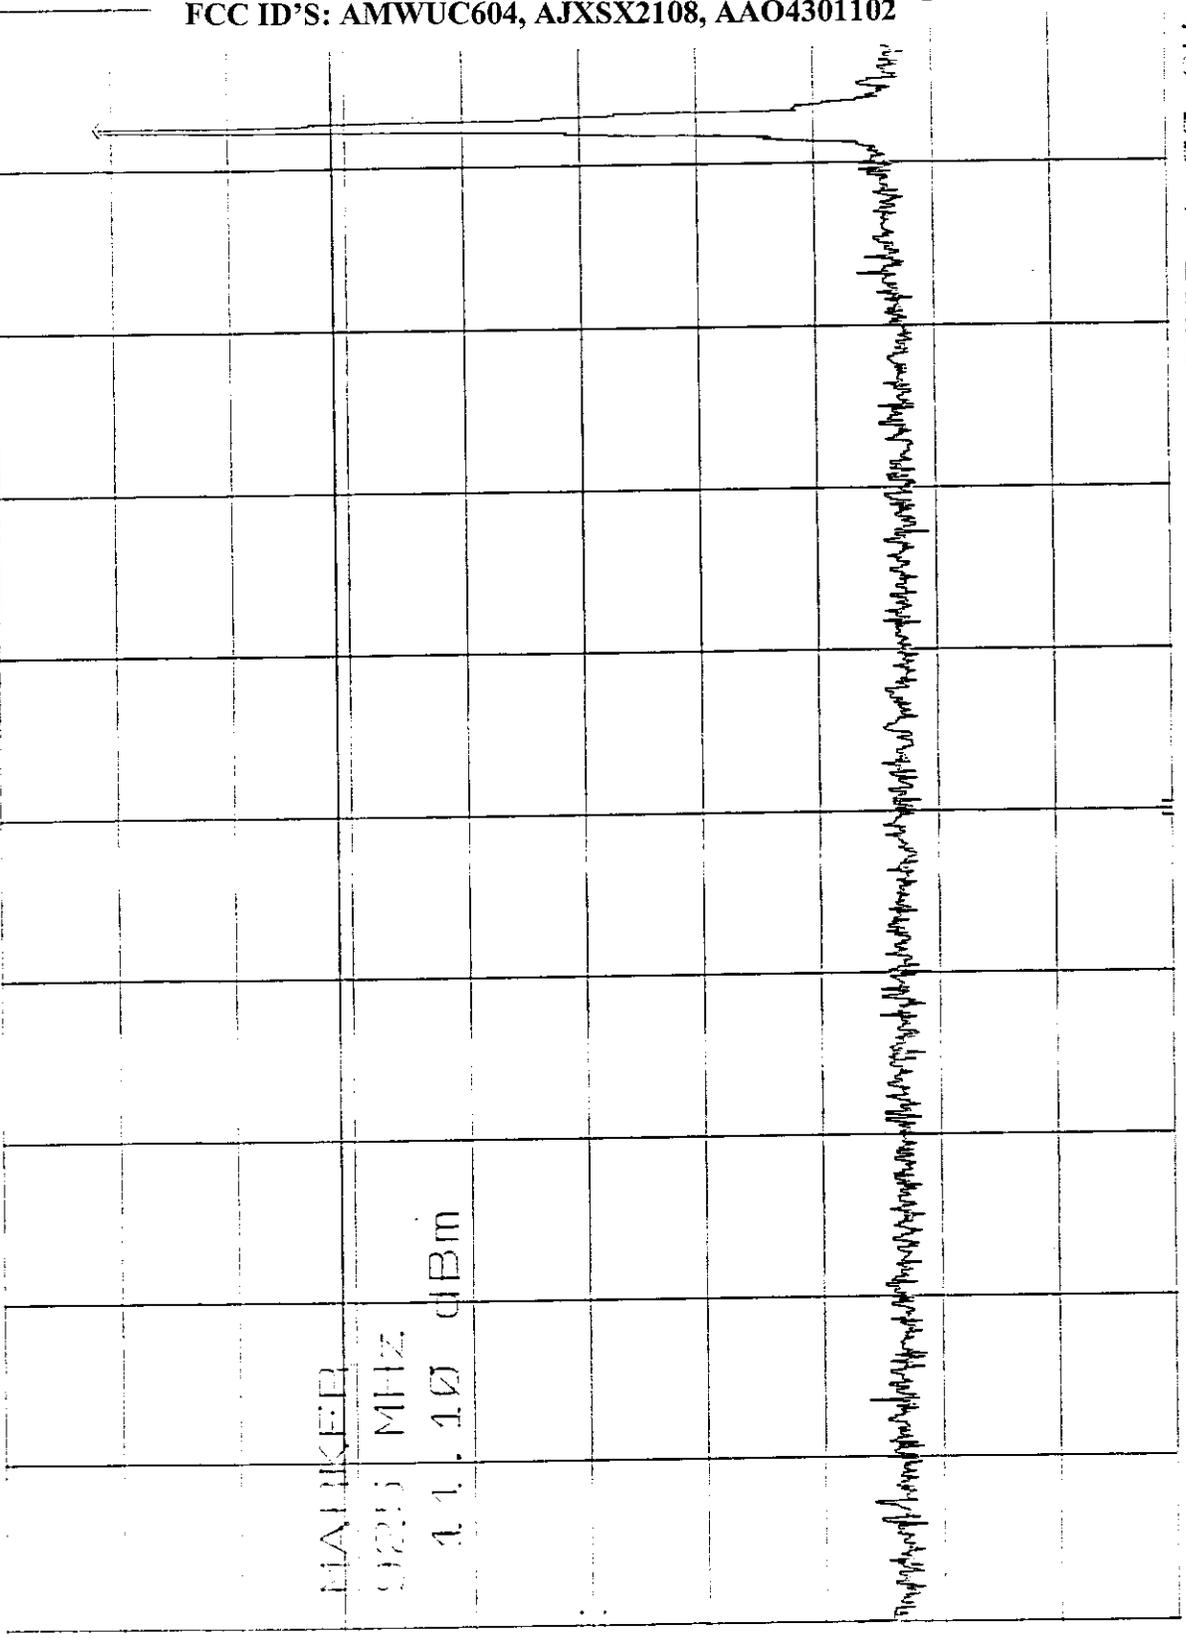

147

107 GHz

DB
-13.0
dBm

CORRECT

START 0 MHz STOP 1.00 GHz
RES BW 100 KHz VBW 300 KHz SWP 299 msec

4-14-98

REF ANT. COND. TEST BASE CH. 20 1GHZ--2GHZ MKR 1.851 GHz
REF -8.9 dBm ATTEN 20 dB -33.60 dBm

1/1


100 dBm

MARKER
1.851 GHz
-33.60 dBm

REF
-8.9
dBm

COHER'D

TH
-907.07
dBm

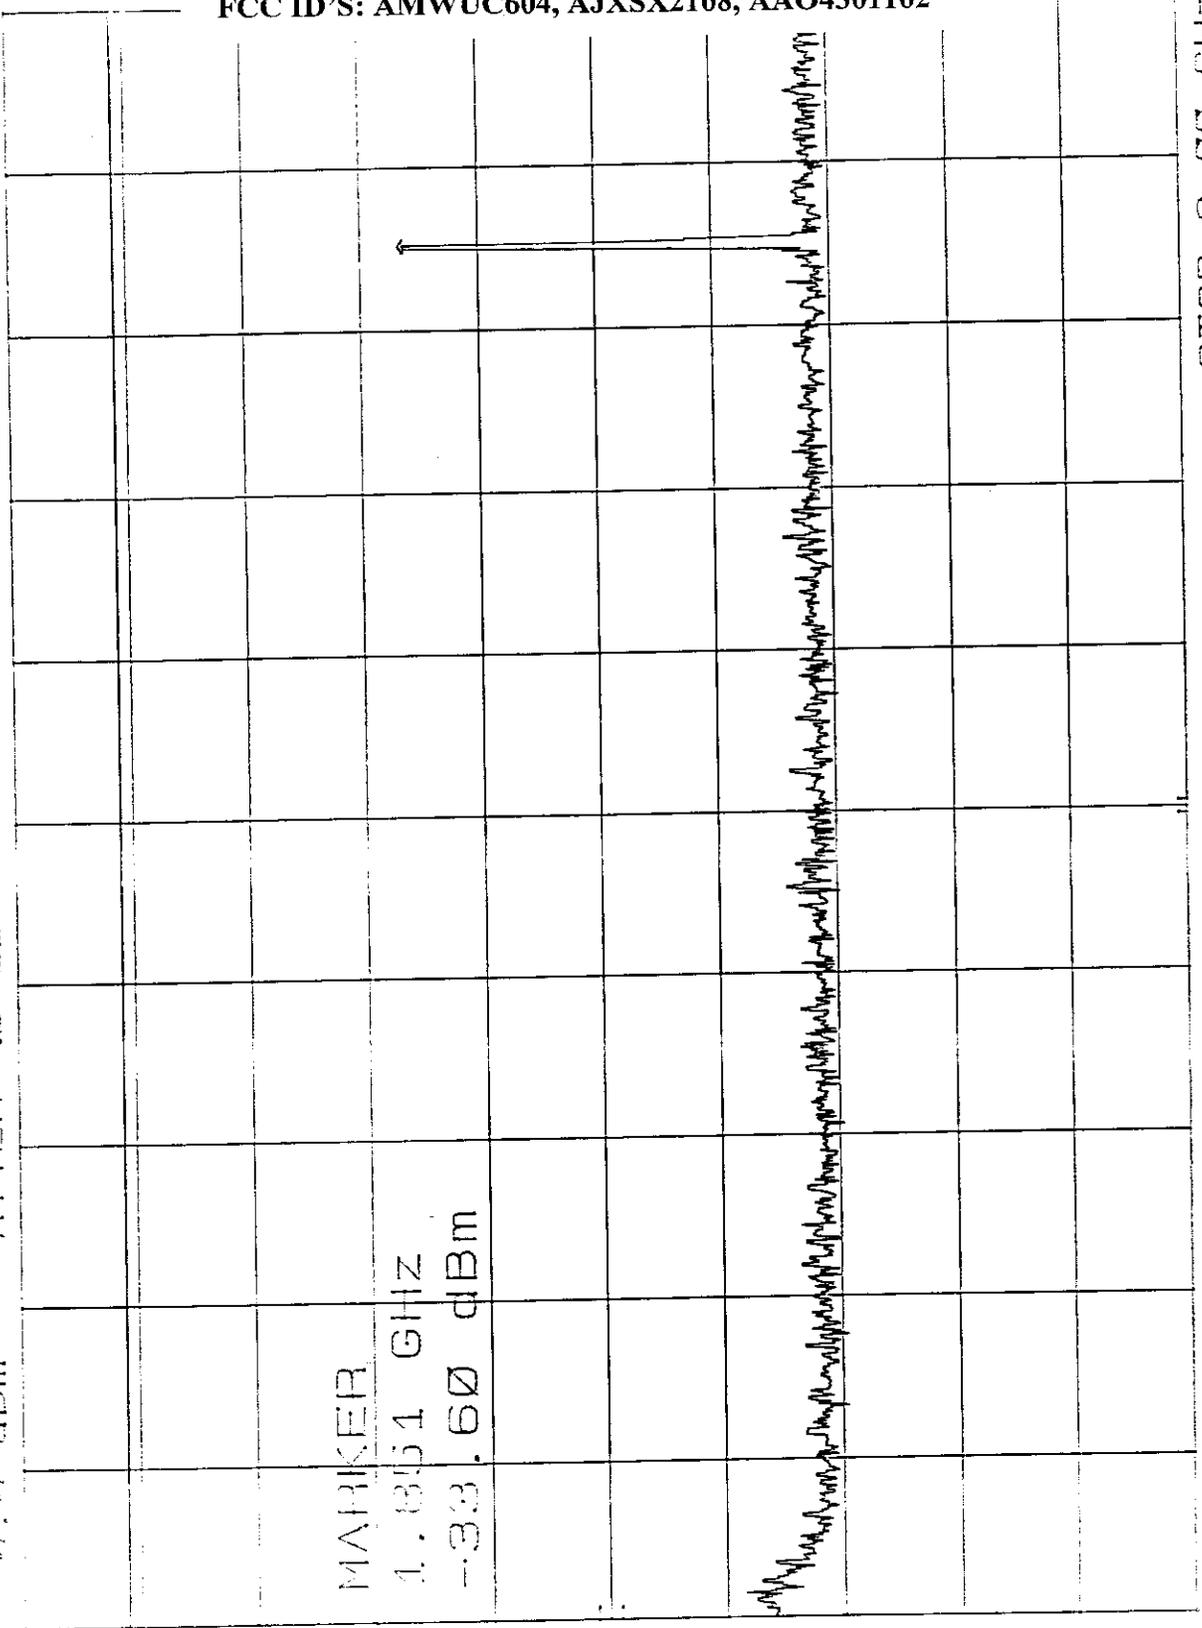

START 1.80 GHz STOP 2.00 GHz
RES BW 400 KHZ SWP 300 msec
VBW 300 KHZ

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

4-14-98

HF ANT. COND. TEST BASE CH. 20 2-10GHZ
REF 0.0 dBm ATTEN 20 dB

MARKER
8.312 GHz
-58.20 dBm


77

1.0 dB/

dB
-8.0
dBm

COHERENT

THI
-0.07, 0
dBm

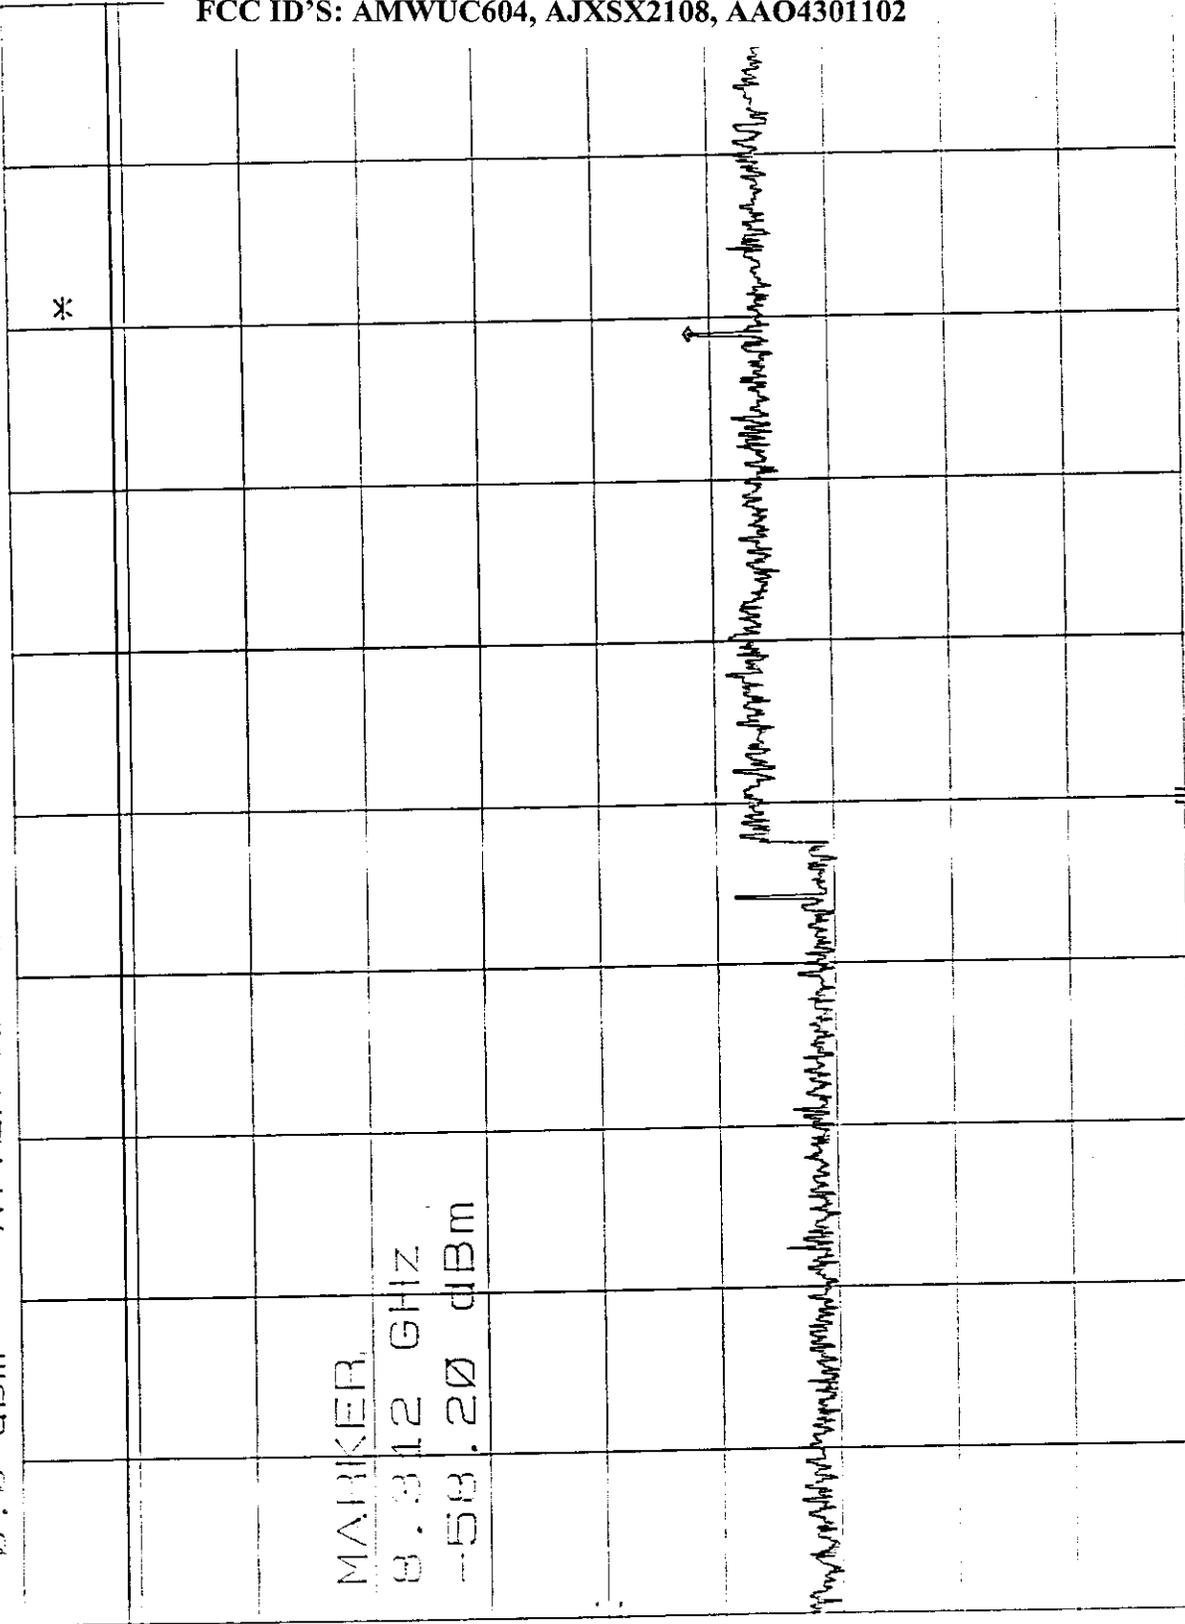

STOP 10.00 GHz
SWP 2.40 SAC

VBW 300 KHZ

RES BW 100 KHZ


START 2.00 GHz

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

1/4
MKR 928.00 MHz
-22.60 dBm

4-14-98

BAND EDGE OF CH. 20 BASE
REF 20.0 dBm ATTN 20 dB

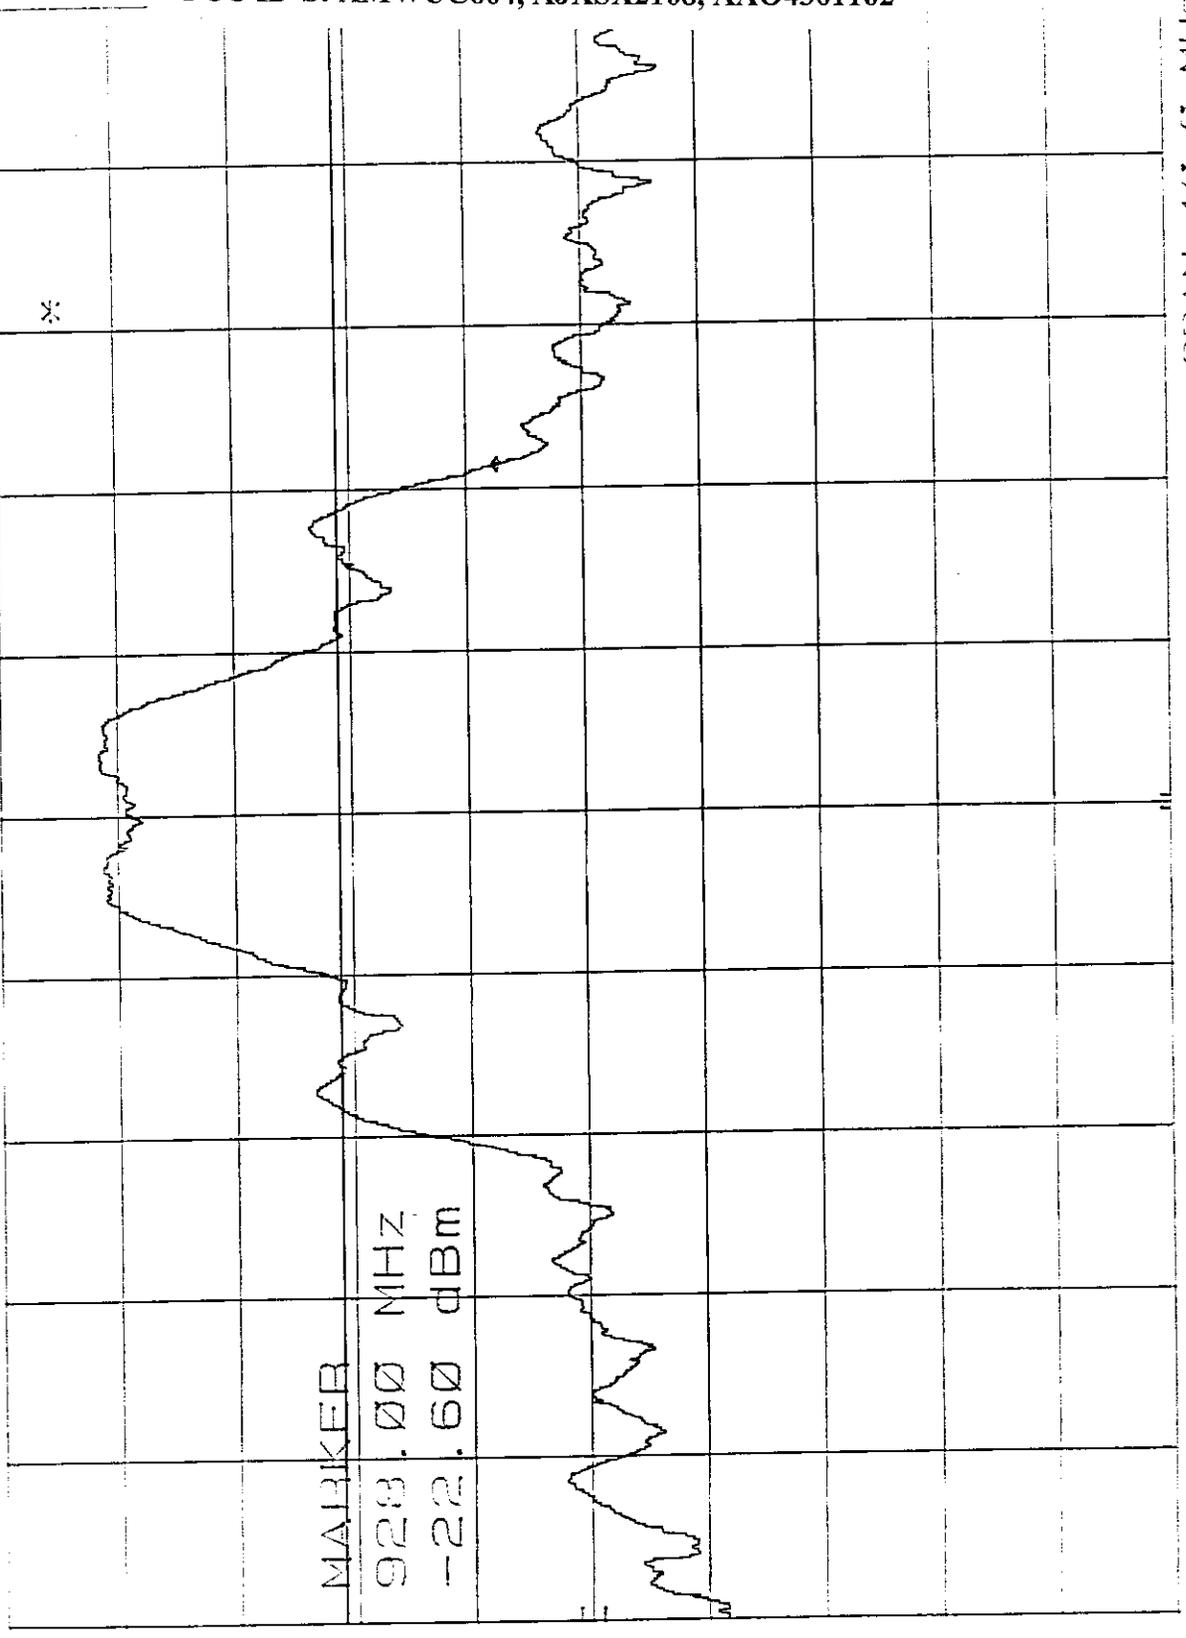

10.0 dBm

DI.
-8.9
dBm

COHER'D

CENTER 928.0 MHz
RES BW 100 kHz

VBW 300 kHz

SPAN 40.0 MHz
SWP 20.0 MHz



**COMPATIBLE
ELECTRONICS**

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

SECTION 15.247 (c)

RADIATED EMISSIONS FOR THE BASE

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

Page: 1 of 4

Test location: Compatible Electronics
 Customer : UNIDEN CORPORATION Date : 4/13/1998
 Manufacturer : UNIDEN CORPORATION Time : 9.55
 EUT name : 900 MHZ SPREAD SPECTRUM CORDLESS PHONE Model: EXS9110
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor(20*log(test/spec)) : 0.00
 Test Mode :
 BASE UNIT - SPURIOUS EMISSIONS
 TEMPERATURE 51 DEGREES F.
 RELATIVE HUMIDITY 88%

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1V	38.44	59.10	0.50	11.77	38.98	32.38	40.00	-7.62
2V	60.04	55.70	0.70	10.70	38.90	28.20	40.00	-11.80
3V	82.39	52.70	0.72	8.75	38.32	23.85	40.00	-16.15
4V	85.10	53.50	0.75	8.70	38.35	24.60	40.00	-15.40
5V	111.95	47.70	0.95	10.42	38.74	20.33	43.50	-23.17
6V	115.24	54.40	0.96	10.61	38.80	27.17	43.50	-16.33
7V	120.04	54.80	0.98	10.90	38.90	27.78	43.50	-15.72
8V	172.81	40.10	1.38	14.53	38.60	17.41	43.50	-26.09
9V	182.45	53.70	1.40	14.96	38.72	31.34	43.50	-12.16
10V	192.03	50.00	1.40	15.42	38.87	27.95	43.50	-15.55
11V	201.64	60.10	1.40	15.84	38.98	38.36	43.50	-5.14
12V	220.84	59.60	1.40	16.30	38.75	38.55	46.00	-7.45
13V	224.85	42.40	1.40	16.40	38.70	21.49	46.00	-24.51
14V	278.44	44.00	1.71	19.57	38.69	26.60	46.00	-19.40
15V	307.25	46.50	1.81	14.03	38.64	23.70	46.00	-22.30
16V	316.83	46.60	1.83	14.07	38.70	23.80	46.00	-22.20
17V	336.09	48.30	1.87	14.14	38.82	25.50	46.00	-20.50
18V	345.68	49.20	1.89	14.18	38.87	26.40	46.00	-19.60
19V	355.24	54.10	1.91	14.80	38.84	31.97	46.00	-14.03
20V	360.05	49.90	1.92	15.35	38.78	28.39	46.00	-17.61
21V	364.82	57.20	1.93	15.89	38.72	36.30	46.00	-9.70
22V	374.44	56.70	1.95	16.99	38.61	37.03	46.00	-8.97
23V	384.04	59.90	1.97	18.08	38.56	41.38	46.00	-4.62
24V	393.64	52.00	1.99	19.18	38.53	34.64	46.00	-11.36
25V	403.24	55.80	2.01	19.61	38.48	38.94	46.00	-7.06
26V	412.83	54.30	2.05	18.75	38.42	36.67	46.00	-9.33
27V	422.44	51.00	2.09	17.88	38.37	32.60	46.00	-13.40
28V	441.63	53.50	2.17	16.15	38.25	33.57	46.00	-12.43
29V	451.26	56.10	2.21	15.43	38.21	35.53	46.00	-10.47
30V	460.84	52.40	2.27	15.66	38.31	32.02	46.00	-13.98

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

Page: 2 of 4

Test location: Compatible Electronics
 Customer : UNIDEN CORPORATION
 Manufacturer : UNIDEN CORPORATION
 EUT name : 900 MHZ SPREAD SPECTRUM CORDLESS PHONE Model: EXS9110
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor(20*log(test/spec)) : 0.00
 Test Mode :
 BASE UNIT - SPURIOUS EMISSIONS
 TEMPERATURE 51 DEGREES F.
 RELATIVE HUMIDITY 88%

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
31V	480.05	51.40	2.38	16.12	38.50	31.40	46.00	-14.60
32V	499.24	53.60	2.50	16.58	38.69	33.98	46.00	-12.02
33V	508.83	50.70	2.57	16.49	38.59	31.17	46.00	-14.83
34V	518.43	52.30	2.65	16.38	38.48	32.85	46.00	-13.15
35V	537.64	51.30	2.80	16.15	38.25	32.00	46.00	-14.00
36V	547.23	50.50	2.88	16.03	38.13	31.28	46.00	-14.72
37V	556.83	50.00	2.91	16.37	38.15	31.13	46.00	-14.87
38V	576.05	45.10	2.95	17.41	38.31	27.15	46.00	-18.85
39V	585.64	49.40	2.97	17.92	38.39	31.91	46.00	-14.09
40V	604.84	51.00	3.04	18.78	38.51	34.31	46.00	-11.69
41V	624.04	46.90	3.19	19.08	38.55	30.63	46.00	-15.37
42V	681.64	45.60	3.46	20.51	38.22	31.36	46.00	-14.64
43V	748.83	42.60	3.79	23.54	38.20	31.74	46.00	-14.26
44V	787.24	46.60	4.10	22.11	37.83	34.98	46.00	-11.02
45V	844.85	44.50	4.20	22.95	38.06	33.59	46.00	-12.41
46V	921.63	50.20	4.19	23.17	37.28	40.27	46.00	-5.73
47V	940.84	48.00	4.26	23.05	37.09	38.23	46.00	-7.77

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

Page: 3 of 4

Test location: Compatible Electronics
 Customer : UNIDEN CORPORATION
 Manufacturer : UNIDEN CORPORATION
 EUT name : 900 MHZ SPREAD SPECTRUM CORDLESS PHONE
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor(20*log(test/spec)) : 0.00
 Test Mode :
 BASE UNIT - SPURIOUS EMISSIONS
 TEMPERATURE 51 DEGREES F.
 RELATIVE HUMIDITY 88%

Date : 4/13/1998

Time : 10.49

Model: EXS9110

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
1H	48.02	55.00	0.58	11.50	39.00	28.08	40.00	-11.92
2H	72.83	54.10	0.70	9.52	38.52	25.80	40.00	-14.20
3H	158.73	50.90	1.27	14.08	38.60	27.65	43.50	-15.85
4H	182.46	49.40	1.40	14.96	38.72	27.04	43.50	-16.46
5H	192.04	48.70	1.40	15.42	38.87	26.65	43.50	-16.85
6H	201.63	58.30	1.40	15.84	38.98	36.56	43.50	-6.94
7H	220.84	62.20	1.40	16.30	38.75	41.15	46.00	-4.85
8H	230.44	52.50	1.44	16.55	38.68	31.82	46.00	-14.18
9H	278.43	48.00	1.71	19.57	38.69	30.60	46.00	-15.40
10H	297.65	45.70	1.79	21.11	38.61	29.99	46.00	-16.01
11H	311.23	49.10	1.82	14.04	38.67	26.30	46.00	-19.70
12H	336.04	57.10	1.87	14.14	38.82	34.30	46.00	-11.70
13H	345.64	53.90	1.89	14.18	38.87	31.10	46.00	-14.90
14H	355.23	56.70	1.91	14.80	38.84	34.57	46.00	-11.43
15H	364.85	61.10	1.93	15.89	38.72	40.20	46.00	-5.80
16H	374.43	57.60	1.95	16.98	38.61	37.93	46.00	-8.07
17H	384.03	56.80	1.97	18.08	38.56	38.28	46.00	-7.72
18H	403.24	51.00	2.01	19.61	38.48	34.14	46.00	-11.86
19H	412.84	55.90	2.05	18.74	38.42	38.27	46.00	-7.73
20H	432.09	51.90	2.13	17.01	38.31	32.73	46.00	-13.27
21H	441.64	54.80	2.17	16.15	38.25	34.87	46.00	-11.13
22H	451.24	47.10	2.21	15.43	38.21	26.52	46.00	-19.48
23H	460.85	51.50	2.27	15.66	38.31	31.12	46.00	-14.88
24H	480.03	48.80	2.38	16.12	38.50	28.80	46.00	-17.20
25H	508.85	49.20	2.57	16.49	38.59	29.67	46.00	-16.33
26H	528.03	50.70	2.72	16.26	38.36	31.32	46.00	-14.68
27H	604.84	44.90	3.04	18.78	38.51	28.21	46.00	-17.79
28H	614.47	41.20	3.12	18.93	38.53	24.72	46.00	-21.28
29H	672.07	40.70	3.44	20.21	38.34	26.02	46.00	-19.98
30H	796.82	38.70	4.17	21.73	37.73	26.87	46.00	-19.13

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

Test location: Compatible Electronics
 Customer : UNIDEN CORPORATION
 Manufacturer : UNIDEN CORPORATION
 EUT name : 900 MHZ SPREAD SPECTRUM CORDLESS PHONE Model: EXS9110
 Specification: Fcc_B Test distance: 3.0 mtrs Lab: D
 Distance correction factor(20*log(test/spec)) : 0.00
 Test Mode :
 BASE UNIT - SPURIOUS EMISSIONS
 TEMPERATURE 51 DEGREES F.
 RELATIVE HUMIDITY 88%

Pol	Freq MHz	Rdng dBuV	Cable loss dB	Ant factor dB	Amp gain dB	Cor'd rdg = R dBuV	limit = L dBuV/m	Delta R-L dB
31H	921.67	45.10	4.19	23.17	37.28	35.17	46.00	-10.83
32H	950.49	39.40	4.30	22.99	37.01	29.69	46.00	-16.31



COL FCC ID'S: AMWUC604, AJXSX2108, AAO4301102 'AGE 7 of 12
ELECTRONICS

RADIATED EMISSIONS

COMPANY NAME: UNIDEN CORPORATION DATE: 4-17-98
 EUT: 900 MHz SPREAD SPECTRUM PHONE EUT S/N: PROTOTYPE
 EUT MODEL: EXS9110 LOCATION: BREA SILVERADO AGOURA
 SPECIFICATION: FCC 15.247 CLASS: _____ TEST DISTANCE: 3M LAB: D
 ANTENNA: LOOP BICONICAL LOG HORN POLARIZATION: VERT HORIZ
 QUALIFICATION ENGINEERING MFG. AUDIT ENGINEER: KYLE F.
 NOTES: BASE-CH.1

Frequency (GHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
0.904	111.6	105.6	2.0	0	23.3	-	33.3	95.6	-	-
1.808	62.2	56.2	2.0	180	24.5	5.9	29.0	57.6	-18.0	75.6
2.712	46.8	40.8	2.0	180	28.2	5.5	26.8	47.7	-6.3	54.0
3.616	42.6	36.6	1.5	180	29.6	6.9	23.9	49.2	-4.8	54.0
4.521	35.1	29.1	1.0	180	30.9	8.6	22.1	46.5	-7.5	54.0
5.425	37.6	31.6	1.0	180	32.4	9.2	32.0	41.2	-12.8	54.0
6.329	41.1	35.1	1.0	180	34.3	10.3	32.0	47.7	-27.9	75.6
7.234	39.6	33.6	1.5	90	36.8	11.4	32.0	49.8	-4.2	54.0

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT

BREA (714) 579-0500 SILVERADO (714) 589-0700 AGOURA (818) 597-0600



COME ELECTRONICS FCC ID'S: AMWUC604, AJXSX2108, AAO4301102 IE 8 of 12

RADIATED EMISSIONS

COMPANY NAME: UNIDEN CORPORATION DATE: 4-17-98

EUT: 900 MHz Spread Spectrum Phone EUT S/N: PROTOTYPE

EUT MODEL: EXS9110 LOCATION: BREA SILVERADO AGOURA

SPECIFICATION: FCC 15.247 CLASS: _____ TEST DISTANCE: 3M LAB: D

ANTENNA: LOOP BICONICAL LOG HORN POLARIZATION: VERT HORIZ

QUALIFICATION ENGINEERING MFG. AUDIT ENGINEER: Kyle F.

NOTES: BASE - CH1

Frequency (GHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
0.904	109.2	103.2	1.0	0	23.2	-	33.2	93.2	-	-
1.808	55.7	49.7	1.0	90	24.5	5.9	29.0	51.1	-24.5	75.6
2.713	44.0	38.0	1.0	90	28.2	5.5	26.8	44.9	-9.1	54.0
3.616	44.0	38.0	1.0	180	29.6	6.9	23.5	50.6	-3.4	54.0
4.520	37.1	31.1	1.0	180	20.9	8.6	22.1	48.5	-5.5	54.0
5.425	36.1	30.1	1.0	180	32.4	9.2	32.0	39.7	-14.3	54.0
6.329	41.7	35.7	2.0	180	34.3	10.3	32.0	48.3	-27.3	75.6
7.234	39.2	33.2	1.5	90	36.8	11.4	32.0	49.4	-4.6	54.0

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT

BREA (714) 579-0500 SILVERADO (714) 589-0700 AGOURA (818) 597-0600



COME
ELEC

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

RADIATED EMISSIONS

COMPANY NAME: UNIDEN CORPORATION DATE: 4-17-98

EUT: 900 MHz SPREAD SPECTRUM PHONE EUT S/N: PROTOTYPE

EUT MODEL: EXS911D LOCATION: BREA SILVERADO AGOURA

SPECIFICATION: FCC 15.247 CLASS: _____ TEST DISTANCE: 3M LAB: D

ANTENNA: LOOP BICONICAL LOG HORN POLARIZATION: VERT HORIZ

QUALIFICATION ENGINEERING MFG. AUDIT ENGINEER: Kyle F.

NOTES: Base CH. 10

Frequency (GHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
0.914	111.5	105.5	2.0	0	23.2	-	33.2	95.2	-	-
1.828	65.7	59.7	3.0	0	24.5	5.9	29.0	61.1	-14.1	75.2
2.712	47.4	41.4	1.0	0	28.2	5.5	26.8	48.3	-5.7	54.0
3.658	44.9	38.9	1.0	0	29.6	6.9	23.9	51.5	-2.5	54.0
4.571	37.8	31.8	1.0	0	30.9	8.6	22.1	49.2	-4.8	54.0
5.486	38.1	32.1	1.0	0	32.4	9.2	32.0	41.7	-12.3	54.0
6.400	46.9	40.9	1.0	0	34.3	10.3	32.0	53.5	-21.7	75.2
7.315	39.5	33.5	3.0	0	36.8	11.4	32.0	49.7	-4.3	54.0

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT



RADIATED EMISSIONS

COMPANY NAME: UNION CORPORATION DATE: 4-17-98

EUT: 900 MHz Speed Spectrum Phone EUT S/N: Prototype

EUT MODEL: EX59110 LOCATION: BREA SILVERADO AGOURA

SPECIFICATION: FCC 15.247 CLASS: _____ TEST DISTANCE: 3m LAB: D

ANTENNA: LOOP BICONICAL LOG HORN POLARIZATION: VERT HORIZ

QUALIFICATION ENGINEERING MFG. AUDIT ENGINEER: Kyle R.

NOTES: BR50 - CH. 10

Frequency (GHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
.914	110.2	104.2	1.0	0	23.2	-	33.2	94.2	-	-
1.829	55.2	49.2	1.0	90	24.5	5.9	29.0	50.6	-24.6	75.2
2.743	46.8	40.8	1.0	180	28.2	5.5	26.8	47.7	-6.3	54.0
3.658	42.3	36.3	1.0	180	29.6	6.9	23.9	48.9	-5.1	54.0
4.572	36.1	30.1	1.0	180	30.9	8.6	22.1	47.5	-6.5	54.0
5.486	37.7	31.7	1.0	0	32.4	9.2	32.0	41.3	-12.7	54.0
6.400	42.9	36.9	1.0	180	34.3	10.3	32.0	49.5	-25.7	75.2
7.315	48.8	34.8	1.0	180	36.8	11.4	32.0	51.0	-3.0	54.0

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT



FCC ID'S: AMWUC604, AJXSX2108, AAO4301102 GE 11 of 12
COM ELECTRONICS

RADIATED EMISSIONS

COMPANY NAME: UNIBORN CORPORATION DATE: 4-17-98

EUT: 900 MHz SPREAD SPECTRUM PHONE EUT S/N: PROTOTYPE

EUT MODEL: EXS9110 LOCATION: BREA SILVERADO AGOURA

SPECIFICATION: FCC 15.247 CLASS: _____ TEST DISTANCE: 3M LAB: D

ANTENNA: LOOP BICONICAL LOG HORN POLARIZATION: VERT HORIZ

QUALIFICATION ENGINEERING MFG. AUDIT ENGINEER: KYLE F.

NOTES: BASE - CH. 20

Frequency (GHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
0.926	111.3	105.3	1.0	0	23.2	-	33.1	95.4	-	-
1.852	63.0	57.0	3.0	180	24.5	5.7	29.1	58.1	-17.3	75.4
2.777	47.3	41.3	1.5	180	29.7	6.4	28.2	49.2	-4.8	54.0
3.703	44.9	38.9	1.5	180	29.6	6.9	23.9	51.5	-2.5	54.0
4.629	35.7	29.7	1.0	180	30.9	8.6	22.1	47.1	-6.9	54.0
5.554	38.5	32.5	2.0	180	32.4	9.2	32.0	42.1	-11.9	54.0
6.481	42.9	36.9	2.0	90	34.3	10.3	32.0	49.5	-25.9	75.4
7.406	39.4	33.4	3.0	0	36.8	11.4	32.0	49.6	-4.4	54.0
8.332	35.6	29.6	2.0	0	37.1	12.5	30.5	48.7	-5.3	54.0

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT



RADIATED EMISSIONS

COMPANY NAME: UNION CORPORATION DATE: 4-17-98
 EUT: 900 MHz Sparse Spectrum Phone EUT S/N: PROTOTYPE
 EUT MODEL: EYS9110 LOCATION: BREA SILVERADO AGOURA
 SPECIFICATION: FCC15.247 CLASS: _____ TEST DISTANCE: 3m LAB: D
 ANTENNA: LOOP BICONICAL LOG HORN POLARIZATION: VERT HORIZ
 QUALIFICATION ENGINEERING MFG. AUDIT ENGINEER: Kyle F.
 NOTES: BASE - CH. 20

Frequency (GHz)	Peak Reading (dBuV)	Average Reading (dBuV)	Antenna Height (meters)	Azimuth (degrees)	Antenna Factor (dB)	Cable Loss (dB)	Amplifier Gain (dB)	* Corrected Reading (dBuV)	Delta ** (dB)	Spec Limit (dBuV)
.926	108.3	102.3	1.0	0	23.2	-	33.1	92.4	-	-
1.851	53.0	47.0	1.0	90	24.5	5.7	29.1	53.0	-22.4	75.4
2.777	45.8	39.8	1.0	180	29.7	6.4	28.2	42.7	-6.3	54.0
3.703	44.2	38.2	1.0	180	32.6	6.5	23.9	40.8	-32	54.0
4.629	38.4	32.4	1.0	180	30.9	8.0	22.1	49.0	-4.2	54.0
5.552	35.7	29.7	1.5	180	32.4	9.2	32.0	39.3	-14.7	54.0
6.480	41.2	35.2	2.0	90	34.3	10.3	32.0	47.8	-27.6	75.4
7.407	39.3	33.3	1.0	180	36.8	11.4	32.0	49.5	-4.5	54.0
8.332	37.3	31.3	1.0	0	37.1	12.5	30.5	50.4	-3.6	54.0

* CORRECTED READING = METER READING + ANTENNA FACTOR + CABLE LOSS - AMPLIFIER GAIN

** DELTA = CORRECTED READING - SPECIFICATION LIMIT



**COMPATIBLE
ELECTRONICS**

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

SECTION 15.207

***CONDUCTED EMISSIONS FOR BASE ON AC
POWER LINE***

MEASUREMENT NOTES: FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

UNIDEN CORPORATION
 800 MHZ SPREAD SPECTRUM CORDLESS PHONE
 MODEL: EX98110
 FCC B - BLACK LEAD - 13 APR 1998 14:41:34

12 highest Peaks above -50 dB of Limit Line #2
 peak criteria = .1 dB

PEAK#	FREQ (MHz)	(dBuV)	DELTA
1	.4732	41.1	-6.9
2	.5812	41.1	-6.9
3	.5892	40.6	-7.4
4	.5387	40.3	-7.7
5	.4578	40.2	-7.8
6	.5082	40.2	-7.8
7	.5278	40.2	-7.8
8	.5125	40.1	-7.9
9	.4673	40	-8.0
10	.5234	40	-8.0
11	.4853	39.9	-8.1
12	.4812	39.8	-8.2

MEASUREMENT NOTES:

UNIDEN CORPORATION
 800 MHZ SPREAD SPECTRUM CORDLESS PHONE
 MODEL: EX98110
 FCC C - WHITE LEAD - 13 APR 1998 14:51:23

12 highest Peaks above -50 dB of Limit Line #2
 peak criteria = .1 dB

PEAK#	FREQ (MHz)	(dBuV)	DELTA
1	13.41	36.6	-11.4
2	.6428	36.1	-11.9
3	15.2	35.8	-12.2
4	3.274	35.6	-12.4
5	20.85	35.6	-12.4
6	10.12	35.5	-12.5
7	11.57	35.4	-12.5
8	.5718	35.3	-12.7
9	.5882	35.2	-12.8
10	22.85	35.1	-12.9
11	17.03	35	-13.0
12	.4712	34.5	-13.1

MEASUREMENT NOTES:

TEST ENGINEER: DALE FUJIKOTO
 DALE FUJIKOTO


FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

13 Apr 1998 14: 41: 34

COMPATIBLE ELECTRONICS INC. PEAK
EMISSION LEVEL [dBuV]

hp

FCC PT 15 CLASS A & B CONDUCTED
UNIDEN CORPORATION
900 MHZ SPREAD SPEC. CORD. PHONE
MODEL: AMWUC604
FCC C - BLACK LEAD

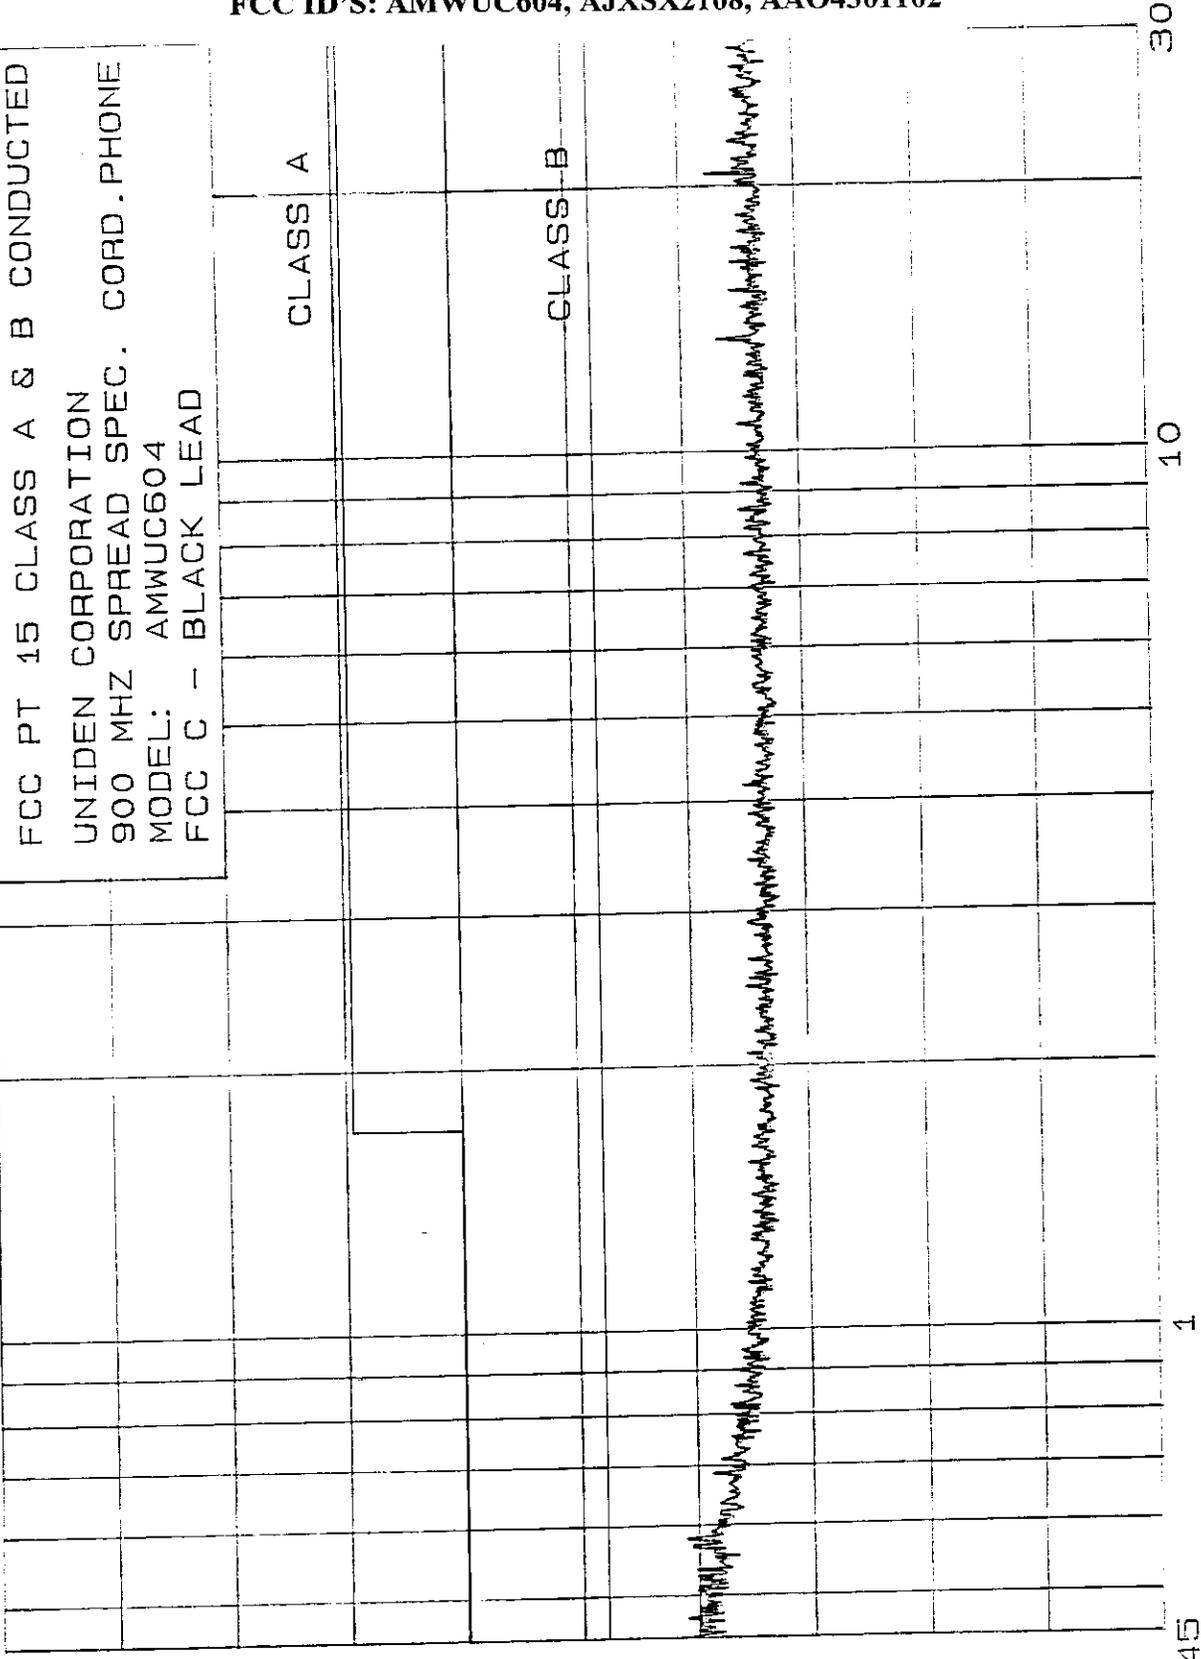

FREQUENCY [MHZ]


13 APR 1998 14:51:23

COMPATIBLE ELECTRONICS INC. PEAK
EMISSION LEVEL [dBuV]

hp

FCC PT 15 CLASS A & B CONDUCTED
UNIDEN CORPORATION
900 MHZ SPREAD SPEC. CORD.PHONE
MODEL: EXS9110
FCC C - WHITE LEAD

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

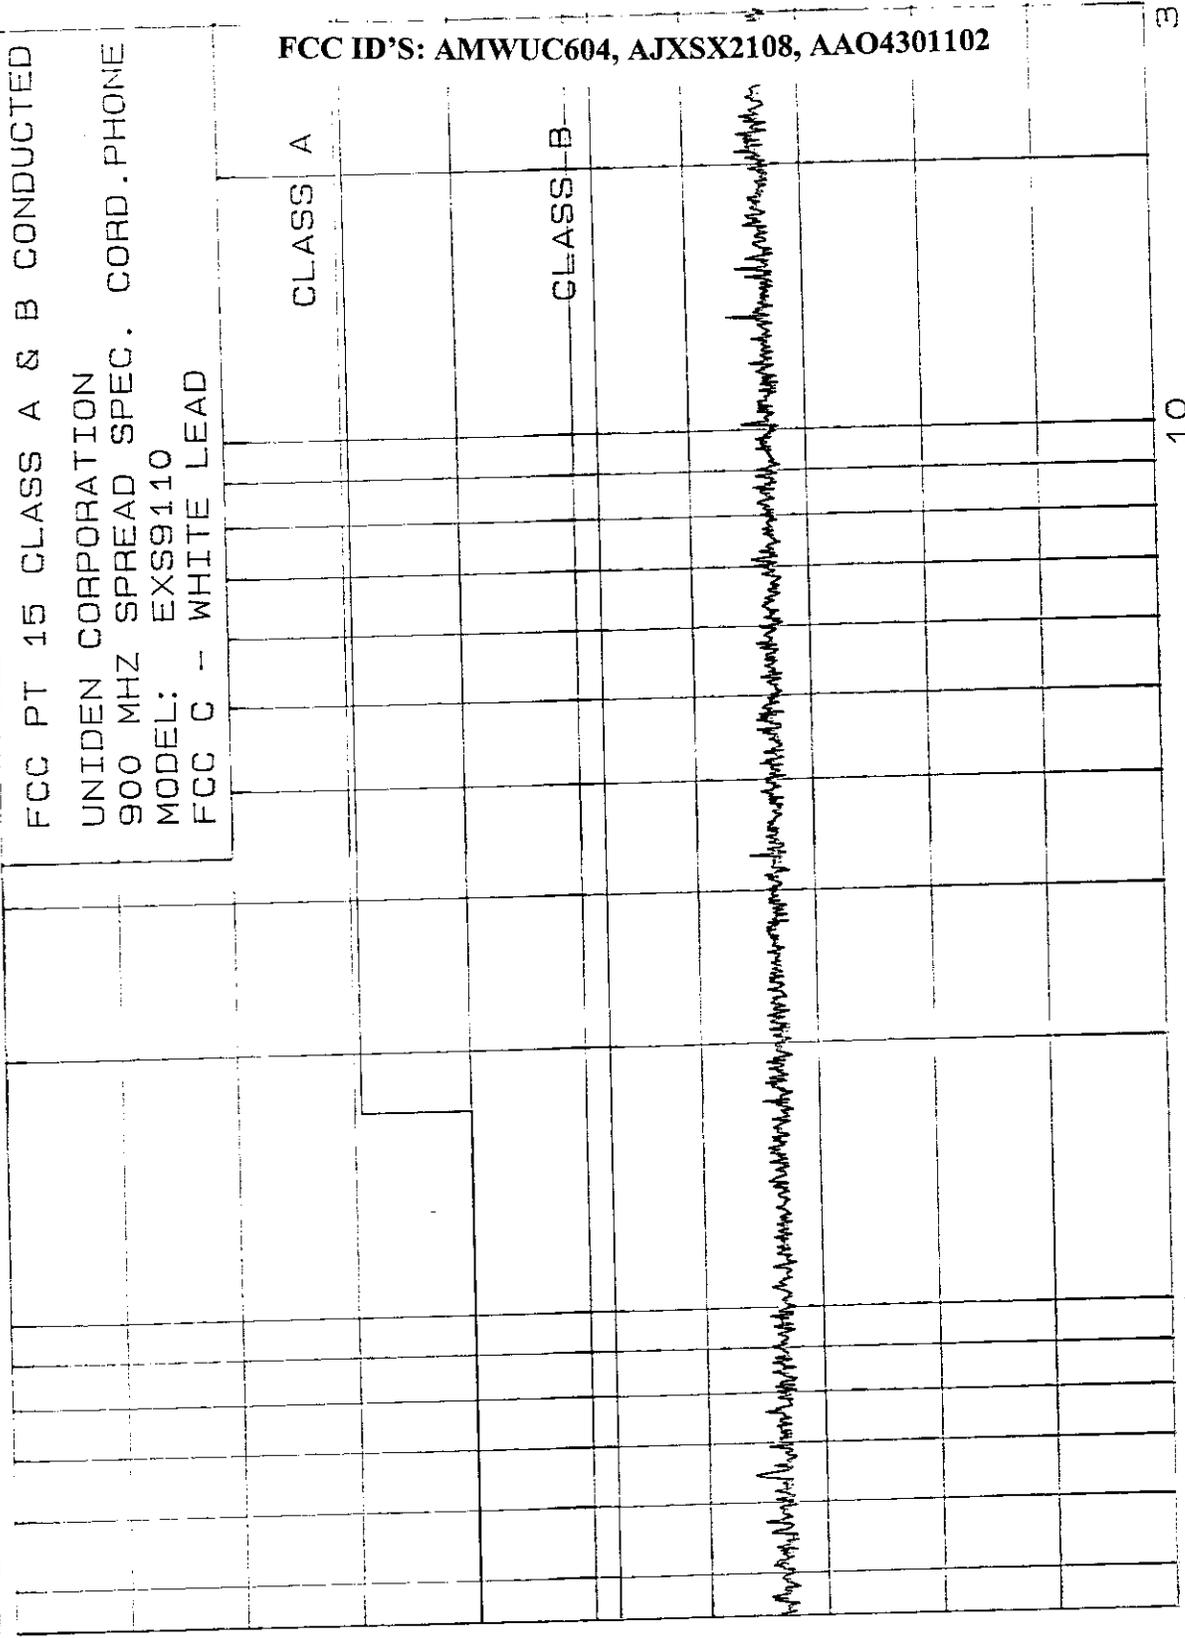

FREQUENCY [MHZ]



**COMPATIBLE
ELECTRONICS**

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

SECTION 15.247 (e)

PROCESSING GAIN FOR BASE AND HANDSET

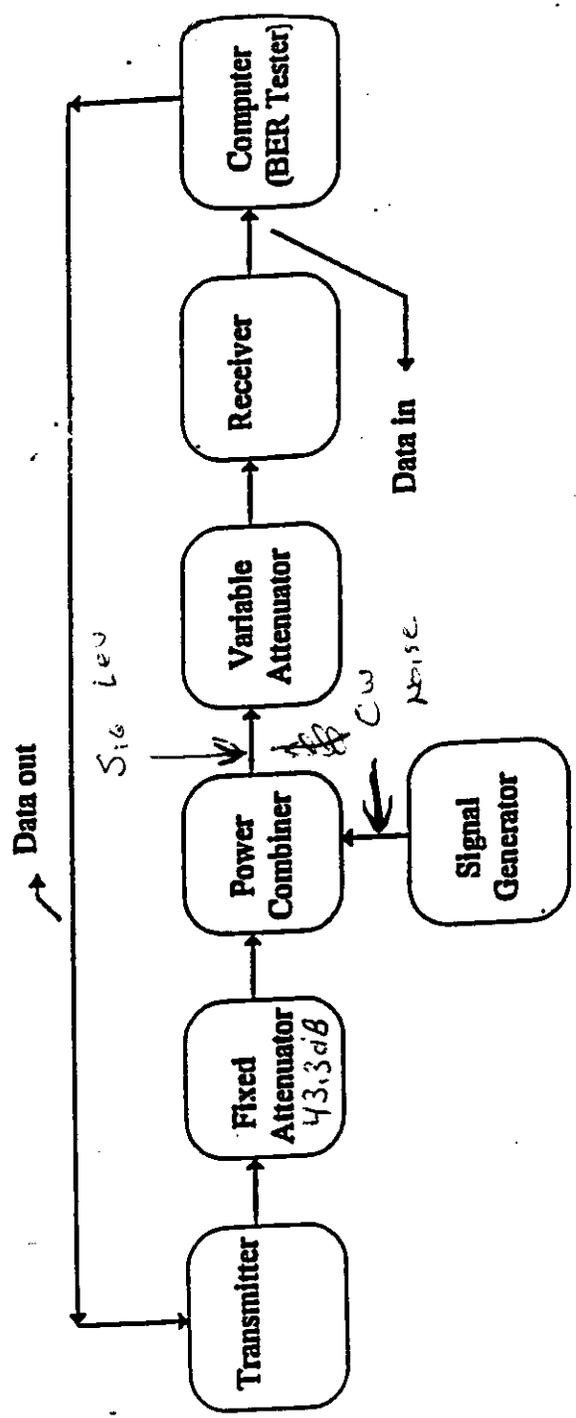


Figure 1a

PROCESSING GAIN TEST

CHANNEL 10 (914.40 MHz) - Handset output to base station input

Jammer Freq. (MHz)	Transmitter Output (dBm)	Signal Level (dBm)	CW Noise (dBm)	Mj J/S ratio (dB)	Processing Gain (dBm)
914.40	0.10	-48.40	-26.20	18.90 ✓	28.90
914.45	0.10	-48.40	-38.50	6.60	16.60
914.50	0.10	-48.40	-38.50	6.60	16.60
914.55	0.10	-48.40	-37.20	7.90	17.90
914.60	0.10	-48.40	-35.20	9.90	19.90
914.65	0.10	-48.40	-39.10	6.00	16.00
914.70	0.10	-48.40	-39.10	6.00	16.00
914.75	0.10	-48.40	-39.00	6.10	16.10
914.80	0.10	-48.40	-37.80	7.30	17.30
914.85	0.10	-48.40	-32.20	12.90	22.90
914.90	0.10	-48.40	-38.10	7.00	17.00
914.95	0.10	-48.40	-38.20	6.90	16.90
915.00	0.10	-48.40	-36.80	8.30	18.30
915.05	0.10	-48.40	-35.70	9.40	19.40
915.10	0.10	-48.40	-34.60	10.50	20.50

LOSSES

Attenuation	43.3
Combiner Loss	3
Cable Loss	2.2
System Loss	2
S/N ratio	8
Sig. Gen. Cal Factor	0.3

Signal Level = TX Output - Attenuation - Combiner Loss - Cable Loss

Mj J/S ratio =
CW Noise - Sig. Level - Combiner Loss - Sig. Gen. Cal Factor.

Processing Gain =
Mj J/S ratio + System Loss + S/N ratio.

S/N = 8 dB ✓
FOR ~~DB~~ DBPSK MODULATION
@ BER OF 10⁻³
VOICE

CHANNEL 10 (914.40 MHz) - Handset output to base station input

Jammer Freq. (MHz)	Transmitter Output (dBm)	Signal Level (dBm)	CW Noise (dBm)	Mj J/S ratio (dB)	Processing Gain (dBm)
914.35	0.10	-48.40	-37.50	7.60	17.60
914.30	0.10	-48.40	-37.70	7.40	17.40
914.25	0.10	-48.40	-37.10	8.00	18.00
914.20	0.10	-48.40	-34.90	10.20	20.20
914.15	0.10	-48.40	-38.40	6.70	16.70
914.10	0.10	-48.40	-38.40	6.70	16.70
914.05	0.10	-48.40	-38.60	6.50	16.50
914.00	0.10	-48.40	-37.00	8.10	18.10
913.95	0.10	-48.40	-32.60	12.50	22.50
913.90	0.10	-48.40	-38.70	6.40	16.40
913.85	0.10	-48.40	-37.90	7.20	17.20
913.80	0.10	-48.40	-36.50	8.60	18.60
913.75	0.10	-48.40	-36.00	9.10	19.10
913.70	0.10	-48.40	-34.50	10.60	20.60

SYS LOSS = 2 dB ✓

PROCESSING GAIN WORKSHEET FCC ID: AMWUC604

CHANNEL 10 (914.4 MHz) - Base station output to handset input

Jammer Freq. (MHz)	Transmitter Output (dBm)	Signal Level (dBm)	CW Noise (dBm)	Mj J/S ratio (dB)	Processing Gain (dBm)
914.40	1.50	-47.00	-19.40	24.30	34.30
914.45	1.50	-47.00	-39.80	3.90	13.90
914.50	1.50	-47.00	-39.80	3.90	13.90
914.55	1.50	-47.00	-38.70	5.00	15.00
914.60	1.50	-47.00	-37.10	6.60	16.60
914.65	1.50	-47.00	-41.30	2.40	12.40
914.70	1.50	-47.00	-41.30	2.40	12.40
914.75	1.50	-47.00	-41.50	2.20	12.20
914.80	1.50	-47.00	-39.50	4.20	14.20
914.85	1.50	-47.00	-35.50	8.20	18.20
914.90	1.50	-47.00	-40.90	2.80	12.80
914.95	1.50	-47.00	-40.10	3.60	13.60
915.00	1.50	-47.00	-39.10	4.60	14.60
915.05	1.50	-47.00	-38.60	5.10	15.10
915.10	1.50	-47.00	-36.60	7.10	17.10

LOSSES

Attenuation	43.3
Combiner Loss	3
Cable Loss	2.2
System Loss	2
S/N ratio	8
Sig. Gen. Cal Factor	0.3

Signal Level = TX Ouput - Attenuation - Combiner Loss - Cable Loss

Mj J/S ratio =
CW Noise - Sig. Level - Combiner Loss - Sig. Gen. Cal Factor.

Processing Gain =
Mj J/S ratio + System Loss + S/N ratio.

CHANNEL 10 (914.4 MHz) - Base station output to handset input

Jammer Freq. (MHz)	Transmitter Output (dBm)	Signal Level (dBm)	CW Noise (dBm)	Mj J/S ratio (dB)	Processing Gain (dBm)
914.35	1.50	-47.00	-41.40	2.30	12.30
914.30	1.50	-47.00	-41.90	1.80	11.80
914.25	1.50	-47.00	-41.30	2.40	12.40
914.20	1.50	-47.00	-39.20	4.50	14.50
914.15	1.50	-47.00	-42.60	1.10	11.10
914.10	1.50	-47.00	-43.00	0.70	10.70
914.05	1.50	-47.00	-42.70	1.00	11.00
914.00	1.50	-47.00	-41.80	1.90	11.90
913.95	1.50	-47.00	-36.80	6.90	16.90
913.90	1.50	-47.00	-43.20	0.50	10.50
913.85	1.50	-47.00	-42.70	1.00	11.00
913.80	1.50	-47.00	-41.30	2.40	12.40
913.75	1.50	-47.00	-40.80	2.90	12.90
913.70	1.50	-47.00	-39.30	4.40	14.40



**COMPATIBLE
ELECTRONICS**

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

APPENDIX B

EUT CONFIGURATION AND CABLE INFORMATION


**COMPATIBLE
ELECTRONICS**
FCC ID'S: AMWUC604, AJXSX2108, AAO4301102
EUT AND ACCESSORY LIST

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
900 MHz Spread Spectrum Cordless Phone (BASE)	UNIDEN AMERICA CORPORATION	EXS9110	N/A	AMWUC604
CLASS 2 TRANSFORMER	N/A	N/A	DATE CODE: 9733	N/A
LINE SIMULATOR	TELTONE	TLS-3	N/A	N/A
PHONE	COMDIAL	N/A	N/A	REG (#) A5493N-70140-TE-T
900 MHz Spread Spectrum Cordless Phone (HANDSET)	UNIDEN AMERICA CORPORATION	EXS9110	N/A	AJXEXS9110



DESCRIPTION OF EUT CONFIGURATION AND CABLE INFORMATION 900 MHz Spread Spectrum Cordless Phone MODEL: EXS9110

EUT CONFIGURATION

Handset being tested: The 900 MHz Spread Spectrum Cordless Phone- Handset Model: EXS9110 (EUT) was placed on the wooden table and tested in three orthogonal axis. The low (channel 1), medium (channel 10), and high (channel 20) channels were tested. The handset was transmitting to and receiving from the 900 Spread Spectrum Telephone base. The EUT was investigated for emissions while off hook. The radiated data was taken in this mode of operation. All initial investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in this Appendix.

Base being tested: The 900 MHz Spread Spectrum Cordless Phone - Base Model: EXS9110 (EUT) was placed on the wooden table. The low (channel 1), medium (channel 10), and high (channel 20) channels were tested. The base was connected to a line simulator and AC adapter via its RJ-11 and power ports, respectively. The line simulator was connected to the Comdial telephone. The base was transmitting and receiving from the 900 MHz Spread Spectrum Cordless Phone handset. The 900 MHz Spread Spectrum Cordless Phone handset was also used to dial out a number on the simulator that caused the Comdial telephone to ring. The conducted as well as radiated data was taken in this mode of operation. All initial investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in this Appendix.



CABLE CONSTRUCTION AND TERMINATION

HANDSET BEING TESTED

Cable 1

This is a 6 foot unshielded cable connecting the headphones to the handset. It has a 1/8 inch stereo connector at the headphones end and is hard wired into the handset.

BASE BEING TESTED

Cable 1

This is a 6 foot unshielded cable connecting the base to the line simulator. It has an RJ-11 connector at the line simulator end and is hard wired into the base. The cable was bundled to a length of 1 meter.

Cable 2

This is a 6 foot unshielded cable connecting the telephone to the line simulator. It has an RJ-11 connector at the line simulator end and is hard wired into the telephone. The cable was bundled to a length of 1 meter.

Cable 3

This is a 6 foot unshielded round cable connecting the base to the AC adapter. It has a 1/8" power jack at the base end and is hard wired into the AC adapter.



COMPATIBLE ELECTRONICS FCC ID'S: AMWUC604, AJXSX2108, AAO4301102


APPENDIX C

***ANTENNA, AMPLIFIER FACTORS
& EFFECTIVE GAIN CHARTS***



Cat: 3/24/98


LAB "D" BICONICAL ANTENNA AB-100 S/N 01548

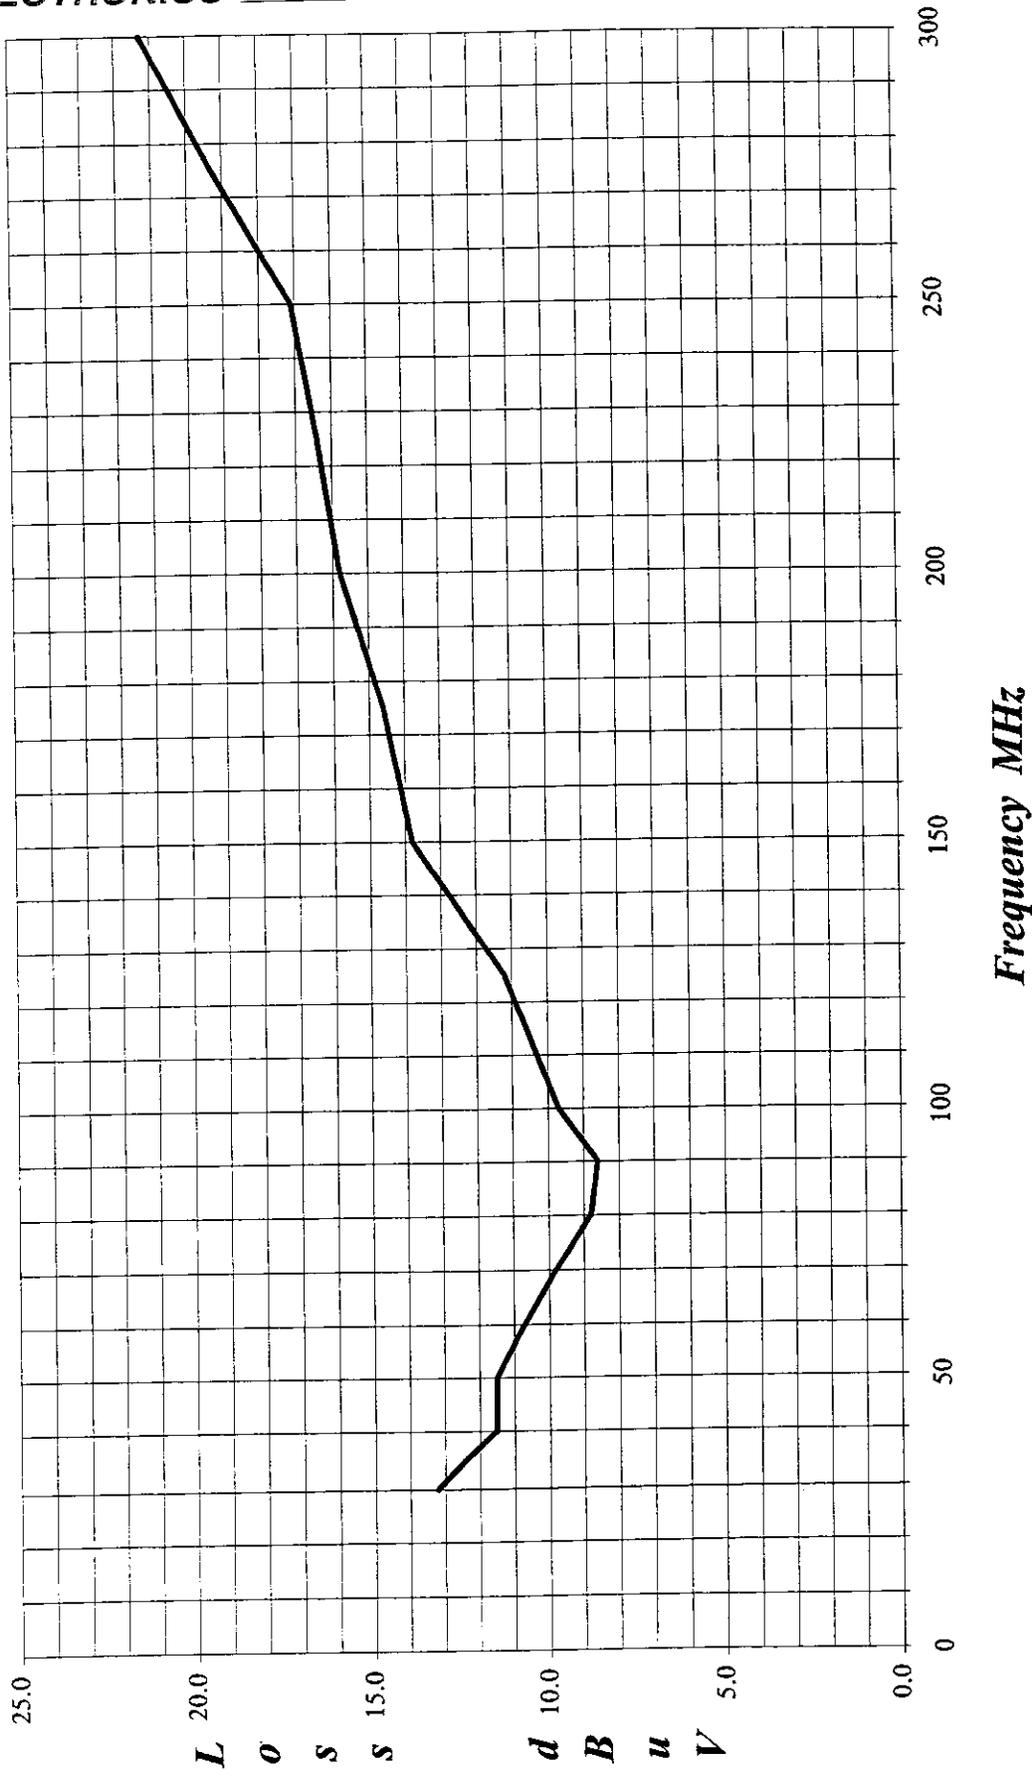



LAB "D" LOG PERIODIC ANTENNA AL-100 S/N 01012


Cat: 2/13/98

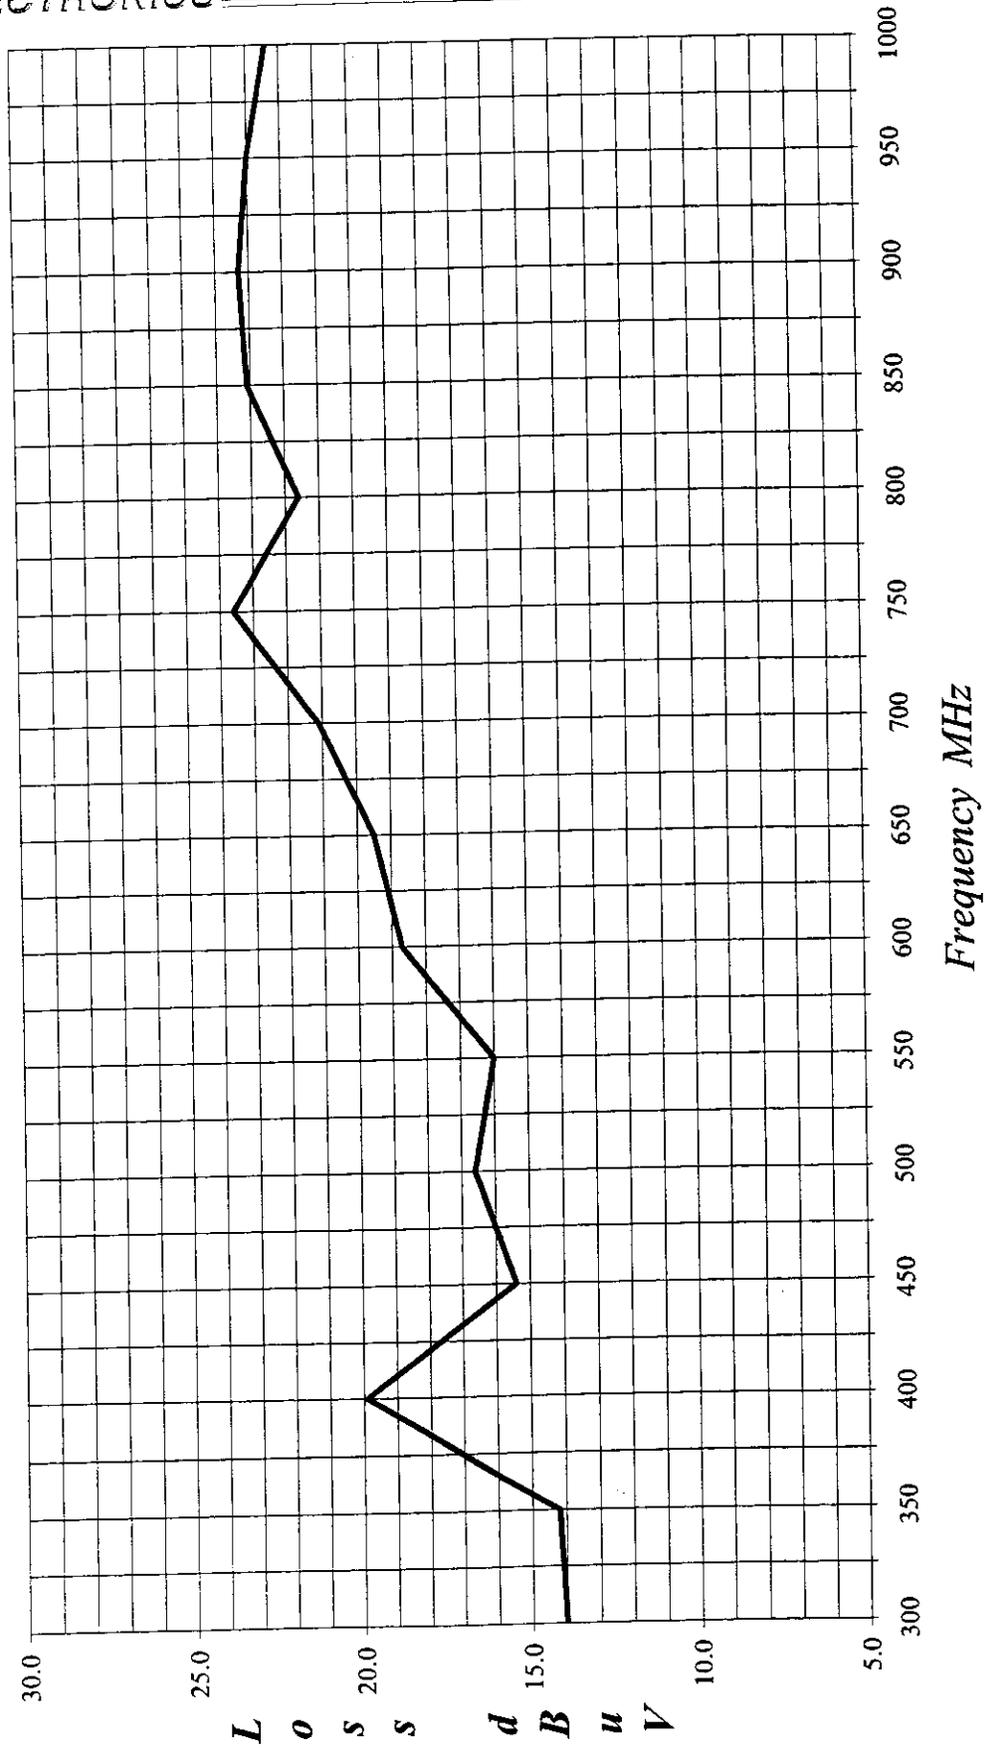




Lab "D" Effective: 2/16/98 Effective Gain = Preampifier Gain - Cable Loss

PREAMPLIFIER EFFECTIVE GAIN AT 3 METERS PA-102 S/N: 1017

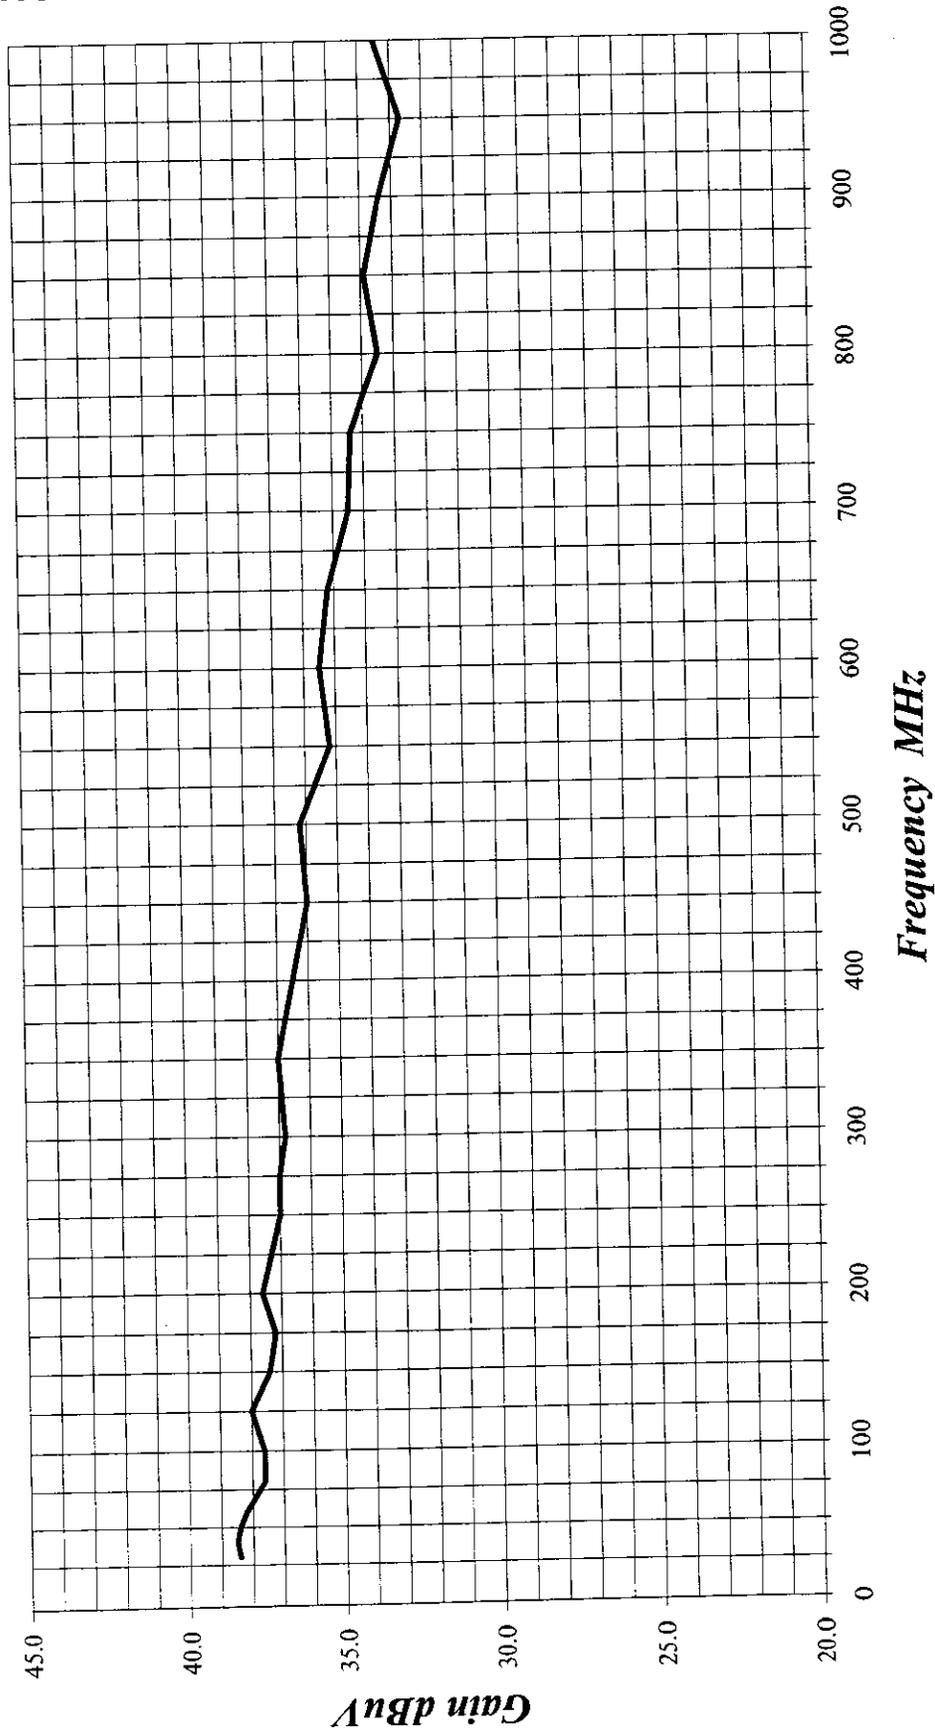

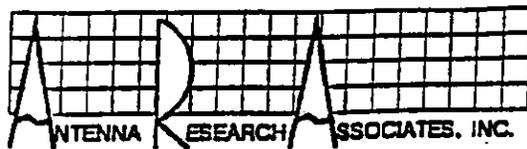

11317 Frederick Avenue, Beltsville, MD 20705

E-FIELD ANTENNA FACTOR CALIBRATION


$$E(\text{dB V/m}) = V_o(\text{dB V}) + AFE(\text{dB/m})$$

Model number : DRG-118/A

Frequency GHz	AFE dB/m	Gain dBi
1	22.3	8.0
2	26.7	9.5
3	29.7	10.1
4	29.5	12.8
5	32.3	12.0
6	32.4	13.4
7	36.1	11.0
8	37.4	10.9
9	36.8	12.5
10	39.5	10.7
11	39.6	11.5
12	39.8	12.0
13	39.7	12.8
14	41.8	11.3
15	41.9	11.9
16	38.1	16.3
17	41.0	13.9
18	46.5	8.9

Serial number : 1053
Job number : 96-092
Remarks : 3 meter calibration
Standards : LPD-118/A, TE-1000

Temperature : 72° F
Humidity : 56 %
Traceability : A01887
Date : December 08, 1995


Calibrated By

Com-Power Corporation		
(714) 587-9800		
Antenna Calibration		
Antenna Type:	Loop Antenna	
Model:	AL-130	
Serial Number:	25309	
Calibration Date:	2/5/98	
Frequency MHz	Magnetic (dB/m)	Electric (dB/m)
0.01	-40.5	11.0
0.02	-41.6	9.9
0.03	-40.0	11.5
0.04	-40.3	11.2
0.05	-41.6	9.9
0.06	-41.1	10.4
0.07	-41.3	10.2
0.08	-41.6	9.9
0.09	-41.7	9.8
0.1	-41.8	9.7
0.2	-44.0	7.5
0.3	-41.6	9.9
0.4	-41.7	9.8
0.5	-41.7	9.8
0.6	-41.5	10.0
0.7	-41.5	10.0
0.8	-41.6	9.9
0.9	-41.6	9.9
1	-41.1	10.4
2	-40.7	10.8
3	-40.7	10.8
4	-40.9	10.6
5	-40.1	11.4
6	-40.0	11.5
7	-40.3	11.2
8	-39.8	11.7
9	-38.8	12.7
10	-40.8	10.7
12	-41.4	10.1
14	-41.4	10.1
15	-40.9	10.6
16	-40.8	10.7
18	-41.5	10.0
20	-41.5	10.0
25	-41.2	10.3
30	-41.4	10.1
Trans. Antenna Height	2 meter	
Receiving Antenna Height	2 meter	

HEWLETT PACKARD 8349B
MICROWAVE PREAMPLIFIER

S/N: 2548A00432

CALIBRATION DATE: FEBRUARY 18, 1998

FREQUENCY (GHz)	GAIN (dB)	FREQUENCY (GHz)	GAIN (dB)
1.0	10.4	1.9	29.1
1.1	18.6	2.0	28.8
1.2	22.9	2.5	26.8
1.3	25.7	3.0	28.2
1.4	27.2	3.5	23.9
1.5	28.5	4.0	25.8
1.6	28.7	4.5	22.1
1.7	28.8	5.0	23.3
1.8	29.0		

COM-POWER PA-122
MICROWAVE PREAMPLIFIER

S/N: 001

CALIBRATION DATE: MARCH 31, 1998

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
5.5	32.0	8.0	31.4
6.0	31.6	8.5	30.5
6.5	32.0	9.0	31.4
7.0	31.4	9.5	32.6
7.5	32.0	10.0	33.1



APPENDIX D

MODIFICATIONS TO THE EUT



MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart C Section 15.247 (c) specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.


Modifications:

- 1) Change R227 on the base from 1800 ohms to 2200 ohms.
- 2) Change R627 on the handset from 1800 ohms to 2200 ohms
- 3) Affix copper adhesive tape to the side of the RF module for both the base and handset. The size of the copper adhesive will be 10 mm X 20 mm. (See diagram on next page)


RF MODULE GIND-X04

3/4


TOP VIEW (X) = SCREW

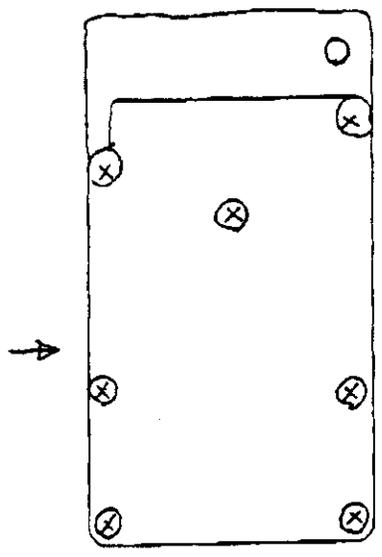

Base : RF UNIT

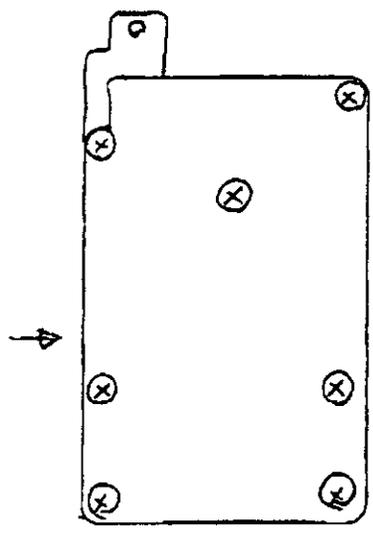

HANDSET : RF UNIT

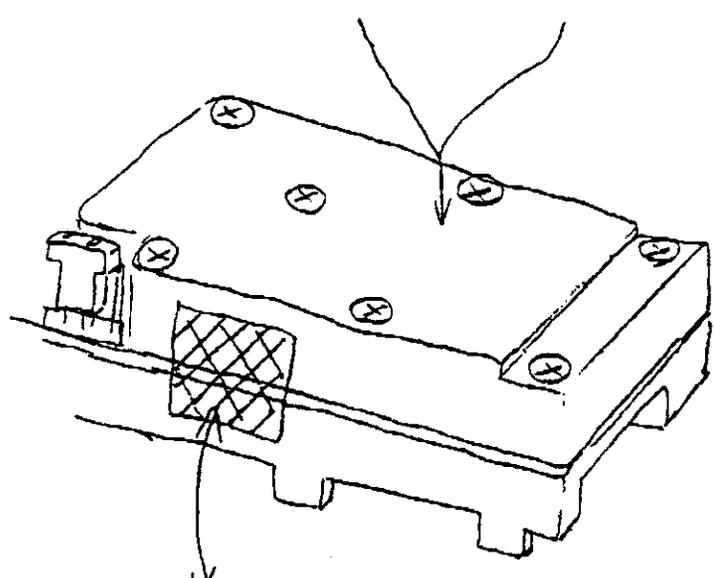

Copper tape.

(SIZE: 10 mm X 20 mm)



**COMPATIBLE
ELECTRONICS**

FCC ID'S: AMWUC604, AJXSX2108, AAO4301102

APPENDIX E

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***



ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

900 MHz Spread Spectrum Cordless Phone
Brand: Uniden
Model: EXS9110
S/N: Prototype
FCC-ID: AMWUC604

Note: The chassis for the Uniden model is 100% plastic.

ALSO APPROVED UNDER THIS REPORT:

1. Brand: Toshiba
Model: SX-2108
FCC-ID: AJXSX2108

2. Brand: Radio Shack
Model: 43-1104
FCC-ID: AAO4301102

Both the Toshiba and Radio Shack Models are exactly the same electrically and will have 100% plastic chassis for both the base and handset.

EXHIBIT - 6

PHOTOGRAPHS