



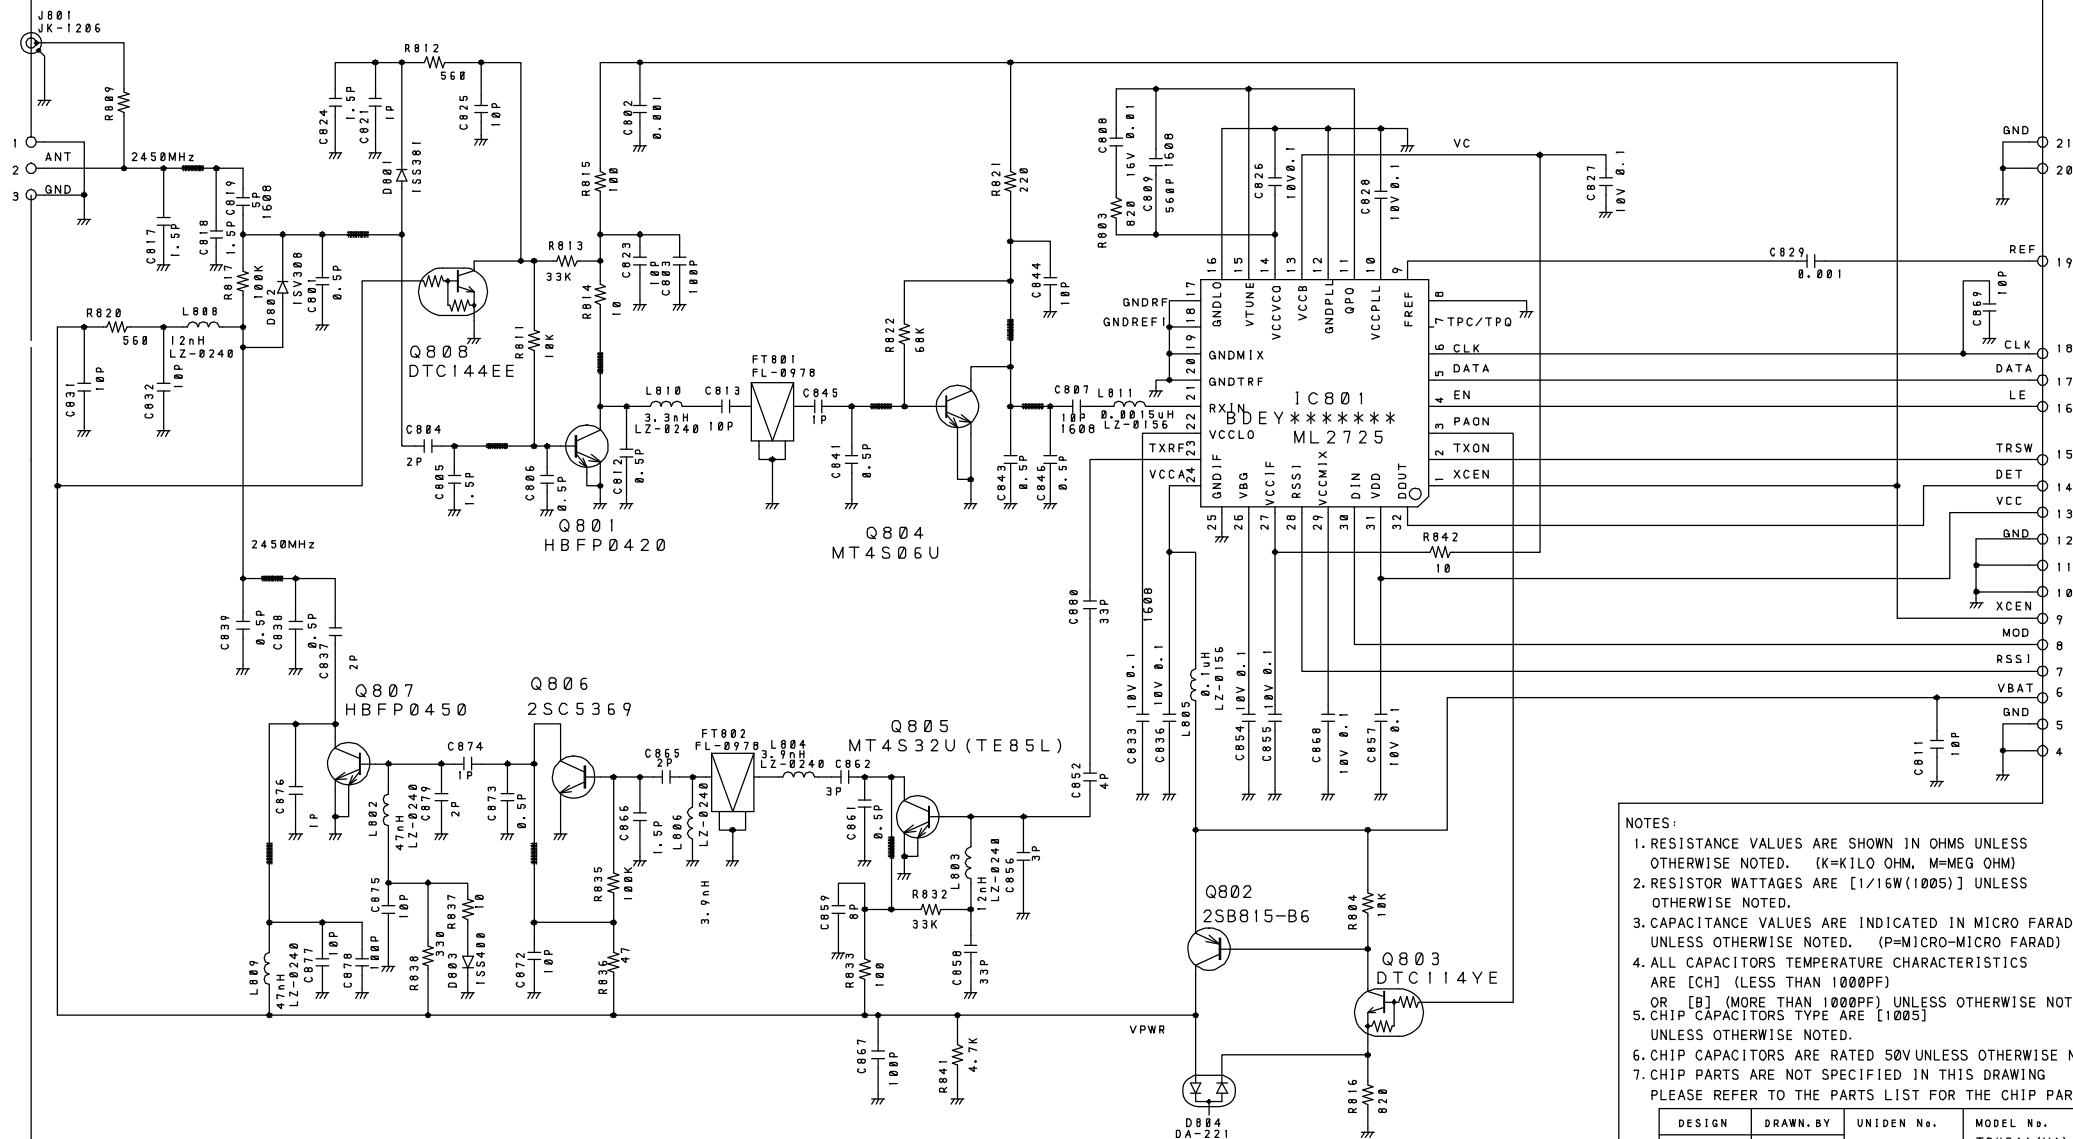

NOTES:

1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
2. RESISTOR WATTAGES ARE [1/16W(1005)] UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=MICRO-MICRO FARAD)
4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE [CH] (LESS THAN 1000PF)
OR [B] (MORE THAN 1000PF) UNLESS OTHERWISE NOTED.
5. CHIP CAPACITORS TYPE ARE [1005] UNLESS OTHERWISE NOTED.
6. CHIP CAPACITORS ARE RATED 50V UNLESS OTHERWISE NOTED.
7. CHIP PARTS ARE NOT SPECIFIED IN THIS DRAWING
PLEASE REFER TO THE PARTS LIST FOR THE CHIP PARTS.

DESIGN	DRAWN BY	UNIDEN No.	MODEL No.
00/SEP/25	00/NOV/29	UC723BH	TRU341(VA)
KWG	HRB	TITLE PORT RF ASSY	
CHECK BY	APPRO BY	SCHEMATIC DIAGRAM	
		DRAWING No.	
REV. No		UNIDEN CORP.	

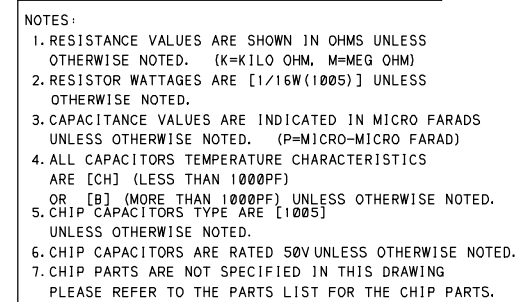

DESIGN	DRAWN BY	UNIDEN No.	MODEL No.
01/JAN/22	00/NOV/29	UC723BH	TRU341 (VA)
KWG	HRB	TITLE BASE RF ASSY	
CHECK BY	APPRO BY	SCHEMATIC DIAGRAM	
		DRAWING No.	
REV. No	BM1	UNIDEN CORP.	

Box 1 : 最新回路図

