

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

SAR TEST REPORT (FCC/IC)

RF EXPOSURE EVALUATION	SPECIFIC ABSORPTION RATE						
APPLICANT / MANUFACTURER	UNIDEN AMERICA CORPORATION						
DEVICE UNDER TEST (DUT)	PORTABLE 1.9 GHz UPCS/LE-PCS DECT 6.0 CORDLESS HANDSET						
DEVICE FREQUENCY RANGE	1921.536 - 1928.448 MHz						
DEVICE MODEL(S)	DECT4086						
DEVICE IDENTIFIER(S)	<table border="1" style="width: 100%;"> <tr> <td>FCC ID:</td> <td>AMWUN042R</td> <td>IC:</td> <td>513C-UN041</td> </tr> </table>	FCC ID:	AMWUN042R	IC:	513C-UN041		
FCC ID:	AMWUN042R	IC:	513C-UN041				
APPLICATION TYPE	FCC/IC Certification						
STANDARD(S) APPLIED	FCC 47 CFR §2.1093						
	Health Canada Safety Code 6						
PROCEDURE(S) APPLIED	FCC OET Bulletin 65, Supplement C (01-01)						
	FCC Mobile & Portable RF Exposure Proc. (KDB 447498 D01 v03r03)						
	Industry Canada RSS-102 Issue 2						
	<table border="1" style="width: 100%;"> <tr> <td>IEEE 1528-2003</td> <td>IEC 62209-1:2005</td> </tr> </table>	IEEE 1528-2003	IEC 62209-1:2005				
IEEE 1528-2003	IEC 62209-1:2005						
FCC DEVICE CLASSIFICATION	<table border="1" style="width: 100%;"> <tr> <td>Part 15 Unlicensed PCS Portable Transmitter held to ear (PUE)</td> <td>47 CFR §15(D)</td> </tr> </table>	Part 15 Unlicensed PCS Portable Transmitter held to ear (PUE)	47 CFR §15(D)				
Part 15 Unlicensed PCS Portable Transmitter held to ear (PUE)	47 CFR §15(D)						
IC DEVICE CLASSIFICATION	<table border="1" style="width: 100%;"> <tr> <td>2 GHz Licence Exempt Personal Communications Service Device (PCS)</td> <td>RSS-213 Issue 2</td> </tr> </table>	2 GHz Licence Exempt Personal Communications Service Device (PCS)	RSS-213 Issue 2				
2 GHz Licence Exempt Personal Communications Service Device (PCS)	RSS-213 Issue 2						
RF EXPOSURE CATEGORY	General Population / Uncontrolled						
RF EXPOSURE EVALUATION(S)	<table border="1" style="width: 100%;"> <tr> <td>Ear-held</td> <td>Body-worn</td> </tr> </table>	Ear-held	Body-worn				
Ear-held	Body-worn						
DATE(S) OF EVALUATION(S)	May 14, 2009						
TEST REPORT SERIAL NO.	041509AMW-T962-S15D						
	<table border="1" style="width: 100%;"> <tr> <td>Revision 1.2</td> <td>Correct Output Power</td> <td>June 11, 2009</td> </tr> </table>	Revision 1.2	Correct Output Power	June 11, 2009			
Revision 1.2	Correct Output Power	June 11, 2009					
TEST REPORT REVISION NO.	<table border="1" style="width: 100%;"> <tr> <td>Revision 1.1</td> <td>Correct IC Cert. No.</td> <td>May 20, 2009</td> </tr> <tr> <td>Revision 1.0</td> <td>Initial Release</td> <td>May 19, 2009</td> </tr> </table>	Revision 1.1	Correct IC Cert. No.	May 20, 2009	Revision 1.0	Initial Release	May 19, 2009
Revision 1.1	Correct IC Cert. No.	May 20, 2009					
Revision 1.0	Initial Release	May 19, 2009					
TEST REPORT SIGNATORIES	<table border="1" style="width: 100%;"> <tr> <td>Testing Performed By</td> <td>Test Report Prepared By</td> </tr> <tr> <td>Sean Johnston Celltech Labs Inc.</td> <td>Jonathan Hughes Celltech Labs Inc.</td> </tr> </table>	Testing Performed By	Test Report Prepared By	Sean Johnston Celltech Labs Inc.	Jonathan Hughes Celltech Labs Inc.		
Testing Performed By	Test Report Prepared By						
Sean Johnston Celltech Labs Inc.	Jonathan Hughes Celltech Labs Inc.						
TEST LAB AND LOCATION	<table border="1" style="width: 100%;"> <tr> <td>Celltech Compliance Testing and Engineering Lab</td> </tr> <tr> <td>21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada</td> </tr> </table>	Celltech Compliance Testing and Engineering Lab	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada				
Celltech Compliance Testing and Engineering Lab							
21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada							
TEST LAB CONTACT INFO.	<table border="1" style="width: 100%;"> <tr> <td>Tel.: 250-765-7650</td> <td>Fax: 250-765-7645</td> </tr> <tr> <td>info@celltechlabs.com</td> <td>www.celltechlabs.com</td> </tr> </table>	Tel.: 250-765-7650	Fax: 250-765-7645	info@celltechlabs.com	www.celltechlabs.com		
Tel.: 250-765-7650	Fax: 250-765-7645						
info@celltechlabs.com	www.celltechlabs.com						
TEST LAB ACCREDITATION(S)	<div style="text-align: center;">   <p>Test Lab Certificate No. 2470.01</p> </div>						

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 1 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

Test Lab Information	Name	CELLTECH LABS INC.				
	Address	21-364 Lougheed Road, Kelowna, British Columbia V1X 7R8 Canada				
Applicant Information	Name	UNIDEN AMERICA CORPORATION				
	Address	4700 Amon Carter Boulevard, Fort Worth, Texas 76155 United States				
Standard(s) Applied	FCC	47 CFR §2.1093				
	IC	Health Canada Safety Code 6				
Procedure(s) Applied	FCC	OET Bulletin 65, Supplement C (01-01)				
	FCC	Mobile & Portable RF Exposure Procedures (KDB 447498 D01 v03r03)				
	IC	RSS-102 Issue 2				
	IEEE	1528-2003				
	IEC	62209-1:2005				
Device RF Exposure Category	Portable	General Population / Uncontrolled Environment				
Device Classification(s)	FCC	Part 15 Unlicensed PCS portable Transmitter held to ear (PUE)	47 CFR §15(D)			
	IC	2 GHz Licence Exempt Personal Communications Service Device (PCS)	RSS-213 Issue 2			
Device Identifier(s)	FCC ID:	AMWUN042R				
	IC:	513C-UN041				
	Model(s)	DECT4086				
	Serial No.	FCC#1 (Identical Prototype)				
Device Description	Portable 1.9 GHz UPCS/LE-PCS DECT 6.0 Cordless Handset					
Transmit Frequency Range(s)	1921.536 - 1928.448 MHz					
Reference RF Output Power	19.0 dBm	79.43 mW	Peak Conducted	1924.992 MHz		
	5.02 dBm	3.18 mW	Source-Based Time-Averaged	1924.992 MHz		
Maximum Duty Cycle Tested	4 %	Crest Factor: 1:25	Source-Based Time-Averaged	TDMA/TDD		
Antenna Type(s) Tested	Internal					
Battery Type(s) Tested	Ni-MH	2.4V	500mAh	Model: BT-1018		
Body-worn Accessories Tested	Plastic Belt-Clip		Part No.: none			
Audio Accessories Tested	Headset (Ear-Loop/Boom-Microphone)		Part No.: ZA-133			
Max. SAR Level(s) Evaluated	HEAD	0.027 W/kg	1g average	FCC/IC SAR Limit	1.6 W/kg	1g average
	BODY	0.015 W/kg	1g average			
<p>Celltech Labs Inc. declares under its sole responsibility that this wireless portable device was compliant with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the General Population / Uncontrolled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 2, IEEE Standard 1528-2003 and IEC International Standard 62209-1:2005. All measurements were performed in accordance with the SAR system manufacturer recommendations.</p> <p>I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.</p> <p>The results and statements contained in this report pertain only to the device evaluated. This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.</p>						
Test Report Approved By			Sean Johnston	Celltech Labs Inc.		



Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 2 of 44

TABLE OF CONTENTS	
1.0 INTRODUCTION _____	4
2.0 SAR MEASUREMENT SYSTEM _____	4
3.0 MEASUREMENT SUMMARY _____	5
4.0 DETAILS OF SAR EVALUATION _____	6
DETAILS OF SAR EVALUATION (CONT.) _____	7
5.0 TIMING PLOT _____	7
6.0 EVALUATION PROCEDURES _____	8
7.0 SYSTEM PERFORMANCE CHECK _____	9
8.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES _____	10
9.0 SIMULATED EQUIVALENT TISSUES _____	10
10.0 SAR LIMITS _____	10
11.0 ROBOT SYSTEM SPECIFICATIONS _____	11
12.0 PROBE SPECIFICATION (EX3DV4) _____	12
13.0 SAM PHANTOM V4.0C _____	12
14.0 DEVICE HOLDER _____	12
15.0 TEST EQUIPMENT LIST _____	13
16.0 MEASUREMENT UNCERTAINTIES _____	14
17.0 REFERENCES _____	15
APPENDIX A - SAR MEASUREMENT DATA _____	16
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA _____	26
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS _____	31
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS _____	34
APPENDIX E - DIPOLE CALIBRATION _____	42
APPENDIX F - PROBE CALIBRATION _____	43
APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY _____	44


	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

1.0 INTRODUCTION

This measurement report demonstrates that the Uniden America Corporation Model: DECT4086 Portable 1.9 GHz UPCS/LE-PCS DECT 6.0 Cordless Handset complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]), IC RSS-102 Issue 2 (see reference [4]), IEEE Standard 1528-2003 (see reference [5]) and IEC International Standard 62209-1:2005 (see reference [6]) were employed. A description of the product, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for Head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.

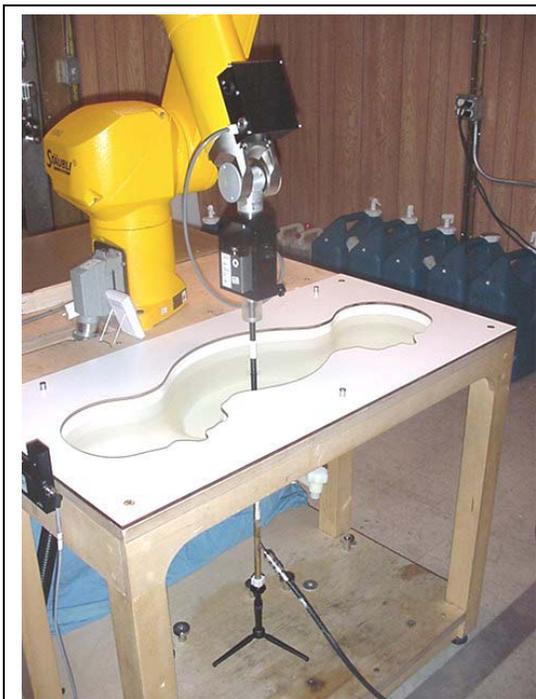

DASY4 System with SAM Twin Phantom V4.0C



DASY4 Measurement Server

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

3.0 MEASUREMENT SUMMARY

SAR EVALUATION SUMMARY

Test Config.	Freq.	Ch.	Test Mode	Duty Cycle	Crest Factor	Phantom Section	Test Position	Accessories	Reference RF Output Power (mW)		SAR Drift	Measured SAR (1g)
	MHz								Cond.	SBTA		
HEAD	1924.992	3	Modulated TDMA/TDD	4%	1:25	Left Ear	Cheek/Touch	n/a	79.43	3.18	-0.164	0.027
	1924.992	3	Modulated TDMA/TDD	4%	1:25	Left Ear	Ear/Tilt (15°)	n/a	79.43	3.18	0.041	0.015
	1924.992	3	Modulated TDMA/TDD	4%	1:25	Right Ear	Cheek/Touch	n/a	79.43	3.18	0.012	0.018
	1924.992	3	Modulated TDMA/TDD	4%	1:25	Right Ear	Ear/Tilt (15°)	n/a	79.43	3.18	-0.055	0.011
BODY	1924.992	3	Modulated TDMA/TDD	4%	1:25	Planar	Belt-Clip Touch	7 mm Belt-Clip & Headset-Mic	79.43	3.18	0.091	0.015
SAR SAFETY LIMIT(S)						HEAD & BODY		SPATIAL PEAK		RF EXPOSURE CATEGORY		
FCC 47 CFR 2.1093			Health Canada Safety Code 6			1.6 W/kg		1g average		General Population / Uncontrolled		
Date(s) of Evaluation		May 14, 2009					Fluid Type		Head	Body	Unit	
Dielectric Constant ϵ_r		IEEE Target (1900 MHz)			Measured	Deviation	Atmospheric Pressure		101.1	101.1	kPa	
		Head	40.0	± 5%	40.5	+1.2%	Ambient Temperature		25.3	25.0	°C	
		Body	53.3	± 5%	50.7	-4.9%	Fluid Temperature		23.5	23.4	°C	
Conductivity σ (mho/m)		IEEE Target (1900 MHz)			Measured	Deviation	Relative Humidity		35	35	%	
		Head	1.40	± 5%	1.47	+5.0%	Fluid Depth		≥ 15	≥ 15	cm	
		Body	1.52	± 5%	1.57	+3.3%	ρ (Kg/m ³)		1000			
Notes												
1.	Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.											
2.	The transmission band of the DUT is less than 10 MHz; therefore mid channel data only is reported (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).											
3.	The SAR drift of the DUT was measured by the DASY4 system for the duration of the SAR evaluations.											
4.	The Ni-MH battery installed in the DUT was fully charged prior to the SAR evaluations.											
5.	The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within +/-2°C of the fluid temperature reported during the dielectric parameter measurements.											
6.	The dielectric parameters of the simulated tissue mixture were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).											
7.	SBTA = Source-Based Time-Averaged											

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 44


	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

4.0 DETAILS OF SAR EVALUATION


The Uniden America Corporation Model: DECT4086 Portable 1.9 GHz UPCS/LE-PCS DECT 6.0 Cordless Handset was compliant for localized Specific Absorption Rate (Uncontrolled Exposure) based on the test provisions and conditions described below. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A. The detailed test setup photographs are shown in Appendix D.

Ear-held Configuration(s)

- 1) The DUT was tested in an ear-held configuration on both the left and right head sections of the SAM phantom at the mid channel of the operating band. If the transmission band of the DUT is less than 10 MHz then mid channel data only was reported (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).
 - a) The handset was placed in the device holder in a normal operating position with the test device reference point located along the vertical centerline on the front of the device aligned to the ear reference point, with the center of the earpiece touching the center of the ear spacer of the SAM phantom.
 - b) With the handset positioned parallel to the cheek, the test device reference point was aligned to the ear reference point on the head phantom, and the vertical centerline was aligned to the phantom reference plane (initial ear position).
 - c) While maintaining the three alignments, the body of the handset was gradually adjusted to each of the following test positions:
 - Cheek/Touch Position: the handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom.

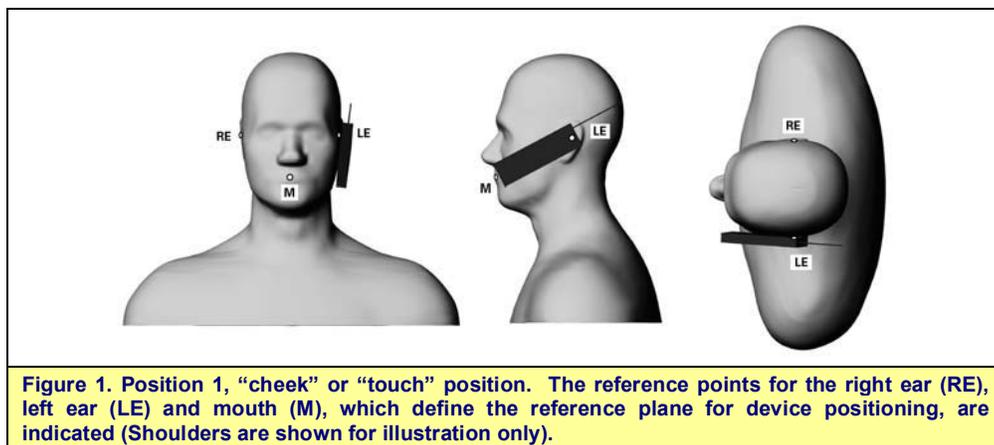

- Ear/Tilt Position: With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees.

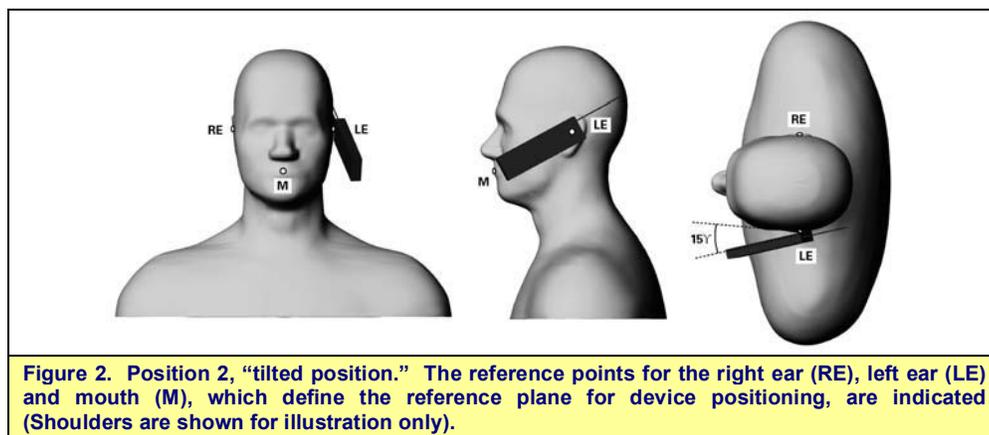

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 6 of 44

	Date(s) of Evaluation May 14, 2009	Test Report Serial No. 041509AMW-T962-S15D	Test Report Revision No. Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date June 11, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category General Population	

DETAILS OF SAR EVALUATION (Cont.)

Body-worn Configuration(s)

- 2) The back side of the DUT was evaluated for body-worn SAR with the attached plastic belt-clip accessory touching the outer surface of the SAM phantom (planar section). The belt-clip accessory provided a 7 mm spacing from the back side of the DUT to the outer surface of the SAM phantom (planar section). The customer-supplied headset-microphone audio accessory was connected to the DUT for the duration of the SAR evaluation.


Test Mode(s)

- 3) The DUT was placed in test mode using internal test software provided by Uniden and programmed via the handset keypad.
- 4) The DUT was tested at maximum power and source-based time-averaged duty cycle (4%) with a modulated TDMA signal (crest factor = 1:25).

Output Power

- 5) The RF conducted output power of the test sample was not measured by Celltech Labs Inc. due to the internal antenna type. The RF conducted output power level of the DUT referenced in this report was measured by Nemko Comlab (Norway).

5.0 TIMING PLOT

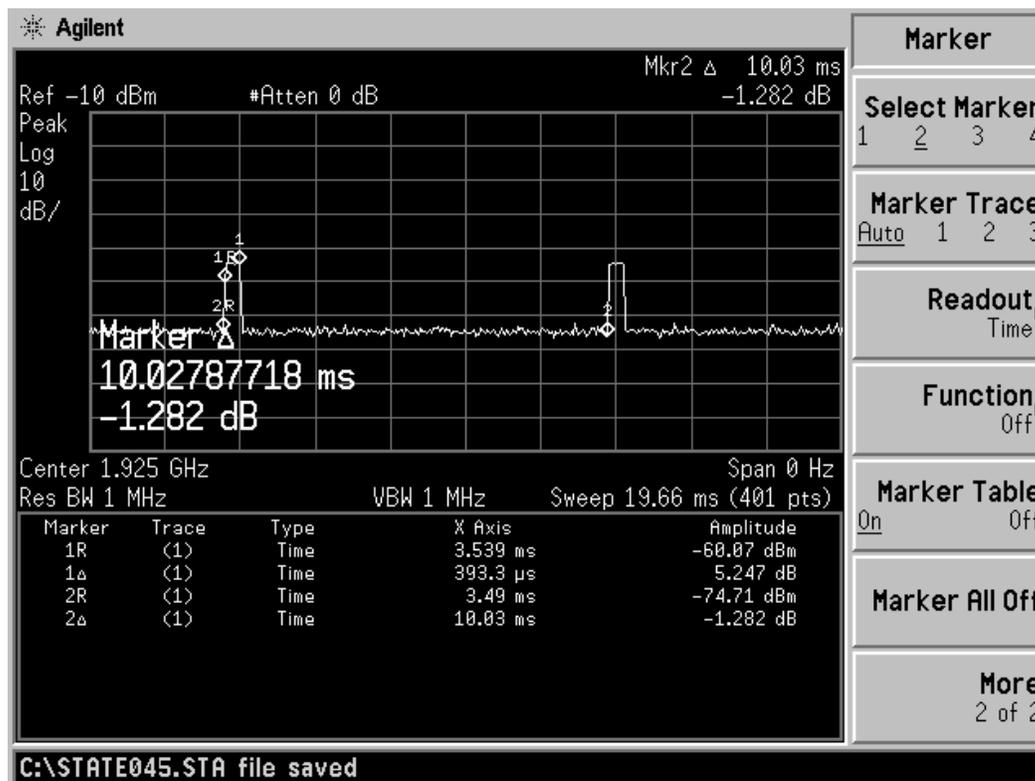


0.3933 ms / 10.03 ms
= 4 % Duty Cycle

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 7 of 44

6.0 EVALUATION PROCEDURES

- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
(ii) For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
 - Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
 - A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
 - A 1g and 10g spatial peak SAR was determined as follows:
 - Extrapolation is used to determine the values between the dipole center of the probe and the surface of the phantom. This data cannot be measured because the center of the dipole sensors is 1.0 mm away from the probe tip and the distance between the probe and the boundary must be larger than 25% of the probe diameter. The probe diameter is 2.4 mm. In the DASY4 software, the distance between the sensor center and phantom surface is set to 2.0 mm. This provides a distance of 1.0 mm between the probe tip and the surface. The extrapolation of the values between the dipole center and the surface of the phantom was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
 - Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
 - A zoom scan volume of 32 mm x 32 mm x 30 mm (5x5x7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7x7x7 points) to ensure complete capture of the peak spatial-average SAR.

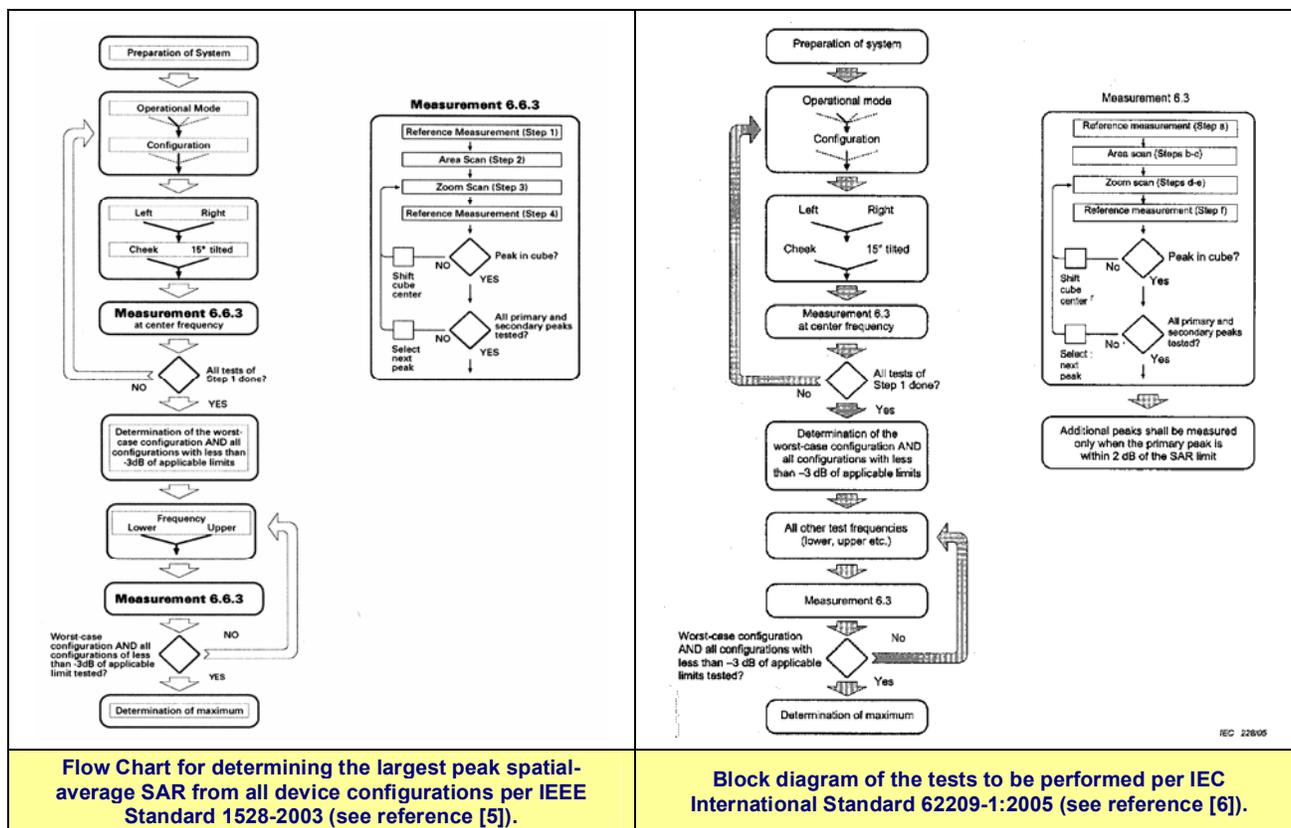


	Date(s) of Evaluation May 14, 2009	Test Report Serial No. 041509AMW-T962-S15D	Test Report Revision No. Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date June 11, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category General Population	

7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations, daily system checks were performed at the planar section of the SAM phantom with a 1900MHz SPEAG dipole (see Appendix B for system performance check test plots) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [5]) and IEC International Standard IEC 62209-1:2005 (see reference [6]). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the system manufacturer's dipole calibration target SAR value (see Appendix E for dipole calibration procedures).

SYSTEM PERFORMANCE CHECK EVALUATIONS																
Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. (MHz)	Nominal Target	Meas.	Dev.	Nominal Target	Meas.	Dev.	Nominal Target	Meas.						
May 14	Head	10.2 $\pm 10\%$	10.7	+4.9%	40.0 $\pm 5\%$	40.6	+1.5%	1.40 $\pm 5\%$	1.45	+3.6%	1000	25.3	23.5	≥ 15	35	101.1
	1900															
May 14	Body	10.5 $\pm 10\%$	10.7	+1.9%	53.3 $\pm 5\%$	50.7	-4.9%	1.52 $\pm 5\%$	1.55	+2.0%	1000	25.0	23.4	≥ 15	35	101.1
	1900															
Note(s)		1. The target SAR values are the nominal values from the dipole calibration performed by SPEAG (see Appendix E). 2. The target dielectric parameters are the nominal values from the dipole calibration performed by SPEAG (see Appendix E). 3. The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements. 4. The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).														

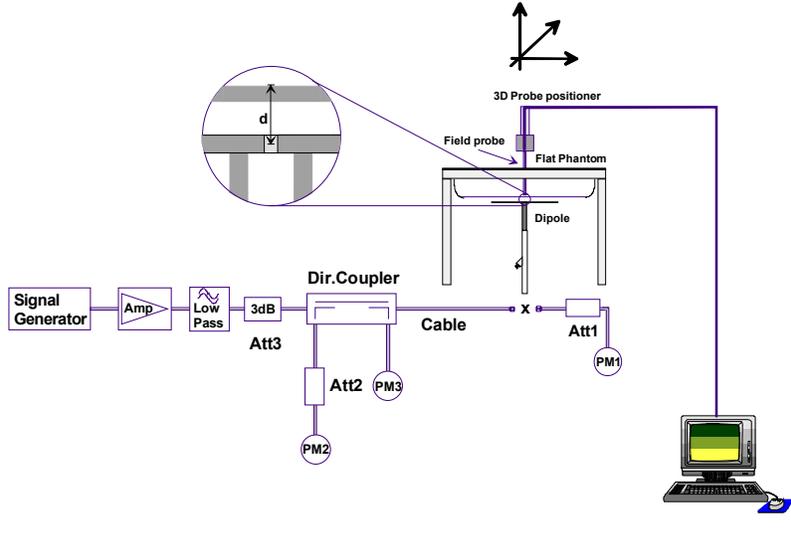

System Performance Check Measurement Setup Diagram



1900 MHz Validation Dipole Setup

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	
				Test Lab Certificate No. 2470.01

8.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within ± 50 MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within ± 100 MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals, ± 25 MHz < 300 MHz and ± 50 MHz ≥ 300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [8]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	± 50 MHz ≥ 300 MHz
1950 MHz	1924.992	25.008 MHz	< 50 MHz

The probe calibration and measurement frequency interval is < 50 MHz; therefore the additional steps are not required for this evaluation.

9.0 SIMULATED EQUIVALENT TISSUES

The 1900 MHz simulated equivalent tissue mixtures consist of Glycol-monobutyl, water and salt. The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

1900 MHz SIMULATED TISSUE MIXTURES			
INGREDIENT	1900 MHz Head	1900 MHz Head	1900 MHz Body
	System Performance Check	DUT Evaluation	DUT Evaluation
Water	55.85 %	55.85 %	69.85 %
Glycol Monobutyl	44.00 %	44.00 %	29.89 %
Salt	0.15 %	0.15 %	0.26 %

10.0 SAR LIMITS

SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	(General Population / Uncontrolled Exposure)	(Occupational / Controlled Exposure)
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 10 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

11.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info.; Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	EX3DV4
Serial No.	3600
Construction	Symmetrical design with triangular core
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Phantom(s)</u>	
Type	SAM V4.0C
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 25 liters

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 11 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

12.0 PROBE SPECIFICATION (EX3DV4)

Construction: Symmetrical design with triangular core
 Built-in shielding against static charges
 PEEK enclosure material (resistant to organic solvents, e.g. DGBE)

Calibration: Basic Broadband Calibration in air: 10-3000 MHz
 Conversion Factors (CF) for HSL 900 and HSL 1750

Frequency: 10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity: ± 0.3 dB in HSL (rotation around probe axis)
 ± 0.5 dB in tissue material (rotation normal to probe axis)

Dynamic Range: 10 μ W/g to >100 mW/g; Linearity: ± 0.2 dB
 (noise: typically $< 1 \mu$ W/g)

Dimensions: Overall length: 330 mm (Tip: 20 mm)
 Tip diameter: 2.5 mm (Body: 12 mm)
 Typical distance from probe tip to dipole centers: 1.0 mm

Application: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better than 30%.




13.0 SAM PHANTOM V4.0C

The SAM phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (+/-0.2 mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections (see Appendix G for specifications of the SAM phantom V4.0C).



14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.

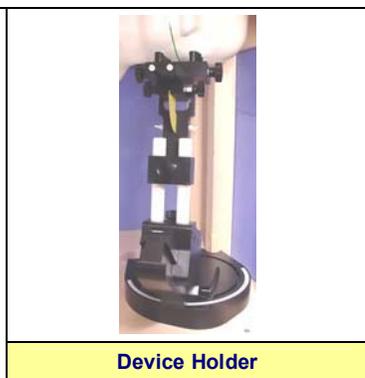

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	
Test Lab Certificate No. 2470.01				

15.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE DATE
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	28Apr09	28Apr10
x	-EX3DV4 E-Field Probe	00213	3600	28Apr09	28Apr10
x	-D1900V2 Validation Dipole	00218	5d107	21Apr09	21Apr10
x	-SAM Phantom V4.0C	00154	1033	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	US39240170	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	23Apr08	21Jul09
x	Gigatronics 80701A Power Sensor	00014	1833699	23Apr08	21Jul09
x	HP 8753ET Network Analyzer	00134	US39170292	28Apr08	28Apr10
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	CNR	CNR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

	Date(s) of Evaluation May 14, 2009	Test Report Serial No. 041509AMW-T962-S15D	Test Report Revision No. Rev. 1.2 (3rd Release)	
	Test Report Issue Date June 11, 2009	Description of Test(s) Specific Absorption Rate	RF Exposure Category General Population	

16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION									
Uncertainty Component	IEEE 1528 Section	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value ±% (1g)	Uncertainty Value ±% (10g)	V _i or V _{eff}
Measurement System									
Probe Calibration (1950 MHz)	E.2.1	5.5	Normal	1	1	1	5.5	5.5	∞
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect	E.2.3	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measured)	E.3.3	5	Normal	1	0.64	0.43	3.2	2.2	∞
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measured)	E.3.3	4.9	Normal	1	0.6	0.49	2.9	2.4	∞
Combined Standard Uncertainty			RSS				11.23	10.71	
Expanded Uncertainty (95% Confidence Interval)			k=2				22.45	21.42	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 and IEC International Standard 62209-1:2005									

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041		
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz			
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 14 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

17.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [7] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01 v03r03: January 2009.
- [8] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 15 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX A - SAR MEASUREMENT DATA

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 16 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Test Date: 05/14/2009

Head SAR - Left Ear - Cheek-Touch Position - Mid Channel - 1924.99 MHz

DUT: Uniden Model: DECT4086; Type: 1.9GHz UPCS/LE-PCS DECT 6.0 Handset; Serial: FCC#1 (Pre-production)

Ambient Temp: 25.3°C; Fluid Temp: 23.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: TDMA/TDD 1900

Frequency: 1924.99 MHz; Duty Cycle: 1:25

Medium: HSL1900 Medium parameters used: $f = 1924.99 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.62, 6.62, 6.62); Calibrated: 28/04/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Left Ear - Cheek-Touch Position - Mid Channel

Area Scan (9x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Maximum value of SAR (measured) = 0.032 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.88 V/m; Power Drift = -0.164 dB

Peak SAR (extrapolated) = 0.037 W/kg


SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.015 mW/g

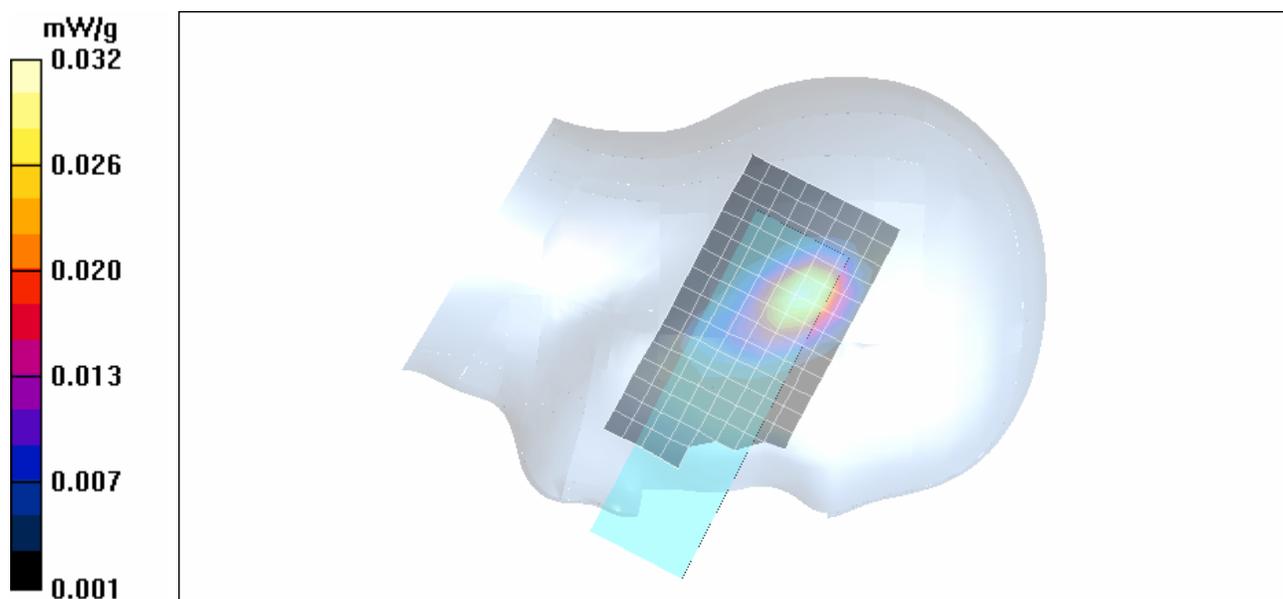

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 17 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Z-Axis Scan

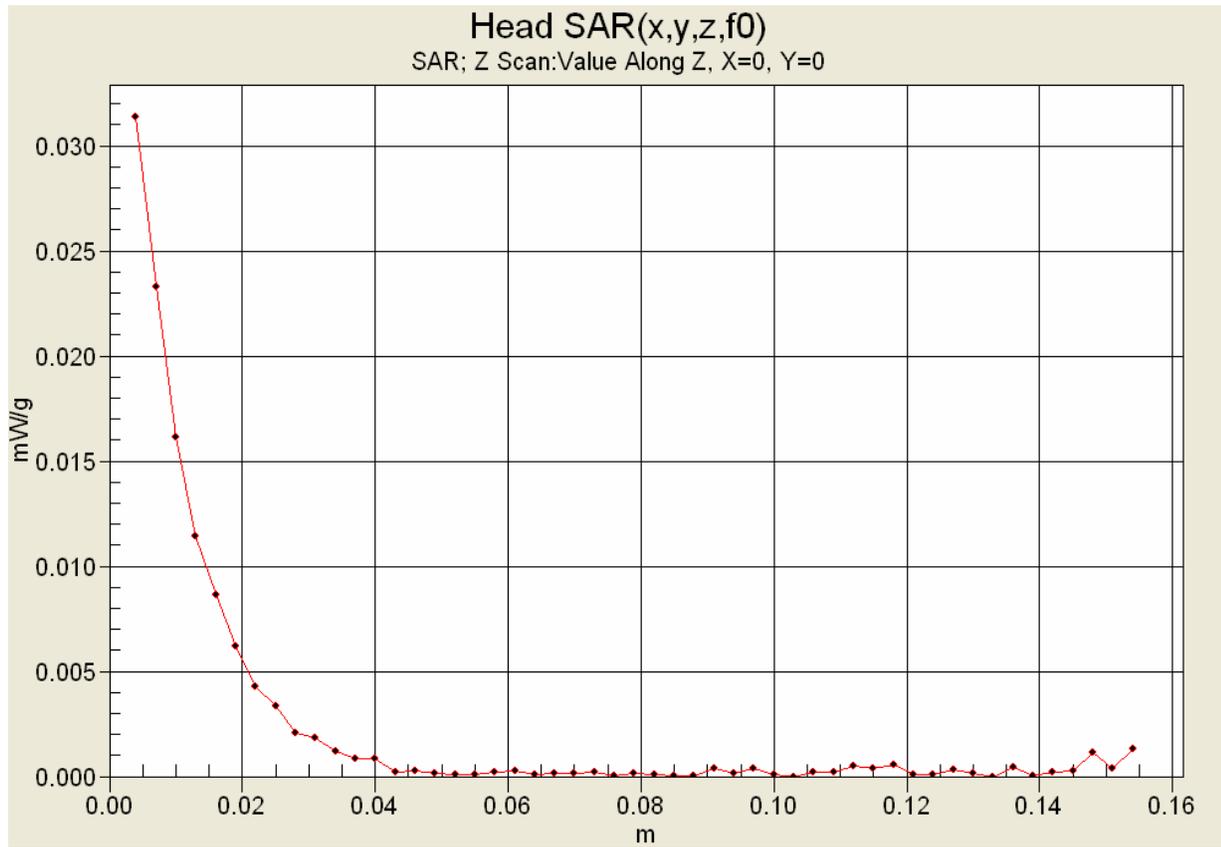

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Test Date: 05/14/2009

Head SAR - Left Ear - Tilt Position (15°) - Mid Channel - 1924.99 MHz

DUT: Uniden Model: DECT4086; Type: 1.9GHz UPCS/LE-PCS DECT 6.0 Handset; Serial: FCC#1 (Pre-production)

Ambient Temp: 25.3°C; Fluid Temp: 23.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: TDMA/TDD 1900

Frequency: 1924.99 MHz; Duty Cycle: 1:25

Medium: HSL1900 Medium parameters used: $f = 1924.99 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.62, 6.62, 6.62); Calibrated: 28/04/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Left Ear - Tilt Position (15°) - Mid Channel

Area Scan (9x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Maximum value of SAR (measured) = 0.017 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.63 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.026 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00883 mW/g

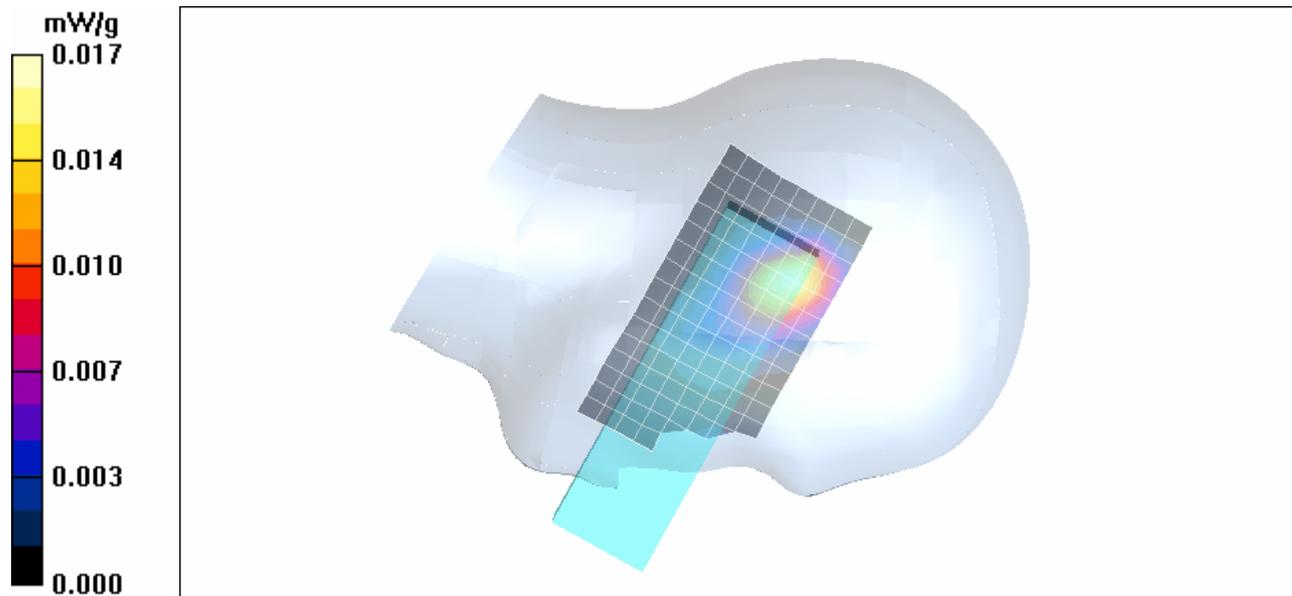

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Test Date: 05/14/2009

Head SAR - Right Ear - Cheek-Touch Position - Mid Channel - 1924.99 MHz

DUT: Uniden Model: DECT4086; Type: 1.9GHz UPCS/LE-PCS DECT 6.0 Handset; Serial: FCC#1 (Pre-production)

Ambient Temp: 25.3°C; Fluid Temp: 23.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: TDMA/TDD 1900

Frequency: 1924.99 MHz; Duty Cycle: 1:25

Medium: HSL1900 Medium parameters used: $f = 1924.99 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.62, 6.62, 6.62); Calibrated: 28/04/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Right Ear - Cheek-Touch Position - Mid Channel

Area Scan (8x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.019 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.73 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.030 W/kg

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.010 mW/g

Maximum value of SAR (measured) = 0.020 mW/g

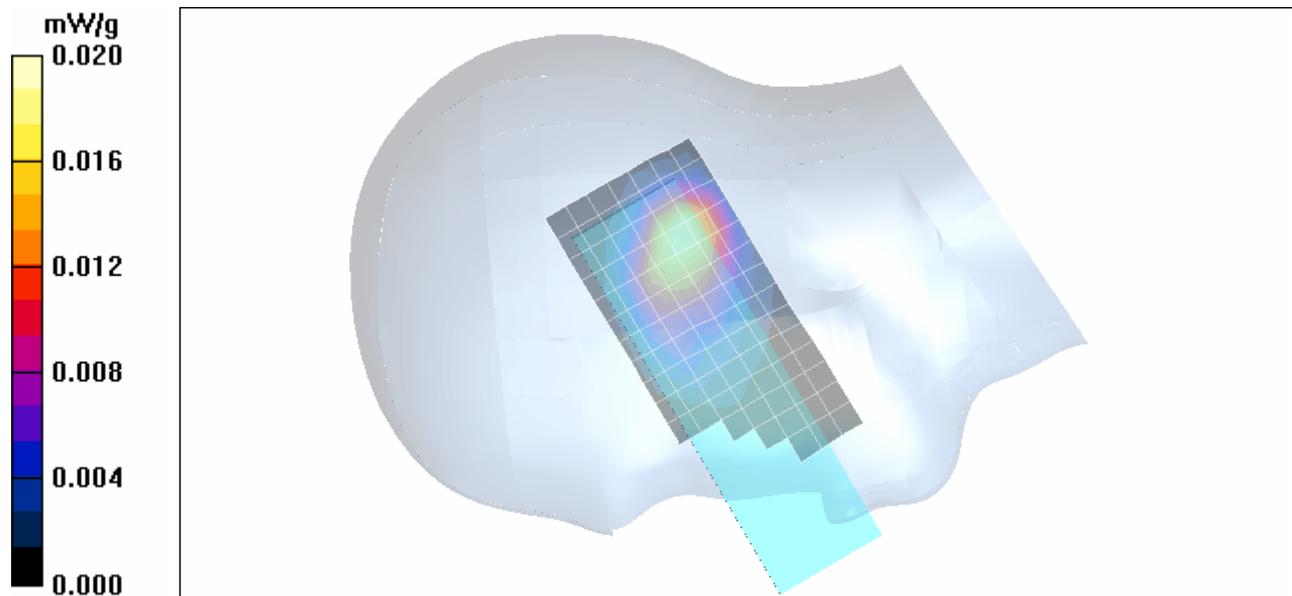

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 20 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Test Date: 05/14/2009

Head SAR - Right Ear - Tilt Position (15°) - Mid Channel - 1924.99 MHz

DUT: Uniden Model: DECT4086; Type: 1.9GHz UPCS/LE-PCS DECT 6.0 Handset; Serial: FCC#1 (Pre-production)

Ambient Temp: 25.3°C; Fluid Temp: 23.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: TDMA/TDD 1900

Frequency: 1924.99 MHz; Duty Cycle: 1:25

Medium: HSL1900 Medium parameters used: $f = 1924.99 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.62, 6.62, 6.62); Calibrated: 28/04/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Head SAR - Right Ear - Tilt Position (15°) - Mid Channel

Area Scan (8x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Maximum value of SAR (measured) = 0.012 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.97 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.017 W/kg

SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00644 mW/g

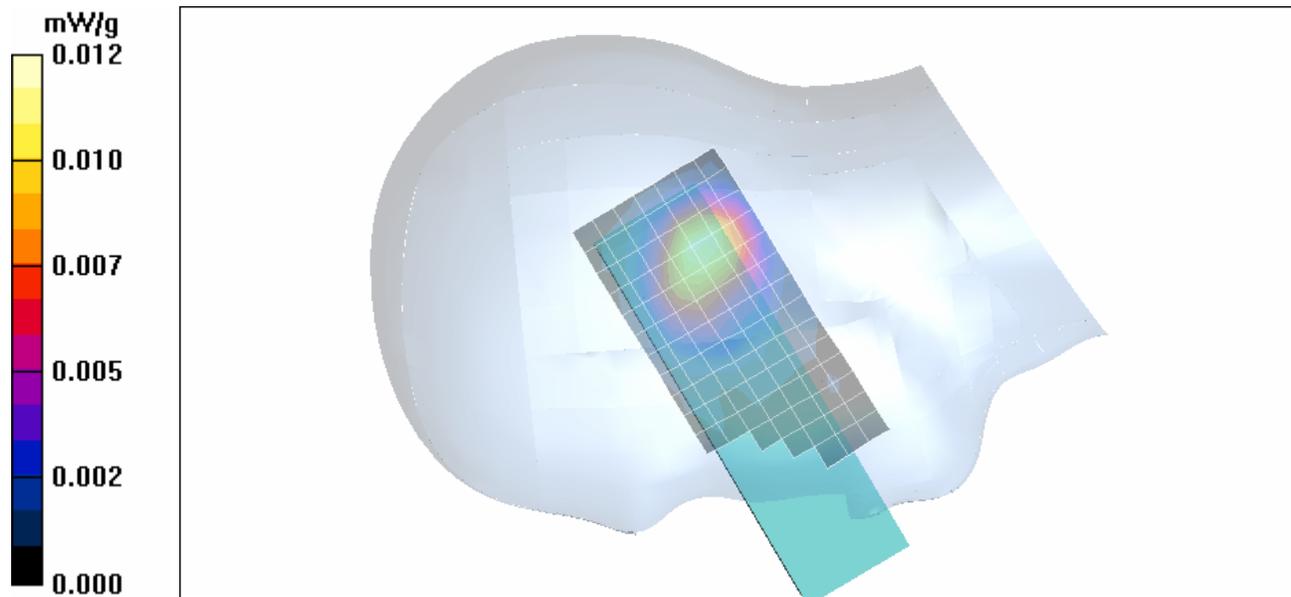


Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Fluid Depth (>15cm)



Left Head Section

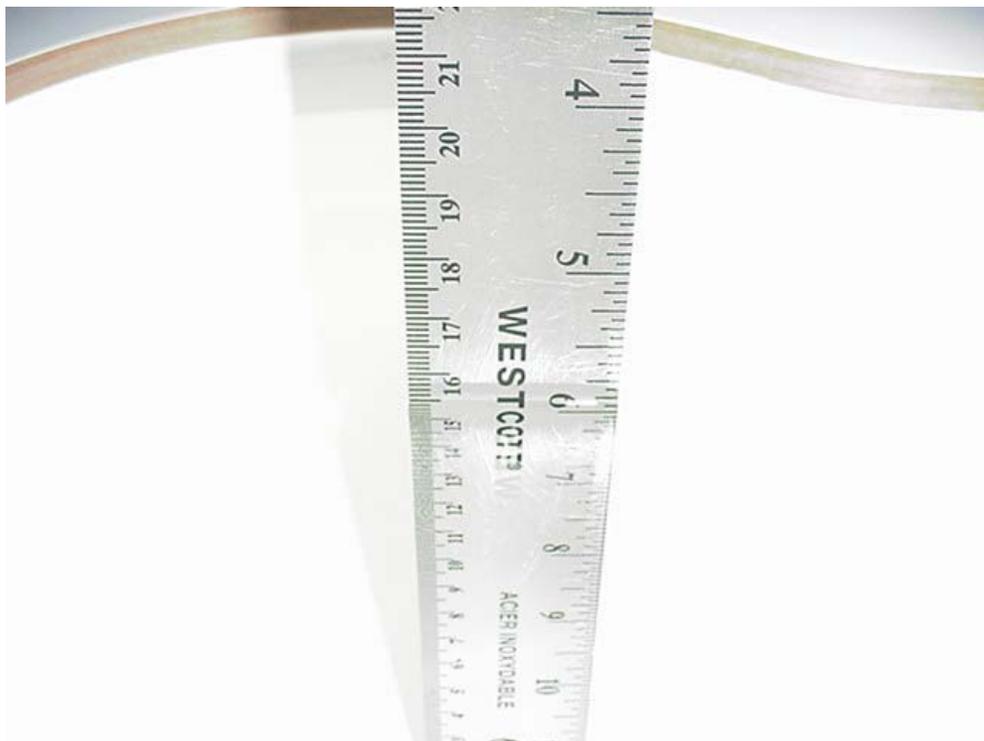

Right Head Section

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 22 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date Tested: 05/14/2009

Body-worn SAR - Back Side of DUT with Plastic Belt-Clip & Headset - Mid Ch. - 1924.992 MHz

DUT: Uniden Model: DECT4086; Type: 1.9GHz UPCS/LE-PCS DECT 6.0 Handset; Serial: FCC#1 (Pre-production)

Ambient Temp: 25.0°C; Fluid Temp: 23.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: TDMA/TDD 1900

Frequency: 1924.99 MHz; Duty Cycle: 1:25

Medium: M1900 Medium parameters used: $f = 1924.99 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 50.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.64, 6.64, 6.64); Calibrated: 28/04/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 7 mm Belt-Clip Spacing from Back Side of DUT to Planar Section of SAM Phantom

Area Scan (8x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$


Maximum value of SAR (measured) = 0.016 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.40 V/m; Power Drift = 0.091 dB

Peak SAR (extrapolated) = 0.025 W/kg


SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00828 mW/g

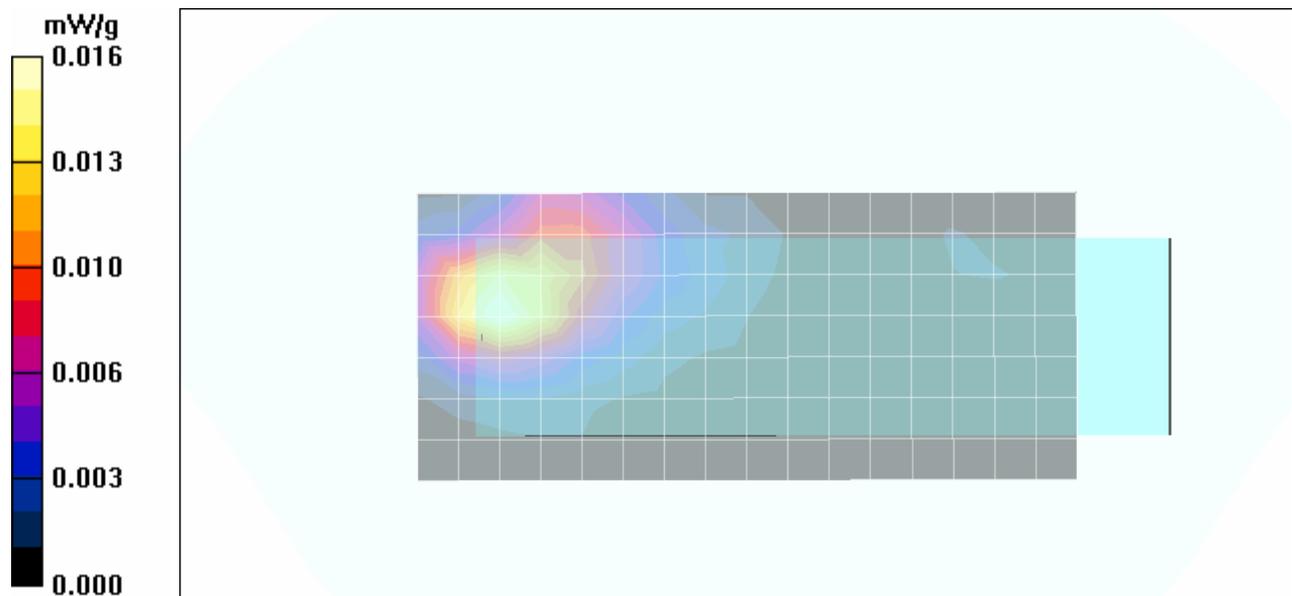

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 23 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Z-Axis Scan

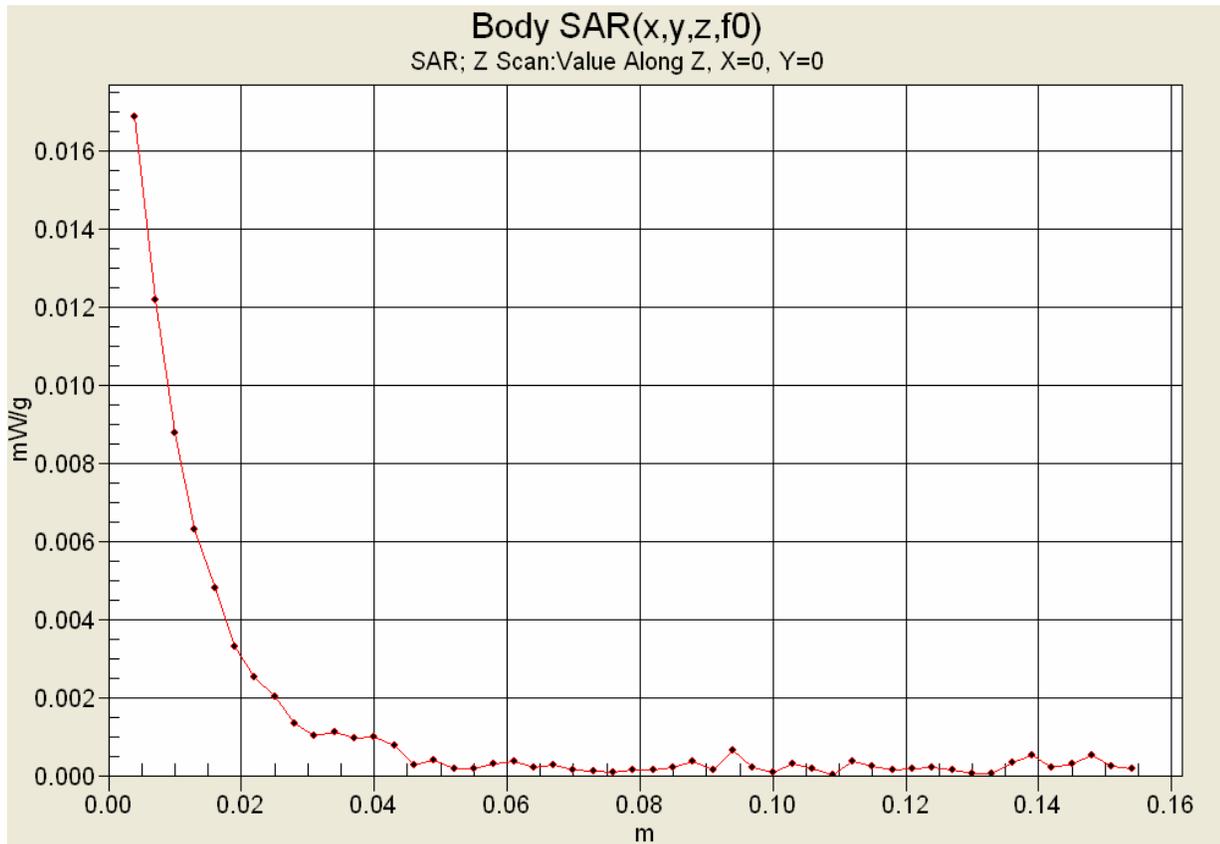

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Fluid Depth (>15cm)



Planar Section

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 25 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 26 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date/Time: 05/14/2009

System Performance Check - 1900 MHz Validation Dipole - HSL

DUT: Dipole 1900 MHz; Type: D1900V2 SA AAD 190 CB; Serial: 5d107; Calibrated: 21/04/2009

Ambient Temp: 25.3°C; Fluid Temp: 23.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

- Probe: EX3DV4 - SN3600; ConvF(6.62, 6.62, 6.62); Calibrated: 28/04/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

1900 MHz System Performance Check

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 13.0 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.0 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 20.6 W/kg


SAR(1 g) = 10.7 mW/g; SAR(10 g) = 5.5 mW/g

Maximum value of SAR (measured) = 13.7 mW/g

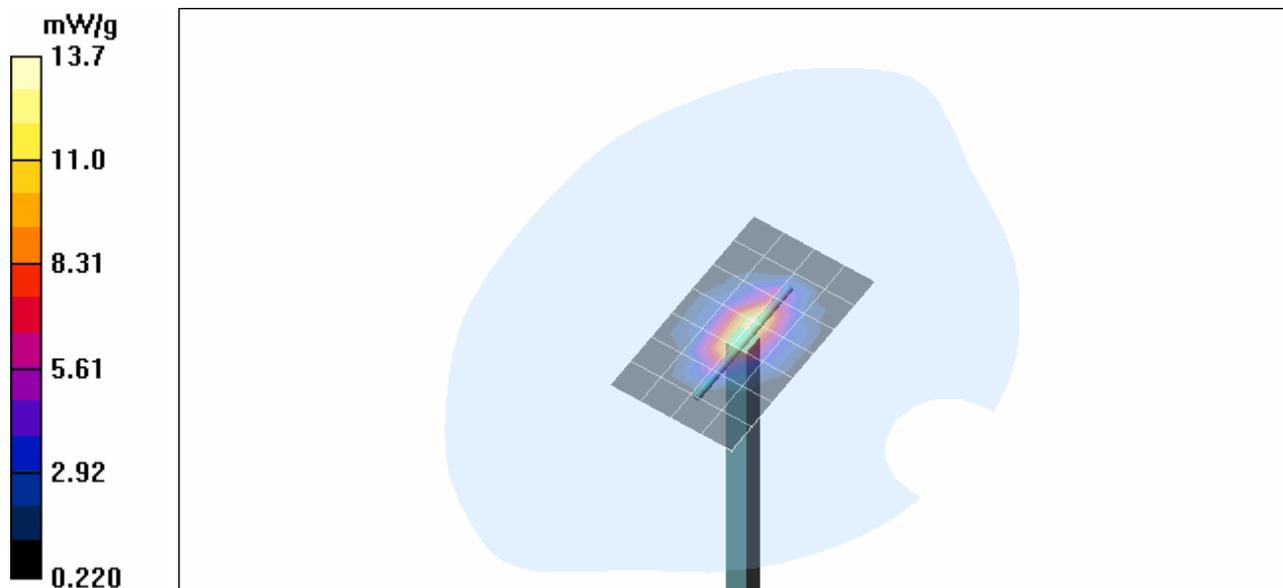

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 27 of 44

Z-Axis Scan

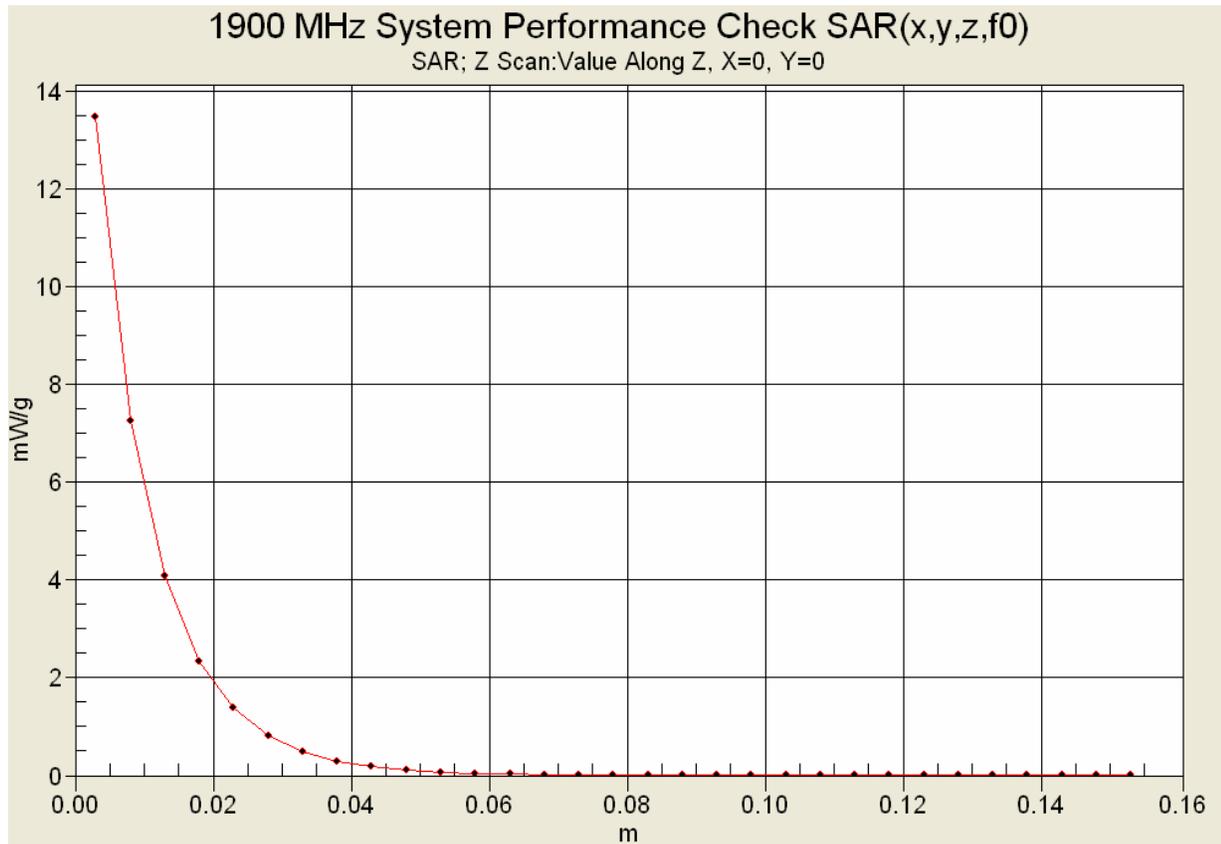

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

Date/Time: 05/14/2009

System Performance Check - 1900 MHz Validation Dipole - MSL

DUT: Dipole 1900 MHz; Type: D1900V2 SA AAD 190 CB; Serial: 5d107; Calibrated: 21/04/2009

Ambient Temp: 25.0°C; Fluid Temp: 23.4°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: M1900 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 50.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: EX3DV4 - SN3600; ConvF(6.64, 6.64, 6.64); Calibrated: 28/04/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

1900 MHz System Performance Check

Area Scan (5x8x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 13.0 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 98.0 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 20.6 W/kg


SAR(1 g) = 10.7 mW/g; SAR(10 g) = 5.5 mW/g

Maximum value of SAR (measured) = 13.7 mW/g

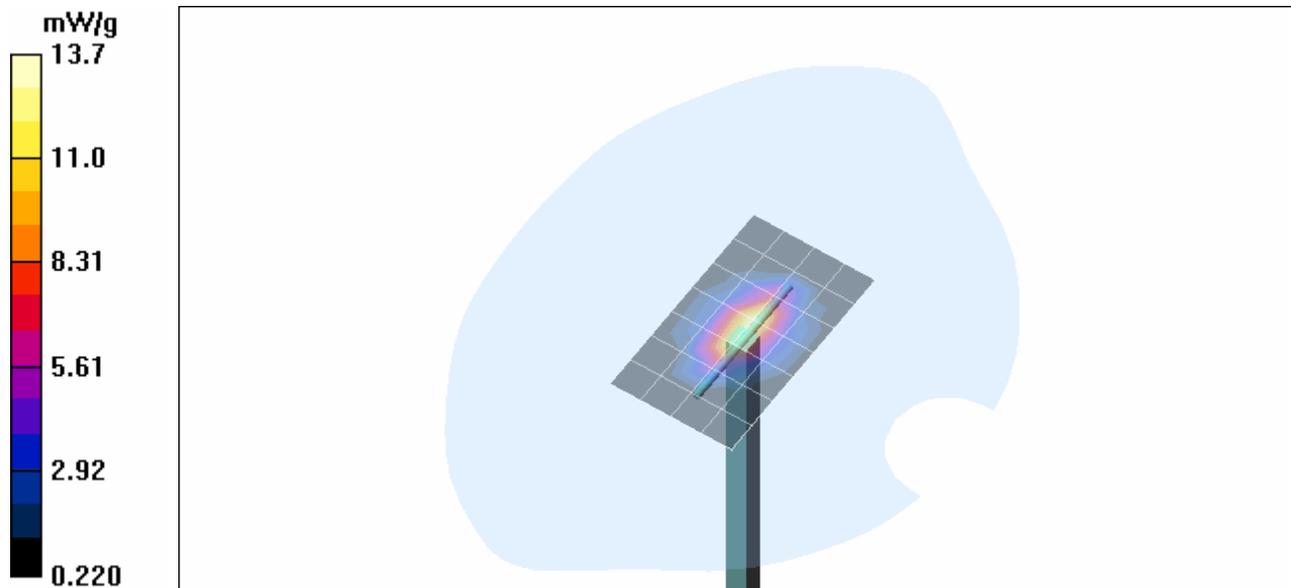

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 29 of 44

Z-Axis Scan

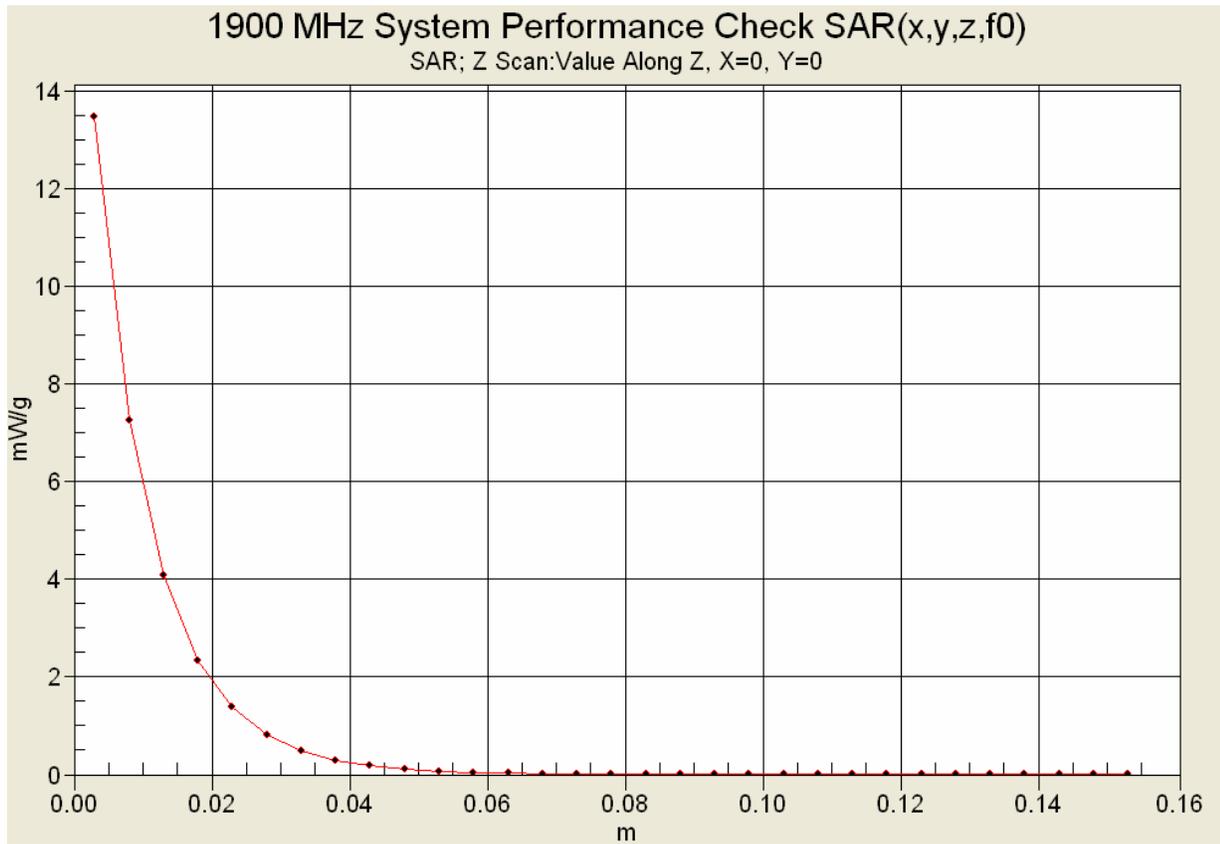

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 31 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

1900 MHz System Performance Check & 1925 MHz DUT Evaluation (Head)

Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 14/May/2009
 Frequency (GHz)
 FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s
1.8000	40.00	1.40	40.92
1.8100	40.00	1.40	40.96
1.8200	40.00	1.40	41.01
1.8300	40.00	1.40	40.89
1.8400	40.00	1.40	40.85
1.8500	40.00	1.40	40.71
1.8600	40.00	1.40	40.66
1.8700	40.00	1.40	40.59
1.8800	40.00	1.40	40.66
1.8900	40.00	1.40	40.46
1.9000	40.00	1.40	40.58
1.9100	40.00	1.40	40.46
1.9200	40.00	1.40	40.48
1.9300	40.00	1.40	40.44
1.9400	40.00	1.40	40.39
1.9500	40.00	1.40	40.27
1.9600	40.00	1.40	40.42
1.9700	40.00	1.40	40.21
1.9800	40.00	1.40	40.29
1.9900	40.00	1.40	40.32
2.0000	40.00	1.40	40.18

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 32 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

1900 MHz System Performance Check & 1925 MHz DUT Evaluation (Body)

Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 14/May/2009
 Frequency (GHz)
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8000	53.30	1.52	51.17	1.43
1.8100	53.30	1.52	51.24	1.44
1.8200	53.30	1.52	51.25	1.46
1.8300	53.30	1.52	51.28	1.48
1.8400	53.30	1.52	51.08	1.47
1.8500	53.30	1.52	51.07	1.48
1.8600	53.30	1.52	50.98	1.46
1.8700	53.30	1.52	50.98	1.50
1.8800	53.30	1.52	50.86	1.50
1.8900	53.30	1.52	50.80	1.54
1.9000	53.30	1.52	50.74	1.55
1.9100	53.30	1.52	50.78	1.55
1.9200	53.30	1.52	50.68	1.57
1.9300	53.30	1.52	50.75	1.59
1.9400	53.30	1.52	50.55	1.60
1.9500	53.30	1.52	50.81	1.59
1.9600	53.30	1.52	50.76	1.62
1.9700	53.30	1.52	50.58	1.60
1.9800	53.30	1.52	50.72	1.62
1.9900	53.30	1.52	50.54	1.66
2.0000	53.30	1.52	50.37	1.67

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 44


	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 34 of 44


	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

HEAD SAR TEST SETUP PHOTOGRAPHS
Right Head Section / Cheek-Touch Position

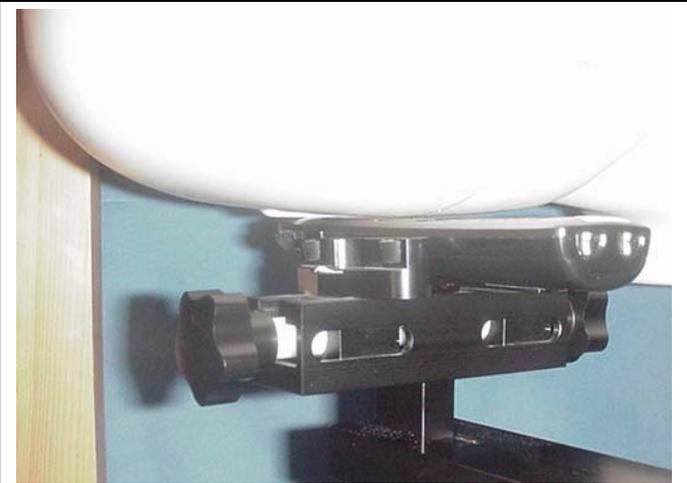

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 35 of 44

HEAD SAR TEST SETUP PHOTOGRAPHS
Right Head Section / Ear-Tilt Position (15°)

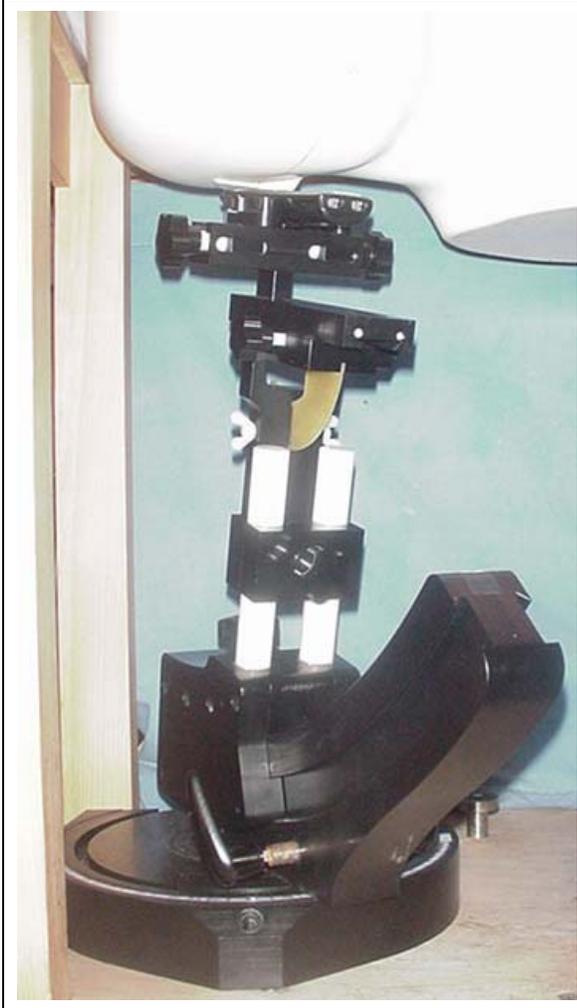

HEAD SAR TEST SETUP PHOTOGRAPHS
Left Head Section / Cheek-Touch Position



	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

HEAD SAR TEST SETUP PHOTOGRAPHS
Left Head Section / Ear-Tilt Position (15°)



Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 38 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
7 mm Belt-Clip Spacing from Back of DUT to Planar Phantom
DUT with Headset-Microphone Audio Accessory



Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 39 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

DUT PHOTOGRAPHS



Front Side of DUT	Back Side of DUT	Back of DUT with Belt-Clip	DUT with Headset-Microphone Audio Accessory
-------------------	------------------	----------------------------	---



Top end of DUT with Belt-Clip	Bottom end of DUT with Belt-Clip	Left and Right Sides of DUT with Plastic Belt-Clip Accessory
-------------------------------	----------------------------------	--

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 40 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

DUT PHOTOGRAPHS

		
DUT Battery Compartment	DUT with Battery installed	
		
Ni-MH Battery Model: BT-1018		
		Plastic Belt-Clip Accessory

Company: Uniden America Corporation	FCC ID: AMWUN042R	IC: 513C-UN041	
Model(s): DECT4086	DUT: Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz	
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 41 of 44

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX E - DIPOLE CALIBRATION

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 42 of 44



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **D1900V2-5d107-Apr09**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d107**

Calibration procedure(s) **QA CAL-05.v7
Calibration procedure for dipole validation kits**

Calibration date: **April 21, 2009**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV2	SN: 3025	28-Apr-08 (No. ES3-3025_Apr08)	Apr-09
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by: **Claudio Leubler** **Laboratory Technician** *[Signature]*

Approved by: **Katja Pokovic** **Technical Manager** *[Signature]*

Issued: April 24, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	38.6 \pm 6 %	1.47 mho/m \pm 6 %
Head TSL temperature during test	(22.0 \pm 0.2) °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	10.6 mW / g
SAR normalized	normalized to 1W	42.4 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	40.9 mW / g \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.45 mW / g
SAR normalized	normalized to 1W	21.8 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	21.4 mW / g \pm 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.9 ± 6 %	1.56 mho/m ± 6 %
Body TSL temperature during test	(21.3 ± 0.2) °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.6 mW / g
SAR normalized	normalized to 1W	42.4 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	42.1 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.62 mW / g
SAR normalized	normalized to 1W	22.5 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	22.4 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.0 Ω + 5.5 j Ω
Return Loss	- 25.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.9 Ω + 6.3 j Ω
Return Loss	- 22.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.200 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 28, 2008

DASY5 Validation Report for Head TSL

Date/Time: 15.04.2009 15:01:47

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d107

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(4.9, 4.9, 4.9); Calibrated: 28.04.2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Pin = 250 mW; dip = 10 mm, scan at 3.0 mm/Zoom Scan (dist=3.0 mm, probe 0deg)


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.7 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 20 W/kg

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.45 mW/g

Maximum value of SAR (measured) = 13.2 mW/g

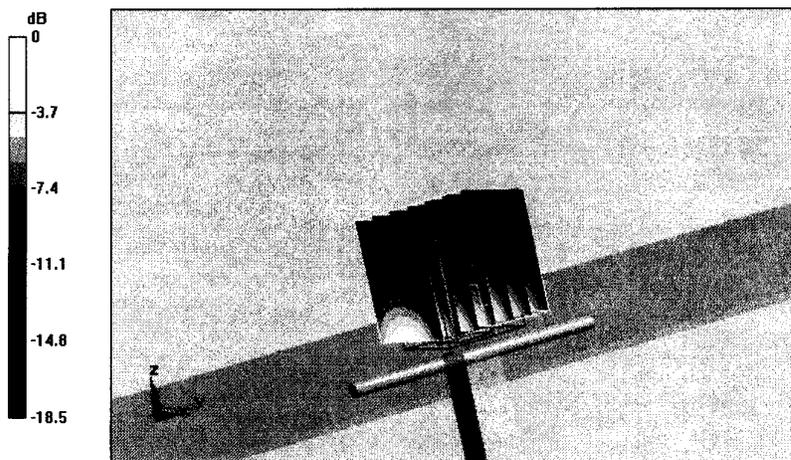


0 dB = 13.2mW/g

Impedance Measurement Plot for Head TSL

15 Apr 2009 15:06:04

CH1 S11 1 U FS 2: 50.000 Ω 5.4746 Ω 458.58 μ H 1 900.000 000 MHz

*
Del
Cor

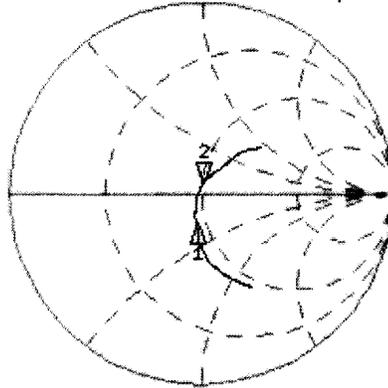

CH1 Markers
1: 45.176 Ω
-14.889 Ω
1.80000 GHz

Avg
16


↑

CH2 S11 LOG 5 dB/ REF -20 dB 2: -25.242 dB 1 900.000 000 MHz

Cor

Avg
16

↑

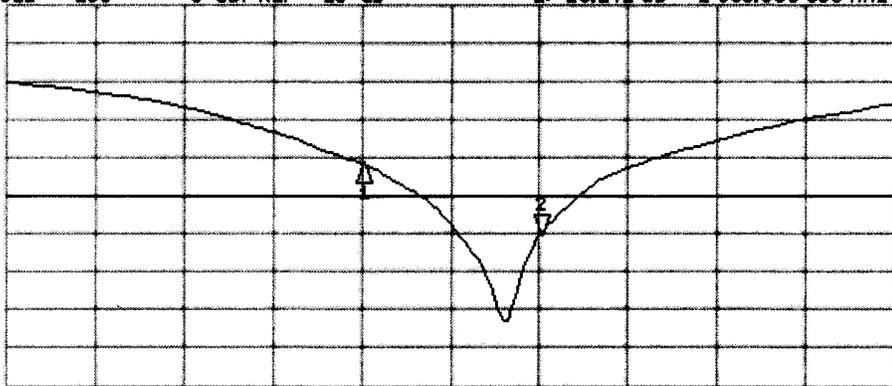

CH2 Markers
1: -15.784 dB
1.80000 GHz

START 1 600.000 000 MHz

STOP 2 100.000 000 MHz

DASY5 Validation Report for Body TSL

Date/Time: 21.04.2009 15:29:55

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d107

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(4.5, 4.5, 4.5); Calibrated: 28.04.2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Pin = 250 mW; dip = 10 mm, scan at 3.0mm/Zoom Scan (dist=3.4mm, probe 0deg)


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.6 V/m; Power Drift = -0.00425 dB

Peak SAR (extrapolated) = 18.7 W/kg

SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.62 mW/g

Maximum value of SAR (measured) = 13.5 mW/g

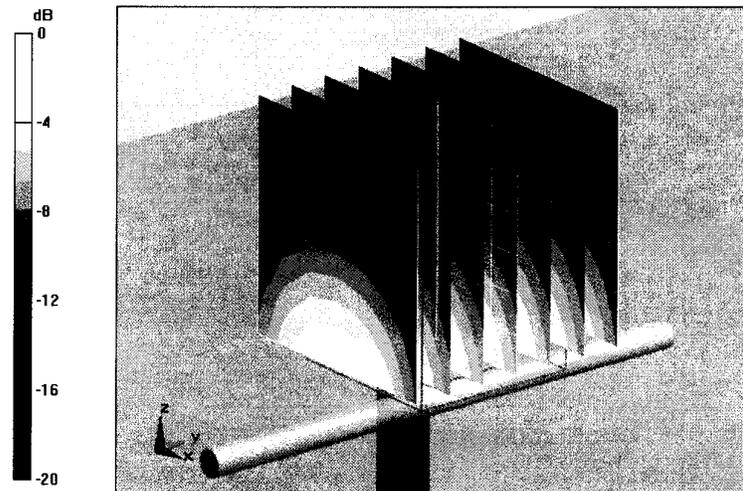


0 dB = 13.5mW/g

Impedance Measurement Plot for Body TSL

21 Apr 2009 11:38:33

CH1 S11 1 U FS 1: 45.930 Ω 6.3203 μ 529.43 pH 1 900.000 000 MHz

*
Del
CA

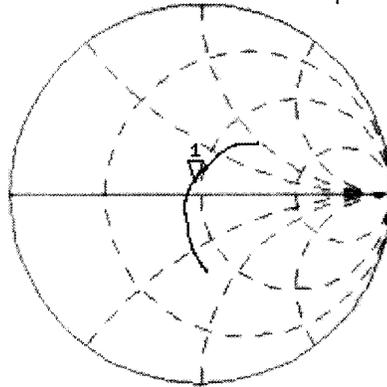

Avg
16


↑

CH2 S11 LOG 5 dB/REF -20 dB 1: -22.137 dB 1 900.000 000 MHz

CA

Avg
16

↑

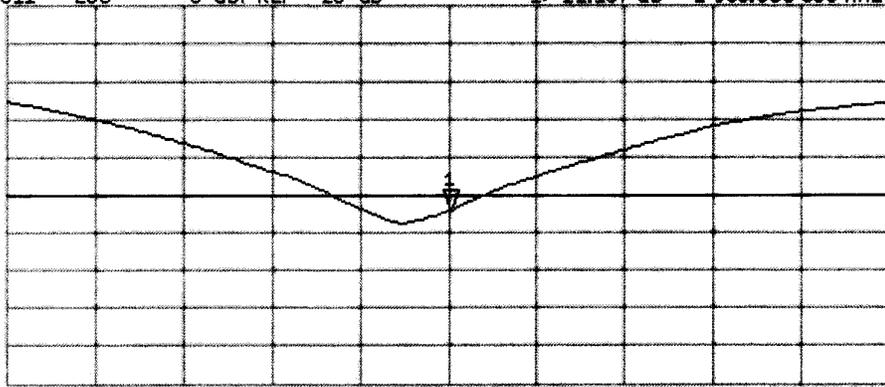

CENTER 1 900.000 000 MHz

SPAN 400.000 000 MHz

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX F - PROBE CALIBRATION

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 43 of 44



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **EX3-3600_Apr09**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3600**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-14.v3 and QA CAL-23.v3
 Calibration procedure for dosimetric E-field probes**

Calibration date: **April 28, 2009**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10
Reference Probe ES3DV2	SN: 3013	2-Jan-09 (No. ES3-3013_Jan09)	Jan-10
DAE4	SN: 660	9-Sep-08 (No. DAE4-660_Sep08)	Sep-09

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: April 28, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe EX3DV4

SN:3600

Manufactured:	January 10, 2007
Last calibrated:	April 19, 2008
Recalibrated:	April 28, 2009

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: EX3DV4 SN:3600

Sensitivity in Free Space^A

NormX	0.51 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	0.51 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	0.40 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression^B

DCP X	90 mV
DCP Y	89 mV
DCP Z	90 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL **1810 MHz** **Typical SAR gradient: 10 % per mm**

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{be} [%]	Without Correction Algorithm	7.6	3.9
SAR _{be} [%]	With Correction Algorithm	0.6	0.3

TSL **5200 MHz** **Typical SAR gradient: 25 % per mm**

Sensor Center to Phantom Surface Distance		2.0 mm	3.0 mm
SAR _{be} [%]	Without Correction Algorithm	19.9	10.2
SAR _{be} [%]	With Correction Algorithm	0.5	0.3

Sensor Offset

Probe Tip to Sensor Center **1.0 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

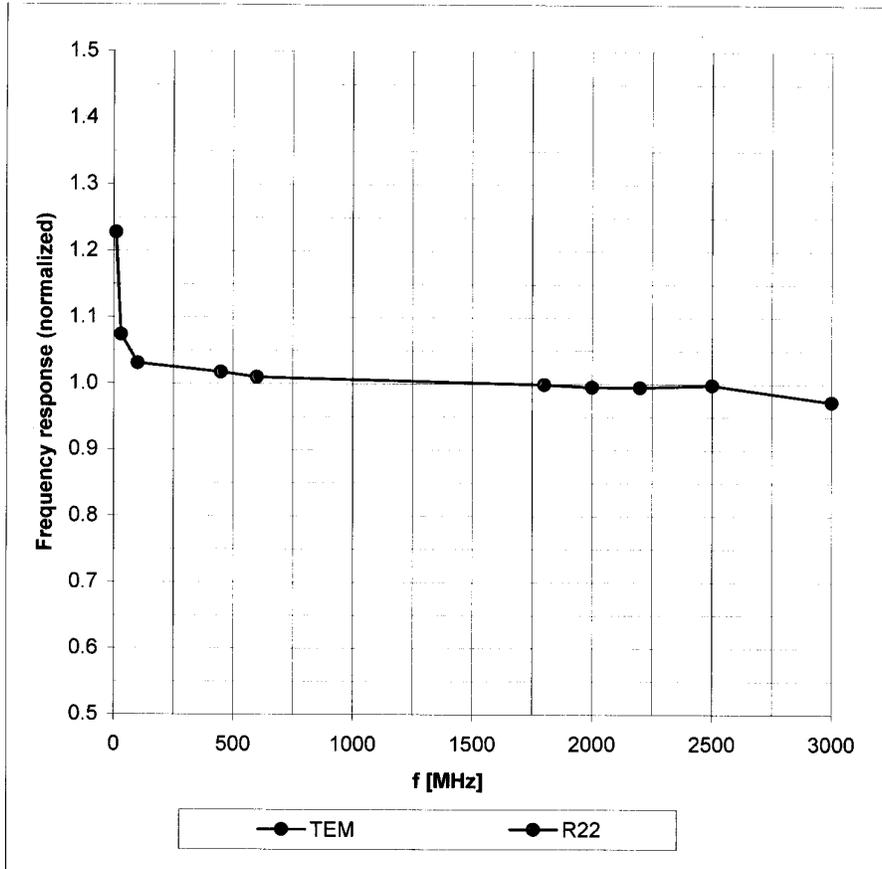



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

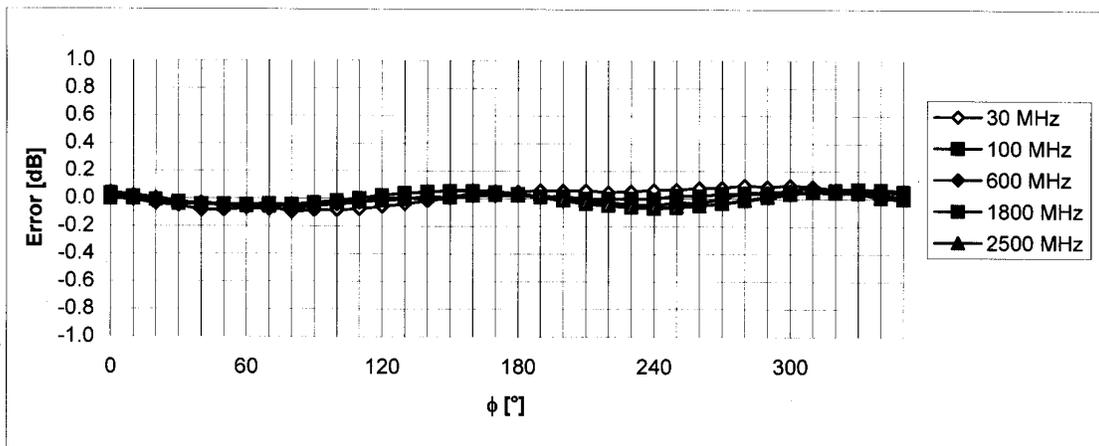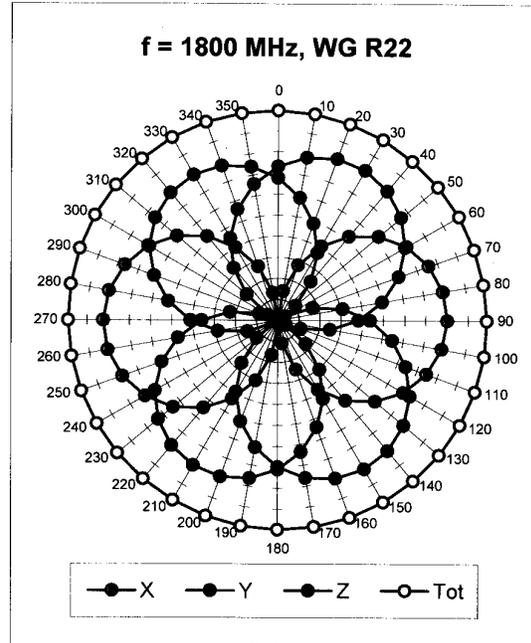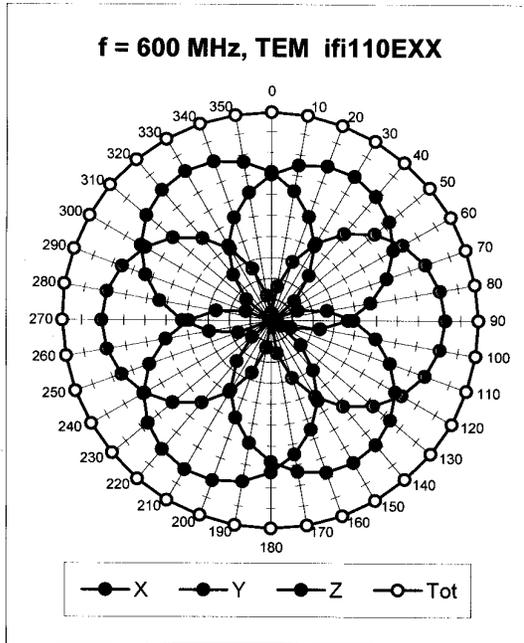


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

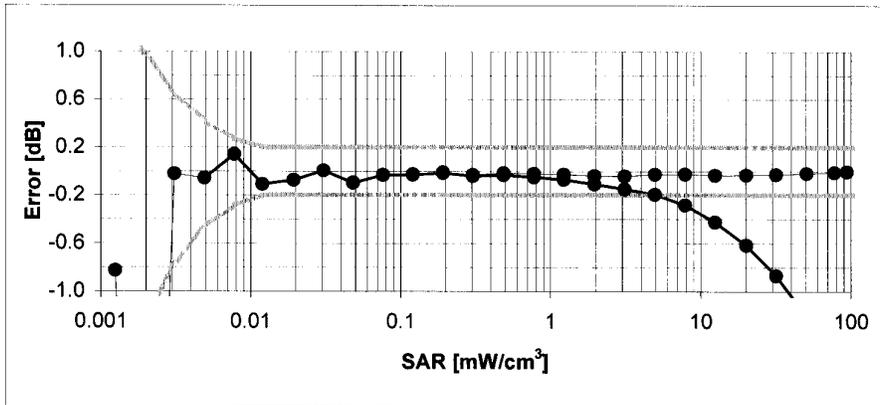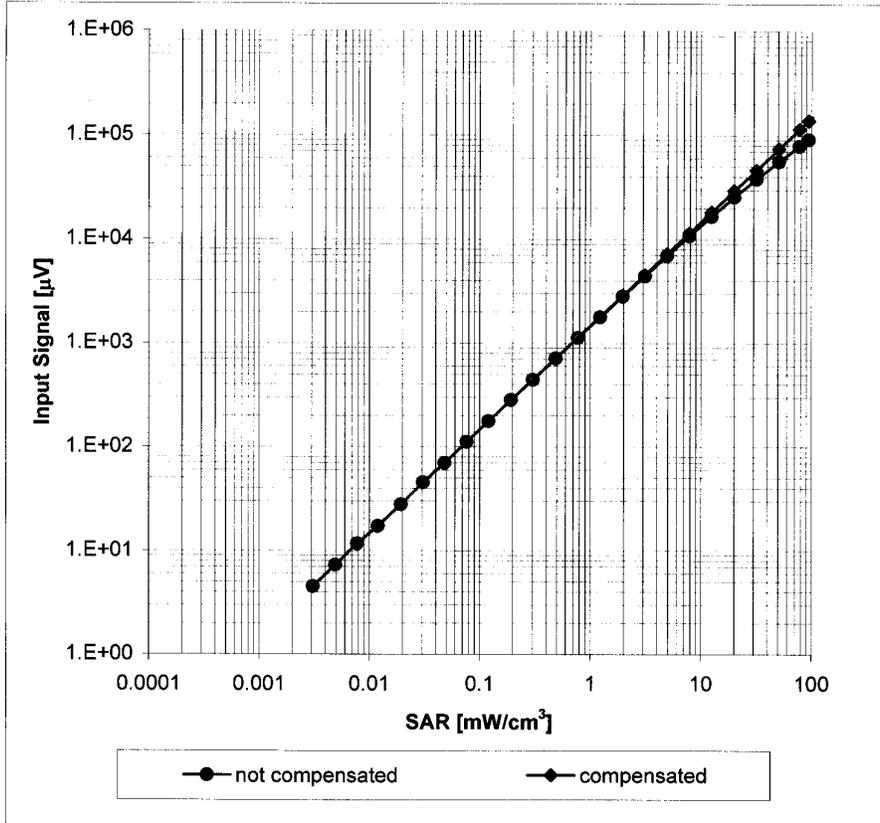

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

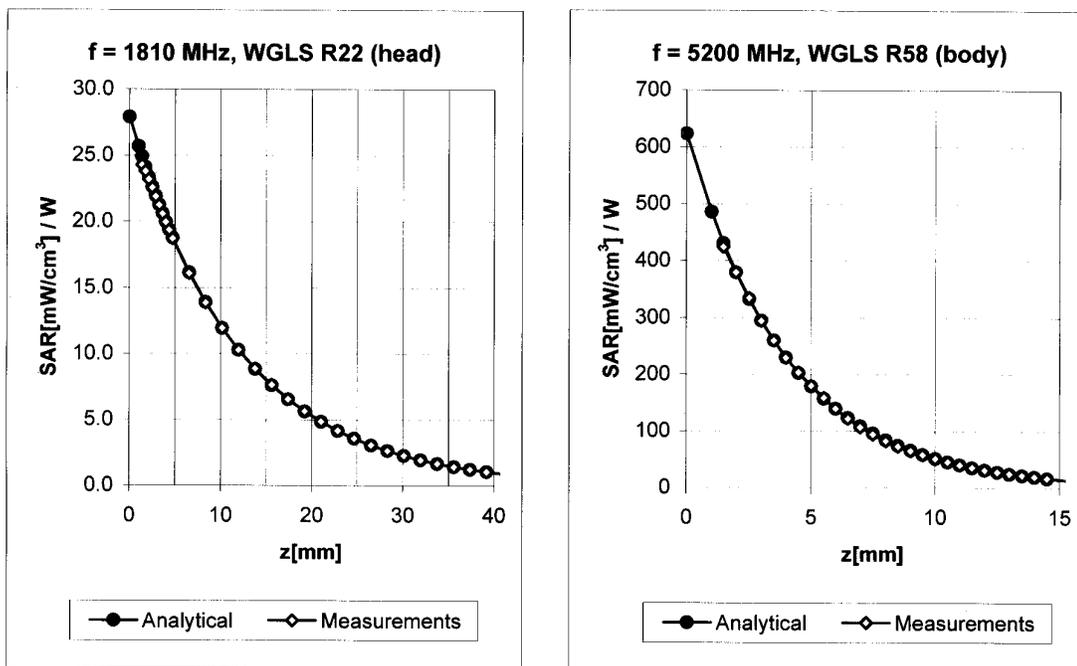


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.70	0.61	6.77 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.66	0.62	6.62 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.50	0.90	6.30 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.66	0.71	6.68 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.39	0.92	6.64 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.30	1.06	6.25 ± 11.0% (k=2)
5200	± 50 / ± 100	Body	49.0 ± 5%	5.30 ± 5%	0.50	1.80	3.93 ± 13.1% (k=2)
5500	± 50 / ± 100	Body	48.6 ± 5%	5.65 ± 5%	0.55	1.80	3.70 ± 13.1% (k=2)
5800	± 50 / ± 100	Body	48.2 ± 5%	6.00 ± 5%	0.60	1.80	3.65 ± 13.1% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

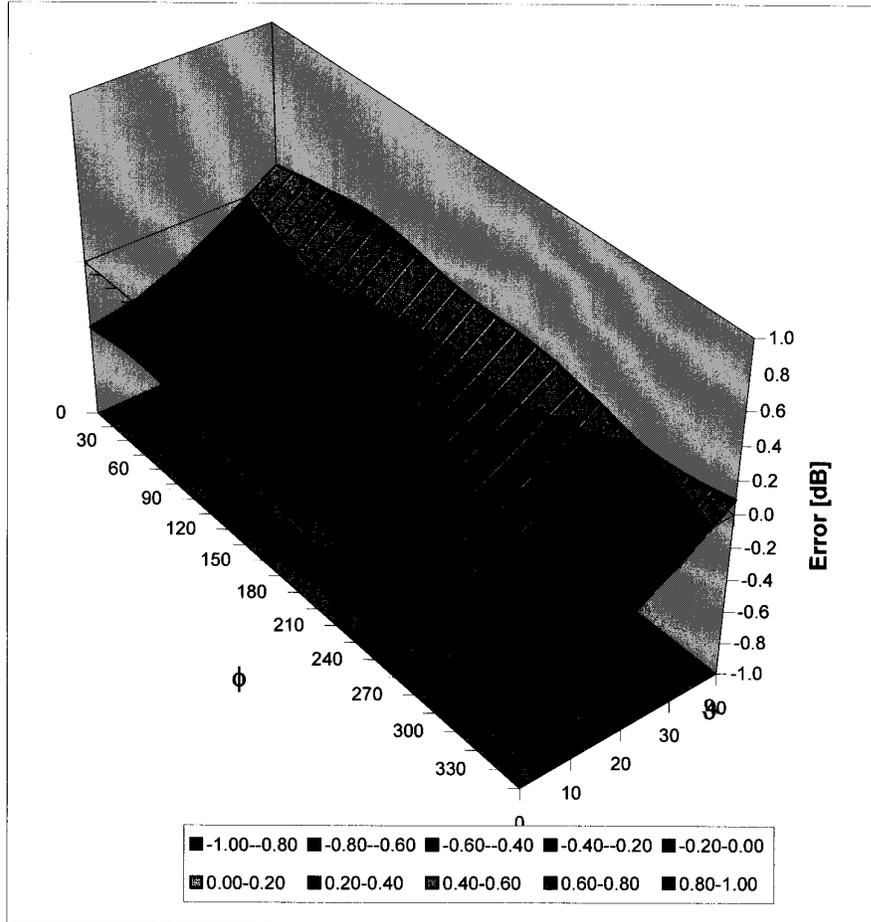

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

	<u>Date(s) of Evaluation</u> May 14, 2009	<u>Test Report Serial No.</u> 041509AMW-T962-S15D	<u>Test Report Revision No.</u> Rev. 1.2 (3rd Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 11, 2009	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> General Population	

APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY

Company:	Uniden America Corporation	FCC ID:	AMWUN042R	IC:	513C-UN041	
Model(s):	DECT4086	DUT:	Portable UPCS/LE-PCS DECT 6.0 Handset	1921.536 - 1928.448 MHz		
2009 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 44 of 44

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 BA
Series No	TP-1002 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9

(*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 18.11.2001

Signature / Stamp

**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79