



849 NW State Road 45
Newberry, FL 32669 USA
Ph: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PART 15.249 TEST REPORT

Applicant	UNIDEN AMERICA CORPORATION	
Address	4700 AMON CARTER BLVD.	
	FORT WORTH TEXAS 76155 USA	
FCC ID	AMWUN110	
Model Number	DECT3181	
Product Description	BLUETOOTH INSIDE OF A DECT PHONE	
Date Sample Received	11/24/2009	
Date Tested	12/15/2009	
Tested By	Nam Nguyen	
Approved By	Mario de Aranzeta	
Report Number	2869UT9TestReport_Rev.doc	
Test Results	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Testing Certificate # 0955-01



TABLE OF CONTENT

GENERAL REMARKS.....	3
GENERAL INFORMATION	4
EMC EQUIPMENT LIST	5
TEST PROCEDURES	6
RADIATION INTERFERENCE	7
POWER LINE CONDUCTED INTERFERENCE	10
20dB OCCUPIED BANDWIDTH	13
CARRIER FREQUENCY SEPARATION:	14
NUMBER OF HOPPING FREQUENCIES:	14
TIME OF OCCUPANCY (DWELL TIME):	16
SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	17
RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND	18

APPLICANT: UNIDEN AMERICA CORPORATION
FCC ID: AMWUN110
REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report
 not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: 12/15/2009

APPLICANT: UNIDEN AMERICA CORPORATION
FCC ID: AMWUN110
REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

GENERAL INFORMATION

DUT Specification

Applicable Standard	Part 15.249		
DUT Description	BLUETOOTH INSIDE OF A DECT PHONE		
FCC ID	AMWUN110		
Operating Frequency	TX: (2402.00 – 2480.00) MHz		
Number of channels	79		
DUT Power Source	<input checked="" type="checkbox"/> 110–120Vac/50– 60Hz <input type="checkbox"/> DC Power <input type="checkbox"/> Battery Operated Exclusively		
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
Type of Equipment	<input checked="" type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input type="checkbox"/> Portable
Antenna Connector	N/A		
Antenna	N/A		
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.		
Test Conditions	Temperature: 26°C Relative humidity: 50%		
Test Exercise	The DUT was placed in continuous transmit mode of operation.		

Test Supporting Equipment

Supporting Device	Manufacturer	Model / FCC ID	Serial Number
N/A			

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUN110

REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 5/11/07	5/11/10
AC Voltmeter	HP	400FL	2213A14499	CAL 3/23/09	3/23/10
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 3/30/09	3/30/11
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/3/09	3/3/12
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 4/5/09	4/5/12
Hygro-Thermometer	Extech	445703	0602	CAL 1/30/09	1/30/11
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/9/09	5/9/11
Digital Multimeter	Fluke	FLUKE-77-3	79510405	CAL 5/14/09	5/14/11
System One	Audio Precision	System One	SYS1-45868	CHAR 2/27/08	2/27/10
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/08	4/25/10

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUN110

REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

TEST PROCEDURES

Radiation Interference: ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

$$\begin{array}{llll}
 \text{Freq (MHz)} & \text{Meter Reading} & + \text{ACF} & + \text{CL} = \text{FS} \\
 33 & 20 \text{ dBuV} & + 10.36 \text{ dB} & + 0.5 = 30.86 \text{ dBuV/m @ 3m}
 \end{array}$$

Power Line Conducted Interference: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

Bandwidth 6.0dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW)=1 MHz and the video bandwidth (VBW) =3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Antenna Conducted Emissions: The RBW=100 kHz, VBW=300 kHz and the span set to 10 MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

ANSI C63.4-2003 10.1 Measurement Procedures: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUN110

REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

RADIATION INTERFERENCE

Rules Part No.: 15.249, 15.209

Requirements:

Frequency	Limits
Part 15.209	
9 to 490 kHz	2400/F (kHz) μ V/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) μ V/m @ 30 meters
1705 kHz to 30 MHz	29.54 dB μ V/m @ 30 meters
30 - 88	40.0 dB μ V/m @ 3 meters
80 - 216	43.5 dB μ V/m @ 3 meters
216 - 960	46.0 dB μ V/m @ 3 meters
Above 960	54.0 dB μ V/m @ 3 meters
Part 15.249	
Fundamental 902 - 928 MHz	94.0 dB μ V/m @ 3 meters
Fundamental 2.4 - 2.4835 MHz	94.0 dB μ V/m @ 3 meters
Harmonics	54.0 dB μ V/m @ 3 meters

Any emissions that fall in the restricted bands (15.205) must be less than or equal to 54 dB μ V/m. Spurious emissions not in a restricted band must be 20 dBc. Harmonics were checked through the 10th harmonic.

Test Data: All values are peak unless noted.

Items mark with an * designate a frequency in a restricted band.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Polarity	Coax Loss dB	Correction Factor dB	Field Strength dB μ V/m	Margin dB
2,402.00	41.4	9.3	V	0.46	12.23	21.99	18.01
2,402.00	62.8	9.9	V	0.54	6.56	17	23
2,402.00	83.4	5.4	H	0.61	9.18	15.19	24.81
2,402.00	92.7	9.3	V	0.63	11.32	21.25	22.25
2,402.00	135.1	5.4	H	0.69	14.22	20.31	23.19
2,402.00	158.5	7.2	V	0.73	17.09	25.02	18.48
2,402.00	160.9	10.8	H	0.74	16.36	27.9	15.6
2,402.00	166.5	13.3	H	0.77	16.02	30.09	13.41
2,402.00	217.2	8	V	0.93	11.34	20.27	25.73
2,402.00	242.6	15.1	H	0.99	12.13	28.22	17.78
2,402.00	245.8	12.7	V	0.99	12.25	25.94	20.06
2,402.00	249.2	13.7	V	1	12.45	27.15	18.85
2,402.00	249.4	15.8	H	1	12.47	29.27	16.73

APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUN110

REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

TEST DATA CONTD.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB	Field Strength dBuV/m	Margin dB
2,402.00	254.2	13.7	H	1.01	12.67	27.38	18.62
2,402.00	2,402.00	53.7	H	3.18	32.25	89.13	4.87
2,402.00	2,402.00	57.9	V	3.18	32.25	93.33	0.67
2,402.00	4,804.00	6.9	V	4.9	34.1	45.9	8.1
2,402.00	4,804.00	7	H	4.9	34.1	46	8
2,402.00	7,206.00	6.6	V	5.72	36.04	48.36	5.64
2,402.00	7,206.00	7.8	H	5.72	36.04	49.56	4.44
2,441.00	2,441.00	55.3	H	3.21	32.35	90.86	3.14
2,441.00	2,441.00	56.8	V	3.21	32.35	92.36	1.64
2,441.00	4,882.00	5.8	H	4.94	34.1	44.84	9.16
2,441.00	4,882.00	6.8	V	4.94	34.1	45.84	8.16
2,441.00	7,323.00	6.4	H	5.79	36.06	48.25	5.75
2,441.00	7,323.00	7.2	V	5.79	36.06	49.05	4.95
2,480.00	2,480.00	54.3	H	3.24	32.45	89.99	4.01
2,480.00	2,480.00	57.3	V	3.24	32.45	92.99	1.01
2,480.00	4,960.00	6	V	4.98	34.1	45.08	8.92
2,480.00	4,960.00	6.3	H	4.98	34.1	45.38	8.62
2,480.00	7,440.00	8	H	5.86	36.09	49.95	4.05
2,480.00	7,440.00	8.2	V	5.86	36.09	50.15	3.85


APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUN110

REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

Method of Measuring Radiated Spurious Emissions

Antenna is Calibrated
and appropriate one.
Raised from 1 to 4 M.

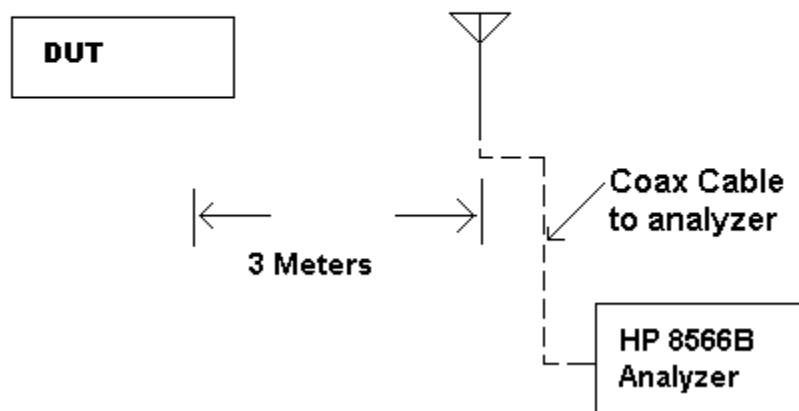

METHOD OF MEASUREMENT: The procedure used was ANSI standard C63.4-2003 & the FCC/OET Guidance on Measurements for Spread Spectrum Systems – Public Notice DA 00-705 dated March 30th, 2000.

APPLICANT: UNIDEN AMERICA CORPORATION
FCC ID: AMWUN110
REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Part 15.207

Requirements:


Frequency (MHz)	Quasi Peak Limits (dBuV)	Average Limits (dBuV)
0.15 – 0.5	66 – 56 *	56 – 46 *
0.5 – 5.0	56	46
5.0 – 30	60	50

* Decrease with logarithm of frequency

Test Data: The following plots represent the emissions read for power line conducted. Both lines were observed.


APPLICANT: UNIDEN AMERICA CORPORATION
 FCC ID: AMWUN110
 REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

POWERLINE CONDUCTED PLOT – LINE 1

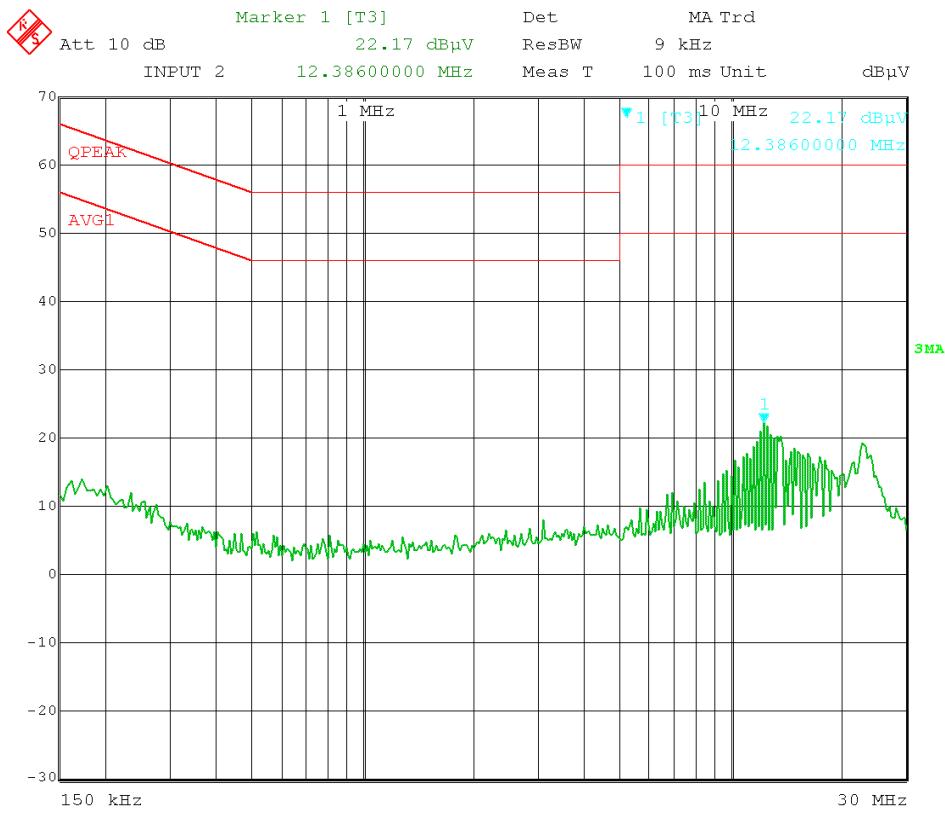

APPLICANT: UNIDEN AMERICA CORPORATION
 FCC ID: AMWUN110
 REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

POWERLINE CONDUCTED PLOT – LINE 2

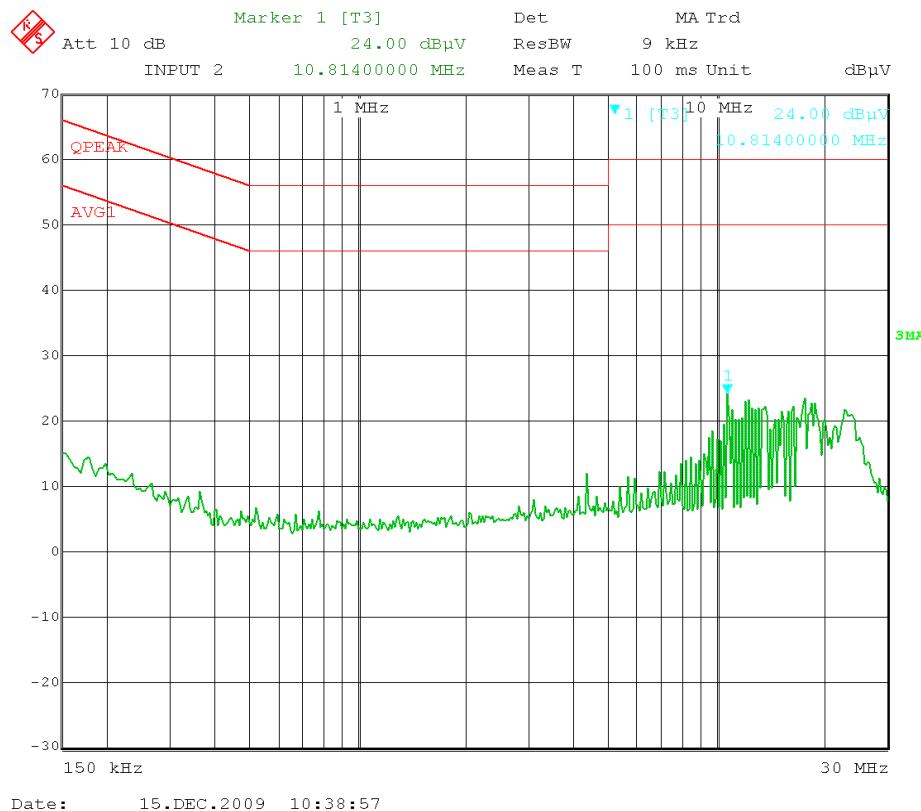


APPLICANT: UNIDEN AMERICA CORPORATION
 FCC ID: AMWUN110
 REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

20dB OCCUPIED BANDWIDTH

Rules Part No.: 15.249

Requirements: The 6 dB bandwidth must be greater than 500 kHz.


Test Data:

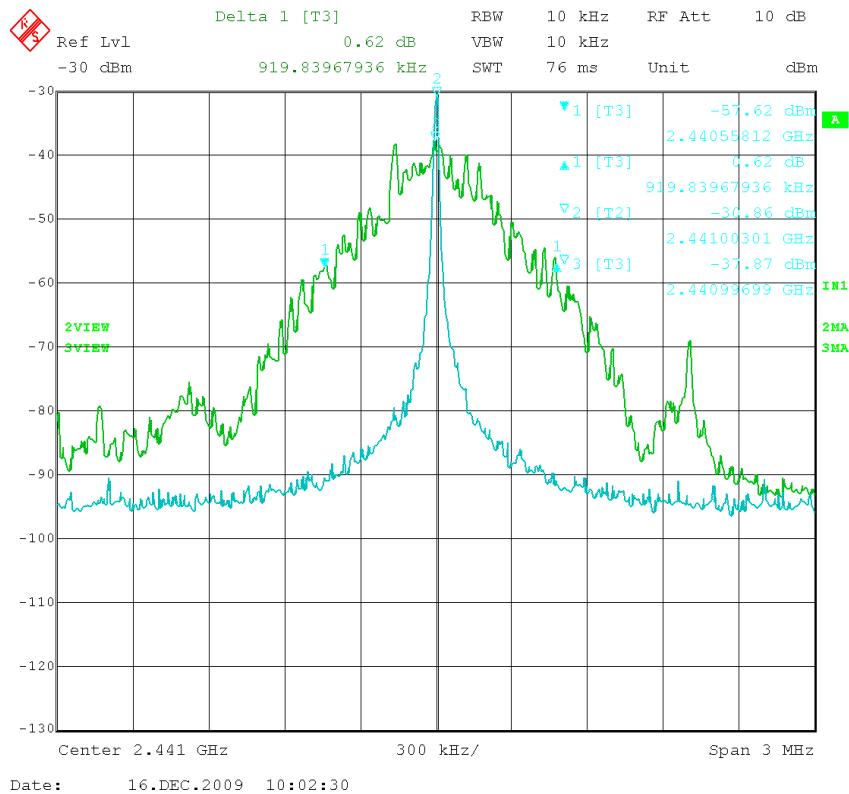


Three places in the band were measured and the worst case reported.

APPLICANT: UNIDEN AMERICA CORPORATION
 FCC ID: AMWUN110
 REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

CARRIER FREQUENCY SEPARATION:

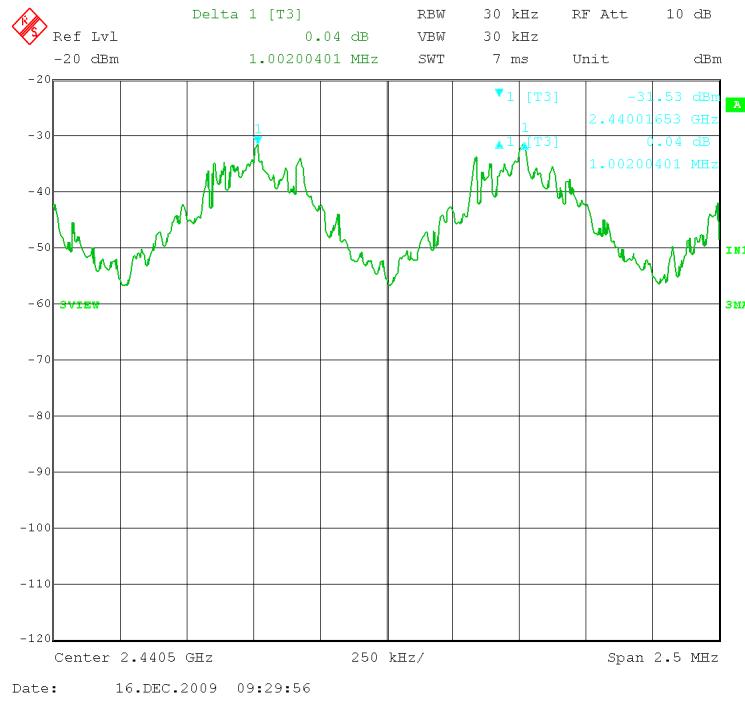

NUMBER OF HOPPING FREQUENCIES:

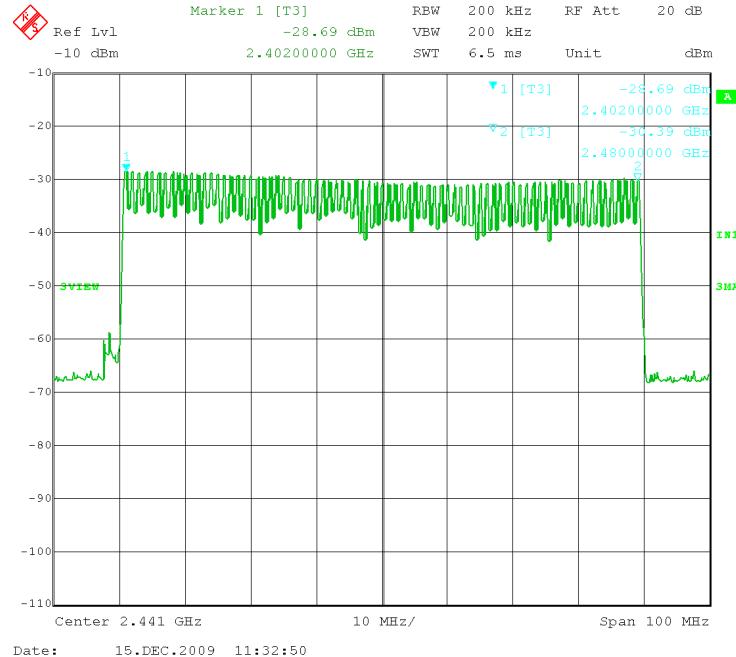


APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUN110

REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc



APPLICANT: UNIDEN AMERICA CORPORATION
FCC ID: AMWUN110
REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

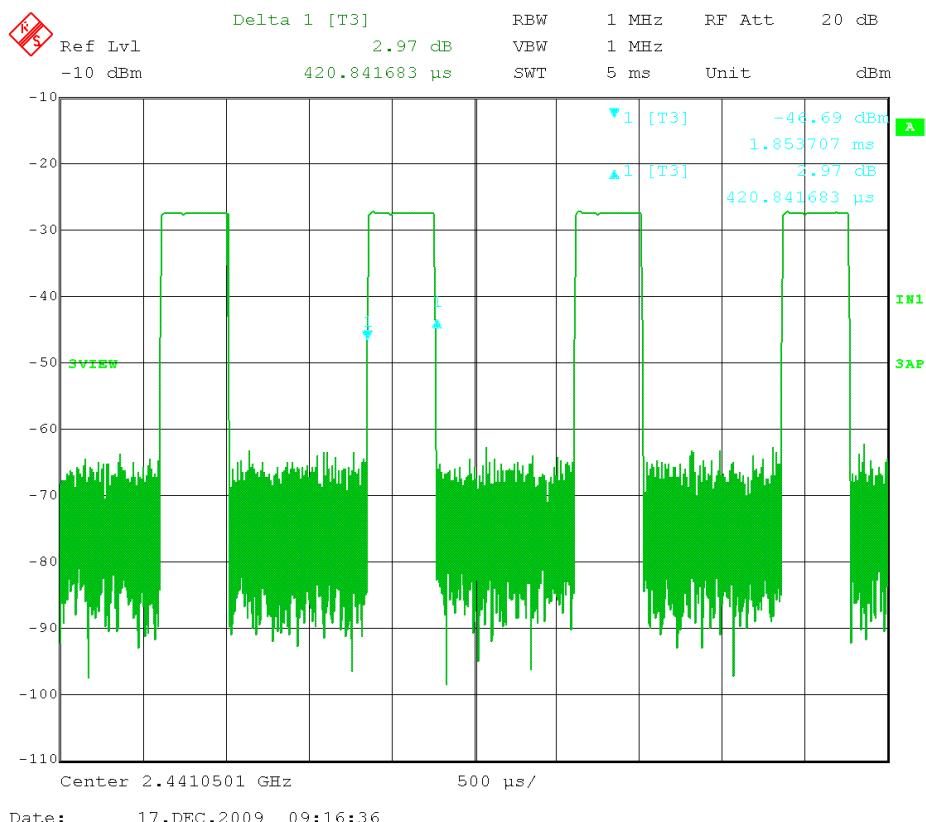TIME OF OCCUPANCY (DWELL TIME):


APPLICANT: UNIDEN AMERICA CORPORATION
 FCC ID: AMWUN110
 REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc


SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Requirements: Emissions must be at least 20dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

Test Data:

N/A, Device has permanently attached antenna and no antenna connector.

15.247(c) Method of Measuring RF Conducted Spurious Emissions

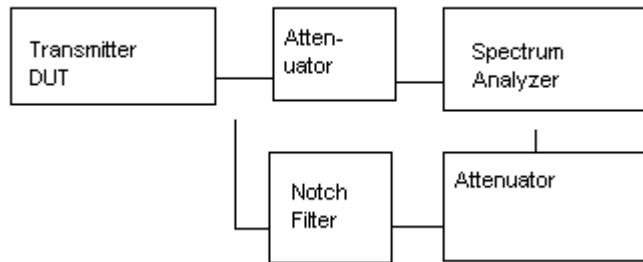

APPLICANT: UNIDEN AMERICA CORPORATION
FCC ID: AMWUN110
REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND


Requirements: Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 uV/m (54 dBuV/m).

Test Procedure: An in band field strength measurement of the fundamental Emission using the RBW and detector function required by C63.4-2000 and FCC Rules. The procedure was repeated with an average detector and a plot made. The calculated field strength in the adjacent restricted band is presented below.

Lower adjacent restricted band – ch 2402

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
2,402.00	2,385.27	7.6	V	3.17	32.2	42.97	11.03
2,402.00	2,385.28	6.8	H	3.17	32.2	42.17	11.83
2,402.00	2,387.88	8.3	H	3.17	32.21	43.68	10.32
2,402.00	2,388.12	8.3	V	3.17	32.21	43.68	10.32

ch 2402-Lower restricted band - Horiz.

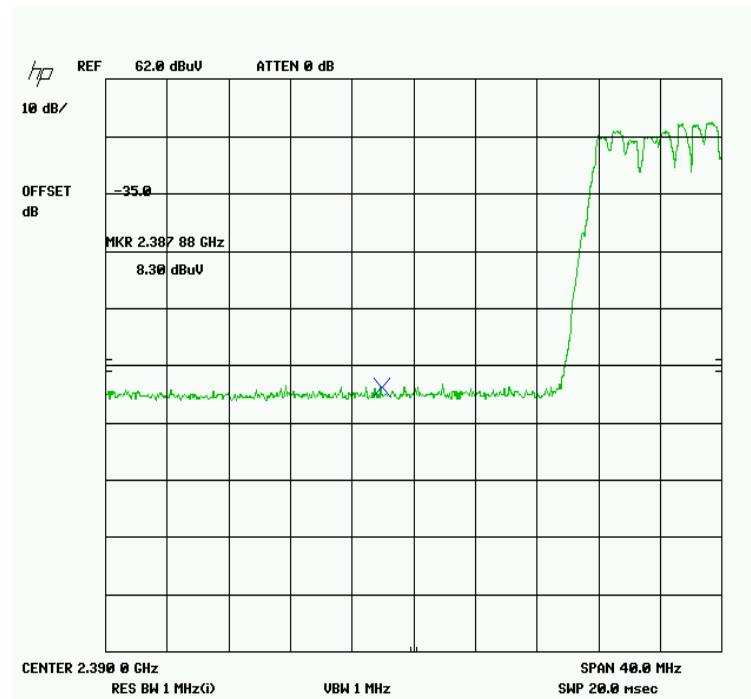


APPLICANT: UNIDEN AMERICA CORPORATION

FCC ID: AMWUN110

REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

ch 2402-Lower restricted band – Vert.

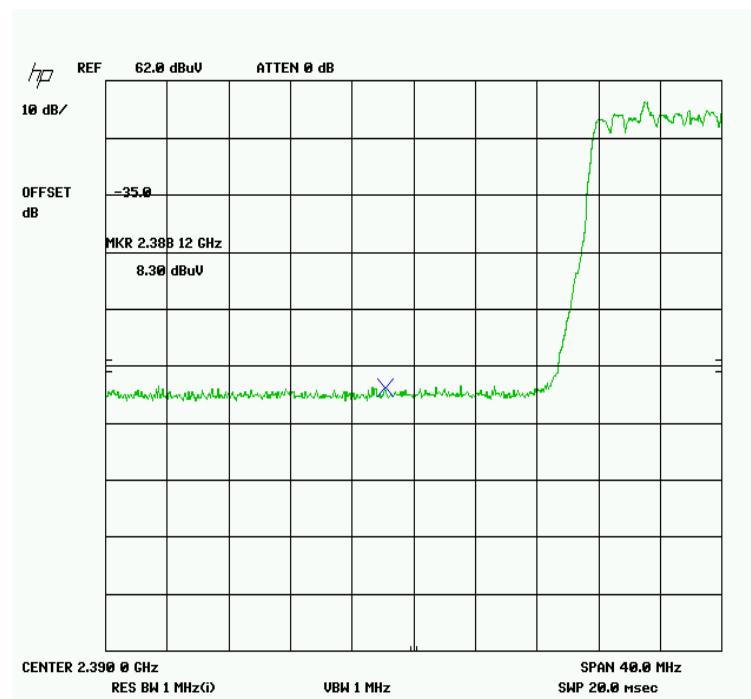

APPLICANT: UNIDEN AMERICA CORPORATION
 FCC ID: AMWUN110
 REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

Upper adjacent restricted bandedge 2480


Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
2,480.00	2,483.90	9.5	H	3.24	32.46	45.2	8.8
2,480.00	2,484.06	12.4	V	3.24	32.46	48.1	5.9
2,480.00	2,484.42	9.3	H	3.24	32.46	45	9
2,480.00	2,489.14	7.8	V	3.24	32.47	43.51	10.49

ch 2480 - Upper restricted band - Horiz.



APPLICANT: UNIDEN AMERICA CORPORATION
 FCC ID: AMWUN110
 REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc

ch 2480 - Upper restricted band – Vert.

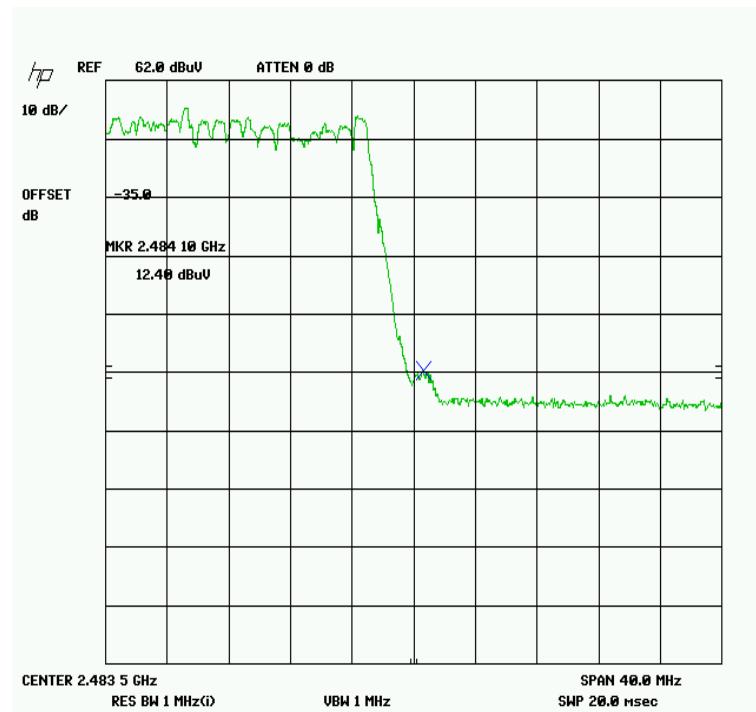

APPLICANT: UNIDEN AMERICA CORPORATION
 FCC ID: AMWUN110
 REPORT: Y:\U\Uniden AMW\2869UT9\2869UT9TestReport_Rev.doc