


PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road • Columbia, MD 21045 • U.S.A.

TEL (410) 290-6652 • FAX (410) 290-6654

<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE

UNIDEN ENGINEERING SERVICES

216 John Street

P.O. Box 580

Lake City, SC 29560-0580

Attn: Mr. Jim Haynes, Vice President ~
Engineering & Regulatory Affairs

Dates of Tests: October 7-8, 2002

Test Report S/N: 15.220918518.A MW

Test Site: PCTEST Lab, Columbia MD

FCC ID

AMWUP300

APPLICANT

UNIDEN AMERICA CORP.

FCC Rule Part(s): § 15.247; ANSI C-63.4 (1992)
Classification: Spread Spectrum Transceiver
Max Output Power: 0.182W Conducted (Base/Head Set)
Method/System: Frequency Hopping Spread Spectrum (FHSS)
Equipment Type: 2.4 GHz FHSS Cordless Phone
Frequency Range: 2400 – 2483.5 MHz (FHSS)
Model No(s): DCT5260

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63-4.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President




PCTEST™ PT. 15.247 REPORT	EVALUATION REPORT		Uniden	Reviewed By: Quality Manager
Test Report S/N: 15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 1 of 18


TABLE OF CONTENTS

APPENDIX A -	COVER LETTER	
APPENDIX B -	ATTESTATION STATEMENT	
APPENDIX C -	TEST REPORT	
SCOPE		3
INTRODUCTION (SITE DESCRIPTION)		4
PRODUCT INFORMATION		5
DESCRIPTION OF TESTS		
A.	CONDUCTED EMISSIONS	6
B.	RADIATED EMISSIONS	7
C.	RESTRICTED BANDS	8
D.	ANTENNA REQUIREMENT	9
E.	MAXIMUM PEAK POWER OUTPUT	10
F.	CHANNEL SPACING	11
RADIATED MEASUREMENTS (FUNDAMENTAL & HARMONICS)		12-16
FREQUENCY MEASUREMENTS (SPURIOUS)		17
LIST OF TEST EQUIPMENT		18
CONCLUSION		19
APPENDIX D -	TEST PLOTS	
APPENDIX E -	FCC ID LABEL & LOCATION	
APPENDIX F -	TEST SETUP PHOTOGRAPHS	
APPENDIX G -	EXTERNAL PHOTOGRAPHS	
APPENDIX H -	INTERNAL PHOTOGRAPHS	
APPENDIX I -	BLOCK DIAGRAM(S)	
APPENDIX J-	SCHEMATIC DIAGRAM(S)	
APPENDIX K -	CIRCUIT DESCRIPTION	
APPENDIX L -	USER'S MANUAL	
APPENDIX M -	SAR MEASUREMENT REPORT	
APPENDIX N -	SAR TEST DATA	
APPENDIX O -	SAR TEST SETUP PHOTOGRAPHS	
APPENDIX P -	DIPOLE VALIDATION	
APPENDIX Q -	PROBE CALIBRATION	
APPENDIX R -	COPY OF FHSS LAN RADIO CARD FCC GRANT	

MEASUREMENT REPORT



Scope - Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.



§2983(a) General Information

Applicant Name:	UNIDEN Engineering Services
Address:	216 John Street, P.O.Box 580 Lake City, SC 29560-0580
Attention:	Mr. Jim Hayes, Vice President - Engineering & Regulatory Affairs

- FCC ID: **AMWUP300**
- Class: Spread Spectrum Transceiver (FHSS)
- Type: 2.4 GHz FHSS Cordless Phone
- Freq. Range: 2400 – 2485.3 MHz
- Method/System: GFSK
- Model No(s): **DCT5260**
- Max. RF Output Power: 0.182W Conducted (Base/Head Set)
- Rule Part(s): § 15.247
- Dates of Tests: October 7-8, 2002
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.
- Test Report S/N: 220918518.AMW

NOTE: *The receiver portion was tested and complies with Part 15B under the verification procedure.*

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT		Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 3 of 19

INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) and FCC Public Notice dated July 12, 1995 entitled "Guidance on Measurement for Direct Sequence Spread Spectrum Systems" were used in the measurement of **Uniden Spread Spectrum 2.4 GHz FHSS Cordless Phone**.

These measurement tests were conducted at **PCTEST Engineering Laboratory, Inc.** facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

PCTEST Location

The map at right shows the location of the PCTEST Lab, its proximity to the FCC Lab, the Columbia vicinity area, the Baltimore-Washington International (BWI) airport, and the city of Baltimore, and the Washington, D.C. area. (see Figure1).

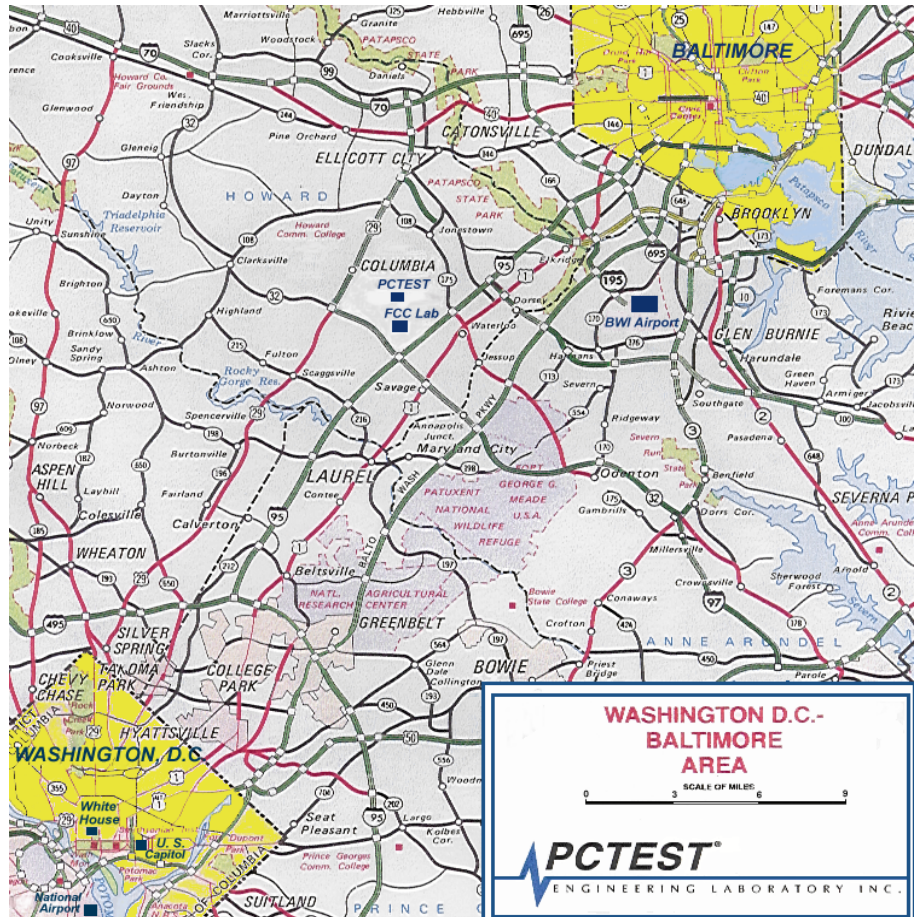


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT		Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AM0WUP300	Page 4 of 19

PRODUCT INFORMATION

Table-1. Channel frequency table

Channel	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.	2401.	2402.	2403.	2404.	2405.	2406.	2407.	2408.	2408.	2409.
	916581	808452	700323	582194	484085	375936	267807	159678	051549	943420	835291

Channel	12	13	14	15	16	17	18	19	20	21	22
Frequency (MHz)	2410.	2411.	2412.	2413.	2414.	2415.	2416.	2416.	2417.	2418.	2419.
	727162	619033	510904	402775	294646	186517	078388	970259	862130	754001	645872

Channel	23	24	25	26	27	28	29	30	31	32	33
Frequency (MHz)	2420.	2421.	2422.	2423.	2424.	2424.	2425.	2426.	2427.	2428.	2429.
	537743	429614	321485	213356	105227	997098	888969	780840	672711	564582	456453

Channel	34	35	36	37	38	39	40	41	42	43	44
Frequency (MHz)	2430.	2431.	2432.	2433.	2433.	2434.	2435.	2436.	2437.	2438.	2439.
	348324	240195	132066	023937	915808	807679	69955	591421	483292	375163	267034

Channel	45	46	47	48	49	50	51	52	53	54	55
Frequency (MHz)	2440.	2441.	2441.	2442.	2443.	2444.	2445.	2446.	2447.	2448.	2449.
	158905	050776	942647	834518	726389	618260	510131	402002	293873	185744	077615

Channel	56	57	58	59	60	61	62	63	64	65	66
Frequency (MHz)	2449.	2450.	2451.	2452.	2453.	2454.	2455.	2456.	2457.	2457.	2458.
	969486	861357	753228	645099	536970	428841	320712	212583	104454	996325	888196

Channel	67	68	69	70	71	72	73	74	75	76	77
Frequency (MHz)	2459.	2460.	2461.	2462.	2463.	2464.	2465.	2466.	2466.	2467.	2468.
	780067	671938	563809	455680	347551	239422	131293	023164	915035	806906	698777


Channel	78	79	80	81	82	83	84	85	86	87	88
Frequency (MHz)	2469.	2470.	2471.	2472.	2473.	2474.	2474.	2475.	2476.	2477.	2478.
	590648	482519	374390	266261	158132	050003	941874	833745	725616	617487	509358

Channel	89
Frequency (MHz)	2479.
	401229


PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT			Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 5 of 19	

Description of Tests


Conducted Emissions

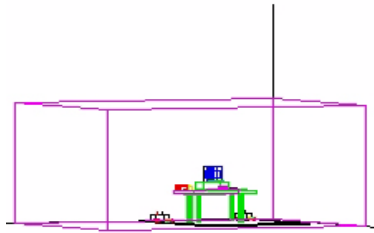


**Figure 4. Shielded Enclosure
Line-Conducted Test Facility**

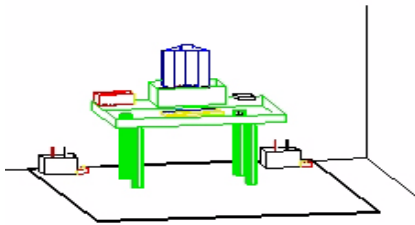

**Figure 2. Line Conducted
Emission Test Set-Up**

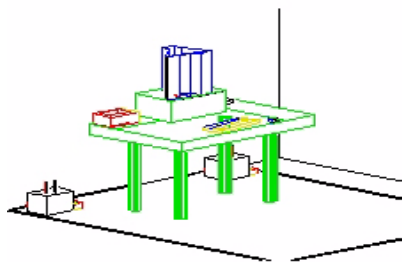

**Figure 3. Wooden Table &
Bonded LISNs**

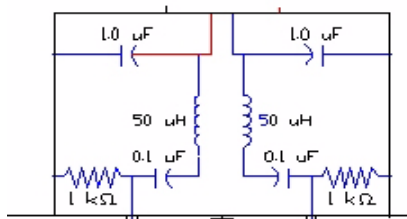

**Figure 5. LISN Schematic
Diagram**

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure. It is manufactured by Ray Proof Series 81 (see Figure 2). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m. x 1.5m. wooden table 80cm. high is placed 40cm. away from the vertical wall and 1.5m away from the side wall of the shielded room (see Figure 3). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 4). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filters (100dB 14kHz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the Solar LISN. LISN schematic diagram is shown in Figure 5. All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 450kHz to 30MHz with 20 msec. sweep time. The frequency producing the maximum level was reexamined using EMI/ Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak mode. The bandwidth of the receiver was set to 10 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Appendix C. Each EME reported was calibrated using the HP8640B signal generator.

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT		Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 6 of 19

Description of Tests (Continued)

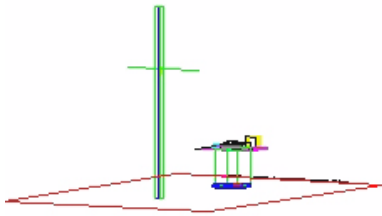


Figure 6. 3-Meter Test Site

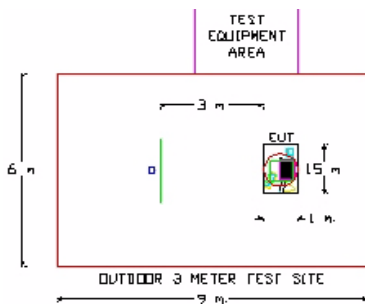


Figure 7. Dimensions of Outdoor Test Site

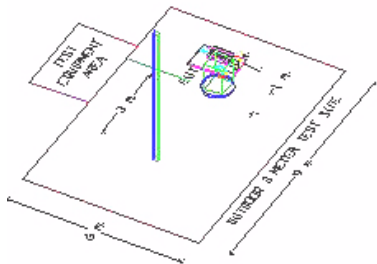


Figure 8. Turntable and System Setup

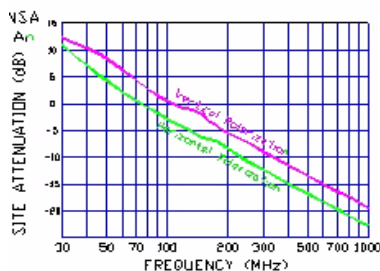


Figure 9. Normalized Site Attenuation Curves (H&V)

Radiated Emissions

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using biconical antenna and from 200 to 1000 MHz using log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antenna (see Figure 6). The test equipment was placed on a wooden and plastic bench situated on a 1.5 x 2 meter area adjacent to the measurement area (see Figure 7). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1 MHz depending on the frequency or type of signal.

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 8). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Appendix C. Each EME reported was calibrated using the HP8640B signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 9.

PCTEST™ PT. 15.247 REPORT	EVALUATION REPORT		Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 7 of 19

§ 15.205 Restricted Bands

Special attention is made for the EUT's harmonic and spurious radiated emission in the restricted bands of operation. The EUT was tested from 9kHz and up to the tenth harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average measurements was used using RBW 1 MHz – VBW 10Hz and linearly polarized horn antennas. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading sequence, data sequence, and the carrier modulation must not exceed the limits show in Table 2 per 15.209.

Frequency (MHz)	F/S (UV/m)	Meas. Dist. (Meters)
0.009-0.490	2400/F (kHz)	300
0.490-1.705	24000/F (kHz)	30
1.705-30.00	30	30
30.0-88.0	100	3
88.0-216.0	150	3
216.0-960.0	200	3
Above 960	500	3

Tab. 2. Radiated Emission Limits Per 15.209

Test Equipment

HP 8566B	Spectrum Analyzer 100Hz-22HGHZ
HP83017A	Microwave Analyzer 40dB Gain (0.5 – 26.5 GHz)
HP 3784A	Digital Transmission Analyzer
EMCO 3115	Horn Antenna (1 – 18GHz)
HP 8495A	20dB Attenuator (DC-40GHz) 0-70dB
HP 8493B	10dB Attenuator
MicroCoax Cables	Low Loss Microwave Cables (1-26.5 GHz)
CDI Dipoles	Dipole Antennas (30 – 1000 MHz)

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT	Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300
			Page 8 of 19

§ 15.203 Antenna Requirement

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

The Uniden **DCT5260** unit complies with the requirement of §15.203. The antenna is a **permanently attached omni-directional antenna**.

CONCLUSION

There are no provisions for connection to an external antenna. The unit meets the Antenna Requirements of §15.203.

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT			Uniden®	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 9 of 19	

§15.247(a)(2) – 20dB Bandwidth (Head Set)

Res. Bandwidth = 100 kHz (7dB/div)
 Vid. BW = 100 kHz
 Span = 3.0MHz
 Ref. Level - 21.5 dBm
 Sweep 5ms
 (see attached spectrum plots)

FREQ (MHz)	Channel	20dB Bandwidth (MHz)
2401	1	.937
2439	44	.938
2479	89	.932

Table 3. 20dB Bandwidth measurements

Minimum Standard – The transmitter shall have a minimum 6dB bandwidth of 500Hz (0.5 MHz).
 These are radiated measurements.

REMARKS:

PASS

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT				Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 10 of 19	

§15.247(a)(2) – 20dB Bandwidth (Base)

Res. Bandwidth = 100 kHz (7dB/div)
 Vid. BW = 100 kHz
 Span = 3.0 MHz
 Ref. Level - 21.5 dBm
 Sweep 10ms
 (see attached spectrum plots)

FREQ (MHz)	Channel	20dB Bandwidth (MHz)
2401	1	.967
2439	44	.983
2479	89	.971

Table 3. 20dB Bandwidth measurements

Minimum Standard – The transmitter shall have a minimum 6dB bandwidth of 500Hz (0.5 MHz).
 These are radiated measurements.

REMARKS:

PASS

§15.247(b) Maximum Peak Output Power (Head Set)

Minimum Standard – The maximum peak output power of the transmitter shall not exceed 1 watt. Radiated power measurements were taken at 3 meters with a power meter.

Max. Power Peak + Atten = dBm $\Rightarrow$ Watts

FREQ (MHz)	Channel	Power Output (dBm)
2401	1	22.60
2439	44	22.30
2479	89	20.77

Table 4. Output Power Measurements

Minimum Standard – The transmitter peak output power of the transmitter shall not exceed 1 watt. These are radiated measurements.

REMARKS:

PASS

§15.247(b) Maximum Peak Output Power (Base) (Wire Antenna)

Minimum Standard – The maximum peak output power of the transmitter shall not exceed 1 watt. Radiated power measurements were taken at 3 meters with a power meter.

Max. Power Peak + Atten = dBm $\Rightarrow$ Watts

FREQ (MHz)	Channel	Power Output (dBm)
2401	1	19.47
2439	44	18.27
2479	89	18.07

Table 4. Output Power Measurements

Minimum Standard – The transmitter peak output power of the transmitter shall not exceed 1 watt. These are radiated measurements.

REMARKS:

PASS

§15.247(b) Maximum Peak Output Power (Base) (Dipole Antenna)

Minimum Standard – The maximum peak output power of the transmitter shall not exceed 1 watt. Radiated power measurements were taken at 3 meters with a power meter.

Max. Power Peak + Atten = dBm $\Rightarrow$ Watts

FREQ (MHz)	Channel	Power Output (dBm)
2401	1	22.47
2439	44	20.87
2479	89	20.57

Table 4. Output Power Measurements

Minimum Standard – The transmitter peak output power of the transmitter shall not exceed 1 watt. These are radiated measurements.

REMARKS:

PASS

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT			Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 14 of 19	

RADIATED Measurements (Fundamental & Harmonics) (Head Set)

A. Transmitter Portion

Distance of Measurements: 3 meters

Channel: 45

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2401	- 20.9	31.7	V	Peak	778933	117.8	n/a
4802	- 102.8	39.4	V	Peak	151.182	43.59	- 10.41
7203	- 115.0	46.4	V	Peak	83.3681	38.42	- 79.41
9604	< - 130						
12005	< - 130						

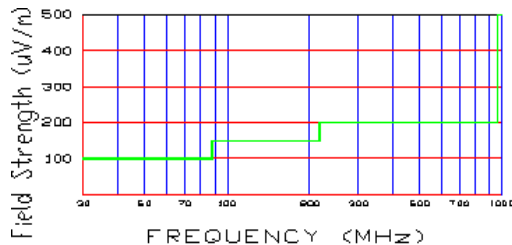


Figure 10. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 130 are below the analyzer floor level.

PCTEST™ PT. 15.247 REPORT	EVALUATION REPORT		Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 15 of 19

RADIATED Measurements (Fundamental & Harmonics) (CONT.) (Head Set)

B. Transmitter Portion

Distance of Measurements: 3 meters

Channel: 45

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QPI/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2440	- 21.3	31.8	V	Peak	752489	117.5	n/a
4880	- 102.8	39.5	V	Peak	154.882	43.8	- 10.2
7320	- 115.0	47.0	V	Peak	93.3254	39.4	- 15.6
9760	< - 130						
12200	< - 130						

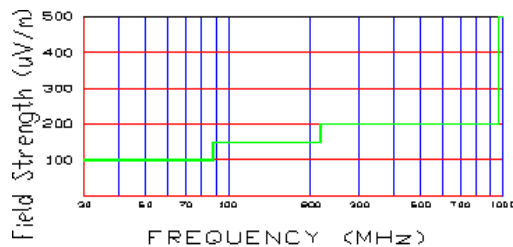


Figure 11. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 130 are below the analyzer floor level.

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT			Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 16 of 19	

RADIATED Measurements (Fundamental & Harmonics) (CONT.) (Head Set)

C. Transmitter Portion

Distance of Measurements: 3 meters

Channel: 45

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QI/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2479	- 22.9	31.9	V	Peak	630957	116.0	n/a
4958	- 103.7	39.7	V	Peak	141.254	43.0	- 11.0
7320	- 114.6	47.2	V	Peak	80.3526	38.1	- 15.9
9760	< - 130						
12395	< - 130						

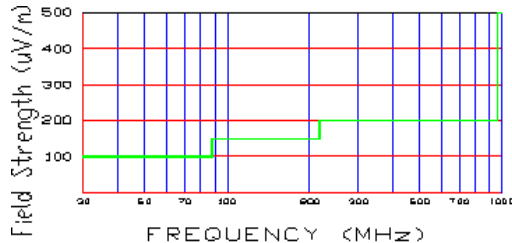


Figure 12. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 130 are below the analyzer floor level.

PCTEST™ PT. 15.247 REPORT	EVALUATION REPORT		Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 17 of 19

RADIATED Measurements (Fundamental & Harmonics) (Base) (Whip Antenna)

A. Transmitter Portion

Distance of Measurements: 3 meters

Channel: 1

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2401	- 24.0	31.7	V	Peak	543250	114.7	n/a
4802	- 106.0	39.4	V	Peak	104.592	40.4	- 13.61
7203	- 120.0	46.4	V	Peak	46.8813	33.4	- 81.28
9604	< - 130						
12005	< - 130						

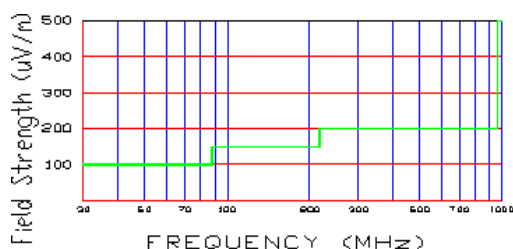


Figure 10. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 130 are below the analyzer floor level.

PCTEST™ PT. 15.247 REPORT	EVALUATION REPORT		Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 18 of 19

RADIATED Measurements (Fundamental & Harmonics) (CONT.) (Base) (Whip Antenna)

B. Transmitter Portion

Distance of Measurements: 3 meters

Channel: 45

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QPI/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2440	- 25.3	31.8	V	Peak	473151	113.5	n/a
4880	- 106.8	39.5	V	Peak	96.6051	39.7	- 14.3
7320	- 119.0	47.0	V	Peak	56.2341	35.0	- 19.0
9760	< - 130						
12200	< - 130						

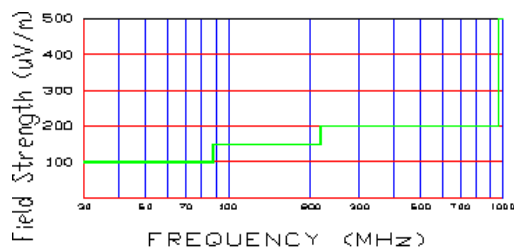


Figure 11. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 130 are below the analyzer floor level.

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT			Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 19 of 19	

RADIATED Measurements (Fundamental & Harmonics) (CONT.) (Base) (Whip Antenna)

C. Transmitter Portion

Distance of Measurements: 3 meters

Channel: 89

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QI/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2479	- 25.6	31.9	V	Peak	462381	113.3	n/a
4958	- 107.0	39.7	V	Peak	96.6051	39.7	- 14.3
7320	- 119.9	47.2	V	Peak	51.88	34.3	- 19.7
9760	< - 130						
12395	< - 130						

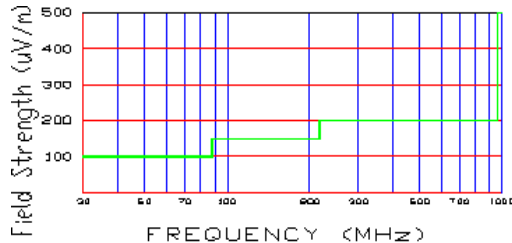


Figure 12. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 130 are below the analyzer floor level.

PCTEST™ PT. 15.247 REPORT	EVALUATION REPORT		Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 20 of 19

RADIATED Measurements (Fundamental & Harmonics) (Base) (Special AFCL)

A. Transmitter Portion

Distance of Measurements: 3 meters

Channel: 45

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QP/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2401	- 21.0	31.7	V	Peak	767361	117.7	n/a
4802	- 103.0	39.4	V	Peak	147.741	43.4	- 10.61
7203	- 116.2	46.4	V	Peak	72.6106	37.2	- 18.80
9604	< - 130						
12005	< - 130						

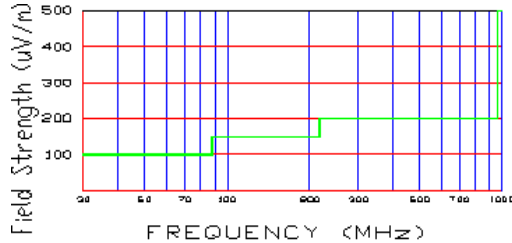


Figure 10. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 130 are below the analyzer floor level.

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT		Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 21 of 19

RADIATED Measurements (Fundamental & Harmonics) (CONT.) (Base) (Special AFCL)

B. Transmitter Portion

Distance of Measurements: 3 meters

Channel: 45

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QPI/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2440	- 2237	31.8	V	Peak	638263	116.1	n/a
4880	- 1040	39.5	V	Peak	133.352	42.5	- 11.5
7320	- 116.0	47.0	V	Peak	79.4328	38.0	- 16.0
9760	< - 130						
12200	< - 130						

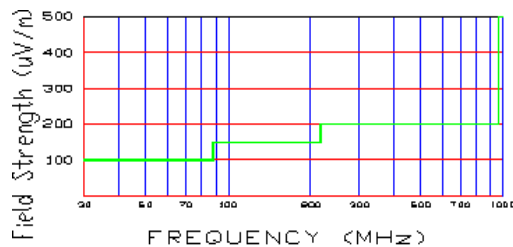


Figure 11. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 130 are below the analyzer floor level.

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT			Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 22 of 19	

RADIATED Measurements (Fundamental & Harmonics) (CONT.) (Base) (Special AFCL)

C. Transmitter Portion

Distance of Measurements: 3 meters

Channel: 89

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QPI/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2479	- 23.1	31.9	V	Peak	616595	115.8	n/a
4958	- 104.5	39.7	V	Peak	128.825	42.2	- 11.8
7320	- 116.7	47.2	V	Peak	74.9894	37.5	- 16.5
9760	< - 130						
12395	< - 130						

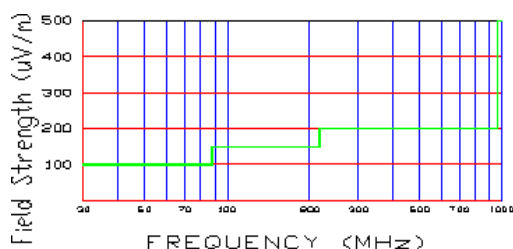


Figure 12. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 130 are below the analyzer floor level.

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT	Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300

RADIATED Measurements (Restricted Band) (Uniden Base)

Transmitter Portion

Operating Frequency: 2489 MHz
Distance of Measurements: 3 meters
Channel(s): 89

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QPI/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2483.7	- 98.5	31.7	V	Peak	102.329	40.2	- 13.8
2484.8	- 99.0	31.7	V	Peak	96.6051	39.7	- 14.3
2484.9	- 100.0	31.8	V	Peak	87.0964	38.8	- 14.3
2485.1	- 103.0	31.8	V	Peak	61.6595	35.8	- 18.2
2491.5	- 99.9	31.9	V	Peak	89.1251	39.0	- 15.0
2492.0	- 99.0	32.0	V	Peak	100	40.0	- 14.0

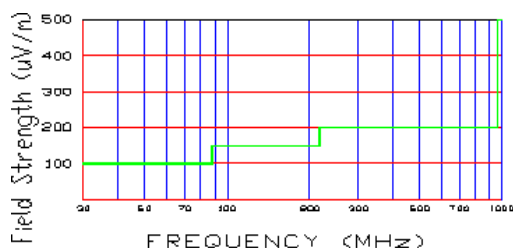


Figure 12. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 μ V/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 130 are below the analyzer floor level.

PCTEST™ PT. 15.247 REPORT	PCTEST EVALUATION REPORT	Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300
			Page 24 of 19

RADIATED Measurements (Restricted Band) (Uniden HS)

Transmitter Portion

Operating Frequency: 2489 MHz

Distance of Measurements: 3 meters

Channel(s): 89

FREQ. (MHz)	Level* (dBm)	AFCL (dB)	POL (H/V)	DET QPI/AVG	F/S (μ V/m)	F/S (dB μ V/m)	Margin (dB)
2483.6	- 99.0	31.7	V	Peak	96.5061	39.7	- 14.3
2484.9	- 99.5	31.7	V	Peak	91.2011	39.2	- 14.8
2484.9	- 101.0	31.8	V	Peak	77.6247	37.8	- 14.8
2485.1	- 104.2	31.8	V	Peak	53.7032	34.6	- 19.4
2491.9	- 100.0	31.9	V	Peak	88.1049	38.9	- 15.1
2492.0	- 99.4	32.0	V	Peak	95.4993	39.6	- 14.4

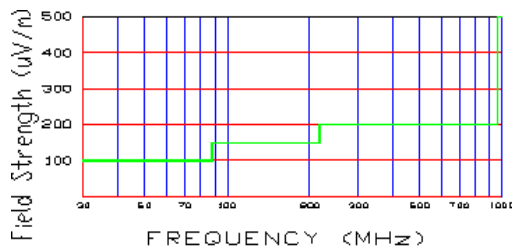


Figure 12. Restricted band harmonics and spurious limits.

Above 1 GHz limit is 500 uV/m (54dBu/m)

NOTES:

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in table 2. (note: * Restricted Band)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully recharged battery.
7. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
8. < - 130 are below the analyzer floor level.

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT	Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300
			Page 25 of 19

RADIATED Measurements (Spurious)

Transmitter Portion

Distance of Measurements: 3 meters

Channels: 45

FREQ. (MHz)	Level* (dBm)	AFCL** (dB)	POL (H/V)	Height (m)	Azimuth (° angle)	F/S (μV/m)	Margin*** (dB)
69.2	- 82.68	6.19	V	3.1	60	33.55	- 9.5
131.0	- 84.48	12.28	H	2.2	190	55.00	- 8.7
196.6	- 91.03	16.33	H	1.7	210	41.26	- 11.2
262.16	- 90.03	19.24	V	1.4	160	64.62	- 9.8
327.7	- 92.59	21.60	H	1.2	170	63.15	- 10.0
524.3	- 78.79	26.60	H	1.1	180	549.59	- 8.8

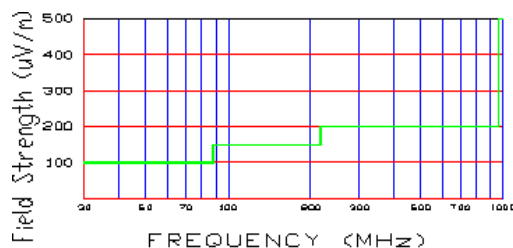


Figure 13. Restricted band harmonics and spurious limits.

NOTES:

1. All emissions were investigated and the worst case emissions are reported
2. For hand-held devices, the EUT is rotated through three orthogonal axis to determine which configuration produces the maximum emissions
3. The EUT is supplied with the minimal AC voltage or/and a new/fully recharged battery.
4. The EUT was tested up to the 10th harmonic (9.3 GHz) and no significant emission was found.

Above 1 GHz limit is 500 uV/m (54dBu/m)

PCTEST™ PT. 15.247 REPORT	EVALUATION REPORT	Uniden	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300

TEST EQUIPMENT

Type	Model	Cal. Due Date	S/N
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	12/05/02	3638A08713
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	04/17/03	2542A11898
Spectrum Analyzer/Tracking Gen.	HP 8591A (9kHz-1.8GHz)	06/02/03	3144A02458
Spectrum Analyzer	HP 8591A (9kHz-1.8GHz)	10/15/02	3108A02053
Spectrum Analyzer	HP 8594A (9kHz-2.9GHz)	11/02/02	3051A00187
Signal Generator*	HP 8640B (500Hz-1GHz)	06/02/03	2232A19558
Signal Generator*	HP 8640B (500Hz-1GHz)	06/02/03	1851A09816
Signal Generator*	Rohde & Schwarz (0.1-1000MHz)	09/11/03	894215/012
Ailtech/Eaton Receiver	NM 37/57A-SL (30-1000MHz)	04/12/03	0792-03271
Ailtech/Eaton Receiver	NM 37/57A (30-1000MHz)	03/11/03	0805-03334
Ailtech/Eaton Receiver	NM 17/27A (0.1-32MHz)	09/17/03	0608-03241
Quasi-Peak Adapter	HP 85650A	08/09/03	2043A00301
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/03	0194-04082
RG58 Coax Test Cable	No. 167		n/a
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)		3531A00115
Broadband Amplifier (2)	HP 8447D		1145A00470, 1937A03348
Broadband Amplifier	HP 8447F		2443A03784
Transient Limiter	HP 11947A (9kHz-200MHz)		2820A00300
Horn Antenna	EMCO Model 3115 (1-18GHz)		9704-5182
Horn Antenna	EMCO Model 3115 (1-18GHz)		9205-3874
Horn Antenna	EMCO Model 3116 (18-40GHz)		9203-2178
Biconical Antenna (4)	Eaton 94455/Eaton 94455-1/Singer 94455-1/Compliance Design 1295, 1332, 0355		
Log-Spiral Antenna (3)	Ailtech/Eaton 93490-1		0608, 1103, 1104
Roberts Dipoles	Compliance Design (1 set) A100		5118
Ailtech Dipoles	DM-105A (1 set)		33448-111
EMCO LISN (2)	3816/2		1077, 1079
EMCO LISN	3725/2		2009
Microwave Preamplifier 40dB Gain	HP 83017A (0.5-26.5GHz)		3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)		
Ailtech/Eaton Receiver	NM37/57A-SL		0792-03271
Spectrum Analyzer	HP 8591A		3034A01395
Modulation Analyzer	HP 8901A		2432A03467
NTSC Pattern Generator	Leader 408		0377433
Noise Figure Meter	HP 8970B		3106A02189
Noise Figure Meter	Ailtech 7510		TE31700
Noise Generator	Ailtech 7010		1473
Microwave Survey Meter	Holaday Model 1501 (2.450GHz)		80931
Digital Thermometer	Extech Instruments 421305		426966
Attenuator	HP 8495A (0-70dB) DC-4GHz		
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)		
Shielded Screen Room	RF Lindgren Model 26-2/2-0		6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81		R2437 (PCT278)
Environmental Chamber	Associated Systems Model 1025 (Temperature/Humidity)		PCT285

* Calibration traceable to the National Institute of Standards and Technology (NIST).

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT	Uniden	Reviewed By: Quality Manager
Test Report S/N: 15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300
			Page 27 of 19

Conclusion

The data collected shows that the **Uniden 2.4 GHz FHSS Cordless Phone FCC ID: AWMUP300** complies with Part 15C of the FCC Rules.

PCTEST™ PT. 15.247 REPORT	 EVALUATION REPORT		Uniden®	Reviewed By: Quality Manager
Test Report S/N:15.220918518.AMW	Test Dates: OCT. 7-8, 2002	EUT Type: 2.4 GHZ FHSS CORDLESS PHONE	FCC ID: AMWUP300	Page 28 of 19