

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

Test Lab

CELLTECH LABS INC.
Testing and Engineering Services
1955 Moss Court
Kelowna, B.C.
Canada V1Y 9L3
Phone: 250-448-7047
Fax: 250-448-7046
e-mail: info@celltechlabs.com
web site: www.celltechlabs.com

Applicant Information

UNIDEN AMERICA CORPORATION
181 N. Country Club Road
P.O. Box 580
Lake City, SC 29560
United States

FCC IDENTIFIER: AMWUT005
IC IDENTIFIER: 513C-UT005
Model(s): GMR638-2

Rule Part(s): FCC 47 CFR §2.1093; IC RSS-102 Issue 1 (Provisional)
Test Procedure(s): FCC OET Bulletin 65, Supplement C (Edition 01-01)
Device Description: Portable UHF FRS/GMRS PTT Radio Transceiver
Modulation Type: FM (UHF)

Tx Frequency Range(s): 462.5500 - 462.7250 MHz (GMRS Channels 15-22)
462.5625 - 462.7125 MHz (FRS/GMRS Channels 1-7)
467.5625 - 467.7125 MHz (FRS Channels 8-14)
Max. RF Output Power Tested: 0.323 Watts ERP (462.7125 MHz)
Antenna Type(s) Tested: Fixed Stubby
Battery Type(s) Tested: NiMH x4 (1.2 V, 750 mAh AAA)
Alkaline Duracell Procell x4 (1.5 V, 1150 mAh AAA)

Body-Worn Accessories Tested: Plastic Belt-Clip (P/N: B5525G1-CF-4)
Audio Accessories Tested: Generic Earbud with Lapel-Microphone

Max. SAR Level(s) Evaluated: 0.316 W/kg - Face-held (50% duty cycle)
0.534 W/kg - Body-worn (50% duty cycle)

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 1 (Provisional) for the General Population / Uncontrolled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

Performed By:



Sean Johnston
Compliance Technologist
Celltech Labs Inc.

Reviewed By:



Spencer Watson
Senior Compliance Technologist
Celltech Labs Inc.



TABLE OF CONTENTS	
1.0 INTRODUCTION _____	3
2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT) _____	3
3.0 SAR MEASUREMENT SYSTEM _____	4
4.0 MEASUREMENT SUMMARY _____	5
5.0 DETAILS OF SAR EVALUATION _____	6
6.0 EVALUATION PROCEDURES _____	6
7.0 SYSTEM PERFORMANCE CHECK _____	7
8.0 SIMULATED EQUIVALENT TISSUES _____	8
9.0 SAR SAFETY LIMITS _____	8
10.0 ROBOT SYSTEM SPECIFICATIONS _____	9
11.0 PROBE SPECIFICATION (ET3DV6) _____	10
12.0 PLANAR PHANTOM _____	10
13.0 VALIDATION PLANAR PHANTOM _____	10
14.0 DEVICE HOLDER _____	10
15.0 TEST EQUIPMENT LIST _____	11
16.0 MEASUREMENT UNCERTAINTIES _____	12
17.0 REFERENCES _____	14
APPENDIX A - SAR MEASUREMENT DATA _____	15
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA _____	23
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS _____	26
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS _____	28
APPENDIX E - SYSTEM VALIDATION _____	36
APPENDIX F - PROBE CALIBRATION _____	37

1.0 INTRODUCTION

This measurement report demonstrates compliance of the Uniden America Corporation Model(s): GMR638-2 Portable UHF FRS/GMRS PTT Radio Transceiver FCC ID: AMWUT005 with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]), and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]) and IC RSS-102 Issue 1 (Provisional) (see reference [4]), were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the provisions of the rules are included within this test report.

2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)

Rule Part(s)	FCC 47 CFR §2.1093		
	IC RSS-102 Issue 1 (Provisional)		
Test Procedure(s)	FCC OET Bulletin 65, Supplement C (01-01)		
Device Description	Portable UHF FRS/GMRS PTT Radio Transceiver		
FCC IDENTIFIER	AMWUT005		
IC IDENTIFIER	513C-UT005		
Model(s)	GMR638-2		
Serial No.	004A54000014	Production Unit	
Modulation	FM (UHF)		
Tx Frequency Range(s)	462.5500 - 462.7250 MHz	GMRS Channels 15-22	
	462.5625 - 462.7125 MHz	FRS/GMRS Channels 1-7	
	467.5625 - 467.7125 MHz	FRS Channels 8-14	
Max. RF Output Power Tested	0.323 Watts ERP	462.7125 MHz	
Antenna Type(s) Tested	Fixed Stubby		
Battery Type(s) Tested	NiMH AAA (x4)	1.2 V	750 mAh
	Alkaline AAA (x4)	1.5 V	Duracell Procell 1150 mAh
Body-Worn Accessories Tested	Plastic Belt-Clip (P/N: B5525G1-CF-4)		
Audio Accessories Tested	Generic Earbud with Lapel-Microphone		

3.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE3 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



DASY4 SAR Measurement System with validation phantom



DASY4 SAR Measurement System with Plexiglas planar phantom

4.0 MEASUREMENT SUMMARY

SAR EVALUATION RESULTS

Test Type	Test Date	Freq. (MHz)	Chan.	Test Mode	Battery Type	Antenna Position	Body-worn Accessory	Separation Distance to Planar Phantom (cm)	ERP Start Power (Watts)	Measured SAR 1g (W/kg)		SAR Drift During Test (dB)	Scaled SAR 1g (W/kg) with Droop to 0.34 Watts ERP	
										Duty Cycle			Duty Cycle	
										100%	50%		100%	50%
Face	Jun 20	462.7125	7	CW	Duracell Alkaline	Fixed	--	2.5	0.323	0.590	0.295	-0.170	0.631	0.316
Face	Jun 20	462.7125	7	CW	NiMH	Fixed	--	2.5	0.323	0.544	0.272	-0.286	0.598	0.299
Body	Jun 20	462.7125	7	CW	Duracell Alkaline	Fixed	Earbud-Mic & Belt-Clip	0.7	0.323	0.895	0.448	-0.154	0.944	0.472
Body	Jun 20	462.7125	7	CW	NiMH	Fixed	Earbud-Mic & Belt-Clip	0.7	0.323	1.00	0.500	-0.229	1.07	0.534

ANSI / IEEE C95.1 1999 - SAFETY LIMIT
Spatial Peak - Uncontrolled Exposure / General Population
BRAIN / BODY: 1.6 W/kg (averaged over 1 gram)

Test Date(s)	June 20, 2005				June 20, 2005				Measured Fluid Type	Brain	Body	Unit
Dielectric Constant ϵ_r	450 MHz Brain				450 MHz Body				Atmospheric Pressure	102.1	101.9	kPa
	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	Relative Humidity	32	32	%		
	43.5	$\pm 5\%$	41.8	-3.9%	56.7	$\pm 5\%$	54.9	-3.2%	Ambient Temperature	24.1	24.5	$^{\circ}\text{C}$
Conductivity σ (mho/m)	450 MHz Brain				450 MHz Body				Fluid Temperature	21.3	21.5	$^{\circ}\text{C}$
	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	Fluid Depth	≥ 15	≥ 15	cm		
	0.87	$\pm 5\%$	0.87	0.0%	0.94	$\pm 5\%$	0.92	-2.1%	ρ (Kg/m ³)	1000		

Note(s):

- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- The transmission band of the DUT is less than 10 MHz; therefore mid channel data only is reported (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).
- The power droops measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above test data table. The SAR levels were also scaled up to 0.34 Watts ERP based on the maximum ERP level measured by the EMC test lab.
- A SAR-versus-Time power drift evaluation was performed in the test configuration that reported the maximum-scaled SAR level (Body-worn, NiMH battery). See Appendix A (SAR Test Plots) for SAR-versus-Time power drift evaluation plot.
- The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures reported were consistent for all measurement periods.
- The dielectric parameters of the simulated tissues were measured prior to the evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C for printout of measured fluid dielectric parameters).
- The SAR evaluations were performed within 24 hours of the system performance check.

5.0 DETAILS OF SAR EVALUATION

The Uniden America Corporation Model: GMR638-2 Portable FM UHF FRS/GMRS PTT Radio Transceiver FCC ID: AMWUT005 was compliant for localized Specific Absorption Rate (General Population / Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

- The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm separation distance was maintained between the front of the DUT and the outer surface of the planar phantom.
- The DUT was tested in a body-worn configuration with the back of the radio placed parallel to the outer surface of the planar phantom. The attached plastic belt-clip accessory was touching the planar phantom and provided a 0.7 cm separation distance from the back of the DUT to the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with a generic ear-bud lapel-microphone audio accessory.
- The RF conducted output power of the DUT could not be measured due to a non-detachable antenna. The DUT was evaluated for SAR at the maximum conducted power level preset by the manufacturer.
- The DUT was evaluated for SAR at the maximum ERP level measured prior to the SAR evaluation at Celltech Labs' 3-meter Open Area Test Site using the signal substitution method in accordance with ANSI/TIA-603-C-2004 (see reference [6]).
- The power droops measured by the DASY4 system during the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the test data table (page 5). The SAR levels were also scaled up to 0.34 Watts ERP based on the maximum ERP level measured by the EMC test lab.
- A SAR-versus-Time power drift evaluation was performed in the test configuration that reported the maximum-scaled SAR level. See Appendix A (SAR Test Plots) for SAR-versus-Time power drift evaluation plot.
- The area scan evaluation was performed with fully charged batteries. After the area scan was completed the radio was cooled down and the batteries were replaced with fully charged batteries prior to the zoom scan evaluation.
- The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
- The SAR evaluations were performed using a Plexiglas planar phantom.

6.0 EVALUATION PROCEDURES

- The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
 - For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
 - Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
 - A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
- Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluation a system check was performed using a Plexiglas planar phantom and 450MHz dipole (see Appendix E for system validation procedures). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using an ALS-PR-DIEL Dielectric Probe Kit and HP 8753ET Network Analyzer (see Appendix C for printout of measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ (see Appendix B for system performance check test plot).

SYSTEM PERFORMANCE CHECK																
Test Date	450MHz Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.						
6/20/05	Brain	1.23 $\pm 10\%$	1.29	+4.9%	43.5 $\pm 5\%$	41.8	-3.9%	0.87 $\pm 5\%$	0.87	0.0%	1000	22.7	21.3	≥ 15	41	102.3

Note(s):
 1. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.

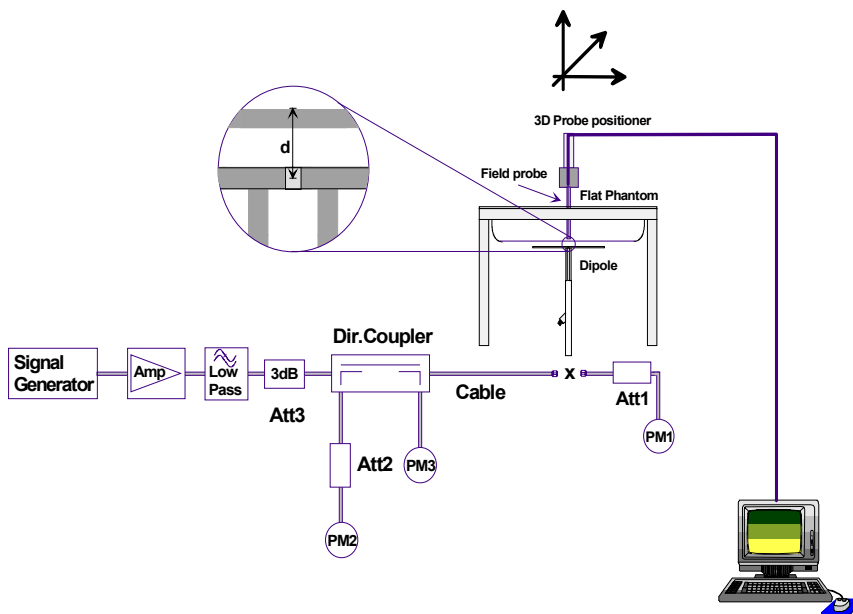


Figure 1. System Performance Check Setup Diagram



450 MHz Dipole Setup

8.0 SIMULATED EQUIVALENT TISSUES

The 450MHz brain and body simulated tissue mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The fluid was prepared according to standardized procedures, and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz Brain	450 MHz Body
	System Check & DUT Evaluation	DUT Evaluation
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

9.0 SAR SAFETY LIMITS

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10g)	4.0	20.0

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

10.0 ROBOT SYSTEM SPECIFICATIONS

Specifications

POSITIONER: Stäubli Unimation Corp. Robot Model: RX60L
Repeatability: 0.02 mm
No. of axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: AMD Athlon XP 2400+
Clock Speed: 2.0 GHz
Operating System: Windows XP Professional

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic
Software: DASY4 software
Connecting Lines: Optical downlink for data and status info.
 Optical uplink for commands and clock

DASY4 Measurement Server

Function: Real-time data evaluation for field measurements and surface detection
Hardware: PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections: COM1, COM2, DAE, Robot, Ethernet, Service Interface

E-Field Probe

Model: ET3DV6
Serial No.: 1590
Construction: Triangular core fiber optic detection system
Frequency: 10 MHz to 6 GHz
Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Phantom(s)

Evaluation Phantom

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 2.0 mm \pm 0.1 mm
Outer Dimensions: 75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)

Validation Phantom (≤ 450 MHz)

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 6.2 mm \pm 0.1 mm
Outer Dimensions: 86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)

11.0 PROBE SPECIFICATION (ET3DV6)

Construction: Symmetrical design with triangular core
 Built-in shielding against static charges
 PEEK enclosure material (resistant to organic solvents, e.g. glycol)

Calibration: In air from 10 MHz to 2.5 GHz
 In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)

Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity: ± 0.2 dB in brain tissue (rotation around probe axis)
 ± 0.4 dB in brain tissue (rotation normal to probe axis)

Dynamic Range: $5 \mu\text{W/g}$ to > 100 mW/g; Linearity: ± 0.2 dB

Surface Detection: ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces

Dimensions: Overall length: 330 mm
 Tip length: 16 mm
 Body diameter: 12 mm
 Tip diameter: 6.8 mm
 Distance from probe tip to dipole centers: 2.7 mm

Application: General dosimetry up to 3 GHz
 Compliance tests of mobile phone



ET3DV6 E-Field Probe

12.0 PLANAR PHANTOM

The planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The planar phantom is mounted on the side of the DASY4 compact system table.



Plexiglas Planar Phantom

13.0 VALIDATION PLANAR PHANTOM

The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for SAR validations at 450MHz and below. The validation planar phantom is mounted in the table of the DASY4 compact system.



Validation Planar Phantom

14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

15.0 TEST EQUIPMENT LIST

USED	TEST EQUIPMENT	ASSET NO.	SERIAL NO.	DATE CALIBRATED		CALIBRATION DUE DATE
	DESCRIPTION					
x	Schmid & Partner DASY4 System	-	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	N/A	N/A	N/A
x	-Robot	00046	599396-01	N/A	N/A	N/A
	-DAE4	00019	353	15Jun05		15Jun06
x	-DAE3	00018	370	25Jan05		25Jan06
	-ET3DV6 E-Field Probe	00016	1387	18Mar05		18Mar06
x	-ET3DV6 E-Field Probe	00017	1590	20May05		20May06
	-EX3DV4 E-Field Probe	00125	3547	21Jan05		21Jan06
	-300MHz Validation Dipole	00023	135	26Oct04		26Oct05
x	-450MHz Validation Dipole	00024	136	04Nov04		04Nov05
	-835MHz Validation Dipole	00022	411	Brain	30Mar05	30Mar06
				Body	12Apr05	12Apr06
	-900MHz Validation Dipole	00020	054	Brain	10Jun05	10Jun06
				Body	10Jun05	10Jun06
	-1800MHz Validation Dipole	00021	247	Brain	14Jun05	14Jun06
				Body	14Jun05	14Jun06
	-1900MHz Validation Dipole	00032	151	Brain	17Jun05	17Jun06
				Body	22Apr05	22Apr06
	-2450MHz Validation Dipole	00025	150	Brain	30Sep04	30Sep05
				Body	22Apr05	22Apr06
	-5000MHz Validation Dipole	00126	1031	Brain	11Jan05	11Jan06
				Body	11Jan05	11Jan06
	-SAM Phantom V4.0C	00154	1033	N/A		N/A
	-Barski Planar Phantom	00155	03-01	N/A		N/A
x	-Plexiglas Planar Phantom	00156	161	N/A		N/A
x	-Validation Planar Phantom	00157	137	N/A		N/A
	HP 85070C Dielectric Probe Kit	00033	N/A	N/A		N/A
x	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A		N/A
	Gigatronics 8652A Power Meter	00110	1835801	16Apr05		16Apr06
x	Gigatronics 8652A Power Meter	00008	1835267	29Apr05		29Apr06
	Gigatronics 8652A Power Meter	00007	1835272	18Oct04		18Oct05
	Gigatronics 80701A Power Sensor	00013	1833713	11Oct04		11Oct05
x	Gigatronics 80701A Power Sensor	00011	1833542	08Oct04		08Oct05
x	Gigatronics 80701A Power Sensor	00109	1834366	16Apr05		16Apr06
x	HP 8753ET Network Analyzer	00134	US39170292	04May05		04May06
x	HP 8648D Signal Generator	00005	3847A00611	29Apr05		29Apr06
	Rohde & Schwarz SMR40 Signal Generator	00006	100104	12Apr05		12Apr06
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	N/A		N/A

16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	C _i 1g	Standard Uncertainty ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration	± 4.0	Normal	1	1	± 4.0	∞
Axial isotropy of the probe	± 4.7	Rectangular	√3	(1-c _p)	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	√3	(c _p)	± 3.9	∞
Spatial resolution	± 0.0	Rectangular	√3	1	± 0.0	∞
Boundary effects	± 5.5	Rectangular	√3	1	± 3.2	∞
Probe linearity	± 4.7	Rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	√3	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	√3	1	± 0.5	∞
Integration time	± 1.4	Rectangular	√3	1	± 0.8	∞
RF ambient conditions	± 3.0	Rectangular	√3	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	√3	1	± 1.7	∞
Extrapolation & integration	± 3.9	Rectangular	√3	1	± 2.3	∞
Test Sample Related						
Device positioning	± 6.0	Normal	√3	1	± 6.7	12
Device holder uncertainty	± 5.0	Normal	√3	1	± 5.9	8
Power drift	± 5.0	Rectangular	√3		± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	√3	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid conductivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Combined Standard Uncertainty					± 13.03	
Expanded Uncertainty (k=2)					± 26.07	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

MEASUREMENT UNCERTAINTIES (Cont.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	C_i 1g	Standard Uncertainty ±% (1g)	V_i or V_{eff}
Measurement System						
Probe calibration	± 4.0	Normal	1	1	± 4.0	∞
Axial isotropy of the probe	± 4.7	Rectangular	√3	(1- c_p)	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	√3	(c_p)	± 3.9	∞
Spatial resolution	± 0.0	Rectangular	√3	1	± 0.0	∞
Boundary effects	± 5.5	Rectangular	√3	1	± 3.2	∞
Probe linearity	± 4.7	Rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	√3	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	√3	1	± 0.5	∞
Integration time	± 1.4	Rectangular	√3	1	± 0.8	∞
RF ambient conditions	± 3.0	Rectangular	√3	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	√3	1	± 1.7	∞
Extrapolation & integration	± 3.9	Rectangular	√3	1	± 2.3	∞
Dipole						
Dipole Axis to Liquid Distance	± 2.0	Rectangular	√3	1	± 1.2	∞
Input Power	± 4.7	Rectangular	√3	1	± 2.7	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	√3	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid conductivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Combined Standard Uncertainty					± 9.58	
Expanded Uncertainty (k=2)					± 19.16	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

Test Report S/N:	061705AMW-T649-S95U	
Test Date(s):	June 20, 2005	Issue 1
Test Type:	FCC/IC SAR Evaluation	

17.0 REFERENCES

- [1] Federal Communications Commission, "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6.
- [3] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada, "Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields", Radio Standards Specification RSS-102 Issue 1 (Provisional): September 1999.
- [5] IEEE Standard 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] ANSI/TIA-603-C, "Land Mobile FM or PM Communications Equipment - Measurement and Performance Standards": December 2004.

Test Report S/N:	061705AMW-T649-S95U	
Test Date(s):	June 20, 2005	Issue 1
Test Type:	FCC/IC SAR Evaluation	

APPENDIX A - SAR MEASUREMENT DATA

Date Tested: 06/20/2005

Face-Held SAR - Alkaline AAA Batteries (Duracell Procell)

DUT: Uniden Model: GMR638-2; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: 004A54000014

Ambient Temp: 24.1 °C; Fluid Temp: 21.3 °C; Barometric Pressure: 102.1 kPa; Humidity: 32%

Communication System: FM UHF

RF Output Power: 0.323 Watts (ERP)

Frequency: 462.7125 MHz; Channel 7; Duty Cycle: 1:1

1.5V 1150mAh Duracell ProCell AAA Alkaline Batteries (x4)

Medium: HSL450 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(7.8, 7.8, 7.8); Calibrated: 20/05/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Face-Held - 2.5 cm Separation Distance/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.0 V/m; Power Drift = -0.170 dB

Peak SAR (extrapolated) = 0.907 W/kg

SAR(1 g) = 0.590 mW/g; SAR(10 g) = 0.415 mW/g

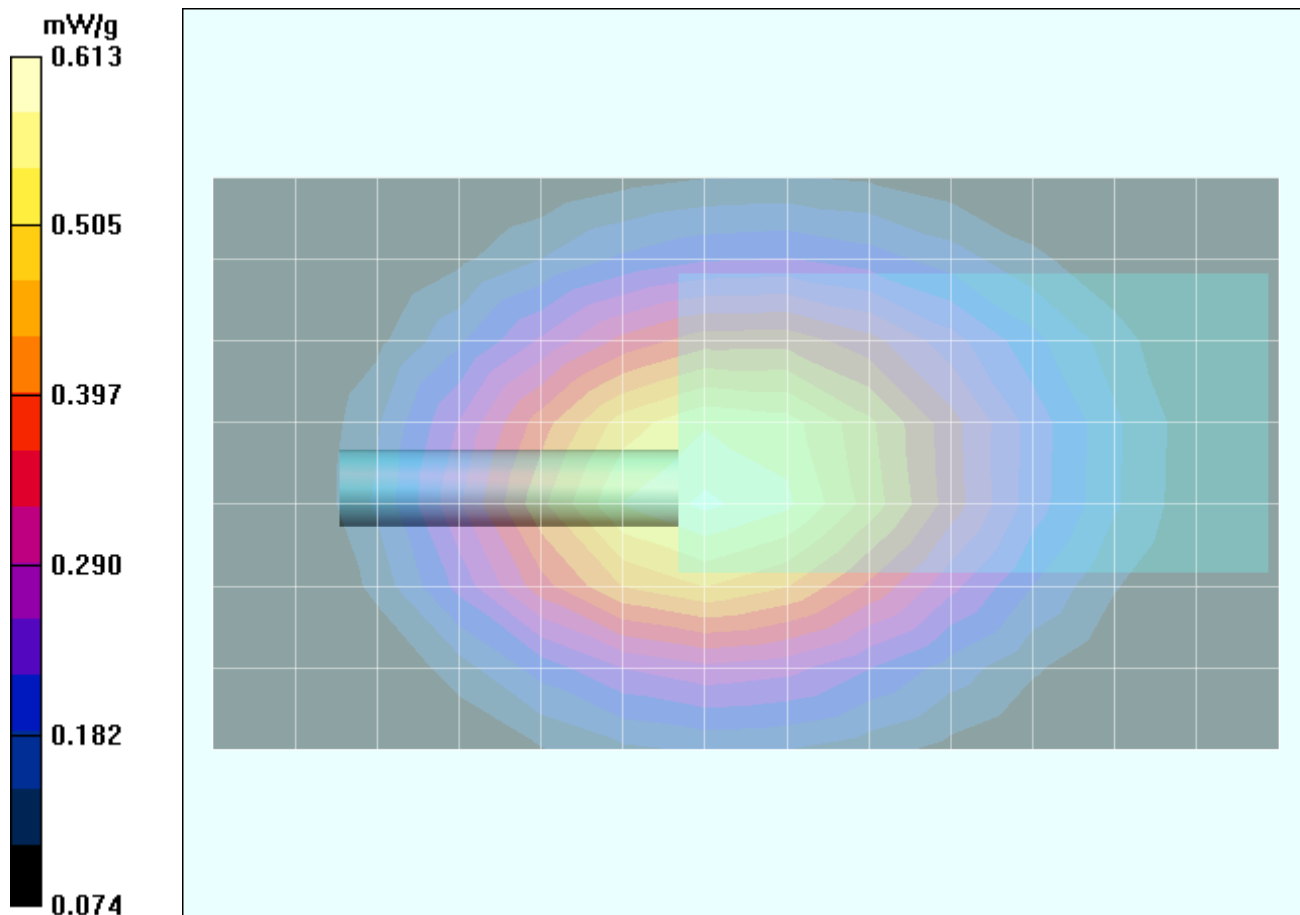

Z-Axis Scan

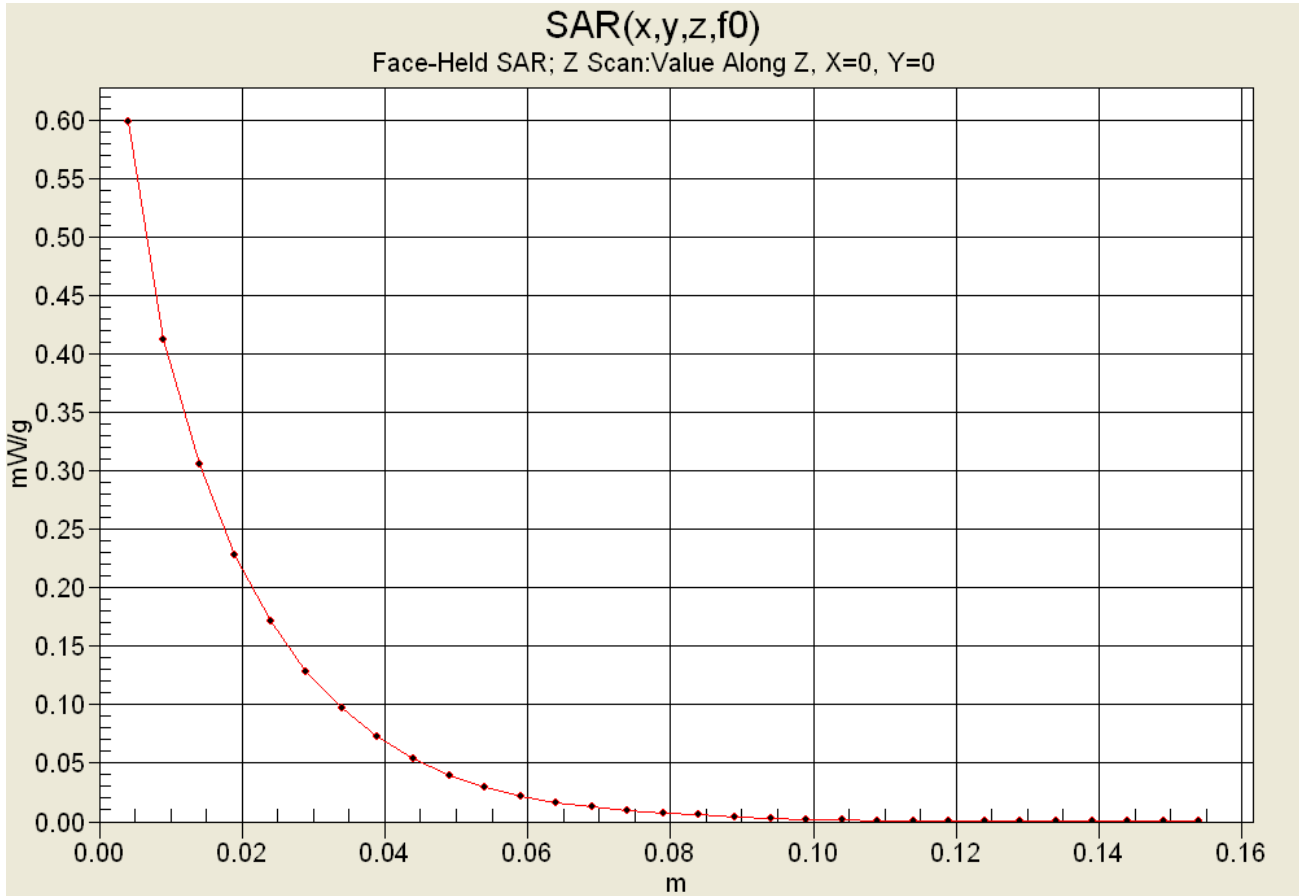

Date Tested: 06/20/2005

Face-Held SAR - NiMH AAA Batteries

DUT: Uniden Model: GMR638-2; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: 004A54000014

Ambient Temp: 24.1 °C; Fluid Temp: 21.3 °C; Barometric Pressure: 102.1 kPa; Humidity: 32%

Communication System: FM UHF

RF Output Power: 0.323 Watts (ERP)

Frequency: 462.7125 MHz; Channel 7; Duty Cycle: 1:1

1.2V 750mAh NiMH AAA Batteries (x4)

Medium: HSL450 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(7.8, 7.8, 7.8); Calibrated: 20/05/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146


Face-Held - 2.5 cm Separation Distance/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5 cm Separation Distance/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.9 V/m; Power Drift = -0.286 dB

Peak SAR (extrapolated) = 0.834 W/kg

SAR(1 g) = 0.544 mW/g; SAR(10 g) = 0.384 mW/g

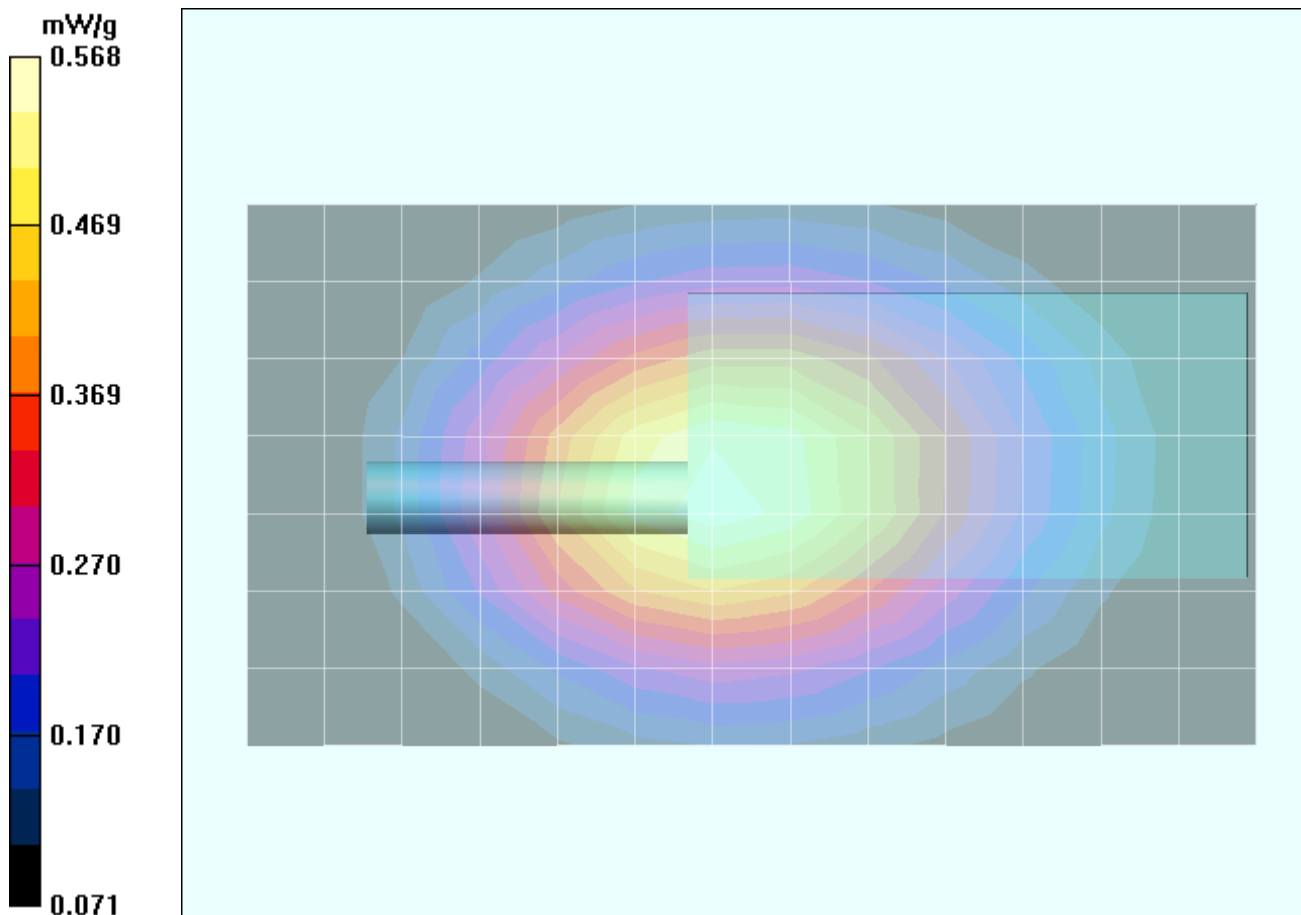

Date Tested: 06/20/2005

Body-Worn SAR - Alkaline AAA Batteries (Duracell Procell)

DUT: Uniden Model: GMR638-2; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: 004A54000014

Body-Worn Accessories: Plastic Belt-Clip (P/N: B5525G1-CF-4)

Audio Accessories: Generic Earbud with Lapel-Microphone

Ambient Temp: 24.5 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 32%

Communication System: FM UHF

RF Output Power: 0.323 Watts (ERP)

Frequency: 462.7125 MHz; Channel 7; Duty Cycle: 1:1

1.5V 1150mAh Duracell ProCell AAA Alkaline Batteries (x4)

Medium: M450 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(7.7, 7.7, 7.7); Calibrated: 20/05/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DASy4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 0.7 cm Belt-Clip Separation Distance/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 0.7 cm Belt-Clip Separation Distance/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.8 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.624 mW/g

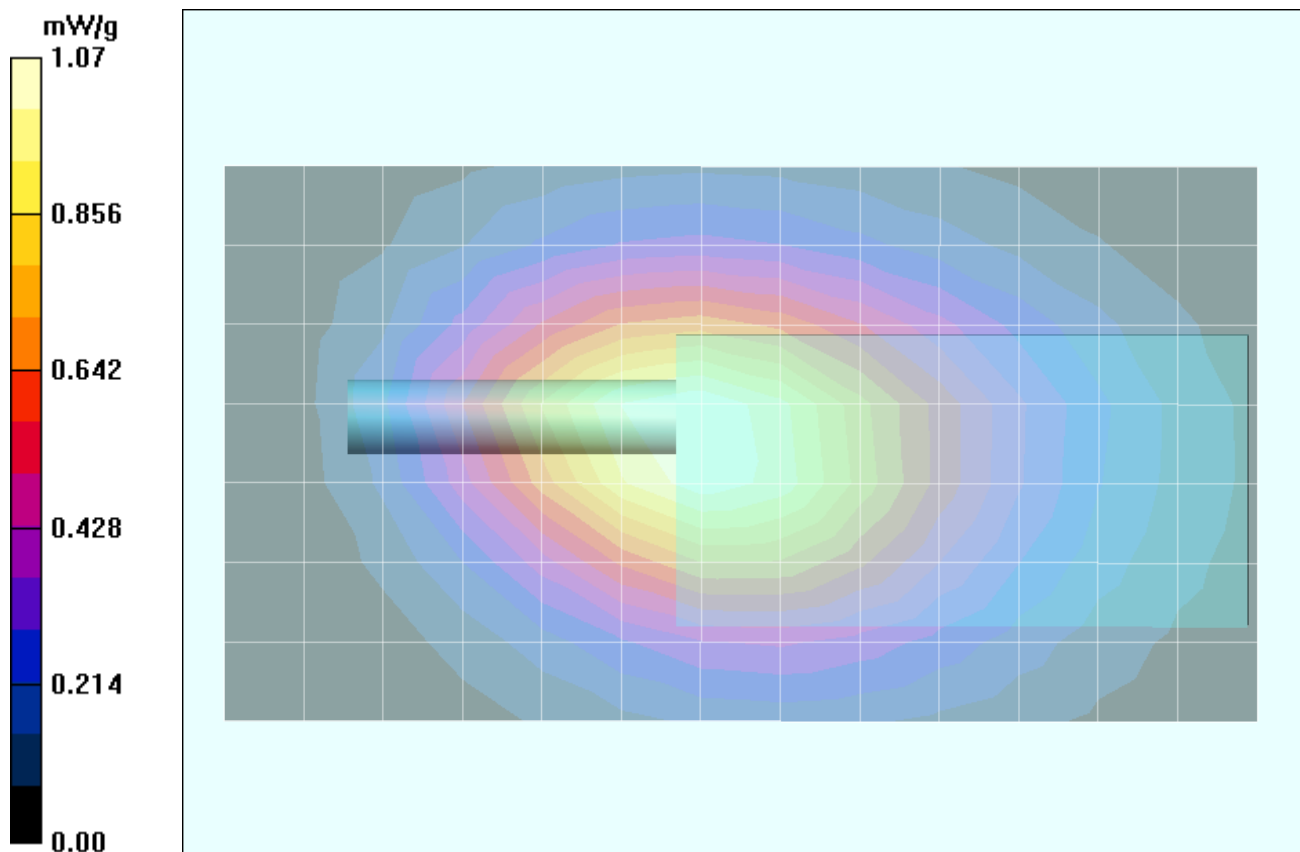

Date Tested: 06/20/2005

Body-Worn SAR - NiMH AAA Batteries

DUT: Uniden Model: GMR638-2; Type: Portable UHF FRS/GMRS PTT Radio Transceiver; Serial: 004A54000014

Body-Worn Accessories: Plastic Belt-Clip (P/N: B5525G1-CF-4)

Audio Accessories: Generic Earbud with Lapel-Microphone

Ambient Temp: 24.5 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.9 kPa; Humidity: 32%

Communication System: FM UHF

RF Output Power: 0.323 Watts (ERP)

Frequency: 462.7125 MHz; Channel 7; Duty Cycle: 1:1

1.2V 750mAh NiMH AAA Batteries (x4)

Medium: M450 ($\sigma = 0.92$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(7.7, 7.7, 7.7); Calibrated: 20/05/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 25/01/2005

- Phantom: Planar; Type: Plexiglas; Serial: 161

- Measurement SW: DAS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body-Worn - 0.7 cm Belt-Clip Separation Distance/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 0.7 cm Belt-Clip Separation Distance/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 32.3 V/m; Power Drift = -0.229 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.00 mW/g; SAR(10 g) = 0.701 mW/g

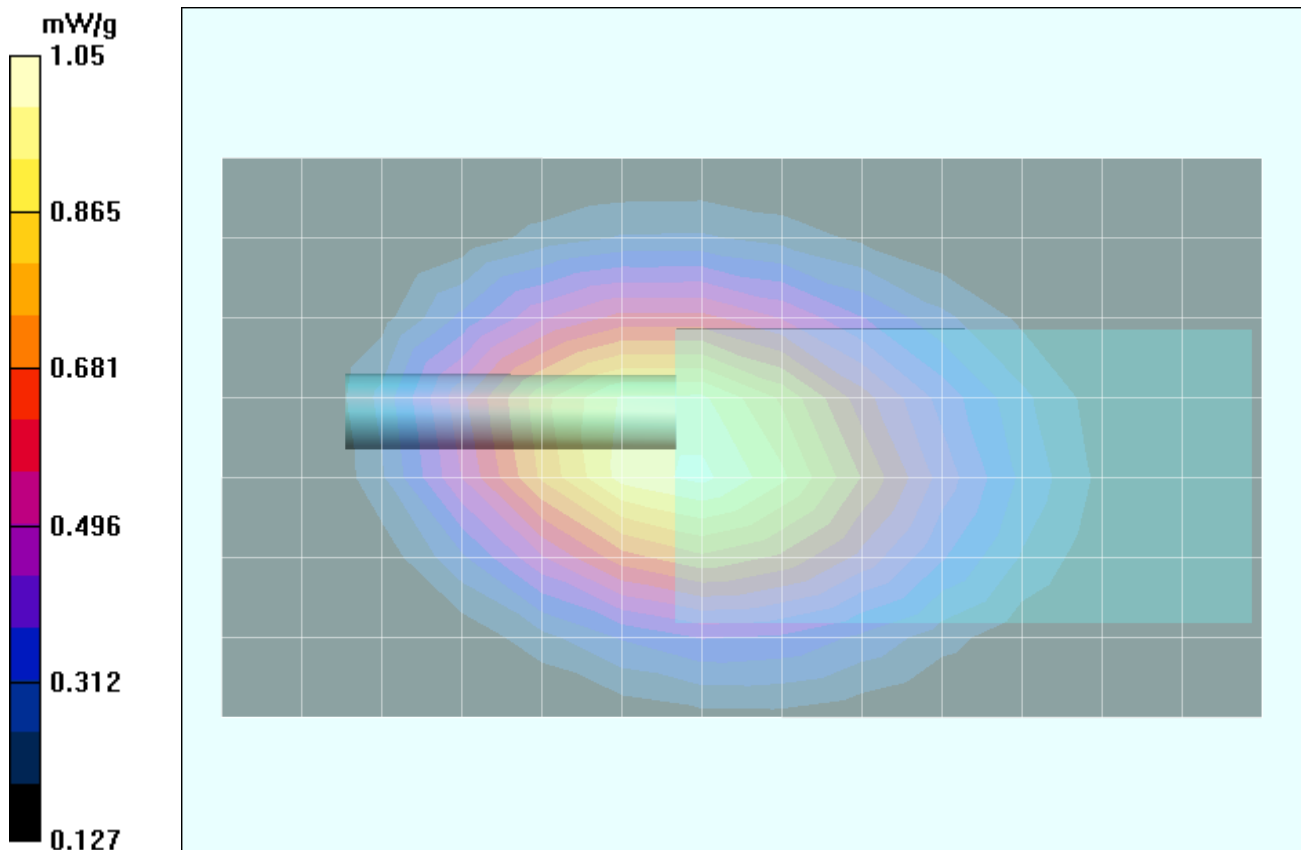


Z-Axis Scan

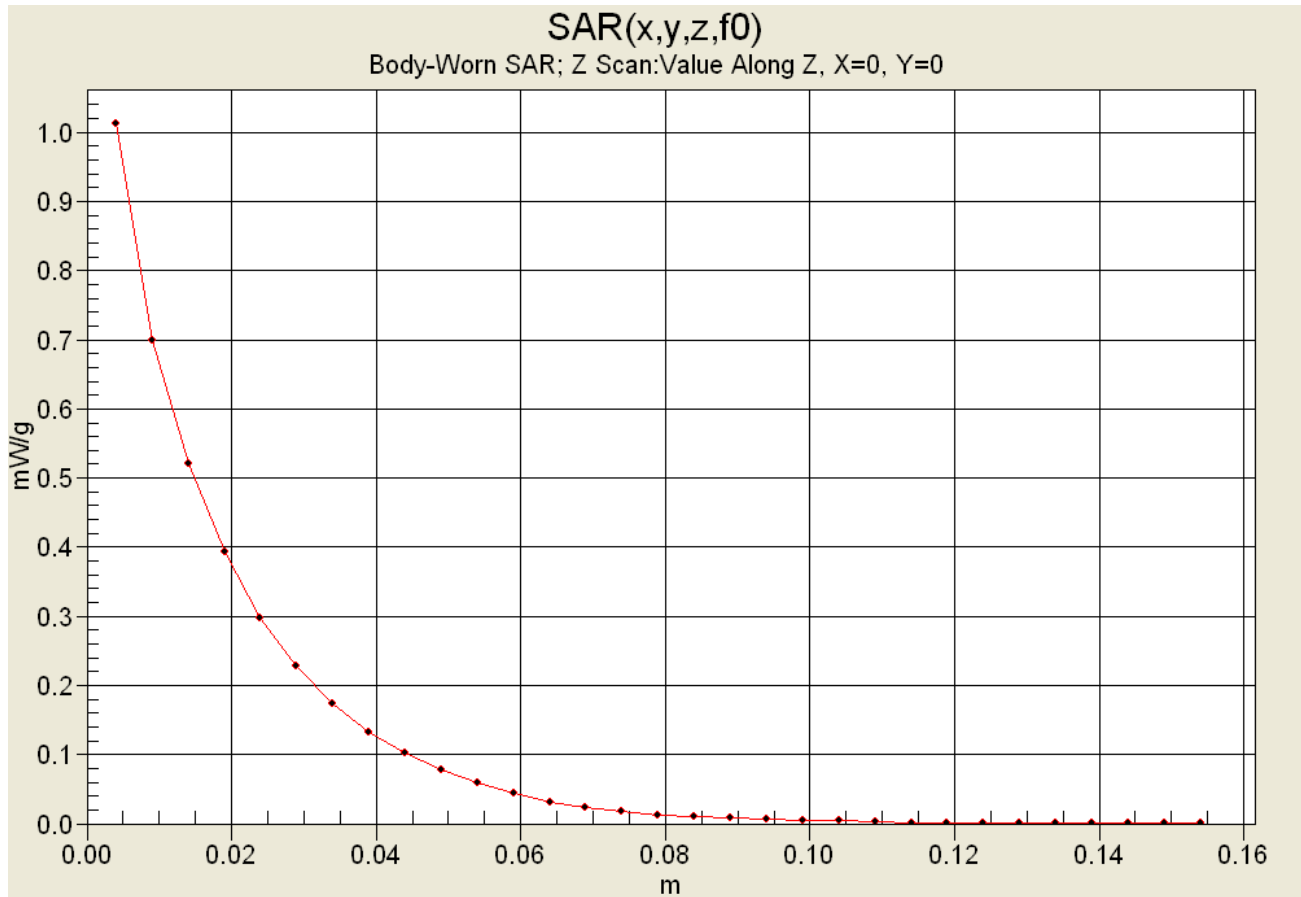

SAR-versus-Time Power Drift Evaluation

Body-Worn with Belt-Clip & Earbud/Lapel-Microphone
 NiMH Batteries (x4)
 Channel 7 - 462.7125 MHz

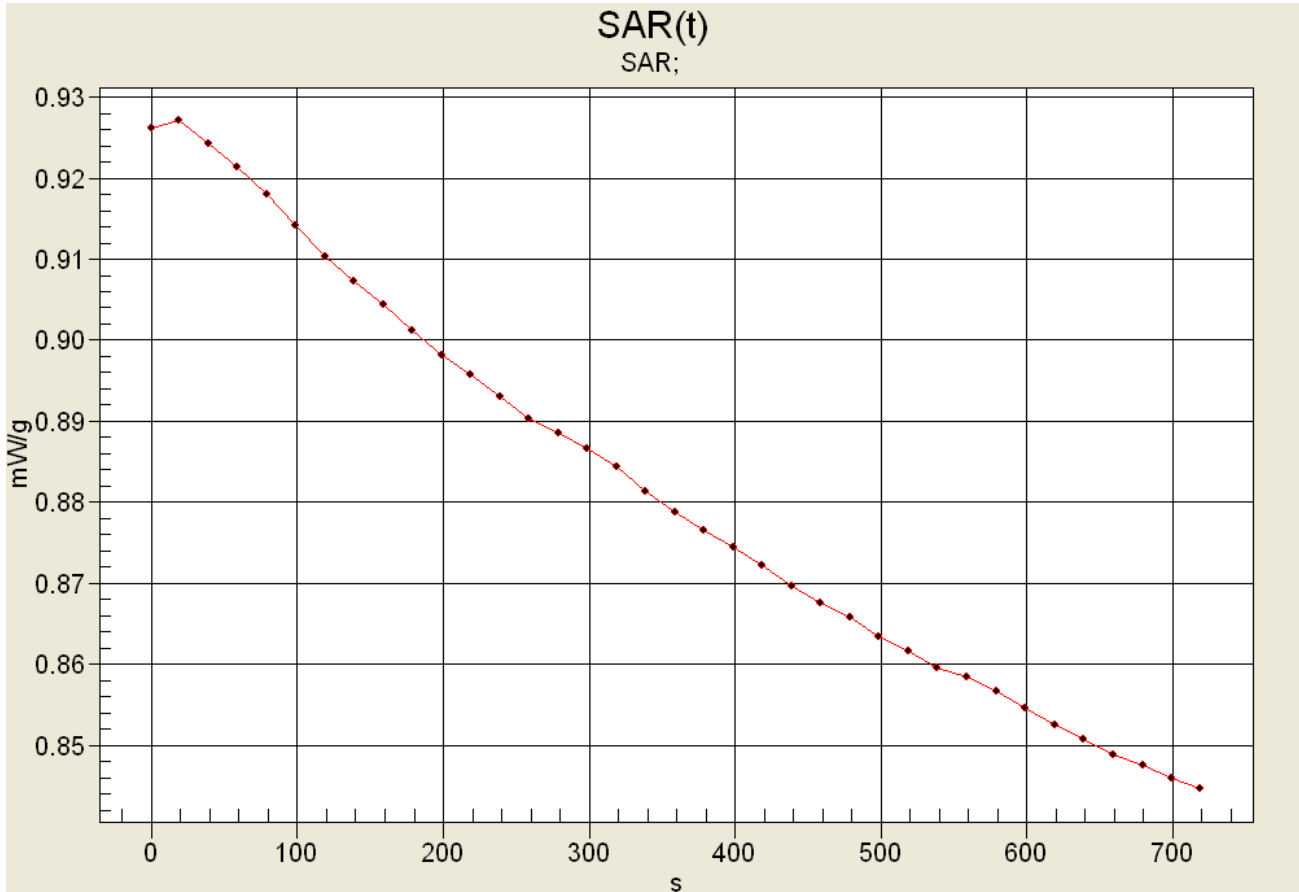

High SAR: 0.927106 mW/g
 Low SAR: 0.844695 mW/g (-0.4043 dB)
 SAR after 340s: 0.881397 mW/g (-0.2196 dB)
 (340s = Zoom Scan Duration)
 (720s = Area Scan Duration)

Test Report S/N:	061705AMW-T649-S95U	
Test Date(s):	June 20, 2005	Issue 1
Test Type:	FCC/IC SAR Evaluation	

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Date Tested: 06/20/2005

System Performance Check - 450 MHz Dipole

DUT: Dipole 450 MHz; Model: D450V2; Type: System Performance Check; Serial: 136; Calibrated: 11/04/2004

Ambient Temp: 22.7 °C; Fluid Temp: 21.3 °C; Barometric Pressure: 102.3 kPa; Humidity: 41%

Communication System: CW
 Forward Conducted Power: 250 mW
 Frequency: 450 MHz; Duty Cycle: 1:1
 Medium: HSL450 ($\sigma = 0.87$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(7.8, 7.8, 7.8); Calibrated: 20/05/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 25/01/2005
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

450 MHz Dipole - System Performance Check/Area Scan (6x11x1):


Measurement grid: dx=15mm, dy=15mm

450 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 39.9 V/m; Power Drift = -0.060 dB
 Peak SAR (extrapolated) = 2.21 W/kg
SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.839 mW/g

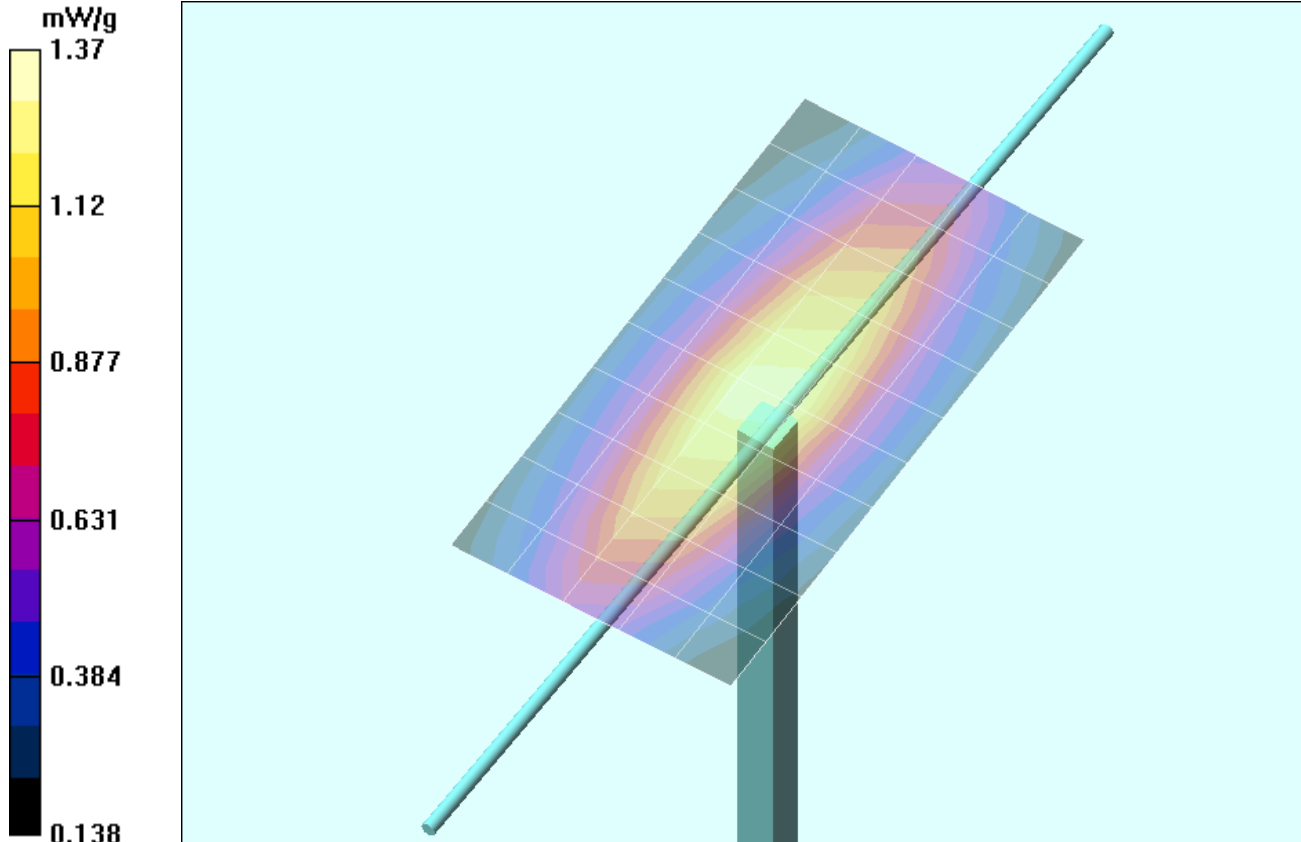

Z-Axis Scan

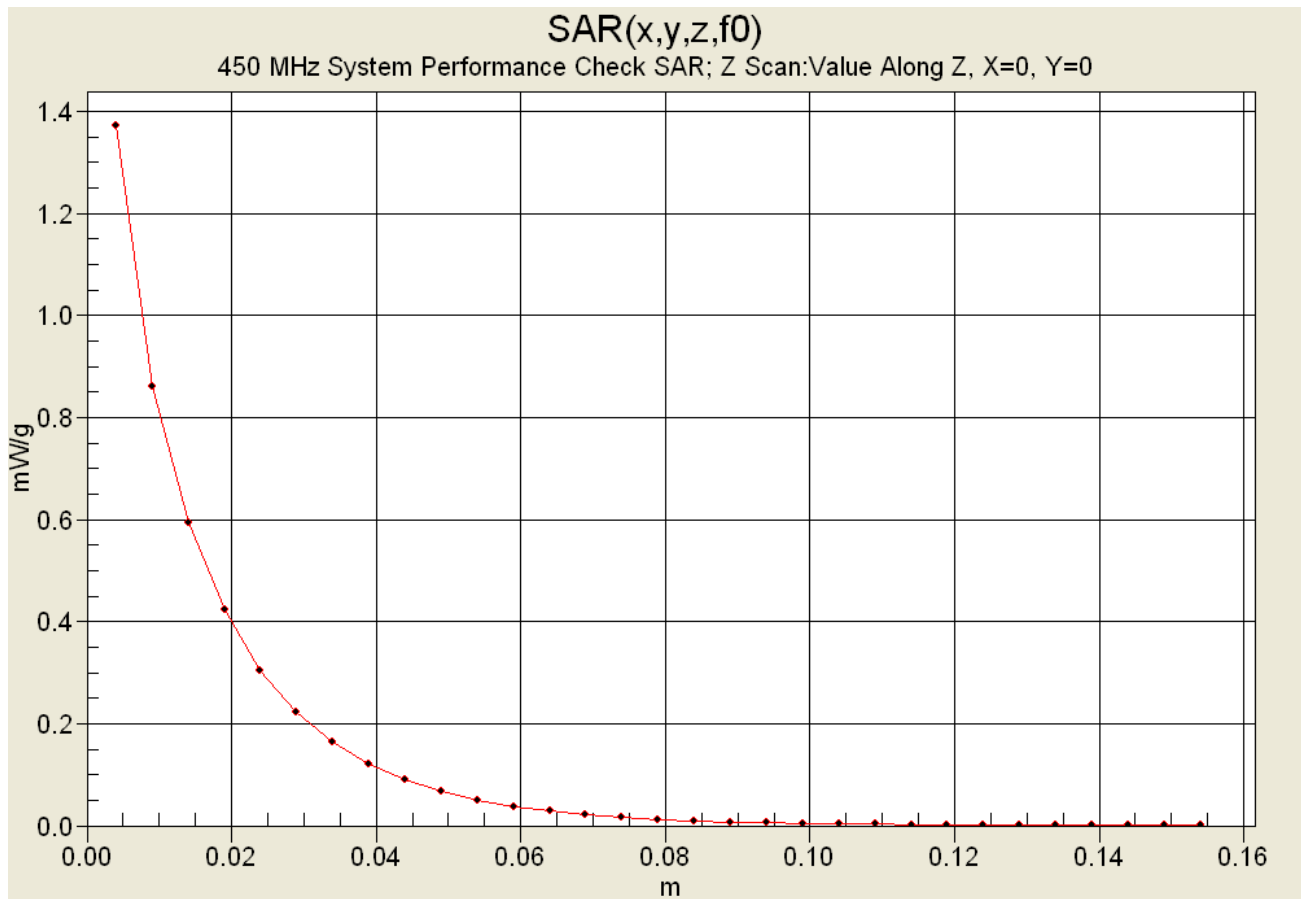

Test Report S/N:	061705AMW-T649-S95U	
Test Date(s):	June 20, 2005	Issue 1
Test Type:	FCC/IC SAR Evaluation	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Test Report S/N:	061705AMW-T649-S95U	
Test Date(s):	June 20, 2005	Issue 1
Test Type:	FCC/IC SAR Evaluation	

450 MHz System Performance Check & DUT Evaluation (Face)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Mon 20/Jun/2005

Freq Frequency(GHz)

FCC_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	44.28	0.78
0.3600	44.58	0.87	43.97	0.79
0.3700	44.46	0.87	43.56	0.80
0.3800	44.34	0.87	43.48	0.81
0.3900	44.22	0.87	42.96	0.81
0.4000	44.10	0.87	42.72	0.82
0.4100	43.98	0.87	42.62	0.83
0.4200	43.86	0.87	42.47	0.84
0.4300	43.74	0.87	42.10	0.85
0.4400	43.62	0.87	41.87	0.86
0.4500	43.50	0.87	41.81	0.87
0.4600	43.45	0.87	41.40	0.88
0.4700	43.40	0.87	41.32	0.89
0.4800	43.34	0.87	40.93	0.89
0.4900	43.29	0.87	40.52	0.90
0.5000	43.24	0.87	40.37	0.91
0.5100	43.19	0.87	40.21	0.92
0.5200	43.14	0.88	40.14	0.93
0.5300	43.08	0.88	39.59	0.94
0.5400	43.03	0.88	39.64	0.95
0.5500	42.98	0.88	39.26	0.96

450 MHz DUT Evaluation (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Mon 20/Jun/2005

Freq Frequency(GHz)

FCC_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma


FCC_eB FCC Limits for Body Epsilon

FCC_sB FCC Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM


Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	56.63	0.83
0.3600	57.60	0.93	56.45	0.84
0.3700	57.50	0.93	56.17	0.84
0.3800	57.40	0.93	55.92	0.86
0.3900	57.30	0.93	55.71	0.87
0.4000	57.20	0.93	55.60	0.87
0.4100	57.10	0.93	55.41	0.88
0.4200	57.00	0.94	55.20	0.89
0.4300	56.90	0.94	55.06	0.90
0.4400	56.80	0.94	54.67	0.91
0.4500	56.70	0.94	54.85	0.92
0.4600	56.66	0.94	54.56	0.92
0.4700	56.62	0.94	54.53	0.94
0.4800	56.58	0.94	54.26	0.94
0.4900	56.54	0.94	54.11	0.96
0.5000	56.51	0.94	54.02	0.96
0.5100	56.47	0.94	53.97	0.97
0.5200	56.43	0.95	53.70	0.98
0.5300	56.39	0.95	53.24	0.99
0.5400	56.35	0.95	53.18	1.00
0.5500	56.31	0.95	53.26	1.01

Applicant:	Uniden America Corporation	FCC ID:	AMWUT005	IC ID:	513C-UT005	
Model:	GMR638-2	Portable FM UHF FRS/GMRS PTT Radio Transceiver		462.5500 - 467.7125 MHz		
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.				27 of 37


Test Report S/N:	061705AMW-T649-S95U	
Test Date(s):	June 20, 2005	Issue 1
Test Type:	FCC/IC SAR Evaluation	

APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

FACE-HELD SAR TEST SETUP PHOTOGRAPHS
 2.5 cm Separation Distance from Front of Radio to Planar Phantom

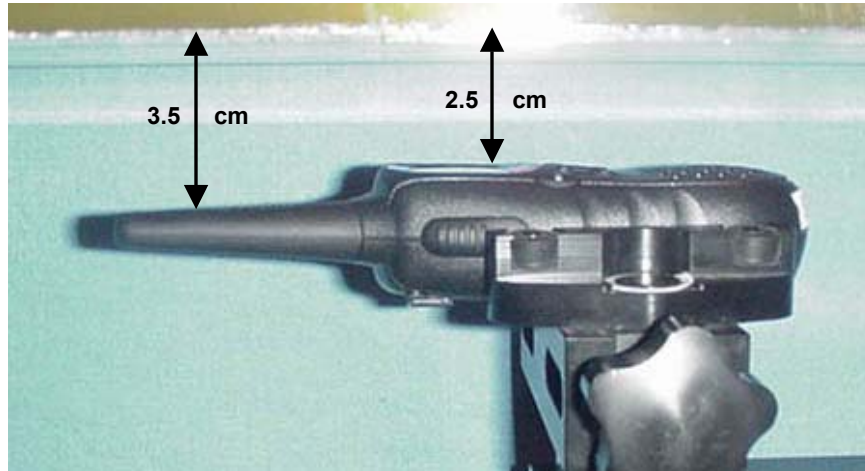

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
0.7 cm Belt-Clip Separation Distance from Back of Radio to Planar Phantom
Generic Earbud with Lapel-Microphone Audio Accessory

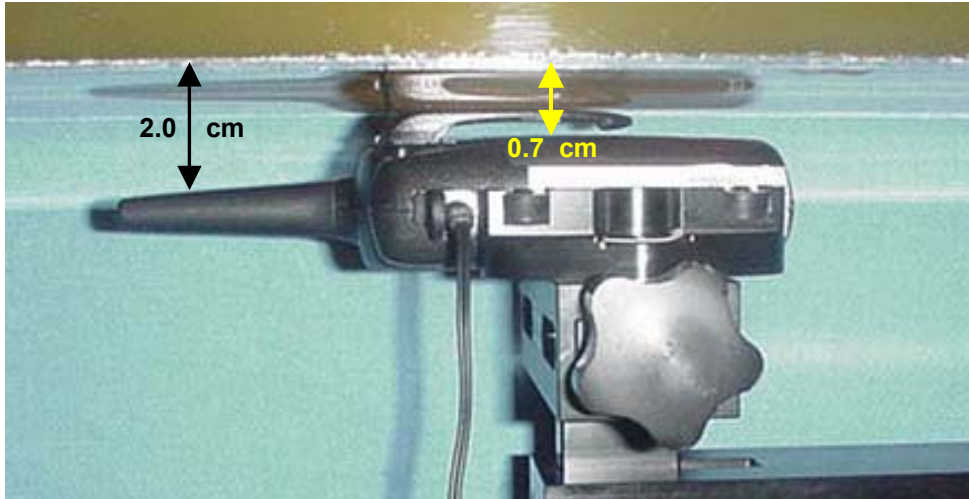

SAR TEST SETUP PHOTOGRAPHS



Face-Held Configuration



Body-Worn Configuration

DUT PHOTOGRAPHS



Front of DUT



Back of DUT



Back of DUT with Belt-Clip



Top of DUT



Bottom of DUT

DUT PHOTOGRAPHS



Left Side of DUT with Belt-Clip



Right Side of DUT with Belt-Clip



Plastic Belt-Clip (P/N: B5525G1-CF-4)

DUT PHOTOGRAPHS



DUT with Generic Earbud with Lapel-Microphone Audio Accessory

DUT PHOTOGRAPHS



DUT Battery Compartment



NiMH AAA Batteries



Alkaline AAA Batteries