

Test Report

TEST PROCEDURES AND TEST SITE DESCRIPTION

DATE: 1-25-06
FCC ID: AMWUT017
MODEL: GMR1558(XX)
DESCRIPTION: 22CH FRS/GMRS RADIO

Tested by: Mr. Hiroyuki Sakai, Uniden Corporation

MEASUREMENT ITEMS	Section No.
1. DC Voltage & Current into Final Device	2.1033(C)(8)
2. RF Output Power	2.1046
3. Modulation Characteristics (Audio Roll-off)	2.1047
4. Modulation Characteristics (Audio Frequency Response)	2.1047
5. Modulation Characteristics (Modulation Limiting)	2.1047 & 95.637(a)
6. Occupied Bandwidth	2.1049(c)(1) & 95.635(b)(1)(3)(7)
7. Spurious & Harmonic Emission at Antenna Terminal	2.1051
8. Field Strength of Spurious/Harmonic Radiation	2.1053 & 95.635(b)(7)
9. Frequency Stability (Temperature)	2.1055
10. Frequency Stability (Voltage)	2.1055

NOTE: List of measurement equipment and test site description are included in this EXHIBIT.

1. DC Voltage & Current into Final Device 2.1033(C)(8)

To measure the DC Voltage and Current into Final Amplifying Device, the measuring equipment was connected to the actual P.C.Board of the transmitter.

FCC limits: Not specified

Test Results: Refer to test data

2. RF Output Power 2.1046 & 95.639

The unit was tuned-up in accordance with the alignment procedure stated in the EXHIBIT-6, and was loaded into a 50-ohm resistive termination. The unit was powered through its normally supplied power cable by a DC power supply. Power supply voltage was set to nominal voltage at the power supply terminals with the transmitter off.

The unit was operated for three consecutive test cycles of 15 minutes standby and 5 minutes in transmitting. At the end of the third 5 minutes period, the RF output power is measured. During the test, no components of the emission spectrum exceed the limit specified in the applicable rule part for occupied bandwidth or emission limitations.

FCC limits: 0.5 W ERP for FRS and 5W ERP for GMRS

Test Results: Refer to test data

3. Modulation Characteristics (Audio Roll-off) 2.1047

To measure the audio roll-off filter response, an audio frequency oscillator and AF VTVM were connected to the actual P.C.Board of the transmitter. AF VTVM and an oscilloscope monitored the output of the audio filter. An AF input level was maintained was maintained constant at least 10 dB below the saturation level at maximum response frequency. The measurement was made under the above conditions by varying the frequency between 1 kHz and 100 kHz.

FCC limits: 3 kHz - 20 kHz: $-60 \log_{10} (F/3)$ dB

Test Results: Refer to test data

4. Modulation Characteristics (Audio Frequency Response) 2.1047

or 80dB, whichever is lesser attenuation
for more than 250% of assigned frequency

Test Results: Refer to test data

7. Spurious & Harmonic Emission at Antenna Terminal 2.1051

Spurious radiation are the radio frequency voltage or power generated within the equipment and appearing at the equipment's output terminals when properly loaded with its characteristic non-radiating load.

The unit was modulated with a 2500 Hz tone at an input level 16dB greater than that required 50% modulation. The spectrum was scanned from the lowest frequency generated in the equipment to the tenth harmonic of the carrier.

FCC limits: $43 + 10\log_{10}$ (RF output power in Watts) dB

Test Results: Refer to test data.

8. Field Strength of Spurious & Harmonic Radiation 2.1053

Measurement Procedure & Test Site Description

Field strength measurements of radiated spurious emissions were made on a 3-meter range maintained by Uniden Corporation in Japan. Complete description and measurement data of this test site have been placed on file with the Commission. The equipment was scanned for radiated emissions in a scheduled enclosure prior to open field testing.

For each spurious or harmonic frequency, the antenna was raised and lowered to obtain a maximum reading on the Spectrum Analyzer with antenna horizontally polarized. Then the turntable, on which the equipment under test was placed, was rotated a minimum of 360 degree to further increase the reading on the Spectrum Analyzer. This procedure was repeated with the antenna vertically polarized.

FCC limits: $43 + 10\log_{10}$ (RF output power in Watts) dB

Test Results: Refer to test data

9. Frequency Stability (Temperature) 2.1055(a)(2)

Frequency measurement was performed at the extremes of throughout the range -20 °C to +50 °C (-30 °C to +50 °C for GMRS) and at intervals of not more than 10 degrees C throughout the range. A period of time sufficient to stabilize all of the components in the equipment was allowed prior to frequency measurement.

The frequency of the unit was measured by extracting a sample of the carrier and measuring its center frequency by equipment having a degree accuracy at least 10 times that of the minimum to be measured.

FCC limits: 0.00025%, 2.5 ppm for FRS
 0.00050%, 5.0 ppm for GMRS

Test Results: Refer to test data

10. Frequency Stability (Voltage) 2.1055(a)(2)

Frequency measurement was performed at the extremes of throughout the range 85% and 115% of the nominal voltage. Extracting a sample of the carrier and measuring its center frequency by equipment having degree accuracy at least 10 times that of the minimum to be measured measured the frequency of the unit.

FCC limits: 0.00025%, 2.5 ppm for FRS
 0.00050%, 5.0 ppm for GMRS

Test Results: Refer to test data

1. RF Output Power & DC Voltage and Current into
Final Amplifying Device

2.1033(C)(8)

MEASURED FREQUENCY (MHz)	OUTPUT POWER (50 Ω TERMINATED) (Watts)	TX FINAL STAGE	
		DRAIN VOLTAGE (V)	DRAIN CURRENT (A)
462.5625 (BOOST mode)	1.91	5.30	0.890
462.5625 (PTT mode)	0.93	5.30	0.580
467.5625 (PTT mode)	0.54	5.20	0.440

2. RF Output Power

2.1046

MEASURED FREQUENCY (MHz)	OUTPUT POWER (50 Ω TERMINATED) (Watts)	OUTPUT POWER (ERP) (Watts)
462.5625 (BOOST mode)	1.91	1.63
462.5625 (PTT mode)	0.93	0.81
467.5625 (PTT mode)	0.54	0.33


Note:

- a) OUTPUT POWER (50 Ω TERMINATED) was measured by opening the enclosure.
- b) ERP was measured based on substitution method using with standard dipole antenna.
- c) 4.8V NiMH Battery Pack: 5.6V (Within 1 minute after turn on the power.)

3. MODULATION CHARACTERISTICS (AUDIO ROLL-OFF RESPONSE)

2.1047

AUDIO FREQUENCY	RESPONSE ATTENUATION	FCC LIMIT
(kHz)	(dB)	(dB)
2.5	-0.5	--
3	-2.4	0.0
3.5	-5.3	-3.5
4	-8.6	-8.0
5	-14.6	-13.5
7	-23.7	-22.5
10	-33.2	-32.0
15	-43.8	-43.0
20	-51.3	-50.0
30	-60.8	-50.0
50	-66.3	-50.0
70	-66.9	-50.0

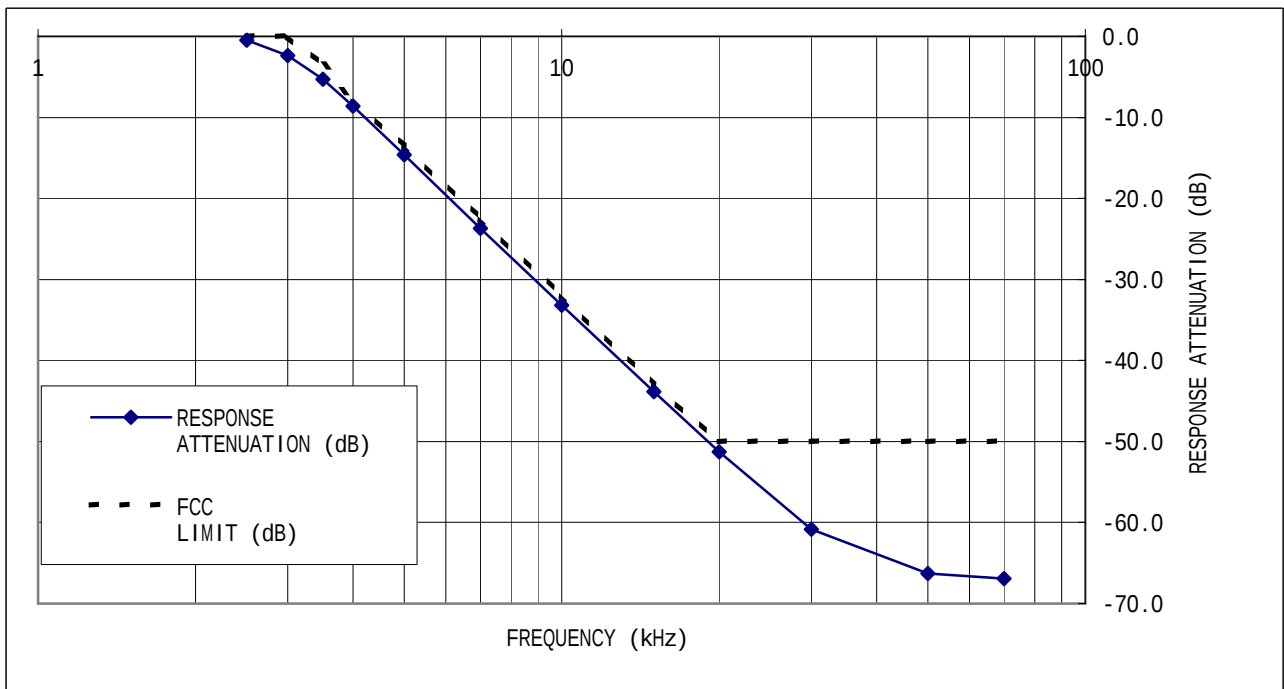

4-1. MODULATION CHARACTERISTICS (AUDIO FREQUENCY RESPONSE)


2.1047

GMRS MODE

CARRIER FREQUENCY: 462.5625 MHz

OUTPUT POWER (50 Ω TERMINATED): 2.26 WATTS (BOOST mode)

AUDIO FREQUENCY (kHz)	RESPONSE ATTENUATION (dB)
0.1	-43.5
0.2	-39.8
0.3	-33.7
0.5	-6.0
0.7	-2.9
1	0.0
1.5	2.9
2	4.9
2.5	5.8
3	5.0
3.5	3.1
3.9	1.1

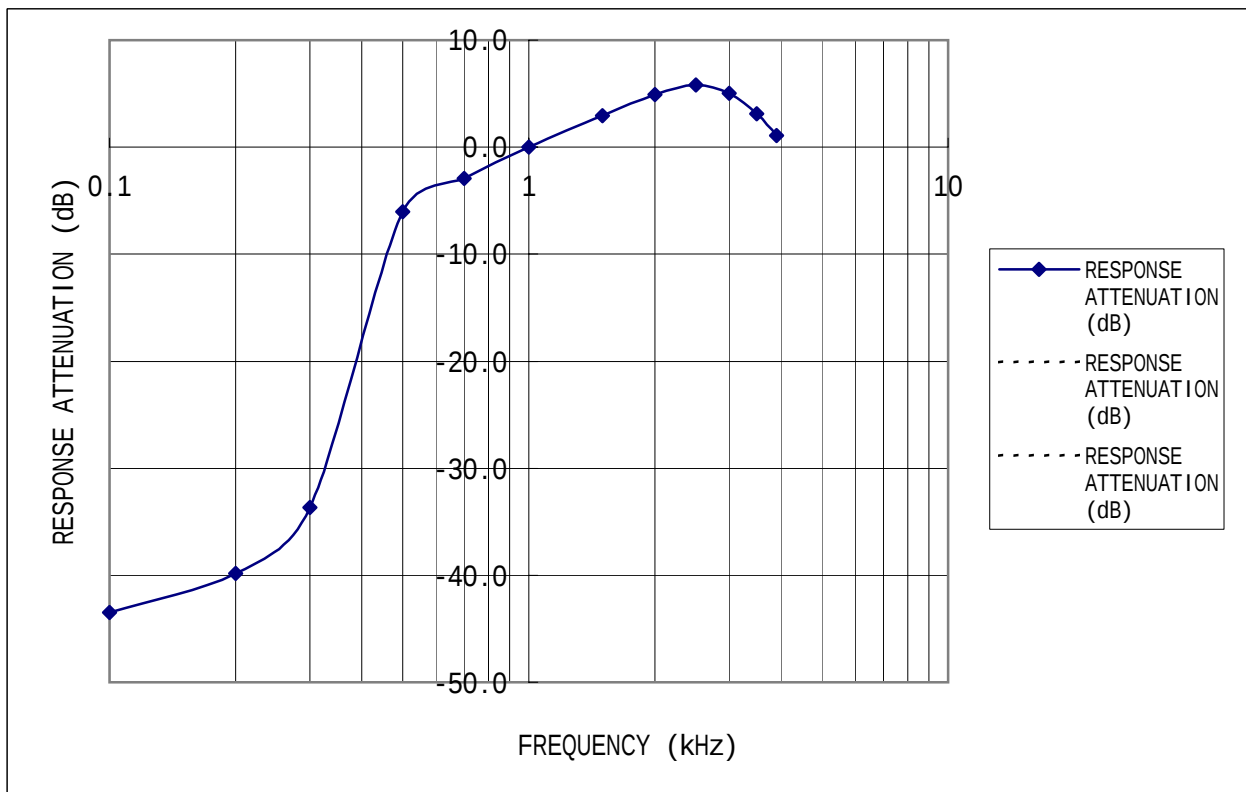

4-2. MODULATION CHARACTERISTICS (AUDIO FREQUENCY RESPONSE)


2.1047

GMRS MODE

CARRIER FREQUENCY: 462.5625 MHz

OUTPUT POWER (50 Ω TERMINATED): 1.05 WATTS(PTT mode)

AUDIO FREQUENCY	RESPONSE ATTENUATION
(kHz)	(dB)
0.1	-43.3
0.2	-39.7
0.3	-33.5
0.5	-5.6
0.7	-2.3
1	0.0
1.5	3.2
2	5.3
2.5	6.3
3	5.6
3.5	3.5
3.9	1.9

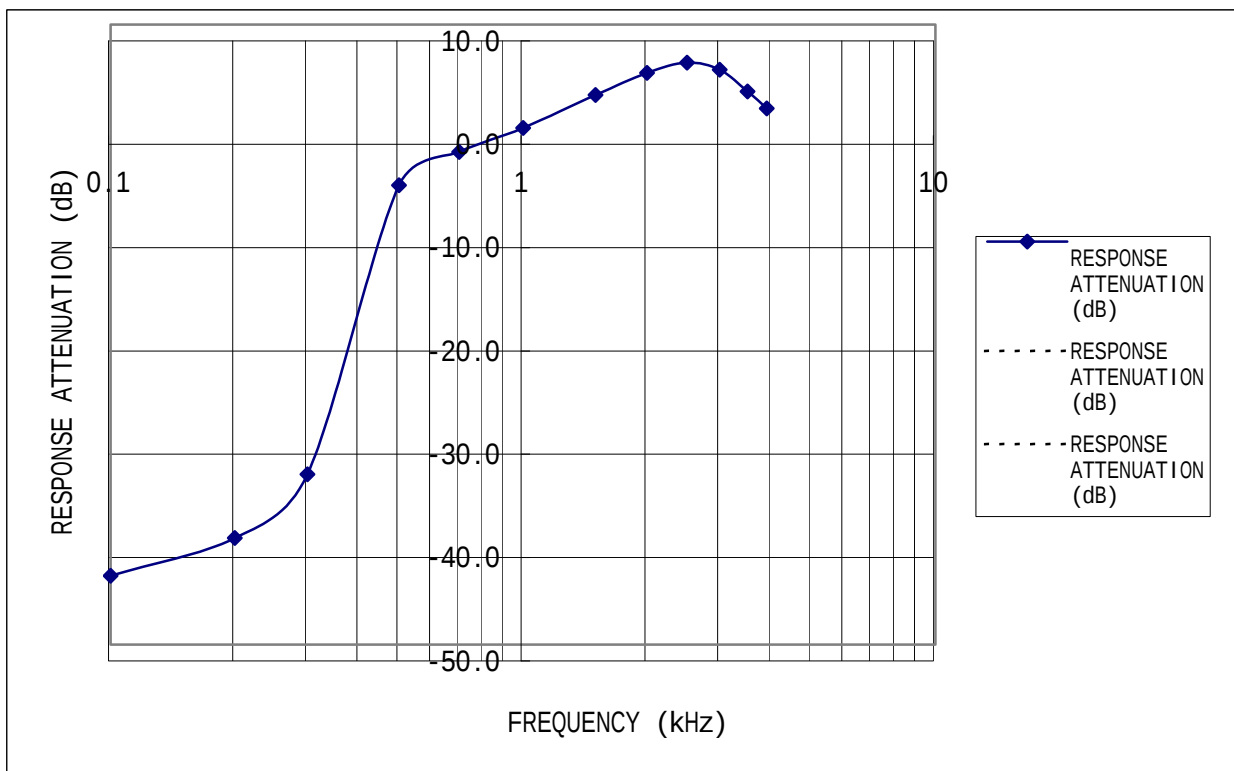

4-3. MODULATION CHARACTERISTICS (AUDIO FREQUENCY RESPONSE)


2.1047

FRS MODE

CARRIER FREQUENCY: 467.5625 MHz

OUTPUT POWER (50 Ω TERMINATED): 0.57 WATTS

AUDIO FREQUENCY	RESPONSE ATTENUATION
(kHz)	(dB)
0.1	-43.3
0.2	-39.6
0.3	-33.5
0.5	-5.7
0.7	-2.5
1	0.0
1.5	3.2
2	5.3
2.5	6.0
3	5.3
3.5	3.3
3.9	1.3

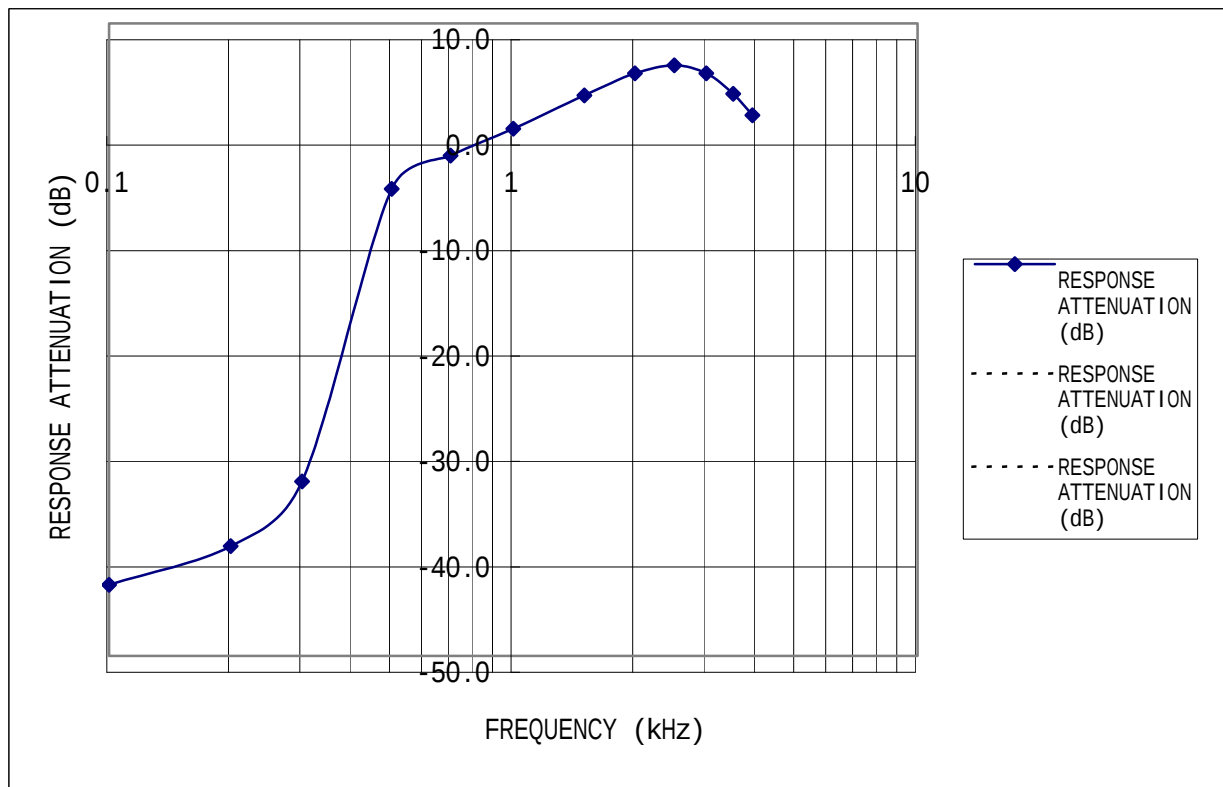

5-1. MODULATION CHARACTERISTICS (MODULATION LIMITING)

2.1047 & 95.637(a)


GMRS MODE

CARRIER FREQUENCY: 462.5625 MHz

OUTPUT POWER (50 Ω TERMINATED): 2.26 WATTS

MODULATION: AUDIO+CTCSS (167.9Hz)

AUDIO INPUT LEVEL [mV]	DEVIATION (@1.0KHz) [kHz]	DEVIATION (@300Hz) [kHz]	DEVIATION (@3.0KHz) [kHz]	FCC LIMIT [kHz]
1	0.80	0.53	1.05	2.5
5	1.92	0.54	1.75	2.5
10	2.16	0.56	1.78	2.5
20	2.23	0.61	1.79	2.5
30	2.20	0.66	1.77	2.5
40	2.20	0.73	1.78	2.5
50	2.20	0.79	1.77	2.5
60	2.21	0.86	1.77	2.5
70	2.22	0.92	1.76	2.5
80	2.22	1.00	1.78	2.5
90	2.22	1.04	1.77	2.5
100	2.22	1.10	1.78	2.5

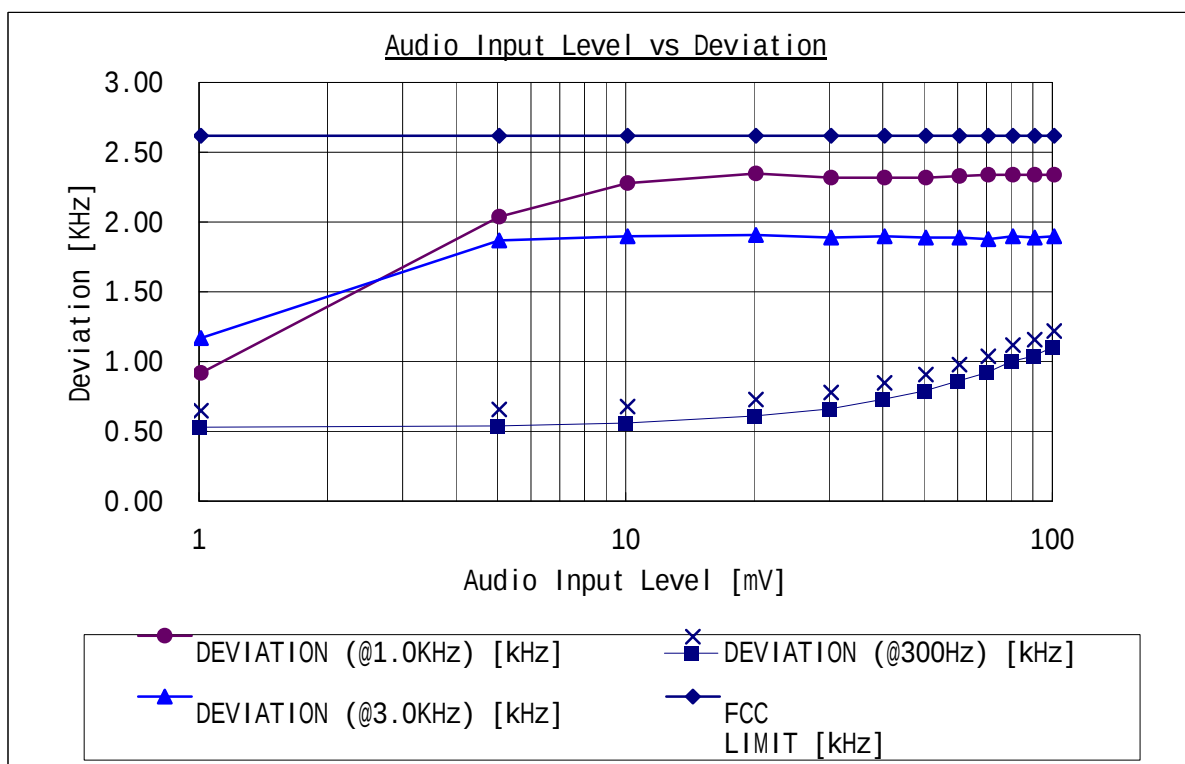

5-2. MODULATION CHARACTERISTICS (MODULATION LIMITING)

2.1047 & 95.637(a)


GMRS MODE

CARRIER FREQUENCY: 462.5625 MHz

OUTPUT POWER (50 Ω TERMINATED): 1.05 WATTS

MODULATION: AUDIO+CTCSS (167.9Hz)

AUDIO INPUT LEVEL [mV]	DEVIATION (@1.0KHz) [kHz]	DEVIATION (@300Hz) [kHz]	DEVIATION (@3.0KHz) [kHz]	FCC LIMIT [kHz]
1	0.82	0.52	1.04	2.5
5	1.93	0.55	1.75	2.5
10	2.16	0.57	1.78	2.5
20	2.23	0.62	1.80	2.5
30	2.22	0.69	1.79	2.5
40	2.22	0.75	1.78	2.5
50	2.22	0.80	1.78	2.5
60	2.22	0.87	1.78	2.5
70	2.23	0.93	1.78	2.5
80	2.23	1.00	1.79	2.5
90	2.23	1.05	1.79	2.5
100	2.25	1.12	1.78	2.5

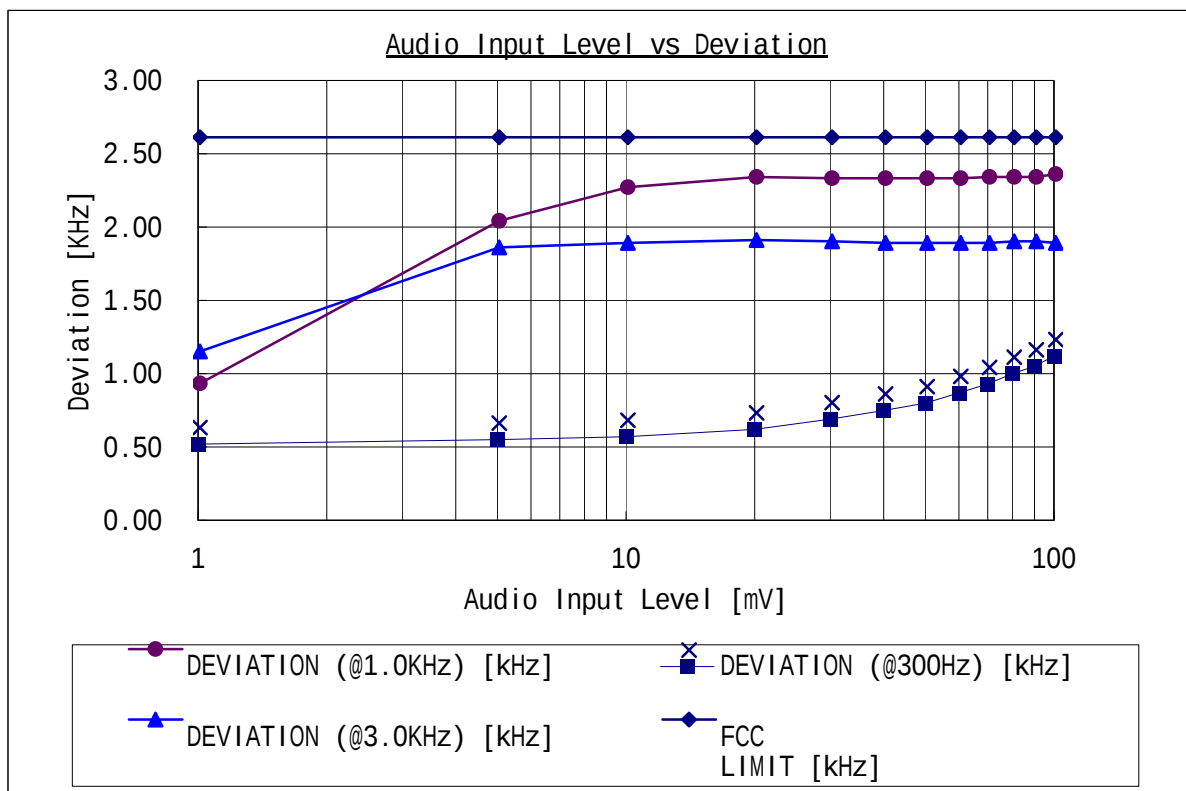

5-3. MODULATION CHARACTERISTICS (MODULATION LIMITING)

2.1047 & 95.637(a)


FRS MODE

CARRIER FREQUENCY: 467.5625 MHz

OUTPUT POWER (50 Ω TERMINATED): 0.57 WATTS

MODULATION: AUDIO+CTCSS (167.9Hz)


AUDIO INPUT LEVEL [mV]	DEVIATION (@1.0KHz) [kHz]	DEVIATION (@300Hz) [kHz]	DEVIATION (@3.0KHz) [kHz]	FCC LIMIT [kHz]
1	0.80	0.52	1.03	2.5
5	1.90	0.53	1.73	2.5
10	2.13	0.55	1.76	2.5
20	2.21	0.60	1.76	2.5
30	2.19	0.66	1.76	2.5
40	2.18	0.72	1.76	2.5
50	2.18	0.78	1.76	2.5
60	2.20	0.84	1.76	2.5
70	2.20	0.89	1.76	2.5
80	2.20	0.97	1.76	2.5
90	2.20	1.02	1.76	2.5
100	2.20	1.07	1.76	2.5

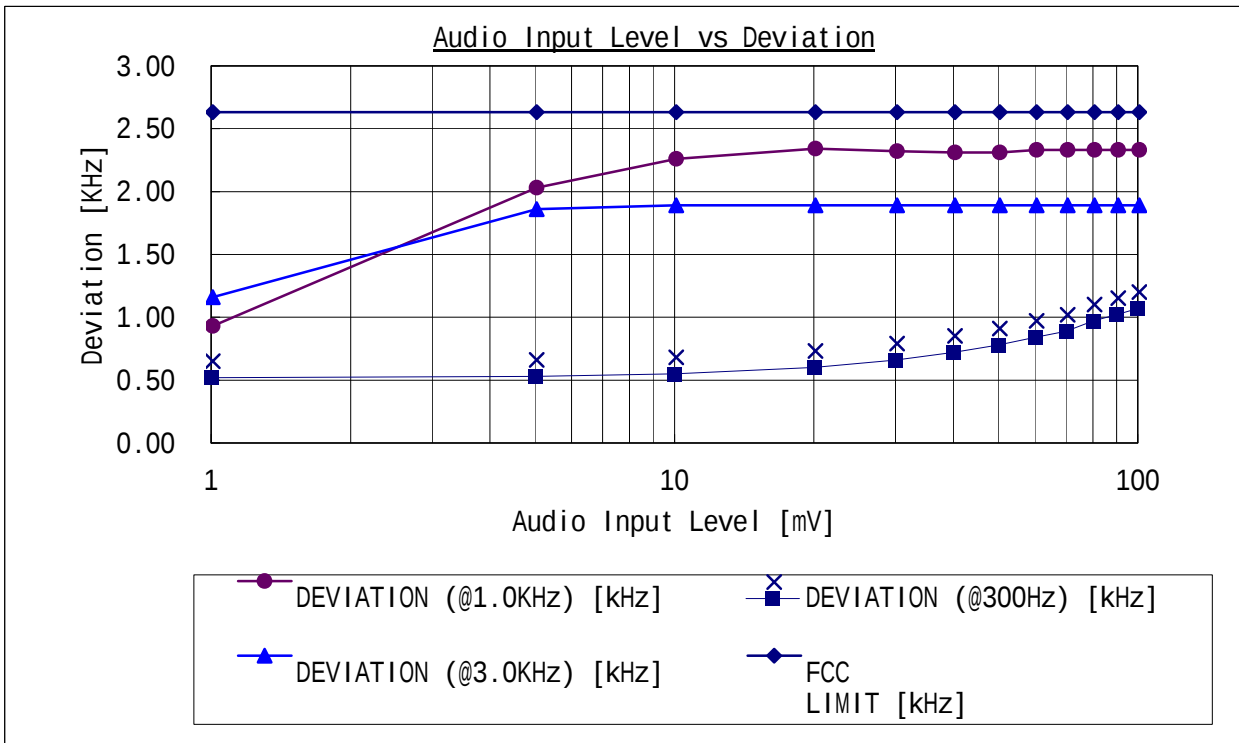


6. OCCUPIED BANDWIDTH

2.1049(c)(1) & 95.635(b)(1)(3)(7)


GMRS(BOOST mode)

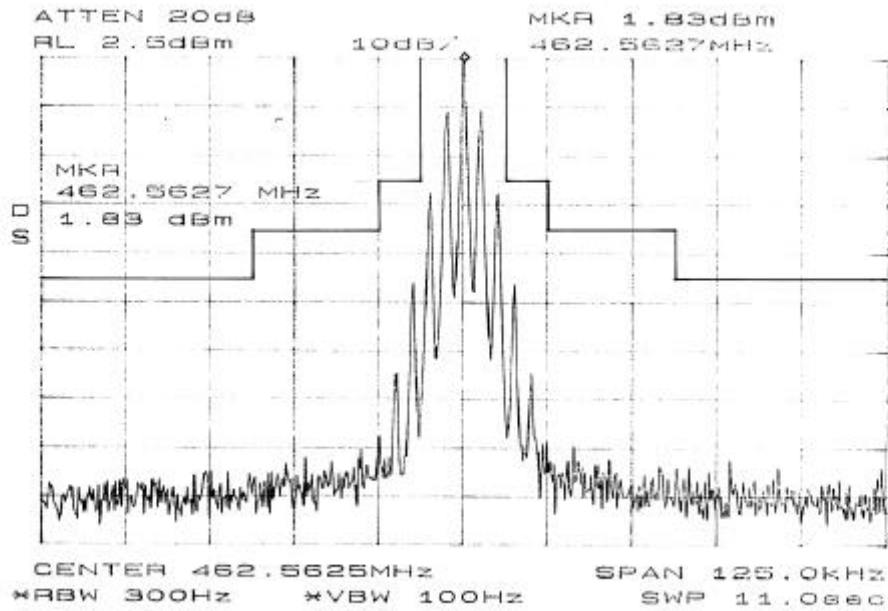


GMRS(PTT)

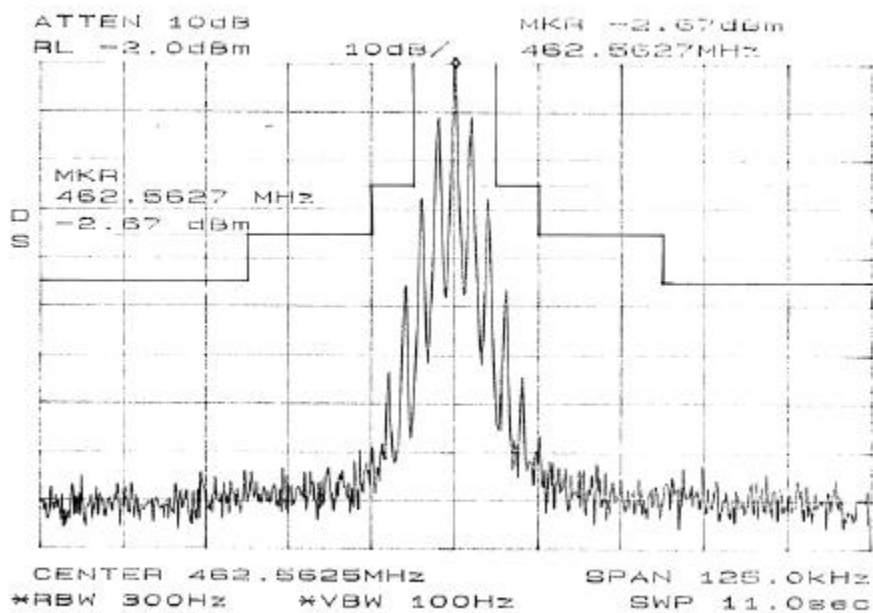


FRS

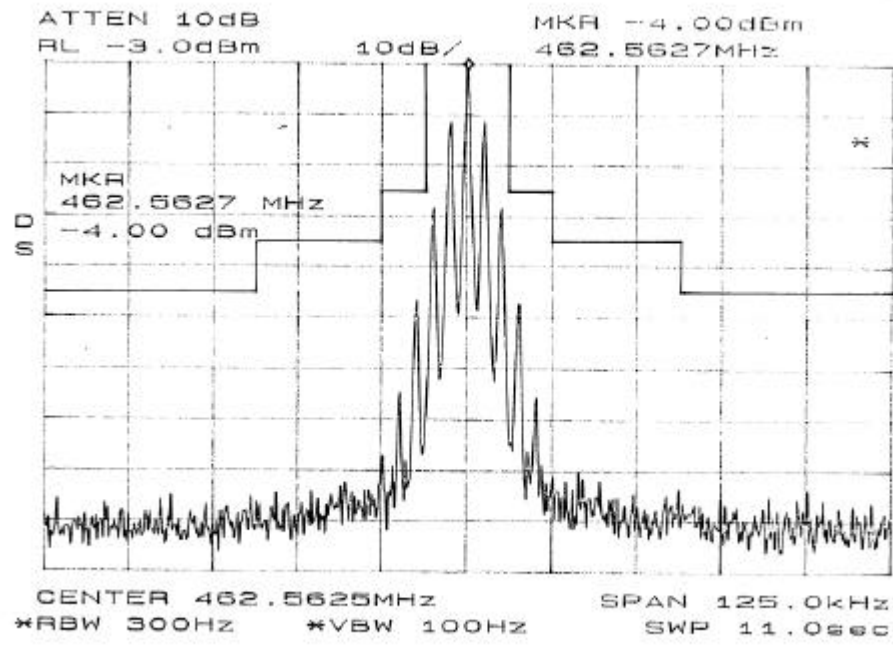


GMRS(BST)+CTCSS(167.9Hz)

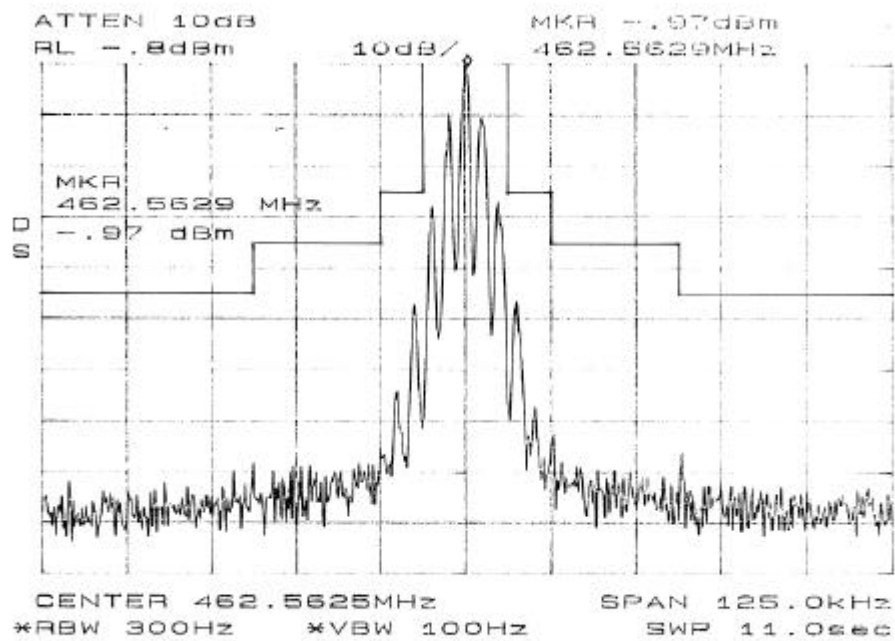


GMRS(PTT)+CTCSS(167.9Hz)

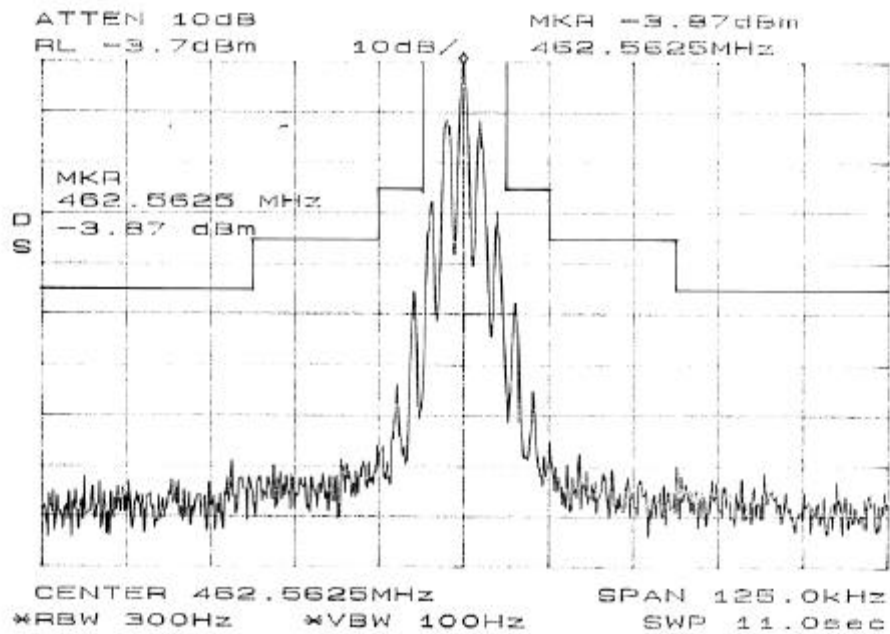


FRS+CTCSS(167.9Hz)

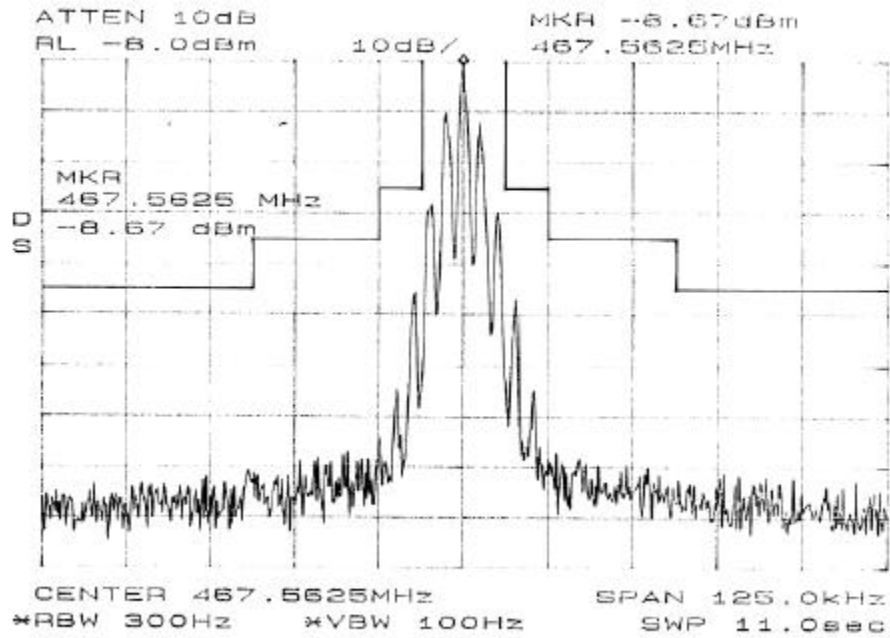


GMRS(BST)+DCS(CODE31):No.66

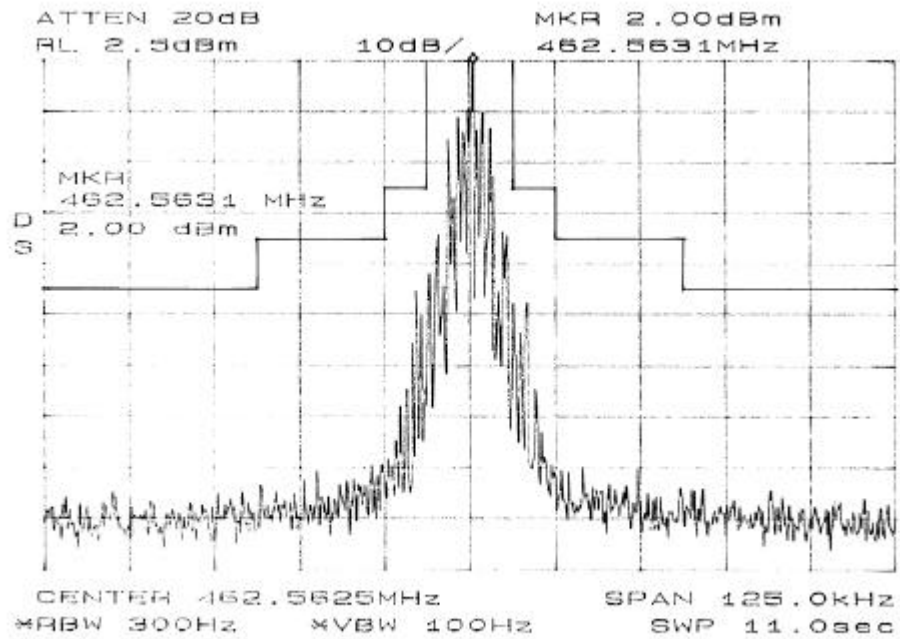

GMRS(PTT)+DCS(CODE31):No.66

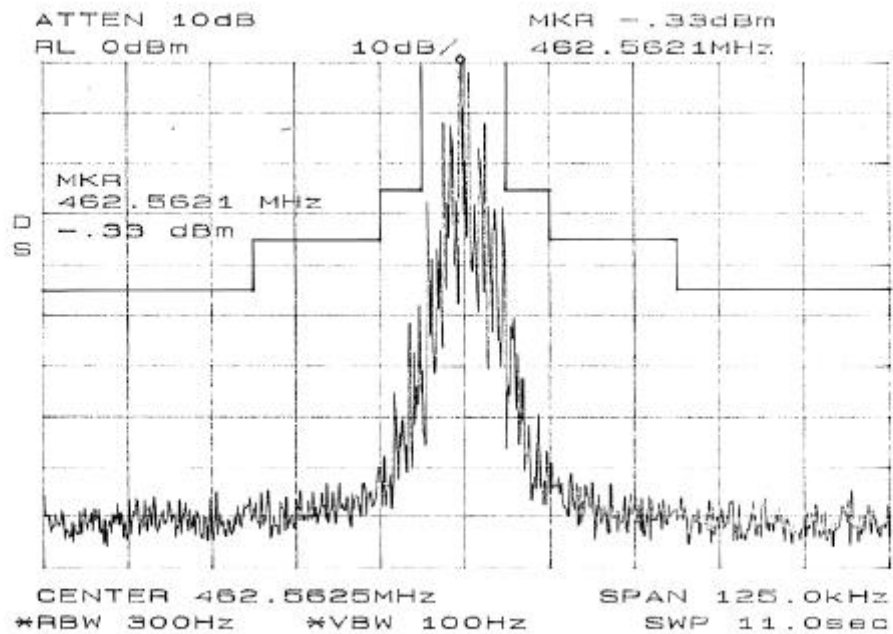

FRS+DCS(CODE31):No.66

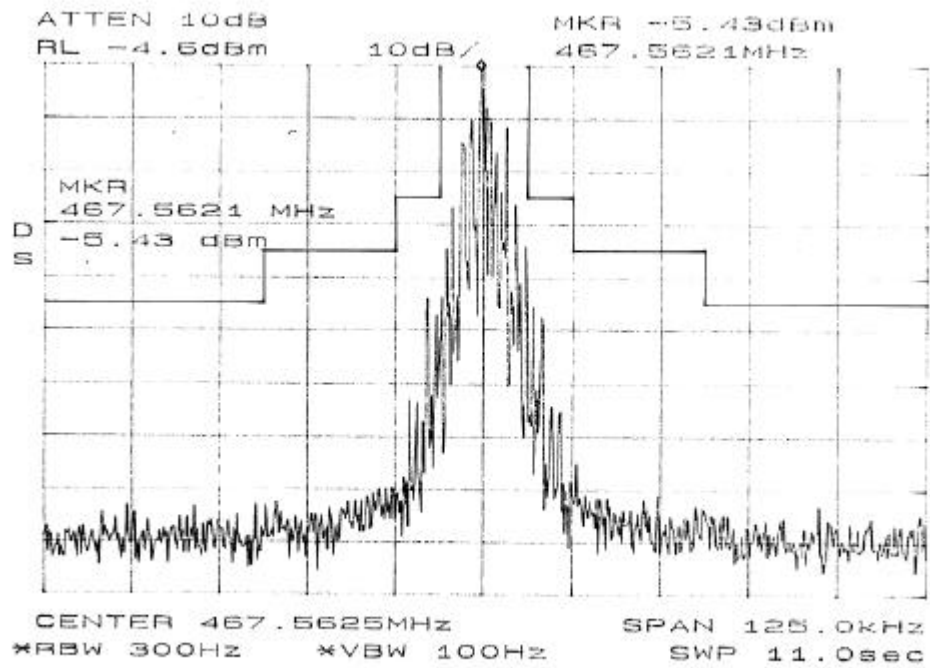

7. SPURIOUS & HARMONICS EMISSION AT ANTENNA TERMINAL

2.1051

BST[dBc]

Harmonics of Carrier	462.5625MHz GMRS BST[dBc]	462.5625MHz GMRS PTT[dBc]	467.5625MHz FRS [dBc]
1	-	-	-
2	68.7	63.0	56.5
3	64.8	67.5	60.3
4	70.5	74.5	70.7
5	67.5	68.5	72.5
6	89.0	85.0	66.0
7	89.0	85.0	82.5
8	89.0	85.0	82.5

NOTE: The measurement was performed by opening the enclosure.

8-1. FIELD STRENGTH OF SPURIOUS & HARMONICS RADIATION

2.1053 & 95.635(b)(7)

GMRS(PTT mode)

TX: 462.5625 MHz

EMISSIONS (MHz)	EUT, PLACED V/H	ANT, POLARITY V/H	FCC LIMIT (dB)	MARGIN (dB)
462.5625	V	V	-	-
462.5625	V	H	-	-
462.5625	H	V	-	-
462.5625	H	H	-	-
925.1250	V	V	42.0	16.3
925.1250	V	H	42.0	25.8
925.1250	H	V	42.0	23.1
925.1250	H	H	42.0	20.5
1387.6875	V	V	42.0	12.5
1387.6875	V	H	42.0	19.5
1387.6875	H	V	42.0	17.2
1387.6875	H	H	42.0	14.4
1850.2500	V	V	42.0	15.0
1850.2500	V	H	42.0	19.5
1850.2500	H	V	42.0	17.1
1850.2500	H	H	42.0	17.1

8-2. FIELD STRENGTH OF SPURIOUS & HARMONICS RADIATION

2.1053 & 95.635(b)(7)

GMRS(BOOST mode)

TX: 462.5625 MHz

EMISSIONS (MHz)	EUT, PLACED V/H	ANT, POLARITY V/H	FCC LIMIT (dB)	MARGIN (dB)
462.5625	V	V	-	-
462.5625	V	H	-	-
462.5625	H	V	-	-
462.5625	H	H	-	-
925.1250	V	V	45.1	11.8
925.1250	V	H	45.1	22.0
925.1250	H	V	45.1	17.2
925.1250	H	H	45.1	16.0
1387.6875	V	V	45.1	16.2
1387.6875	V	H	45.1	24.0
1387.6875	H	V	45.1	16.8
1387.6875	H	H	45.1	13.9
1850.2500	V	V	45.1	15.5
1850.2500	V	H	45.1	19.7
1850.2500	H	V	45.1	15.0
1850.2500	H	H	45.1	14.3

8-3. FIELD STRENGTH OF SPURIOUS & HARMONICS RADIATION

2.1053 & 95.635(b)(7)

FRS

TX: 467.5625 MHz

EMISSIONS (MHz)	EUT, PLACED V/H	ANT, POLARITY V/H	FCC LIMIT (dB)	MARGIN (dB)
467.5625	V	V	-	-
467.5625	V	H	-	-
467.5625	H	V	-	-
467.5625	H	H	-	-
935.1250	V	V	39.3	15.1
935.1250	V	H	39.3	25.3
935.1250	H	V	39.3	16.5
935.1250	H	H	39.3	19.0
1402.6875	V	V	39.3	9.0
1402.6875	V	H	39.3	18.3
1402.6875	H	V	39.3	16.2
1402.6875	H	H	39.3	13.1
1870.2500	V	V	39.3	15.8
1870.2500	V	H	39.3	17.0
1870.2500	H	V	39.3	17.3
1870.2500	H	H	39.3	19.0


9-1. FREQUENCY STABILITY (TEMPERATURE RANGE)

2.1055

GMRS MODE

MEASURED FREQUENCY : 462.5625 MHz

TEMPERATURE	FREQ. MHz	TOLERANCE		FCC LIMIT	
		Hz	%	+%	-%
-30	462.561660	-840	-0.0001816	0.0005	-0.0005
-20	462.562070	-430	-0.0000930	0.00025	-0.00025
-10	462.563030	530	0.0001146	0.00025	-0.00025
0	462.562880	380	0.0000822	0.00025	-0.00025
10	462.562690	190	0.0000411	0.00025	-0.00025
20	462.562550	50	0.0000108	0.00025	-0.00025
25	462.562500	0	0.0000000	0.00025	-0.00025
30	462.562400	-100	-0.0000216	0.00025	-0.00025
40	462.562400	-100	-0.0000216	0.00025	-0.00025
50	462.562730	230	0.0000497	0.00025	-0.00025

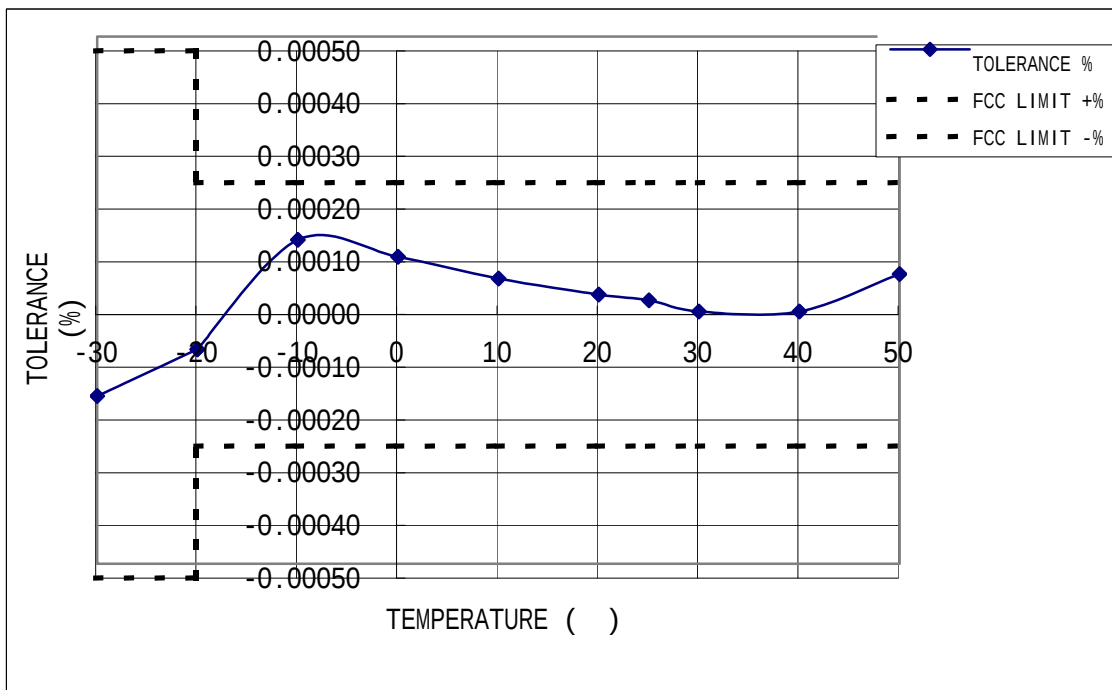


9-2. FREQUENCY STABILITY (TEMPERATURE RANGE)

2.1055

GMRS MODE

MEASURED FREQUENCY : 462.5625 MHz

TEMPERATURE	FREQ. MHz	TOLERANCE		FCC LIMIT	
		Hz	%	+%	-%
-30	462.561850	-650	-0.0001405	0.0005	-0.0005
-20	462.562100	-400	-0.0000865	0.00025	-0.00025
-10	462.563170	670	0.0001448	0.00025	-0.00025
0	462.562970	470	0.0001016	0.00025	-0.00025
10	462.562760	260	0.0000562	0.00025	-0.00025
20	462.562650	150	0.0000324	0.00025	-0.00025
25	462.562590	90	0.0000195	0.00025	-0.00025
30	462.562450	-50	-0.0000108	0.00025	-0.00025
40	462.562480	-20	-0.0000043	0.00025	-0.00025
50	462.562810	310	0.0000670	0.00025	-0.00025

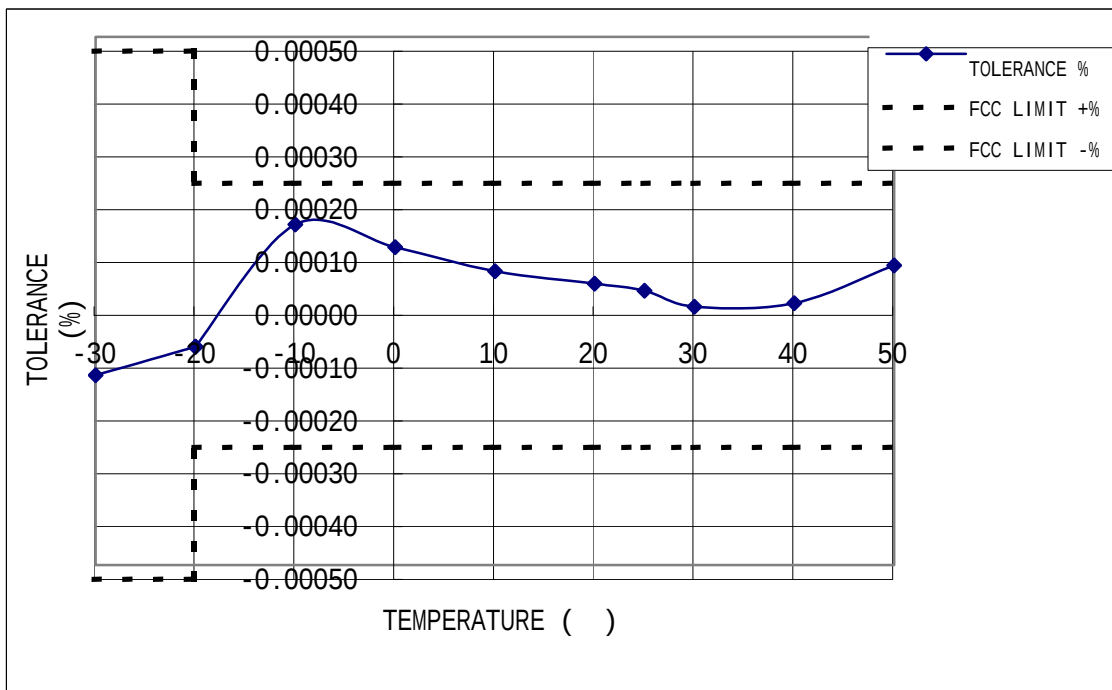


9-3. FREQUENCY STABILITY (TEMPERATURE RANGE)

2.1055

FRS MODE

MEASURED FREQUENCY : 467.5625 MHz

TEMPERATURE	FREQ.	TOLERANCE		FCC LIMIT	
	MHz	Hz	%	+%	-%
-30	467.561720	-780	-0.0001668	0.0005	-0.0005
-20	467.562180	-320	-0.0000684	0.00025	-0.00025
-10	467.563100	600	0.0001283	0.00025	-0.00025
0	467.562980	480	0.0001027	0.00025	-0.00025
10	467.562800	300	0.0000642	0.00025	-0.00025
20	467.562680	180	0.0000385	0.00025	-0.00025
25	467.562610	110	0.0000235	0.00025	-0.00025
30	467.562480	-20	-0.0000043	0.00025	-0.00025
40	467.562520	20	0.0000043	0.00025	-0.00025
50	467.562860	360	0.0000770	0.00025	-0.00025

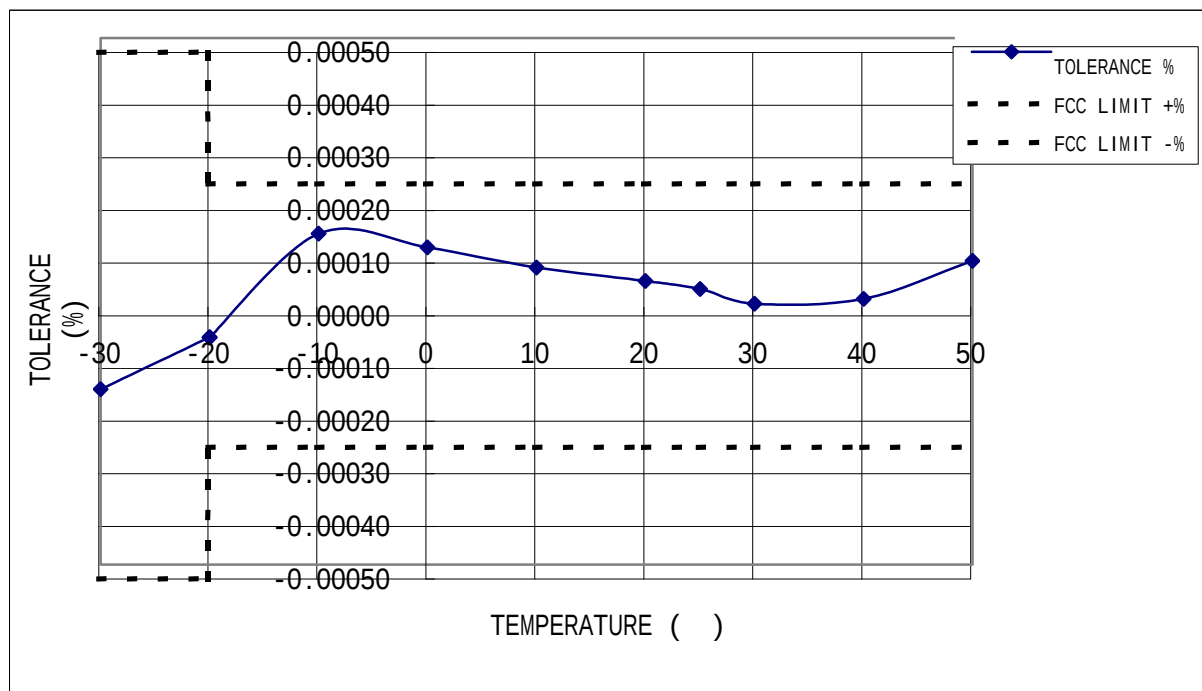

10-1. FREQUENCY STABILITY (VOLTAGE RANGE)


2.1055

GMRS MODE

MEASURED FREQUENCY : 462.5625 MHz

NEW

VOLTAGE		FREQ.	TOLERANCE		FCC LIMIT	
(V)	(%)	MHz	Hz	%	+ %	- %
3.60	60	462.56260	100	0.0000216	0.00025	-0.00025
4.00	70	462.56261	110	0.0000238	0.00025	-0.00025
4.80	80	462.56259	90	0.0000195	0.00025	-0.00025
5.10	85	462.56258	80	0.0000173	0.00025	-0.00025
5.40	90	462.56256	60	0.0000130	0.00025	-0.00025
5.70	95	462.56255	50	0.0000108	0.00025	-0.00025
6.00	100	462.56253	30	0.0000108	0.00025	-0.00025
6.30	105	462.56251	10	0.0000022	0.00025	-0.00025
6.60	110	462.56249	-10	-0.0000022	0.00025	-0.00025
6.70	112	462.56248	-20	-0.0000043	0.00025	-0.00025

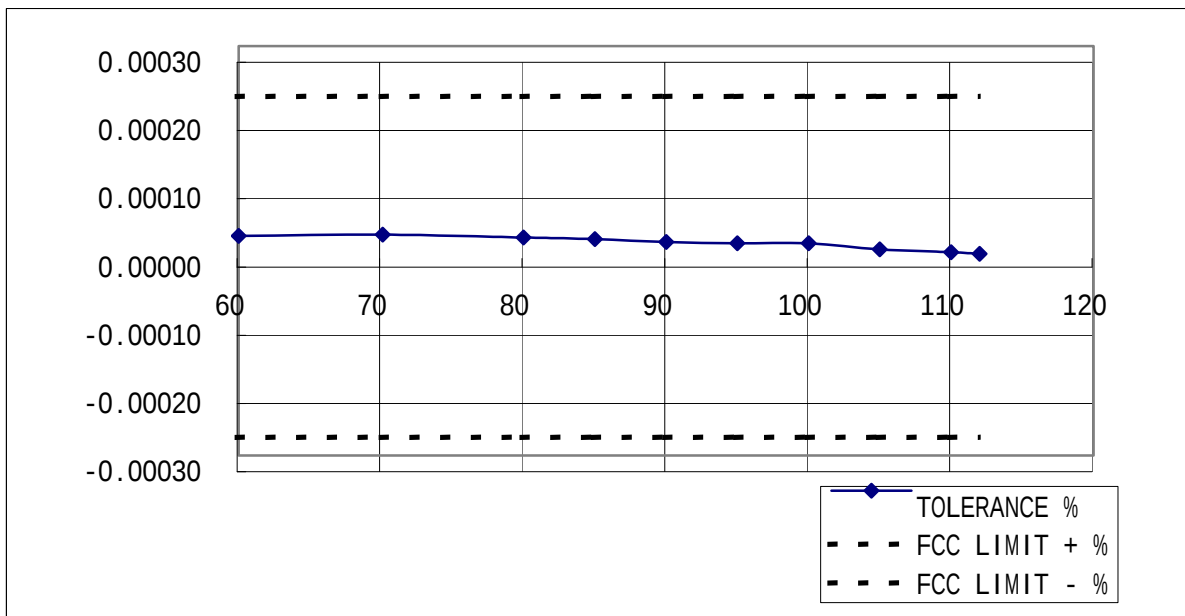

NOTE: BATTERY ENDPOINT --- 3.6V

10-2. FREQUENCY STABILITY (VOLTAGE RANGE)


2.1055

GMRS MODE

MEASURED FREQUENCY : 462.5625 MHz

NEW

VOLTAGE		FREQ.	TOLERANCE		FCC LIMIT	
(V)	(%)	MHz	Hz	%	+ %	- %
3.60	60	462.56252	20	0.0000043	0.00025	-0.00025
4.00	70	462.56248	-20	-0.0000043	0.00025	-0.00025
4.80	80	462.56245	-50	-0.0000108	0.00025	-0.00025
5.10	85	462.56244	-60	-0.0000130	0.00025	-0.00025
5.40	90	462.56243	-70	-0.0000151	0.00025	-0.00025
5.70	95	462.56243	-70	-0.0000151	0.00025	-0.00025
6.00	100	462.56249	-10	-0.0000151	0.00025	-0.00025
6.30	105	462.56247	-30	-0.0000065	0.00025	-0.00025
6.60	110	462.56242	-80	-0.0000173	0.00025	-0.00025
6.70	112	462.56241	-90	-0.0000195	0.00025	-0.00025

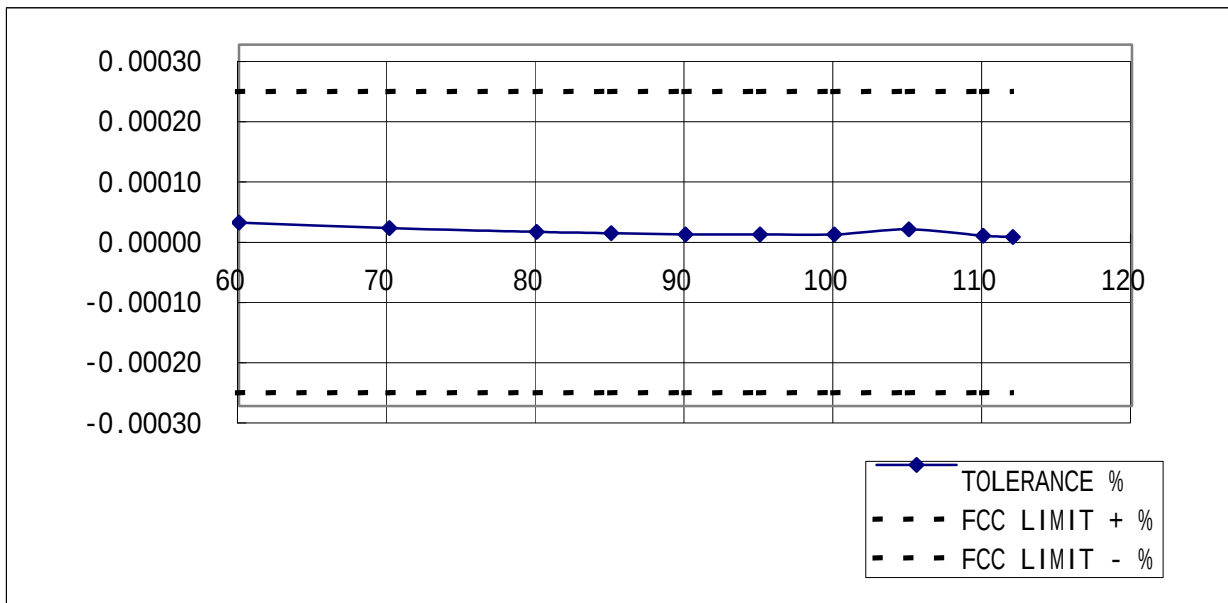

NOTE: BATTERY ENDPOINT --- 3.6V


10-3. FREQUENCY STABILITY (VOLTAGE RANGE)

2.1055

FRS MODE

MEASURED FREQUENCY : 467.5625 MHz

VOLTAGE		FREQ.	TOLERANCE		FCC LIMIT	
(V)	(%)	MHz	Hz	%	+ %	- %
3.60	60	467.56250	0	0.0000000	0.00025	-0.00025
4.00	70	467.56247	-30	-0.0000064	0.00025	-0.00025
4.80	80	467.56247	-30	-0.0000064	0.00025	-0.00025
5.10	85	467.56246	-40	-0.0000086	0.00025	-0.00025
5.40	90	467.56244	-60	-0.0000128	0.00025	-0.00025
5.70	95	467.56244	-60	-0.0000128	0.00025	-0.00025
6.00	100	467.56244	-60	-0.0000128	0.00025	-0.00025
6.30	105	467.56244	-60	-0.0000128	0.00025	-0.00025
6.60	110	467.56244	-60	-0.0000128	0.00025	-0.00025
6.70	112	467.56245	-50	-0.0000107	0.00025	-0.00025

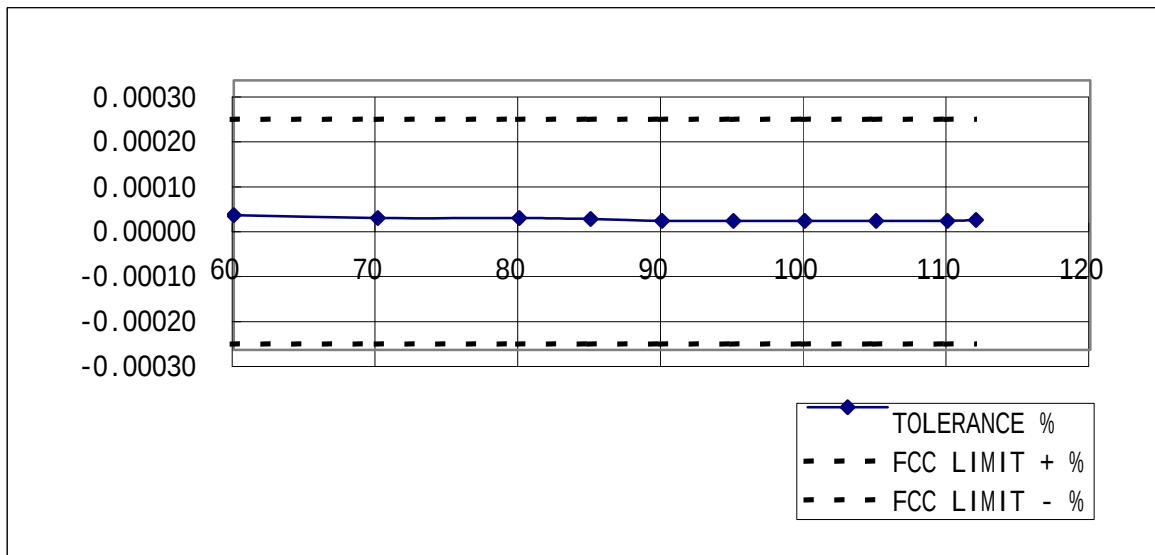

NOTE: BATTERY ENDPOINT --- 3.6V

LIST OF MEASUREMENT EQUIPMENTS

ENG-NO	TEST EQUIPMENT	TYPE	MFR	SERIAL NO.	Last Calibrtation
1287	AMPLIFIER	AFS30010040020	MITEQ	138315	N/A
2022	MICROWAVE PREAMPLIFIER	8349B	ADVANTEST	3205A04450	N/A
1294	ANTENNA(BILOG)	CBL6112A	CHASE	2350	N/A
1602	ANTENNA(DIPOLE)	3120-B1	EMCO	0075	11-Jul-03
1603	ANTENNA(DIPOLE)	3120-B2	EMCO	0076	11-Jul-03
1604	ANTENNA(DIPOLE)	3120-B3	EMCO	0076	11-Jul-03
1560	ANTENNA(HORN) (18GHz)	3115	EMCO	2167	N/A
N/A	ANTENNA(HORN) (24GHz)	94287.24	NIPPON KOSYUHA	60.1	N/A
1388	LISN	KNW407	KYOURITSU	8-833-21	N/A
0682	POWER SUPPLY	AA300	TAKASAGO	31783013	N/A
0857	SPECTRUM ANALYZER (13GHz)	E7400A	AGILENT	US40240145	20-Jun-05
0205	SPECTRUM ANALYZER (8.4GHz)	R3265	ADVANTEST	25060158	N/A
1008	SPECTRUM ANALYZER (40GHz)	8564E	ADVANTEST	3425A00182	18-Apr-05