

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

<b>SAR TEST REPORT (FCC/IC)</b>				
<b>RF EXPOSURE EVALUATION</b>		<b>SPECIFIC ABSORPTION RATE</b>		
<b>APPLICANT / MANUFACTURER</b>	UNIDEN AMERICA CORPORATION			
<b>DEVICE UNDER TEST (DUT)</b>	PORTABLE FM GMRS/FRS UHF PTT RADIO TRANSCEIVER			
<b>DUT FREQUENCY RANGE(S)</b>	462.5500 - 462.7250 MHz		GMRS Channels 15-22	
	462.5625 - 462.7125 MHz		GMRS/FRS Channels 1-7	
	467.5625 - 467.7125 MHz		FRS Channels 8-14	
<b>DUT MODEL(S)</b>	FCC	GMR3689-2CK	GMR3699-2CK	
	IC	GMR3689	GMR3699	
(Note: Model difference is for chassis color purpose only)				
<b>DEVICE IDENTIFIER(S)</b>	FCC ID:	AMWUT052	IC:	513C-UT052
<b>APPLICATION TYPE</b>	FCC/IC Certification			
<b>STANDARD(S) APPLIED</b>	FCC 47 CFR §2.1093			
	Health Canada Safety Code 6			
<b>PROCEDURE(S) APPLIED</b>	FCC OET Bulletin 65, Supplement C (Edition 01-01)			
	FCC KDB 447498 D01v04			
	Industry Canada RSS-102 Issue 4			
	IEEE 1528-2003			
<b>RF EXPOSURE CATEGORY</b>	General Population / Uncontrolled			
	Face-held & Body-worn			
<b>DATE OF SAMPLE RECEIPT</b>	May 26, 2010			
<b>DATE(S) OF EVALUATION(S)</b>	May 31, 2010			
<b>TEST REPORT SERIAL NO.</b>	052610AMW-T1026-S95U			
<b>TEST REPORT REVISION NO.</b>	Revision 1.0	Initial Release	June 29, 2010	
<b>TEST REPORT SIGNATORIES</b>	Testing Performed By		Test Report Prepared By	
	Sean Johnston Celltech Labs Inc.		Jonathan Hughes Celltech Labs Inc.	
<b>TEST LAB AND LOCATION</b>	Celltech Compliance Testing and Engineering Laboratory			
	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada			
<b>TEST LAB CONTACT INFO.</b>	Tel.: 250-765-7650		Fax: 250-765-7645	
	info@celltechlabs.com		www.celltechlabs.com	
<b>TEST LAB ACCREDITATION(S)</b>	ISO/IEC 17025:2005 (A2LA Test Lab Certificate No. 2470.01)			

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 1 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## DECLARATION OF COMPLIANCE - SAR RF EXPOSURE EVALUATION (FCC/IC)

<b>Test Lab Information</b>	<b>Name</b>	CELLTECH LABS INC.			
	<b>Address</b>	21-364 Lougheed Road, Kelowna, British Columbia V1X 7R8 Canada			
<b>Applicant Information</b>	<b>Name</b>	UNIDEN AMERICA CORPORATION			
	<b>Address</b>	4700 Amon Carter Boulevard, Fort Worth, Texas 76155 United States			
<b>Standard(s) Applied</b>	<b>FCC</b>	47 CFR §2.1093			
	<b>IC</b>	Health Canada Safety Code 6			
<b>Procedure(s) Applied</b>	<b>FCC</b>	OET Bulletin 65, Supplement C (Edition 01-01) KDB 447498 D01v04			
	<b>IC</b>	RSS-102 Issue 4			
	<b>IEEE</b>	1528-2003			
	<b>IEC</b>	62209-2 (Draft)			
<b>Device Identifier(s)</b>	<b>FCC ID:</b>	AMWUT052			
	<b>IC:</b>	513C-UT052			
<b>Device Model(s)</b>	GMR3689-2CK, GMR3699-2CK (FCC Model No.s)		GMR3689, GMR3699 (IC Model No.s)		
	Note: The difference in the model numbers is for chassis color only (elect. and mech. identical)				
<b>Test Sample Serial No.</b>	None (Identical Prototype)				
<b>Device Description</b>	Portable FM UHF GMRS/FRS Push-To-Talk (PTT) Radio Transceiver				
<b>Transmit Frequency Range(s)</b>	462.5500 - 462.7250 MHz (GMRS Channels 15-22)				
	462.5625 - 462.7125 MHz (GMRS/FRS Channels 1-7)				
	467.5625 - 467.7125 MHz (FRS Channels 8-14)				
<b>RF Output Power Measured</b>	1.53 Watts	31.85 dBm	ERP	462.5625 MHz	GMRS Ch. 1 (Boost Mode)
	0.75 Watts	28.75 dBm	ERP	462.5625 MHz	GMRS Ch. 1 (Normal Mode)
<b>Battery Type(s) Tested</b>	Ni-MH Battery Pack		4.8 V	700 mAh	Model: BP38
<b>Antenna Type(s) Tested</b>	External Non-detachable				
<b>Body-worn Accessories Tested</b>	Plastic Belt-Clip (supplied with DUT)				
<b>Audio Accessories Tested</b>	Headset-Microphone (P/N: ZA-133)				
<b>Max. SAR Level(s) Evaluated</b>	Face-held	1.02 W/kg	1g	50% PTT duty cycle	General Population / Uncontrolled RF Exposure Environment
	Body-worn	0.875 W/kg	1g	50% PTT duty cycle	
<b>FCC/IC Spatial Peak SAR Limit</b>	Head/Body	1.6 W/kg	1g	50% PTT duty cycle	
<p>Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the General Population / Uncontrolled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 4, IEEE Standard 1528-2003 and International Standard IEC 62209-2 (Draft). All measurements were performed in accordance with the SAR system manufacturer recommendations.</p>					
<p>I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.</p>					
<p>The results and statements contained in this report pertain only to the device(s) evaluated.</p>					
<p>This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.</p>					
<b>Test Report Approved By</b>			<b>Sean Johnston</b>	<b>Celltech Labs Inc.</b>	



<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 2 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## TABLE OF CONTENTS

1.0 INTRODUCTION	5
2.0 SAR MEASUREMENT SYSTEM	5
3.0 SAR MEASUREMENT SUMMARY	6
4.0 DETAILS OF SAR EVALUATION	7
5.0 SAR EVALUATION PROCEDURES	7
6.0 SYSTEM PERFORMANCE CHECK	8
7.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	9
8.0 SIMULATED EQUIVALENT TISSUES	9
9.0 SAR LIMITS	9
10.0 ROBOT SYSTEM SPECIFICATIONS	10
11.0 PROBE SPECIFICATION (ET3DV6)	11
12.0 BARKSI PLANAR PHANTOM	11
13.0 DEVICE HOLDER	11
14.0 TEST EQUIPMENT LIST	12
15.0 MEASUREMENT UNCERTAINTIES	13
16.0 REFERENCES	14
APPENDIX A - SAR MEASUREMENT DATA	15
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	21
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	24
APPENDIX D - SAR TEST SETUP PHOTOGRAPHS	27
APPENDIX E - DIPOLE CALIBRATION	30
APPENDIX F - PROBE CALIBRATION	31
APPENDIX G - PLANAR PHANTOM CERTIFICATE OF CONFORMITY	32

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

### REVISION HISTORY

REVISION NO.	DESCRIPTION	IMPLEMENTED BY	RELEASE DATE
1.0	Initial Release	Jon Hughes	June 29, 2010

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 4 of 32


	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## 1.0 INTRODUCTION

This measurement report demonstrates that the Uniden America Corporation Portable FM GMRS/FRS Push-To-Talk Radio Transceiver (FCC ID: AMWUT052 / IC: 513C-UT052) complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C Edition 01-01 (see reference [3]), IC RSS-102 Issue 4 (see reference [4]), IEEE Standard 1528-2003 (see reference [5]) and International Standard IEC 62209-2 (see reference [6]) were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the provisions of the rules are included within this test report.

## 2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for Body and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VME-bus computer.

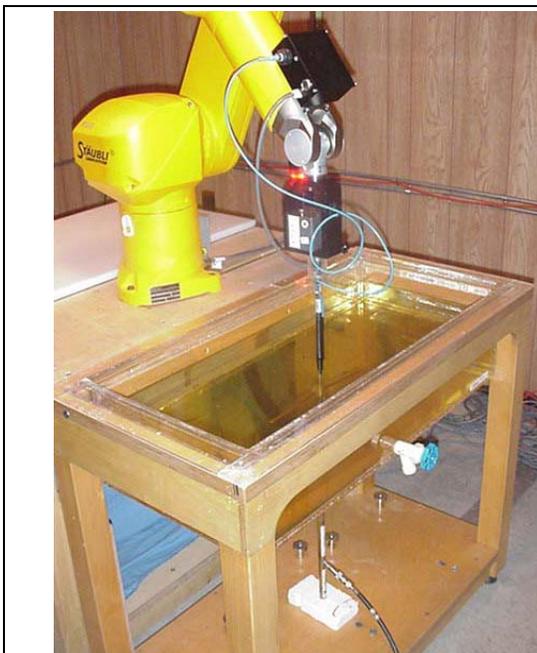

DASY4 SAR System with Plexiglas validation phantom



DASY4 SAR System with Plexiglas side planar phantom

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

### 3.0 SAR MEASUREMENT SUMMARY

SAR EVALUATION RESULTS															
Test Type	Freq.	Channel		Test Mode	Batt. Type	Accessories		DUT Spacing to Planar Phantom		ERP Before Test	Measured SAR 1g (W/kg)		SAR Drift During Test	Scaled SAR with droop 1g (W/kg)	
						Body	Audio	DUT	Antenna		Watts	PTT Duty Cycle		PTT Duty Cycle	
	MHz										100%	50%	dB	100%	50%
FACE	462.5625	1	GMRS	CW	Ni-MH	None	None	2.5 cm	4.2 cm	1.53 Boost	1.78	0.890	-0.584	2.04	1.02
BODY	462.5625	1	GMRS	CW	Ni-MH	Belt-Clip	Headset	1.5 cm	2.0 cm	0.750 Normal	1.75	0.875	0.133	1.75	0.875
SAR LIMIT(S)						HEAD & BODY			SPATIAL PEAK			RF EXPOSURE CATEGORY			
FCC 47 CFR 2.1093		Health Canada Safety Code 6				1.6 W/kg			averaged over 1 gram			General Population / Uncontrolled			
Test Date(s)		May 31, 2010				May 31, 2010				Atmospheric Pressure		101.1	kPa		
Measured Fluid		450 MHz HEAD				450 MHz BODY				Relative Humidity		35	%		
Dielectric Constant $\epsilon_r$		IEEE Target		460 Meas.	Dev.	IEEE Target		460 Meas.	Dev.	Ambient Temperature		24.0	°C		
		43.5	± 5%	43.2	-0.7%	56.7	± 5%	57.5	+1.4%	Fluid Temperature		22.5	°C		
Conductivity $\sigma$ (mho/m)		IEEE Target		460 Meas.	Dev.	IEEE Target		460 Meas.	Dev.	Fluid Depth		≥ 15	cm		
		0.87	± 5%	0.85	-2.3%	0.94	± 5%	0.94	0.0%	$\rho$ (Kg/m <sup>3</sup> )		1000			
<b>Notes</b>															
1.	Detailed measurement plots showing the maximum SAR location of the DUT are reported in Appendix A.														
2.	The transmission band of the DUT is less than 10 MHz; therefore single channel data only is required to be reported (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).														
3.	The power droop measured by the DASY4 system for the duration of the SAR evaluation was added to the measured SAR level to report the scaled SAR result as shown in the above test data table. A SAR-versus-Time power droop evaluation was also performed and the evaluation plot is shown in Appendix A (SAR Test Plots).														
4.	The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the PTT depressed.														
5.	The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within +/-2°C of the fluid temperature reported during the dielectric parameter measurements.														
6.	The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).														

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## 4.0 DETAILS OF SAR EVALUATION

The Uniden America Corporation Portable FM GMRS/FRS PTT Radio Transceiver (FCC ID: AMWUT052 / IC: 513C-UT052) was compliant for localized Specific Absorption Rate (General Population / Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

1. The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front of the DUT and the outer surface of the planar phantom.
2. The DUT was evaluated in a body-worn configuration with the back of the radio placed parallel and the belt-clip touching the outer surface of the planar phantom. The belt-clip accessory provided a 1.5 cm spacing from the back of the DUT to the outer surface of the planar phantom. The body-worn SAR evaluation was performed with the customer-supplied headset-microphone audio accessory connected to the audio jack of the DUT.
3. The conducted output power levels of the DUT were preset by the manufacturer prior to the SAR evaluations and were not measured by Celltech Labs Inc. due to the internal antenna type. The output power levels reported herein are ERP levels measured by Celltech Labs prior to the SAR evaluations on a 3-meter open area test site.
4. The area scan evaluation was performed with a fully charged battery pack. After the area scan was completed the battery pack was replaced with a fully charged battery pack prior to the zoom scan evaluation.
5. The face-held SAR evaluations were performed with the DUT set to the maximum power setting (boost mode) on GMRS Channel 1 in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed.
6. The body-worn SAR evaluations were performed with the DUT set to the normal power setting (normal mode) on GMRS Channel 1 in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. The DUT defaults to the normal mode power setting automatically when the headset audio accessory is connected.
7. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.

## 5.0 SAR EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.  
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.  
An area scan was determined as follows:
- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.  
A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix E). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

<b>Applicant:</b>	<b>Uniden America Corporation</b>	<b>FCC ID:</b>	<b>AMWUT052</b>	<b>IC:</b>	<b>513C-UT052</b>	
<b>DUT Type:</b>	<b>Portable GMRS/FRS UHF PTT Radio Transceiver</b>	<b>Tx Freq. Range:</b>	<b>462.5500 - 467.7125 MHz</b>			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 7 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## 6.0 SYSTEM PERFORMANCE CHECK


Prior to the SAR evaluation a daily system check was performed with a planar phantom and 450 MHz dipole (see Appendix B for system performance check test plot) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [5]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 398 mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$  from the SAR system manufacturer's dipole calibration target SAR value (see Appendix E for system manufacturer's dipole calibration procedures).

### SYSTEM PERFORMANCE CHECK EVALUATION


Test Date	Equiv. Tissue Freq. (MHz)	SAR 1g (W/kg)			Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		SPEAG Target	Meas.	Dev.	SPEAG Target	Meas.	Dev.	SPEAG Target	Meas.	Dev.						
May 31	Body 450	1.78 $\pm 10\%$	1.94	+9.0%	56.7 $\pm 5\%$	58.0	+2.3%	0.94 $\pm 5\%$	0.94	0.0%	1000	23.5	22.5	$\geq 15$	35	101.1

Notes

- The target SAR value is the measured values from the SAR system manufacturer's dipole calibration (see Appendix E).
- The target dielectric parameters are the nominal values from the SAR system manufacturer's dipole calibration (see Appendix E).
- The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within  $\pm 2^\circ\text{C}$  of the fluid temperature reported during the dielectric parameter measurements.
- The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).

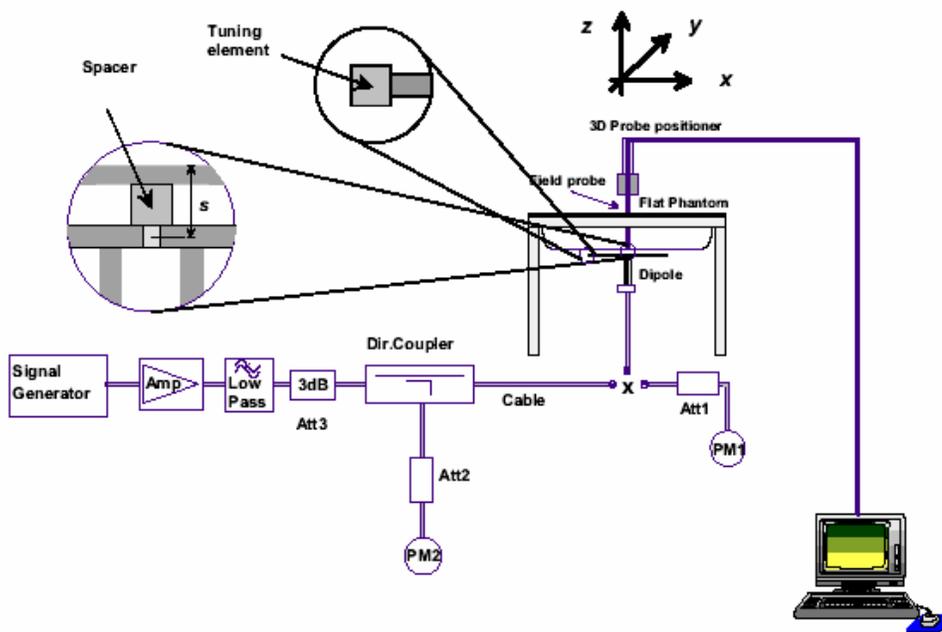

System Performance Check Measurement Setup (IEEE Standard 1528-2003)

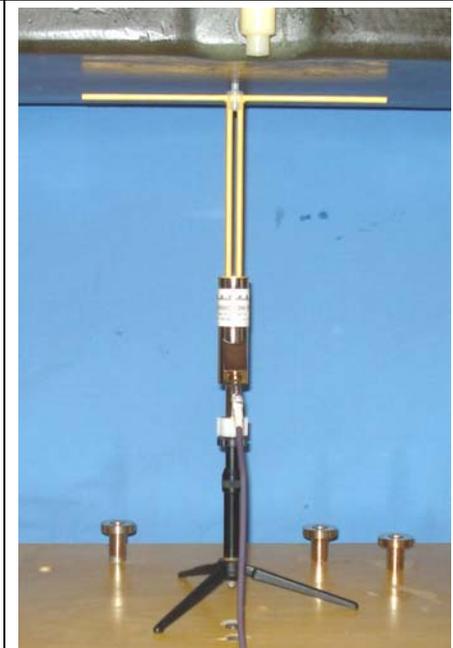

450 MHz Validation Dipole Setup

Applicant:	Uniden America Corporation	FCC ID:	AMWUT052	IC:	513C-UT052	
DUT Type:	Portable GMRS/FRS UHF PTT Radio Transceiver	Tx Freq. Range:	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 8 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## 7.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within  $\pm 50$  MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within  $\pm 100$  MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals,  $\pm 25$  MHz < 300 MHz and  $\pm 50$  MHz  $\geq$  300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [9]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	$\pm 50$ MHz $\geq$ 300 MHz
450 MHz	462.5625 MHz	12.5625 MHz	< 50 MHz
The probe calibration and measurement frequency interval is < 50 MHz; therefore the additional steps are not required.			

## 8.0 SIMULATED EQUIVALENT TISSUES

The simulated equivalent tissue recipe in the table below is derived from the SAR system manufacturer's suggested recipe in the DASY4 manual (see references [10] and [11]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2003 (see reference [5]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz HEAD	450 MHz BODY
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

## 9.0 SAR LIMITS

SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	General Population	Occupational
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## 10.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
<b>Positioner</b>	Stäubli Unimation Corp. Robot Model: RX60L
<b>Repeatability</b>	0.02 mm
<b>No. of axis</b>	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
<b>Processor</b>	AMD Athlon XP 2400+
<b>Clock Speed</b>	2.0 GHz
<b>Operating System</b>	Windows XP Professional
<u>Data Converter</u>	
<b>Features</b>	Signal Amplifier, multiplexer, A/D converter, and control logic
<b>Software</b>	Measurement Software: DASY4, V4.7 Build 44 Postprocessing Software: SEMCAD, V1.8 Build 171
<b>Connecting Lines</b>	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
<b>Function</b>	Real-time data evaluation for field measurements and surface detection
<b>Hardware</b>	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
<b>Connections</b>	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
<b>Model</b>	ET3DV6
<b>Serial No.</b>	1590
<b>Construction</b>	Triangular core fiber optic detection system
<b>Frequency</b>	10 MHz to 6 GHz
<b>Linearity</b>	±0.2 dB (30 MHz to 3 GHz)
<u>Evaluation Phantom</u>	
<b>Type</b>	Planar Phantom
<b>Shell Material</b>	Fiberglass
<b>Thickness</b>	2.0 ±0.1 mm
<b>Volume</b>	Approx. 70 liters
<u>Validation Phantom</u>	
<b>Type</b>	Planar Phantom
<b>Shell Material</b>	Fiberglass
<b>Thickness</b>	2.0 ±0.1 mm
<b>Volume</b>	Approx. 70 liters

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 10 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## 11.0 PROBE SPECIFICATION (ET3DV6)

<p><b>Construction:</b> Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)</p> <p><b>Calibration:</b> In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy <math>\pm 8\%</math>)</p> <p><b>Frequency:</b> 10 MHz to &gt; 6 GHz; Linearity: <math>\pm 0.2</math> dB (30 MHz to 3 GHz)</p> <p><b>Directivity:</b> <math>\pm 0.2</math> dB in head tissue (rotation around probe axis) <math>\pm 0.4</math> dB in head tissue (rotation normal to probe axis)</p> <p><b>Dynamic Range:</b> 5 <math>\mu</math>W/g to &gt; 100 mW/g; Linearity: <math>\pm 0.2</math> dB</p> <p><b>Surface Detect:</b> <math>\pm 0.2</math> mm repeatability in air and clear liquids over diffuse reflecting surfaces</p> <p><b>Dimensions:</b> Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm</p> <p><b>Application:</b> General dosimetry up to 3 GHz; Compliance tests of mobile phone</p>	
	<b>ET3DV6 E-Field Probe</b>

## 12.0 BARKSI PLANAR PHANTOM

<p>The Barski Planar Phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table. The planar phantom was used for the DUT SAR evaluations and the system performance check evaluations. See Appendix G for dimensions and specifications of the planar phantom.</p>	
	<b>Barski Planar Phantom</b>

## 13.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	
	<b>Device Holder</b>

<b>Applicant:</b> Uniden America Corporation	<b>FCC ID:</b> AMWUT052	<b>IC:</b> 513C-UT052	
<b>DUT Type:</b> Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b> 462.5500 - 467.7125 MHz		
2010 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 11 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## 14.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	27Apr10	Annual
x	-ET3DV6 E-Field Probe	00017	1590	16Jul09	Annual
x	-SPEAG D450V3 Validation Dipole	000217	1068	18Jan10	Biennial
x	-Barski Planar Phantom	00155	03-01	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	04May10	Biennial
x	Gigatronics 80701A Power Sensor	00014	1833699	04May10	Biennial
x	HP 8753ET Network Analyzer	00134	US39170292	04May10	Biennial
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	CNR	CNR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

<b>Applicant:</b>	<b>Uniden America Corporation</b>	<b>FCC ID:</b>	<b>AMWUT052</b>	<b>IC:</b>	<b>513C-UT052</b>	
<b>DUT Type:</b>	<b>Portable GMRS/FRS UHF PTT Radio Transceiver</b>	<b>Tx Freq. Range:</b>	<b>462.5500 - 467.7125 MHz</b>			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 12 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## 15.0 MEASUREMENT UNCERTAINTIES

### UNCERTAINTY BUDGET FOR DEVICE EVALUATION

Uncertainty Component	IEEE 1528 Section	Uncertainty Value $\pm\%$	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value $\pm\%$ (1g)	Uncertainty Value $\pm\%$ (10g)	$V_i$ or $V_{eff}$
<b>Measurement System</b>									
Probe Calibration (450 MHz)	E.2.1	6.65	Normal	1	1	1	6.65	6.65	$\infty$
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	$\infty$
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	$\infty$
Boundary Effect	E.2.3	1	Rectangular	1.732050808	1	1	0.6	0.6	$\infty$
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	$\infty$
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	$\infty$
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	$\infty$
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	$\infty$
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	$\infty$
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	$\infty$
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	$\infty$
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	$\infty$
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	$\infty$
<b>Test Sample Related</b>									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	$\infty$
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	$\infty$
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	$\infty$
Liquid Conductivity (measured)	E.3.3	2.3	Normal	1	0.64	0.43	1.5	1.0	$\infty$
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	$\infty$
Liquid Permittivity (measured)	E.3.3	1.4	Normal	1	0.6	0.49	0.8	0.7	$\infty$
<b>Combined Standard Uncertainty</b>			<b>RSS</b>				<b>11.13</b>	<b>10.94</b>	
<b>Expanded Uncertainty (95% Confidence Interval)</b>			<b>k=2</b>				<b>22.27</b>	<b>21.88</b>	
<b>Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003</b>									

<b>Applicant:</b>	<b>Uniden America Corporation</b>	<b>FCC ID:</b>	<b>AMWUT052</b>	<b>IC:</b>	<b>513C-UT052</b>	
<b>DUT Type:</b>	<b>Portable GMRS/FRS UHF PTT Radio Transceiver</b>	<b>Tx Freq. Range:</b>	<b>462.5500 - 467.7125 MHz</b>			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## 16.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 4: March 2010.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] International Standard IEC 62209-2 Draft (106-62209-2-CDV\_090323) - "Human exposure to radio frequency fields from hand-held & body-mounted wireless comm. devices - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (30 MHz to 6 GHz)".
- [7] International Standard IEC 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [8] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01v04: November 2009.
- [9] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.
- [10] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [11] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [12] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."

<b>Applicant:</b>	<b>Uniden America Corporation</b>	<b>FCC ID:</b>	<b>AMWUT052</b>	<b>IC:</b>	<b>513C-UT052</b>	
<b>DUT Type:</b>	<b>Portable GMRS/FRS UHF PTT Radio Transceiver</b>	<b>Tx Freq. Range:</b>	<b>462.5500 - 467.7125 MHz</b>			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 14 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## APPENDIX A - SAR MEASUREMENT DATA

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 15 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 05/31/2010

**Face-held SAR - GMRS - Boost Mode - Channel 1 - 462.5625 MHz**

**DUT: Uniden GMR3699(-2CK); Type: Portable GMRS/FRS PTT Radio Transceiver; Serial: None (Pre-production)**

Ambient Temp: 24.0°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: UHF FM (CW)

Frequency: 462.5625 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 462.5625 \text{ MHz}$ ;  $\sigma = 0.85 \text{ mho/m}$ ;  $\epsilon_r = 43.2$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.34, 7.34, 7.34); Calibrated:16/07/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**Face-held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom**

**Area Scan (6x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.88 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 48.1 V/m; Power Drift = -0.584 dB

Peak SAR (extrapolated) = 2.45 W/kg


**SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.32 mW/g**

Maximum value of SAR (measured) = 1.87 mW/g

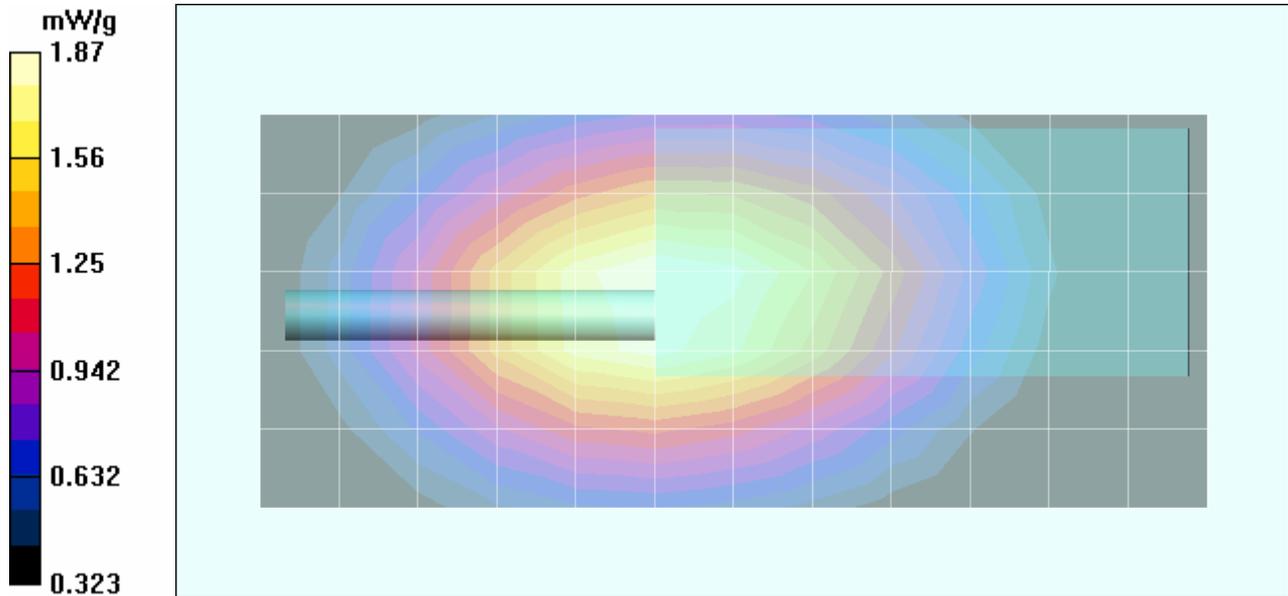

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 16 of 32


## Z-Axis Scan

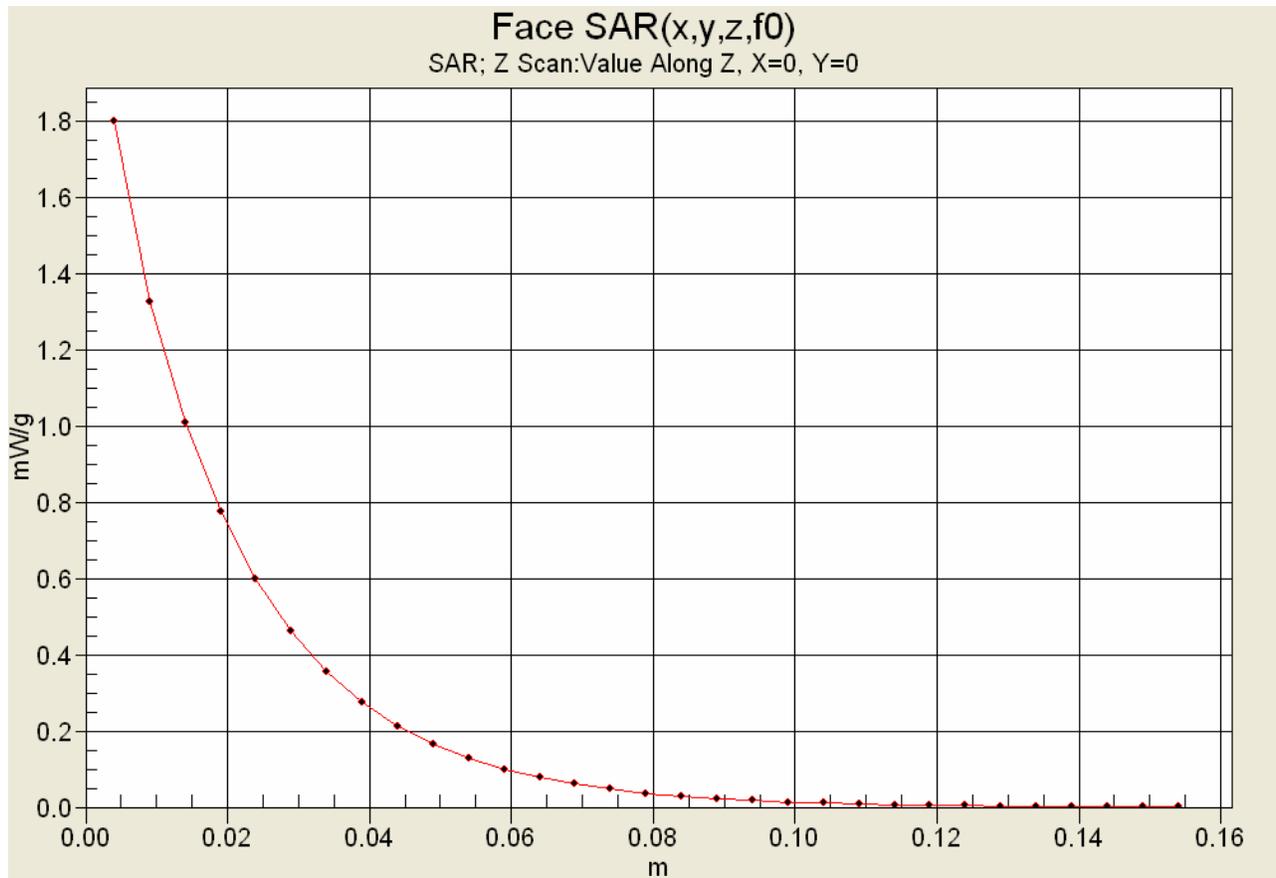

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## SAR-versus-Time Droop Evaluation

Face-held Configuration  
 GMRS Boost Mode  
 Ch. 1 (462.5625 MHz)  
 Ni-MH Battery Pack

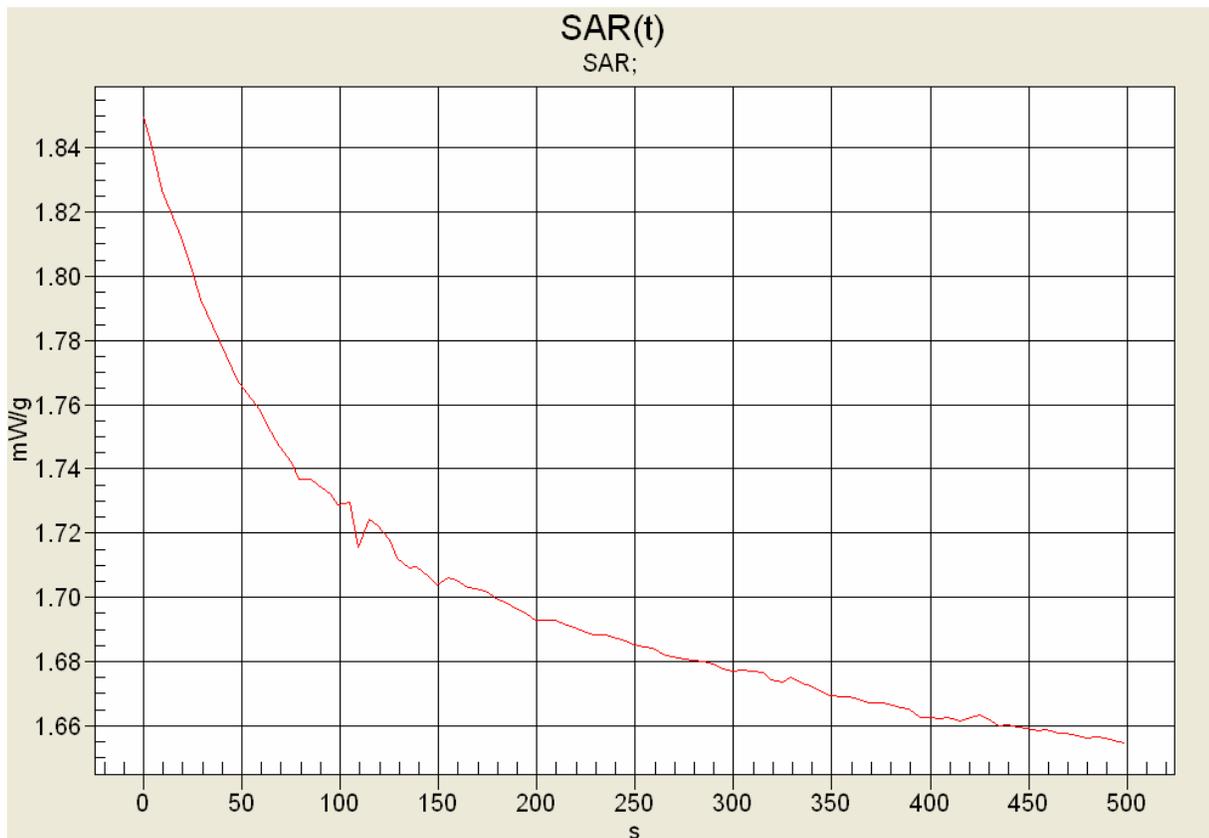

Start SAR: 1.849 mW/g  
 End SAR: 1.654 mW/g (-0.484 dB)  
 SAR after 340s: 1.670 mW/g (-0.442 dB)  
 (340s = Zoom Scan Duration)  
 (500s = Area Scan Duration)

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 05/31/2010

**Body-worn SAR - GMRS - Normal Mode - Channel 1 - 462.5625 MHz**

**DUT: Uniden GMR3699(-2CK); Type: Portable GMRS/FRS PTT Radio Transceiver; Serial: None (Pre-production)**

Ambient Temp: 24.0°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: UHF FM (CW)

Frequency: 462.5625 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used:  $f = 462.5625 \text{ MHz}$ ;  $\sigma = 0.94 \text{ mho/m}$ ;  $\epsilon_r = 57.5$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.34, 7.34, 7.34); Calibrated:16/07/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom**

**Area Scan (8x17x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.82 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 39.8 V/m; Power Drift = 0.133 dB

Peak SAR (extrapolated) = 2.51 W/kg

**SAR(1 g) = 1.75 mW/g; SAR(10 g) = 1.26 mW/g**


Maximum value of SAR (measured) = 1.85 mW/g

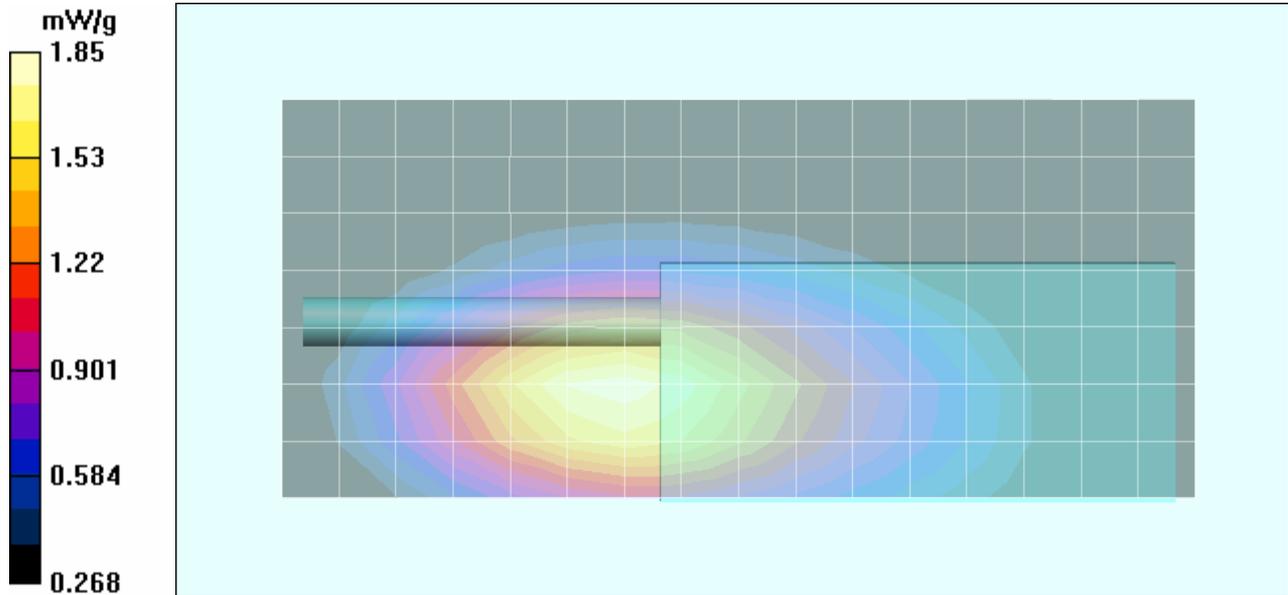

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## Z-Axis Scan

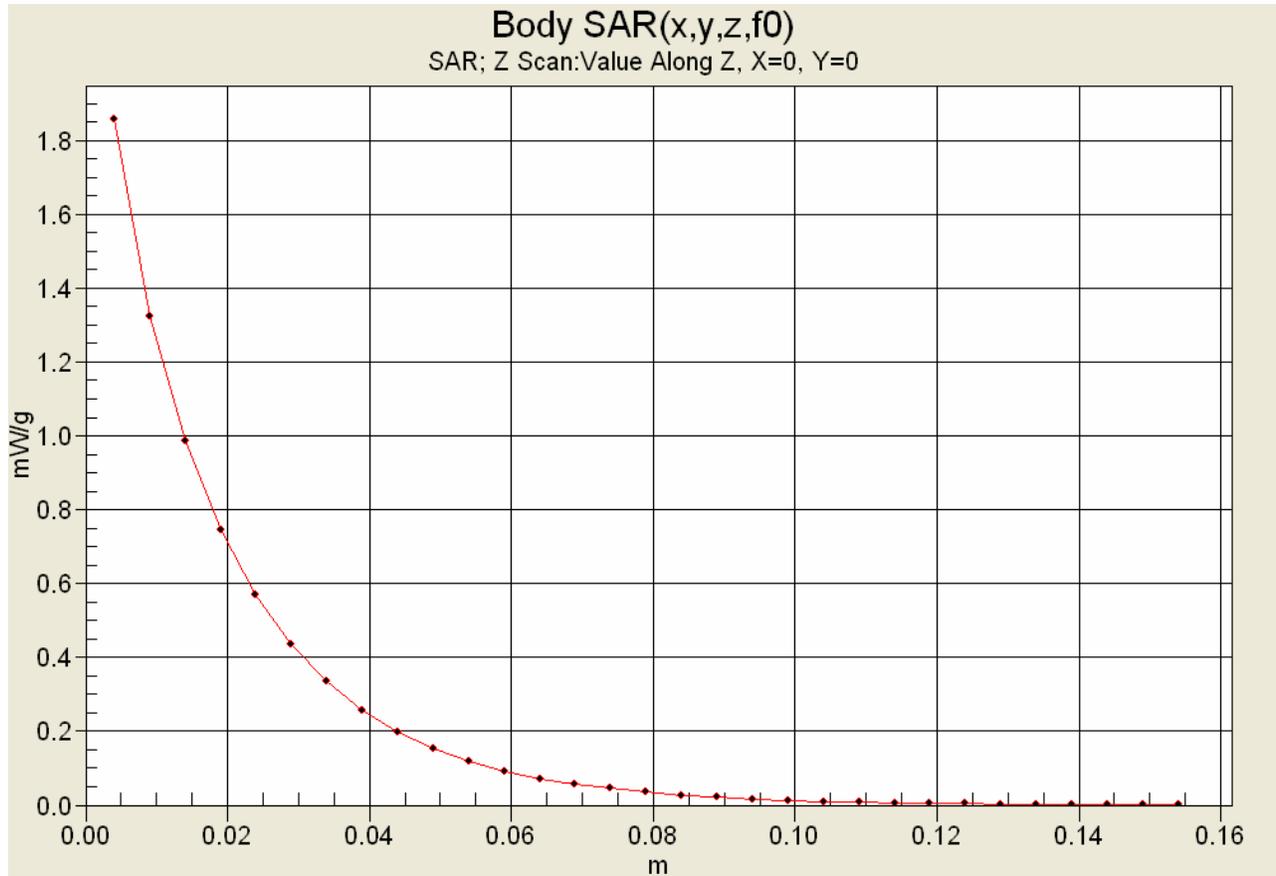

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 21 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

Date Tested: 05/31/2010

## System Performance Check - 450 MHz Dipole - MSL

**DUT: Dipole D450V3; Asset: 000217; Serial: 1068; Calibration: 01/18/2010**

Ambient Temp: 23.5°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 398 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.94 \text{ mho/m}$ ;  $\epsilon_r = 58$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.34, 7.34, 7.34); Calibrated: 16/07/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### System Performance Check - 450 MHz Dipole

**Area Scan (6x11x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.01 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 47.4 V/m; Power Drift = -0.096 dB

Peak SAR (extrapolated) = 3.05 W/kg

**SAR(1 g) = 1.94 mW/g; SAR(10 g) = 1.3 mW/g**


Maximum value of SAR (measured) = 2.06 mW/g

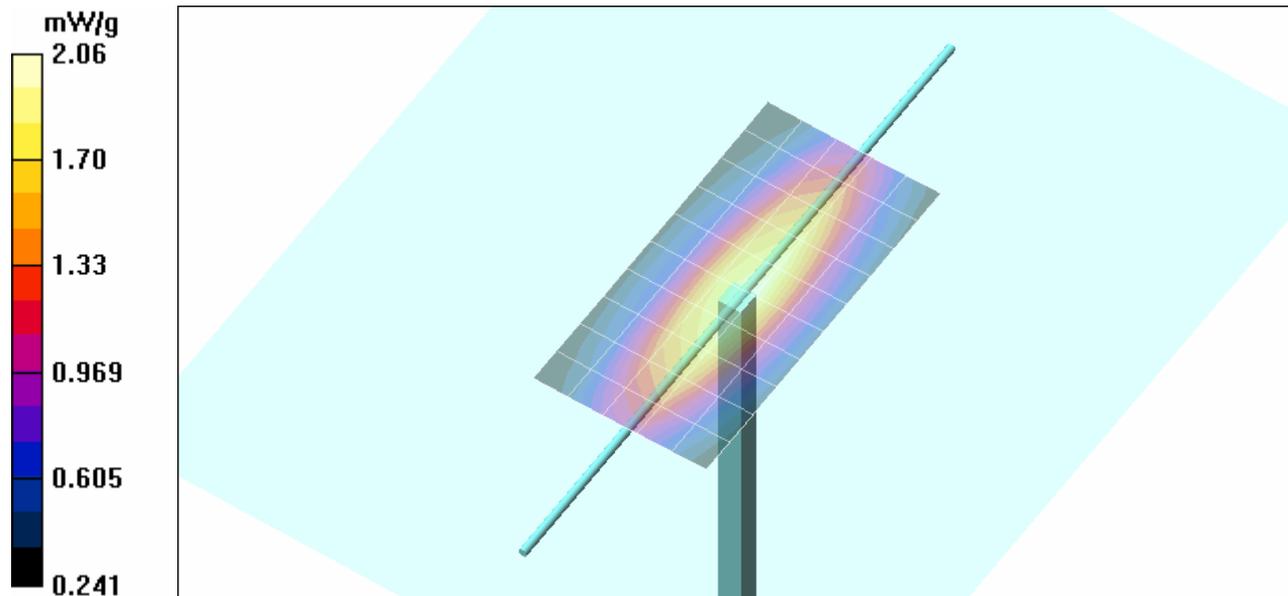

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 22 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

### Z-Axis Scan

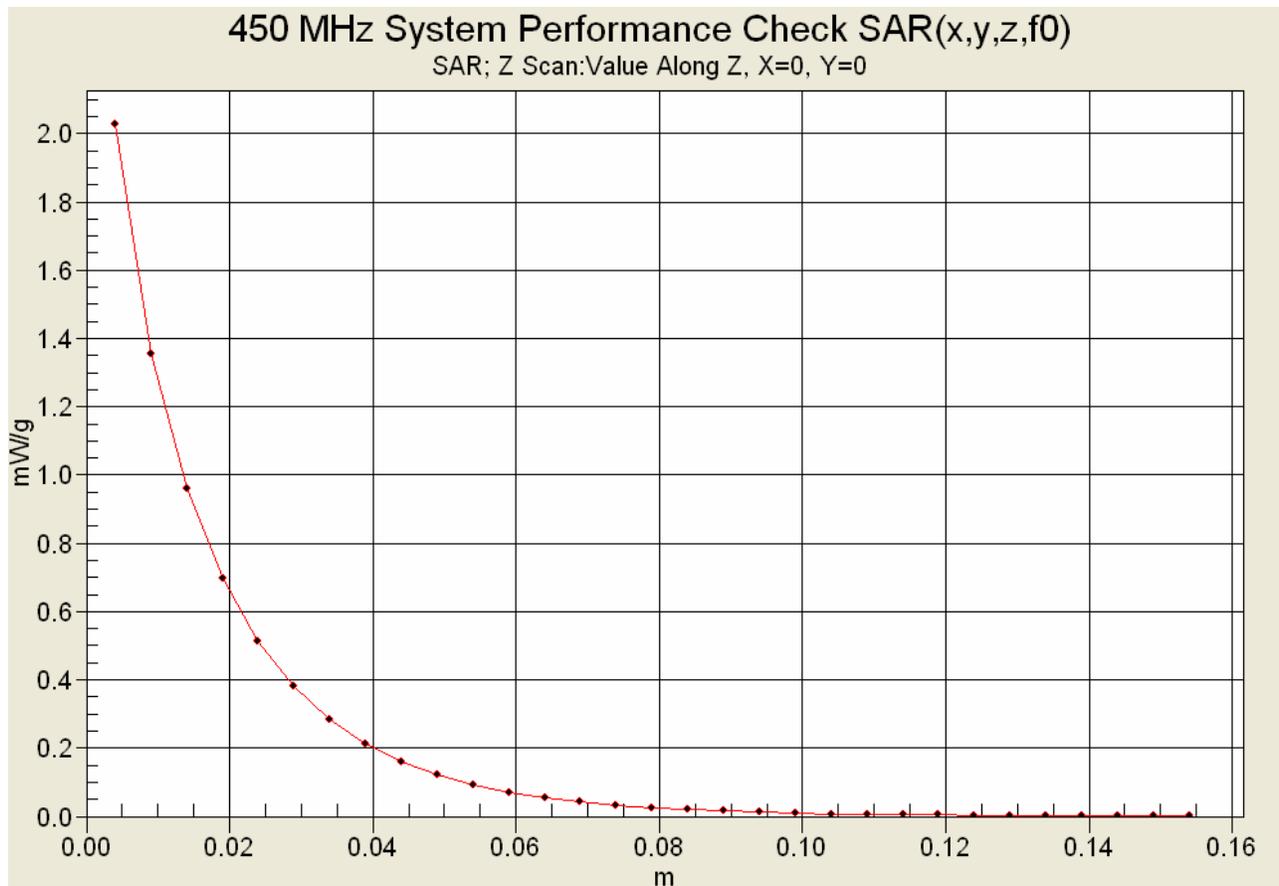

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 23 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

**APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS**

<b>Applicant:</b>	<b>Uniden America Corporation</b>	<b>FCC ID:</b>	<b>AMWUT052</b>	<b>IC:</b>	<b>513C-UT052</b>	
<b>DUT Type:</b>	<b>Portable GMRS/FRS UHF PTT Radio Transceiver</b>	<b>Tx Freq. Range:</b>	<b>462.5500 - 467.7125 MHz</b>			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 24 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

### 460 MHz DUT Evaluation (Head)

\*\*\*\*\*

Celltech Labs Inc.  
 Test Result for UIM Dielectric Parameter  
 31/May/2010  
 Frequency (GHz)  
 FCC\_eHFCC OET 65 Supplement C (June 2001) Limits for Body Epsilon  
 FCC\_sHFCC OET 65 Supplement C (June 2001) Limits for Body Sigma  
 Test\_e Epsilon of UIM  
 Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eHFCC_sH	Test_e	Test_s
0.3500	44.70	0.87	44.94
0.3600	44.58	0.87	44.51
0.3700	44.46	0.87	44.76
0.3800	44.34	0.87	44.49
0.3900	44.22	0.87	44.65
0.4000	44.10	0.87	44.42
0.4100	43.98	0.87	44.28
0.4200	43.86	0.87	44.43
0.4300	43.74	0.87	43.45
0.4400	43.62	0.87	43.15
0.4500	43.50	0.87	43.35
0.4600	43.45	0.87	43.22
0.4700	43.40	0.87	42.59
0.4800	43.34	0.87	43.14
0.4900	43.29	0.87	42.50
0.5000	43.24	0.87	42.65
0.5100	43.19	0.87	42.02
0.5200	43.14	0.88	41.50
0.5300	43.08	0.88	41.10
0.5400	43.03	0.88	41.67
0.5500	42.98	0.88	41.78

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 25 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

### 450 MHz System Performance Check & 460 MHz DUT Evaluation (Body)

\*\*\*\*\*

Celltech Labs Inc.  
 Test Result for UIM Dielectric Parameter  
 31/May/2010  
 Frequency (GHz)  
 FCC\_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma  
 FCC\_eB FCC Limits for Body Epsilon  
 FCC\_sB FCC Limits for Body Sigma  
 Test\_e Epsilon of UIM  
 Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	59.75	0.85
0.3600	57.60	0.93	58.98	0.87
0.3700	57.50	0.93	59.27	0.87
0.3800	57.40	0.93	59.35	0.88
0.3900	57.30	0.93	58.50	0.89
0.4000	57.20	0.93	57.90	0.90
0.4100	57.10	0.93	58.57	0.91
0.4200	57.00	0.94	57.82	0.92
0.4300	56.90	0.94	57.67	0.92
0.4400	56.80	0.94	58.37	0.93
0.4500	56.70	0.94	57.96	0.94
0.4600	56.66	0.94	57.53	0.94
0.4700	56.62	0.94	57.55	0.95
0.4800	56.58	0.94	57.40	0.96
0.4900	56.54	0.94	57.74	0.97
0.5000	56.51	0.94	57.27	0.97
0.5100	56.47	0.94	56.84	0.97
0.5200	56.43	0.95	57.42	0.99
0.5300	56.39	0.95	56.81	1.00
0.5400	56.35	0.95	56.94	1.02
0.5500	56.31	0.95	56.64	1.01

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 26 of 32

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	


## APPENDIX D - SAR TEST SETUP PHOTOGRAPHS

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 27 of 32

**FACE-HELD SAR TEST SETUP PHOTOGRAPHS**  
2.5 cm Spacing from Front of DUT to Planar Phantom



**BODY-WORN SAR TEST SETUP PHOTOGRAPHS**  
1.5 cm Belt-Clip Spacing from Front of DUT to Planar Phantom  
DUT with Headset-Microphone Audio Accessory

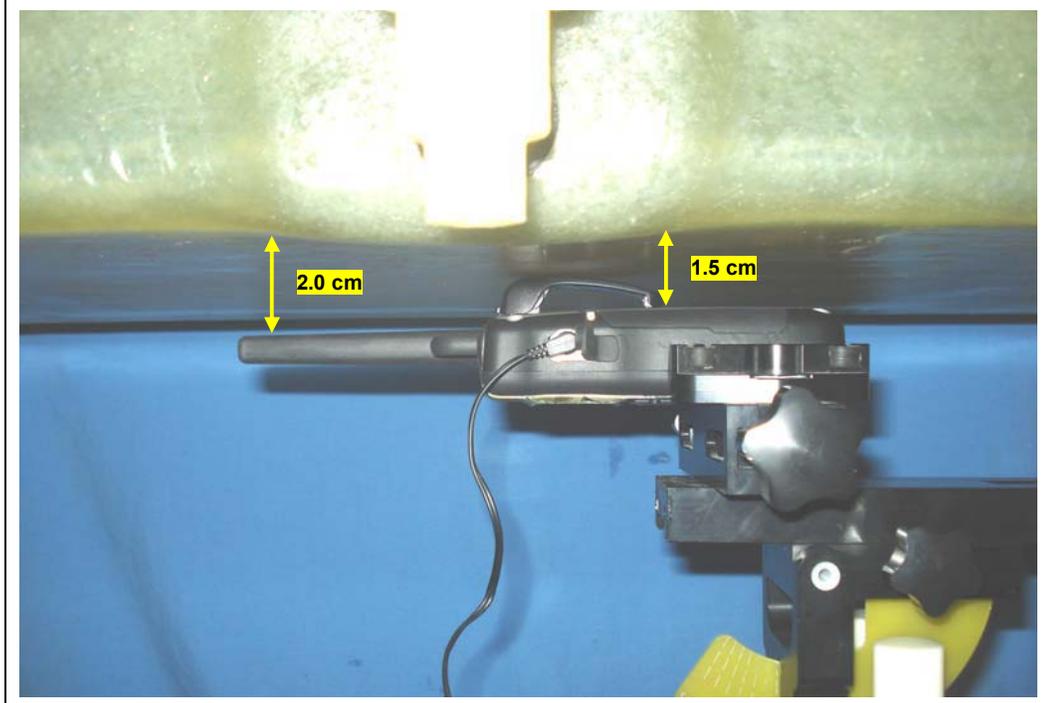

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## APPENDIX E - DIPOLE CALIBRATION

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 30 of 32



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **D450V3-1068 Jan10**

## CALIBRATION CERTIFICATE

Object **D450V3 - SN: 1068**

Calibration procedure(s) **QA CAL-15.v5  
Calibration Procedure for dipole validation kits below 800 MHz**

Calibration date: **January 18, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ET3DV6 (LF)	SN: 1507	03-Jul-09 (No. ET3-1507_Jul09)	Jul-10
DAE4	SN: 654	04-May-09 (No. DAE4-654_May09)	May-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

Calibrated by: **Jeton Kastrati**      Function: **Laboratory Technician**      Signature: *i.v. [Signature]*

Approved by: **Katja Pokovic**      Technical Manager      *[Signature]*

Issued: January 20, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
ConF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- d) DASY4 System Handbook

### Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V5.2
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	ELI4 Flat Phantom	Shell thickness: $2 \pm 0.2$ mm
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Area Scan Resolution</b>	dx, dy = 15 mm	
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	450 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	43.5	0.87 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	44.2 $\pm$ 6 %	0.86 mho/m $\pm$ 6 %
<b>Head TSL temperature during test</b>	(22.0 $\pm$ 0.2) °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	condition	
SAR measured	398 mW input power	1.87 mW / g
SAR normalized	normalized to 1W	4.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>4.76 mW / g <math>\pm</math> 18.1 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	398 mW input power	1.25 mW / g
SAR normalized	normalized to 1W	3.14 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>3.17 mW / g <math>\pm</math> 17.6 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	0.90 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	condition	
SAR measured	398 mW input power	1.78 mW / g
SAR normalized	normalized to 1W	4.47 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>4.58 mW / g ± 18.1 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	398 mW input power	1.19 mW / g
SAR normalized	normalized to 1W	2.99 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>3.06 mW / g ± 17.6 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	57.5 $\Omega$ - 5.9 j $\Omega$
Return Loss	- 21.0 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	54.8 $\Omega$ - 9.3 j $\Omega$
Return Loss	- 20.0 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.350 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 16, 2009

# DASY5 Validation Report for Head TSL

Date/Time: 1/18/2010 10:59:37 AM

**DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068**

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1  
Medium: HSL450

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.86$  mho/m;  $\epsilon_r = 44.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

## DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(6.66, 6.66, 6.66); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Head/d=15mm, Pin=398mW/Area Scan (41x111x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.99 mW/g


**Head/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.2 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 2.78 W/kg

**SAR(1 g) = 1.87 mW/g; SAR(10 g) = 1.25 mW/g**

Maximum value of SAR (measured) = 2 mW/g

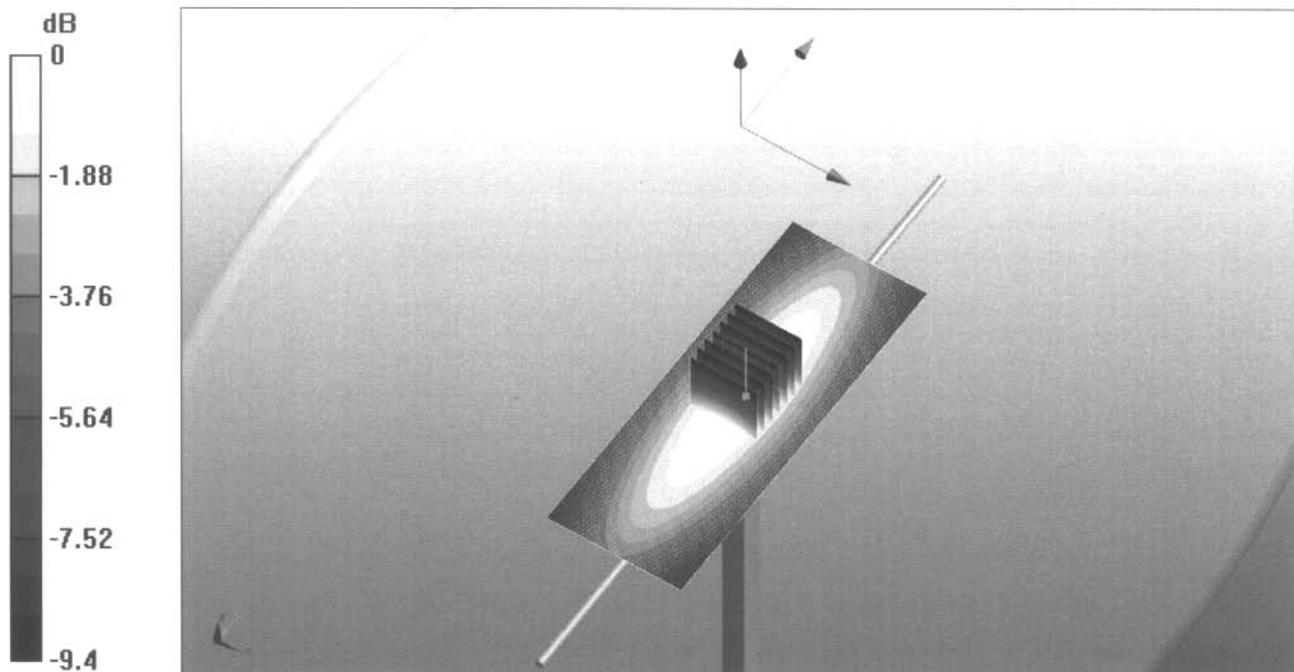

0 dB = 2mW/g

# Impedance Measurement Plot for Head TSL


18 Jan 2010 10:25:40

CH1 S11 1 U FS

1: 57.502  $\Omega$  -5.9180  $\Omega$  59.763 pF

450.000 000 MHz

\*  
Del  
Cor

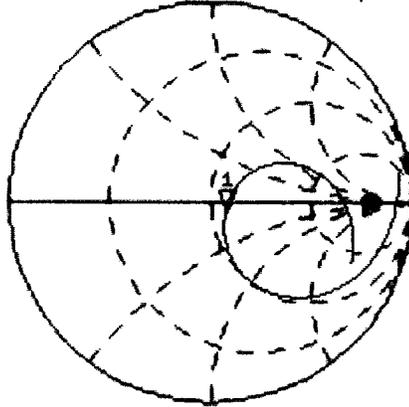

Avg  
16

↑

CH2 S11 LOG

5 dB/REF -20 dB


1: -21.035 dB

450.000 000 MHz

Cor

Avg  
16

↑

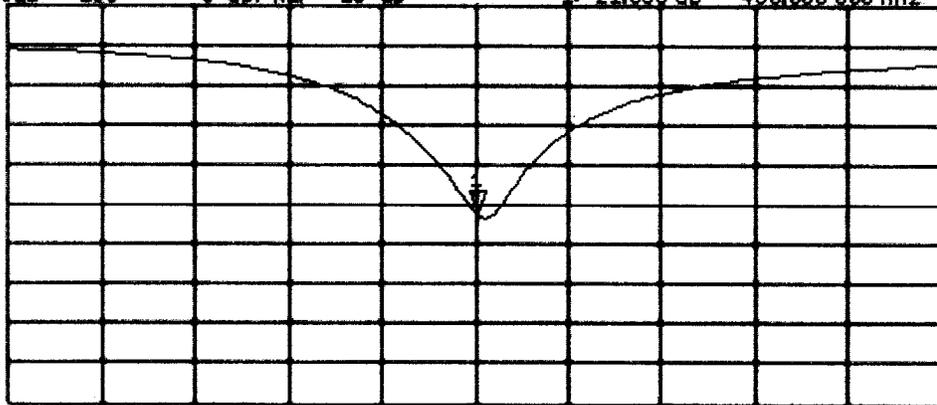

START 250.000 000 MHz

STOP 650.000 000 MHz

# DASY5 Validation Report for Body TSL

Date/Time: 1/18/2010 1:24:11 PM

**DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068**

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450

Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.9 \text{ mho/m}$ ;  $\epsilon_r = 54.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(7.11, 7.11, 7.11); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Body/d=15mm, Pin=398mW/Area Scan (61x201x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.9 mW/g


**Body/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 47.4 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 2.71 W/kg

**SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.19 mW/g**

Maximum value of SAR (measured) = 1.9 mW/g

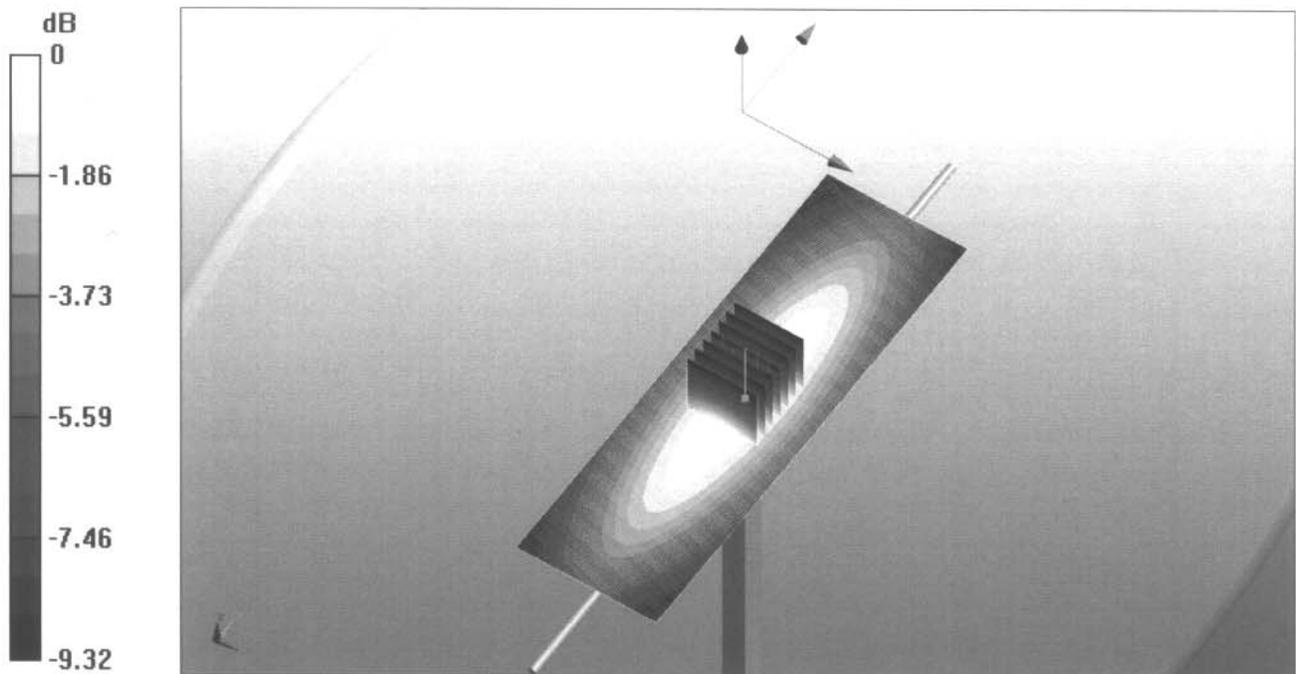


0 dB = 1.9mW/g

# Impedance Measurement Plot for Body TSL

18 Jan 2010 12:18:41

CH1 S11 1 U FS 1: 54.824  $\Omega$  -9.3047  $\Omega$  38.011 pF 450.000 000 MHz

\*  
Del  
Cor

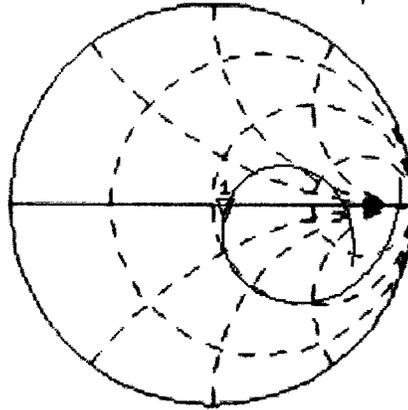

Avg  
16


↑

CH2 S11 LOG 5 dB/REF -20 dB 1:-20.034 dB 450.000 000 MHz

Cor

Avg  
16

↑

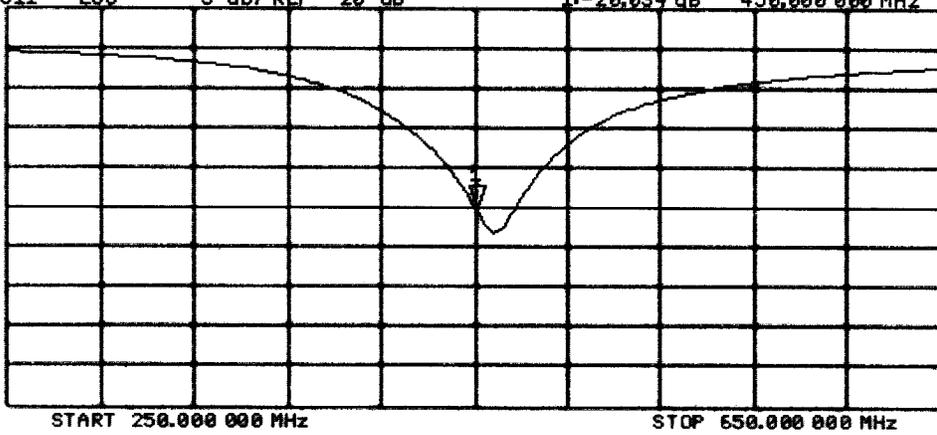

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## APPENDIX F - PROBE CALIBRATION

<b>Applicant:</b>	Uniden America Corporation	<b>FCC ID:</b>	AMWUT052	<b>IC:</b>	513C-UT052	
<b>DUT Type:</b>	Portable GMRS/FRS UHF PTT Radio Transceiver	<b>Tx Freq. Range:</b>	462.5500 - 467.7125 MHz			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 31 of 32



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **ET3-1590\_Jul09**

## CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v5, QA CAL-23.v3 and QA CAL-25.v2  
Calibration procedure for dosimetric E-field probes**

Calibration date: **July 16, 2009**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10
Reference Probe ES3DV2	SN: 3013	2-Jan-09 (No. ES3-3013_Jan09)	Jan-10
DAE4	SN: 660	9-Sep-08 (No. DAE4-660_Sep08)	Sep-09

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by:	Name	Function	Signature
	<b>Marcel Fehr</b>	Laboratory Technician	

Approved by:	Name	Function	Signature
	<b>Katja Pokovic</b>	Technical Manager	

Issued: July 16, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ET3DV6

## SN:1590

Manufactured:	March 19, 2001
Last calibrated:	July 21, 2008
Recalibrated:	July 16, 2009


Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)






### Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

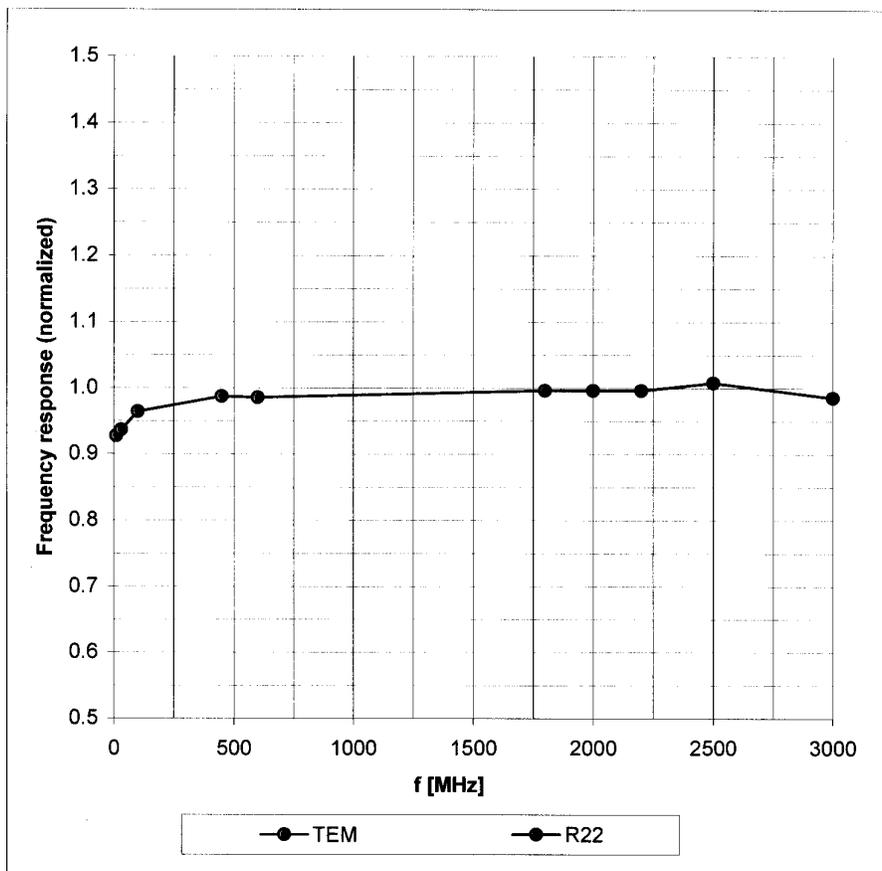



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

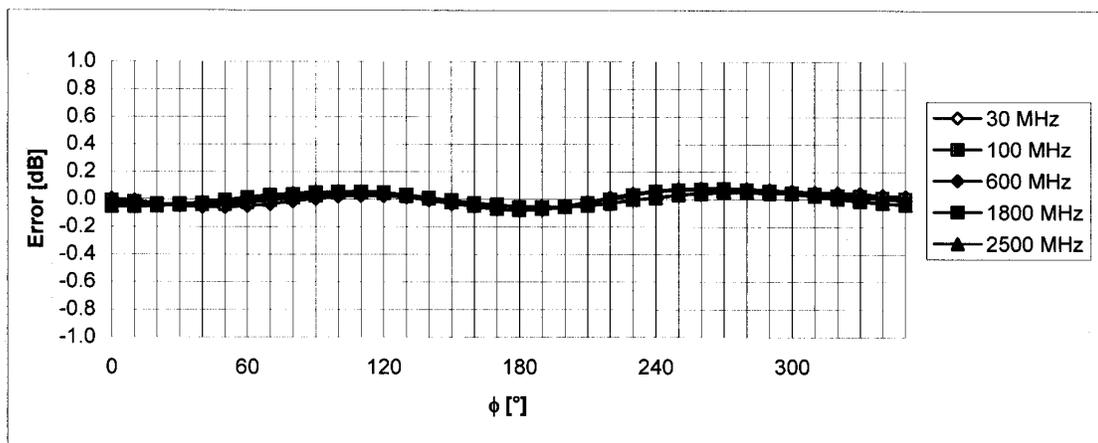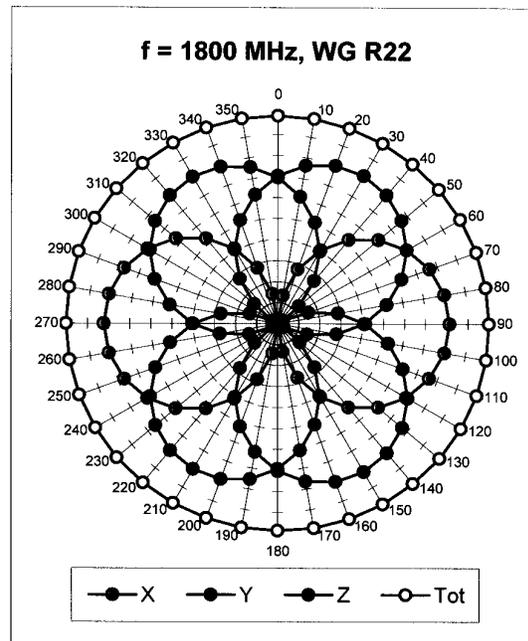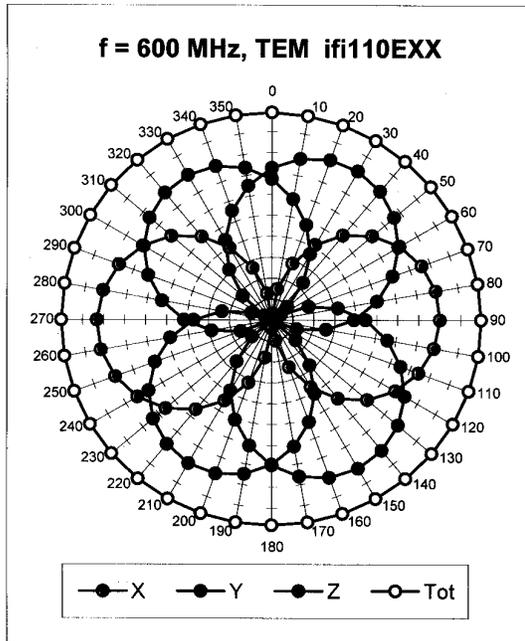



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

### Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$ )

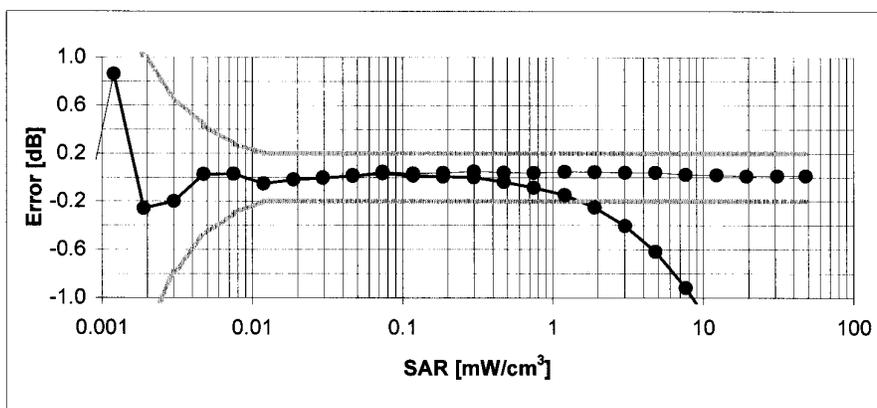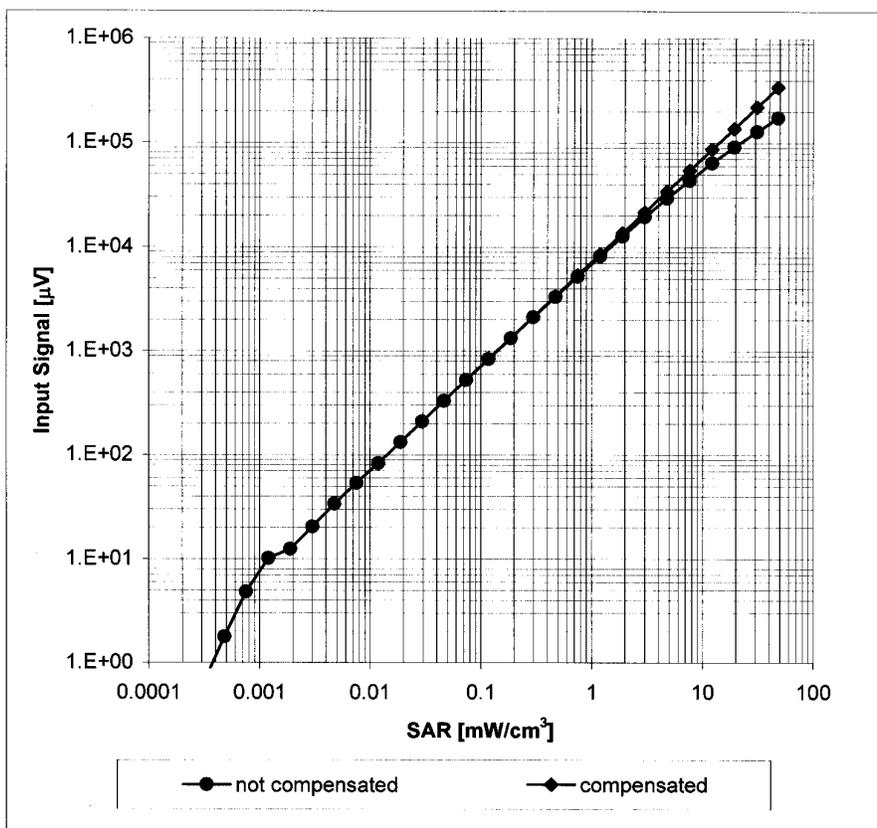

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

### Conversion Factor Assessment

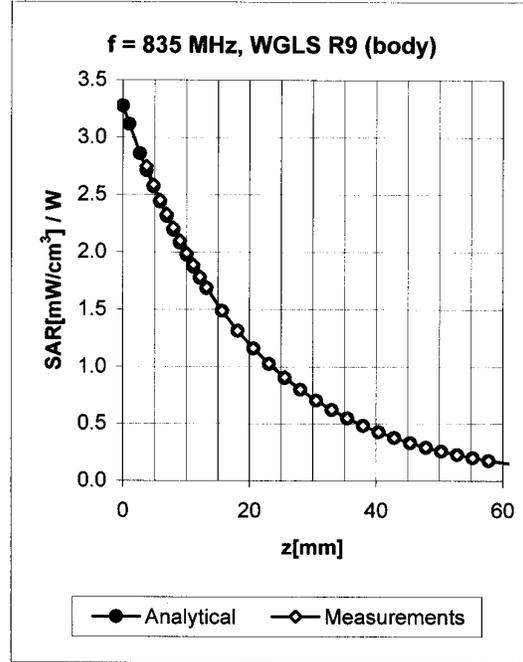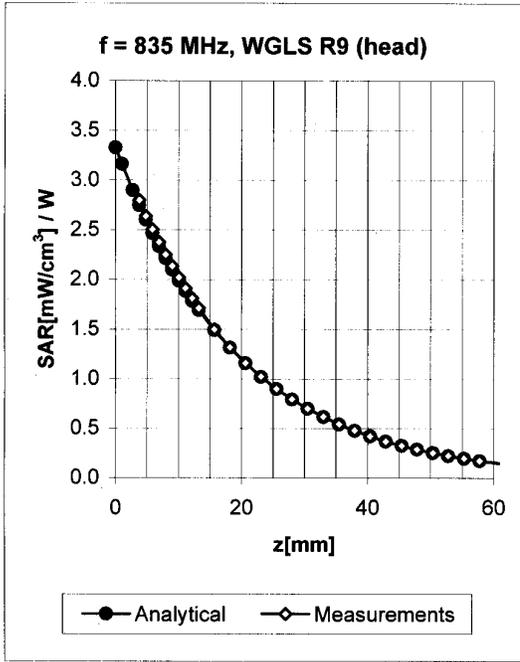


f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.29	1.90	7.34 ± 13.3% (k=2)
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.37	2.32	6.59 ± 11.0% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.22	1.91	7.34 ± 13.3% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.30	2.77	6.34 ± 11.0% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

## Deviation from Isotropy in HSL

Error ( $\phi$ ,  $\vartheta$ ),  $f = 900$  MHz

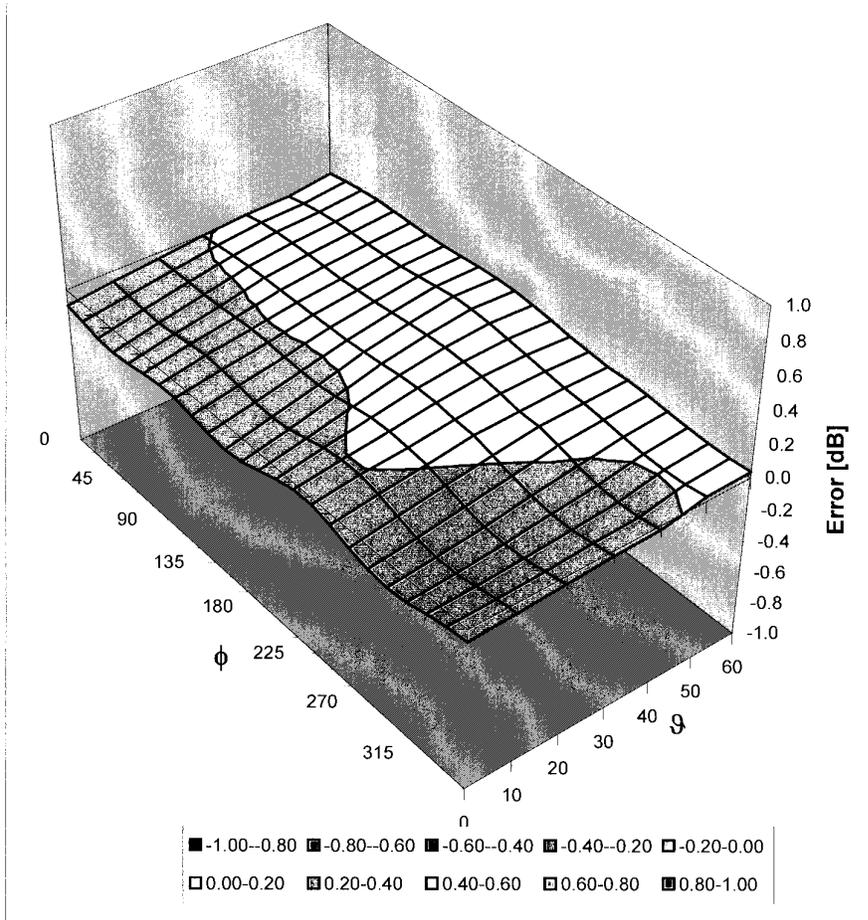

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

	<u>Date(s) of Evaluation</u> May 31, 2010	<u>Test Report Serial No.</u> 052610AMW-T1026-S95U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> June 29, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Gen. Pop. / Uncontrolled	

## APPENDIX G - PLANAR PHANTOM CERTIFICATE OF CONFORMITY

<b>Applicant:</b>	<b>Uniden America Corporation</b>	<b>FCC ID:</b>	<b>AMWUT052</b>	<b>IC:</b>	<b>513C-UT052</b>	
<b>DUT Type:</b>	<b>Portable GMRS/FRS UHF PTT Radio Transceiver</b>	<b>Tx Freq. Range:</b>	<b>462.5500 - 467.7125 MHz</b>			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 32 of 32

2378 Westlake Road  
Kelowna, B.C. Canada  
V1Z-2V2



Ph. # 250-769-6848  
Fax # 250-769-6334  
E-mail: [barskiind@shaw.ca](mailto:barskiind@shaw.ca)  
Web: [www.bcfiberglass.com](http://www.bcfiberglass.com)

## FIBERGLASS FABRICATORS

### Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01  
Date: June 16, 2003  
Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity < 5 Loss Tangent < 0.05

#### Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: \_\_\_\_\_

A handwritten signature in black ink, appearing to read 'Daniel Chailier', is written over a horizontal line.

Daniel Chailier



**Fiberglass Planar Phantom - Top View**



**Fiberglass Planar Phantom - Front View**




**Fiberglass Planar Phantom - Back View**



**Fiberglass Planar Phantom - Bottom View**

## Dimensions of Fiberglass Planar Phantom

(Manufactured by Barski Industries Ltd. - Unit# 03-01)

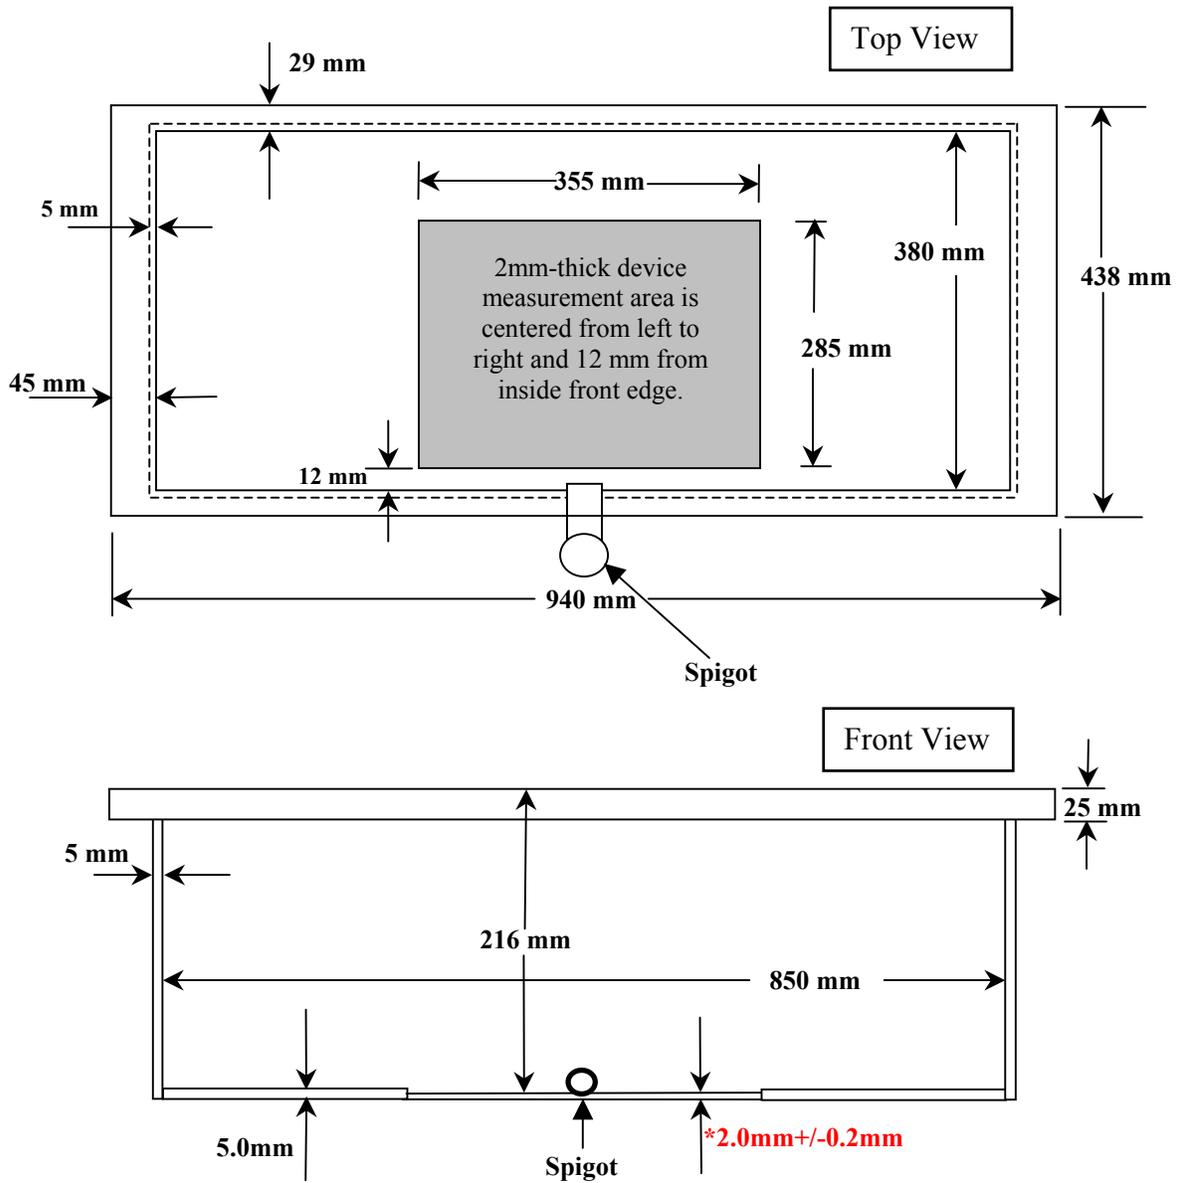

**Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.  
This drawing is not to scale.**