

SANYO

No. 462D

**2SC2078**

NPN Epitaxial Planar Type Silicon Transistor
27MHz RF POWER AMP APPLICATIONS

Absolute Maximum Ratings at Ta=25°C


Collector to Base Voltage	V_{CB0}		80	V
Collector to Emitter Voltage	V_{CER}	$R_{BE}=150\text{ohm}$	75	V
Emitter to Base Voltage	V_{EBO}		5	V
Collector Current	I_C		3	A
Peak Collector Current	i_{cp}		5	A
Collector Dissipation	P_C	$T_c=50^\circ\text{C}$	1.2	W
Junction Temperature	T_j		150	$^\circ\text{C}$
Storage Temperature	T_{stg}		-55 to +150	$^\circ\text{C}$

Electrical Characteristics Characteristics at Ta=25°C


			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB}=40\text{V}, I_E=0$			10	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=4\text{V}, I_C=0$			10	μA
DC Current Gain	h_{FE}	$V_{CE}=5\text{V}, I_C=0.5\text{A}$	25*		200*	
Gain Bandwidth Product	f_T	$V_{CE}=10\text{V}, I_C=0.1\text{A}$	100	150		MHz
Output Capacitance	c_{ob}	$V_{CB}=10\text{V}, f=1\text{MHz}$		45	60	pF
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C=1\text{A}, I_B=0.1\text{A}$		0.15	0.6	V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C=1\text{A}, I_B=0.1\text{A}$		0.9	1.2	V
C-B Saturation Voltage	$V_{(BR)CBO}$	$I_C=100\mu\text{A}, I_B=0$	80			V
C-E Saturation Voltage	$V_{(BR)CER}$	$I_C=1\text{mA}, R_{BE}=150\text{ohm}$	75			V
E-B Saturation Voltage	$V_{(BR)EBO}$	$I_E=100\mu\text{A}, I_C=0$	5			V
[At specified test circuit]						
Output Power	P_o	$V_{CC}=12\text{V}, f=27\text{MHz}, P_i=0.2\text{W}$	4.0			W
Power Efficiency	η		60			%

*: The 2SC2078 is classified by 0.5A h_{FE} as follows:

25	B	50	40	C	80	60	D	120	100	E	200
----	---	----	----	---	----	----	---	-----	-----	---	-----

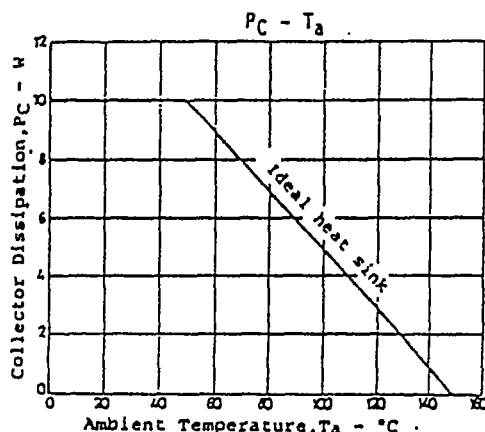

Case Outline 2010A
(unit:mm)

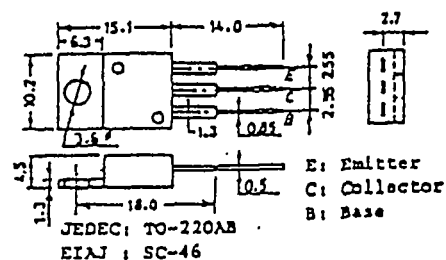

E: Emitter
C: Collector
B: Base

JEDEC: TO-220AB
EIAJ: SC-46


These specifications are subject to change without notice.

SANYO ELECTRIC CO., LTD. SEMICONDUCTOR DIVISION
15-13, 6-CHOME, SOTOKANDA, CHIYODA-KU, TOKYO 101 JAPAN







4147KI/3145KI/2274k1 No.462-1/3

2SC2078



2SC2078 27MHz Output Power Test Circuit

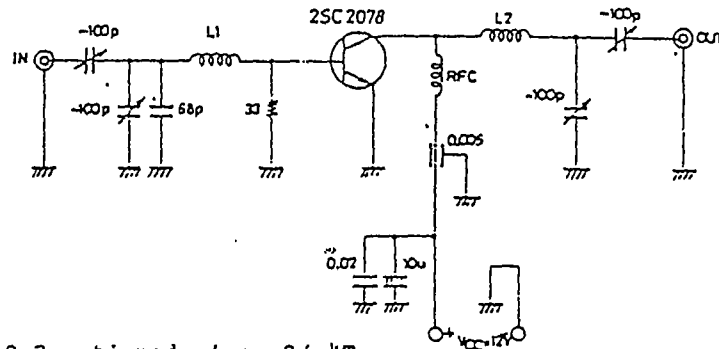

Coil data L1: 0.3mm tinned wire, 9 ϕ 4T
L2: 0.6mm tinned wire, 9 ϕ 4T
RFC 2.2uH

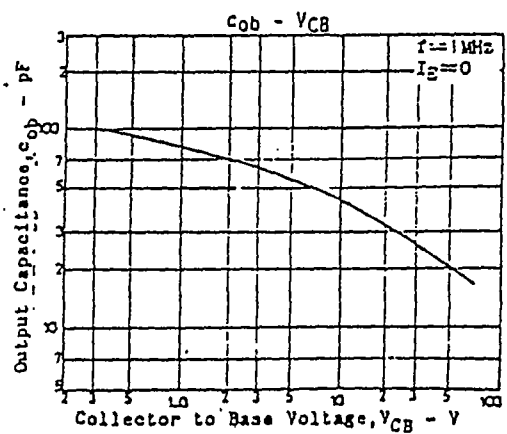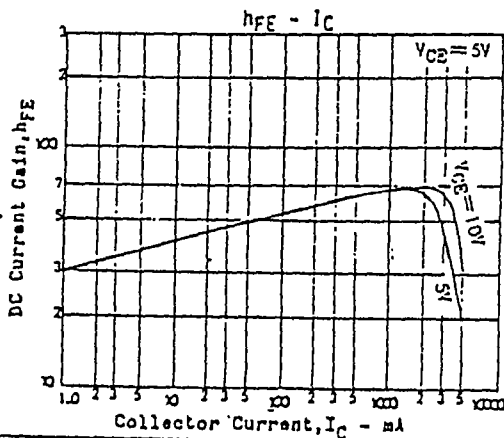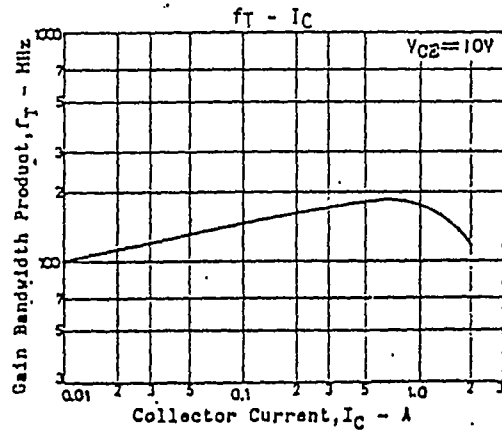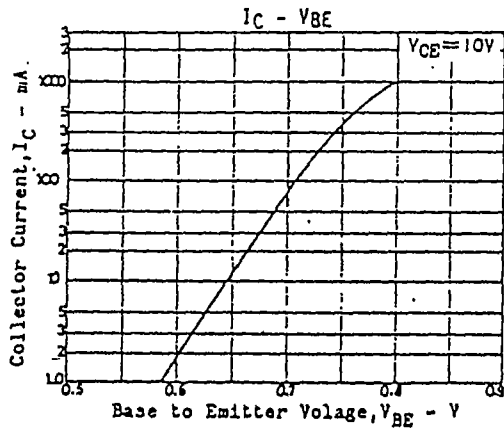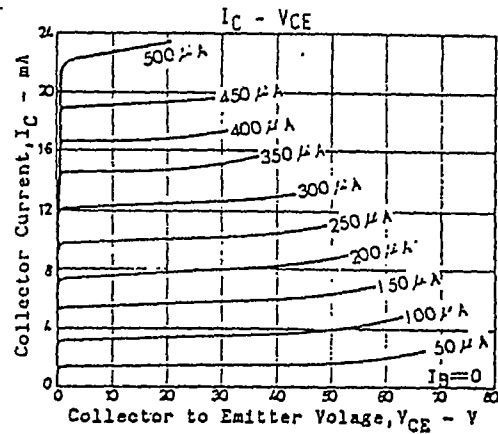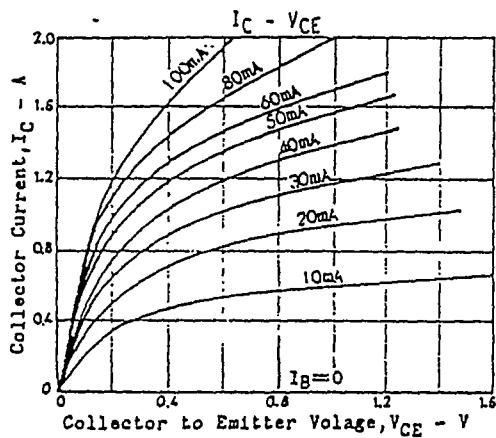

2SC2078

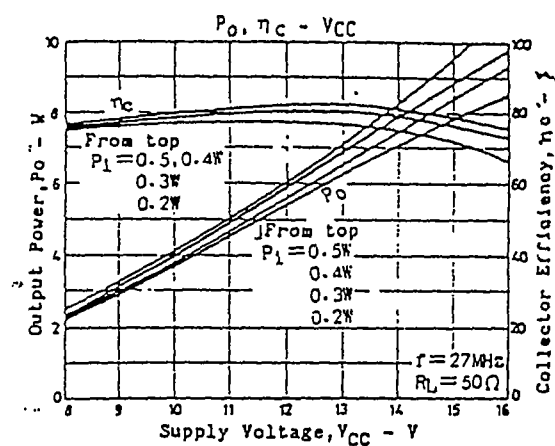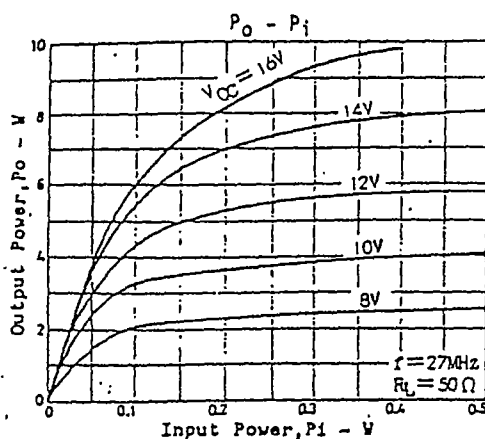

Information furnished by SANYO is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use; nor for any infringements of patents or other rights of third parties which may result from its use, and no license is granted by implication or otherwise under any patent or patent rights of SANYO.