



Test Report Serial Number:	45461675 R2.0
Test Report Date:	22 July 2021
Project Number:	1545

EMC Test Report - Class II Permissive Change

Applicant:



Uniden America Corporation
6225 N. Highway 161
Suite 300
Irving, Tx, 75038, USA

FCC ID:

AMWUT383

Product Model Number / HVIN

PRO510XL

PRO520XL

IC Registration Number

513C-UT383

Product Name / PMN

-

In Accordance With:

FCC 47 CFR Part 95 Subpart D, Part 15 Subpart B

Licensed Non-Broadcast Station Transmitter (TNB)

RSS-GEN, RSS-236 Issue 1

Citizen Band (26.960 to 27.410 MHz)

Approved By:

Ben Hewson, President
Celltech Labs Inc.
21-364 Lougheed Rd.
Kelowna, BC, V1X 7R8
Canada



Industry
Canada



Test Lab Certificate: 2470.01

IC Registration 3874A-1

FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

Table of Contents

1.0 DOCUMENT CONTROL	4
2.0 CLIENT AND DUT INFORMATION	5
3.0 SCOPE	6
4.0 TEST RESULT SUMMARY	7
5.0 NORMATIVE REFERENCES	8
6.0 FACILITIES AND ACCREDITATIONS	9
7.0 CONDUCTED POWER	10
8.0 MODULATION RESPONSE	15
9.0 OCCUPIED BANDWIDTH AND EMISSION MASKS	18
10 CONDUCTED OUT OF BAND SPURIOUS EMISSIONS	23
11.0 RADIATED SPURIOUS EMISSIONS	33
12.0 RECEIVER RADIATED EMISSIONS - DOC	39
13.0 FREQUENCY STABILITY	43
APPENDIX A – TEST SETUP DRAWINGS AND EQUIPMENT	45
APPENDIX B – EQUIPMENT LIST AND CALIBRATION	50
APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY	51
END OF REPORT	51

Table of Figures

Figure A.1 – Test Setup Conducted Measurements	45
Figure A.2 – Test Setup Audio Modulation Response Measurements	46
Figure A.3 – Test Setup Radiated Emissions Measurements	48
Figure A.4 – Test Setup Radiated Emissions Measurements w/ Signal Substitution	48
Figure A.4 – Test Setup Frequency Stability Measurements	49

Table of Tables

Table 7.1 – Summary of Conducted Power Measurements (RMS)	14
Table 7.2 – Compliance to §2.1033(c)(8)	14
Statement - Compliance to §95.977	15
Table 9.1 - Summary of Occupied Bandwidth and Emission Mask Results	22
Table 10.1 – Summary of Conducted Out of Band Emissions	32
Table 11.1 – Summary of Radiated Spurious Emissions	38
Table 12.1 – Summary of Receiver Radiated Emissions	42
Table 12.1 – Summary of Frequency Stability Results	44
Table A.1 – Setup - Conducted Measurements Equipment	45
Table A.2 – Setup - Audio Modulation Equipment	46
Table A.3 – Setup - Radiated Emissions Equipment	47
Table A.4 – Setup - Frequency Stability Measurement Equipment	49

Table of Plots

<i>Plot 7.1 – Conducted Output Power – Channel 1</i>	11
<i>Plot 7.2 – Conducted Output Power – Channel 19</i>	12
<i>Plot 7.3 – Conducted Output Power – Channel 40</i>	13
<i>Plot 8.1 – Audio Frequency Response</i>	16
<i>Plot 8.2 – Modulation Limiting Response</i>	17
<i>Plot 9.1 – Occupied Bandwidth Channel 1</i>	19
<i>Plot 9.2 – Occupied Bandwidth Channel 19</i>	20
<i>Plot 9.2 – Occupied Bandwidth Channel 40</i>	21
<i>Plot 10.1 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 1</i>	24
<i>Plot 10.2 – Conducted Out of Band Emissions, Channel 1, 3rd Harmonic</i>	25
<i>Plot 10.3 – Conducted Out of Band Emissions, Channel 1, 8th Harmonic</i>	26
<i>Plot 10.4 – Conducted Out of Band Emissions, Channel 1, 10th Harmonic</i>	27
<i>Plot 10.5 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 19</i>	28
<i>Plot 10.6 – Conducted Out of Band Emissions, Channel 19, 8th Harmonic</i>	29
<i>Plot 10.7 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 40</i>	30
<i>Plot 10.8 – Conducted Out of Band Emissions, Channel 40, 8th Harmonic</i>	31
<i>Plot 11.1 – Radiated Spurious Emissions, 30MHz – 1000MHz, With Accessories Horizontal</i>	34
<i>Plot 11.2 – Radiated Spurious Emissions, 30MHz – 1000MHz, With Accessories Vertical</i>	35
<i>Plot 11.3 – Radiated Spurious Emissions, 30MHz – 1000MHz, Without Accessories Horizontal</i>	36
<i>Plot 11.4 – Radiated Spurious Emissions, 30MHz – 1000MHz, Without Accessories Vertical</i>	37
<i>Plot 12.1 – Receiver Radiated Emissions, With Accessories, Horizontal</i>	40
<i>Plot 12.2 – Receiver Radiated Emissions, With Accessories, Vertical</i>	41

1.0 DOCUMENT CONTROL**Revision History**

Samples Tested By:	Art Voss, P.Eng.	Date(s) of Evaluation:	3 June - 14 July, 2021
Report Prepared By:	Art Voss, P.Eng.	Report Reviewed By:	Ben Hewson
Report Revision	Description of Revision	Revised Section	Revised By
1.0	Initial Release	n/a	Art Voss
2.0	Revised Applicant Address	Cover, 2	Art Voss

2.0 CLIENT AND DUT INFORMATION

Client Information	
Applicant Name	Uniden America Corporation
Applicant Address	6225 N. Highway 161, Suite 300 Irving, TX, 75038 USA
DUT Information	
Device Identifier(s):	FCC ID: AWMUT383 IC: 513C-UT383
Device Type:	Mobile CB Radio Transceiver
Type of Equipment:	Analog AM CB Transceiver
Device Model(s) / HVIN:	PRO510XL PRO520XL
Device Marketing Name / PMN:	-
Firmware Version ID Number / FVIN:	n/a
Host Marketing Name / HMN:	n/a
Test Sample Serial No.:	535-154501
Transmit Frequency Range:	26.965 - 27.405 MHz (Chan. 1-40)
Number of Channels:	40
Manuf. Max. Rated Output Power:	4.0W AM
Manuf. Max. Rated BW/Data Rate:	8kHz
Antenna Make and Model:	n/a
Antenna Type and Gain:	External Whip, 0dBi nominal (3dBi maximum).
Modulation:	AM
Mode:	n/a
DUT Power Source:	12 VDC External
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

3.0 SCOPE

This Certification Report was prepared on behalf of:

Uniden America Corporation

,(the '*Applicant*"), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and ,unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

Equipment Description: The PRO510XL and PRO520XL are mobile Citizen's Band (CBRS) 4W AM transceivers. The two variants are indentical in all aspects with the exception of user features. This *Equipment* was originallly certified in 2013.

Requirements: As per FCC 47 CFR Part §2.1091 and §2.1093, an RF Exposure evaluation report is required for this *Equipment* and the results of the RF Exposure evaluation appear in a separate exhibit from this report.

The Receiver of this *Equipment* is subject to Equipment Certification or Supplier's Declaration of Conformity (SDoC) in accordance with 47 CFR Part §15.101. The Receiver was evaluated in accordance with 47 CFR Part §15 Subpar B and ICES-003. A statement of the application the SDcC procedure appears in a separate exhibit from this report.

Application: This is an application for a Class II Permissive Change. Due to component obsolescence, some portion of the RF section required redesign/modification to accommodate replacement components. This *Equipment* was re-evaluated in accordance with 47 CFR §95D and RSS-236.

4.0 TEST RESULT SUMMARY
TEST SUMMARY

Referenced Standard(s):		FCC CFR Title 47 Parts 2, 95D, 15B, ISED RSS-Gen, RSS-236				
Section	Description of Test	Procedure Reference	Applicable Rule Part(s) FCC	Applicable Rule Part(s) ISEDC	Test Date	Result
7.0	Conducted Power (Fundamental)	ANSI/TIA/EIA-382-A ANSI C63.4:2014	§2.1046 §2.1033(c)(8) §95.967	RSS-Gen RSS-236 5.2	12 July 2021	Complies
8.0	Modulation Response	ANSI/TIA/EIA-382-A ANSI C63.4:2014	§2.1047 §95.975 §95.977	RSS-Gen	12 July 2021	Complies
9.0	Occupied Bandwidth	ANSI/TIA/EIA-382-A ANSI C63.4:2014	§2.1049 §95.973	RSS-Gen RSS-236 5.3.2	12 July 2021	Complies
	Emission Mask	ANSI/TIA/EIA-382-A ANSI C63.4:2014	§2.1049 §95.979	RSS-Gen RSS-236 5.4.4	12 July 2021	Complies
10.0	Conducted TX Spurious Emissions	ANSI/TIA/EIA-382-A ANSI C63.4:2014	§2.1051 §95.979	RSS-Gen RSS-236 5.4.4	13 July 2021	Complies
11.0	Radiated TX Spurious Emissions	ANSI/TIA/EIA-382-A ANSI C63.4:2014	§2.1053 §95.979	RSS-Gen RSS-236 5.4.4	3 June 2021	Complies
12.0	Radiated Receiver Emissions	ANSI C63.4:2014	§15 Subpart B	RSS-Gen	3 June 2021	Complies
13.0	Frequency Stability	ANSI/TIA/EIA-382-A ANSI C63.4:2014	§2.1055 §95.965	RSS-Gen	13 July 2021	Complies

Test Station Day Log

Date	Ambient Temp (°C)	Relative Humidity (%)	Barometric Pressure (kPa)	Test Station	Tests Performed Section(s)
3 June 2021	21.0	50	101.1	OATS	11, 12
12 July 2021	25.2	16	101.3	EMC	7, 8, 9, 10
13 July 2021	26.1	17	101.2	EMC	10
13 July 2021	2802.0	26	101.2	TC	13

EMC - EMC Test Bench

SAC - Semi-Anechoic Chamber

OATS - Open Area Test Site

TC - Temperature Chamber

LISN - LISN Test Area

ESD - ESD Test Bench

IMM - Immunity Test Area

RI - Radiated Immunity Chamber


I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



 Art Voss, P.Eng.
 Technical Manager
 Celltech Labs Inc.

17 July 2021

Date




5.0 NORMATIVE REFERENCES

Normative References	
ISO/IEC 17025:2017	General requirements for the competence of testing and calibration laboratories
IEEE/ANSI C63.4:2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/EIA/TIA-382-A-1989	Minimum Standards - Citizens Band Radio Service Amplitude Modulated (AM) Transceivers Operating in the 27MHz Band
CFR	Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
CFR	Code of Federal Regulations Title 47: Telecommunication Part 95: Personal Radio Service Subpart D: Citizens Band Radio Service (CBRS)
CFR Title 47 Part 15	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Subpart B: Unintentional Radiators
ISED	Innovation, Science and Economic Development Canada Spectrum Management and Telecommunications Radio Standards Specification RSS-Gen Issue 5: General Requirements and Information for the Certification of Radiocommunication Equipment
ISED	Innovation, Science and Economic Development Canada Spectrum Management and Telecommunications Radio Standards Specification RSS-236 Issue 1: General Radio Service Equipment Operating in the Band 26.960 to 27.410 MHz (Citizens Band)

6.0 FACILITIES AND ACCREDITATIONS

Facility and Accreditation:

The facilities used to evaluate this device outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site (OATS) conforms to the requirements set forth in ANSI C63.4 and is filed and listed with the FCC under Test Firm Registration Number CA3874A-1 and Industry Canada under Test Site File Number IC 3874A-1. Celltech is accredited to ISO 17025, through accrediting body A2LA and with certificate 2470.01.

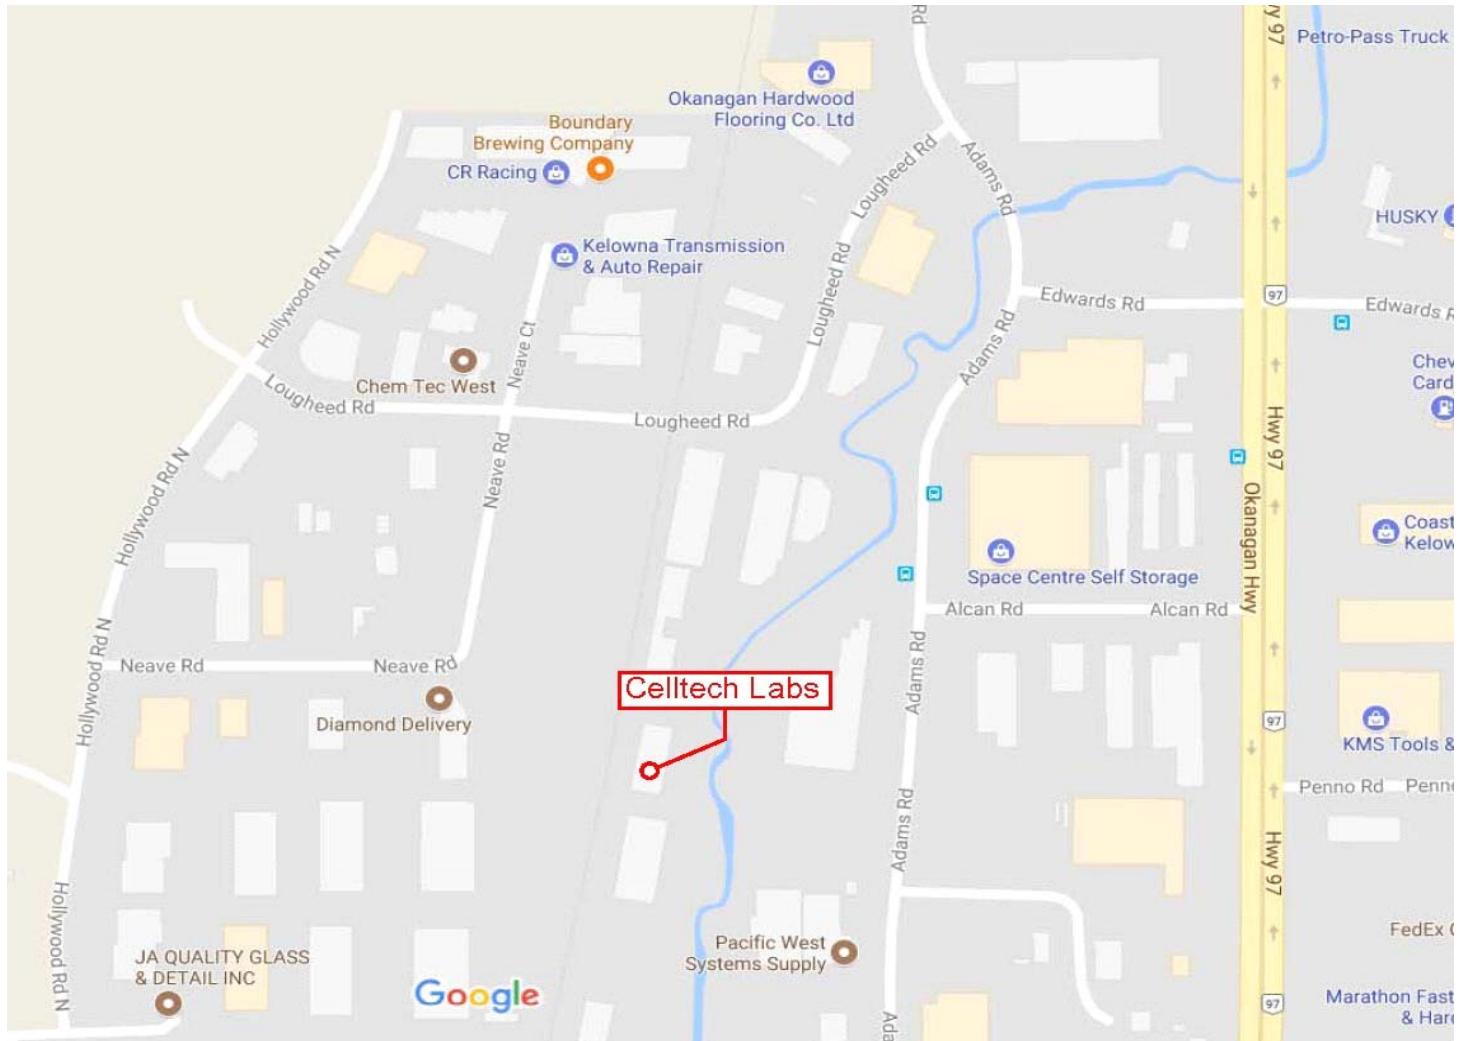

7.0 CONDUCTED POWER

Test Procedure

Normative Reference	FCC 47 CFR §2.1046, §2.1033(c)(8), §95.967, RSS-236 EIA/TIA-382-A
---------------------	---

Limits

47 CFR §95.967	Each CBRS transmitter type must be designed such that the transmitter power can not exceed the following limits: (1) 4 W Carrier power when transmitting emission type A1D or A3E;
RSS-236 5.2	The transmitter output power shall not exceed 4.0 watts for a DSB mode of operations.

General Procedure


EIA/TIA-382-A	19. TRANSMITTER CARRIER POWER OUTPUT Transmitter Carrier Power Output for this service is the power (rms) available at the output terminals of the transmitter when the output terminals are connected to a standard output load. This measurement shall be performed without modulation, at standard test. conditions.
---------------	---


Test Setup

Appendix A - Figure A.1

Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as above using the Automatic 6dB Cursor Bandwidth measurement. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at its maximum Duty Cycle.

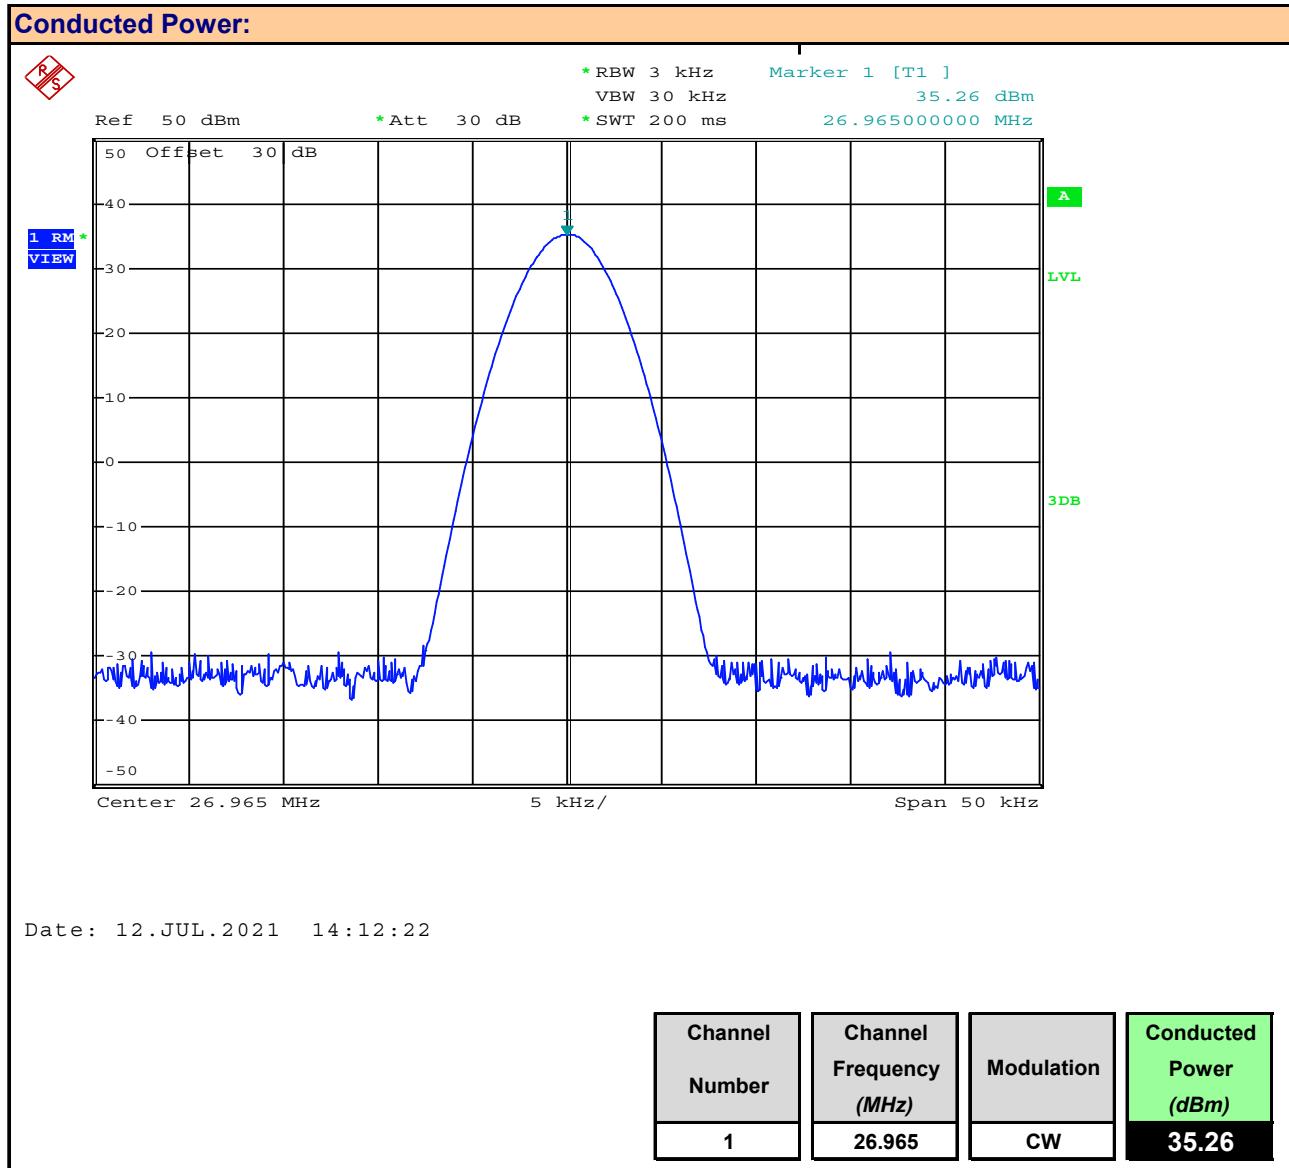Plot 7.1 – Conducted Output Power – Channel 1

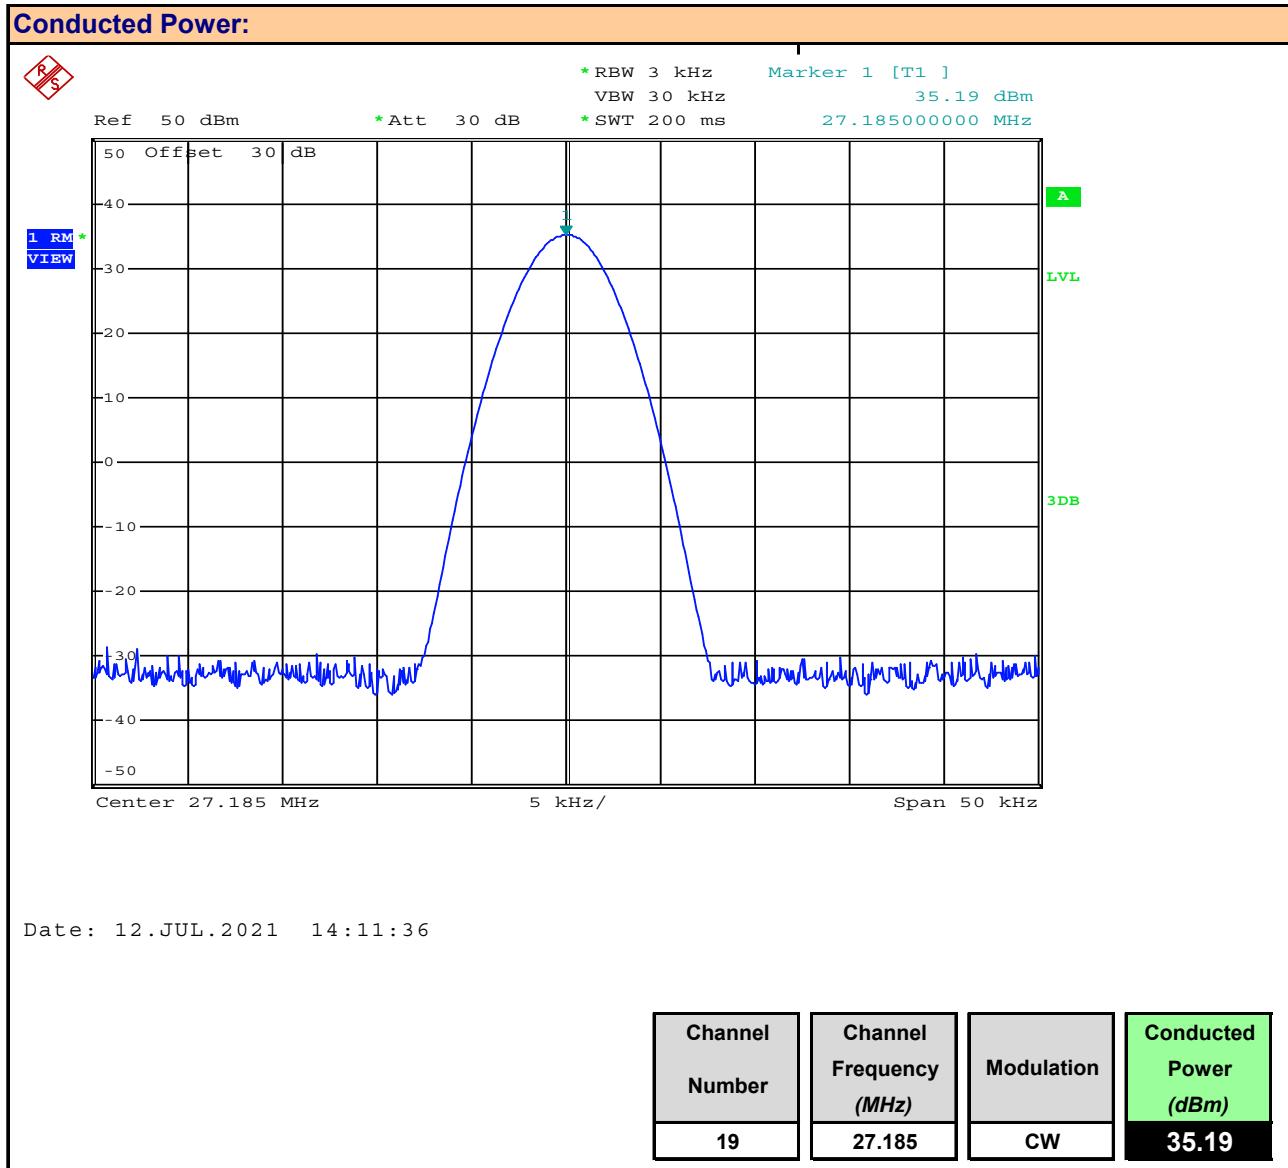
Plot 7.2 – Conducted Output Power – Channel 19


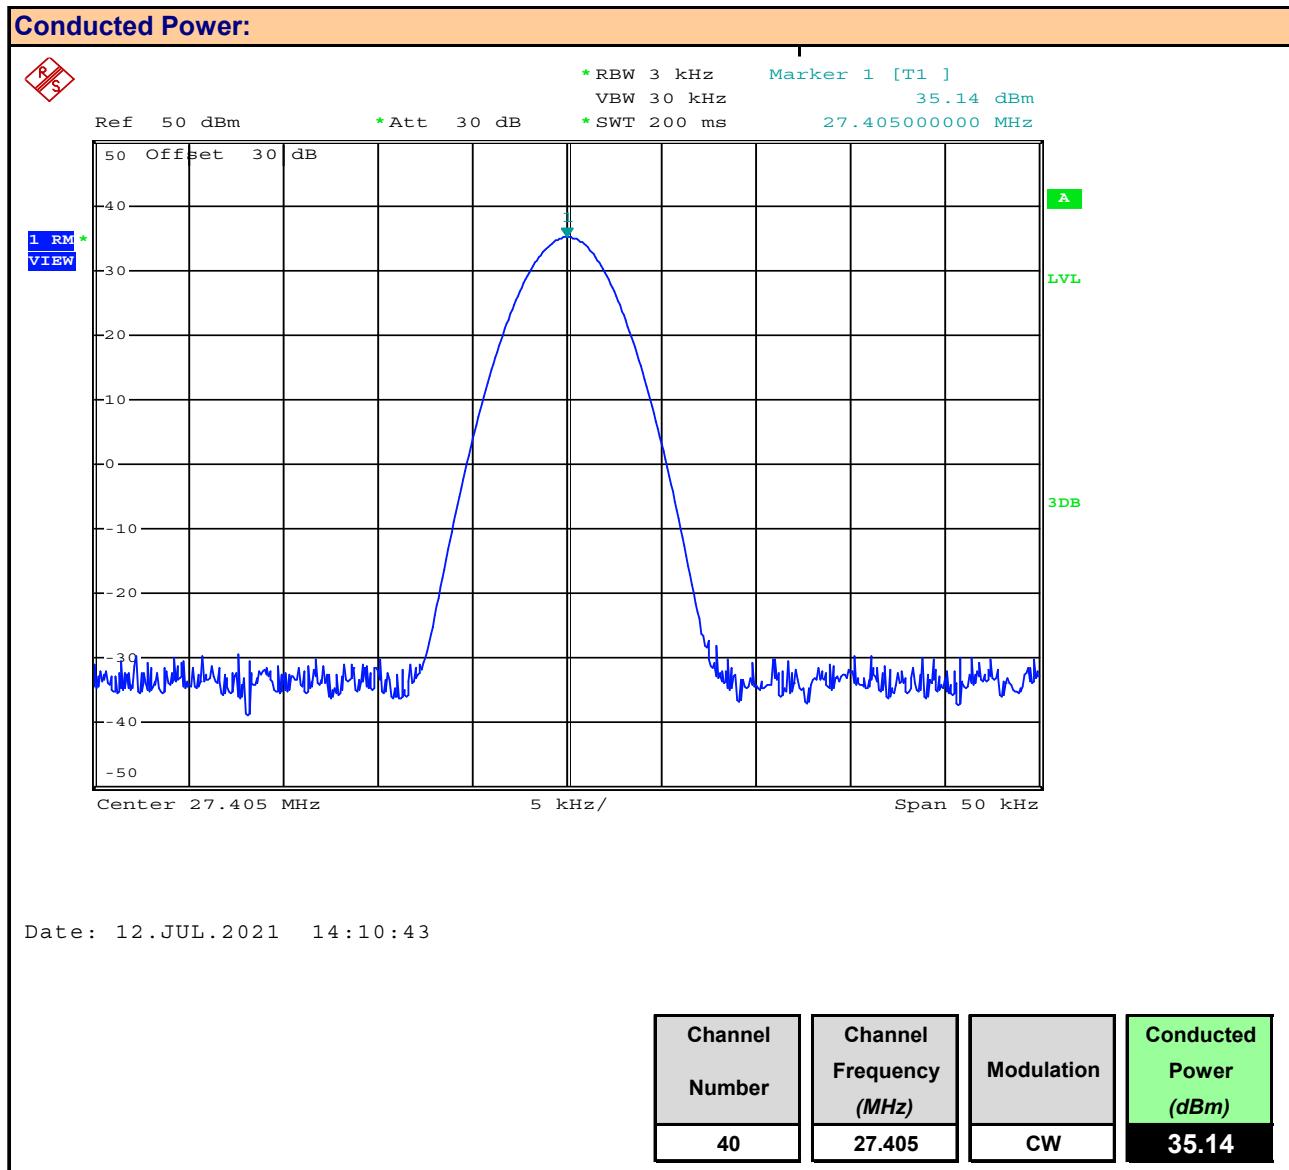
Plot 7.3 – Conducted Output Power – Channel 40


Table 7.1 – Summary of Conducted Power Measurements (RMS)

Conducted Power Measurement Results:					
Channel Number	Frequency (MHz)	Modulation	Measured Power [P_{Meas}] (dBm)	Limit [P_{Lim}] (dBm)	Margin (dB)
1	26.985	CW	35.260	36	0.74
19	27.185		35.190		0.81
40	27.405		35.140		0.86
					Complies

Table 7.2 – Compliance to §2.1033(c)(8)

FCC CFR 47 §2.1033(c)(8): Power to Transmitter:	
Measured Receiver Current:	IRx = 0.12A
Measured Total Current:	ITx = 1.30A
Transmitter Current (ITx - IRx):	ITxmitter = 1.18A
Power to Transmitter:	(13.6VDC)(1.18) = 16.05W
Result:	Complies

8.0 MODULATION RESPONSE

Test Conditions	
Normative Reference	
Limits	
47 CFR §2.1047	a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted.
47 CFR §95.975	Each CBRS transmitter type must be designed such that the modulation characteristics are in compliance with the rules in this section. (a) When emission type A3E is transmitted with voice modulation, the modulation percentage must be at least 85%, but not more than 100%. (b) When emission type A3E is transmitted by a CBRS transmitter having a transmitter output power of more than 2.5 W, the transmitter must contain a circuit that automatically prevents the modulation percentage from exceeding 100%.
RSS-236	5.3.2) When emission type A3E is transmitted by a CB transmitter having a total power of greater than 2.5 W, the CB transmitter must automatically prevent the modulation from exceeding 100%.

Measurement Procedure	
TIA 382 25.2	Transmitter Audio Frequency Response
Operate the transmitter under standard test conditions and monitor the output with a modulation monitor or calibrated test receiver. The audio input signal applied through a suitable impedance matching network, as specified by the manufacturer, shall be adjusted to obtain 50% modulation at the maximum audio frequency response of the transmitter, and this point shall be taken as the 0 dB reference level. Vary the modulating frequency from 100 Hz to 10,000 Hz and record the input levels necessary to maintain a constant 50% modulation.	
TIA 382 24.2.2	Transmitter Modulation Limiting
The transmitter is modulated by a sinusoidal audio signal applied to the microphone input jack. First the audio input frequency is adjusted to deliver 50% modulation at the audio frequency that produces the maximum modulation level. Record the modulation input level (mV) and use this level as 0 dB for plotting modulation limiting. Increment the audio signal level to 40 dB above the reference level. Record the modulation level (%). Repeat the measurements using a 400 Hz and a 2500 Hz sinusoidal audio signal. Record the modulation level (%). Perform for both positive and negative modulation.	


Test Setup	Appendix A	Figure A.2
-------------------	-------------------	-------------------

Statement - Compliance to §95.977

§95.977 CBRS tone transmissions.


In addition to the tones permitted under §95.377, CBRS transmitter types may be designed to transmit brief tones to indicate the beginning or end of a transmission.

This device is capable of transmitting a brief (less than one second) audio tone, "Roger Beep", when the PTT button is released on the microphone indicating end of transmission. This function is user selectable and complies with the requirements of §95.377. See User's Manual page 11.

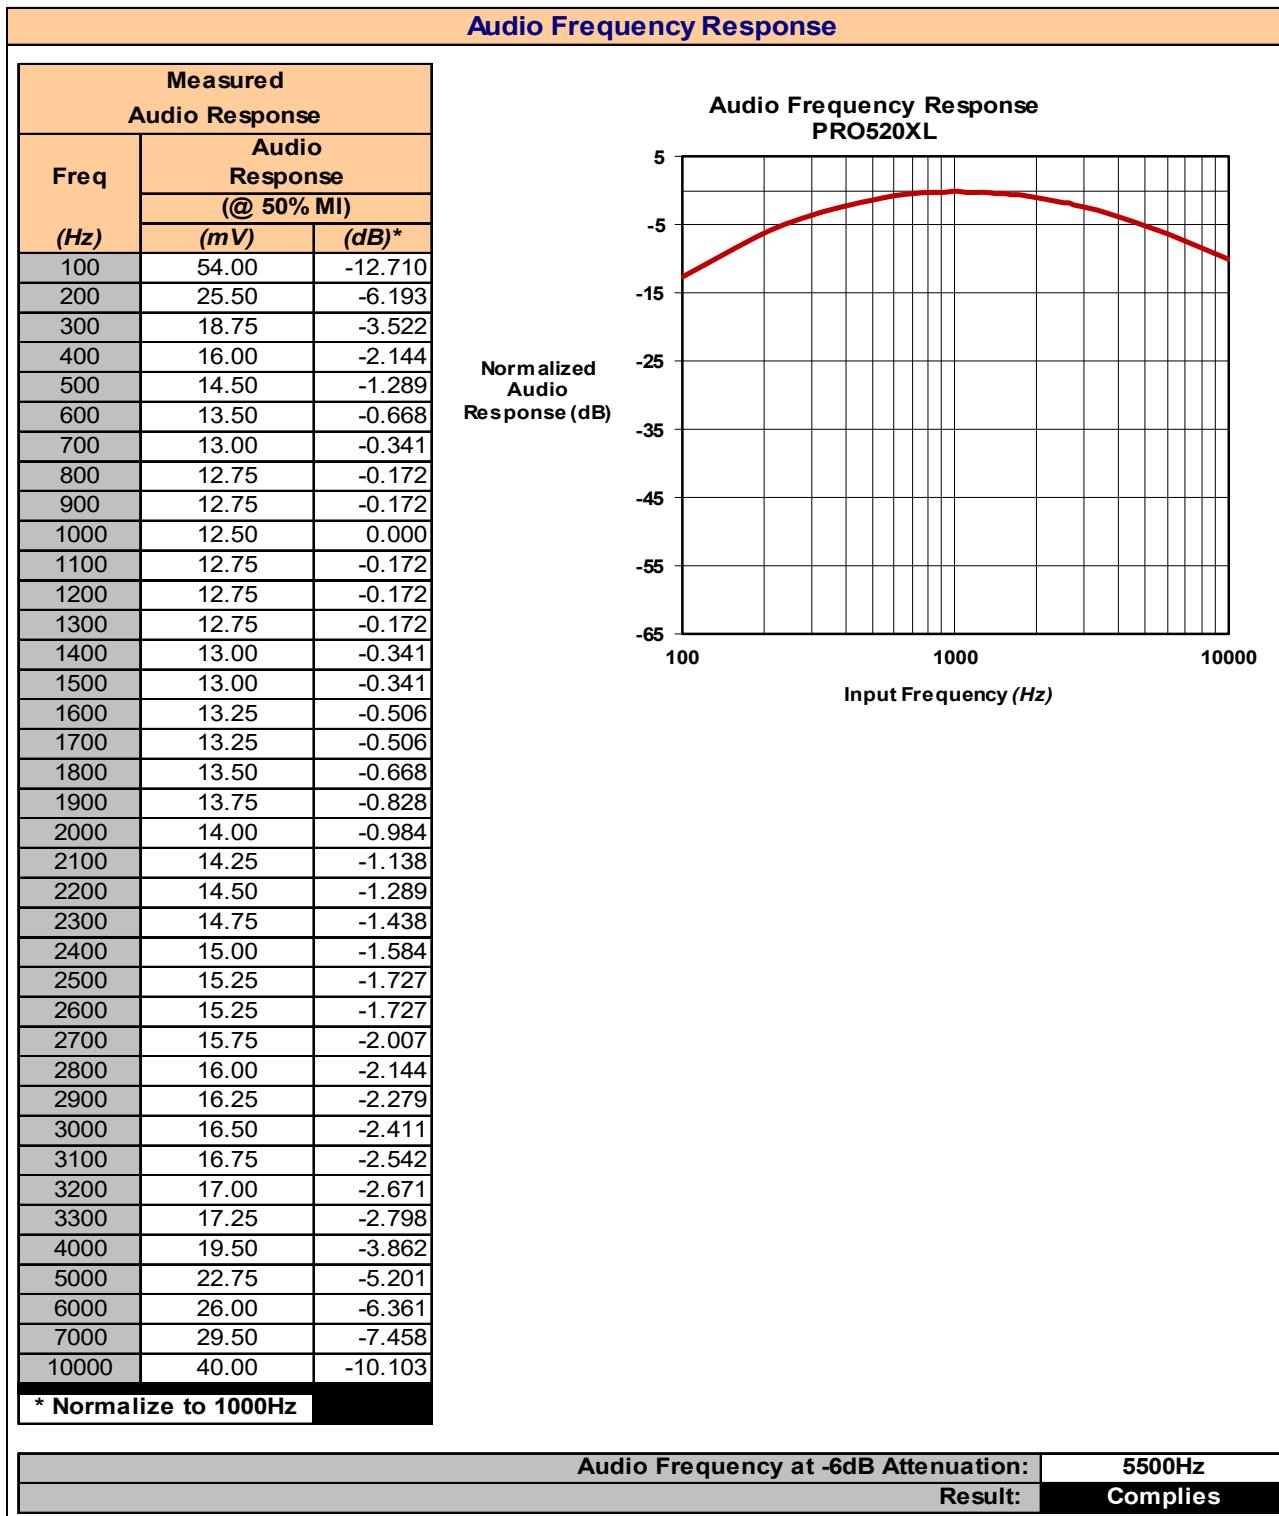Plot 8.1 – Audio Frequency Response


Audio Frequency at -6dB Attenuation:	5500Hz
Result:	Complies

Plot 8.2 – Modulation Limiting Response

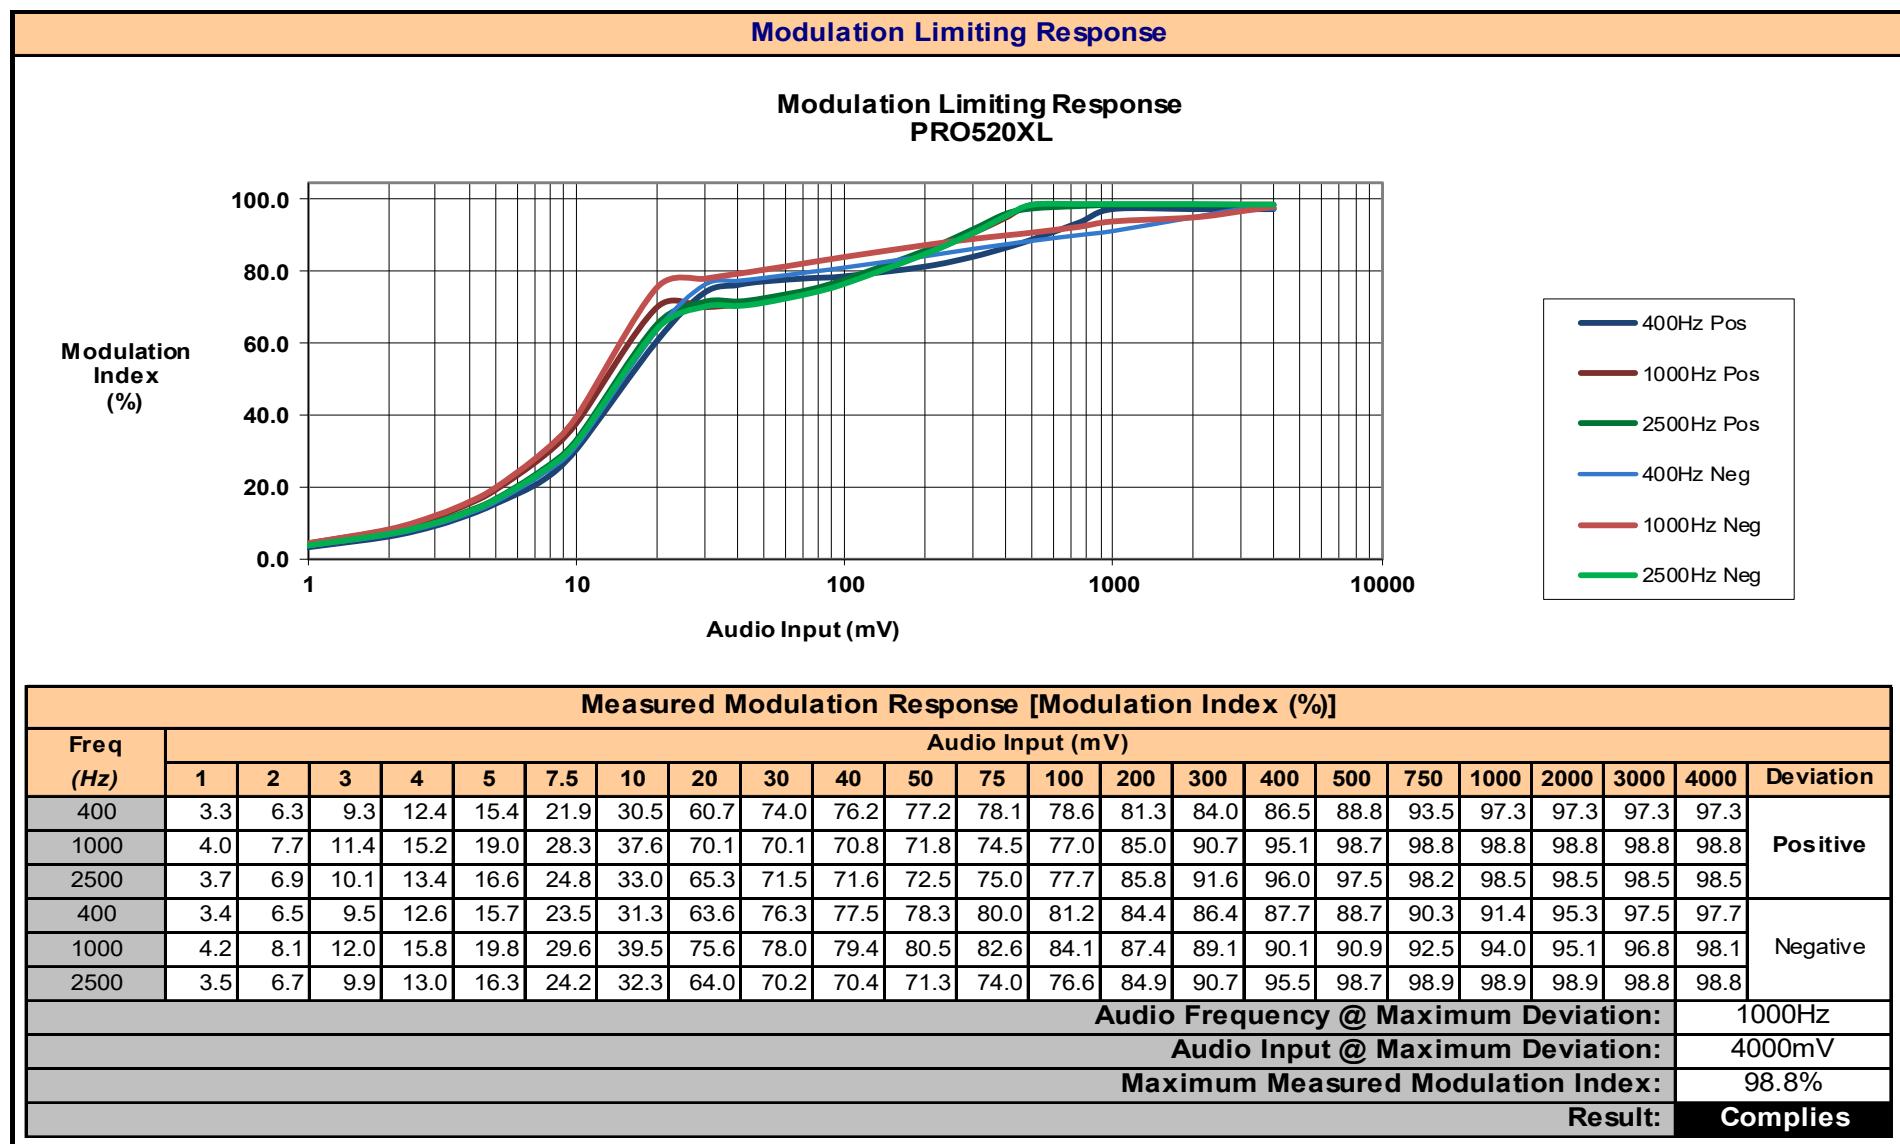

9.0 OCCUPIED BANDWIDTH AND EMISSION MASKS

Test Conditions

Normative Reference	FCC 47 CFR §2.1049, §95.973, RSS-236
---------------------	--------------------------------------

Limits

47 CFR §95.973	Each CBRS transmitter type must be designed such that the occupied bandwidth does not exceed the authorized bandwidth for the emission type under test. (a) AM. The authorized bandwidth for emission type A3E is 8 kHz.
RSS-236 5.3.2	The authorized bandwidth for emission type A1D or A3E is 8 kHz.
47 CFR §95.979	Each CBRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section. (a) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) as specified in the applicable paragraphs listed in the following table: For A3E (1), (3), (5), (6) (1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency; (3) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency; (5) $53 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 250% of the authorized bandwidth. (6) 60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.
RSS-236 4.4.4	For A1D and A3E: _ At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. _ At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth. _ At least $53 + 10 \log_{10} (T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%. _ At least 60 dB on any frequency twice or greater than twice the fundamental frequency.

Measurement Procedure

TIA 382 23.2

Transmitter Modulation Occupied Bandwidth


The transmitter is modulated by a sinusoidal audio signal applied to the microphone input jack. First, the frequency is adjusted to deliver 50% modulation at the highest audio response level (minimum applied audio level). Then the audio signal level is increased 16 dB and the audio frequency is readjusted to 2500 Hz. The analyzer is adjusted to display each of the discrete modulation sidebands and their respective harmonic products within +/- 50 kHz of the carrier frequency.

Test Setup


Appendix A

Figure A.1

Plot 9.1 – Occupied Bandwidth Channel 1

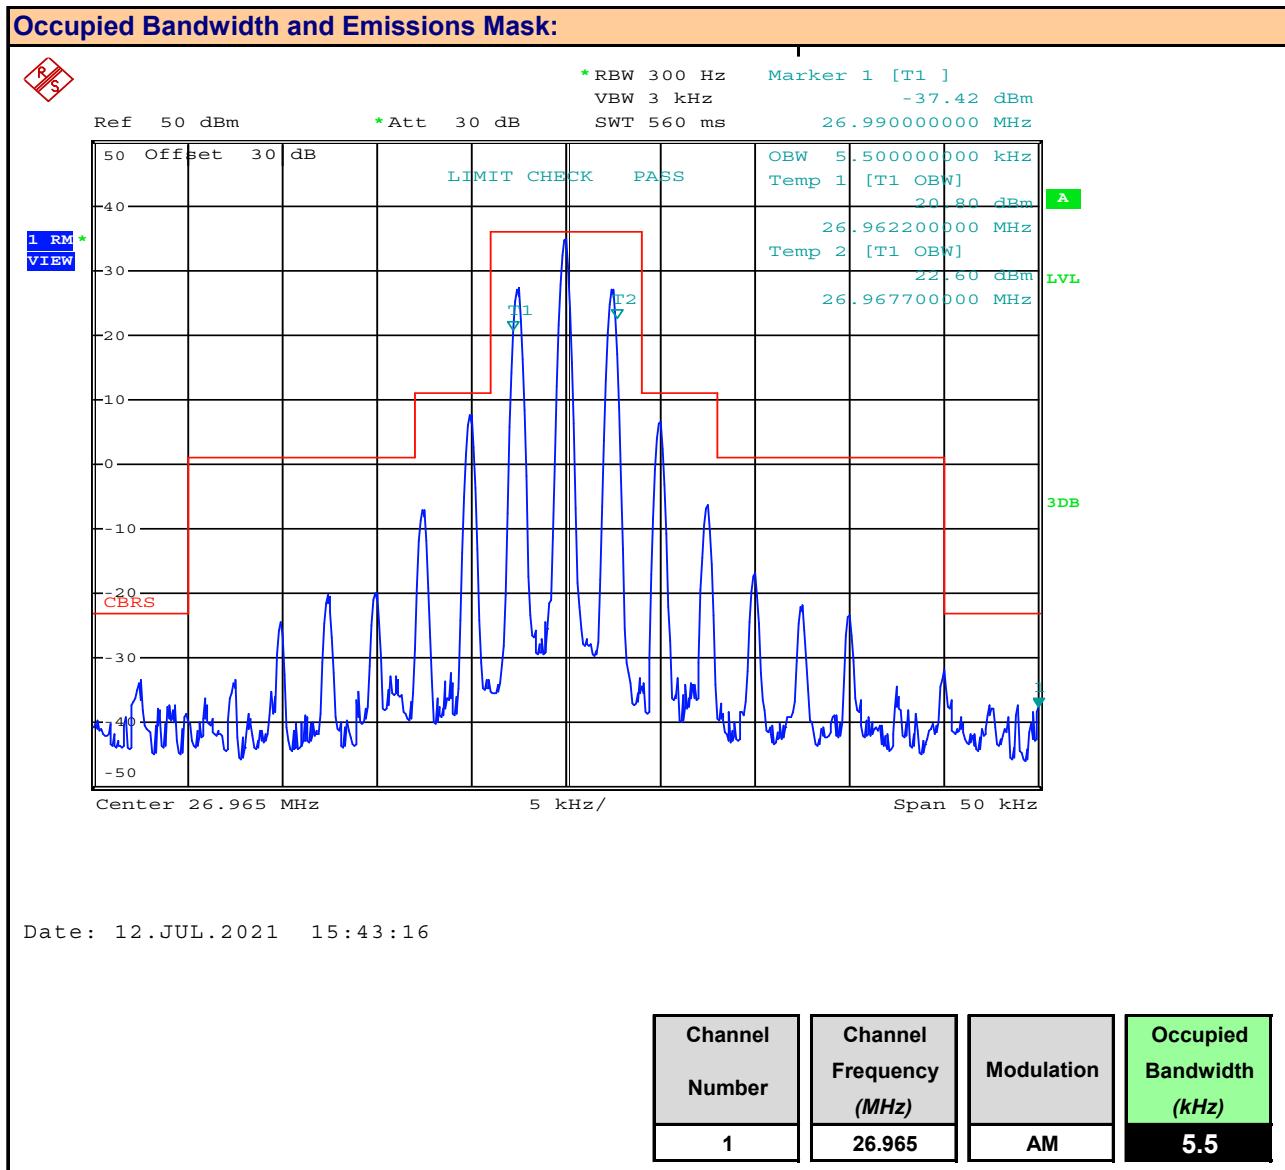

Plot 9.2 – Occupied Bandwidth Channel 19

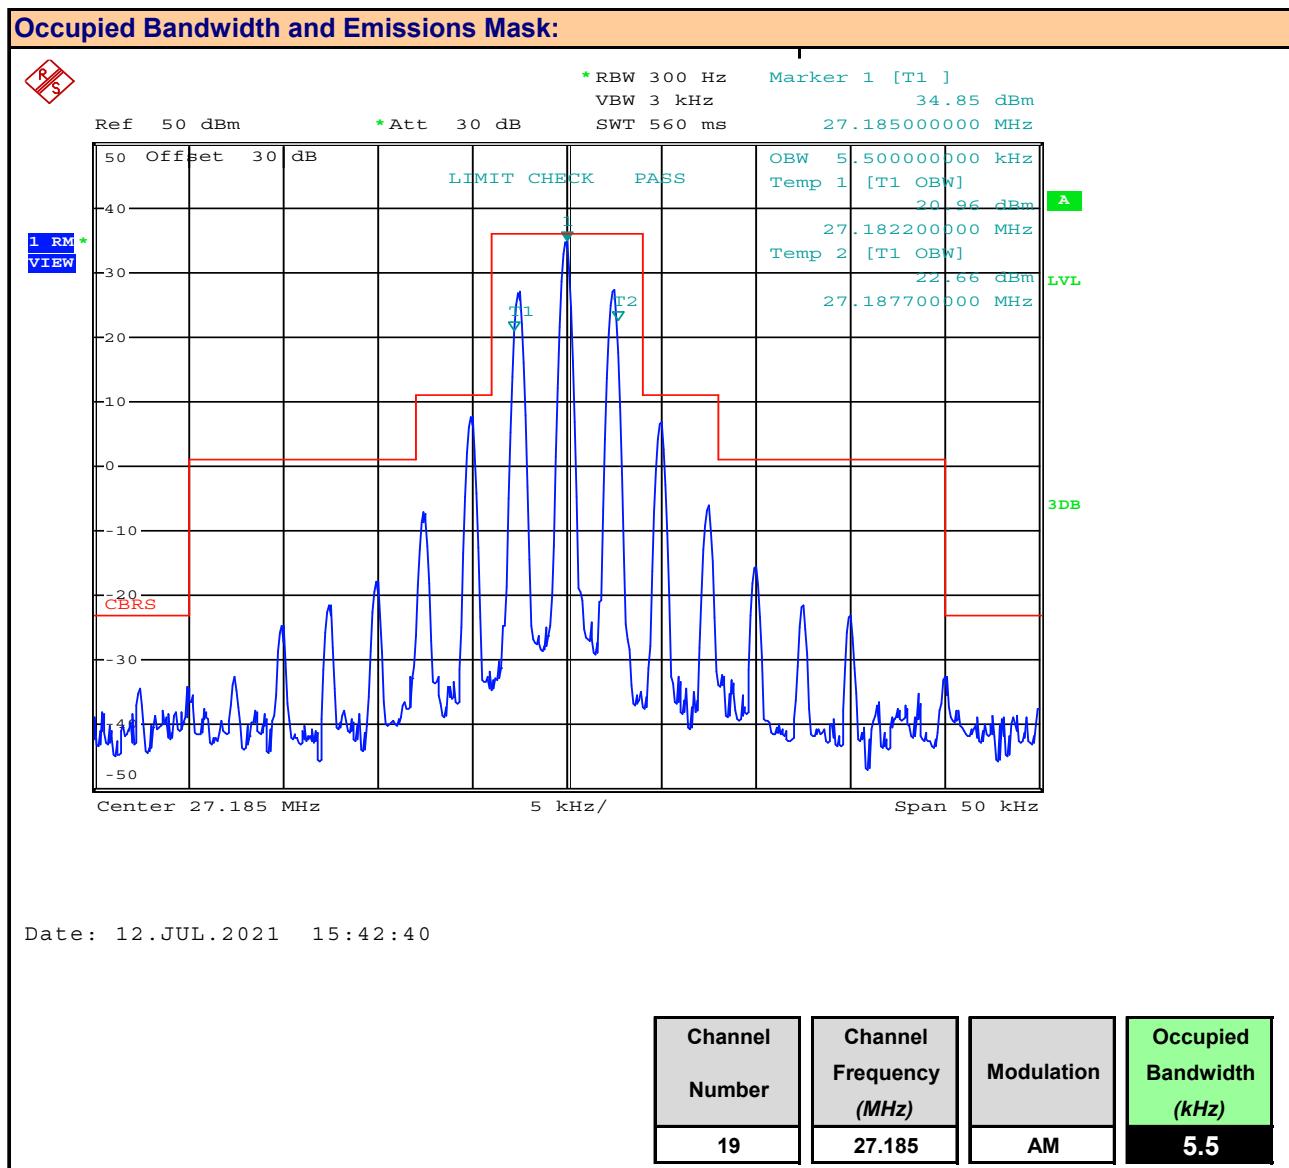

Plot 9.2 – Occupied Bandwidth Channel 40

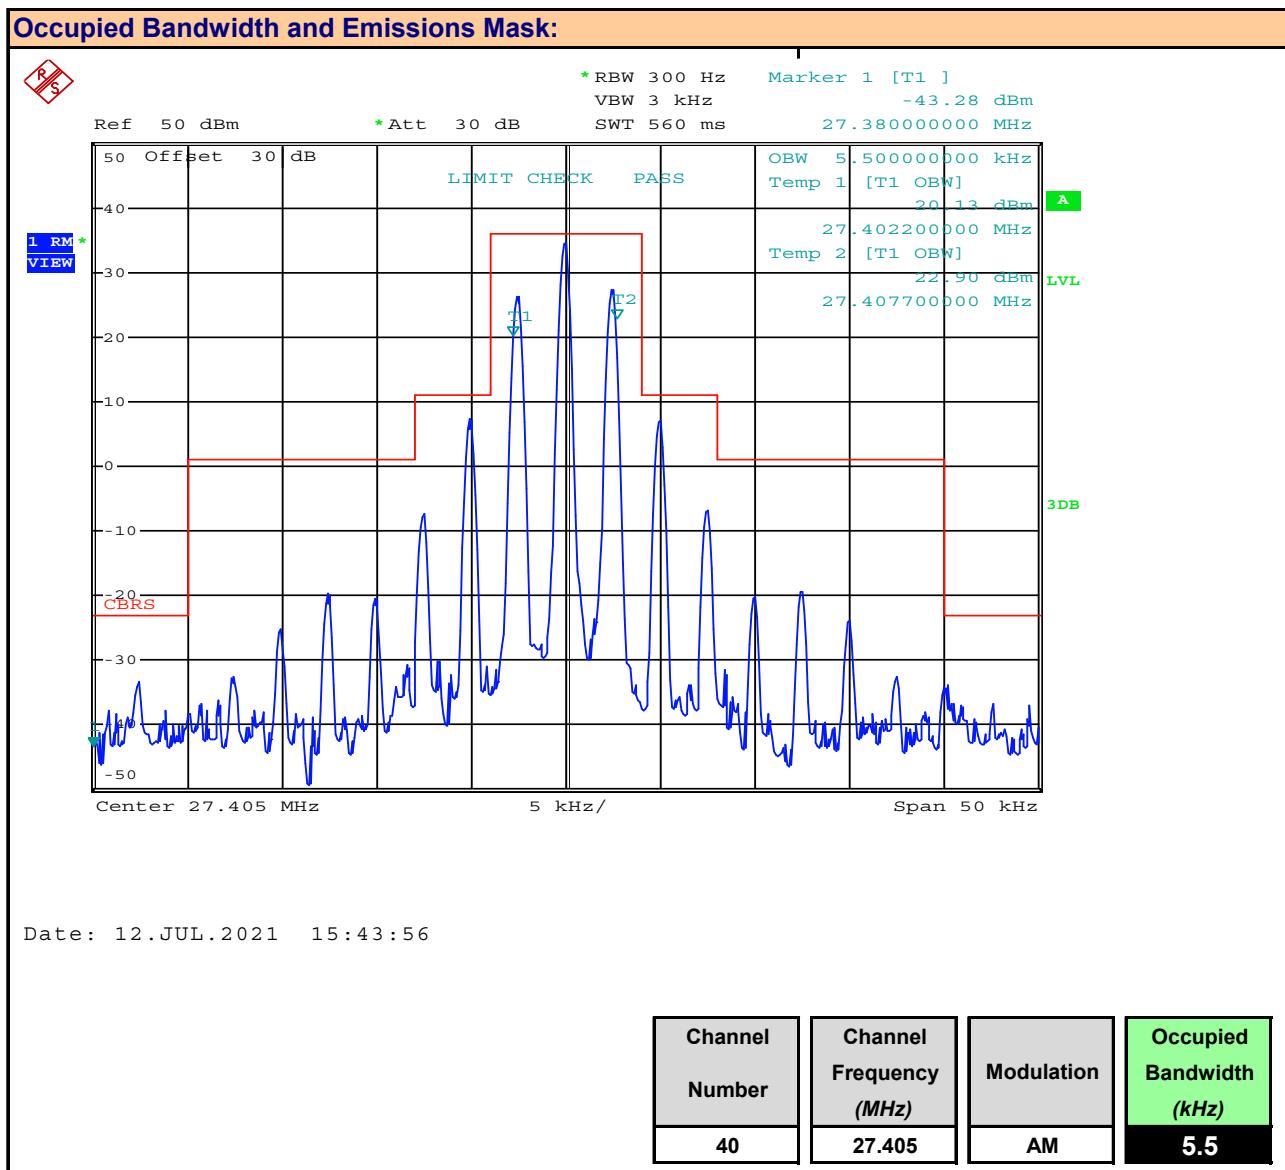


Table 9.1 - Summary of Occupied Bandwidth and Emission Mask Results

Occupied Bandwidth Measurement Results							
Channel	Frequency (MHz)	DUT Modulation	Measured Occupied Bandwidth (kHz)	Authorized Bandwidth (kHz)	Margin (kHz)	Emission Mask	Emission Designator
1	26.965	AM	5.5	8.0	2.5	PASS	5K50A3E
19	27.185		5.5		2.5	PASS	5K50A3E
40	27.405		5.5		2.5	PASS	5K50A3E

Margin = Authorized BW - Measured BW

Result: **Complies**

§95.971 CBRS emission types.

Each CBRS transmitter type must be designed such that its capabilities are in compliance with the emission type rules in this section.

(a) Permitted emission types. CBRS transmitter types may transmit only AM voice emission type A3E and SSB voice

This device only transmits AM voice emission type A3E

Result: **Complies**

10 CONDUCTED OUT OF BAND SPURIOUS EMISSIONS

Test Conditions	
Normative Reference	
Limits	
47 CFR §95.979	<p>Each CBRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section.</p> <p>(a) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) as specified in the applicable paragraphs listed in the following table:</p> <p>For A3E (1), (3), (5), (6)</p> <p>(1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency;</p> <p>(3) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency;</p> <p>(5) $53 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 250% of the authorized bandwidth.</p> <p>(6) 60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.</p>
RSS-236 4.4.4	<p>For A1D and A3E:</p> <ul style="list-style-type: none"> _ At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. _ At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth. _ At least $53 + 10 \log_{10} (T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%. _ At least 60 dB on any frequency twice or greater than twice the fundamental frequency.


Measurement Procedure

TIA 382 21.2 Transmitter Conducted Spurious and Harmonic Emissions


The transmitter RF output shall be connected to the standard nonradiating output load. The output shall be sampled and displayed using spectrum analysis techniques. 2500 Hz modulation shall be applied at a level 16 dB above that required to produce 50% modulation at the frequency of maximum response. The sampled output shall be analyzed from the lowest frequency generated in the equipment to the 10th harmonic of the fundamental signal and the levels of all spurious outputs attenuated not more than 20 dB below the maximum required attenuation shall be recorded.

Test Setup	Appendix A	A.1
-------------------	-------------------	------------


Plot 10.1 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 1

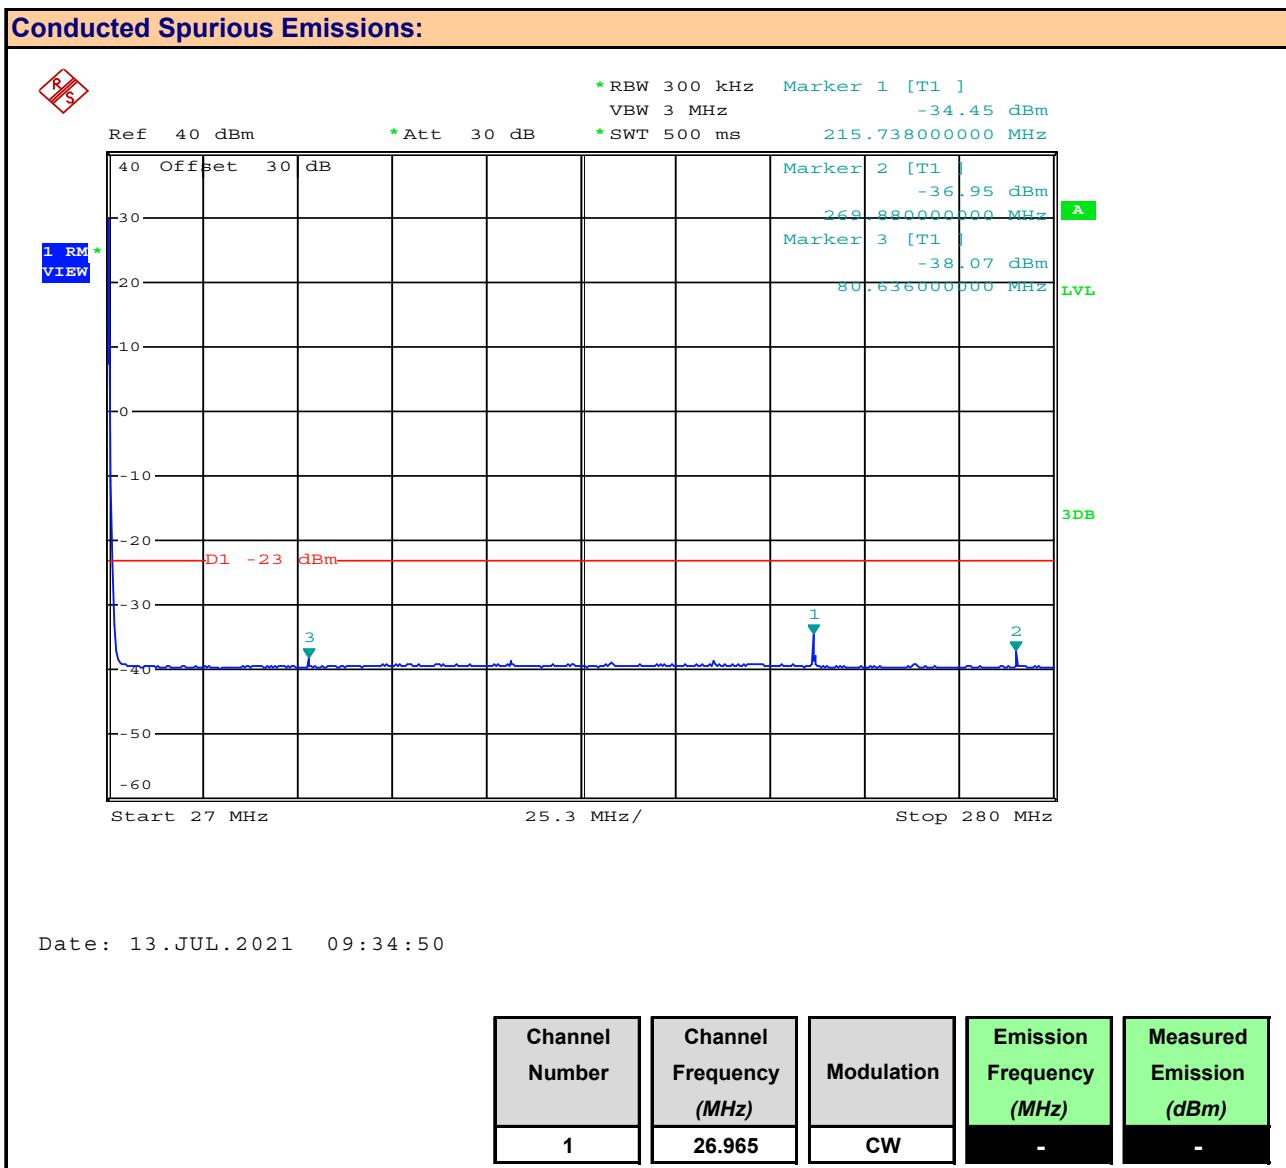


Plot 10.2 – Conducted Out of Band Emissions, Channel 1, 3rd Harmonic

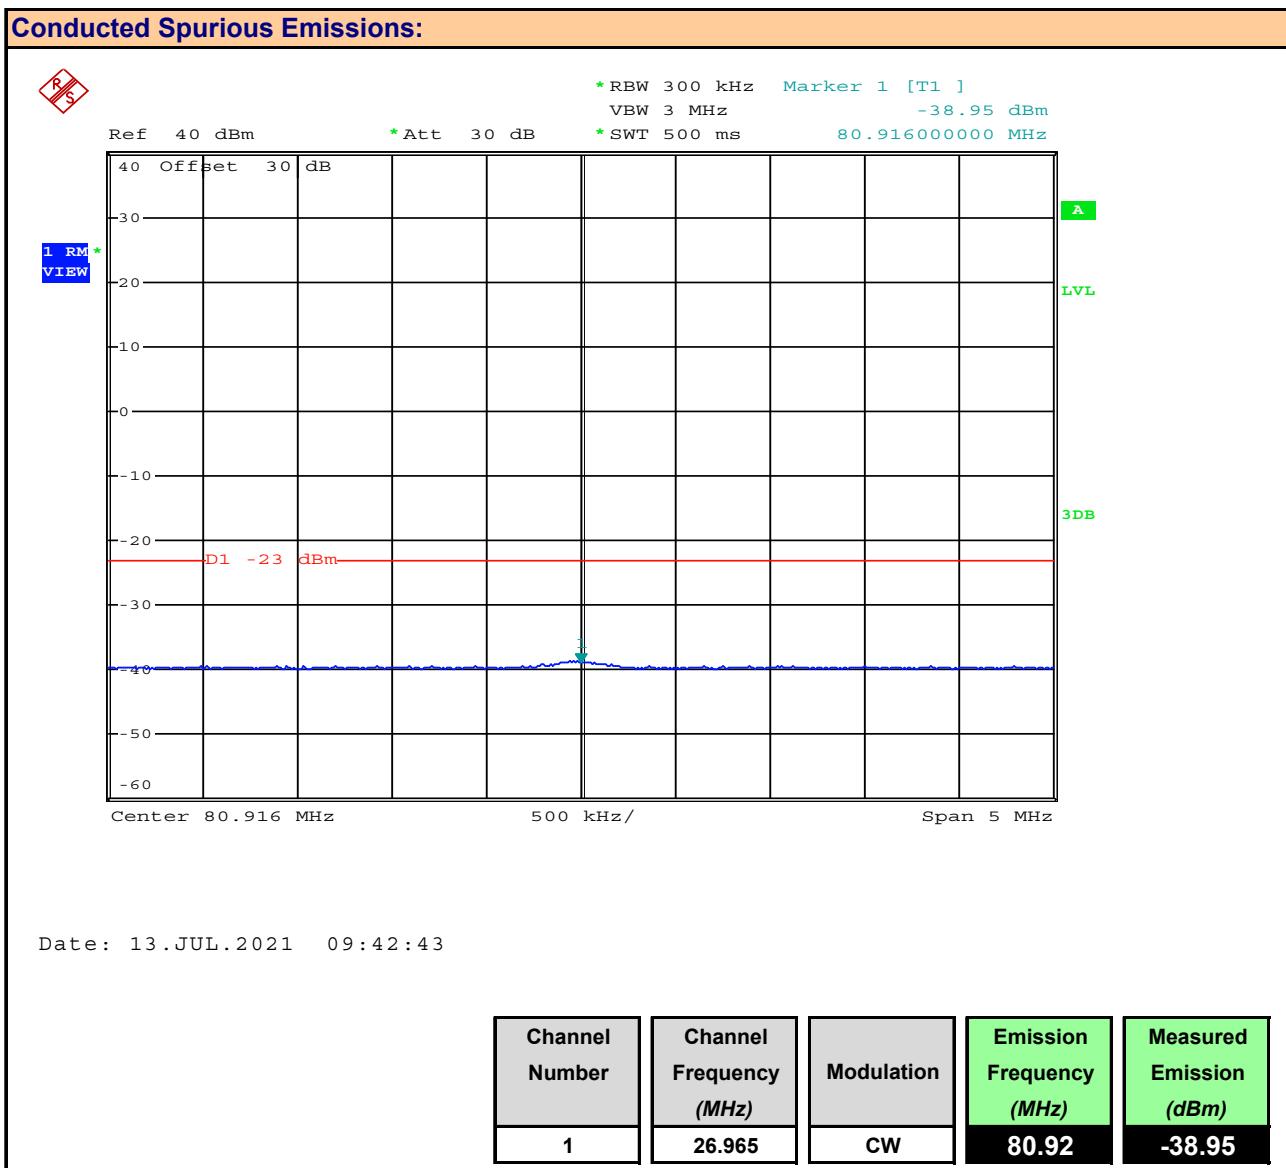


Plot 10.3 – Conducted Out of Band Emissions, Channel 1, 8th Harmonic

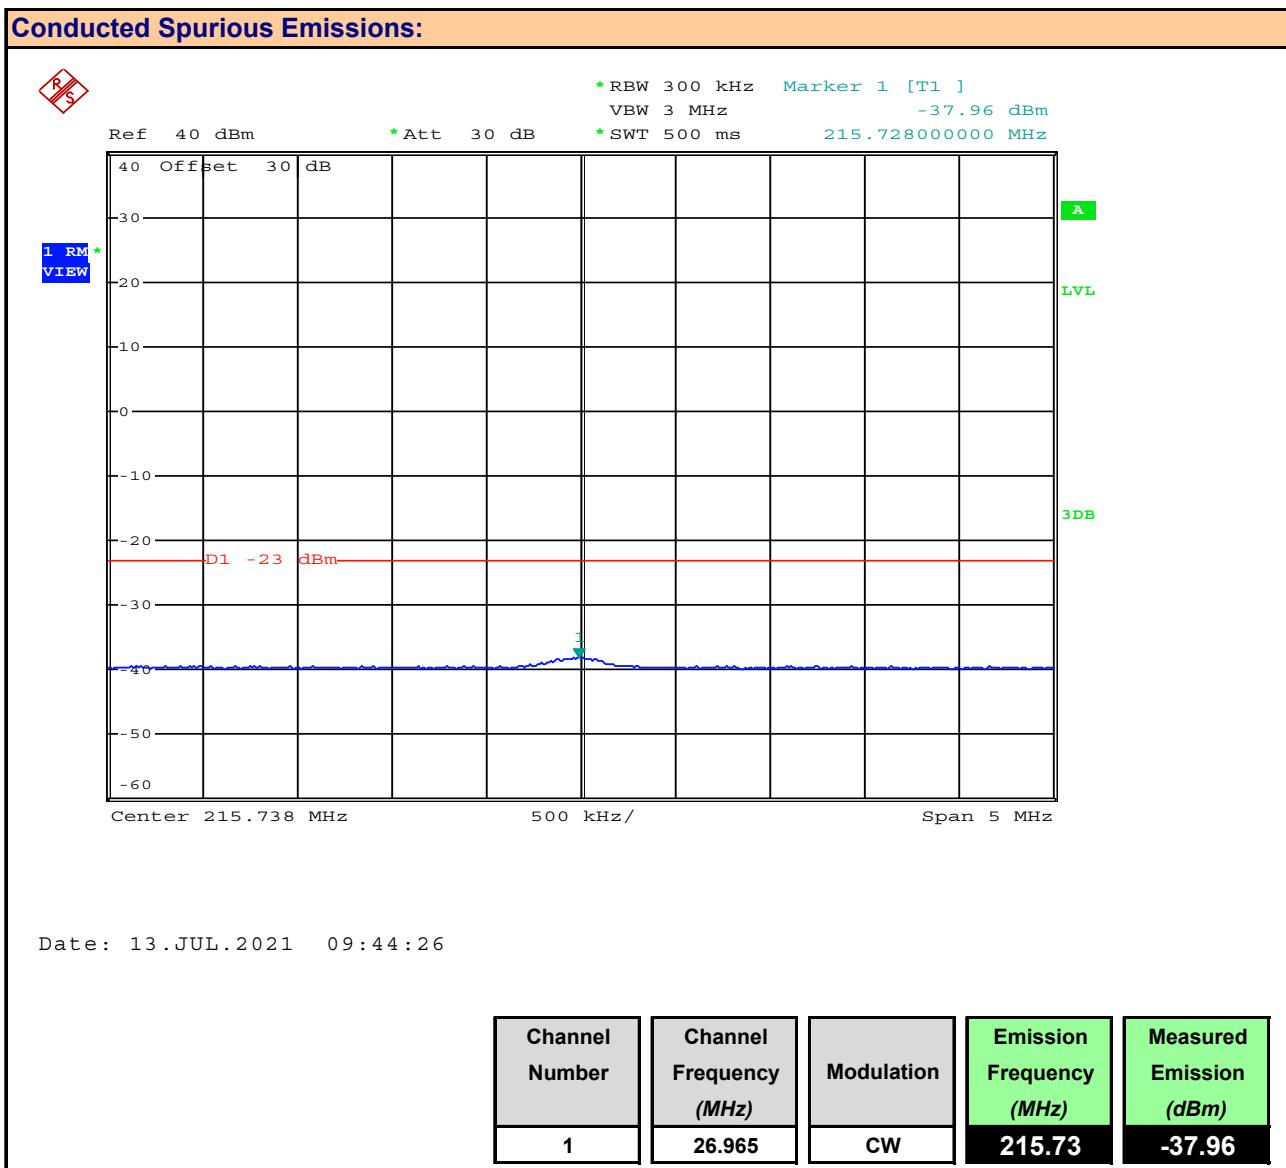


Plot 10.4 – Conducted Out of Band Emissions, Channel 1, 10th Harmonic

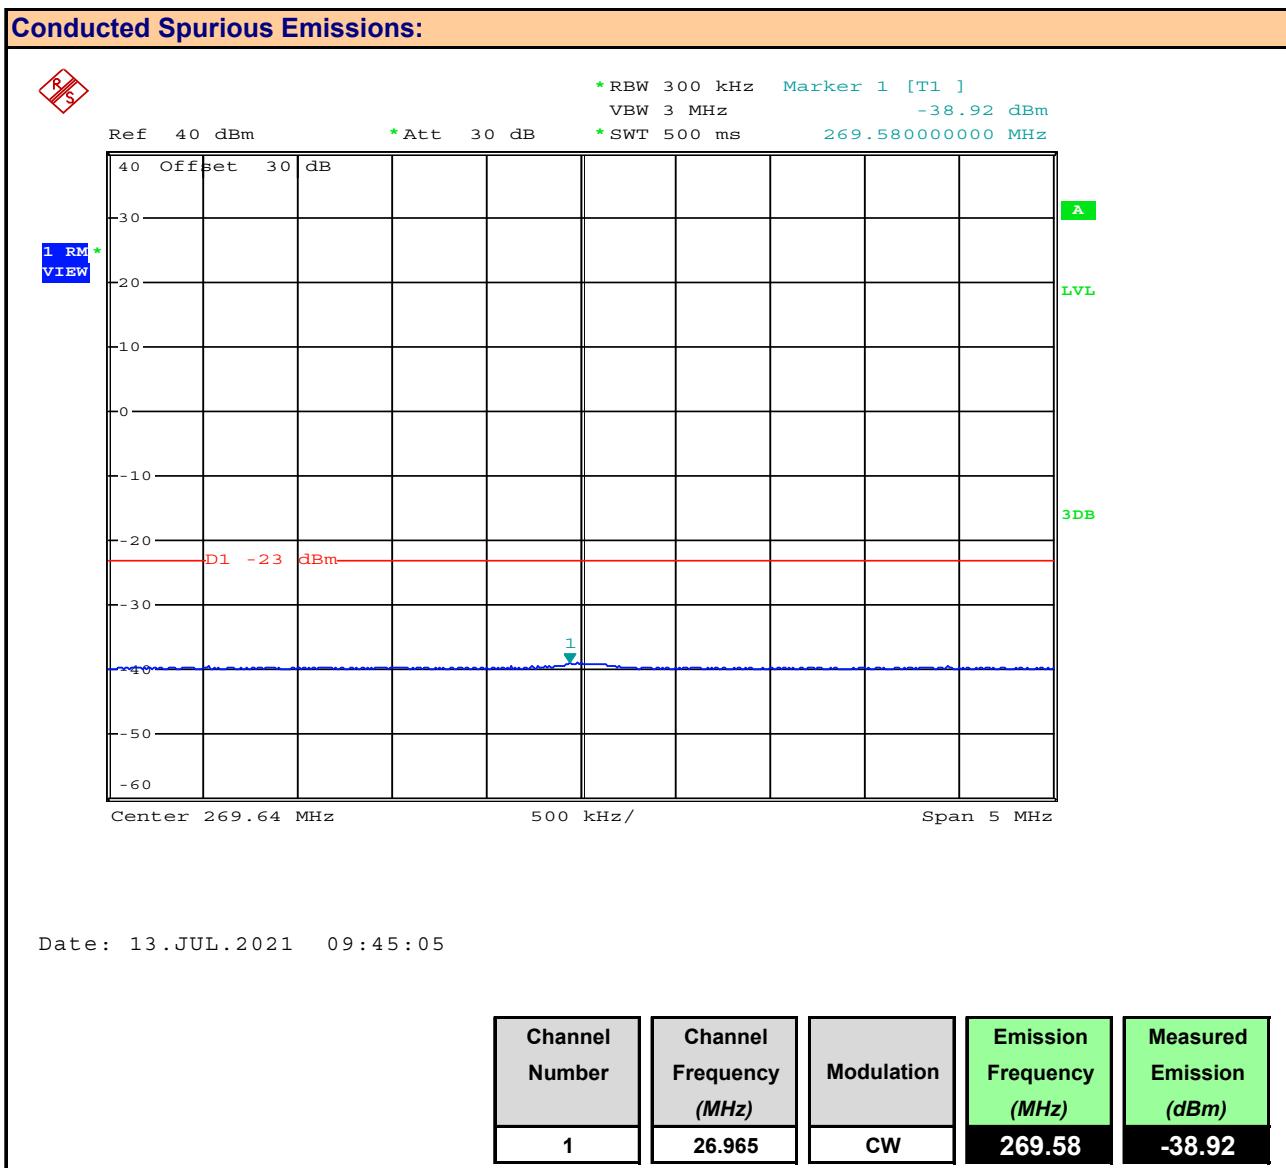


Plot 10.5 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 19

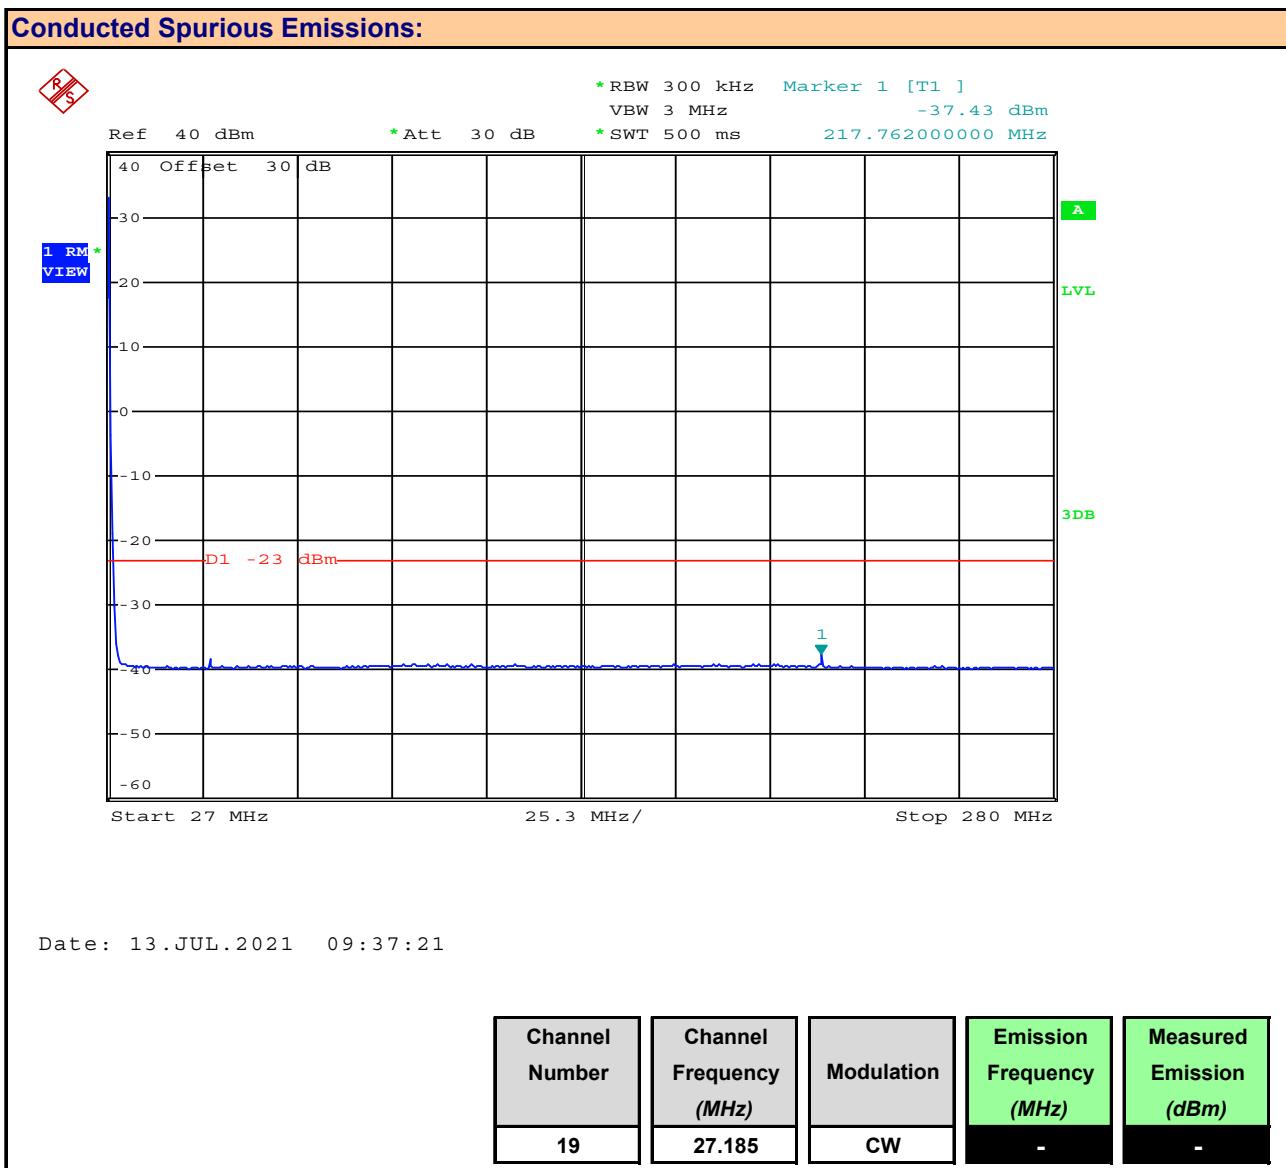

Plot 10.6 – Conducted Out of Band Emissions, Channel 19, 8th Harmonic

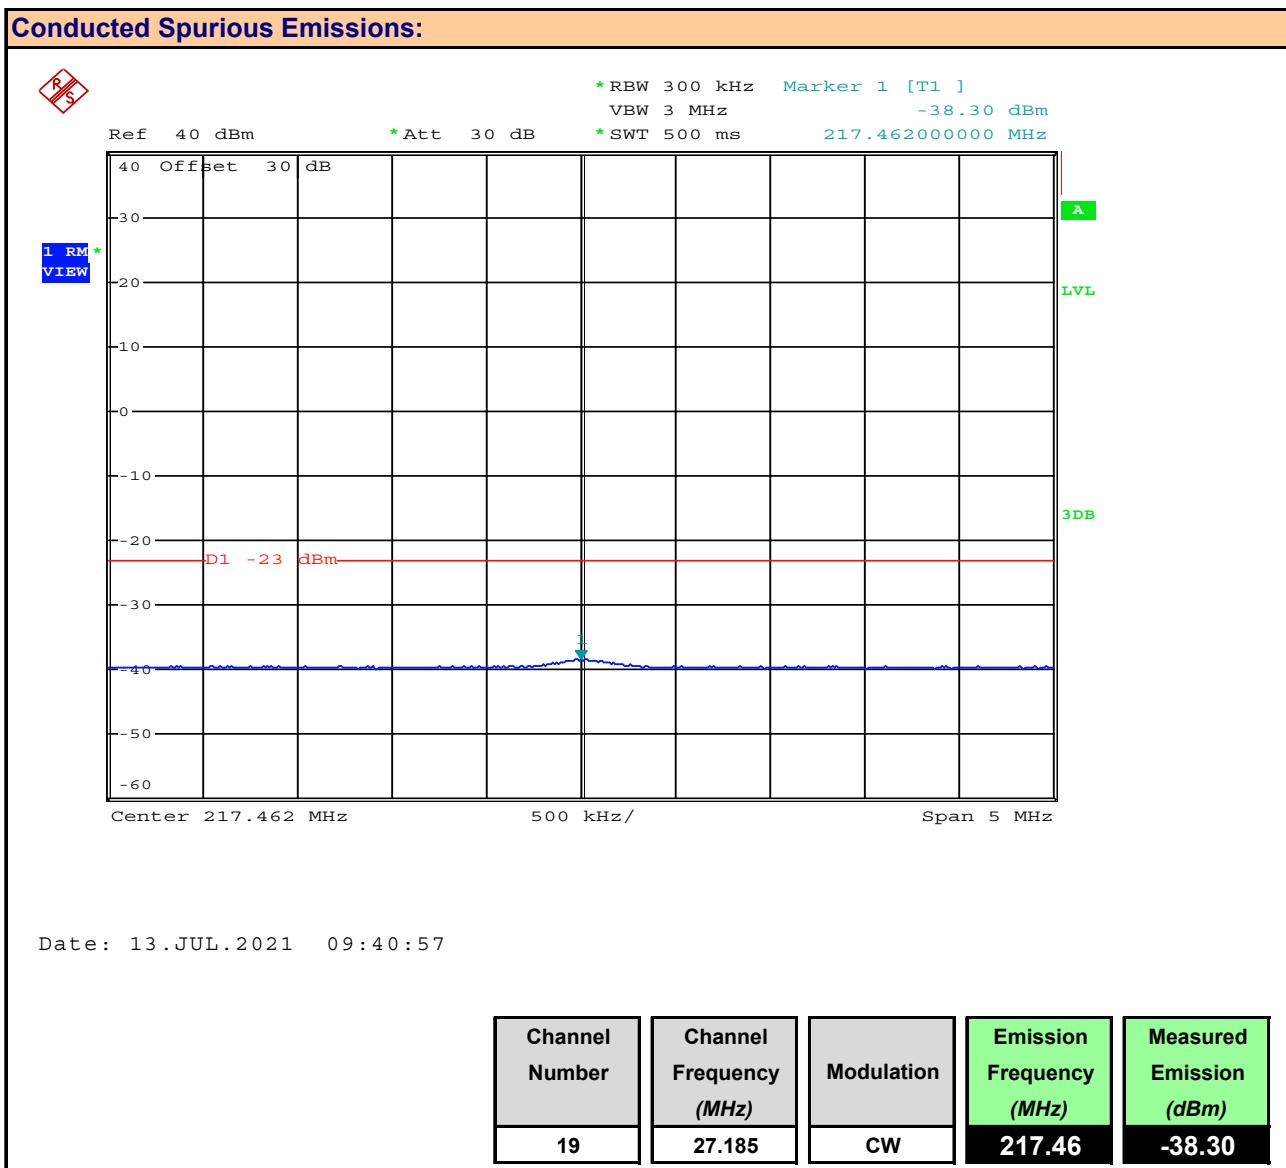

Plot 10.7 – Conducted Out of Band Emissions, 30MHz – 300MHz, Channel 40

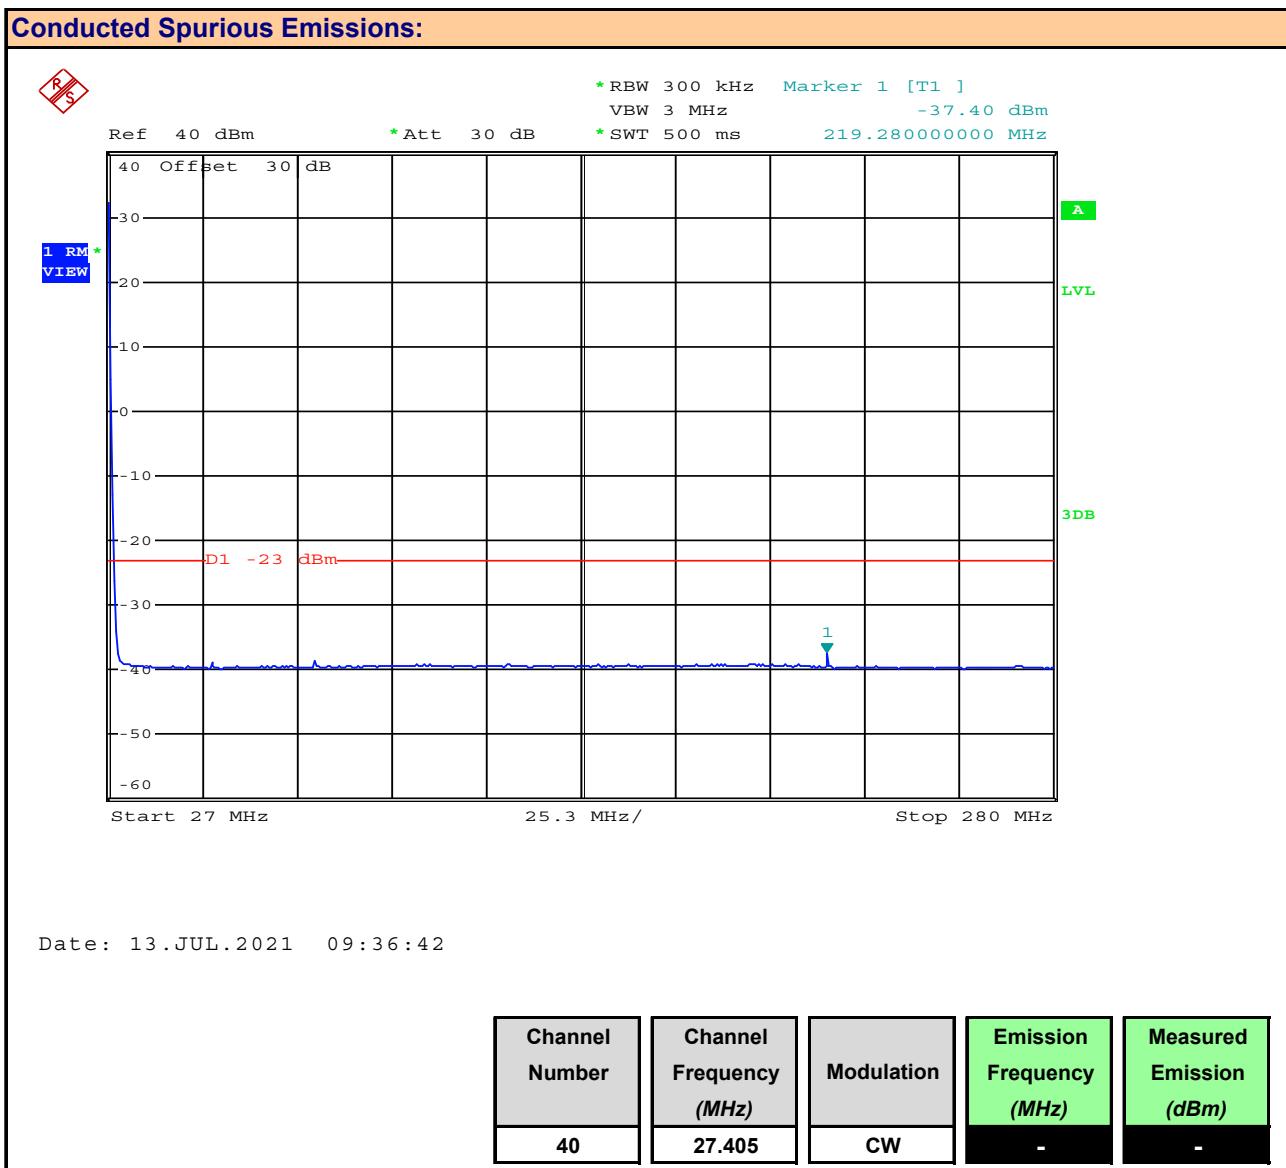

Plot 10.8 – Conducted Out of Band Emissions, Channel 40, 8th Harmonic

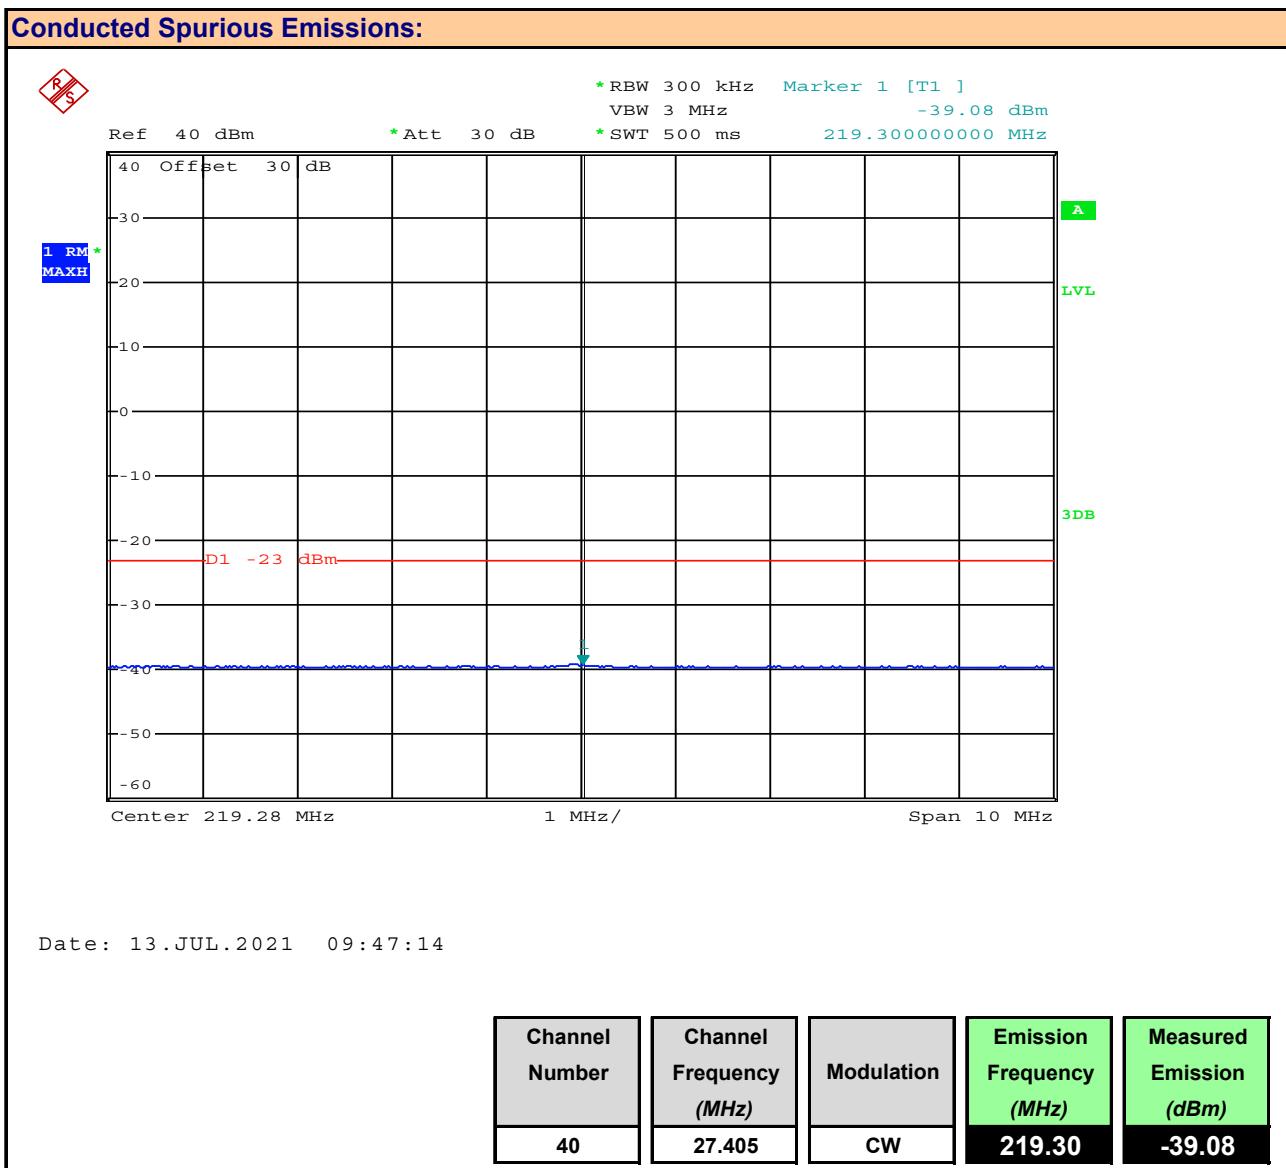


Table 10.1 – Summary of Conducted Out of Band Emissions

Conducted Spurious Emissions:							
Channel Number	Frequency (MHz)	Modulation	Emission Frequency (MHz)	Measured Emission [P _{Meas.}] (dBm)	Attenuation [Att] (dBm)	Limit (dB)	Margin (dB)
1	26.965	CW	80.9	-38.95	74.95	60.0	15.0
1	26.965		215.7	-37.96	73.96		14.0
1	26.965		269.6	-38.92	74.92		14.9
19	27.185		217.5	-38.30	74.30		14.3
40	27.405		219.3	-39.08	75.08		15.1
							Complies

11.0 RADIATED SPURIOUS EMISSIONS

Test Conditions	
Normative Reference	
Limits	
47 CFR §95.979	<p>Each CBRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section.</p> <p>(a) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) as specified in the applicable paragraphs listed in the following table:</p> <p>For A3E (1), (3), (5), (6)</p> <p>(1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency;</p> <p>(3) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency;</p> <p>(5) $53 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 250% of the authorized bandwidth.</p> <p>(6) 60 dB in any frequency band centered on a harmonic (i.e., an integer multiple of two or more times) of the carrier frequency.</p>
RSS-236 4.4.4	<p>For A1D and A3E:</p> <ul style="list-style-type: none"> _ At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth. _ At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth. _ At least $53 + 10 \log_{10} (T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%. _ At least 60 dB on any frequency twice or greater than twice the fundamental frequency.

Measurement Procedure


TIA 382 22.2 Transmitter Radiated Spurious and Harmonic Emissions

The transmitter shall be terminated in a nonradiating dummy load and shall be keyed but not modulated.


For each spurious frequency, raise and lower the receiver antenna to obtain a maximum reading on the FIM with the antenna at horizontal polarity. Then the turntable should be rotated to further increase this maximum reading. Repeat this procedure of raising and lowering the antenna and rotating the turntable until the highest possible signal has been obtained. The effect of the simulated accessory connections shall be noted, so that the measurement series producing the maximum radiation level can be recorded.

Test Setup	Appendix A	Figure A.3
-------------------	-------------------	-------------------


Plot 11.1 – Radiated Spurious Emissions, 30MHz – 1000MHz, With Accessories Horizontal

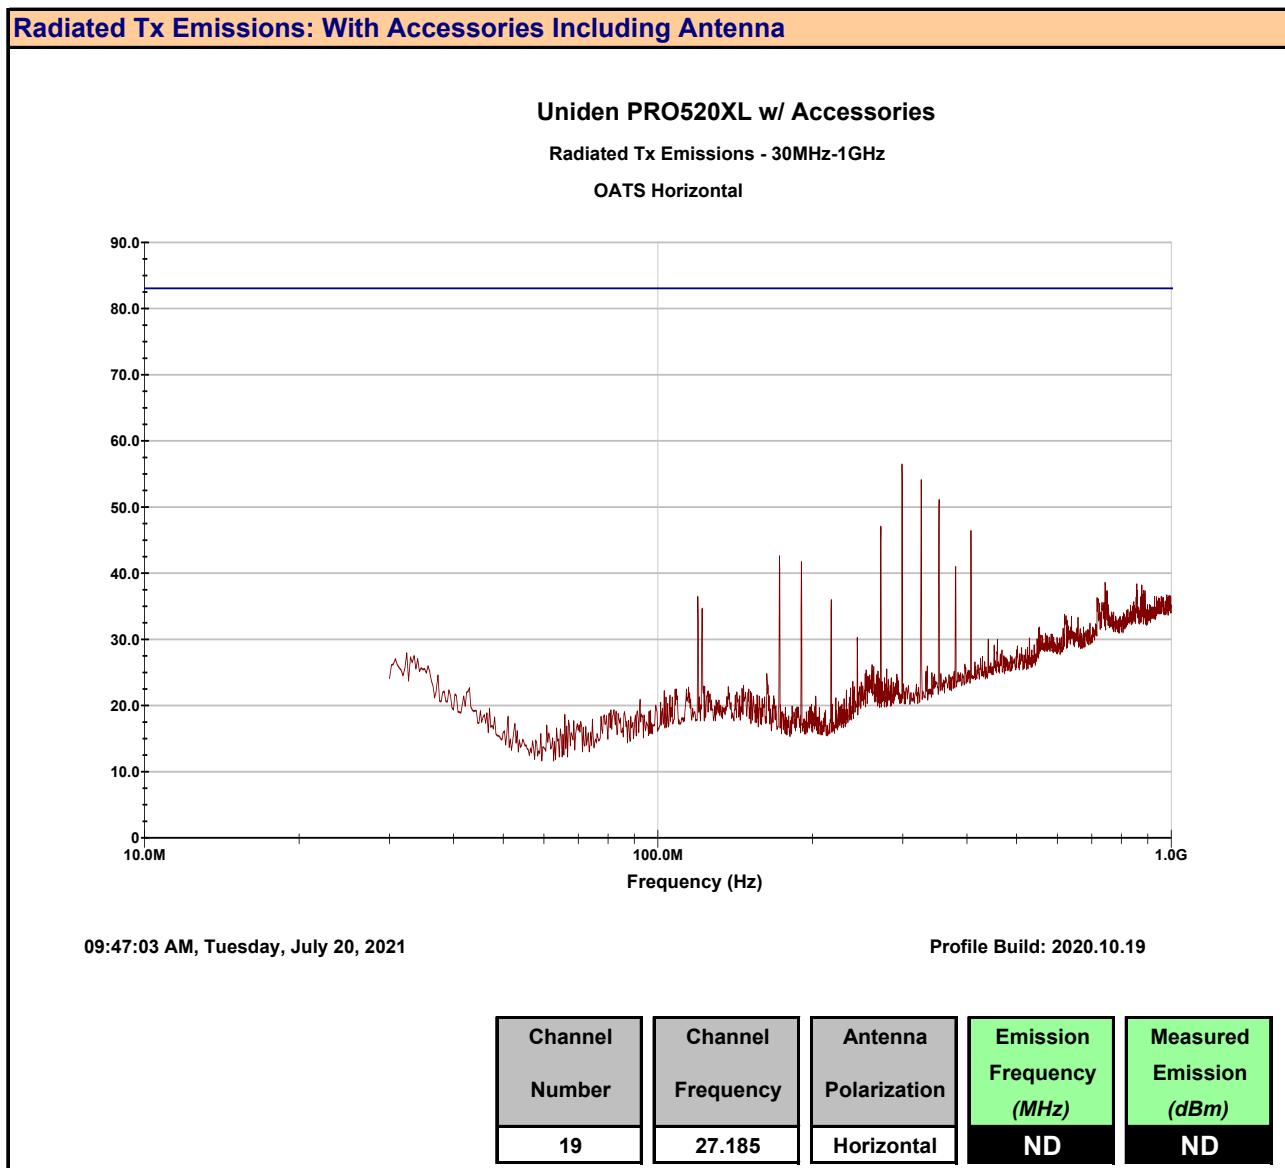

Plot 11.2 – Radiated Spurious Emissions, 30MHz – 1000MHz, With Accessories Vertical

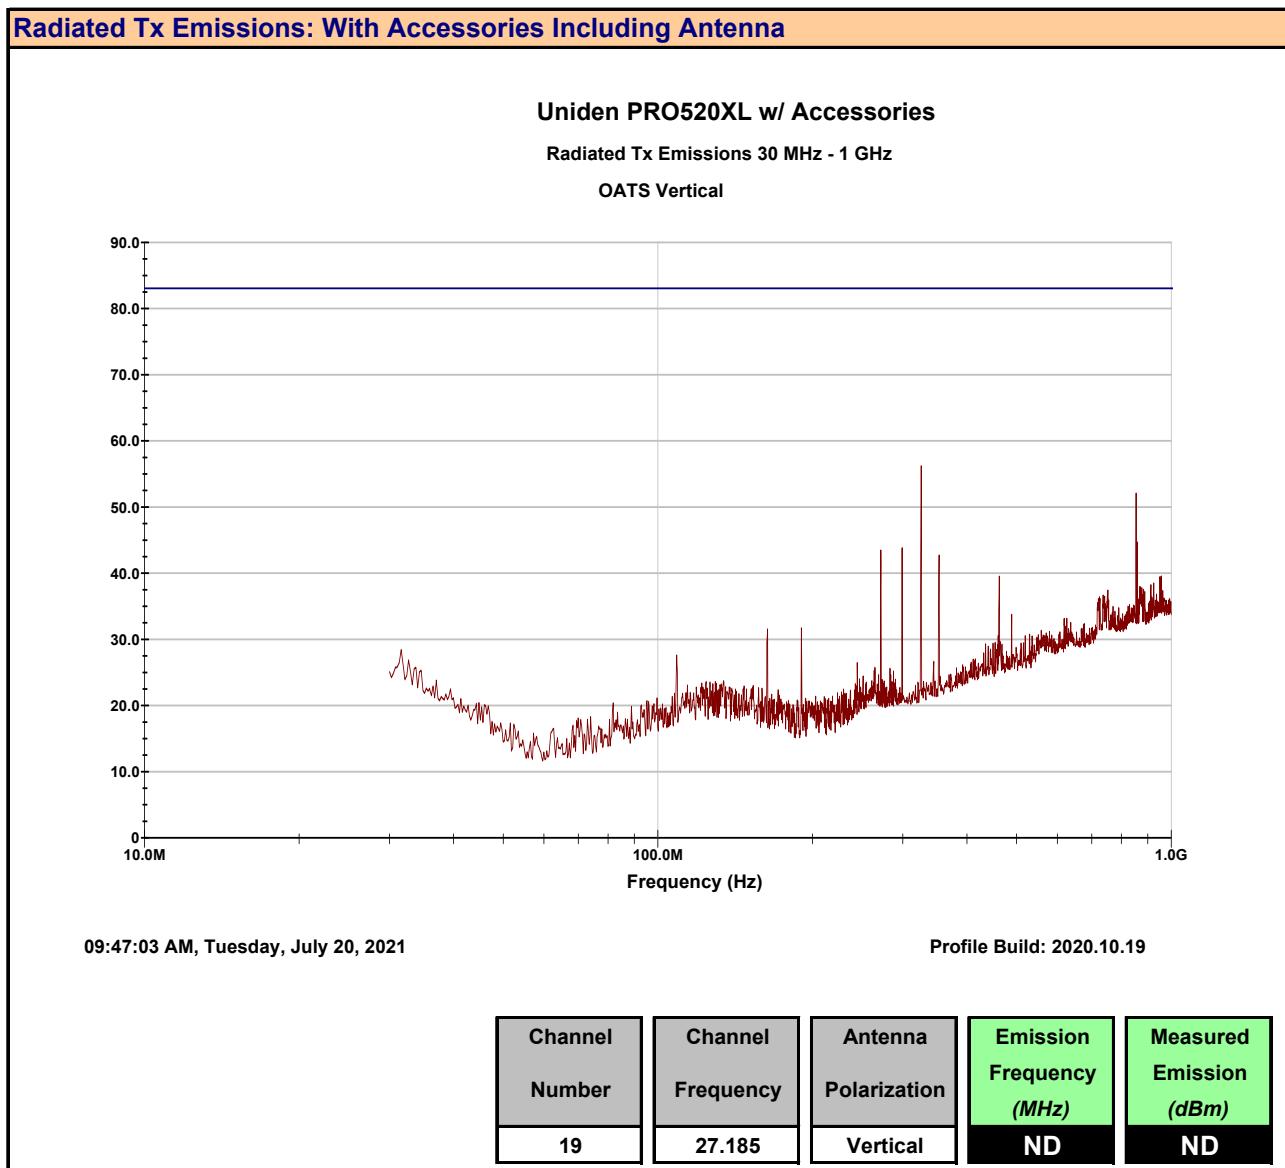

Plot 11.3 – Radiated Spurious Emissions, 30MHz – 1000MHz, Without Accessories Horizontal

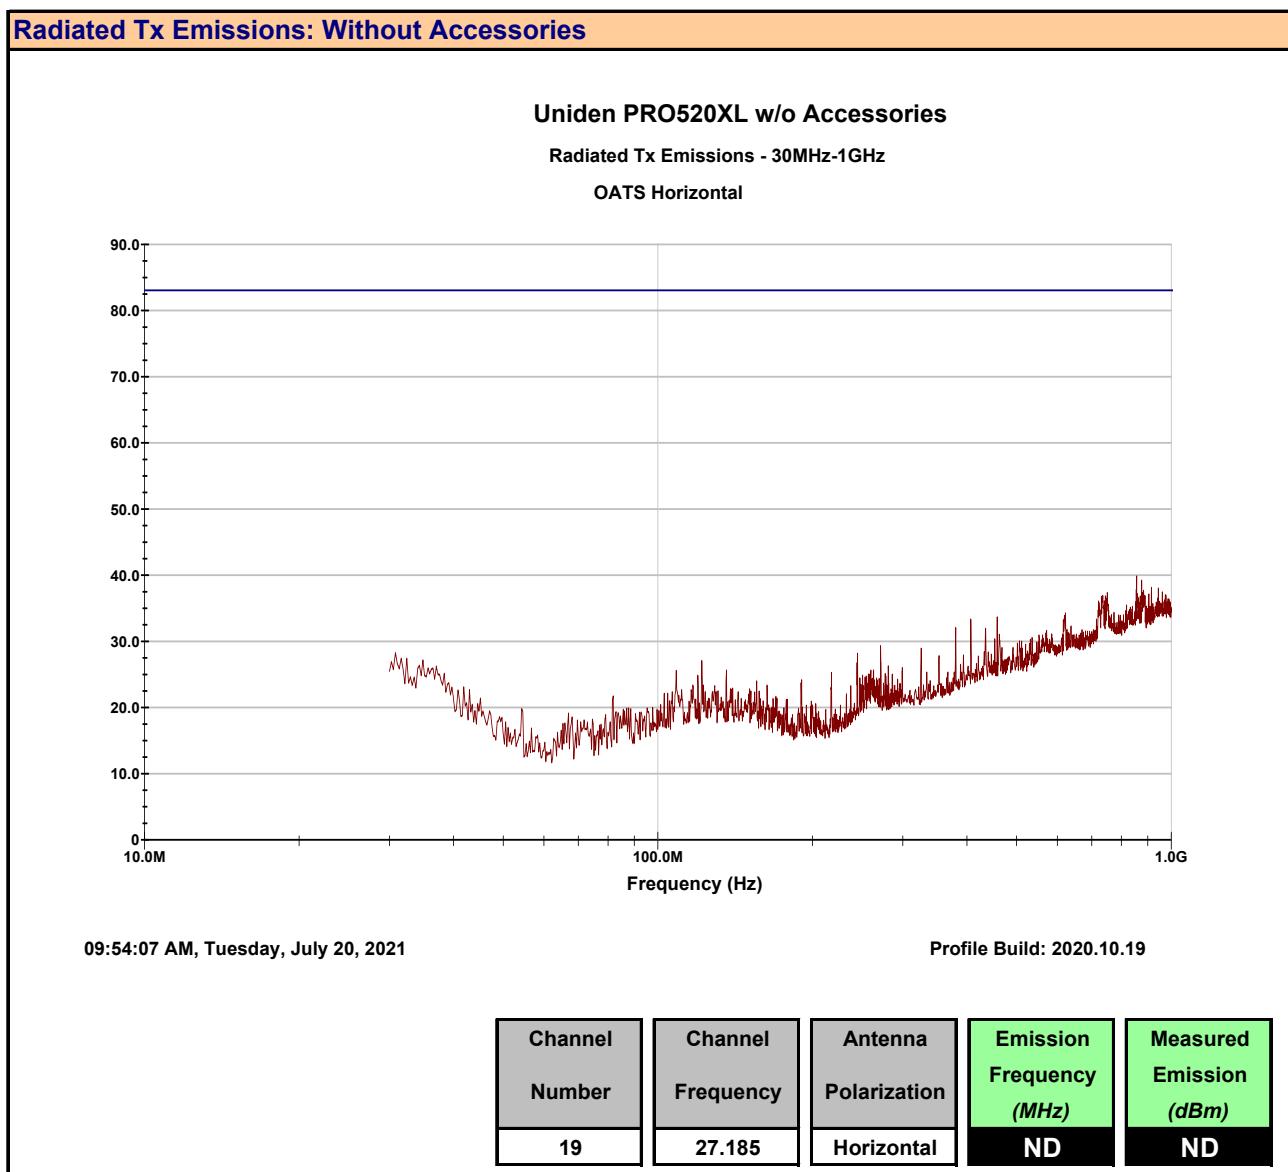

Plot 11.4 – Radiated Spurious Emissions, 30MHz – 1000MHz, Without Accessories Vertical

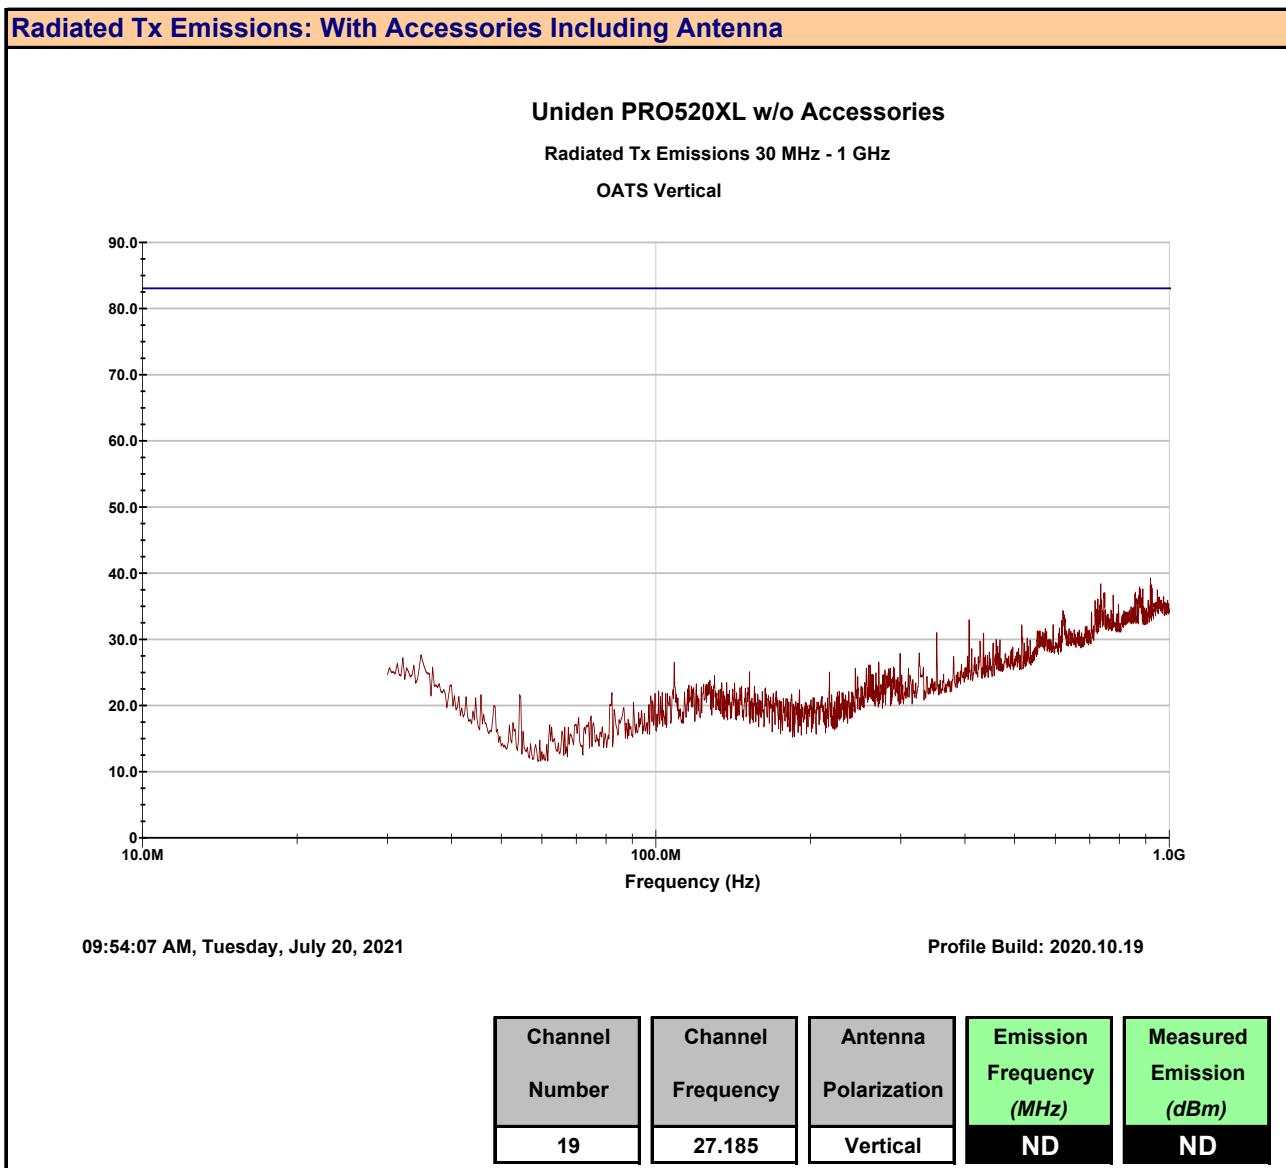


Table 11.1 – Summary of Radiated Spurious Emissions

Summary of Radiated Tx Emissions											
Measured Frequency Range (MHz)	Channel Frequency (MHz)	Antenna Polarization	Emission Frequency	Measured Emission [E _{Meas}] (dBuV)	Antenna ACF [ACF] (dB)	Cable Loss [L _C] (dB)	Amplifier Gain [G _A] (dB)	Corrected Emission [E _{corr}] (dBuV/m)	Limit (dBuV)	Margin (dB)	
30-1000MHz	27.185	Horizontal	ND	ND (1)	0.00	0.00	0.00 (3)	- (2)	83.0	-	
30-1000MHz	27.185	Horizontal	ND	ND (1)	0.00	0.00	0.00 (3)	- (2)	83.0	-	
30-1000MHz	27.185	Vertical	ND	ND (1)	0.00	0.00	0.00 (3)	- (2)	83.0	-	
30-1000MHz	27.185	Vertical	ND	ND (1)	0.00	0.00	0.00 (3)	- (2)	83.0	-	
										Results: Complies	

(1) No Emissions Detected (ND) above ambient or within 20dB of the limit

(2) Antenna ACF, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor


(3) External Amplifier not used

$$E_{\text{corr}} = E_{\text{Meas}} + ACF + L_C - G_A$$

12.0 RECEIVER RADIATED EMISSIONS - DOC

Test Procedure	
Normative Reference	FCC 47 CFR §15.109, ICES-003(6.2) ANSI C63.4:2014
Limits	
47 CFR §15.109	(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values: 30-88MHz: 40dB _u V/m 88-216MHz: 216-960MHz: > 960MHz: 54dB _u V/m
ICES-003(6.2.1)	6.2.1 - Radiated Emissions Limits Below 1 GHz Class B: ITE that does not meet the conditions for Class A operation shall comply with the Class B radiated limits set out in Table 5 determined at a distance of 3 metres. 30-88MHz: 40dB _u V/m 88-216MHz: 216-960MHz: > 960MHz: 54dB _u V/m
Test Setup	Appendix A Figure A.3
Measurement Procedure	
The DUT was set up as per ANSI C63.4:2014. Emissions were scanned between 30MHz and 1000MHz. The turntable was rotated 360 degrees and the antenna was elevated to 4m to optimize the measured emissions.	

Plot 12.1 – Receiver Radiated Emissions, With Accessories, Horizontal

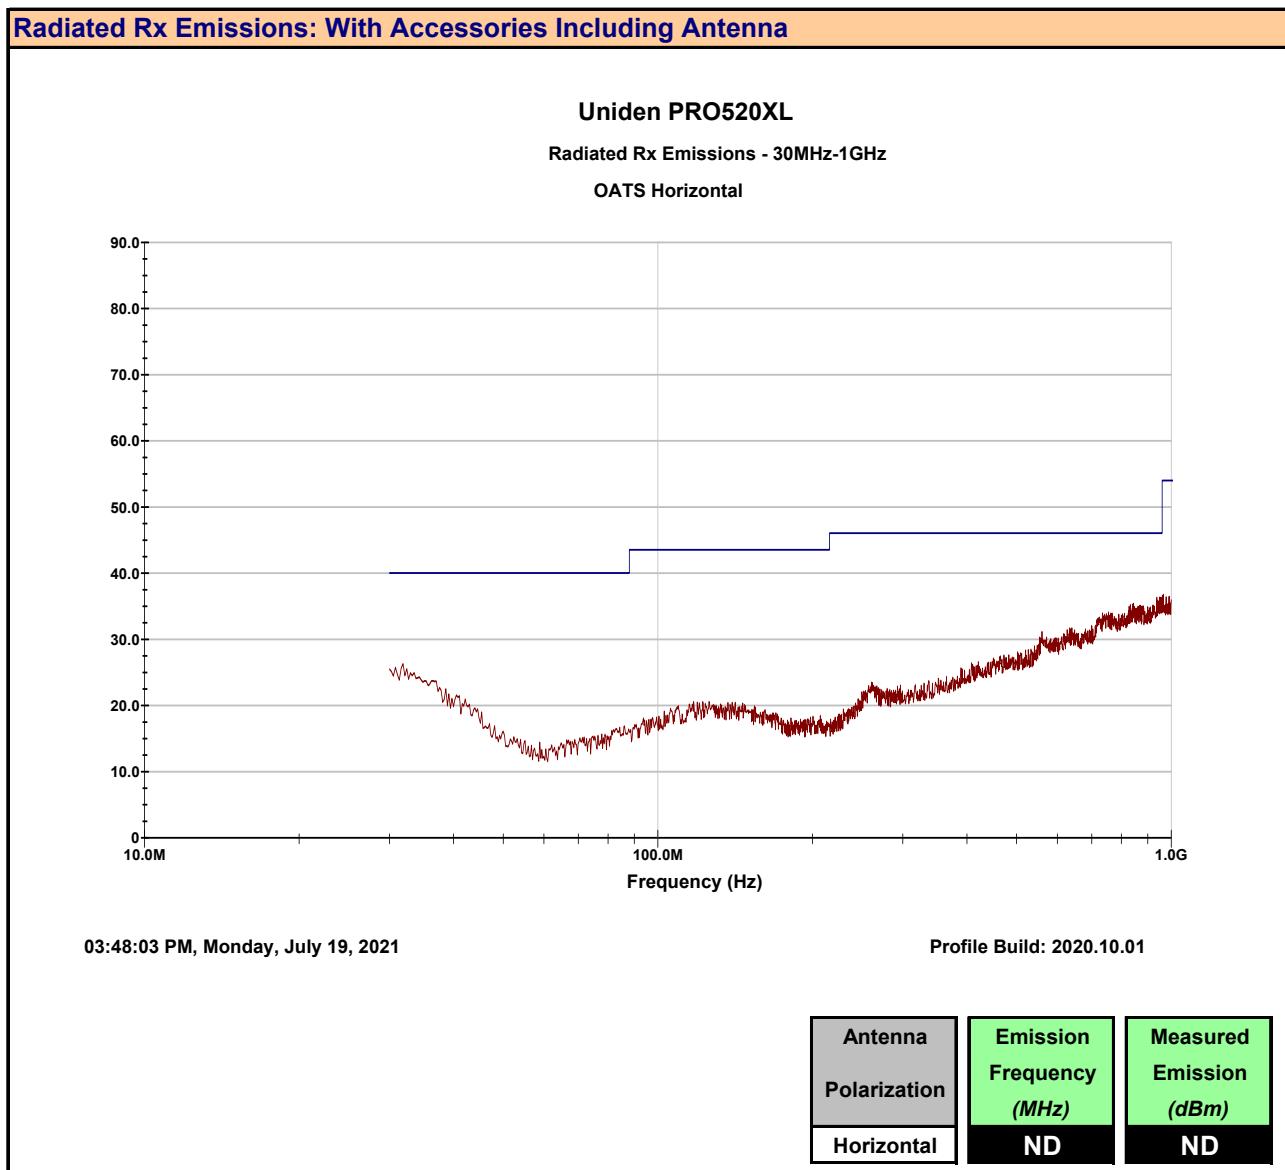

Plot 12.2 – Receiver Radiated Emissions, With Accessories, Vertical

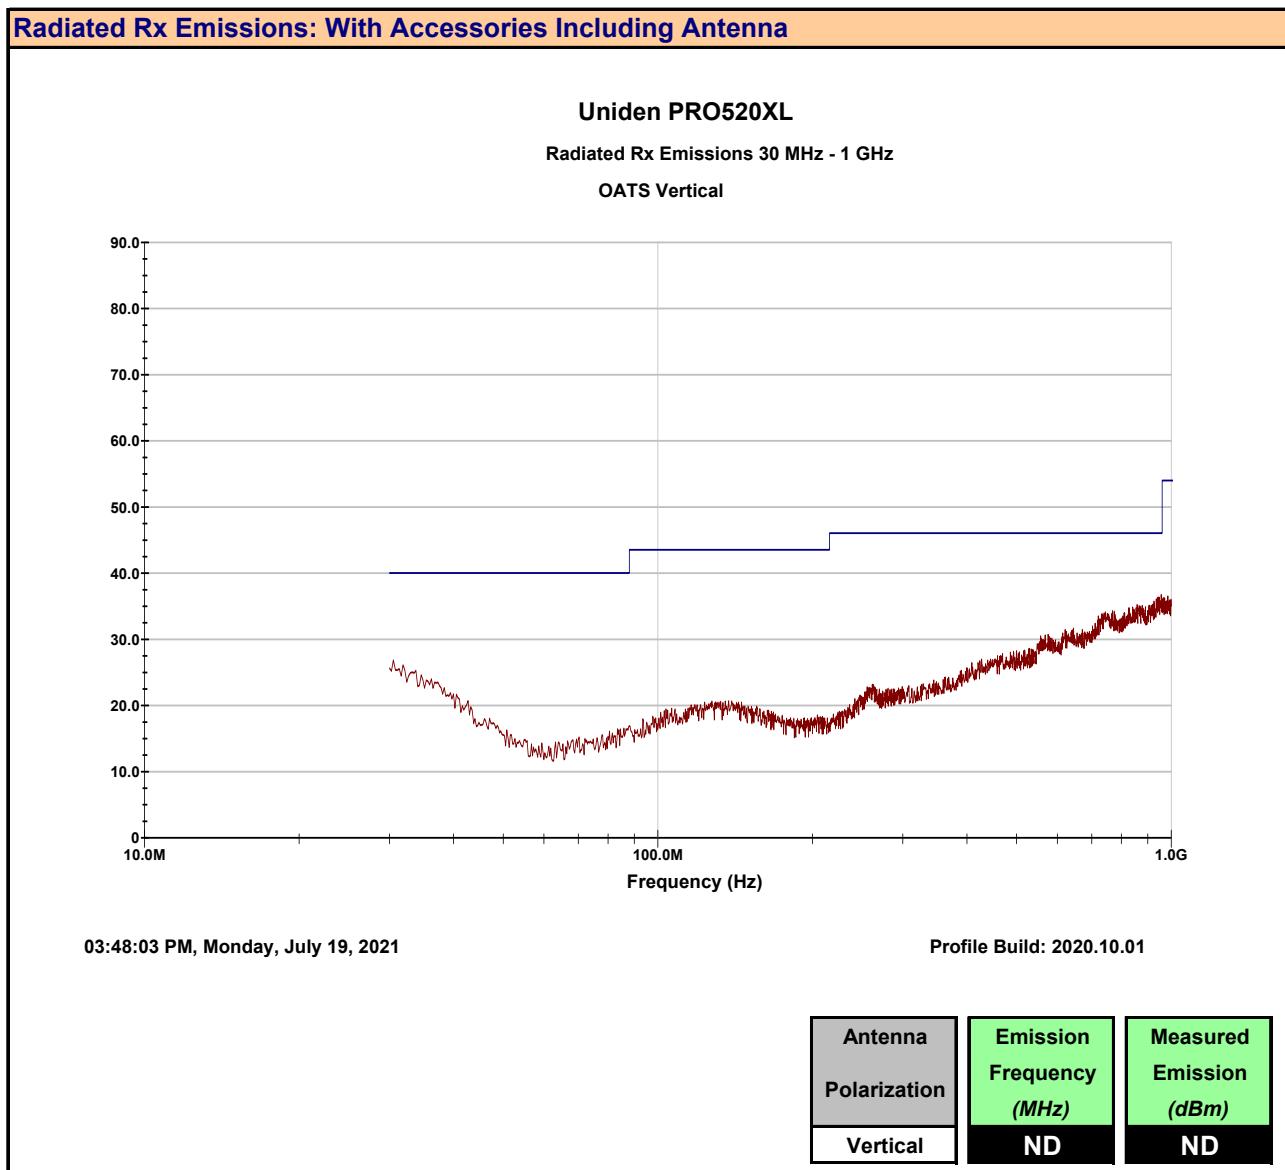


Table 12.1 – Summary of Receiver Radiated Emissions

Summary of Radiated Rx Emissions, FCC 15.109, ISED ICES-003 (6.2)										
Measured Frequency Range (MHz)	Channel Frequency (MHz)	Antenna Polarization	Emission Frequency	Measured Emission [E _{Meas}] (dBuV)	Antenna ACF [ACF]	Cable Loss [L _C]	Amplifier Gain [G _A]	Corrected Emission [E _{corr}] (dBuV/m)	Limit (dBuV)	Margin (dB)
30-1000MHz	-	Horizontal	ND	ND (1)	0.00	0.00	0.00 (3)	- (2)	83.0	-
30-1000MHz	-	Vertical	ND	ND (1)	0.00	0.00	0.00 (3)	- (2)	83.0	-
Results:										Complies

(1) No Emissions Detected (ND) above ambient or within 20dB of the limit

(2) Antenna ACF, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + ACF + L_C - G_A$$

13.0 FREQUENCY STABILITY

Test Conditions

Normative Reference FCC 47 CFR §2.1055, §95.965, RSS-Gen

Limits

47 CFR §95.965

Each CBRS transmitter type must be designed such that the transmit carrier frequency (or in the case of SSB transmissions, the reference frequency) remains within 50 parts-per-million of the channel center frequencies specified in §95.963 under all normal operating conditions.

Measurement Procedure

47 CFR §2.1055 Frequency Stability

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30° to +50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- (b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:


- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

Test Setup

Appendix A

Figure A.4

Table 12.1 – Summary of Frequency Stability Results

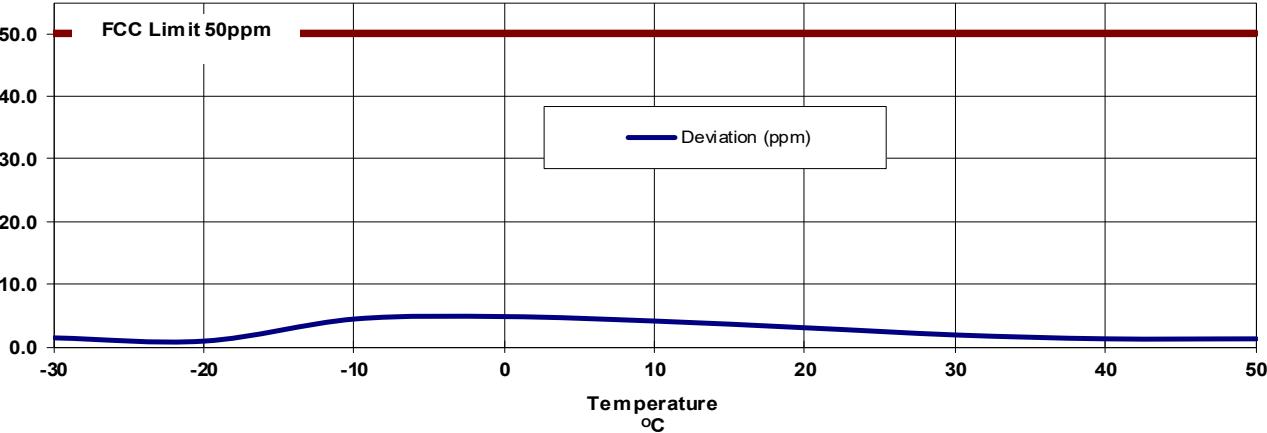Frequency Stability								
Nominal Frequency (MHz):	27.185							
Nominal Channel BW (KHz):	CW							
Nominal Voltage (VDC):	13.8							
Nominal Temperature (°C):	20							
								
Frequency Stability Measurements (Temperature)								
Temp (°C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	Deviation (Hz)	Deviation [Absolute] (ppm)				
-30	27.185000	27.184962	-38	1.42				
-20		27.185025	25	0.92				
-10		27.185118	118	4.34				
0		27.185129	129	4.73				
10		27.185109	109	4.02				
20		27.185081	81	2.99				
30		27.185051	51	1.88				
40		27.185035	35	1.27				
50		27.185034	34	1.26				
Maximum Deviation:		4.73						
Maximum Limit:		50.00						
Result:		Complies						
Frequency Stability Measurements (Voltage)								
Voltage (VDC)	Assigned Frequency (MHz)	Measured Frequency (MHz)	Deviation (Hz)	Deviation [Absolute] (ppm)				
15.9 (115%)	27.185000	27.185023	23	0.83				
13.8 (100%)		27.185081	81	2.99				
11.7 (85%)		27.185083	83	3.04				
Maximum Deviation:				3.04				
Maximum Limit:				50.00				
Result:				Complies				

APPENDIX A – TEST SETUP DRAWINGS AND EQUIPMENT

Table A.1 – Setup - Conducted Measurements Equipment

Equipment List			
Asset Number	Manufacturer	Model Number	Description
00241	R&S	FSU40	Spectrum Analyzer

Figure A.1 – Test Setup Conducted Measurements

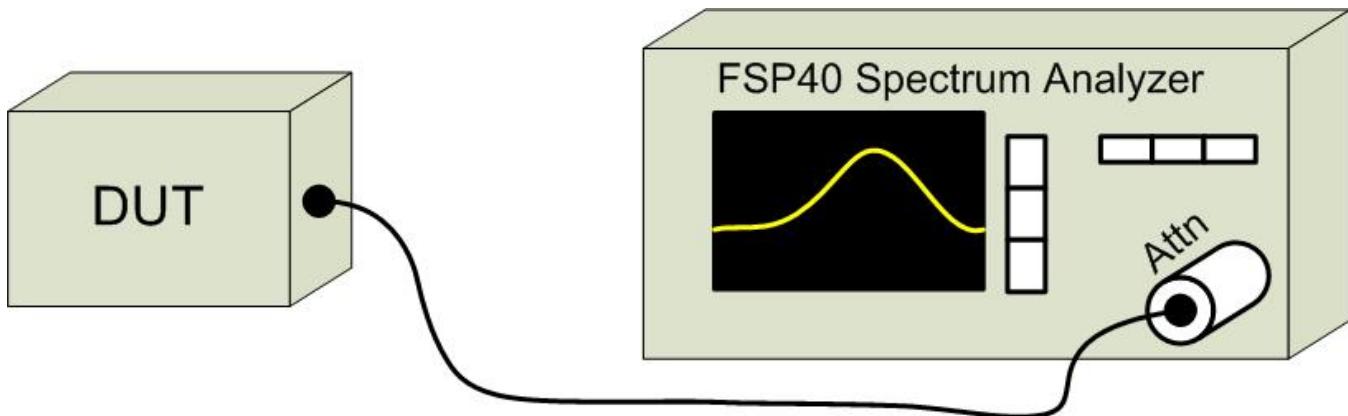


Table A.2 – Setup - Audio Modulation Equipment

Equipment List			
Asset Number	Manufacturer	Model Number	Description
00028	HP	8901A	Modulation Analyzer
00027	HP	8903B	Audio Analyzer/Generator

Figure A.2 – Test Setup Audio Modulation Response Measurements

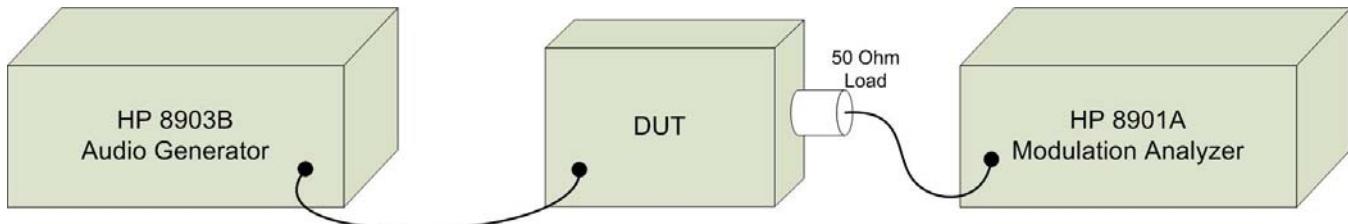


Table A.3 – Setup - Radiated Emissions Equipment

Equipment List			
Asset Number	Manufacturer	Model Number	Description
00051	HP	8566B	Spectrum Analyzer
00049	HP	85650A	Quasi-peak Adapter
00047	HP	85685A	RF Preselector
00072	EMCO	2075	Mini-mast
00073	EMCO	2080	Turn Table
00071	EMCO	2090	Multi-Device Controller
00265	Miteq	JS32-00104000-58-5P	Microwave L/N Amplifier
00241	R&S	FSU40	Spectrum Analyzer
00050	Chase	CBL-6111A	Bilog Antenna
00275	Coaxis	LMR400	25m Cable
00276	Coaxis	LMR400	4m Cable
00278	TILE	34G3	TILE Test Software
00034	ETS	3115	Double Ridged Guide Horn

CNR: Calibration Not Required

COU: Calibrate On Use

Figure A.3 – Test Setup Radiated Emissions Measurements

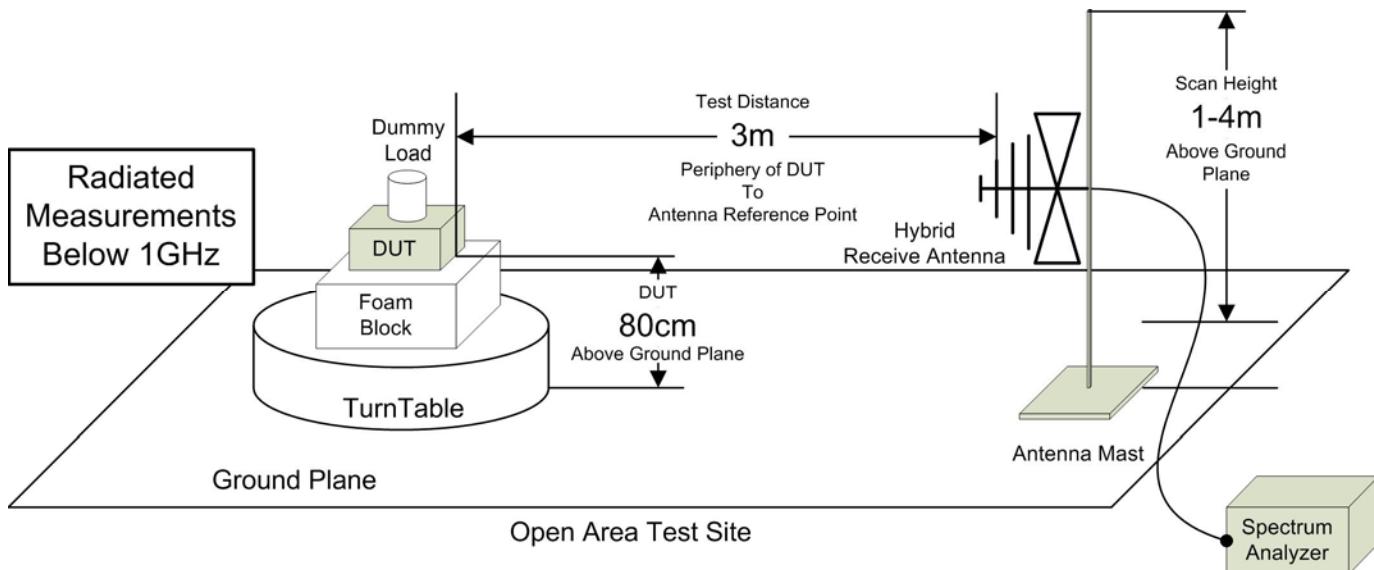


Figure A.4 – Test Setup Radiated Emissions Measurements w/ Signal Substitution


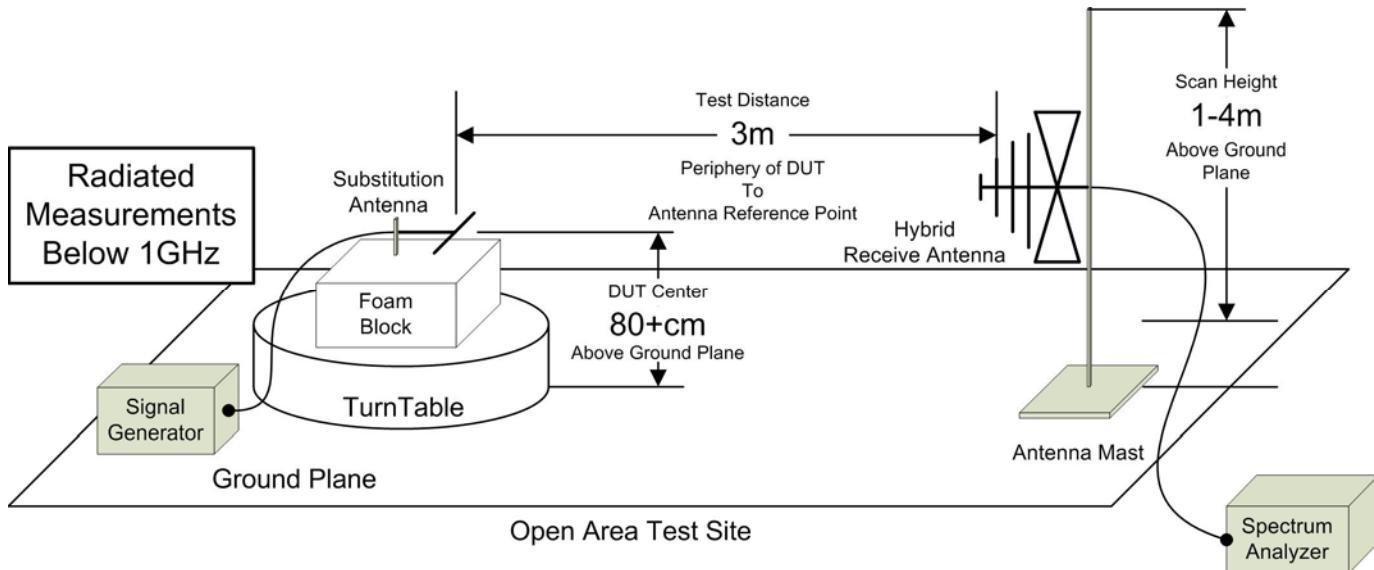


Table A.4 – Setup - Frequency Stability Measurement Equipment

Equipment List			
Asset Number	Manufacturer	Model Number	Description
n/a	ESPEC	ECT-2	Environmental Chamber
00003	HP	53181A	Frequency Counter
n/a	HP	E3611A	Power Supply
00234	VWR	61161-378	Temp/Humidity Meter

Figure A.4 – Test Setup Frequency Stability Measurements

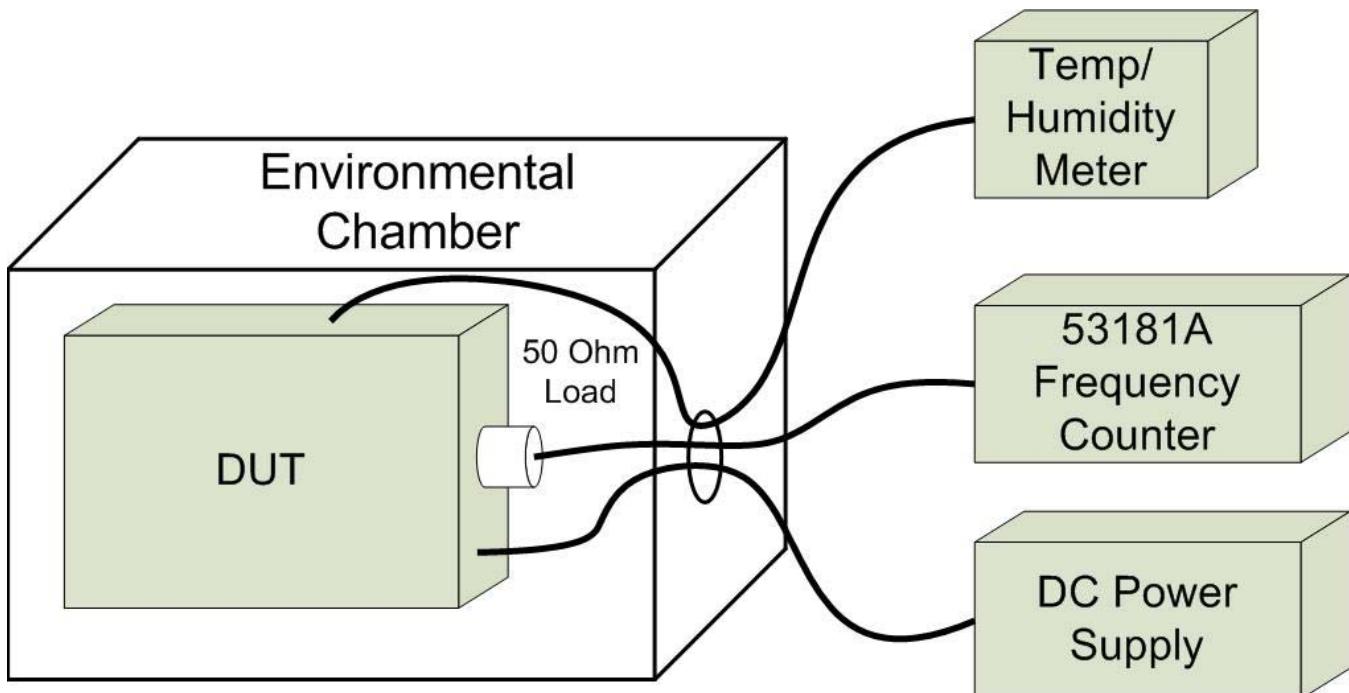

APPENDIX B – EQUIPMENT LIST AND CALIBRATION

Equipment List							
Asset Number	Manufacturer	Model Number	Serial Number	Description	Last Calibrated	Calibration Interval	Calibration Due
00050	Chase	CBL-6111A	1607	Bilog Antenna	3 Jan 2019	Triennial	3 Jan 2022
00333	HP	85685A	3010A01095	RF Preselector	23 Jun 2020	Triennial	30 Jun 2023
00049	HP	85650A	2043A00162	Quasi-peak Adapter	23 Jun 2020	Triennial	23 Jun 2023
00051	HP	8566B	2747A05510	Spectrum Analyzer	23 Jun 2020	Triennial	23 Jun 2023
00223	HP	8901A	3749A07154	Modulation Analyzer	27 Dec 2017	Triennial	27 Dec 2020
00224	HP	8903B	3729A18691	Audio Analyzer	28 Dec 2017	Triennial	28 Dec 2020
00241	R&S	FSU40	100500	Spectrum Analyzer	15 May 2018	Triennial	15 Aug 2021
00005	HP	8648D	3847A00611	Signal Generator	23 Jun 2020	Triennial	23 Jun 2023
00003	HP	53181A	3736A05175	Frequency Counter	23 Jun 2020	Triennial	23 Jun 2023
00071	EMCO	2090	9912-1484	Multi-Device Controller	n/a	n/a	n/a
00072	EMCO	2075	0001-2277	Mini-mast	n/a	n/a	n/a
00073	EMCO	2080	0002-1002	Turn Table	n/a	n/a	n/a
00081	ESPEC	ECT-2	0510154-B	Environmental Chamber	NCR	n/a	CNR
00234	VWR	61161-378	140320430	Temp/Humidity Meter	New	Triennial	New
00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable	COU	n/a	COU
00263B	Koaxis	KP10-1.00M-TD	263B	1m Armoured Cable	COU	n/a	COU
00264	Koaxis	KP10-7.00M-TD	264	7m Armoured Cable	COU	n/a	COU
00275	TMS	LMR400	n/a	25m Cable	COU	n/a	COU
00278	TILE	34G3	n/a	TILE Test Software	NCR	n/a	NCR

NCR: No Calibration Required

COU: Calibrate On Use

APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY

CISPR 16-4 Measurement Uncertainty (U_{LAB})

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence interval using a coverage factor of $k=2$

Radiated Emissions 30MHz - 200MHz

$U_{LAB} = 5.14\text{dB}$ $U_{CISPR} = 6.3\text{dB}$

Radiated Emissions 200MHz - 1000MHz

$U_{LAB} = 5.90\text{dB}$ $U_{CISPR} = 6.3\text{dB}$

Radiated Emissions 1GHz - 6GHz

$U_{LAB} = 4.80\text{dB}$ $U_{CISPR} = 5.2\text{dB}$

Radiated Emissions 6GHz - 18GHz

$U_{LAB} = 5.1\text{dB}$ $U_{CISPR} = 5.5\text{dB}$

Power Line Conducted Emissions 9kHz to 150kHz

$U_{LAB} = 2.96\text{dB}$ $U_{CISPR} = 3.8\text{dB}$

Power Line Conducted Emissions 150kHz to 30MHz

$U_{LAB} = 3.12\text{dB}$ $U_{CISPR} = 3.4\text{dB}$

If the calculated uncertainty U_{lab} is **less** than U_{CISPR} then:

1 Compliance is deemed to occur if **NO** measured disturbance exceeds the disturbance limit

2 Non-Compliance is deemed to occur if **ANY** measured disturbance **EXCEEDS** the disturbance limit

If the calculated uncertainty U_{lab} is **greater** than U_{CISPR} then:

3 Compliance is deemed to occur if **NO** measured disturbance, increased by $(U_{lab} - U_{CISPR})$, exceeds the disturbance limit

4 Non-Compliance is deemed to occur if **ANY** measured disturbance, increased by $(U_{lab} - U_{CISPR})$, **EXCEEDS** the disturbance limit

Other Measurement Uncertainties (U_{LAB})

RF Conducted Emissions 9kHz - 40GHz

$U_{LAB} = 1.0\text{dB}$ $U_{CISPR} = \text{n/a}$

Frequency/Bandwidth 9kHz - 40GHz

$U_{LAB} = 0.1\text{ppm}$ $U_{CISPR} = \text{n/a}$

Temperature

$U_{LAB} = 1^\circ\text{C}$ $U_{CISPR} = \text{n/a}$

END OF REPORT